


Changing Station URL

*if you are removing an Ethernet cable from the red SBC card make sure to replace it after this configuration has been preformed.

1. Switch unit from operation mode into maintenance mode.

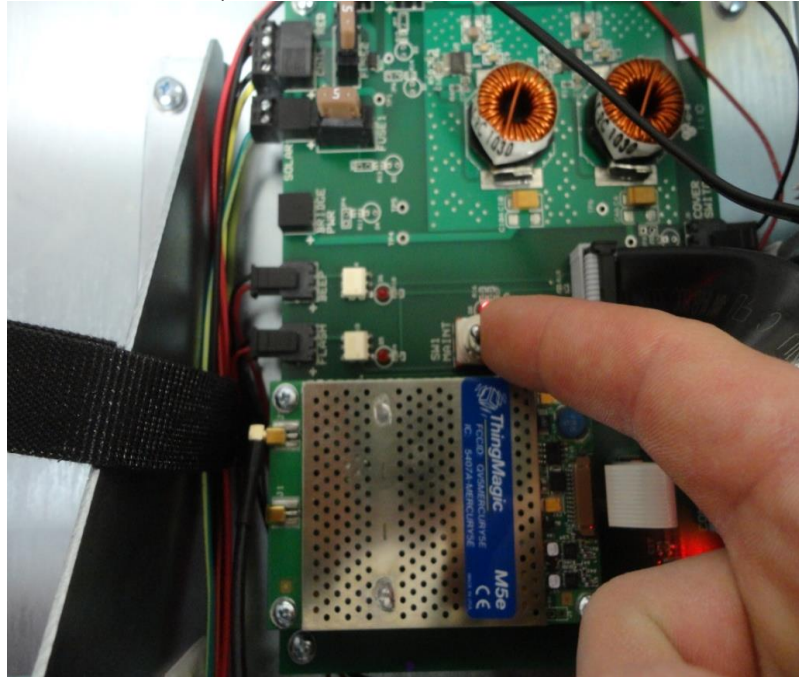

2. Attach Ethernet cable from SBC card to computer.
 - a. Change network setting. For Windows7, go to Control Panel > Network and Internet > Network and Sharing Center, click Local Area Connection, click Internet Protocol v4, click Properties, Select use following IP Address and enter:
IP Address: 192.168.1.10
Subnet mask: 255.255.255.0
Gateway: 192.168.1.50
Click okay.
Open Internet Explorer and in the address bar type: 192.168.1.50
3. Record Station ID, this is the MAC address from SBC card

The screenshot shows a web browser window titled "Dero Zap! Configuration - Windows Internet Explorer". The address bar shows "http://192.168.1.50/". The page has a blue header with the title "Dero Zap! Configuration". Below the header, there is a section titled "Zap! Settings" with the following fields: "Station ID:" with the value "00:D0:69:49:85:4F", "Zap! Server URL:" with the value "https://derostation:4j6H3kpWnH7@www.derozap.com/zap/", and "Read Power:" with the value "3000" and the unit "centi-dBm". Below this is a section titled "Network Settings" with two radio buttons: "Configure Automatically (DHCP)" (selected) and "Configure Manually (Static IP)". Under the manual configuration section, there are input fields for "IP Address:", "Subnet Mask:", "Default Gateway:", "DNS Server 1:", and "DNS Server 2:", each with a small table of four input boxes. The browser's status bar at the bottom shows "Done" and "Internet".

Dero Zap! Configuration

Zap! Settings

Station ID: 00:D0:69:49:85:4F
Zap! Server URL: <https://derostation:4j6H3kpWnH7@www.derozap.com/zap/>
Read Power: 3000 centi-dBm

Network Settings

☒ Configure Automatically (DHCP)
☐ Configure Manually (Static IP)

IP Address:

--	--	--	--

Subnet Mask:

--	--	--	--

Default Gateway:

--	--	--	--

DNS Server 1:

--	--	--	--

DNS Server 2:

--	--	--	--

4. Change the "Zap! Server URL" to this exact URL:
<https://derostation:4j6H3kpWnH7@www.derozap.com/zap/>
5. Scroll to the bottom of the page and click "Apply Settings"
6. Switch unit back into operation mode and close unit.