

FRIDA

Frida LAB 7

Objective

In Challenge 0x7, the application validates the value returned by a method in another Java class instead of MainActivity. The goal is to identify the target class and hook its method so that it returns the expected value.

This challenge introduces hooking methods across different classes in the application.

Install the APK

Install the application on your rooted Android device or emulator.

```
adb install FridaLab.apk
```


Launch the Application

Decompile the APK

Open the APK in JADX.


```
jadx-gui FridaLab.apk
```

Browse the source code.

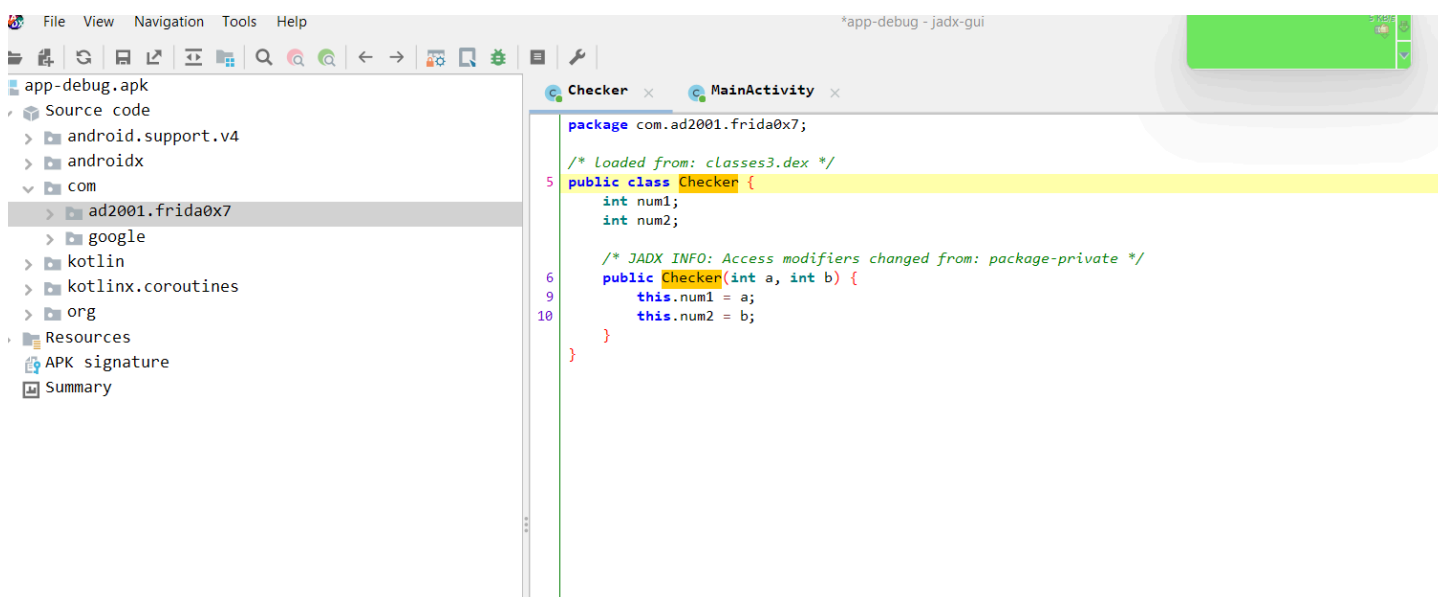

Write the Frida Script

Create a file.

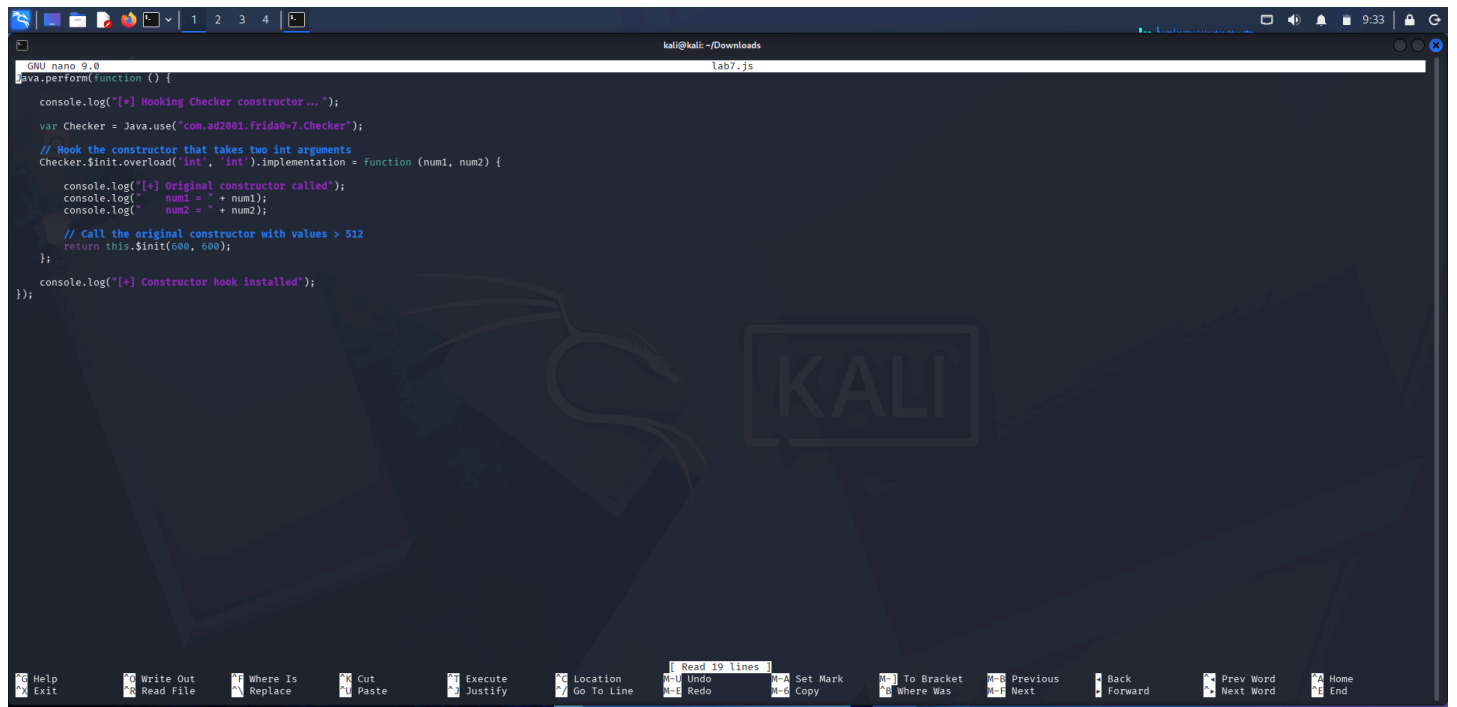

```
GNU nano 9.0
lab7.js
Java.perform(function () {
  console.log("[*] Hooking Checker constructor...");
  var Checker = Java.use("com.ad2001.frida0x7.Checker");
  // Hook the constructor that takes two int arguments
  Checker.$init.overload('int', 'int').implementation = function (num1, num2) {
    console.log("[*] Original constructor called");
    console.log("  num1 = " + num1);
    console.log("  num2 = " + num2);
    // Call the original constructor with values > 512
    return this.$init(600, 600);
  };
  console.log("[*] Constructor hook installed");
});
```

D:\Downlaods> adb shell

generic_x86:/ # cd /data/local

local.prop local/

generic_x86:/ # cd /data/local/tmp/


generic_x86:/data/local/tmp # ls

generic_x86:./frida

Run Frida

Start the application with Frida.

frida -U -f uk.rossmarks.fridalab -l challenge7.js

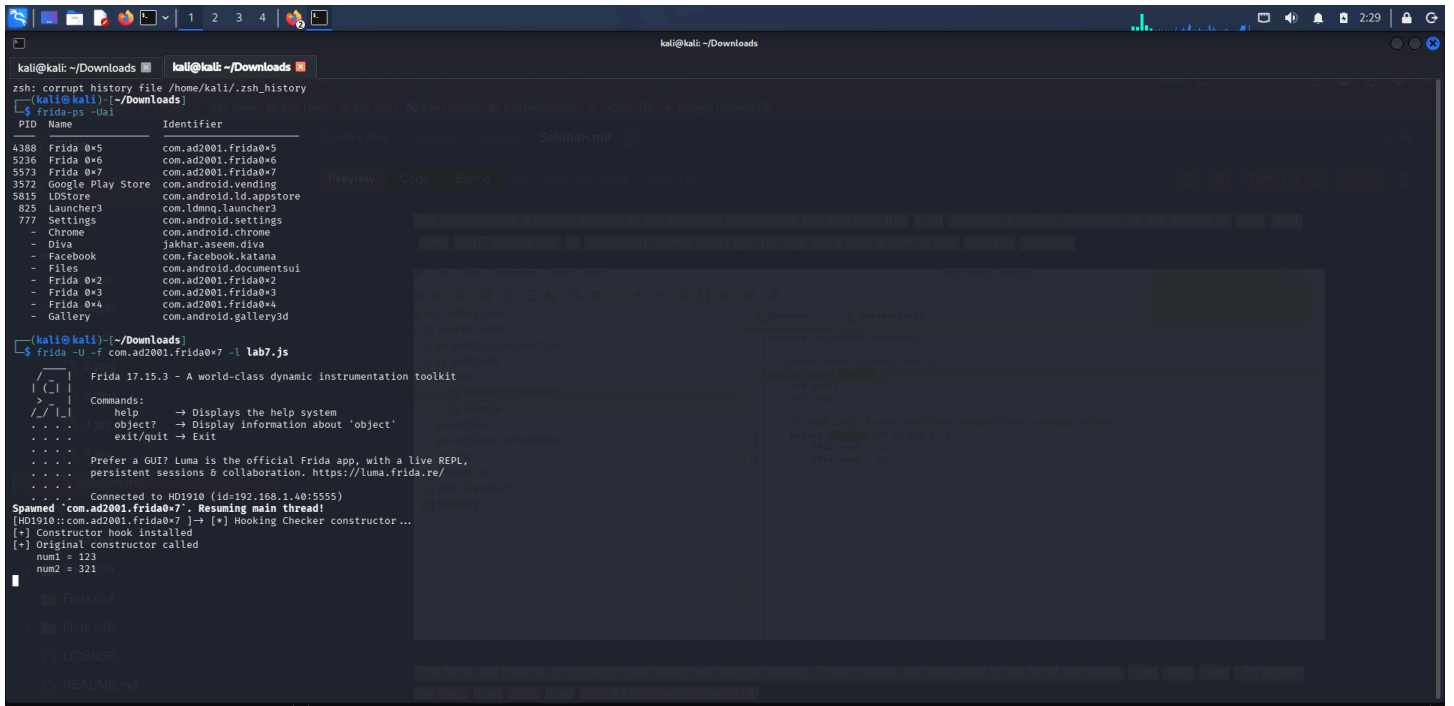

Final output look likes :

