
CIS Practical Week 2


Launching Instance - Amazon, Windows , Linux and Creation of the S3 Storage

AMAZON


Step 1 : Launch an instance and name it

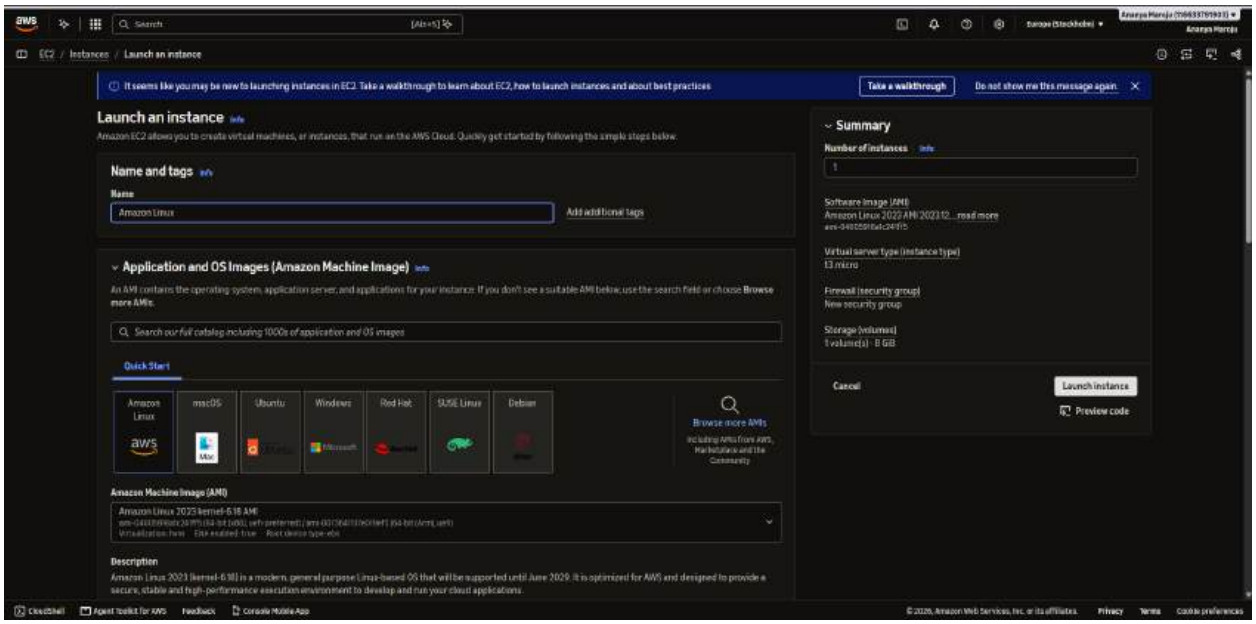


Step 2 : Create a key pair

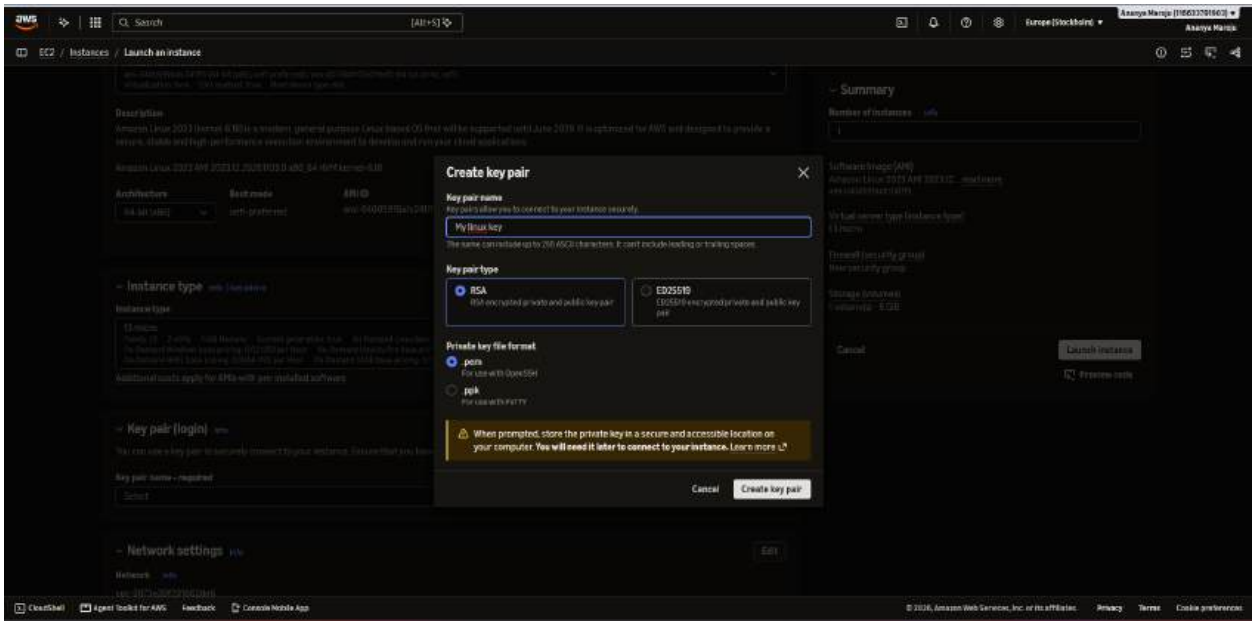


Step 3 : Click on create a new key pair

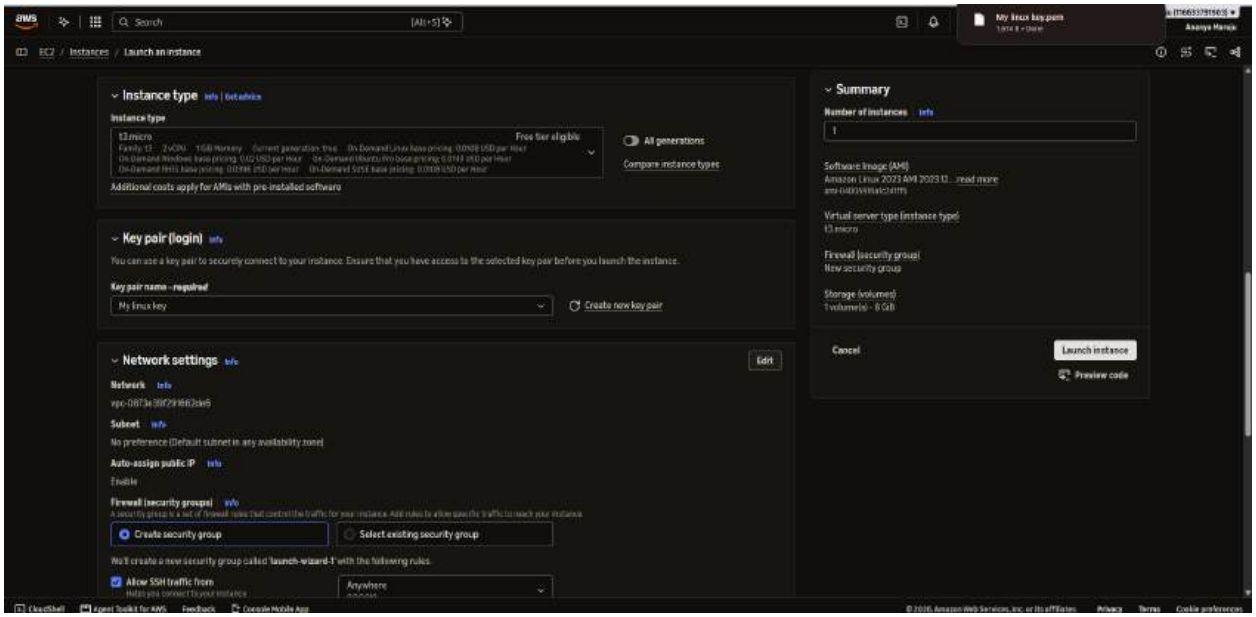


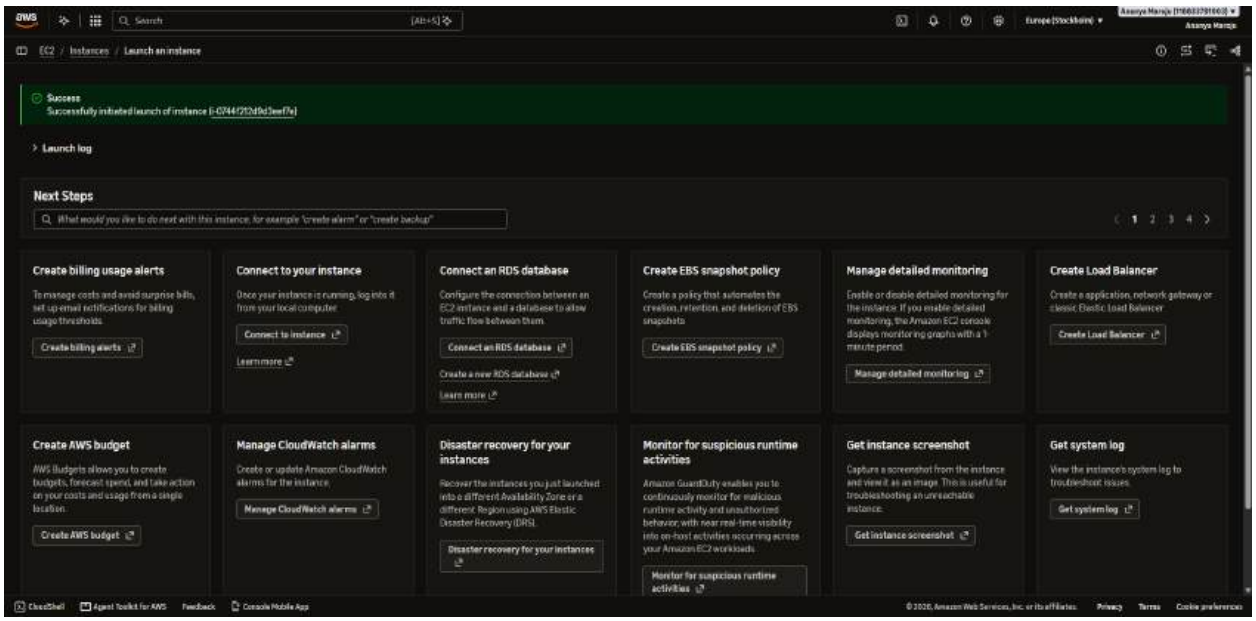


Step 4 : Go back to Instances and select your instance and click on connect

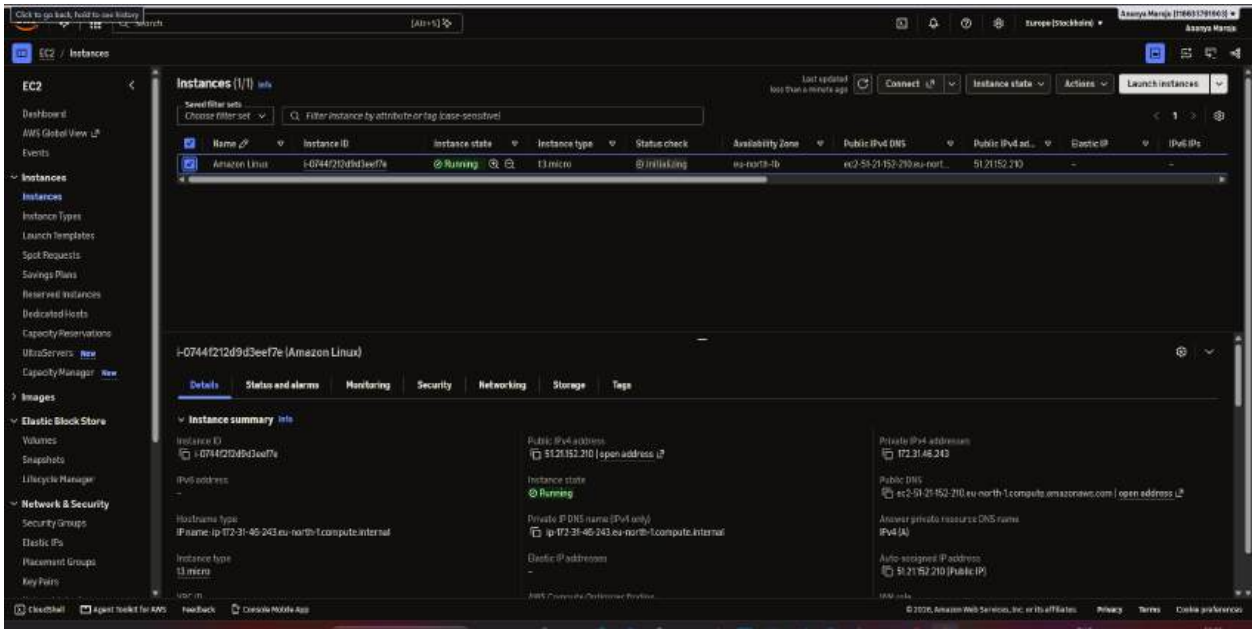


Step 5 : Make sure the tests pass and then click on connect

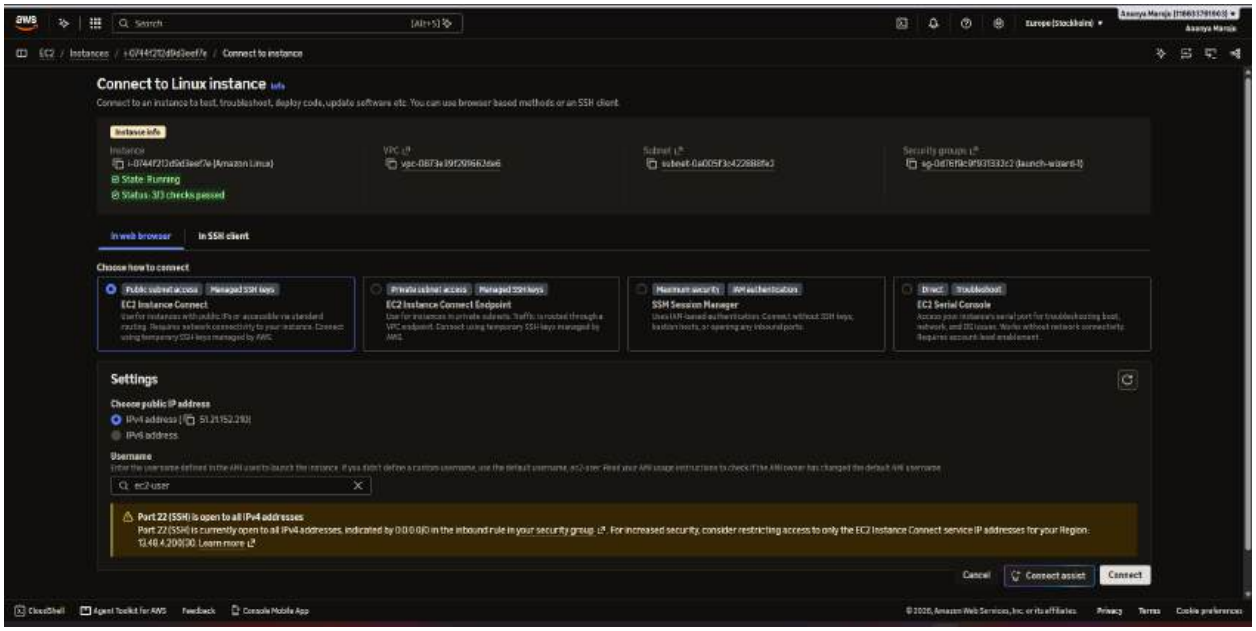

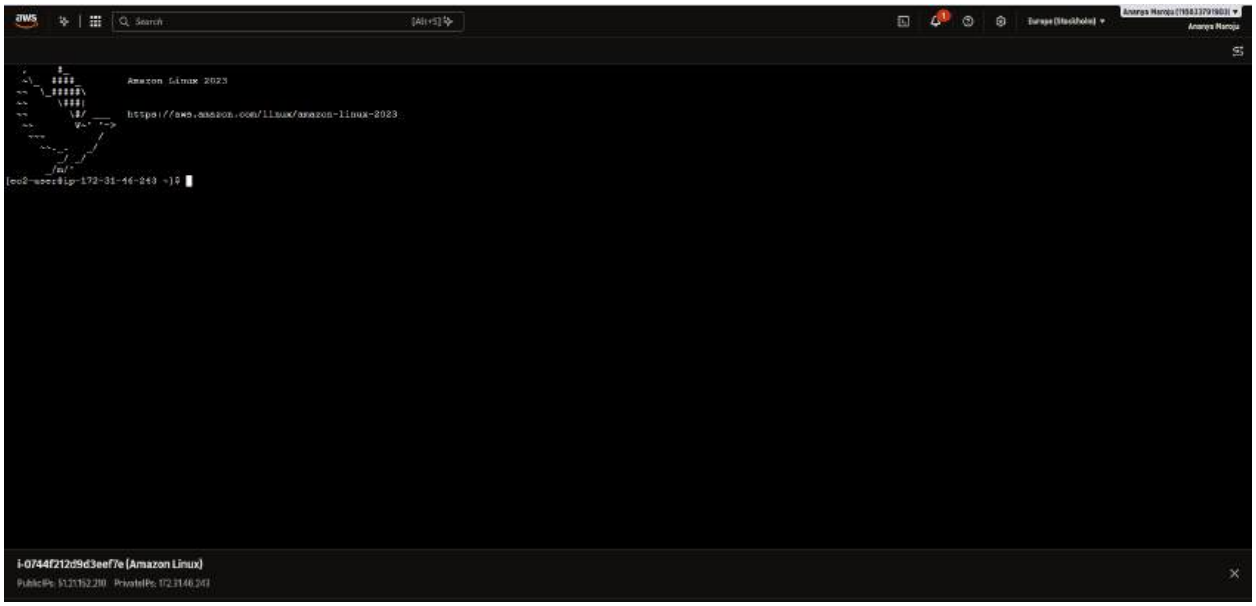


Step 6 : Click on Instance status and stop the instance

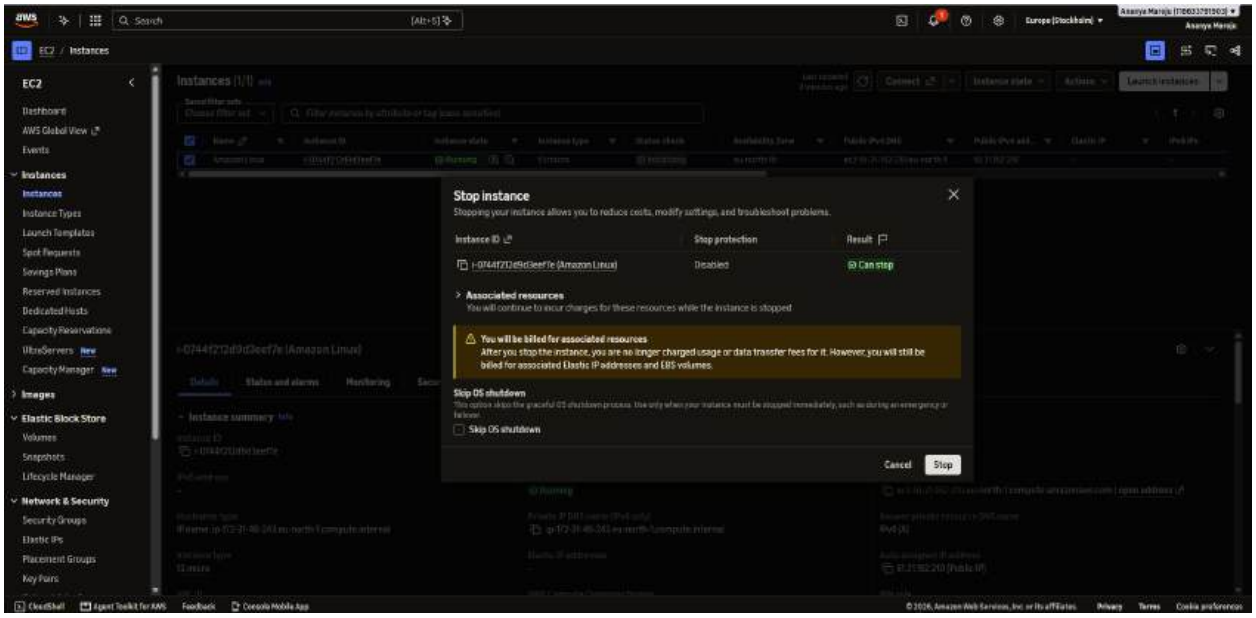



WINDOWS

Step 1 : Launch an instance and select Windows

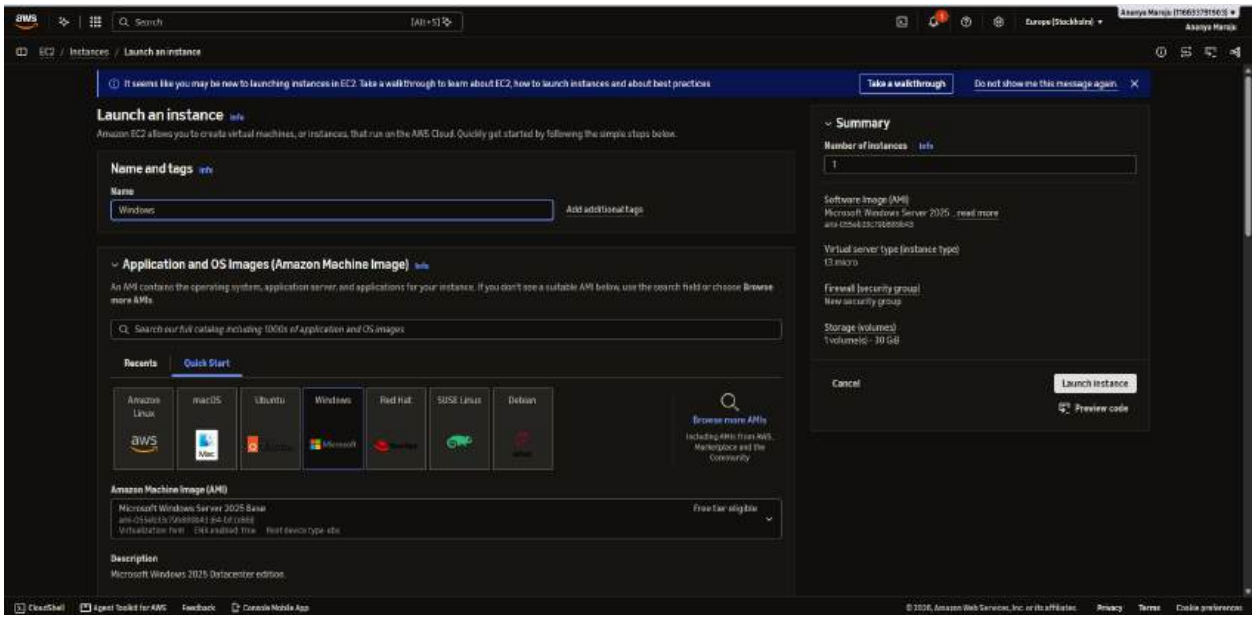


Step 2 : Create a new key pair , name it too

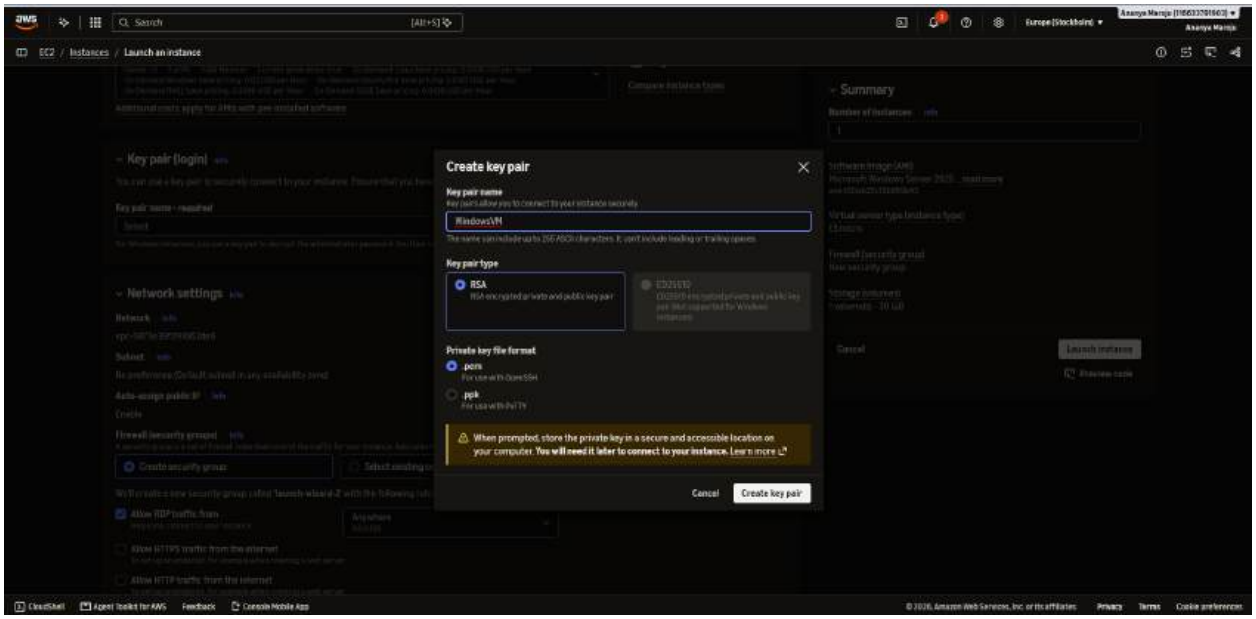


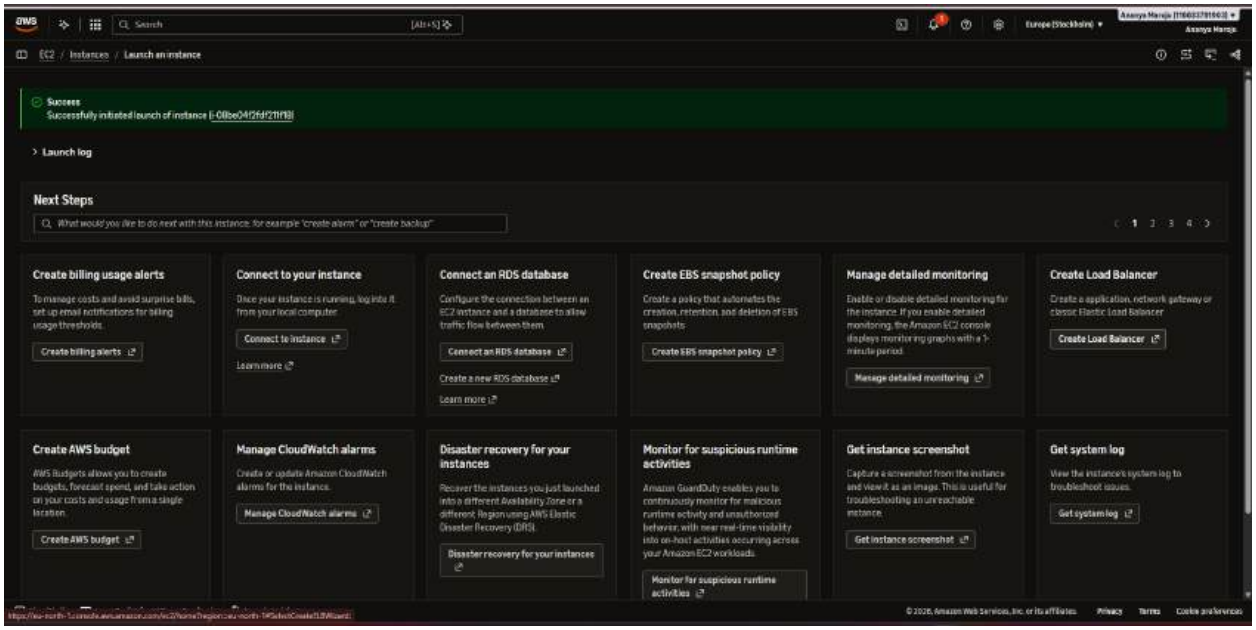


Step 3 : Go back to instances and select the windows instance and click on connect

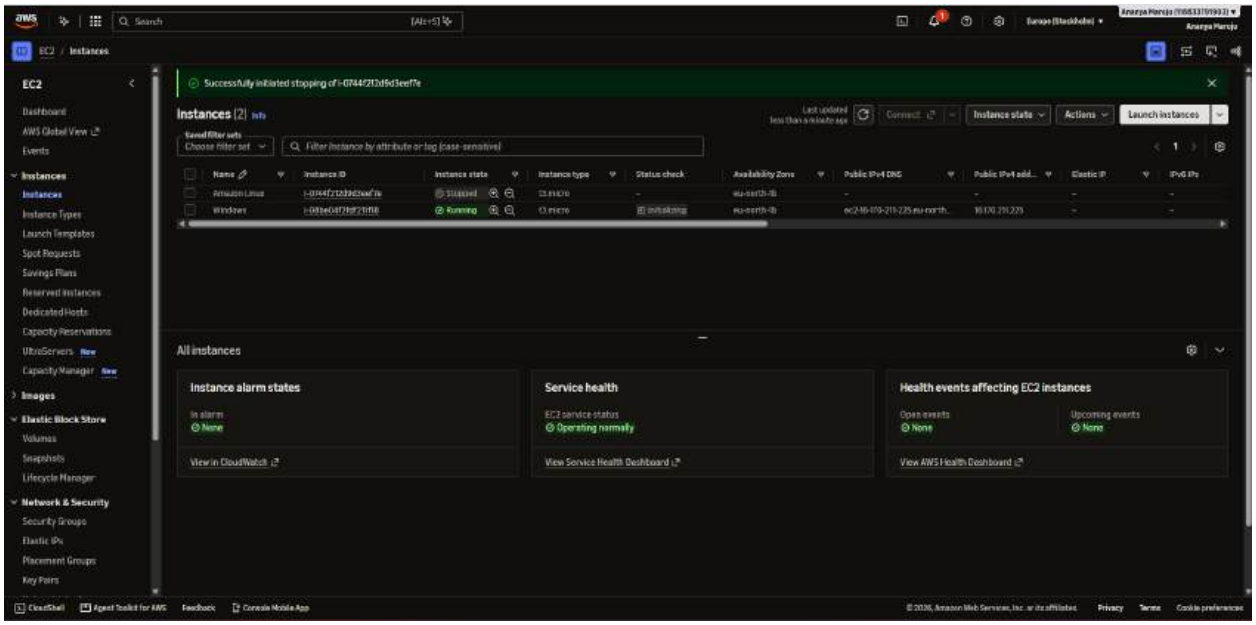


Step 4 : Once the tests pass , select fleet manager

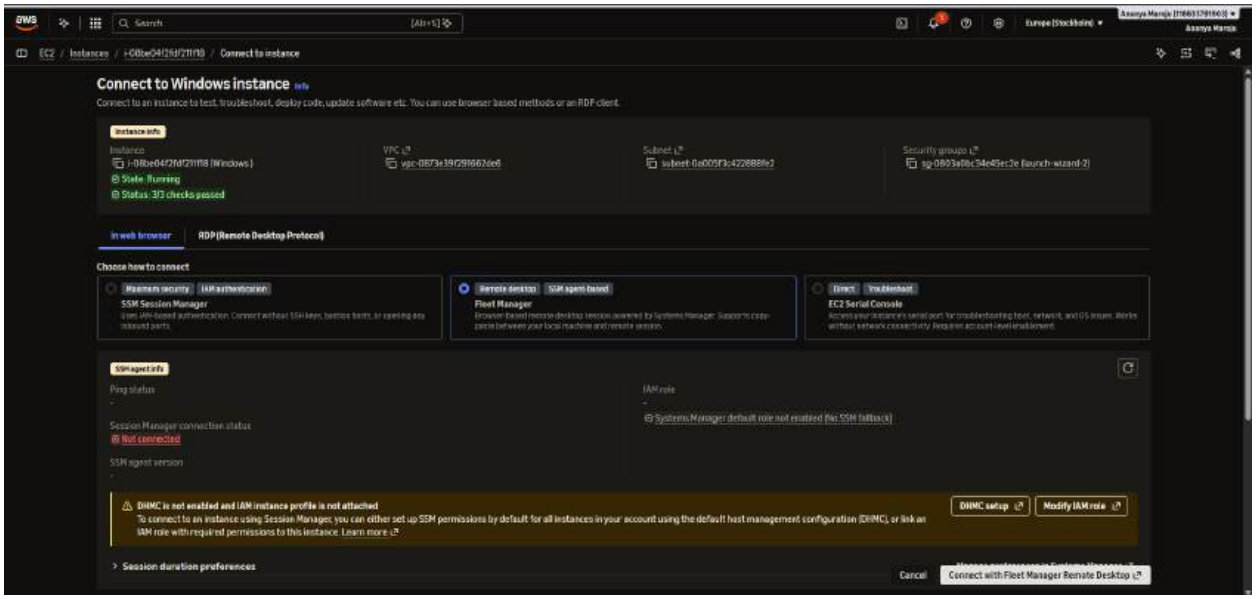


Step 5 : Select Get Windows Password and it will redirect to another page

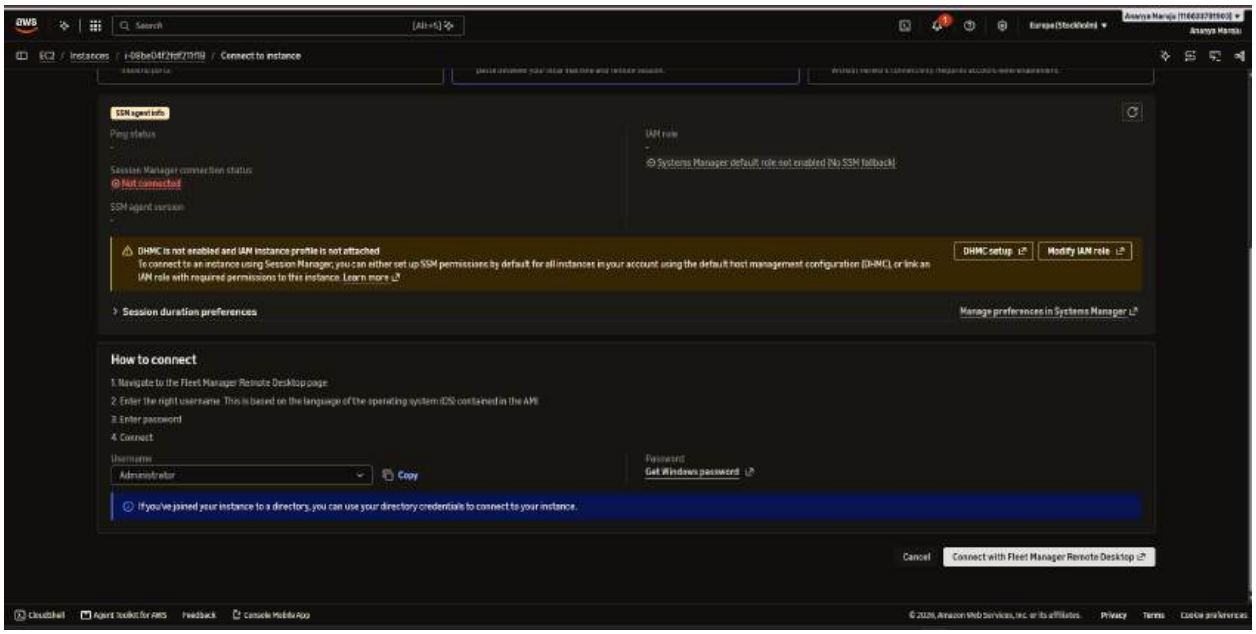


Step 6 : Upload the .pem file and click on decrypt password

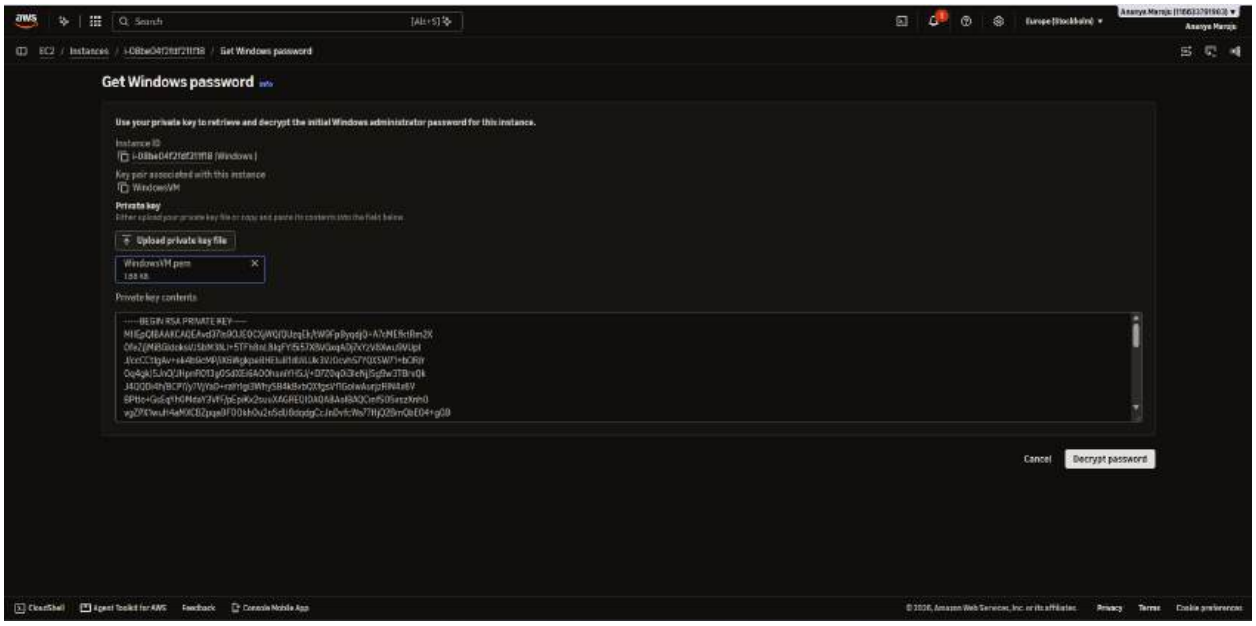


Step 7 : Go back to instances and click on the windows instance and connect again

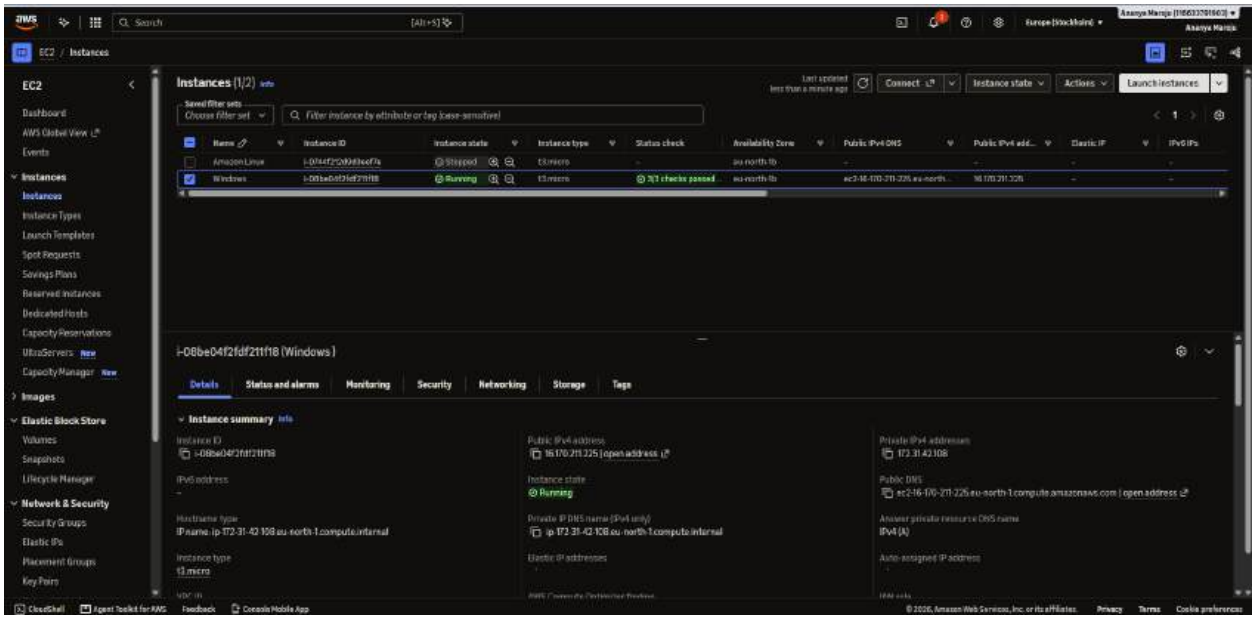


Step 8 : Download the RDP file

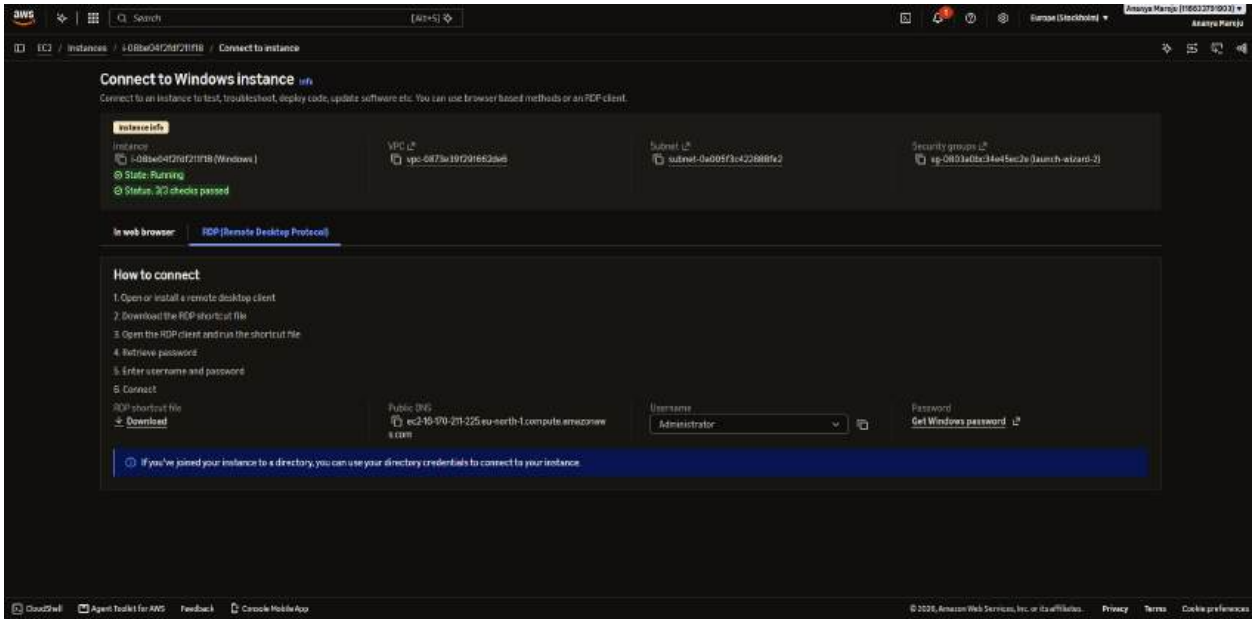

Step 9 : Launch the RDP file and paste the decrypt password to open new browser

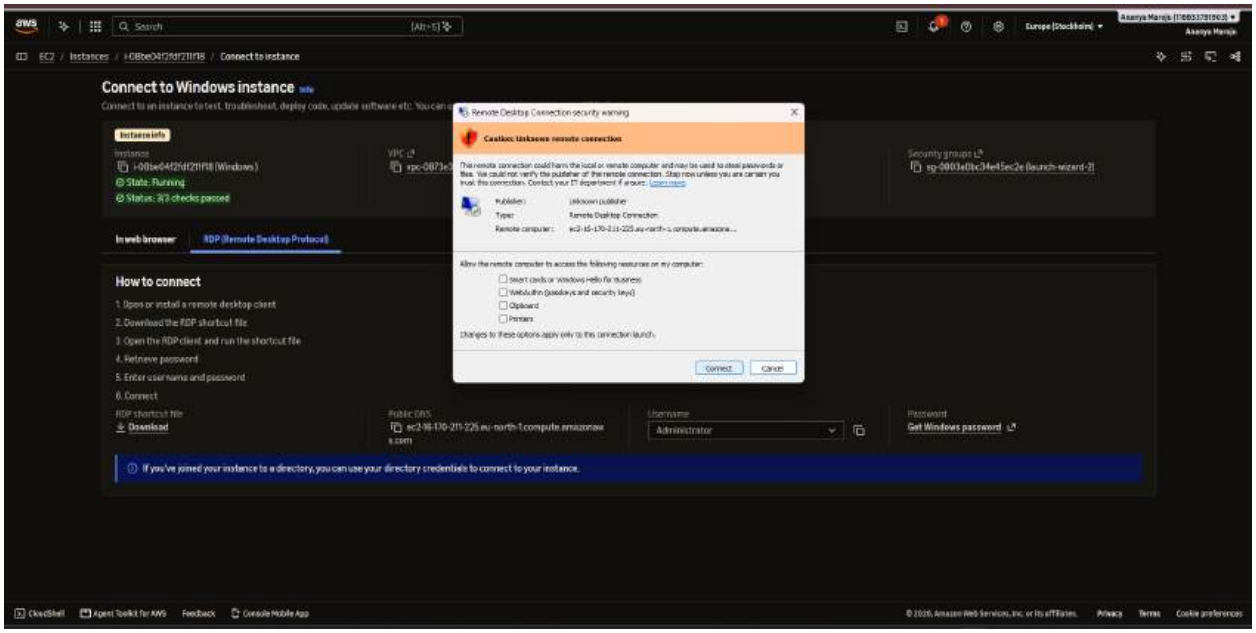


Step 10 : Stop the instance

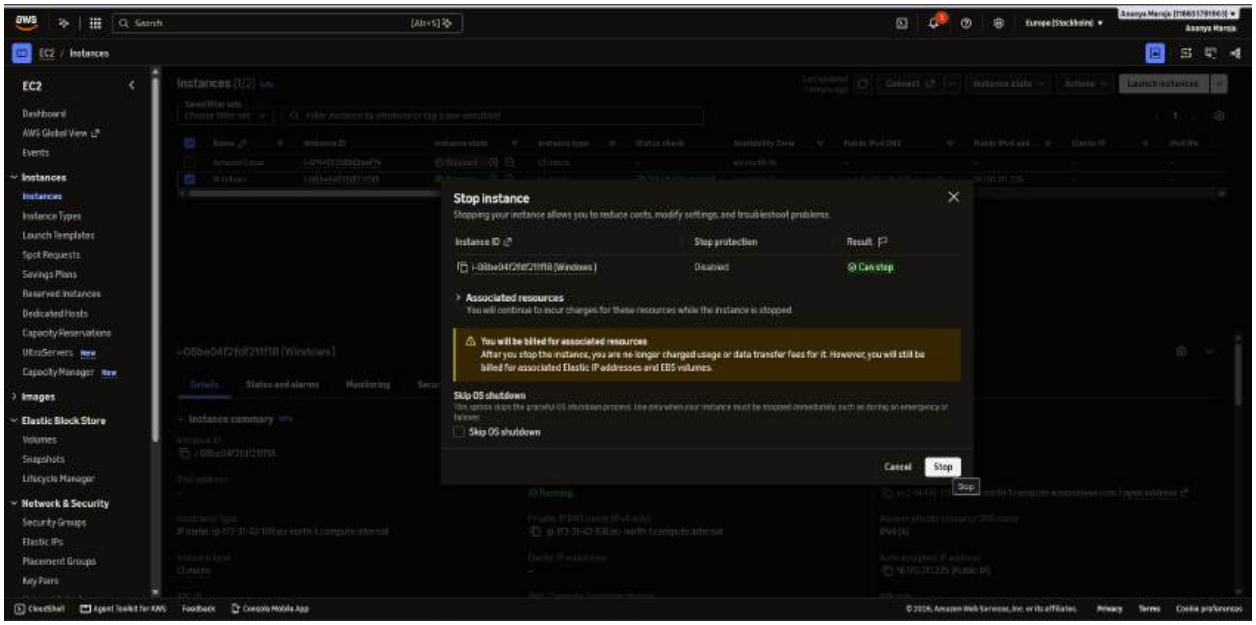


LINUX UI


Step 1 : Launch an instance and select Ubuntu , name it

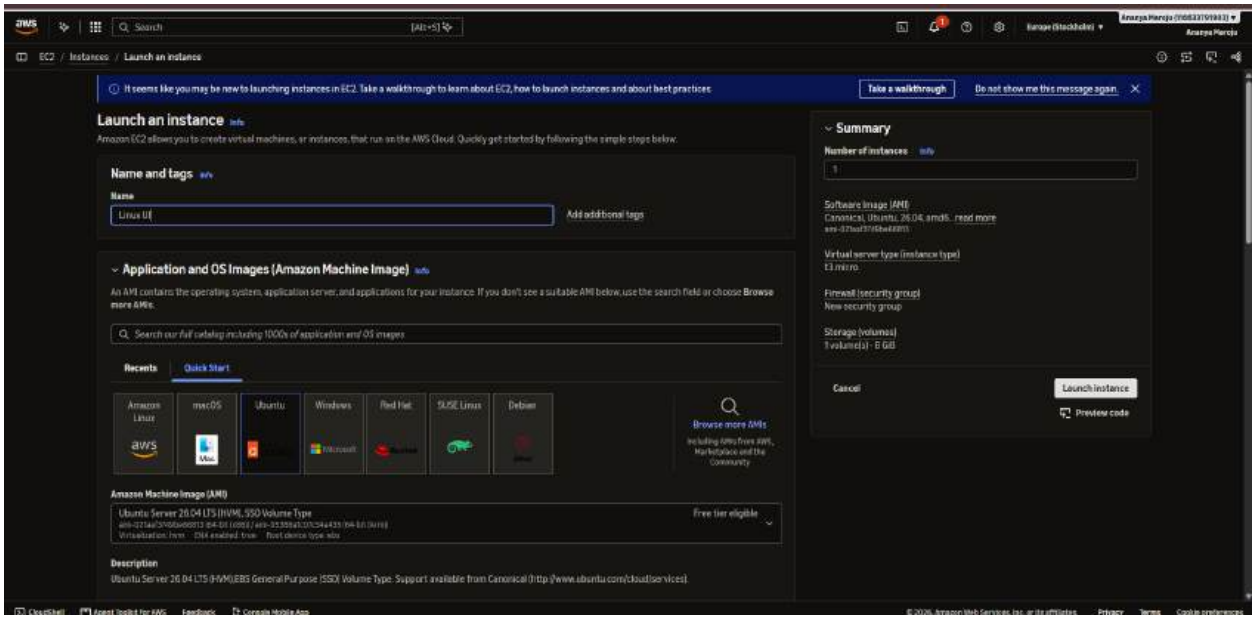


Step 2 : Create new key pair

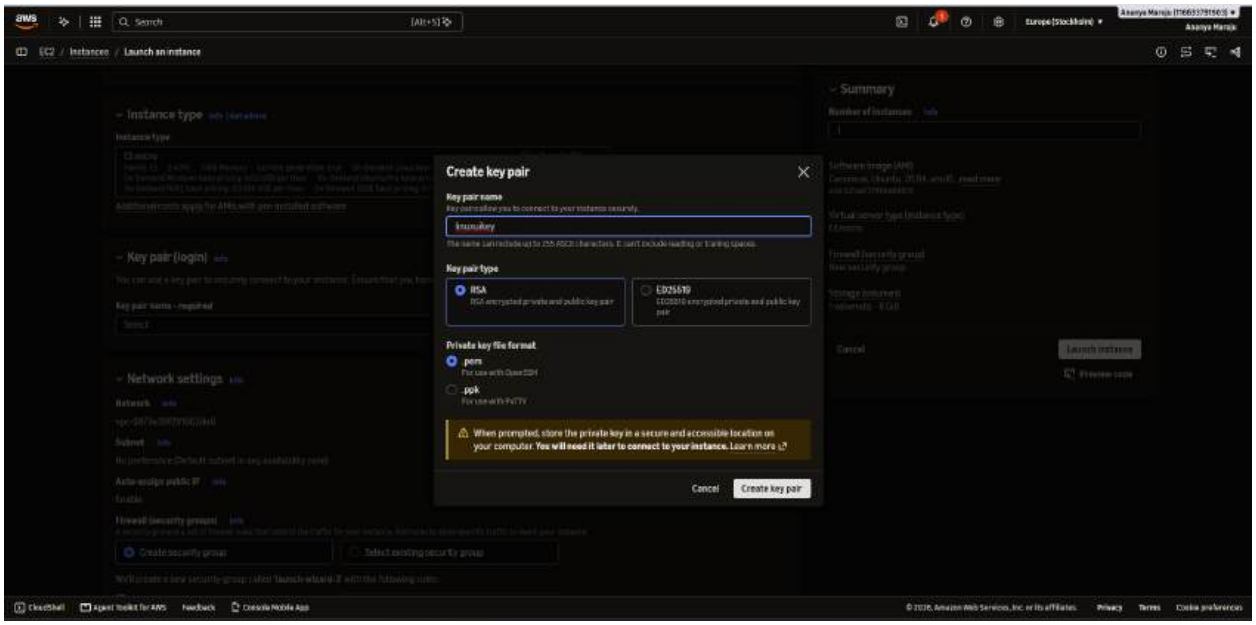


Step 3 : Select t3 Small under Instance type

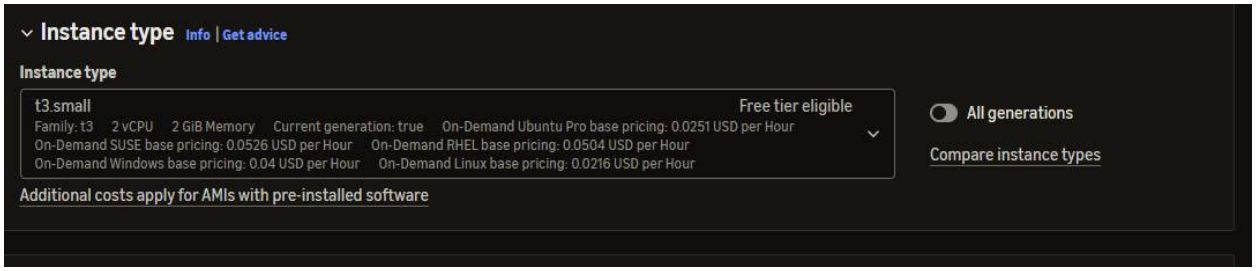

Step 4 : Under network settings , choose Source type as MyIP

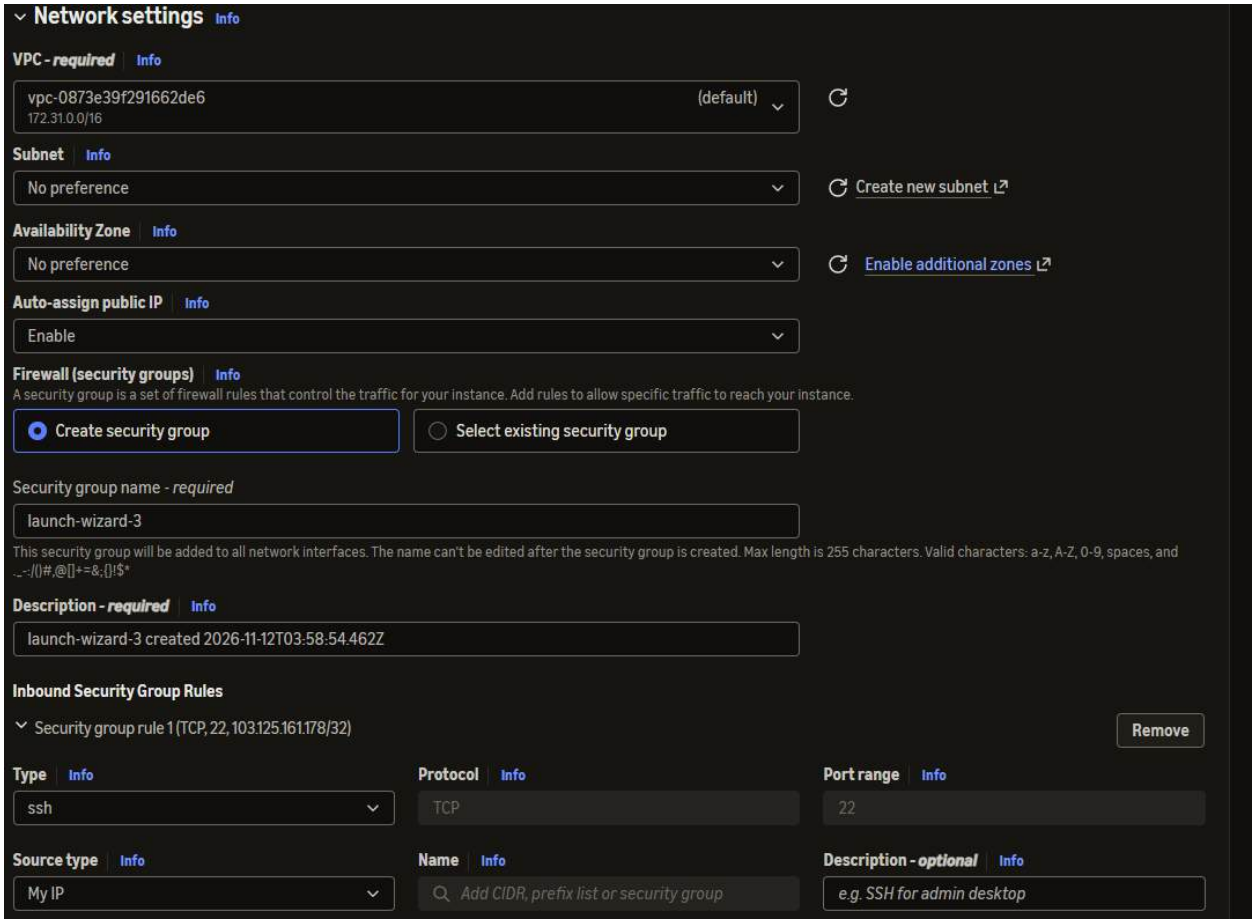



Step 5 : Set the type as rdp

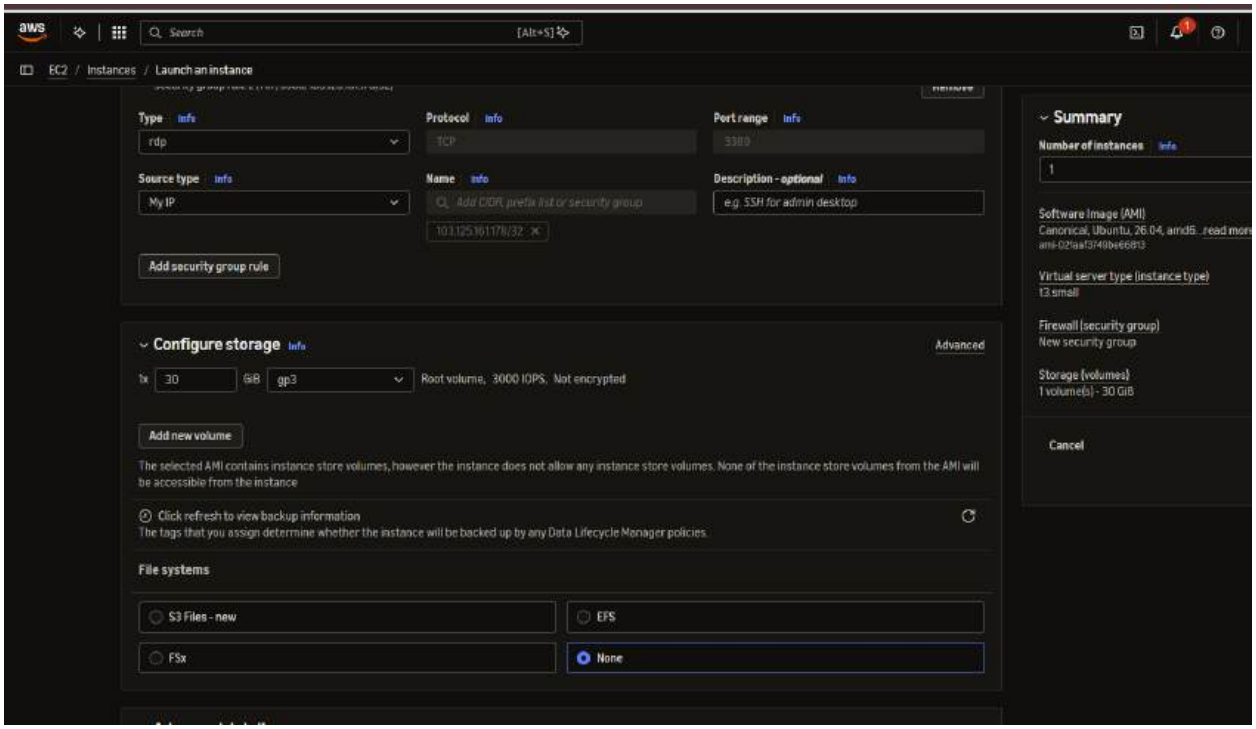


Step 6 : Paste code under user data

```
#!/bin/bash
apt update -y
DEBIAN_FRONTEND=noninteractive apt install -y xfce4 xfce4-goodies xrdp
echo "xfce4-session" > /home/ubuntu/.xsession
chown ubuntu:ubuntu /home/ubuntu/.xsession
adduser xrdp ssl-cert
echo "ubuntu:ChangeThisPassword@123" | chpasswd
systemctl enable xrdp
systemctl restart xrdp
```

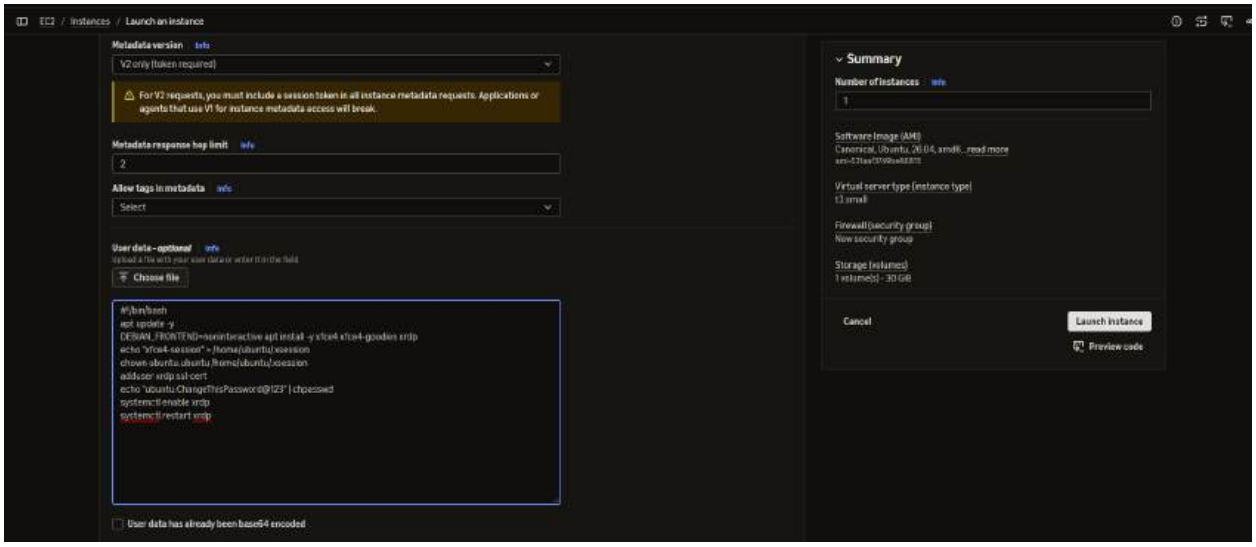

EC2 / Instances / Launch an instance
Metadata version Info
V2 only (token required)
For V2 requests, you must include a session token in all instance metadata requests. Applications or agents that use V1 for instance metadata access will break.
Metadata response hop limit Info
2
Allow tags in metadata Info
Select
User data - optional Info
Choose file
#!/bin/bash
apt update -y
DEBIAN_FRONTEND=noninteractive apt install -y xfce4 xfce4-goodies xrdp
echo "xfce4-session" > /home/ubuntu/.xsession
chown ubuntu:ubuntu /home/ubuntu/.xsession
adduser xrdp ssl-cert
echo "ubuntu:ChangeThisPassword@123" | chpasswd
systemctl enable xrdp
systemctl restart xrdp
User data has already been base64 encoded
Summary
Number of instances Info
1
Software Image (AMI)
Canonical, Ubuntu, 26.04, amd6... read more
Virtual server type (instance type)
t3.small
Firewall (security group)
New security group
Storage (volumes)
1 volume(s) - 30 GiB
Cancel
Launch instance
Preview code

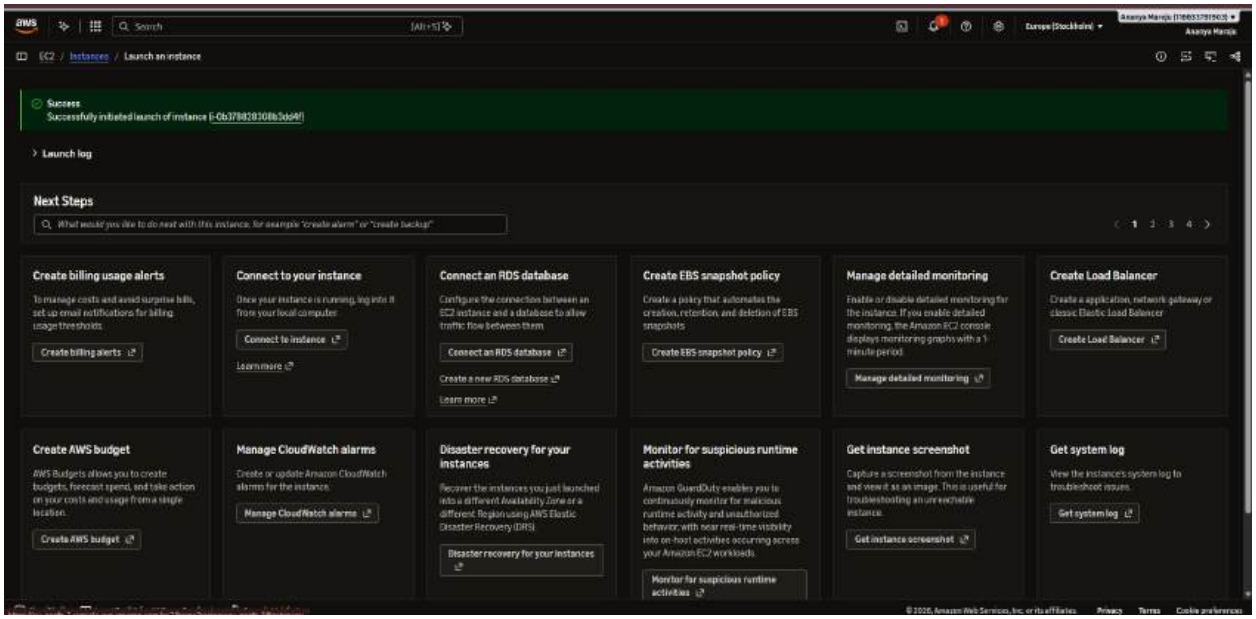

Search
Europe (Stockholm)
Ananya Maroju
EC2 / Instances / Launch an instance
Success
Successfully initiated launch of instance (i-0b37882830886b3d4f)
Launch log
Next Steps
What would you like to do next with this instance, for example "create alarm" or "create backup"
Create billing usage alerts
To manage costs and avoid surprise bills, set up email notifications for billing usage thresholds
Create billing alerts
Connect to your instance
Once your instance is running, log into it from your local computer
Connect to instance
Learn more
Connect an RDS database
Configure the connection between an EC2 instance and a database to allow traffic flow between them
Connect an RDS database
Create a new RDS database
Learn more
Create EBS snapshot policy
Create a policy that automates the creation, retention, and deletion of EBS snapshots
Create EBS snapshot policy
Manage detailed monitoring
Enable or disable detailed monitoring for the instance. If you enable detailed monitoring, the Amazon EC2 console displays monitoring graphs with a 1-minute period.
Manage detailed monitoring
Create Load Balancer
Create a application, network gateway or classic Elastic Load Balancer
Create Load Balancer
Create AWS budget
AWS Budgets allows you to create budgets, forecast spend, and take action on your costs and usage from a single location.
Create AWS budget
Manage CloudWatch alarms
Create or update Amazon CloudWatch alarms for the instance.
Manage CloudWatch alarms
Disaster recovery for your instances
Recover the instances you just launched into a different Availability Zone or a different Region using AWS Elastic Disaster Recovery (DRS)
Disaster recovery for your instances
Monitor for suspicious runtime activities
Amazon GuardDuty enables you to continuously monitor for malicious runtime activity and unauthorized behavior, with near real-time visibility into on-host activities occurring across your Amazon EC2 workloads.
Monitor for suspicious runtime activities
Get instance screenshot
Capture a screenshot from the instance and view it as an image. This is useful for troubleshooting an unreachable instance.
Get instance screenshot
Get system log
View the instance's system log to troubleshoot issues.
Get system log
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

Step 7 : Select the instance and connect

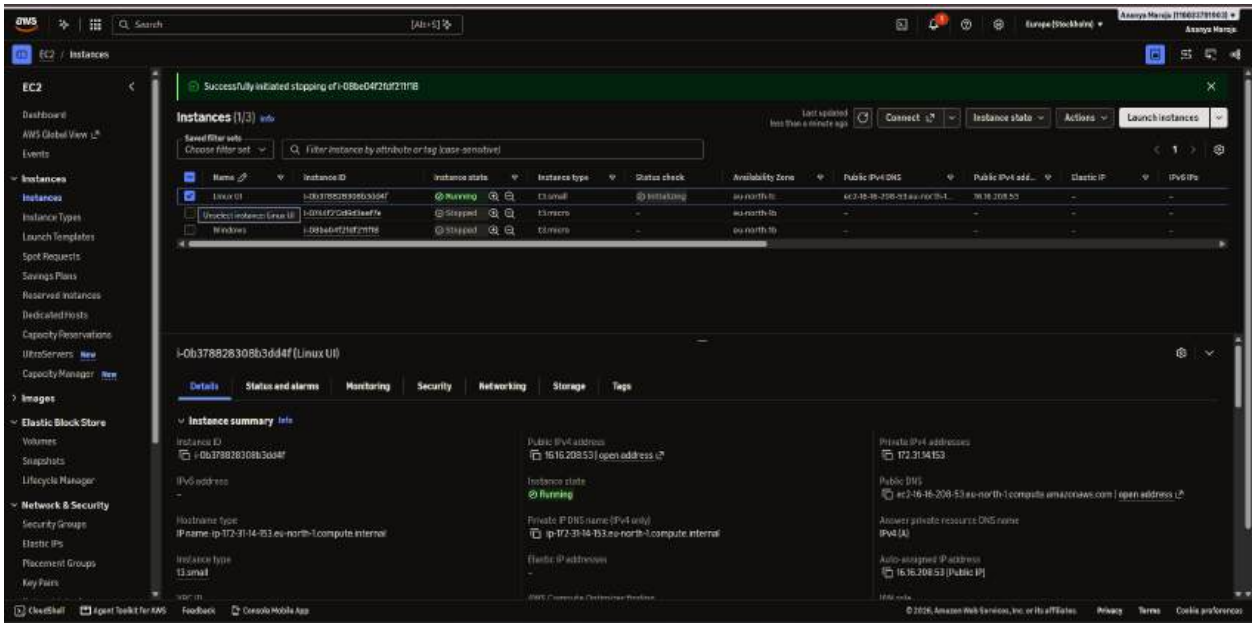


Step 8 : Make sure all the instances pass , copy the IP address and paste in RDP

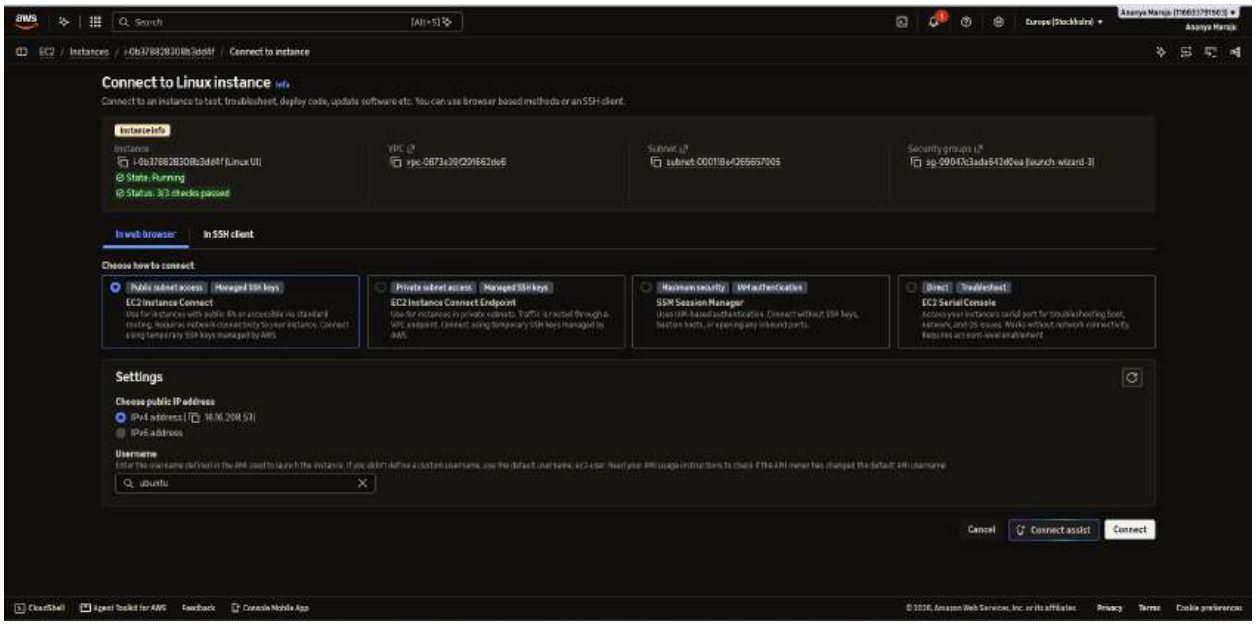

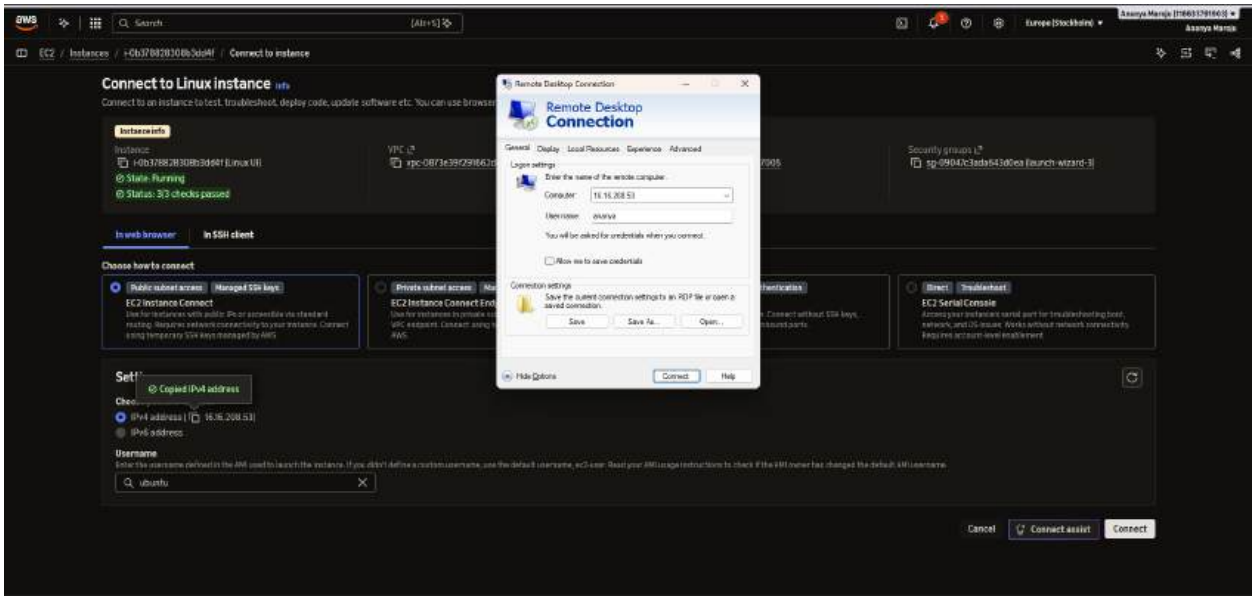


Step 9 : Stop the instance

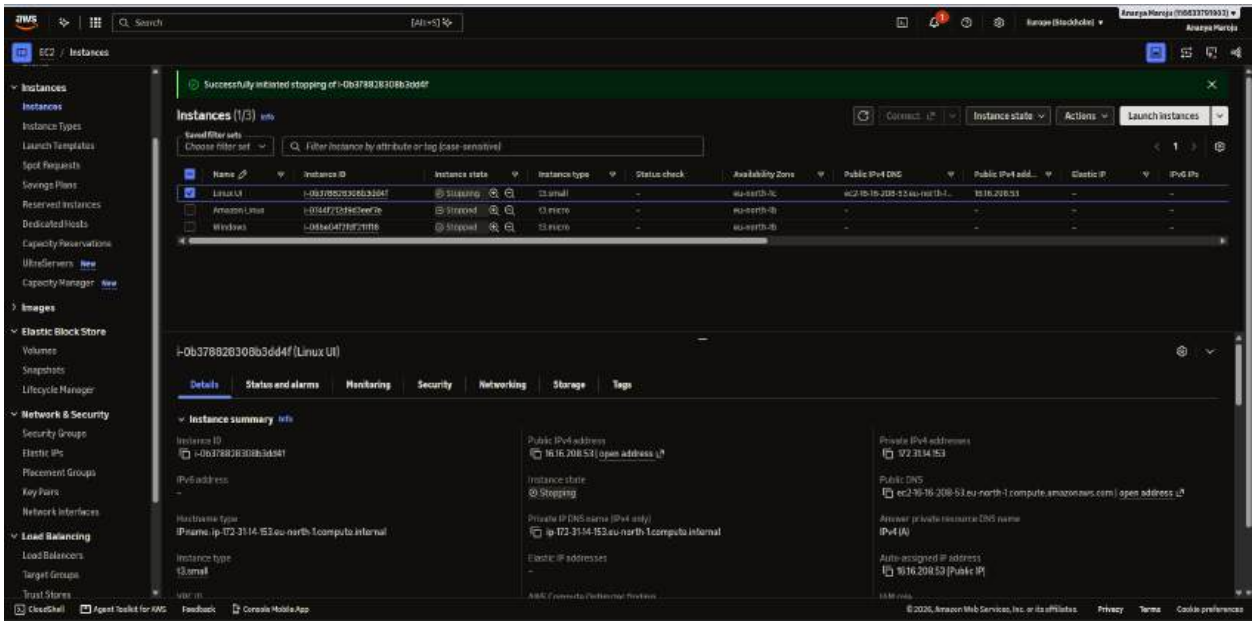


S3 CREATION


Step 1 : Search for S3 and select it

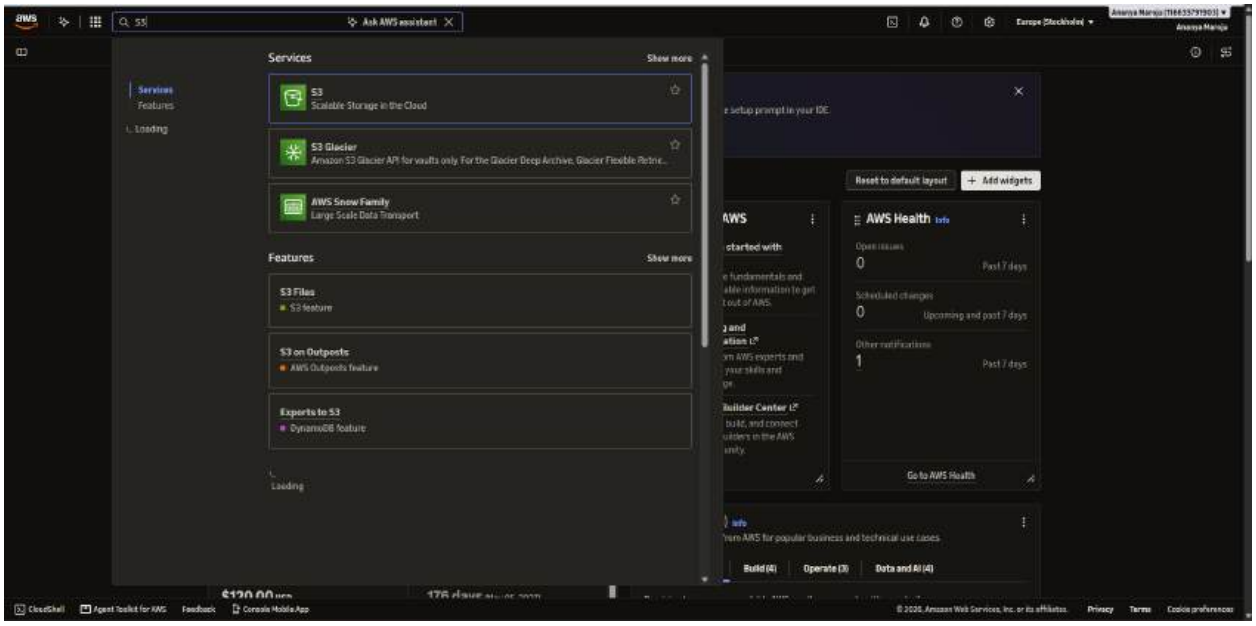


Step 2 : Select Create bucket

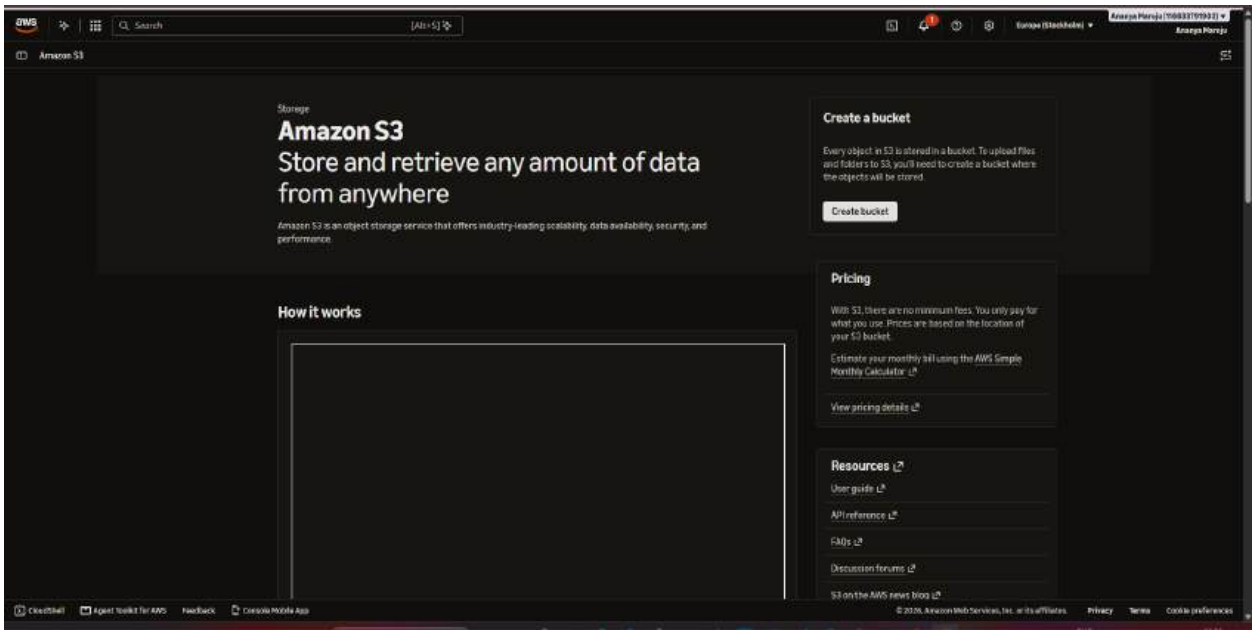


Step 3 : Name the bucket and click on create

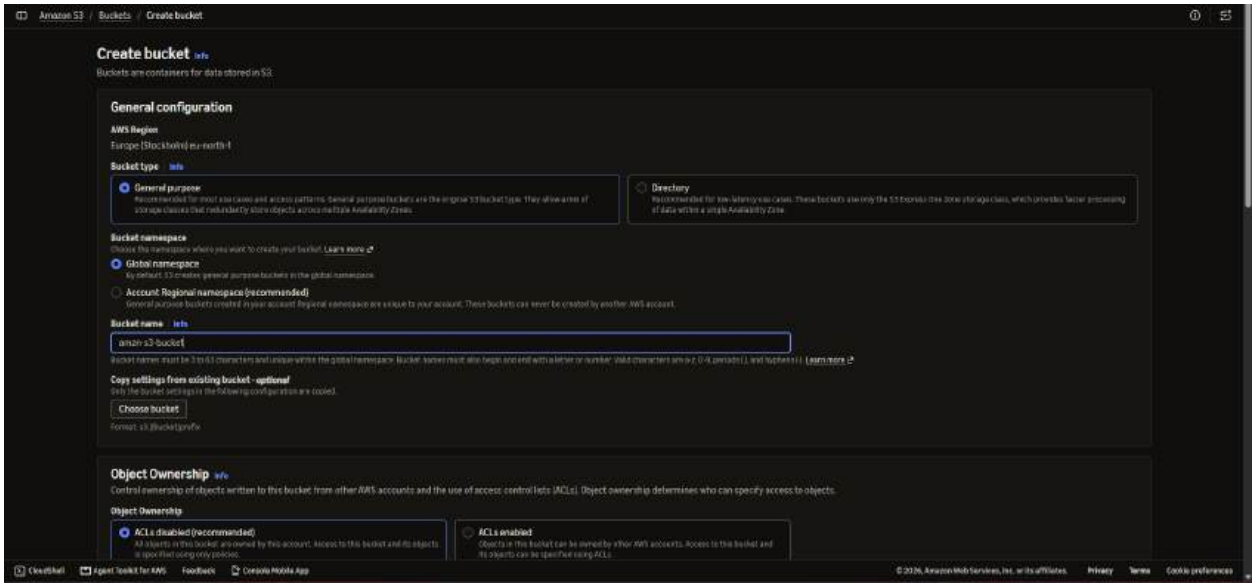


Step 4 : Click on upload

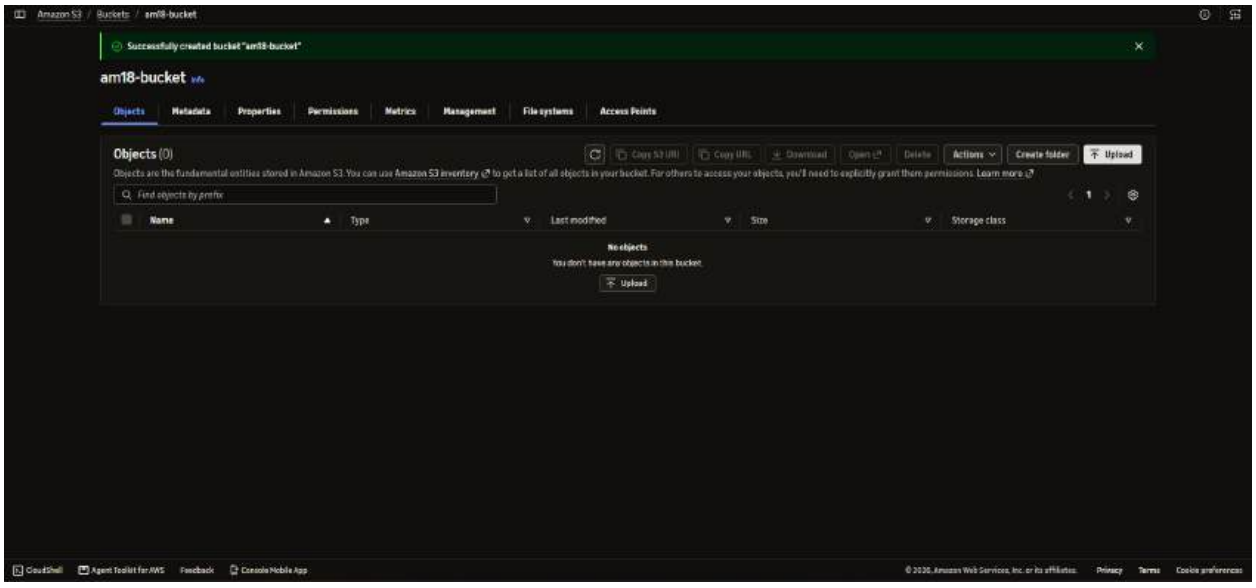


Step 5 : Select any five types of files and add files and click on Upload

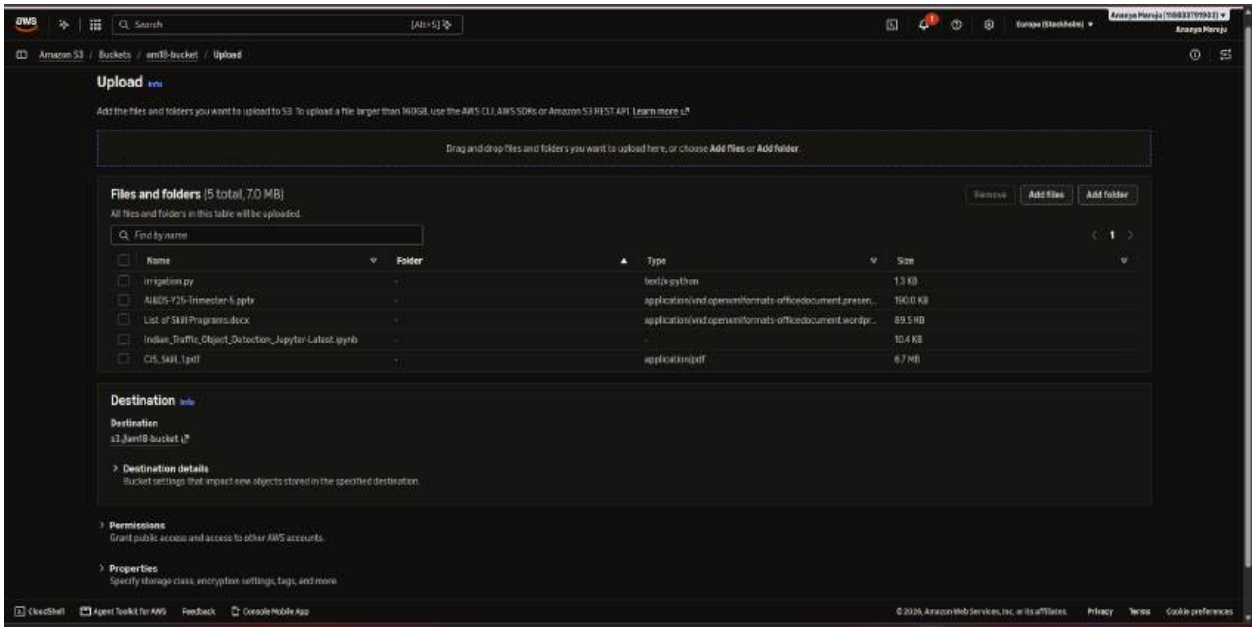

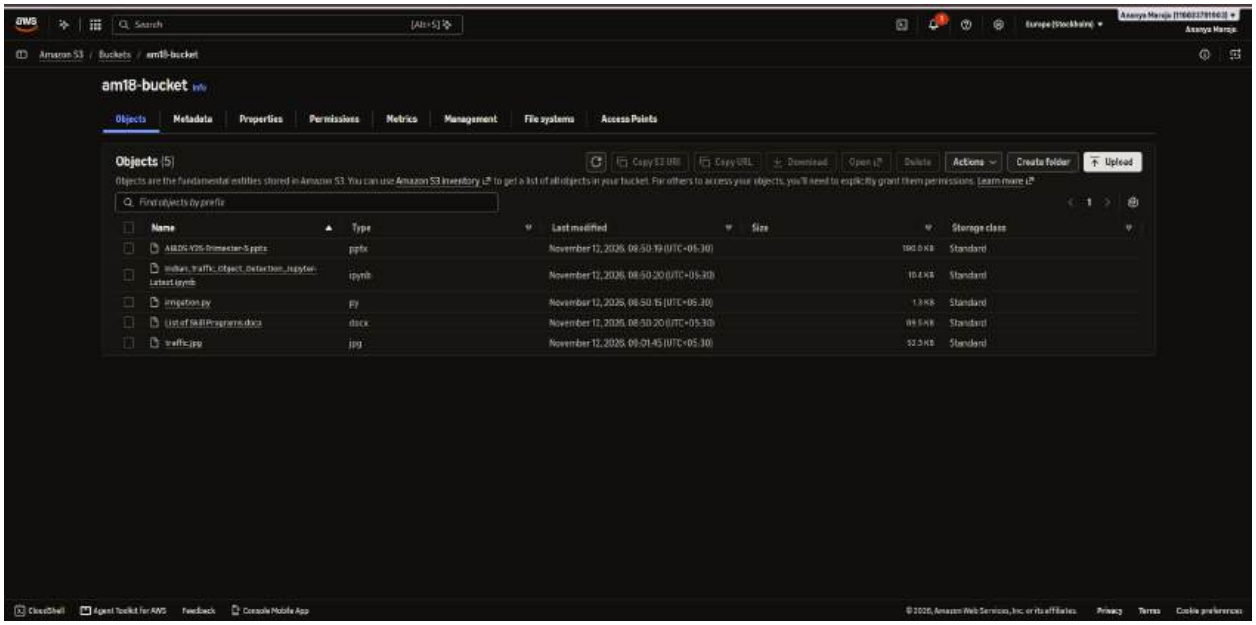

DELETION OF KEY PAIRS

Step 1 : Under EC2 , go to Network and Security

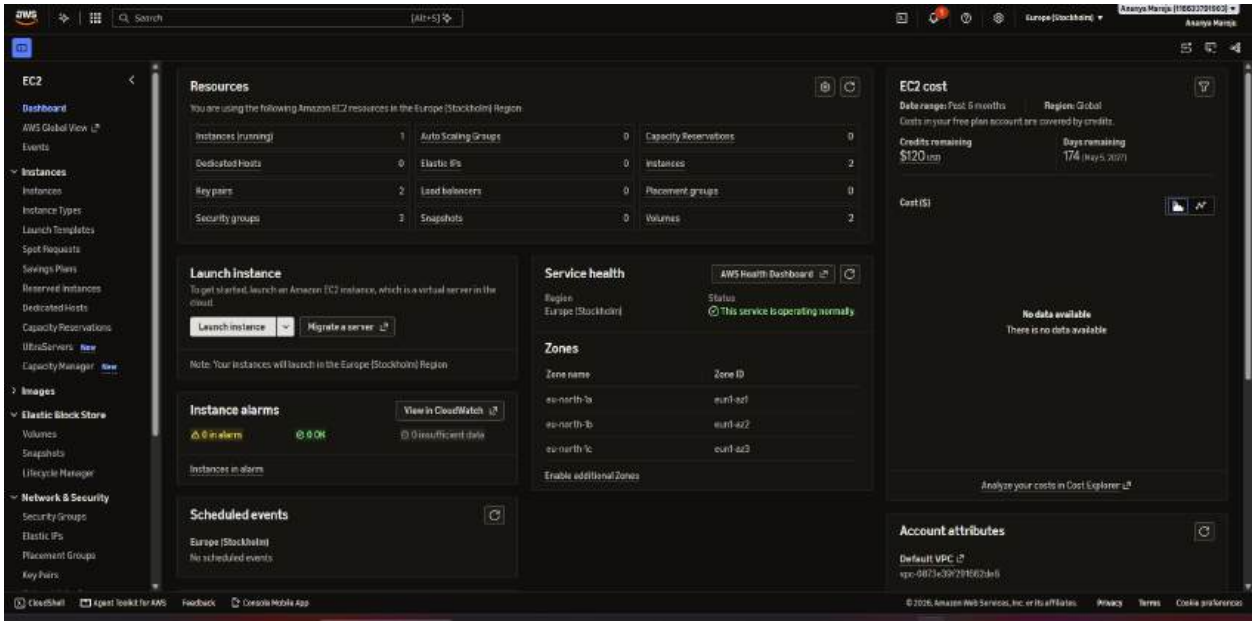

Step 2 : Under Key pairs , select all the pairs and delete them

