

# Quantum Fault Tolerance Meets Toom's Contours

Michael Ben-Or   David Ponomarevsky

July 19, 2026

## Abstract

We suggest a fault tolerance scheme in the circuit model that both uses the 4D Toric code and has a constant-depth correction cycle. Until now, in the circuit model, the use of a topological code as the primary encoding and a constant-depth correction cycle were only achieved separately; this is the first work to achieve them simultaneously. In addition, to date, the 4D-Toric code has been proposed as a memory element in the thermal noise model. Our work shows that it is also suitable as a memory in the circuit model. To achieve that, we adopt the sweep rule defined in [KP19], as the main component of the correction cycle, thereby bypassing the need for a hierarchical correction cycle. The proof is based on alternative proofs of Gacs's theorems [BS88], [Gac21], which are distinguished from the standard approaches in that they trace the past that leads to error clusters.

# Contents

|          |                                                             |           |
|----------|-------------------------------------------------------------|-----------|
| <b>1</b> | <b>Introduction</b>                                         | <b>3</b>  |
| 1.1      | Background . . . . .                                        | 3         |
| 1.2      | Stating Our Results . . . . .                               | 4         |
| 1.3      | Discussions, Applications, and Further Directions . . . . . | 5         |
| <b>2</b> | <b>Outline of the Proof</b>                                 | <b>5</b>  |
| <b>3</b> | <b>The Proof in Detail</b>                                  | <b>15</b> |
| 3.1      | Notations . . . . .                                         | 15        |
| 3.2      | Computation Model . . . . .                                 | 16        |
| 3.3      | The $(d, d')$ -Dimensional Toric Code . . . . .             | 22        |
| 3.4      | Infinite Sides Torics . . . . .                             | 30        |
| 3.5      | Sweep Rule . . . . .                                        | 36        |
| 3.6      | Shrinking . . . . .                                         | 39        |
|          | 3.6.1 The Sweep-Rule Phase in the Dual Code . . . . .       | 46        |
|          | 3.6.2 Ideal decoder . . . . .                               | 49        |
| 3.7      | Toric Encoded Circuits and Toom's Contours . . . . .        | 50        |
| 3.8      | Space-Time Graph . . . . .                                  | 52        |
| 3.9      | Explantation of a Spanned Slice . . . . .                   | 57        |
| 3.10     | Counting Subtrees. . . . .                                  | 60        |
| 3.11     | Tree Separator Lemma . . . . .                              | 61        |
| 3.12     | Proof of the Theorem . . . . .                              | 62        |
| <b>4</b> | <b>Appendix</b>                                             | <b>65</b> |
| 4.1      | Base case for Claim 3.51 . . . . .                          | 66        |
| 4.2      | Layer Propagation and Time Coarse-Graining . . . . .        | 67        |
| 4.3      | Checks Commutation . . . . .                                | 70        |

# 1 Introduction

## 1.1 Background

Fault-tolerant constructions take ideal quantum circuits and establish their logical equivalence such that they endure fault occurrences. Their efficiency is typically measured by the amount of additional resources – qubits, computation time, range connectivity, etc. – required by the resulting circuit, beyond the scope of theoretical discussion; those parameters translate into the machine complexity and energy cost required to run the circuits. Minimizing overheads brings quantum computing applications closer to the near future.

Since the introduction of the quantum threshold theorem [AB99], which showed that quantum fault tolerance is in principle feasible, the main effort in subsequent work has focused on reducing the additional qubit overhead. A line of work has led to a constant-factor overhead in qubits, first in the instant-classical computation model [Got14], then in the standard circuit model [Gro19], [FGL18], [NP25]. Yet, although the best qubit overhead was reached, the depth overhead was only slightly improved from poly-logarithmic to logarithmic [NP25]. In fact, it seems that the same means that are used to reduce the qubit overhead are the ones that challenge reducing the depth overhead.

A key concept for reducing qubit overhead is to encode qubits with a high-rate quantum LDPC code. For those codes, except for the control-not, there are no known gates that can be realized in constant depth; furthermore, since the structure of the codes is relatively complicated – based on the skeletons of expander graphs - it seems hard to look for realizations of their logical operators. Without a constant-depth realization of logical operators, any construction that doesn't interfere with the order of the logical operations would admit a non constant-depth overhead.

Contrary to high-rate LDPC codes, topological error codes have a geometrical image that is well understood and, as a result, a wide range of works suggest efficient realization of their logical operators. For example, consider the 3D-color code [Bom15], fold-transversal gates on the surface code [BB24], and realization of the Clifford group on the 2D Toric [GV24].

Another branch of work, whose primary goal was to show that the embedding dimension of the computation can be reduced to 2D [BDL26], and more recently [DST26], uses topological codes as the main error correction code. Those constructions simplify the hardware realization; they suggest that quantum computers can be implemented by nearest-neighbor interactions automata - what is believed to be easier to develop. Yet, as in the threshold theorem [AB99], and in contrast to the works that use high-rate LDPC codes, they rely on a hierarchical correction cycle whose execution time grows with system size. Hence, even though those directions have the potential to overcome the non-constant depth overhead per gate, it seems that the correction cycle imposes a barrier for them to come up with a constant factor in depth-overhead construction.

## 1.2 Stating Our Results

In this work, we present a fault-tolerance construction that uses the 4D Toric code and has a constant-depth 'correction' cycle. Or in other words, a construction uses a relatively simple code, yet doesn't admit the cost of hierarchical correction cycle.

The computation model we consider is quantum circuits subject to *local-stochastic noise*, where only qubits are subjected to the noise, while classical bits are non-noisy. Classical computation is allowed, and the classical depth matters. Namely, at each time unit, only a constant depth of classical computation can be done. Local stochastic channel is defined to act such that the probability of any subset of locations  $S$  (space-time coordinates), which is picked prior to the channel's action, being affected decays exponentially with the subset size.

**Definition 1.1** (Local stochastic noise channel). *Let  $p \in (0, 1)$ . We say that the noise channel  $\mathcal{N}_{\mathcal{E}}$  is local stochastic with rate  $p$  if for every finite set of locations  $S \subset \mathbb{N} \times \mathbb{N}$ ,*

$$\Pr_{\mathcal{E} \sim \mathcal{N}_{\mathcal{E}}} [S \subset \text{Loc}(\mathcal{E})] \leq p^{|S|}.$$

For circuits  $\tilde{C}$  and  $C$ , we say that  $\tilde{C}$  simulates  $C$  with probability  $p$  if, when one stops a noisy run of  $\tilde{C}$  at a midpoint, one can, with probability  $p$ , recover by non-noisy operation an 'image' of a midpoint in the running of  $C$ , and if stopping at the last time point of  $\tilde{C}$  enables recovery of the 'image' of  $C$  at the end of its run. We proved the following theorem:

**Theorem 1.2** (Informal). *There exists a constant  $p_0 \in (0, 1)$  such that for any local stochastic noise channel  $\mathcal{N}_{\mathcal{E}}$  with rate  $p < p_0$ , a quantum circuit  $C$  with depth  $\mu$  and width  $w$ , and a big enough integer  $n$ , there exists a 'logical equivalence' circuit  $\tilde{C}$  with depth  $\Theta(\mu n)$  and width  $\Theta((w + \mu)n)$  that simulates  $C$  with probability:*

$$1 - \Theta(\text{poly}(w, \mu, n)) p^{\Theta(n^{\frac{1}{4}})}$$

Furthermore,  $\tilde{C}$  has the following two properties:

1. *After a short initialization stage (at depth  $\Theta(\log n)$ ), each of the qubits is encoded in the  $n$ -length 4D Toric code.*
2. *An error correction cycle takes  $O(1)$  depth, and the gates in each correction cycle don't depend on time. In particular, if  $C$  is the identity circuit, then after the initialization stage, the layers in  $\tilde{C}$  are the same.*

As mentioned earlier, both code simplicity and constant depth have already been achieved: the former as part of the quantum automation line of work, and the latter through the use of high-rate error correction codes. However, this is the first construction to achieve both simultaneously. Table 1 summarizes and compares the different works:

| WORKS LINE       | ERROR CORRECTION CODE              | CONSTANT-DEPTH CORRECTION CYCLE | DEPTH/QUBIT OVERHEAD | REF                      |
|------------------|------------------------------------|---------------------------------|----------------------|--------------------------|
| CONCATENATION    | Concatenation of fixed length code | ✗                               | $f(x)$               | [AB99]                   |
| HIGH-RATE        | Quantum expanders/ good QLDPC      | ✓                               | $f(x)$               | [Gro19], [FGL18], [NP25] |
| QUANTUM AUTOMATA | 2D-Toric code                      | ✗                               | $f(x)$               | [BDL26], [DST26]         |
| OURS             | 4D-Toric code                      | ✓                               | $f(x)$               |                          |

Table 1: Comparing different types of works on fault-tolerance.

### 1.3 Discussions, Applications, and Further Directions

Our result can be understood as follow: when the qubit overhead is not a consideration, it means that the 4D Toric code is as good as the good quantum LDPC / Hyperproduct code. That translates to the two following applications:

1. New approach for quantum fault tolerance: With the assistance of resource states and gate teleportation, we obtain a fault-tolerant construction with logarithmic depth overhead. Our proof is inherently different from prior works, describes in higher resolution the expected error, and might be used as a springboard for a constant depth overhead construction.
2. Memory in the circuit model: Protecting a 4D Toric encoded state for an exponentially long time is achieved by performing the same operation at each time unit, suggesting that the 4D Toric code is a promising candidate for memory in the circuit model. Combined with evidence that the 4D Toric code also functions as memory in thermal noise models [Ali+08], and given its relative simplicity, it appears to be a natural choice for real-world memory applications.

## 2 Outline of the Proof

In studying fault tolerance, the typical method is to first distinguish between configurations that can be tolerated and those that cannot. For example, in von Neumann-style proofs [Neu56], it is common to track the number of flipped bits; if fewer than half are flipped, the logical states can be recovered. In the work of Aharonov and Ben-Or [AB99], a logical bit at the  $n$  level admits a logical error if at least a constant fraction of the  $n - 1$  level logical bits that compose it admit an error. In the work of [Gro19], a tolerated configuration is one in which all encoded registers can be considered as distributed according to sufficiently weak local stochastic noise. The next step is to show that from a tolerated configuration, we move with high probability to another tolerated configuration. For our goals, each approach presents a challenge: The concatenation method, by definition, requires non-trivial depth computation at each step. Tracking the number of flipped bits fails almost immediately, as topological error correction codes have sublinear distance when a linear number of bits is expected to

be flipped. And preserving the local stochastic noise distribution seems to heavily rely on the expansion properties [Gro19] of the underlying structure, where for topological codes, we expect to forge a 'spatial' dependence.

In contrast, Berman and Simon provided a proof that, instead of tracking the dynamics, considers the entire run as a possible outcome, ruling out improbable runs only at the end [BS88]. We outline their idea informally as follows: a logical bit is represented by  $n \times n$  bits set on the vertices of the grid. In each correction cycle, the bits determine their value by taking the majority of their current value, and their north and east neighbors values, a rule known as Toom's rule. For simplicity, let's ignore the logical operations. Now, given a run, and in particular the set of space-time locations of faults, consider the following directed graph  $\mathcal{H} := (V_{\mathcal{H}}, E_{\mathcal{H}})$  induced by it:

1. If at time  $t$ , the bit at vertex  $v$  diverges relative to the ideal run, then add  $(v, t)$  to the vertices.
2. If at time  $t$ , vertex  $v$  'leads' one of its neighbors  $u$  to diverge, then connect  $(v, t)$  and  $(u, t + 1)$  by an 'arrow'.
3. Connect any two vertices in  $V_{\mathcal{H}}$ , which are connected to a third by 'arrows', by a 'fork'.

Notice that the vertices of  $\mathcal{H}$  with no incoming arrows correspond to faults; let's call them leaves. Thus, the probability of each running can be bounded by the number of leaves in the induced graph. Their key lemma states that a cluster of flipped bits with a 'perimeter'  $s$ , connected by arrows, induces a subgraph with at least  $\Theta(s)$  leaves<sup>1</sup>. In other words, the probability of a connected component (by arrows) being flipped decays exponentially with its perimeter.

The graph  $\mathcal{H}$  was later named Toom's contours, a term that, to the best of our knowledge, was coined in [SST26].

We chose to follow their approach. The rest of the section reviews the challenges that we encountered on the way to generalize it and the ideas to overcome them.

**The Toric Code, the Sweep-Rule, and the Infinite Plane.** The first issue was finding an analog for Toom's rule. We decided to adopt the sweep rule invented by Preskill and Kubica in [KP19], which they introduced as a local rule for any CSS code induced by a simplicial Toric, equipped with a notion of 'positive' and 'negative' directions (in their paper 'future' and 'past'). They also provided a rigorous proof that the iterative non-noisy applications of the sweep rule succeed in decoding faults that were sampled independently. For our purposes, we had to extend their proof for cubical Toric<sup>2</sup>. The main reason for this is that the alignment of the positive/negative directions with the axes direction of  $\mathbb{R}^4$  space allows quantifying the 'perimeter' of error clusters. Yet, we are sure that our proof can be adjusted to support simplicial Toric complexes as well, and we leave it for further work. In the formal section, we define and prove the claims for Torices in any dimension greater than two, except for

---

<sup>1</sup>And number of edges  $\leq \Theta(\text{leaves})$ .

<sup>2</sup>The standard Toric codes.

Claim 3.51, which we proved only to dimension four. (Yet a numerical study hints that the claim might also be generalized; see ??.)

In complete contrast to typical works in topology, where global properties are studied and local characterization is left as general as possible, here we need notations to describe the local view of each vertex of the complex. We needed it for defining the sweep-rule action and stating claims about how it shrinks errors. That led us to the  $\theta_{v,S'}$  notation defined in detail in Definition 3.18. In general, we denote by  $S$  the generator set of the Toric, and for a subset of generators  $S' \subset S$ , we define  $\theta_{v,S'}$  to be the face whose 'bottom-left' corner is the vertex  $v$ , and sides of the face correspond to edges on paths obtained by stepping through subsets of  $S'$  (for example, if  $S' = \{g_1, g_2, g_3\}$  then  $\{g_2g_1v, g_3g_2g_1v\}$  is an edge of  $\theta_{v,S'}$ ). Figure 1 shows how the 2D-Toric complex is characterized via  $\theta_{v,S'}$  notation.



Figure 1: Here we consider a 2D Toric complex. We name the set of generators  $S = \{g_1, g_2\}$ , where  $g_1$  is the generator that sends us one step in the north direction, and  $g_2$  sends us in the east direction. For vertices  $v, u, w$ , we mark in blue three faces that are rooted at them.

The 4D-Toric code is defined as the binary assignment over the 2D-faces (plaquettes), where the  $Z$ -stabilizers (parity checks) are set on the edges, namely restrict the  $Z$

product of the faces adjacent to each edge, and the  $X$ -stabilizers (phase checks) are set on the 4D-faces (hypercubes). To present the sweep-rule, we need to have a definition of directions. For this section, we will be satisfied with the following hand-waving: For a vertex  $v$ , the bits and checks on the first 'quarter' of it (high-dimensional quarter) will be named the positive bits and checks of  $v$ .

**Definition 2.1** (Sweep Rule (Inforaml)). *Let  $z$  be a binary assignment on the Toric faces representing 'error'. The sweep rule decoding procedure at a vertex  $v$  is defined as follows:*

*Measure the positive checks of  $v$  and look for an assignment  $\tilde{z}$  on the positive bits of  $v$  such that the syndromes of the positive checks of  $v$  assign the same local syndrome for both  $z$  and  $\tilde{z}$ .*

See Definition 3.43 for the formal version. An error correction cycle, or a sweep-cycle, consists of applying the sweep-rule to each vertex and then doing the same in the dual space. Figure 2 provides an example of the result of the sweep rule given a syndrome.



Figure 2: An example of applying the sweep rule within the  $(3, 2)$ -Toric code. In the  $(3, 2)$ -Toric code, bits are placed on the squares and  $Z$ -stabilizers (parity checks) on the edges. The view is restricted to two vertices,  $u$  and  $v$ . On the left, the unsatisfied positive checks of  $u$  and  $v$  are highlighted in blue. On the right, the bits to be flipped are marked in green. Given the syndrome, vertex  $v$  flips one of its positive faces, whereas for  $u$ , there is no subset of positive faces that, when flipped, decreases the number of local unsatisfied checks. Therefore,  $u$  flips no bit.

The way we quantify the 'perimeter' of an error cluster is by considering the (hyper)triangle that bounds the vertices supporting the cluster. The poles of an error cluster are the vertices that lie on the sides of the triangle. We followed [BS88], and by embedding the Toric in the infinite plane, we were able to identify the poles as the max/min points of linear functions which we call *potential walls*. Then, we show that the sweep rule advances only one pole, and hence one side, forward the others. As a consequence, a sweep-cycle shrinks the bounding triangle. The embedding restricts periodicity conditions on the assignments. We encounter this twice: first, an assignment on the Toric's faces that closes a non-trivial cycle translates to an infinite assignment in the infinite plane. In that case, no triangle bounds the error,

which agrees with the fact that a logical error—in that context, an error that changes the logical states—should be ‘decoded’ to a different codeword. From a technical perspective, it comes into effect as the claims about shrinking assume that a given assignment is a connected finite assignment. The second time we have to deal with the mapping onto the infinite plane is in the calculation of the probability of a given Toom’s contour. Since different leaves (faults) of Toom’s contour might be associated with the same bit and hence dependent, to bypass this, we took from [Gac21] the claim that states any such graph has a subgraph whose leaves are independent, and their number is at least a constant factor of the original leaves.



Figure 3: A graphical example of the maximal values of the potential walls. Here we consider the  $(2, 1)$ -Toric code, namely the bits are set on the edges where the  $Z$ -stabilizers (parity checks) are set on the vertices. The grid is a finite  $6 \times 6$  patch of the infinite 2D plane. The edges marked in blue correspond to a bits assignment  $z$ . Each of the dashed lines marks the line of vertices whose  $L_i$  value converges with the maximal value reached by a vertex in  $z$ . Moving into the infinite plane enables us to determine those lines and draw the triangle that bounds  $z$ .

See Section 3.4 for embedding into the infinite plane, Section 3.6 for the proof of shrinking, and Section 3.11 for the claim about the existence of a sufficient subgraph.

**The Intermediate Theorem.** Now that we have the code and decoder, the next difference we have to address is how to classify an error. Unlike the classical regime, flipping a stabilizer’s bits doesn’t count as a fault. Moreover, the sweep-rule discussed above doesn’t shrink stabilizers (as it acts trivially on them). Therefore, we need to redefine what is considered a divergence from the ideal computation. As a result, instead of defining the vertices of Toom’s contour graph to be the flipped vertices as in [BS88], we define them to be bits<sup>3</sup> that encounter unsatisfied checks in their local view.

We then face another challenge: if we analyze Toom’s contour, which is induced by the single time unit running consisting of flipping all the bits at once, then in the layer following the fault cycle, no bit sees an unsatisfied check. In the language of Toom’s contour, as will be defined later, the Toom’s contour is empty, and no bounds on the event’s probability to occur can be inferred using it. We address this by introducing an analysis framework where all computation, including faults, is imagined to occur sequentially — in steps. Within this framework, we can prove an *intermediate theorem* stating that on the path to a logical error configuration, one must pass through a step with a large cluster of unsatisfied checks. Thus, a sufficient condition for an error to occur in some time unit is the existence of a step with a sufficiently large observed syndrome. In the proof of the theorem, we show that this condition happens with negligible probability. To elaborate on the issue, we first need to present the computation model.

We model a noisy running of a given circuit  $C$  as follows: first, we sample space-time locations for the faults and denote the outcome by  $\mathcal{E}$ . Then, we impose layers of computation alternately, such that the even and odd layers are taken from  $\mathcal{E}$  and  $C$  according to their order. The combination of the circuit  $C$  with a subset of faults  $\mathcal{E}$  defines a possible running, and we call it a subsection of  $C$  to  $\mathcal{E}$  and denote it by  $C[\mathcal{E}]$ . Furthermore, we showed in Claim 3.8 that for a local-stochastic noise model, unbalancing partition to noisy and logical layers, for example placing a noisy layer after every three logical layers of  $C$ , is equivalent to odd-even alternations up to a rescaling of the noise rate (by a constant). We use that since the error correction cycle of the sweep rule takes more than a single layer.

A Tanner graph of an error correction code is a bipartite graph where the left vertices correspond to bits and the right vertices correspond to checks, and there is an edge between a left vertex and a right vertex if they match a bit and a check supported by it. A logical error is an error where an attempt to decode it might lead to a different codeword (different from the original prior to the noise). As stated in [Got14], a sufficient condition for an error to be correctly decodable is that, relative to the Tanner graph of the code, the error is a decomposition of connected components (where two bits are connected if they share a check) such that each of them is comparatively small (at least by a factor of half) to the code distance.

---

<sup>3</sup>In fact: vertices on the bits’ support, see Section 3.7.



Figure 4: Example of a subjected quantum circuit: the even layers (0, 2, 4) contain the original gates, while the faults are imposed on the odd layers and marked in red.

As mentioned, we are going to analyze the likelihood of getting logical errors by looking back in time and asking what a run that has led to them is supposed to look like. The sweep rule ensures that an error cluster below a certain size shrinks. The problem is that a single fault layer (i.e., a layer whose source is in  $\mathcal{E}$ ) might increase the error cluster above that size. At first glance, one might be tempted to show that the expansion of error clusters beyond a fraction of the code distance happens with negligible probability, but that calculation soon becomes complicated when considering the merging of disjoint clusters. Instead, we split the computation into steps. In each step, only one gate or one fault is applied, and steps are ordered such that they agree with the computation. Figure 4 illustrates a quantum circuit and a graph of steps corresponding to it.

Since the gates and the faults have a bounded fan-in/out<sup>4</sup> In each step, the maximal size of an error cluster can increase by at most a constant factor, with the maximal increase occurring when multiple clusters are merged. Equipped with that insight, we are able to infer the intermediate theorem.

Section 3.2 formalize the computation model and the computation graph presentation (splitting to steps). In particular, see Claim 3.15 and Corollary 3.16 for the formal proof of the intermediate theorem.

**Description of the Construction.** Similarly to other fault tolerance approaches, we use the concatenation construction in order to initialize zeros and resource states encoded in the 4D-Toric code, as referred to in [Gro19], [Got14]. From there, we assume that all the quantum registers are encoded in the 4D-Toric code, and we name each of the encoded block a quantum register. The resources states are spread across two registers.

Then, after the initialization step, the logical cycles are divided into error correction, which is a single sweep-cycle, and 'logical operation' cycle. For our universal logical gate set, we choose **CX** (controlled NOT), **H**, **S**, and **T** gates. Except for the 'Controlled NOT' gate, which is realized by transversal wire-wise physical 'Controlled

<sup>4</sup>The faults are bounded-fan because we can assume that in the time units representation they are Pauli products and therefore in the steps presentation they are decomposed into single qubit Pauli matrices.

NOT' gates, all the others are implemented via gate teleportation [ZLC00].

The general realization by gate teleportation is done as follows: first, we XOR the target state into a resource state via  $\mathbf{CX}$ , measure the input state and the first register of the resource state with a Bell measurement, the input register in the  $X$  basis, and the first register of the resource state in the  $Z$  basis. Then, on the classical outcomes, run a classical decoding procedure to extract the logical codeword. Meanwhile, on the second register of the resource, which is intended to contain the result of the action, perform a sweep cycle. At the end of the decoding, depending on the result, we apply either a transversal Pauli operator or the  $\mathbf{S}$  gate (again by teleportation) depending on the original gate that was asked to simulate. The gate teleportation lasts for multiple logical cycles, depending on the depth required by the classical decoding procedure.

We emphasize that for measuring the input register in the  $X$ -basis, we apply the Hadamard through its fold-transversal realization [BB24], so the measurement is done in constant depth. However, the reason we don't implement the Hadamard by fold-transversal from the beginning is that we have failed to provide proof that restricts the expansion of the bounded-triangle<sup>5</sup> by the fold-transversal realization. Since it guarantees that after the measurement the register will not observe more faults, we can tolerate a one-time blowup in the size of the error and still be able to decode the logical state in the register correctly.

In Section 3.3, we discuss in detail the structures of the logical codeword of the 4D-Toric code and the realization of its logical gates.

**Toom's Contours.** A sufficiently simple definition of Toom's contours in [BS88] would be a directed graph that describes a noisy run with the additional marking of diverged bits. In our case—the quantum case—the vertices of Toom's contour are neither bits nor checks; instead, they are the vertices on the Torices that 'diverged'. A proper conceptual definition would be:

*A graph that describes a noisy run from the Torices' perspective. In particular, the vertices of the graph are the vertices of the Torices, equipped with a time coordinate, that are adjacent to unsatisfied checks.*

We adjust their construction as follows: Denote the graph by  $\mathcal{H} := (V_{\mathcal{H}}, E_{\mathcal{H}})$  and

1. If at time  $t$ , a vertex  $v$ , on the one the Toric complexes<sup>6</sup> corresponding to one of the quantum registers, sees an unsatisfied check on it's local view, then add  $(v, t)$  to the vertices.
2. If at time  $t$ , vertex  $v$  sees an unsatisfied check, and at time  $t + 1$  its neighbor  $u$  sees an unsatisfied check, then we think of the situation as ' $v$  leads' to  $u$ ' and connect  $(v, t)$  and  $(u, t + 1)$  with an 'arrow'. The vertices  $v$  and  $u$  might belong to different registers (which matches the case that at time  $t$  we apply an operator on both registers). For convenience, we don't require  $u$  at time  $t$  to see only satisfied checks.

---

<sup>5</sup>The permutation used in the Hadamard realizations mirrors the errors

<sup>6</sup>Actually the infinite grid.

3. As in the classical case, connect any two vertices in  $V_{\mathcal{H}}$  that are connected to a third by 'arrows' with a 'fork'.

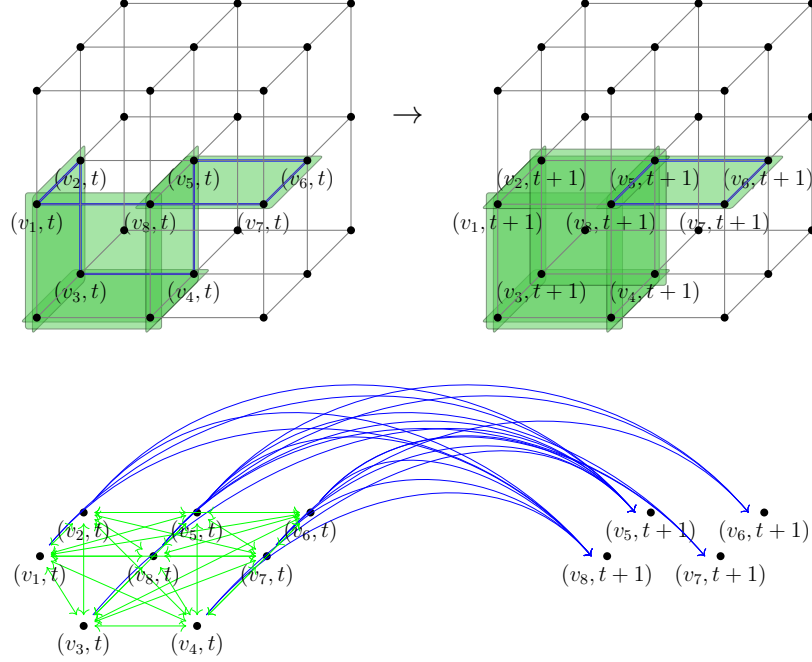


Figure 5: Above: The application of a sweep-cycle, where the green faces represent the bits assignment  $z$ , and the blue edges correspond to unsatisfied checks  $\partial z$ . The vertices in  $\partial z$  are labeled as  $v_1, v_2, \dots, v_8$ . Below: The Toom's contour derived from the single computation layer that matches the cycle. Arrows are colored in blue, while forks are colored in green. Note that  $(v_1, t+1)$  doesn't belong to the Toom's contour (since  $v_1$  doesn't belong to the syndrome at time  $t+1$ ).

Later, we incorporate the 'splitting into turns' idea into the formation of Toom's counter  $\mathcal{H}$ -graphs, by gluing the layers corresponding to the first  $t-1$  layers with a final layer that matches a partial execution of the  $t$ th time unit. The layer encodes the situation of the running up to a certain step. Then, combining with the intermediate theorem, we have that any running that admits a logical error derives a Toom's contour, with sufficiently large vertices at final layer.

The rest of the analysis follows [BS88]. We define *slices* at time  $t$  to be connected (by arrows) components of vertices at time  $t$ . Then, in the merging of two slices into one, it is guaranteed that faults induced by each are disjoint; otherwise, those two slices will be connected by arrows, namely - the same slice. For a *slice*, we define its size to be the perimeter of the triangle that would bound the vertices of the slice if they were projected on the same Toric. Then, by induction, we prove that Toom's contour that induces at time  $t$  a slice with size  $s$  has a spanning tree with at most and at least a constant times  $s$  edges and leaves (and therefore faults). That allows us to bound the probability of such a slice occurring by counting the number of possible spanning trees and assigning them the probability that the minimal number of faults occurs.

One technical change that we made and haven't discussed yet is that in the gluing of the last layer, which was defined to capture a partial layer execution up to a turn, we connect by arrows any two vertices that were added to  $V_{\mathcal{H}}$  and share a check. By doing so, we ensure that connected components in the Tanner graph would also be connected by arrows in Toom's contours. We emphasize that such edges connection can be made only in the last stage, as it doesn't pass the induction step. However, the final slice that is formed passes the desired inequalities only by constants and is therefore sufficiently good to derive the probability bound.

Section 3.7 defines Toom's contours, Section 3.8 defines the slices and states a claim connecting a slice to its predecessors, and Section 3.9 provides the induction proofs.

## 3 The Proof in Detail

### 3.1 Notations

We follow the standard notations commonly used in the literature. For an integer  $n$ , we denote by  $[n]$  the set of integers  $\{1, 2, \dots, n\}$ . To present a countable set, which might or might not be finite, where the number of elements does not matter, we use curly brackets with a subscript denoting the first index of the set. For example,  $\{u_i\}_{i=1}$  represents the set  $u_1, u_2, \dots$ . For finite sets, we might add a superscript to present the size of the set. If the first index is clear from the context, then we might omit the assignment. We use a colon inside curly brackets to specify a set of elements satisfying a condition, i.e., for sets  $A, B$ , the notation  $\{a : a \in A, a \in B\}$  equals  $A \cap B$ . Curly brackets without subscripts or conditions refer to singletons. For example, for a given integer  $i$ , the set  $\{u_i\}$  is the set that contains only the element  $u_i$ . The size of a set  $A$  is denoted by  $|A|$ . For an integer  $i$ , we denote by  $\mathbf{1}_i$  the vector consisting of one at the  $i$ th coordinate and zero elsewhere. The char  $|$  symbolizes a restriction, for example  $x|_y$ , is the restriction of the 'entity  $x$ ' to ' $y$ '. The particular behavior of the restriction would change depending on the target type.

When not otherwise mentioned, we consider quantum states over qubits, each lying in a two-dimensional Hilbert space  $\mathcal{H}_2$ , and denote by  $\mathcal{H}_{2^n}$  the Hilbert space of an  $n$ -qubit system. The  $\otimes$  operator stands for tensor product, for example:  $\mathcal{H}_{2^n} = \mathcal{H}_2^{\otimes n}$ . The space of linear operators on the Hilbert space is denoted by  $L(\mathcal{H})$ . Pure quantum states and their dual presentations are denoted by  $|\psi\rangle, \langle\psi|$ , and in the matrix representation, we use  $|\psi\rangle\langle\psi|$  to denote its density matrix. We will use  $\rho$  to denote a mixed state. The action of an operator  $A$  on a mixed state is written as  $A \circ \rho$ . For example, if  $A$  is a unitary operator, then  $A \circ \rho = A\rho A^\dagger$ . The letters,  $X$  and  $Z$ , will usually denote the single qubit  $X$  and  $Z$  Pauli operators. Yet, where the Pauli matrices are out of context, we use these letters for other variables. The gate 'Controlled Not' is denoted by **CX**, and the gates Hadamard, S, and T are denoted by:

$$\mathbf{H} = \frac{1}{\sqrt{2}} \begin{bmatrix} 1 & 1 \\ 1 & -1 \end{bmatrix}, \mathbf{S} = \begin{bmatrix} 1 & 0 \\ 0 & i \end{bmatrix}, \mathbf{T} = \begin{bmatrix} 1 & 0 \\ 0 & e^{i\frac{\pi}{4}} \end{bmatrix}$$

For a quantum gate  $U$ , we denote by  $|U\rangle$  the resource state that can be used to simulate  $U$ . Notice that, in general, the resource state is not unique. In this work, we address specific states that will be discussed later. The function  $\mathbf{Pr}[\cdot]$  is the probability function. In the language of groups, for a group  $\mathcal{G}$  and elements  $g_1, \dots, g_l$ , we denote by  $\langle\{g_1, \dots, g_l\}\rangle$  the subgroup generated by  $g_1, \dots, g_l$ .

Throughout the paper, we will deal with CSS codes [CS96], [Ste96]. For a linear subspace  $A$ , we use  $|A\rangle$  to denote the uniform superposition over the vectors in  $A$ . A CSS code will usually be denoted by the pairs  $\mathcal{C}_X, \mathcal{C}_Z$  such that the  $Z$ -stabilizers match the codewords of  $\mathcal{C}_Z^\perp$ , and the logical codewords in the computational basis are the elements in  $\mathcal{C}_X/\mathcal{C}_Z^\perp$ . The logical zero codeword is  $|\mathcal{C}_Z^\perp\rangle$ . We denote the equivalence relation up to  $Z$ -stabilizer addition by  $\sim_{\mathcal{C}_X}$ . Namely, for  $x_1, x_2 \in \mathbb{F}_2^n$ , we have  $x_1 \sim_{\mathcal{C}_X} x_2$  if  $x_1 + x_2 \in \mathcal{C}_Z^\perp$ . By the same way we define  $\sim_{\mathcal{C}_Z}$ .

### 3.2 Computation Model

Informally, a quantum circuit is a placement of a collection of quantum gates, taken from a finite set, at different space-time locations. Each such location records when the gate is applied and on which qubits it acts. Formally:

**Definition 3.1** (Quantum Circuit). *A space-time location is a pair  $l = (t, S)$ , where  $t$  is a time coordinate and  $S = (s_1, \dots, s_\Delta)$  is an ordered tuple of qubit indices. For a finite collection of quantum gates*

$$\mathcal{G} \subset \left\{ g: L(\mathcal{H}_2^{\otimes \Delta}) \rightarrow L(\mathcal{H}_2^{\otimes \Delta}) \right\},$$

*and integers  $w, d \in \mathbb{N}$ , a quantum circuit  $C$  of depth  $d$  and width  $w$  is a collection of tuples*

$$C = \{u_i = (g_i, l_i)\}_i,$$

*where each  $g_i \in \mathcal{G}$  and each location  $l_i = (l_{i,1}, l_{i,2})$  belongs to  $\mathbb{Z}_d \times \mathbb{Z}_w^\Delta$ . We call the tuples  $u_i$  the gates of  $C$ . They must satisfy the following compatibility condition: if two gates have the same time coordinate, then their supports are disjoint. Namely, for  $u_i = (g_i, l_i), u_j = (g_j, l_j) \in C$ , the equality  $l_{i,1} = l_{j,1}$  implies that the sets of qubit indices appearing in  $l_{i,2}$  and  $l_{j,2}$  are disjoint. We denote by*

$$\text{Loc}(C) := \{l_i : u_i = (g_i, l_i) \in C\}$$

*the set of locations occupied by the gates of  $C$ . We define the  $t$ -layer of  $C$  to be its restriction to gates at time  $t$ :*

$$C|_t := \{u_i = (g_i, l_i) : u_i \in C \text{ and } l_{i,1} = t\}.$$

Later, we will restrict  $\mathcal{G}$  to contain **CX**, **H**, **S**, **T**, and measurements. To define the action of a quantum circuit  $C$  on a given mixed state, we first associate  $C$  with a directed acyclic graph.

**Definition 3.2** (Associated Computation DAG). Let  $C = \{u_i\}_i$  be a quantum circuit with depth  $d$  and width  $w$ . We define the associated computation DAG of  $C$ , denoted by  $\pi_C$ , to be the directed acyclic graph  $\pi_C = (\mathcal{U}, E)$  as follows:

1. The vertex set is the gate set of  $C$ , namely  $\mathcal{U} = \{u_i\}_i$ .
2. For  $u_i = (g_i, l_i)$  and  $u_j = (g_j, l_j)$ , there is a directed edge  $(u_i, u_j) \in E$  if and only if  $j$  is one of the minimizers of

$$\{l_{k,1} : (g_k, l_k) \in \mathcal{U}, l_{k,1} > l_{i,1}, l_{k,2} \cap l_{i,2} \neq \emptyset\}.$$

Equivalently,  $u_j$  is one of the earliest later gates whose support intersects the support of  $u_i$ . There may be more than one such minimizer, so the out-degree may exceed one.

Suppose that  $J = (j_1, j_2, \dots, j_k)$  is an ordering of the gate indices that agrees with a topological order induced by  $\pi_C$ . Then we define the associated partial circuits  $C_J = \{C_{J,i}\}_{i=1}^k$  by

1.  $C_{J,1} = \{u_{j_1}\}$ .
2. For  $1 \leq i < k$ , set  $C_{J,i+1} = C_{J,i} \cup \{u_{j_{i+1}}\}$ .

We call  $C_{J,i}$  the partial computation circuit up to step  $i$ .

**Definition 3.3.** Let  $\rho$  be a density matrix over  $w$  qubits, and let  $C = \{u_i\}_{i=1}$  be a quantum circuit with depth  $d$  and width  $w$ . For any density matrix  $\sigma$ , quantum gate  $g \in \mathcal{G}$ , and location  $l$ , the application of the gate-location tuple  $(g, l)$  on  $\sigma$ , denoted by  $(g, l) \circ \sigma$ , is the application of  $g$  on  $\sigma$  where wires are ordered such that the first qubit in the input to  $g$  is  $l_{2,1}$ , the second is  $l_{2,2}$ , and so on. The result of the application of  $C$  on  $\rho$ , denoted by  $C \circ \rho$ , is given by iterative applications of the gates  $\{u_i\}_{i=1}$  on  $\rho$ , according to a topological order induced by  $\pi_C$ .

We say that  $\rho_1, \rho_2, \dots, \rho_k$  is a computation prefix if  $\rho_1 = \rho$  and  $\rho_{i+1} = u'_i \circ \rho_i$ , where  $\{u'_i\}_{i=1}$  is a prefix of a topological ordering of  $\{u_i\}_{i=1}$ . If  $\{u'_i\}_{i=1}$  contains all the gates in  $\{u_i\}_{i=1}$ , then we call  $\rho_1, \rho_2, \dots, \rho_k$  a running.

For a quantum circuit  $C$ , we would like to discuss its action in the presence of different outcomes of faults. The following definition encodes the running in the presence of a specific set of faults  $\mathcal{E}$ .

**Definition 3.4** ( $C$  subjected to  $\mathcal{E}$  every  $m$  computational layers). Let  $C = \{u_i\}_i$  be a quantum circuit with depth  $d$  and width  $w$ , let  $m \in \mathbb{N}$ , and set

$$d_m := \left\lceil \frac{d}{m} \right\rceil.$$

Let  $\mathcal{L} \subset [d_m] \times [w]$  be a set of locations, and let  $\mathcal{E}$  be a quantum circuit, such  $\text{Loc}(\mathcal{E}) = \mathcal{L}$ . We name  $\mathcal{E}$  subsets of faults, and we name the layers of  $\mathcal{E}$  fault layers. The circuit  $C$  subjected to  $\mathcal{E}$  every  $m$  computational layers, denoted by  $C[\mathcal{E}]_m$ , is obtained by setting

the first layer to be the first layer of  $\mathcal{E}$ , then placing in order the layers of  $C$  and inserting one fault layer after every  $m$  consecutive  $C$ 's layers. Thus the second fault layer is inserted after the layers  $1, \dots, m$  of  $C$ , the third is inserted after the layers  $m+1, \dots, 2m$  of  $C$ , and so on. Concretely, each gate  $u_i = (g_i, (t_i, S_i))$  of  $C$  is moved to the time coordinate

$$t_i + \left\lfloor \frac{t_i - 1}{m} \right\rfloor,$$

while each fault gate  $(g, (t, S)) \in \mathcal{E}$  is placed at time coordinate

$$t(m+1).$$

When  $m = 1$ , the gates occupy the even time coordinates and the fault layers occupy the odd time coordinates. When the parameter is omitted, we mean  $m = 1$ . We denote the associated computation DAG of  $C[\mathcal{E}]_m$  by  $\pi_{C[\mathcal{E}]}$ .

**Remark 3.5.** Formally, a fault circuit is just a particular quantum circuit whose gates are interpreted as faults rather than as computational operations. Thus the distinction between a quantum circuit and a fault circuit is semantic rather than structural: both are circuits in the sense of Definition 3.1, but they play different roles in the analysis.

**Example 3.6.** When  $m = 3$ , the 'computational' layers are sent to the times

$$2, 3, 4, 6, 7, 8, 10, 11, 12, \dots,$$

while the fault layers are sent to the times

$$1, 5, 9, 13, \dots$$

**Definition 3.7** (Noise channel and local stochastic noise channel). A noise channel  $\mathcal{N}_{\mathcal{E}}$  is a distribution over sets of fault locations. Let  $p \in (0, 1)$ , we say that the noise channel  $\mathcal{N}_{\mathcal{E}}$  is local stochastic with rate  $p$  if for every finite set of locations  $S \subset \mathbb{N} \times \mathbb{N}$ ,

$$\Pr_{\mathcal{E} \sim \mathcal{N}_{\mathcal{E}}} [S \subset \text{Loc}(\mathcal{E})] \leq p^{|S|}.$$

So,  $\mathcal{N}_{\mathcal{E}}$  defines a probability space. The set of faults  $\mathcal{E}$  is an atomic outcome, and for a given circuit  $C$ , the subjected circuit  $C[\mathcal{E}]$  is a random variable. The following claim states that for local stochastic noise, the subsection of every 1-layer is equivalent to the subsection of every  $m$ -layer, up to a rescaling of the noise rate. Here, by equivalence, we mean that the actions of the subjected circuits are the same<sup>7</sup>.

We give the proof in the appendix for several reasons. First, the argument is not the core of this work. Second, versions of it appear in almost any fault tolerance work. Additionally, it relies on 'propagation of entire layers,' a term that conflicts with the 'propagation to a step' (Definition 3.9) needed for the intermediate theorem.

---

<sup>7</sup>For a given input (mixed) state  $\rho$ , they yield the same output

**Claim 3.8.** *Let  $\mathcal{N}_{\mathcal{E}}$  be a local stochastic noise channel with rate  $p$ , and let  $C$  be a quantum circuit whose gates have arity at most  $\Delta$ . Fix an even integer  $c$ . Then there exists a local stochastic noise channel  $\mathcal{N}_{\mathcal{E}_q}$  with rate*

$$q := \left(2^{H(\Delta^{-2c})\Delta^c} p\right)^{\Delta^{-c}},$$

*such that for any given state  $\rho$  it holds that:*

$$C[\mathcal{E}]_1 \circ \rho = C[\mathcal{E}_q]_{c/2} \circ \rho$$

*In particular, up to a constant depending only on  $\Delta$  and  $c$ , the rate  $q$  behaves like  $p^{\Delta^{-c}}$ .*

Equipped with this claim, we are allowed to assume having constant depth cycles that don't observe faults.

The following definition of propagation describes the evolution of a fault. It assumes an order of steps and defines an operator that is obtained by commuting a given fault with the gates (and faults) prior to a given step.

**Definition 3.9** (Fault propagation to a step  $\tau$ ). *Let  $C = \{u_i\}_i$  be a quantum circuit, let  $J = (j_1, \dots, j_k)$  be an order agreeing with  $\pi_C$ , and let  $u_i \in C$ . Suppose that  $u_i = u_{j_l}$  in this order. If  $l > \tau$ , we define the propagation of  $u_i$  to step  $\tau$  to be the identity operator.*

*Otherwise, define operators  $X_0, X_1, \dots, X_{\tau-l}$  recursively by setting  $X_0 = u_{j_l}$  and requiring that for every  $1 \leq s \leq \tau - l$ ,*

$$X_{s-1}u_{j_{l+s}} = u_{j_{l+s}}X_s.$$

*We then define the propagation of  $u_i$  to step  $\tau$  to be the operator*

$$X := X_{\tau-l}.$$

*Now let  $C[\mathcal{E}]$  be a noisy circuit, let  $J$  be an order agreeing with  $\pi_{C[\mathcal{E}]}$ , and let  $\tau$  be a step in that order. For each fault gate  $e \in \mathcal{E}$  that occurs no later than step  $\tau$ , denote by  $X_e^\tau$  its propagation to step  $\tau$ . We define the propagated error at step  $\tau$  by multiplying these propagated faults in reverse topological order:*

$$X^\tau := \prod_{e \preceq \tau} X_e^\tau.$$

The propagation up to step  $\tau$  allows us to define the deviation from an ideal run by propagating all the faults and marking all the locations in the result. The deviation up to stabilizers is defined almost the same, but considering the propagated faults modulated by the stabilizers.

**Definition 3.10** (Deviation). *For a quantum circuit  $C$ , a set of faults  $\mathcal{E}$ , and step  $\tau$ , let  $X^\tau$  be the propagated error at step  $\tau$ . We define the deviation of  $C[\mathcal{E}]$  from  $C$  at step  $\tau$  by the set of indices on which  $X^\tau$  acts non-trivially.*

**Definition 3.11.** Using the same notations as in Definition 3.10, for a set of unitary operators  $\mathcal{S} = \{s_i: \mathcal{H}_2^w \rightarrow \mathcal{H}_2^w\}_{i=1}$ , we define the propagated error up to stabilizers in  $\mathcal{S}$  as  $X^\tau[S] := \min_{s \in \mathcal{S}} \{w(sX)\}$ . Then, we define the deviation of  $C[\mathcal{E}]$  from  $C$  at step  $\tau$  up to stabilizers in  $\mathcal{S}$  to be the subset of coordinates on which  $X^\tau[S]$  acts non-trivially.

The following definitions extend the notion of a Tanner graph to the setting of quantum circuits by joining the Tanner graphs of each encoded register. Deviation clusters are a connected component of the Tanner graph such that each of their checks touches a qubit that belongs to the deviation.

**Definition 3.12** (Tanner graph of a register). Let  $C$  be a quantum circuit and let  $R$  be a register, namely a subset of qubits of  $C$ . The Tanner graph of  $R$  at step  $\tau$ , denoted by  $\mathcal{T}_{R,\tau}$ , is defined as follows:

1. If at step  $\tau$  the register  $R$  is encoded by a code  $\mathcal{C}$ , then  $\mathcal{T}_{R,\tau}$  is the Tanner graph of  $\mathcal{C}$ .
2. Otherwise,  $\mathcal{T}_{R,\tau}$  is the empty graph.

When the step is clear from the context, we omit the subscript  $\tau$ .

**Definition 3.13** (Generalized Tanner graph of a circuit). Let  $C$  be a quantum circuit. For registers  $A$  and  $B$  in  $C$ , define the generalized Tanner graph of their union by

$$\mathcal{T}_{A \cup B, \tau} := \mathcal{T}_{A, \tau} \cup \mathcal{T}_{B, \tau}.$$

More generally, for a partition of the qubits into registers  $\{R_i\}_i$ , the generalized Tanner graph of  $C$  at step  $\tau$  is

$$\mathcal{T}_{C, \{R_i\}, \tau} := \bigcup_i \mathcal{T}_{R_i, \tau}.$$

When the partition and the step are clear, we abbreviate this notation to  $\mathcal{T}_C$ .

**Definition 3.14** (Clustered deviation). Let  $C$  be a quantum circuit, let  $R$  be a register of  $C$ , and let  $\mathcal{E}$  be a fault set. Let  $\mathcal{T}_{R,\tau}$  be the Tanner graph of  $R$  at step  $\tau$ , and let  $\mathcal{D}_\tau$  be the deviation of  $C[\mathcal{E}]$  from  $C$  on  $R$  at step  $\tau$ . Denote by  $\mathcal{T}_{R,\tau}|_{\mathcal{D}_\tau}$  the subgraph induced on the left vertices corresponding to the qubits in  $\mathcal{D}_\tau$ .

We say that two left vertices are connected if they share a common right neighbor. The deviation clusters at step  $\tau$  are the connected components of  $\mathcal{T}_{R,\tau}|_{\mathcal{D}_\tau}$ . The size of a deviation cluster is the number of right vertices it contains.

**Claim 3.15.** Let  $C$  be a quantum circuit whose gates act on at most  $\Delta$  qubits. Let  $R$  be a quantum register encoded by a quantum error-correcting code whose Tanner graph has left degree at most  $\Delta_1$  and right degree at most  $\Delta_2$ . Fix a fault set  $\mathcal{E}$  and an order  $J$  agreeing with  $\pi_{C[\mathcal{E}]}$ . For a step  $\tau \in J$ , let  $Y_1^{(\tau)}, Y_2^{(\tau)}, \dots$  denote the deviation clusters at step  $\tau$ .

Suppose that at step  $\tau_1$  there is a deviation cluster  $Y_i^{(\tau_1)}$ . Then there exist deviation clusters  $Z$  and  $Z'$  at step  $\tau_1 - 1$  such that

$$Z \cap Y_i^{(\tau_1)} \neq \emptyset, \quad |Z| \geq \frac{1}{\Delta\Delta_1\Delta_2} |Y_i^{(\tau_1)}|,$$

and

$$Z' \cap Y_i^{(\tau_1)} \neq \emptyset, \quad |Z'| \leq \Delta\Delta_1\Delta_2 |Y_i^{(\tau_1)}|.$$

*Proof.* Let  $u$  be the gate applied at step  $\tau_1$ . Passing from step  $\tau_1 - 1$  to step  $\tau_1$  can modify the deviation only on qubits touched by  $u$ . Since  $u$  acts on at most  $\Delta$  qubits, and each such qubit is adjacent in the Tanner graph to at most  $\Delta_1$  checks, each of which meets at most  $\Delta_2$  qubits, the gate  $u$  can interact with vertices belonging to at most

$$\Delta\Delta_1\Delta_2$$

deviation clusters from step  $\tau_1 - 1$ .

Let  $Y_1, \dots, Y_m$ , with  $m \leq \Delta\Delta_1\Delta_2$ , be those deviation clusters at step  $\tau_1 - 1$  that meet the neighborhood affected by  $u$  and whose union contains  $Y_i^{(\tau_1)}$ . Then

$$|Y_i^{(\tau_1)}| \leq \sum_{j=1}^m |Y_j| \leq m \max_{1 \leq j \leq m} |Y_j| \leq \Delta\Delta_1\Delta_2 \max_{1 \leq j \leq m} |Y_j|.$$

Hence one of these clusters, call it  $Z$ , satisfies

$$|Z| \geq \frac{1}{\Delta\Delta_1\Delta_2} |Y_i^{(\tau_1)}|.$$

By construction,  $Z \cap Y_i^{(\tau_1)} \neq \emptyset$ .

For the upper bound, apply the same argument to the inverse gate  $u^\dagger$ , which also acts on at most  $\Delta$  qubits. Viewing the transition from step  $\tau_1$  back to step  $\tau_1 - 1$  as the application of  $u^\dagger$ , we conclude that some deviation cluster  $Z'$  at step  $\tau_1 - 1$  intersecting  $Y_i^{(\tau_1)}$  satisfies

$$|Z'| \leq \Delta\Delta_1\Delta_2 |Y_i^{(\tau_1)}|.$$

This proves both bounds. □

**Corollary 3.16** (Intermediate Value Theorem). *Let  $\alpha = 1/(\Delta\Delta_1\Delta_2)$ , and let  $x$  be an integer. Assume that at the initial step  $\tau_o$ , there is no deviation cluster of size more than  $\alpha x$ , and that at a step  $\tau_1 \in J$ , such that  $\tau_1 > \tau_o$ , there is a deviation cluster  $Y^{(\tau_1)}$  of size  $|Y^{(\tau_1)}| > x$ . Then there is a step  $\tau_\star \in J$  such that  $\tau_o < \tau_\star < \tau_1$  for which there is a deviation cluster  $Z$  at step  $\tau_\star$ , satisfying that the size of  $Z$  is in the range  $(\alpha x, x)$ .*

*Proof.* Assume for contradiction that for every step  $\tau$  with  $\tau_o < \tau < \tau_1$ , all deviation clusters have size at most  $\alpha x$ . In particular, this holds at step  $\tau_1 - 1$ . On the other hand, since  $|Y^{(\tau_1)}| > x$ , Claim 3.15 implies the existence of a deviation cluster at step  $\tau_1 - 1$  of size at least

$$\frac{1}{\Delta\Delta_1\Delta_2}|Y^{(\tau_1)}| = \alpha|Y^{(\tau_1)}| > \alpha x,$$

which is a contradiction. Therefore there must exist an intermediate step  $\tau_*$  with  $\tau_o < \tau_* < \tau_1$  at which some deviation cluster has size in the interval  $(\alpha x, x)$ .  $\square$

We close the subsection by applying the intermediate theorem to derive a bound on the occurrence of large deviation clusters at sizes greater than  $x$ . In particular, the intermediate theorem states that for that to happen, there has to be a turn in which there is a deviation cluster of size at least:  $(\Delta\Delta_1\Delta_2)^{-1}x$ .

**Claim 3.17.** *Let  $\alpha = (\Delta\Delta_1\Delta_2)^{-1}$ . Let  $C$  be a quantum circuit with order  $J$  and depth  $d$ , and let  $\mathcal{E} \sim \mathcal{N}_{\mathcal{E}}$ , so that  $C[\mathcal{E}]$  is a random circuit whose gates act on at most  $\Delta$  qubits. Fix a time  $t \leq 2d$  and an integer  $x \in \mathbb{N}$ . Let  $A$  be the event that by time  $t$  there exists a deviation cluster of size greater than  $x$ . For each step  $\tau \in J$ , let  $B_\tau$  be the event that step  $\tau$  is the first step at which there exists a deviation cluster of size in the interval  $(\alpha x, x)$ . Then*

$$\Pr[A] \leq 2wd \max_{\tau \in [2wd]} \Pr[B_\tau].$$

*Proof.* By Corollary 3.16, whenever the event  $A$  occurs there exists a step  $\tau \in J$  with  $\tau \leq 2wt$  at which there is a deviation cluster of size in the interval  $(\alpha x, x)$ . Hence

$$A \subset \bigcup_{\tau \in [2wt]} B_\tau \subset \bigcup_{\tau \in [2wd]} B_\tau.$$

The union bound now gives

$$\Pr[A] \leq \Pr\left[\bigcup_{\tau \in [2wd]} B_\tau\right] \leq \sum_{\tau \in [2wd]} \Pr[B_\tau] \leq 2wd \max_{\tau \in [2wd]} \Pr[B_\tau].$$

$\square$

### 3.3 The $(d, d')$ -Dimensional Toric Code

The main error correction code that we will use is the Toric code invented by Kitaev. In the 2D case, the code is obtained by taking a Toric, tiling it with squares, setting qubits on the edges, and checks as follows: For every vertex, the parity of the qubits adjoining it is even, and for any square, the parity of the qubits lying on its sides, in the phase basis, is even. A high-dimensional version can be obtained by taking a high-dimensional Toric, encoded as a cubical complex, and then setting the  $X$ -checks, the qubits, and the  $Z$ -checks to be faces at sequenced dimensions. Throughout this

paper, qubits will be set on  $d'$ -dimensional faces, and the  $X$ -checks and  $Z$ -checks on the  $d' \mp 1$  dimensional faces. For a review, we refer to [Kit97], [Den+02].

For defining a decoder and proving its 'correctness,' we will have to overload notation. We derive the Toric complex from the skeleton of the Cayley graph of the cyclic group, using the generating subset as a collection of positive directions. The  $\theta_{\mathbf{v}, S'}$  encodes a face, one vertex  $v$  that serves as its 'root,' and a subset of directions  $S'$ . Formally:

**Definition 3.18** ( $d$ -Dimensional Toric Complex). *For integers  $d$  and  $n$ , denote the group resulting from the  $d$ -directed power of the cyclic group of order  $n$  by  $\mathcal{G}_n^d = \mathbb{Z}_n^{\times d}$ , and denote the standard generating set of  $\mathcal{G}_n^d$  by  $S = \{1_i : i \in [d]\}$ . We define the  $d$ -dimensional toric complex to be the hypergraph obtained from the Cayley graph  $\text{Cay}(\mathcal{G}_n^d, S)$  by taking its vertices as the 0-faces and for any  $i \in [d-1]$  we define the  $i$ -faces as follow: First, for a vertex  $v \in \mathcal{G}_n^d$  and for a subset of generators  $S' \subset S$  of size  $|S'| = i$ , the  $i$ -face rooted at  $v$  and spanned by  $S'$ , denoted by  $\theta_{v, S'}$ , is:*

$$\theta_{v, S'} := \bigcup_{I \subset S'} \left\{ \left( \prod_{g \in I} g \right) v \right\}$$

*The  $i$ -faces of the complex are the collection of all the possible rooted spanned  $i$ -faces induced by  $\text{Cay}(\mathcal{G}_n^d)$ . We will denote them by  $\mathcal{F}_i$ .*

*Additionally, we name  $n$  and  $d$ , the side length and the dimension of the complex.*

**Definition 3.19** (Positive Edges and Cubes). *For  $u, v \in \mathcal{G}_n^d$ , and  $S'_1, S'_2 \subset [d]$ , with sizes  $|S'_1| = |S'_2| = i$ , we say that the  $i$ -faces  $\theta_{v, S'_1}$  and  $\theta_{u, S'_2}$  are adjacent if the intersection  $\theta_{v, S'_1} \cap \theta_{u, S'_2}$  is an  $i-1$ -face. In addition, if  $\theta_1$  and  $\theta_2$  are  $i$  and  $i-1$ -faces such that  $\theta_2 \subset \theta_1$ , then we say that  $\theta_2$  is a positive edge relative to face  $\theta_1$  if they are rooted at the same vertex. Furthermore, we say that  $\theta_1$  is a positive cube of  $\theta_2$ . When the  $i$ -face is clear from the context, we will abbreviate and say that  $\theta_2$  is positive.*

**Example 3.20.** *For example, let  $v, u \in \mathcal{G}_n^d$  and  $g_1 \neq g_2 \in S$ . Consider the 2-face  $\theta = \{v, g_1v, g_2g_1v, g_2v\}$ . Then, for  $x, y \in \mathcal{G}_n^d$ , we say that an edge (1-face)  $\{x, y\}$  is positive relative to the face  $\theta$  if  $x = v$  and  $y$  is either  $g_1v$  or  $g_2v$ .*

We denote the complex by  $G = (V, E, F)$ , where  $V$ ,  $E$ , and  $F$  are the 0-, 1-, and 2-faces. Below, we formalize binary assignments on the toric complex and introduce boundary operators. These boundary operators are the same as standard boundary operators in the chain complex formalism.

**Definition 3.21** (Assignments on a toric complex). *Let  $\mathcal{T}$  be a  $d$ -dimensional toric complex. For each  $i$ , the set of  $i$ -faces induces a vector space  $\mathbb{F}_2^{|\mathcal{F}_i|}$ . An element  $z \in \mathbb{F}_2^{|\mathcal{F}_i|}$  is called an assignment on the  $i$ -faces of  $\mathcal{T}$ .*

*For a vertex  $v$  and a subset of generators  $S' \subset S$  of size  $|S'| = i$ , let  $\theta_{\mathbf{v}, S'}$  denote the standard basis vector corresponding to the  $i$ -face  $\theta_{v, S'}$ . Thus the family*

$$\{\theta_{\mathbf{v}, S'} : v \in \mathcal{F}_0, S' \subset S, |S'| = i\}$$

is the standard coordinate basis of  $\mathbb{F}_2^{|\mathcal{F}_i|}$ .

Let  $z$  be an assignment on the  $i$ -faces. Let  $v_1, \dots, v_k \in \mathcal{F}_0$  and  $S'_1, \dots, S'_k \subset S$  be such that  $\theta_{v_1, S'_1}, \theta_{v_2, S'_2}, \dots, \theta_{v_k, S'_k}$  are precisely the  $i$ -faces in the support of  $z$ , namely:

$$z = \sum_{i=1}^k \theta_{v_i, S'_i}$$

We refer to  $\theta_{v_1, S'_1}, \theta_{v_2, S'_2}, \dots, \theta_{v_k, S'_k}$  as the collection of faces that form  $z$ , or briefly, the faces form  $z$ . For  $i > 0$ , we define the linear map  $\partial : \mathbb{F}_2^{|\mathcal{F}_i|} \rightarrow \mathbb{F}_2^{|\mathcal{F}_{i-1}|}$  such that

$$\partial \theta_{v, S'} := \sum_{g \in S'} \theta_{v, S'/g} + \sum_{g \in S'} \theta_{g v, S'/g}$$

For  $i < d$ , we define the linear map  $\partial^* : \mathbb{F}_2^{|\mathcal{F}_i|} \rightarrow \mathbb{F}_2^{|\mathcal{F}_{i+1}|}$  such that

$$\partial^* \theta_{v, S'} := \sum_{g \in S/S'} \theta_{v, S' \cup g} + \sum_{g \in S'} \theta_{g^{-1} v, S' \cup g}$$

We define the restriction of  $z$  to a vertex  $v$  to be the linear map  $|_v : \mathbb{F}_2^{|\mathcal{F}_i|} \rightarrow \mathbb{F}_2^{|\mathcal{F}_i|}$  such that:

$$\theta_{u, S'}|_v := \begin{cases} \theta_{u, S'} & v \in \theta_{u, S'} \\ 0 & \text{else} \end{cases}$$

We define the front of  $z$  to a vertex  $v$  to be the linear map  $|_{v+} : \mathbb{F}_2^{|\mathcal{F}_i|} \rightarrow \mathbb{F}_2^{|\mathcal{F}_i|}$  such that:

$$\theta_{u, S'}|_{v+} := \begin{cases} \theta_{u, S'} & u = v \\ 0 & \text{else} \end{cases}$$

We say that an assignment  $z$  is connected if the graph that is induced by taking the faces that support  $z$  as vertices and defining the edges to be the adjacency relation between them is connected. We define the connected components of  $z$  to be its subsets such that each of them is a connected assignment. For a  $j$ -face  $f$ , we say that  $f \in z$  if  $z$  has a support on  $\theta_{v, S'}$  such that  $f \in \theta_{v, S'}$ . Consider an assignment  $z \in \mathbb{F}_2^{|\mathcal{F}_i|}$  and a vertex  $v \in \mathcal{G}_n^d$ . We say that  $z$  is a rooted assignment at vertex  $v$  if there are subsets  $S'_1, \dots, S'_k \subset S^{\times k}$  such that each of  $S'_j$  is at size  $i$  and  $z$  is decomposed as:

$$z = \sum_j^k \theta_{v, S'_j}$$

Put differently,  $z$  is the result of taking a collection of  $i$ -faces that are rooted at  $v$ .

We are ready to give a formal definition of the  $(d, d')$ -Toric code.

**Definition 3.22** ( $(d, d')$  Toric Code). *Let  $d, d'$  be integers such that  $1 < d' < d$ . For any integer  $n$ , we construct the  $n$ th instance of the quantum code family  $(d, d')$  Toric Code as follows: Let  $G = (\mathcal{F}_0, \dots, \mathcal{F}_d)$  be the  $d$ -dimensional toric complex obtained from  $\mathcal{G}_n^d$  as defined in Definition 3.18. We associate the  $(q)$ bits with the  $\mathcal{F}_{d'}$ , the  $X$ -checks with the  $\mathcal{F}_{d'-1}$ , and the  $Z$ -checks with the  $\mathcal{F}_{d'+1}$ . An  $X$ -check,  $c_x$ , is satisfied if the parity of  $(q)$ bits set on the  $d'$ -face containing  $c_x$  is even. Similarly, a  $Z$ -check,  $c_z$ , is satisfied if the parity, in the Hadamard basis, of the  $(q)$ bits set on the  $d'$ -faces contained in  $c_z$  is even.*

We argue that the  $(d, d')$ -Toric code is indeed a CSS, and prove that by showing that boundary operators  $\partial^\pm : \mathbb{F}_2^{|\mathcal{F}_i|} \rightarrow \mathbb{F}_2^{|\mathcal{F}_{i\pm 1}|}$  induce a chain complex.

**Claim 3.23** (CSS structure). *The  $(d, d')$ -Toric code is a CSS code.*

*Proof.* We will show that  $\mathbb{F}_2^{|\mathcal{F}_i|} \xrightarrow{\partial^\pm} \mathbb{F}_2^{|\mathcal{F}_{i\pm 1}|}$  are a<sup>8</sup> chain complex and its dual chain. First, we show that  $(\partial^+)^T = \partial^-$ . Consider vertices  $v, u \in V$  and two generator subsets  $A, B \subset S$ . Consider the basis elements defined by them:  $\theta_{v,A}$  and  $\theta_{u,B}$ . Suppose that:

$$(\partial^+ \theta_{v,A}) \theta_{u,B} = 1$$

Means that there exists  $g \notin A$  such that  $A \cup \{g\} = B$  and either  $v = u$  or  $g^{-1}v = u$ . But that is equivalent to saying that there is  $g \in B$  such that  $B \setminus \{g\} = A$  and either  $v = u$  or  $v = g^{-1}u$ . In other words:

$$\begin{aligned} (\partial^+ \theta_{v,A}) \theta_{u,B} &= \theta_{v,A} (\partial^- \theta_{u,B}) \\ \Rightarrow (\partial^+)^T &= \partial^- \end{aligned}$$

So it's left to show that the boundary of a boundary is zero. Consider a basis vector  $\theta_{v,S'}$ :

$$\begin{aligned} \partial^- (\partial^- \theta_{v,S'}) &= \partial^- \left( \sum_{g \in S'} \theta_{v,S'/g} + \sum_{g \in S'} \theta_{gv,S'/g} \right) \\ &= \sum_{\substack{g', g \in S' \\ g' \neq g}} (\theta_{v,S'/{g,g'}} + \theta_{g'v,S'/{g,g'}} + \theta_{gv,S'/{g,g'}} + \theta_{g'gv,S'/{g,g'}}) \\ &= 0 \end{aligned}$$

Where we used that the term in the closure is invariant to sweeping between  $g$  and  $g'$ , and therefore any term in the sum appears twice. Similarly:

$$\begin{aligned} \partial^+ (\partial^+ \theta_{v,S'}) &= \partial^+ \left( \sum_{g \in S/S'} \theta_{v,S' \cup g} + \sum_{g \in S/S'} \theta_{g^{-1}v, S' \cup g} \right) \\ &= \sum_{\substack{g', g \in S/S' \\ g' \neq g}} (\theta_{v, S' \cup {g,g'}} + \theta_{g'^{-1}v, S' \cup {g,g'}} + \theta_{g^{-1}v, S' \cup {g,g'}} + \theta_{g'^{-1}g^{-1}v, S' \cup {g,g'}}) \\ &= 0 \end{aligned}$$

---

<sup>8</sup>Check if that is grammatical correct.

The conditions  $(\partial^\pm)^{\circ 2} = 0$  imply that  $\mathbb{F}_2^{|\mathcal{F}_i|} \xrightarrow{\partial^\pm} \mathbb{F}_2^{|\mathcal{F}_{i\pm 1}|}$  are chain complexes. Therefore, for any  $d'$ , every  $d' - 1$  face and every  $d' + 1$  face overlap on an even number of  $d'$ -faces, so the corresponding  $X$ - and  $Z$ -checks commute. This is exactly the CSS condition.  $\square$

The  $\theta_{\mathbf{u}, S'}$  notation gives a nice interpretation of the logical code words. Particularly, an  $X$ -type logical codeword is given as follows: Take a subset of generators  $S' \subset S$  and consider the subgroup generated by it,  $\langle S' \rangle$ ; let us denote the subgroup by  $K$ . Then the logical codeword is the  $X$ -product over all  $\theta_{\mathbf{u}, S'}$  such that  $\mathbf{u} \in K$ . Moreover, replacing  $K$  by a coset whose base subgroup is  $\langle S' \rangle$ , we get another presentation of the same logical codeword.

**Claim 3.24.** *For any generator subset  $S'$  of size  $d'$ , denote by  $x_{S'}$  and  $z_{S'}$  the following assignments:*

$$x_{S'} := \sum_{\mathbf{u} \in \langle S' \rangle} \theta_{\mathbf{u}, S'} \quad z_{S'} := \sum_{\mathbf{u} \in \langle S/S' \rangle} \theta_{\mathbf{u}, S'}$$

*Then  $x_{S'}$  and  $z_{S'}$  are binary representations of anticommuting logical codewords of the  $(d, d')$ -Toric code. In particular,  $x_{S'} \in \mathcal{C}_X / \mathcal{C}_Z^\perp$ ,  $z_{S'} \in \mathcal{C}_Z / \mathcal{C}_X^\perp$ , and  $x_{S'} z_{S'} = 1$ . In addition, let  $X_{S'}$  and  $Z_{S'}$  be the Pauli matrices obtained by multiplying each non-trivial coordinate of them by  $X$  or  $Z$ , respectively.*

*Proof.* By definition,  $x_{S'}$  and  $z_{S'}$  are binary assignments on the  $d'$ -dimensional faces. We start by showing that  $x_{S'} \in \mathcal{C}_X$  and  $z_{S'} \in \mathcal{C}_Z$ ; namely, that the boundaries  $\partial^- x_{S'}$  and  $\partial^+ z_{S'}$  vanish.

$$\begin{aligned} \partial^- \sum_{\mathbf{u} \in \langle S' \rangle} \theta_{\mathbf{u}, S'} &= \sum_{\mathbf{u} \in \langle S' \rangle} \sum_{g \in S'} \theta_{\mathbf{u}, S'/g} + \theta_{\mathbf{g}\mathbf{u}, S'/g} \\ &= \sum_{g \in S'} \sum_{\mathbf{u} \in \langle S' \rangle} \theta_{\mathbf{u}, S'/g} + \sum_{\mathbf{u} \in \langle S' \rangle} \theta_{\mathbf{g}\mathbf{u}, S'/g} \\ &= \sum_{g \in S'} \sum_{\mathbf{u} \in \langle S' \rangle} \theta_{\mathbf{u}, S'/g} + \sum_{\mathbf{u} \in \langle S' \rangle} \theta_{\mathbf{u}, S'/g} = 0 \\ \partial^+ \sum_{\mathbf{u} \in \langle S' \rangle} \theta_{\mathbf{u}, S/S'} &= \sum_{\mathbf{u} \in \langle S' \rangle} \sum_{g \in S'} \theta_{\mathbf{u}, S/S' \cup g} + \theta_{\mathbf{g}^{-1}\mathbf{u}, S/S' \cup g} \\ &= \sum_{g \in S'} \sum_{\mathbf{u} \in \langle S' \rangle} \theta_{\mathbf{u}, S/S' \cup g} + \sum_{\mathbf{u} \in \langle S' \rangle} \theta_{\mathbf{g}^{-1}\mathbf{u}, S/S' \cup g} \\ &= \sum_{g \in S'} \sum_{\mathbf{u} \in \langle S' \rangle} \theta_{\mathbf{u}, S/S' \cup g} + \sum_{\mathbf{u} \in \langle S' \rangle} \theta_{\mathbf{u}, S/S' \cup g} = 0 \end{aligned}$$

Thus  $x_{S'} \in \mathcal{C}_X$  and  $z_{S'} \in \mathcal{C}_Z$ , now for showing that they are not binary representations of stabilizers, it's enough to show they admit no vanishing product.

$$x_{S'} z_{S'} = \sum_{\mathbf{u} \in \langle S' \rangle} \theta_{\mathbf{u}, S'} \sum_{\mathbf{u} \in \langle S/S' \rangle} \theta_{\mathbf{u}, S'} = \theta_{\mathbf{e}, S'} \theta_{\mathbf{e}, S'} = 1$$

Therefore, the Paulis  $X_{S'}$  and  $Z_{S'}$  are  $X$ - and  $Z$ -type anticommuting logical code words.  $\square$



Figure 6: In blue and green are the binary presentations  $x_S$  and  $z_S$  of logical code words of the  $(2, 2)$ -Toric code. The edge  $\{(5, 4), (0, 4)\}$  is omitted for clarity (it should be a green edge that hovers over the green line).

The  $(d, d')$ -Toric code admits a fold-transversal Hadamard-type realization for any dimensions  $d, d'$ . Particularly, the gate exchanges logical Pauli  $X_{S'}$  with logical Pauli  $Z_{S/S'}$  and vice versa. It is realized by an application of transversal Hadamards followed by permuting the qubits according to a transformation which we name the  $\phi$ -transpose map. We define the transpose map as follows:

**Definition 3.25** (The Transpose Map). *Let  $d, d'$  be integers, such that  $d' < d$ , and let  $\mathcal{G}$  be a  $(d, d')$ -Toric complex generated by the generator set  $S$ . We define the transpose map  $\phi : \mathcal{F}^{d'} \rightarrow \mathcal{F}^{d-d'}$  by acting on the basis elements as follows:*

$$\phi(\theta_{\mathbf{v}, \mathbf{S}'}) \rightarrow \theta_{\mathbf{v}-\mathbf{1}, \mathbf{S}/\mathbf{S}'}$$

Notice that the transpose map is a permutation over the bits and therefore can be realized at constant depth.

**Definition 3.26** (Hadamard-Type Gate  $\mathbf{H}_\phi$ ). *We define the logical Hadamard-type gate  $\mathbf{H}_\phi : L(\mathcal{H}) \rightarrow L(\mathcal{H})$  as follows, for any  $S' \subset S$ , of size  $d'$ :*

$$\mathbf{H}_\phi(X_{S'}) \rightarrow Z_{S/S'} \quad \mathbf{H}_\phi(Z_{S'}) \rightarrow X_{S/S'}$$

**Claim 3.27.** *The Hadamard-type gate  $\mathbf{H}_\phi$  has a fold-transversal implementation by, first applying  $\mathbf{H}^n$  over all the physical qubits, and then permuting them by the transpose map  $\phi$ , namely  $\hat{\mathbf{H}}_\phi = \phi \circ \mathbf{H}^n$ .*

*Proof.* Clearly, for any subset of generators  $S' \subset S$ , the map  $\phi$  sends  $x_{S'}$  to  $z_{S/S'}$ :

$$\phi(x_{S'}) = \phi\left(\sum_{u \in \langle S' \rangle} \theta_{u, S'}\right) = \sum_{u \in \langle S' \rangle} \theta_{u, S/S'} = z_{S/S'}$$

Moreover,  $\phi$  sends binary representations of  $Z$ -stabilizers to binary representations of  $X$ -stabilizers, and vice versa. To see this, consider a  $d' + 1$  dimensional face, and consider the image of the stabilizer it defines.

$$\begin{aligned} \phi(\partial^- \theta_{v, S'}) &= \phi\left(\sum_{g \in S'} \theta_{v, S'/g} + \theta_{gv, S'/g}\right) \\ &= \sum_{g \in S'} \theta_{v^{-1}, (S/S') \cup g} + \theta_{g^{-1}v^{-1}, (S/S') \cup g} \\ &= \partial^+ \theta_{v^{-1}, S/S'} \end{aligned}$$

And since  $\phi \circ \phi = I$ , we also have that  $\phi(\partial^+ \theta_{v^{-1}, S/S'})$ . Thus,  $\mathbf{H}^{\otimes n} \circ \phi$  sends  $Z$ -stabilizers to  $X$ -stabilizers and vice versa, thereby preserving the code space. Combining this with the above,  $\mathbf{H}^{\otimes n} \circ \phi$  realizes the logical form  $\mathbf{H}_\phi$  in the  $(d, d/2)$ -Toric code.  $\square$

**Example 3.28.** *Consider the  $(2, 1)$ -Toric code. Name the generators in  $S$  by  $g_1 = (1, 0)$  and  $g_2 = (0, 1)$ . Consider the check corresponding to the  $Z$ -stabilizer  $\partial^+ \theta_{(2, 3), \{\}}.$*

$$\partial^+ \theta_{(2, 3), \{\}} = \{\theta_{(2, 3), \{(1, 0)\}}, \theta_{(2, 3), \{(0, 1)\}}, \theta_{(1, 3), \{(1, 0)\}}, \theta_{(2, 2), \{(0, 1)\}}\}$$

*The  $\phi$ -transpose map acts on it as follows:*

$$\begin{aligned} \phi(\theta_{(2, 3), \{(1, 0)\}}) &= \theta_{(4, 3), \{(0, 1)\}} \\ \phi(\theta_{(2, 3), \{(0, 1)\}}) &= \theta_{(4, 3), \{(1, 0)\}} \\ \phi(\theta_{(1, 3), \{(1, 0)\}}) &= \theta_{(5, 3), \{(0, 1)\}} \\ \phi(\theta_{(2, 2), \{(0, 1)\}}) &= \theta_{(4, 4), \{(1, 0)\}} \end{aligned}$$

*What gives edges on a rectangle that converges with the bits on the support of the  $X$ -stabilizer  $\theta_{(4, 3), \{(0, 1), (1, 0)\}}.$*

**Remark 3.29.** *If  $d' = d/2$ , then for a fixed  $S' \subset S$ , a realization of a Hadamard-type gate that exchanges  $X_{S'} \leftrightarrow Z_{S'}$  can be obtained by concatenating to  $\mathbf{H}_\phi$  a second permutation over the qubits (which is induced by a permutation over the generating set  $S$ ). For our purposes, using  $\mathbf{H}_\phi$  is sufficient.*

Equipped with  $\mathbf{H}_\phi$ , we gain a mapping into the dual code that both keeps the Toric skeleton and sends the  $Z$ -checks to  $d' - 1$  dimensional faces. Later (in Section 3.6.1),



Figure 7: An outline of Example 3.28. The  $\phi$ -transpose sends  $Z$ -stabilizers to  $X$ -stabilizers and vice versa. Here we consider the  $(2, 1)$  Toric code; namely, the  $Z$ -stabilizers (parity checks) are set on the vertices, and the  $X$ -stabilizers (phase checks) are set on the squares. In blue and green, we have the edges corresponding to checks  $\partial^+ \theta_{(2,3),\{\cdot\}}$  and  $\theta_{(4,3),\{(0,1),(1,0)\}}$ . The example shows that indeed  $\phi$  maps between the two.

this will be advantageous, enabling the use of the same local decoder (with a slight change) to act on both  $\mathcal{C}_X$  and its dual.

Throughout the construction, we encode each qubit in a code block; namely, we restrict ourselves to using only a single codeword of the  $(d, d')$ -Toric code. From now on, we will think of  $S' \subset S$  as a fixed  $d'$ -size subset of generators that were picked from the head. And we will decode the logical  $|1\rangle$  state by  $x_{S'}$ . To simplify terminology, we call such usage 'nice encoding'.

**Definition 3.30** (The Nice Encoding). *Consider  $(d, d')$ -Toric code and fix a subset  $S' \subset S$ , at size  $d'$ . We define the nice encoding to be the subsystem code, which uses  $x_{S'}$  to encode a single logical qubit. Namely, the logical codewords are:*

$$\begin{aligned} |\bar{0}\rangle &= |\mathcal{C}_Z^\perp\rangle \\ |\bar{1}\rangle &= |x_{S'} + \mathcal{C}_Z^\perp\rangle \end{aligned}$$

We are now ready to give a full description of the realization of the logical operators. The logical Paulis  $X$  and  $Z$  are realized by the application of  $X_{S'}$  and  $Z_{S'}$ . For the gates  $\mathbf{S}$  and  $\mathbf{T}$ , we use single-qubit gate teleportation as presented in Figure 8. In single-qubit gate teleportation, the resource  $|\mathbf{S}\rangle$  is initialized as  $\mathbf{S}|+\rangle$ , similarly for  $|\mathbf{T}\rangle$ . The gate  $\mathbf{1}_{S'}$  stands for the classical procedure that, given the measurement results, checks whether the logical bit  $|1\rangle$  is turned on. We will return to this gate with a higher resolution depiction of it after the description of the Hadamard teleportation.



Figure 8: Simulating the  $\mathbf{S}$  and  $\mathbf{T}$  gates, using the  $|\mathbf{S}\rangle$ ,  $|\mathbf{T}\rangle$  magic states.

For the Hadamard gate, we use a modification of the standard two-qubit gate teleportation as shown in Figure 9. The realization differs from the standard realization as the measurement in the phase basis is done by first moving to the dual space via the application of physical  $\mathbf{H}^{\otimes n}$ , measuring, reorganizing the qubits through  $\phi$ , and then checking for the  $x_{S/S'}$  outcome (thus, it can be thought of as the application of  $\mathbf{H}_\phi$  and then measurement). In addition, unlike the single-qubit gate teleportation, here  $|\mathbf{H}\rangle$  is initialized as  $I \otimes H(|00\rangle + |11\rangle)$  (up to normalization).



Figure 9: Gate teleportation of the Hadamard gate, using the resource  $|\mathbf{H}\rangle$ . We emphasize again that although the Hadamard (at least Hadamard-type) has an  $O(1)$ -depth gate realization, we still need all the operations on the quantum register to be strictly transversal for the sake of the proof. Thus, we realize the Hadamard via gate teleportation.

The classical procedure of logical codeword checking, namely  $\mathbf{1}_{x_{S'}} / \mathbf{1}_{x_{S/S'}}$ , is divided into four stages. In the first, we find all the deviation clusters of the Tanner graph. This requires finding connected components, which is known to be done in  $\log^2(n)$  depth (See [SV82] and [AS87] for logarithmic time connected components in the PRAM model and [Lev80] for the simulation of PRAM machines using bounded-fan circuits). Then, we broadcast the connected components. Conceptually, each deviation cluster is sent to its own register; technically, we copy the restriction of

the syndromes to the deviation cluster. The broadcast also requires at most  $\log(n)$  depth since there can be at most  $\# \text{checks} = \Theta(n)$  deviation clusters and therefore at most  $\Theta(n)$  copies. Then, we decode each of the copies in parallel. The separation of the clusters guarantees that during decoding, clusters will not merge into a larger cluster. For the decoding, we iterate sweep-rule cycles (defined in Definition 3.43) until erasing the syndrome. Later, we will see that the decoding depth is bounded by  $\Theta(n)$  (See Corollary 3.58). Finally, we combine the results of all the decoding sessions together by Xoring their correction suggestions. Each of the Xor operations is between at most  $n$  qubits and therefore requires at most  $\log(n)$  depth. So the overall depth for performing a logical measurement is  $\Theta(n)$ . The additional classical width consists of restricting the syndrome for each of the deviation clusters. We will store them as check assignments  $\mathbb{F}_2^{\mathcal{F}_{d'}-1}$ , namely an addition of  $\Theta(n)$  bits per deviation cluster and in total  $\Theta(n^2)$ .

### 3.4 Infinite Sides Torics

The Toric skeleton provides a notation for positive directions. However, to demonstrate that the deviation cluster size shrinks as a result of the decoding cycle, or at least does not expand too much during the operation of the logical operator, we will need a way to mark extremities (for example, the northernmost point). To achieve this, we will analyze the view over the finite Toric as a projection derived from a view over the infinite plane. For this purpose, given our initial (subjected) quantum circuit, we construct a representation in which any gate that originally acted on a quantum register, namely on the finite Toric, is mapped to an infinite set of quantum gates that act on the infinite number of qubits set on the infinite plane. This set respects a periodic condition such that any restriction of it to a finite rectangle at the size of the original Toric yields the original view, and therefore describes well the original running.

The following two definitions simplify decoding gates by replacing them with the Pauli 'correction' they suggest at the end of their cycle. The first defines what a decoding gate is, and the second defines the replacement.

**Definition 3.31** (Decoding Gadget). *Let  $C$  be a quantum circuit, and let  $u$  be a gate in  $C$  with fan-in at most  $\Delta$ . We say that  $u$  is a decoding gadget if it has the following form:*

1. *The wires of  $u$  can be decomposed into two subsets  $A$  and  $B$  such that the wires in  $A$  are reset wires, and there exists an encoded register  $R$  in  $C$  such that the wires in  $B$  are all set in  $R$ .*
2. *For a set of faults  $\mathcal{E}$ , there is a Pauli gate  $u'$  that acts only on  $B$  such that the action of  $u$  in  $C[\mathcal{E}]$  equals  $u'$ . Put differently, the quantum circuit obtained from  $C[\mathcal{E}]$  by replacing  $u$  with  $u'$  equals  $C[\mathcal{E}]$ .*

**Definition 3.32** (Unitary Decoding Representation). *Let  $C = \{u_i\}_{i=1}$  be a quantum circuit, and let  $\mathcal{U} = \{u'_i\}_{i=1} \subset C$  be a subset of the gates in  $C$  that are decoding gadgets.*

For a set of faults  $\mathcal{E}$ , we define the unitary decoding representation of  $C[\mathcal{E}]$  to be the quantum circuit obtained by replacing each of the gates in  $\mathcal{U}$  with their corresponding Pauli gate according to  $\mathcal{E}$ .

Until the end of the subsection, we will assume that the subjected circuits are given in their unitary decoding representation.

The following definition extends the notion of location to differentiate between a coordinate that encodes a register and a coordinate of the location inside the register. This will be useful, as in the infinite plane representation, each register will be mapped to a unique infinite register. From a technical perspective, the map will stretch only inner locations to infinity.

**Definition 3.33** (Toric register coordinate system). *Let  $C = \{u_i\}_i$  be a quantum circuit of width  $w$  with registers  $\mathcal{R} = R_1, \dots, R_k$ , each encoded in the  $(d, d')$ -Toric code, induced by a  $d$ -dimensional Toric with a side length  $n$ . We define the 'Toric register coordinate system' to be the coordinate system that encodes spatial location with two coordinates as follows: In the first coordinate, the register number is recorded, and in the second, the qubit is encoded by the face associated with it. We call the first the register coordinate and the second the inner coordinate.*

We will need two types of gate translation. The first is the standard spatial translation, which means that any of the inner coordinates of the gate are advanced by the same vector. The second is 'rooted translation.' Here, we assume that the locations of the gate are given in a relative-to-root fashion, meaning that there is a root vertex, and all the locations are given by positive paths from the root. Then, we first translate the root and then advance the inner coordinate of any of the other locations to be on the path from the translated root. When considering a product gate, the translations act the same.

**Definition 3.34** (Translation by vertex  $v$ ). *Let  $u$  be a gate, and denote the inner coordinates of  $u$ 's locations by  $\theta_{v_1, J_1}, \dots, \theta_{v_\Delta, J_\Delta}$ . The translation of  $u$  by vertex  $v$  is defined to be the gate obtained from  $u$  by replacing the inner coordinates of its locations by:  $\theta_{vv_1, J_1}, \dots, \theta_{vv_\Delta, J_\Delta}$ . Furthermore, for a  $d$ -dimensional Toric complex with side length  $n$ , we define a translation by an integer vector  $a \in \mathbb{Z}^d$  as a translation by the vertex:*

$$(g_1^n)^{a_1}, (g_2^n)^{a_2}, \dots, (g_d^n)^{a_d}$$

We denote the translation by an integer vector  $a$  as  $a * u$ .

**Definition 3.35** (Rooted gate at vertex  $v$ ). *Let  $u$  be a quantum gate that acts on a register whose qubits are associated with a Toric complex at dimension  $d$ . We say that a gate  $u$  is rooted at vertex  $v$  if the inner coordinate of its location can be encoded by lists of pairs  $(I_1, J_1), (I_2, J_2), \dots, (I_l, J_l)$  such that  $I_i \in S^d, J_i \subset S$ , and the  $i$ th qubit on which it acts is in the face  $\theta_{(\prod_{g \in I_i} g)v, J_i}$ .*

**Definition 3.36** (Root translation in Register System). *For a gate  $u$  that is a rooted gate at vertex  $v$ , we define its translation by a vertex  $v'$  to be the gate obtained by copying  $u$  and replacing its inner location encoding the root by  $v'v$ .*

*Similarly to the standard translation by an integer vector, we extend the action to a root translation by an integer vector  $a \in \mathbb{Z}^d$ , as the root translation by the vertex:*

$$(g_1^n)^{a_1}, (g_2^n)^{a_2}, \dots, (g_d^n)^{a_d}$$

*We denote the root translation by an integer vector  $a$  as  $a *_r u$ .*

Now we are ready to give an explicit description of the mapping. Given a quantum circuit  $C$ , we name its presentation over the infinite plane the  $\infty$ -extension of  $C$ .

**Definition 3.37.** *Let  $n$  be an integer, and let  $C = \{u_i\}_{i=1}$  be a quantum circuit with width  $w$  and quantum registers  $\mathcal{R} = R_1, \dots, R_k$  such that each register  $R_i$  encodes a  $(d, d')$ -Toric code with side at length  $n$ . We define the  $\infty$ -extension of  $C$ , denoted by  $C^\infty$ , as follows:*

1. *Each register  $R_i$  in  $\mathcal{R}$  is mapped to a register  $R'_i$ , which its qubits are associated with the  $d'$ -dimensional faces of the infinite  $d$ -dimensional Toric.*
2. *Each gate  $u_i \in C$  is mapped to the infinite collection of gates, where the gates are obtained by either the standard translation or the rooted translation by an integer vector, depending on whether  $u_i$  is a decoding gate as follows:*

$$u_i \mapsto \begin{cases} \bigcup_{a \in \mathbb{Z}^d} \{a *_r v\} & \text{if } u_i \text{ is not a decoding gadget} \\ \bigcup_{a \in \mathbb{Z}^d} \{a_r *_r v\} & \text{else} \end{cases}$$

*The restriction of the qubits in  $C^\infty$ 's registers to finite Torices with side length  $n$  will be denoted by  $\cdot|_{[w]}$ , and it includes all the faces whose root vertex has 'powers' (the powers of  $g_1, \dots, g_d$ ) in the range  $[0, n-1]$ . For a set of faults  $\mathcal{E} = \{f_i\}_{i=1}$ , we denote by  $C^\infty[\mathcal{E}]$  the  $\infty$ -extension of  $C[\mathcal{E}]$ .*

Obviously, translation by the zero vector (or by the unital vertex) keeps the gate in its place, or in other words, in the restriction of  $C^\infty$  to  $[w]$  - the original Toric - any non-decoding gate is restored. The following claim states that this is also true for a decoding gate.

**Claim 3.38.** *Let  $u = (g, l)$  be a decoding gate. The restriction of the image of  $u$  in  $C^\infty$  to  $[w]$  is  $u$  (when applied to the infinite domain). Namely:*

$$\left( \prod_{a \in \mathbb{Z}^d} a *_r u \right)|_{[w]} = u$$

*Proof.* Denote by  $\hat{a}^j \in \mathbb{F}_2^d$  the vector which assigns in its  $i$ th coordinate 1 if the root that supports the face of  $u_j$  has a  $g_i$  power greater than  $n$ . We argue that the  $j$ th

face of  $-\hat{a}^j *_r u$  is in  $[w]$  and that the  $j$ th face of any other root translation of  $u$  is not in  $[w]$ . That implies that the restriction

$$\left(\prod_{a \in \mathbb{Z}^d} a *_r u\right)|_{[w]}$$

contains each of  $u$ 's faces exactly once, and combined with the fact that  $u$  is a Pauli product, it follows that they are the same operator.

By the definition of root translation, we get that  $(\hat{a}^j *_r u)_j$  is in  $[w]$ . Let  $a' \in \mathbb{Z}^d$  be such that  $a' \neq \hat{a}^j$ , and denote by  $i$  the coordinate on which they differ. Then, we get that the  $g_i$  power of the root of  $(a' *_r u)_j$  is at a distance  $n$  from the  $g_i$  power of the root of  $(\hat{a}^j *_r u)_j$ ; therefore, their roots can't both be in the range  $[0, n-1]$ , which implies that  $(a' *_r u)_j \notin [w]$ . □

Next, we would like to prove that the infinite presentation of a circuit agrees with it in terms of action. We will prove that when in the zero state, the action of the circuit on them is 'equivalent' in the sense that the restriction of  $C^\infty$ 's output to  $[w]$  yields the same mixed state as the output of  $C$ . The following provides a formal definition of that 'equivalence', which we name  $\infty$ -compatible.

**Definition 3.39.** For a quantum circuit  $C$ , of the form defined in Definition 3.37, and a set of faults  $\mathcal{E}$ , denote:

$$\begin{aligned}\rho &:= C[\mathcal{E}] |0\rangle\langle 0| C[\mathcal{E}]^\dagger \\ \rho_\infty &:= C^\infty[\mathcal{E}^\infty] |0\rangle\langle 0| (C^\infty[\mathcal{E}^\infty])^\dagger\end{aligned}$$

We say that a quantum circuit  $C$  is  $\infty$ -compatible if, for any set of faults  $\mathcal{E} = \{f_i\}_{i=1}$ , it holds that:

$$\rho = \mathbf{Tr}_{/[w]}(\rho_\infty)$$

**Claim 3.40.** Let  $C$  be quantum circuit of the form defined in Definition 3.37. Then  $C$  is  $\infty$ -compatible.

*Proof.* We prove it by induction on the number of the gates.

1. Base. For an empty circuit,  $\rho_\infty$  is just the infinite string of zeros; thus, the restriction of it to  $[w]$  locations, namely  $\mathbf{Tr}_{/[w]}(\rho_\infty)$ , yields a single matrix element corresponds to the  $w$ -length string of zeros, which is exactly  $\rho$ .
2. Step. Assume the claim holds for every circuit with fewer than  $\tau$  gates, and consider a circuit  $C$  with  $\tau$  gates. Denote by  $C'$  the circuit obtained from  $C$  by erasing its last gate; then  $C'$  has  $\tau - 1$  gates. Denote by  $\rho'$  and  $\rho'_\infty$  the output states of  $C'[\mathcal{E}]$  and  $(C')^\infty[\mathcal{E}^\infty]$ , respectively. By the induction assumption we have:

$$\rho' = \mathbf{Tr}_{/[w]}(\rho'_\infty)$$

Denote the last gate in  $C$  by  $u$ , and by  $I = \{v_j\}$  the collection of gates in  $C^\infty$  to which  $u$  is mapped (notice that the collection is countable). Let us split into cases, depending on whether  $u$  is or is not a decoding gate.

- (a) Suppose that  $u$  is not a decoding gate. Let  $g$  and  $l$  be the gate element and the location of  $u$ . By the definition of  $\infty$ -extension,  $I$  equals:

$$I = \bigcup_{a \in \mathbb{Z}^d} \{a * u\}$$

So, there is only one gate in  $I$ , corresponding to  $a$  being the zero vector, that has support on qubits with spatial locations in the range  $[w]$ . Denote that gate by  $v_0$ .

$$\begin{aligned} \mathbf{Tr}_{/[w]}(\rho_\infty) &= \mathbf{Tr}_{/[w]} \left( \prod_{j=-\infty}^{\infty} v_j \rho'_\infty \prod_{j=-\infty}^{\infty} v_j^\dagger \right) \\ &= v_0 \mathbf{Tr}_{/[w]} \left( \prod_{j=-\infty, j \neq 0}^{\infty} v_j \rho'_\infty \prod_{j=-\infty, j \neq 0}^{\infty} v_j^\dagger \right) v_0^\dagger \\ &= v_0 \mathbf{Tr}_{/[w]} \left( \prod_{j=-\infty, j \neq 0}^{\infty} v_j^\dagger \prod_{j=-\infty, j \neq 0}^{\infty} v_j \rho'_\infty \right) v_0^\dagger \\ &= v_0 \mathbf{Tr}_{/[w]}(\rho'_\infty) v_0^\dagger \\ &= v_0 \rho' v_0^\dagger \\ &= \rho \end{aligned}$$

- (b) In the case that  $u$  is a decoding gate, each of the  $v_j$  is a Pauli product. Thus, we can decompose it into the product of two terms: the first has support on  $[w]$ , and the second is its complement. Exactly as in the above case, the second  $v_j$  component can be treated as a disjoint gate that has no support on qubits in  $[w]$  and therefore does not contribute to the trace. For the rest, we get:

$$\mathbf{Tr}_{/[w]}(\rho_\infty) = \left( \prod_{-\infty}^{\infty} v_j \right) |_{[w]} \rho' \left( \left( \prod_{-\infty}^{\infty} v_j \right) |_{[w]} \right)^\dagger$$

Then, by Claim 3.38, we have that:

$$\left( \prod_{-\infty}^{\infty} v_j \right) |_{[w]} = u$$

therefore:

$$\mathbf{Tr}_{/[w]}(\rho_\infty) = u \rho' u^\dagger = \rho$$

□

The computation DAG lifts naturally to the  $\infty$ -extension: gates that arise as translates of the same local gate act on disjoint translated supports inside different periods, so they may be executed simultaneously. The same periodic lifting applies to the underlying geometric objects, passing from the finite Toric complex to its infinite cover.

We close that section by introducing the *potential walls*. Analyzing the infinite presentation enables us to bound a subset of errors by 'triangles'. A potential wall is a linear function  $\mathbb{R}^d \rightarrow \mathbb{R}$ . For the subset of vertices (that might be the subset that supports some error), the maximal value of the potential wall on it is achieved at the point of tangency between the subsets and its bounding triangle. The next definition explains how the embedding of vertices of the infinite in  $\mathbb{R}^d$  is handled.

**Definition 3.41** (The standart embedding). *Consider the  $d$ -dimensional infinite grid  $\mathcal{G}^d$ . The standard embedding  $\mathcal{G}^d \rightarrow \mathbb{R}^d$  is given by fixing a vertex in  $\mathcal{G}^d$  to be sent to the origin and then mapping the generators of the grid to the standard basis. We extend notation as follows: for a vertex  $v \in \mathcal{G}^d$ , a generator  $g \in S$ , and a coordinate  $i \in [d]$ , such that under the embedding  $g \rightarrow i$ , we denote by  $v_i = v_g$  the  $i$ 'th coordinate of the image of  $v$ .*

Now we are ready to define the *potential walls*:

**Definition 3.42** (Potential Walls). *We define the potential walls to be the  $d + 1$  functions  $L_1, L_2, \dots, L_{d+1}$ , from the vertices of  $\mathcal{G}_n^d$  to the reals as follow:*

1. *For any coordinate  $i \in [d]$ , we define  $L_i: \mathcal{G}^d \rightarrow \mathbb{R}$  as  $L_i(v) := v_i$ . In addition, for the generator  $g \in S$  which is mapped to  $i$ , i.e  $g \rightarrow i$ , we identify  $L_g = L_i$ .*
2. *We define  $L_{d+1}: \mathcal{G}^d \rightarrow \mathbb{R}$  by  $L_{d+1}(v) := -\sum_{i=1}^d v_i$ .*

*Consider an assignment  $z$  over the faces. For a vertex  $v \in z$ , and a potential wall  $l \in \{L_1, \dots, L_{d+1}\}$ , we say that  $v$  is a local maximum of  $l$  in  $z$  if for any neighbor  $u$  of  $v$ , such that  $u \in z$ , we have  $l(v) \geq l(u)$ . When the assignment  $z$  is clear from the context, we might omit it and briefly say that  $v$  is a local maximum of  $l$ . In addition we define the function  $\mathbf{Size}(\cdot): \mathcal{G}^d \rightarrow \mathbb{R}$ , to act on a subset of points  $A \subset \mathcal{G}^d$ , as follows:*

$$\mathbf{Size}(A) := \sum_{g \in S} \max_{v \in A} L_g(v) + \max_{v \in A} L_{d+1}(v)$$

*and extend the function to act over assignment on faces  $z$ , by taking its action on the set of vertices that support  $z$ .*

With the assistance of potential walls, we can discuss the endpoint of a bunch of qubits and the 'size' of the (hyper)triangle that bounds them. Soon, the qubits will be associated with the support of an error, and showing that an action decreases the maximums of the potential walls implies that the error shrinks.

### 3.5 Sweep Rule

The sweep-rule is the core of our construction. A decoding cycle begins with each of the vertices reading the syndrome on its positive  $X$ -checks (checks that are associated with the positive  $d' - 1$  dimensional faces of the vertex) and, based on what it sees, applying a Pauli correction. The sweep-rule defines the correction to be over the positive qubits such that it will turn off the positive syndrome. It's not hard to see that for the  $(2, 2)$ -Toric complex, the Toom's and the sweep rules are the same. Compared to other correction cycles on topological codes, the main advantage of the sweep is that it is independent of time. The invention of the sweep-rule is attributed to Aleksander Kubica and John Preskill [KP19]. Here we extend their work to cubical complexes.

**Definition 3.43** (Sweep Rule). *Let  $\sigma$  be a  $d' - 1$ -dimensional chain. The sweep rule decoding procedure at a vertex  $v \in \mathcal{G}_n^d$  is defined as follows: Measure the checks rooted at  $v$  and look for a rooted chain  $\tilde{z}$  at  $v$  such that:*

1. *The vertices in  $\tilde{z}$  are contained in the vertices of  $\sigma$ , namely:  $\mathbf{Str}_{0+}(v, \tilde{z}) \subset \mathbf{Str}_{0+}(v, \sigma)$*
2. *The boundary of  $\tilde{z}$  agrees with  $\sigma$  on the positive checks of  $v$ , namely:  $(\partial^- \tilde{z})|_{v+} = \sigma|_{v+}$ .*

*If such an assignment exists, flip  $\tilde{z}$ .*

The first property is analogous to the second property of 'causal structure' defined in [KP19]<sup>9</sup>. There, they conjectured that vertices that see a syndrome only on their positive checks can suggest a correction that is 'supported' on the vertices of their unsatisfied checks. For lower dimensions, they mentioned that the property can be easily checked. Here, we provide a proof for any dimensions where the face dimension is greater than one. We use the language of cubical complexes; however, since the 'positive' local view at a vertex is identical for both cubical and simplicial complexes, generalizing the proof for simplicial complexes is a matter of adjusting notations. By that, we affirmatively answer their conjecture. Moreover, the proof will provide us with an algorithm to find  $\tilde{z}$ , which is significantly better than running all options.

**Claim 3.44.** *Consider a nontrivial  $d' - 1$ -dimensional chain  $\sigma$ . If there is a  $d'$ -dimensional chain  $z$  that is rooted at  $v$  and whose boundary agrees with  $\sigma|_{v+}$ , then there is a  $d'$ -dimensional chain  $\tilde{z}$  rooted at  $v$  that satisfies the sweep-rule conditions.*

*Proof.* We prove it by induction on  $d'$ .

1. Base. Consider  $d' = 2$  and let  $d$  be any integer equal to or greater than 3. We argue that the support size of  $\sigma$  has to be even. To see that, denote the faces in  $z$  by  $\theta_{\mathbf{v}, \mathbf{S}'_i}$ , where  $\mathbf{S}'_i = \{g_{i,1}, g_{i,2}\}$ . Using the fact that  $\sigma$  is the boundary of  $z$ , we have:

$$\sigma = \partial^-(z) = \sum_{\theta_{\mathbf{v}, \mathbf{S}'_i} \in z} \sum_{g \in \mathbf{S}'_i} \theta_{\mathbf{v}, \mathbf{S}'_i / g} = \sum_i \theta_{\mathbf{v}, \{\mathbf{g}_{i,1}\}} + \theta_{\mathbf{v}, \{\mathbf{g}_{i,2}\}}$$

---

<sup>9</sup>In their language:  $\diamond(\tilde{z}) = \diamond(\sigma|_v)$ .

So the number of terms in the sum is even, and since a term is zeroed out only if it appears an even number of times, we have that after excluding the vanishing terms,  $\sigma$  has an even number of faces. Since the number of faces is even, there is a perfect matching between them. It's easy to see that the 2-chain  $\tilde{z}$ , whose each face corresponds to the union of the two edges in a match, satisfies the sweep-rule conditions.

2. Assume the correctness of the claim for every face dimension lower than  $d'$ . Now for a face dimension  $d'$  and an arbitrary generator  $g \in S$  such  $gv \in \sigma$ , divide  $\sigma$  into a sum of two chains, the first contain the faces of  $\sigma$  that supported on the vertex  $gv$  where the second contains the compliment. Denote them by  $\sigma|_{gv}$  and  $\sigma|_{/gv}$ , so  $\sigma = \sigma|_{gv} + \sigma|_{/gv}$ .

Now let  $\sigma^*$  the chain obtained from  $\sigma|_{/gv}$  by removing from any face of it the vertex  $gv$ , thus  $\sigma^*$  is a  $d' - 2$ -dimensional chain. Moreover, let  $z^*$  be the  $d' - 1$ -dimensional chain complex obtained from  $z|_{/gv}$  by excluding  $gv$  from its faces. Observe that

$$\partial^- z^* = \sum_{\theta_{\mathbf{v}, \mathbf{S}' \in z|_{/gv}}} \sum_{g' \in S'/g} \theta_{\mathbf{v}, \mathbf{S}'/\{\mathbf{g}, \mathbf{g}'\}} = \sum_{\theta_{\mathbf{v}, \mathbf{S}' \in (\partial^- z)|_{/gv}}} \theta_{\mathbf{v}, \mathbf{S}'/\{\mathbf{g}\}} = \sigma^*$$

Thus, by the induction assumption, there is a  $d' - 1$ -dimensional chain  $\tilde{z}^*$  such that:

- (a)  $\mathbf{Str}_{0+}(v, \tilde{z}^*) \subset \mathbf{Str}_{0+}(v, \sigma^*)$
- (b)  $(\partial^- \tilde{z}^*)|_{v+} = \sigma^*|_{v+}$

The first condition implies that  $gv \notin \tilde{z}^*$ . Hence, we can define the  $d'$ -dimensional chain  $\tilde{z}$  by adding the vertex  $gv$  to each face of  $\tilde{z}^*$ . From the second it follows that:

$$\begin{aligned} \partial^- \tilde{z} &= \partial^- \left( \sum_{\theta_{\mathbf{v}, \mathbf{S}' \in \tilde{z}^*}} \theta_{\mathbf{v}, \mathbf{S}' \cup \{\mathbf{g}\}} \right) = \sum_{\theta_{\mathbf{v}, \mathbf{S}' \in \tilde{z}^*}} \left( \sum_{g' \in S'/g} \theta_{\mathbf{v}, \mathbf{S}'/\{\mathbf{g}'\} \cup \{\mathbf{g}\}} \right) + \theta_{\mathbf{v}, \mathbf{S}'} \\ &= \sum_{\theta_{\mathbf{v}, \mathbf{S}' \in \partial^- \tilde{z}^*}} \theta_{\mathbf{v}, \mathbf{S}' \cup \{\mathbf{g}\}} + \tilde{z}^* = \sigma|_{/gv} + \tilde{z}^* \end{aligned}$$

Therefore,

$$\begin{aligned} \sigma + \partial^- \tilde{z} &= \sigma|_{gv} + \sigma|_{/gv} + \sigma|_{/gv} + \tilde{z}^* \\ &= \sigma|_{/gv} + \tilde{z}^* \end{aligned}$$

Thus we reduce the question to handle the  $d' - 1$ -dimensional chain  $\sigma + \partial^- \tilde{z}$ . However, since  $gv \notin \sigma + \partial^- \tilde{z}$  it follows that:

$$|\mathbf{Str}_{0+}(v, \sigma + \partial^- \tilde{z})| \leq |\mathbf{Str}_{0+}(v, \sigma)| - 1$$

Thus, we can repeat recursively until the resulting  $d' - 1$  chain is 'supported' on fewer than  $d'$  vertices. In that case, the chain must be trivial.

□

The algorithm given in the proof of Claim 3.44 for finding  $\tilde{z}$  is as follows: given  $\sigma$ , pick a  $g \in S$  such that  $gv \in \sigma$ . Then, define  $\sigma^*$  by removing  $gv$  from each face of  $\sigma|_{gv}$ . Let  $\tilde{z}^*$  be the result of the recursive call on  $\sigma^*$ , and return ' $\tilde{z}^* \cup \{gv\}$ ' plus the recursive call on  $\sigma|_{/gv} + \tilde{z}^*$ .

We stop the recursion whenever either  $d' = 2$  or  $|\mathbf{Str}_{0+}(v, \sigma)| \leq d'$ . The work in each recursion step consists of decomposing  $\sigma$  into  $\sigma|_{gv}$  and  $\sigma|_{/gv}$  and summing  $\binom{d}{d'}$ -length vectors. We summarize by introducing the following claim which gives the running time of the algorithm in the RAM computation model.

**Claim 3.45.** *Let  $T(d, d', k) : \cdot \rightarrow \mathbb{R}$  be the upper bound function for the running time of the algorithm given in Claim 3.44, where  $d$  is the dimension of the skeleton,  $d'$  is the face dimension, and  $k$  is the number of vertices supporting the local view, namely  $k = |\mathbf{Str}_{0+}(v, \sigma)|$ . Then:*

$$T(k, d') = O\left(2^k \binom{d}{d'}\right)$$

*Proof.* In each recursive call, the vertex support of  $\sigma$  matches a different subset of the vertices in  $\mathbf{Str}_{0+}(v, \sigma)$ ; thus, the number of recursive calls is at most the number of subsets, namely  $2^k$ . The decomposition of  $\sigma$  into  $\sigma|_{gv}$  and  $\sigma|_{/gv}$ , and the summation  $\sigma|_{/gv} + \tilde{z}^*$  are linear in the vector's length, namely linear in  $\binom{d}{d'}$ . So we bound the total work by the number of recursive steps multiplied by the maximal work at each recursive step. That becomes at most:

$$T(d, d', k) \leq O\left(2^k \binom{d}{d'}\right)$$

□

A full decoding cycle is composed of first applying the sweep-rule regarding the  $X$ -syndrome, then moving into the dual code (and reordering the qubits) by  $\mathbf{H}_\phi$ , and then applying the sweep-rule again with the change that the positive direction is flipped to be the negative direction. At the end, we return to the original code by applying  $\mathbf{H}_\phi$ .

**Definition 3.46** (Sweep cycle). *We define the sweep cycle to be the following procedure:*

1. *For each vertex, perform the sweep rule.*
2. *Apply the Hadamard transform  $\mathbf{H}^{\otimes n}$  followed by the  $\phi$ -transpose, and flip the positive direction.*
3. *Again, apply the sweep rule at each vertex.*
4. *Reverse stage 2 by reordering the qubits according to the  $\phi$ -transpose, and then apply the Hadamard transform  $\mathbf{H}^{\otimes n}$ . Flip the positive direction again.*

To have our constructions yield circuits that have  $\infty$ -extensions Definition 3.37, the sweep-rule cycles have to be 'decoding gadgets' Definition 3.31.

**Claim 3.47.** *The local gates that perform the sweep rule are decoding gadgets.*

*Proof.* A local sweep update acts on a constant-size neighborhood around a vertex, uses only local syndrome information, and may be implemented with fresh ancillas that are reset after the update. Any dependence on faults inside the gadget can therefore be pushed onto the data wires as an effective Pauli operator supported on the encoded register, while the reset ancillas carry no residual information. This is exactly the form required in the definition of a decoding gadget.  $\square$

Next, we prove that the sweep rule shrinks error subsets.

### 3.6 Shrinking

Errors can be thought of as assignments on the  $d'$ -dimensional faces that have non-vanishing boundaries. In particular,  $X$ -errors can be characterized as binary assignments  $z \in \mathbb{F}_2^{\mathcal{F}_{d'}}$  such that  $\partial^- z \neq 0$ . In this section, we assume dealing with the  $\infty$ -extension of a circuit (see Definition 3.37), so the cubical complex is the infinite  $d$ -dimensional grid.

The following claim relates the local maximum points of the potential walls  $L_1, \dots, L_d$  in an assignment  $z$  to the structure of the syndrome they observe. Later, we will use that relation to infer that the decoding step of the sweep rule can't spread the error to a vertex<sup>10</sup> with a higher value than the current global maximum of  $L_1, \dots, L_d$ . In other words, the error does not spread in the positive directions.

**Claim 3.48.** *Let  $z$  be an assignment, and let  $\xi$  be the assignment that results from the application of the sweep rule on  $z$ . For any generator  $g \in S$  the maximal values of  $L_g$  in  $\xi$  and  $\partial^- \xi$  are lower than the maximal values in  $z$  and  $\partial^- z$ . Namely:*

$$\begin{aligned} \max \{L_g(u) : u \in \xi\} &\leq \max \{L_g(u) : u \in z\} \\ \max \{L_g(u) : u \in \partial^- \xi\} &\leq \max \{L_g(u) : u \in \partial^- z\} \end{aligned}$$

*Proof.* First, we argue that for a vertex  $v$  in  $\partial^- z$ , and a generator  $g \in S$ , such that  $v$  is a local maximum of  $L_g$  in either  $z$  or  $\partial^- z$ , it implies that  $gv \notin \partial^- z$ . The contradiction where  $v$  is a maximum of  $L_g$  in  $z$  follows immediately, since containment in  $\partial^- z$  implies containment in  $z$ . Where  $v$  is a maximum in  $\partial^- z$ , suppose through contradiction that  $gv \in \partial^- z$ , then

$$L_g(gv) = (gv)_g = 1 + v_g = 1 + L_g(v)$$

In contradiction to  $v$  being a local maximum of  $L_g$  in  $\partial^- z$ .

For a vertex  $v \in \partial^- z$  denote the correction it applies by  $\varphi_v \in \mathbb{F}_2^{\mathcal{F}_{d'}}$ , so

$$\xi = \sum_{v \in \partial^- z} \varphi_v + z \quad \text{and} \quad \partial^- \xi = \sum_{v \in \partial^- z} \partial^- \varphi_v + \partial^- z$$

---

<sup>10</sup>To faces whose vertices have higher values of  $L_1, \dots, L_d$  than the current global maximum values.

So for any vertex  $u \in \xi/z$ , there is a vertex  $v \in \partial^-z$  such that  $u \in \varphi_v$ . Moreover, since  $\phi_v$  is a rooted assignment, it follows that  $L_g(u) \leq L_g(v) + 1$ , where the equality holds when  $g$  doesn't belong to the generator's subset of the face  $\varphi_v$ . Similarly for  $u \in \partial^- \xi / \partial^- z$ .

Now, combining with the sweep rule's first condition, which restricts the correction applied by a vertex to have a vertex support that is contained in the positive syndrome it sees, we have that for any vertex  $v$  which is a local maximum of  $L_g$  (in either  $z$  or  $\partial^-z$ ), any  $u \in \varphi_v$  satisfies  $L_g(u) = L_g(v)$ . In other words,  $\xi$  and  $\partial^- \xi$  don't contain vertices of the form  $gv$  where  $v$  is a local maximum of  $L_g$  in  $z$  and  $\partial^-z$ , and the desired inequalities follow.  $\square$

The  $(d+1)$ th potential wall  $L_{d+1}$  gets its maximum on the 'corner' vertex of the error, and therefore we would like to have a stronger claim stating that its maximum value decreases. Thereby implying that the corner 'advances' and the error shrinks. For this, we start by showing that any error is equivalent, up to stabilizer addition, to an error whose 'corner' vertex - the maximal point of  $L_{d+1}$  - sees a syndrome.

We present two codes that describe local views. They are the *stabilizers code at vertex  $v$*  and the *small code at vertex  $v$* . The first corresponds to stabilizers rooted at the vertex, while the second is the collection of local views on its positive faces that satisfy its positive checks. Then, in Claim 3.51, we consider a vertex whose  $X$ -checks don't admit a syndrome, meaning that its local view is in its *small code*, and show that there is a codeword of its *stabilizers code* that agrees with its positive faces. Addition by that stabilizer yields a new assignment excluding  $v$ .

If  $v$  was a unique maximum of  $L_{d+1}$ , then the vertices on the yielded assignments have a lower value of  $L_{d+1}$ . Therefore, one can assume that for a given error, the vertex that is the maximal point of  $L_{d+1}$  sees a syndrome.

**Definition 3.49** (Stabilizers Code at Vertex  $v$ ). *We define stabilizer code at vertex  $v$ , denoted by  $Stab_v$ , as the restriction of the  $(d, d')$ -Toric code to the  $d'$ -dimensional faces such that their vertices are at a distance of at most one positive step in each direction from  $v$ . That is equivalent to the union of all the positive  $d'$ -dimensional faces of  $v$  with the  $d$ -dimensional faces of each of its sibling  $gv$ , excluding faces containing  $g$  as their generator. Namely:*

$$Stab_v := \left\{ z : \partial^- z = 0 \text{ and } \begin{aligned} &z \in \text{Span}(\{\theta_{\mathbf{v}, \mathbf{S}'} : \mathbf{S}' \subset S, |\mathbf{S}'| = d'\}) \\ &\bigcup_{g \in S} \{\theta_{\mathbf{g}\mathbf{v}, \mathbf{S}'/\mathbf{g}} : \mathbf{S}' \subset S/g, |\mathbf{S}'| = d'\} \} \end{aligned} \right\}$$

The checks of the code, are of the following three types:

1. Checks that are rooted at  $v$ , each identified by choosing  $d-1$  generators from  $S$ . Namely:

$$\{\theta_{\mathbf{v}, \mathbf{S}'} : \mathbf{S}' \subset S, |\mathbf{S}'| = d-1\}$$

For each check, the bits that connect to it, are given by restricting the coboundary of the check to bits domain of  $\text{Stab}_v$ :

$$(\partial^+ \theta_{\mathbf{v}, \mathbf{S}'})|_{\text{Stab}_v} = \left( \sum_{g \in S/S'} \theta_{\mathbf{v}, \mathbf{S}' \cup \mathbf{g}} + \sum_{g \in S'} \theta_{\mathbf{g}^{-1} \mathbf{v}, \mathbf{S}' \cup \mathbf{g}} \right) |_{\text{Stab}_v} = \sum_{g \in S/S'} \theta_{\mathbf{v}, \mathbf{S}' \cup \mathbf{g}}$$

2. Checks are rooted at the positive sibling of  $v$ . Consider such a sibling, let's say  $gv$  (namely the vertex that is given by stepping in the direction  $g \in S$  from  $v$ ). Notice that any face rooted at  $gv$  that contains  $ggv$  cannot be contained in faces rooted at  $v$ . Thus, the checks of  $gv$  correspond to choosing subsets from  $S/g$ . Namely:

$$\bigcup_{g \in S} \{ \theta_{\mathbf{g} \mathbf{v}, \mathbf{S}'} : S' \subset S/g, |S'| = d' - 1 \}$$

And each check is supported by:

$$\begin{aligned} (\partial^+ \theta_{\mathbf{g} \mathbf{v}, \mathbf{S}'})|_{\text{Stab}_v} &= \left( \sum_{g' \in S/S'} \theta_{\mathbf{g} \mathbf{v}, \mathbf{S}' \cup \mathbf{g}'} + \sum_{g' \in S'} \theta_{\mathbf{g}'^{-1} \mathbf{g} \mathbf{v}, \mathbf{S}' \cup \mathbf{g}'} \right) |_{\text{Stab}_v} \\ &= \left( \sum_{\substack{g' \in S/S' \\ g' \neq g}} \theta_{\mathbf{g} \mathbf{v}, \mathbf{S}' \cup \mathbf{g}'} \right) + \theta_{\mathbf{v}, \mathbf{S}' \cup \mathbf{g}} \end{aligned}$$

3. Checks that their roots are at a two-step distance from  $v$ , namely vertices of the form  $g'gv$  where  $g, g' \in S$ , and  $g \neq g'$ . By the arguments presented in the second type, the checks are the  $d' - 1$  faces which do not have the generators on the path leading from  $v$  to them, i.e.,  $g, g'$ , in their generator set.

$$\bigcup_{g, g' \text{ in } S'} \{ \theta_{\mathbf{g}' \mathbf{g} \mathbf{v}, \mathbf{S}'} : S' \subset S/\{g, g'\}, |S'| = d' - 1 \}$$

And for each check, its support is:

$$\begin{aligned} (\partial^+ \theta_{\mathbf{g}' \mathbf{g} \mathbf{v}, \mathbf{S}'})|_{\text{Stab}_v} &= \left( \sum_{g'' \in S/S'} \theta_{\mathbf{g} \mathbf{g}' \mathbf{v}, \mathbf{S}' \cup \mathbf{g}''} + \sum_{g \in S'} \theta_{\mathbf{g}''^{-1} \mathbf{g} \mathbf{g}' \mathbf{v}, \mathbf{S}' \cup \mathbf{g}''} \right) |_{\text{Stab}_v} \\ &= \theta_{\mathbf{g} \mathbf{v}, \mathbf{S}' \cup \mathbf{g}'} + \theta_{\mathbf{g}' \mathbf{v}, \mathbf{S}' \cup \mathbf{g}} \end{aligned}$$

**Definition 3.50** (Small Code at Vertex  $v$ ). *For a vertex  $v$ , we denote by  $\mathcal{C}_v$  the small code at vertex  $v$ , which is defined to be the binary assignments over the bits ( $d'$  faces) rooted at  $v$  that satisfy the positive checks of  $v$ , namely:*

$$\begin{aligned} \mathcal{C}_v &:= \{ z : (\partial^- z)|_{v+} = 0 \text{ and} \\ &\quad z \in \text{Span}(\{ \theta_{\mathbf{v}, \mathbf{S}'} : S' \subset S, |S'| = d' \}) \} \end{aligned}$$

*The checks of the code are exactly the first type checks of  $\text{Stab}_v$ .*

**Claim 3.51.** *Let  $v$  be a vertex. For any  $d' \geq 2$ ,  $d \geq d' + 1$ , and any  $z \in \mathcal{C}_v$ , there is a stabilizer  $w \in \text{Stab}_v$  such that  $z = w|_v$ ; namely,  $z$  and  $w$  agree on the faces rooted at  $v$ .*

*Proof.* By induction on the dimensions  $d, d'$ . We extend the notation of the stabilizer and the small codes at vertex  $v$  to  $\mathcal{C}_v^J, \text{Stab}_v^J$ , where  $J$  is a subset of  $S$ , to refer to the codes derived from the skeleton generated by  $J$ .

1. Base. For the base cases, let  $d$  be either three or four, and let  $d'$  be two. In the appendix, we show that the generator matrix of  $\mathcal{C}_v$  is a submatrix of the generating matrix of  $\text{Stab}_v$ . See Section 4.1.
2. Assume the correction of the claim for dimensions lower than  $d, d'$ . Decompose  $z = z|_{gv} + z|_{/gv}$  where  $z|_{gv}$  and  $z|_{/gv}$  are the chains consisting of all the faces in  $z$  that have support on  $gv$  and its complement. Define  $z^*$  to be the  $d' - 1$ -dimensional chain obtained by excluding  $gv$  from any face of  $z|_{gv}$ . Notice that  $\partial^- z^*$  has to be zero since it contains all the faces of  $\partial^- z$  that contain  $gv$  (up to the removal). In other words,  $z^* \in \mathcal{C}_v^{S/g}$ . Thus, we can use the induction assumption and infer the existence of  $w^* \in \text{Stab}_v^{S'/g}$  such that  $z^* = w^*|_v$ .

Now, since  $w^* \in \text{Stab}_v^{S/g}$ , then  $\partial^- w = 0$ . In particular,  $w^*$  can be decomposed into a sum of stabilizers rooted in  $v$ . Let  $\theta_{\mathbf{v}, \mathbf{S}'_1}, \theta_{\mathbf{v}, \mathbf{S}'_2}, \theta_{\mathbf{v}, \mathbf{S}'_3}, \dots, \theta_{\mathbf{v}, \mathbf{S}'_i}$  be the  $d'$ -dimensional chains corresponding to the stabilizers composing  $w^*$ . Namely:

$$w^* = \sum_i \partial^- \theta_{\mathbf{v}, \mathbf{S}'_i}$$

Since those stabilizers are basis elements of  $\text{Stab}_v^{S/g}$ , we have that  $g \notin S'_i$  for any  $i$ . Hence, we can define the extended  $d'$ -dimensional chain  $w$  to be the chain obtained by adding  $g$  to each of the stabilizers deriving  $w^*$ . Namely:

$$w = \sum_i \partial^- \theta_{\mathbf{v}, \mathbf{S}'_i \cup \mathbf{g}}$$

However,  $\theta_{\mathbf{v}, \mathbf{S}'_1 \cup \mathbf{g}}, \dots, \theta_{\mathbf{v}, \mathbf{S}'_i \cup \mathbf{g}}$  are  $d' + 1$ -dimensional chains corresponding to the stabilizers, which are basis elements of  $\text{Stab}_v^S = \text{Stab}_v$ . Therefore,  $w \in \text{Stab}_v$ . In addition, opening up the boundary operator yields:

$$\begin{aligned} w|_v &= \sum_i (\partial^- \theta_{\mathbf{v}, \mathbf{S}'_i \cup \mathbf{g}})|_v = \sum_i \left( \sum_{g' \in S'_i/g} \theta_{\mathbf{v}, \mathbf{S}'_i/g' \cup \mathbf{g}} + \theta_{\mathbf{v}, \mathbf{S}'_i} \right) \\ &= \sum_{\theta_{\mathbf{v}, \mathbf{S}' \cup \mathbf{g}} \in w^*|_v} \theta_{\mathbf{v}, \mathbf{S}' \cup \mathbf{g}} + \sum_i \theta_{\mathbf{v}, \mathbf{S}'_i} = z|_{gv} + \sum_i \theta_{\mathbf{v}, \mathbf{S}'_i} \end{aligned}$$

Thus, adding  $w|_v$  to  $z$  results in:

$$z + w|_v = z|_{/gv} + \sum_i \theta_{\mathbf{v}, \mathbf{S}'_i}$$

Which is a  $d'$ -dimensional chain, supported on vertices of the form  $g'v$  for  $g' \in S/g$ , namely a  $d'$ -dimensional chain on the complex induced by the  $d - 1$ -dimensional

skeleton. In addition, since the boundary operator can only advance the root of a face forward, we have that  $\partial^- w|_v = (\partial^- w)|_v$  and therefore  $\partial^-(z + w|_v) = \partial^- z + (\partial^- w)|_v$ .

To summarize, we have both  $z + w|_v \in \mathcal{C}_v^{S/g}$  and  $z + w|_v$  sets on a  $d - 1$ -dimensional skeleton. Therefore, we can repeat in a recursive manner, with each step resulting in a  $d'$ -dimensional chain in a skeleton with dimension decreased by one. We stop when  $d = d'$ ; in that case, the resulting chain has to be trivial.

□

Now we are ready to prove that any error is equivalent, up to addition by stabilizer, to an error whose maximal  $L_{d+1}$  vertex (or its edge) sees a syndrome (and that maximum is equal to or lower than the maximal value of  $L_{d+1}$  in the original error). Figure 10 visualize the idea. Claim 3.52 introduces a 'single application' of Claim 3.51 to 'advance' the corner (the vertex that gets the maximal value of  $L_{d+1}$ ). The corner might not be unique, so in the proof, we advance all the corners simultaneously. Yet, it might occur that the yielded assignment still doesn't admit corners that see a syndrome. Thus, Claim 3.53 repeats 'corners advancing' steps on until it ensures the desired outcome - that the corner vertex of the final yielded assignment sees a syndrome.

**Claim 3.52.** *Let  $z$  be a finite assignment. Suppose that*

$$\max \{L_{d+1}(u) : u \in z\} > \max \{L_{d+1}(u) : u \in \partial^- z\}$$

*Then there is  $\tilde{z} \sim_{C_X} z$  such that:*

$$\max \{L_{d+1}(u) : u \in \tilde{z}\} \leq \max \{L_{d+1}(u) : u \in z\} - 1$$

*Proof.* Let  $v_1, v_2, \dots, v_k$  be the vertices in  $z$  that achieve the maximum for  $L_{d+1}$ , namely  $v_1, v_2, \dots, v_k = \arg \max_{v \in z} L_{d+1}(v)$ , and assume that  $v_i \notin \partial^- z$  for any  $i \in [k]$ . (Notice that the maximum is indeed achieved since  $z$  is finite.)

Consider the  $i$ th vertex  $v_i$ . By definition, since  $v_i \notin \partial^- z$ , we have  $\partial^- z|_{v_i} = 0$ , and since  $v_i$  is a maximum point of  $L_{d+1}$  in  $z$ , it is also a local maximum, and therefore  $z|_{v_i+} = z|_{v_i}$ . Combining the two, we get that  $z|_{v_i}$  is a codeword of the small code at  $v_i$ , namely  $z|_{v_i} \in \mathcal{C}_{v_i}$ . Thus, by Claim 3.51, there is a stabilizer  $w_i \in \text{Stab}_{v_i}$  such that  $w_i$  and  $z$  agree on the positive faces of  $v_i$ , namely  $w_i|_{v_i} = z|_{v_i}$ .

Set  $\tilde{z} \leftarrow z + \sum_i w_i$ . Since  $\sum_i w_i$  is a stabilizer, we have  $\tilde{z} \sim_{C_X} z$ . In addition, for any  $j \neq i$ , it follows that  $v_j \notin w_i$ . Otherwise, there exists  $S' \subset S$  such that  $v_j \in \theta_{v_i, S'}/v_i$ , and therefore  $L_{d+1}(v_j) > L_{d+1}(v_i)$ , in contradiction to  $v_i$  and  $v_j$  being both maximum points for  $L_{d+1}$  in  $\partial^- z$ . Thus, we have:

$$\tilde{z}|_{v_i} = (z + \sum_j w_j)|_{v_i} = (z + w_i)|_{v_i} = 0$$

Namely, for any  $i$ , the  $i$ th vertex  $v_i$  is not in  $\tilde{z}$ . Hence, the vertex domain of  $\tilde{z}$  is contained in the union of the vertices of  $z$  with the vertices of  $w_1, w_2, \dots, w_k$ , substituting  $v_1, v_2, \dots, v_k$ . Overall, we get:

$$\begin{aligned} \max \{L_{d+1}(u) : u \in \tilde{z}\} &\leq \max \left\{ L_{d+1}(u) : u \in z \bigcup_i w_i / \bigcup_i v_i \right\} \\ &\leq \max \{L_{d+1}(u) : u \in z\} - 1 \end{aligned}$$

□



Figure 10: In blue, we have an assignment where the vertex achieving the minimum of  $L_{d+1}$ , denoted by  $v$ , does not see any unsatisfied checks in its positive local view. The green faces represent an assignment, equivalent to the blue up to stabilizer, such that any local maximum of  $L_{d+1}$  (vertices  $u$  and  $w$ ) sees a non-trivial syndrome in its positive local view.

**Claim 3.53.** *Let  $z$  be a finite assignment. Then there is  $\tilde{z} \sim_{C_X} z$  such that*

$$\max \{L_{d+1}(u) : u \in \tilde{z}\} = \max \{L_{d+1}(u) : u \in \partial^- z\}$$

*Proof.* Let  $z$  be a finite assignment, and let  $k$  be an integer such that  $k \geq 1$  and

$$\max \{L_{d+1}(u) : u \in z\} = \max \{L_{d+1}(u) : u \in \partial^- z\} + k$$

For an integer  $l \leq k$ , consider the assignments  $\tilde{z}_0, \tilde{z}_1, \dots, \tilde{z}_l$  defined as follow:

- The first element,  $\tilde{z}_0 = z$ .
- If the  $i - 1$ th element satisfies

$$(\star) \quad \max \{L_{d+1}(u) : u \in \tilde{z}_{i-1}\} > \max \{L_{d+1}(u) : u \in \partial^- \tilde{z}_{i-1}\}$$

Then define the  $i$ th element,  $\tilde{z}_i$ , to be the result of applying the construction, given in Claim 3.52, on  $\tilde{z}_{i-1}$ , namely  $\partial \tilde{z}_{i+1} = \partial \tilde{z}_i$  and

$$\max \{L_{d+1}(u) : u \in \tilde{z}_i\} \leq \max \{L_{d+1}(u) : u \in \tilde{z}_{i-1}\} - 1$$

If the  $i - 1$ th element doesn't satisfies  $\star$ , then set  $l = i - 1$ .

- If the  $k$ th element was defined, set  $l = k$ .

Since  $\sim_{C_X}$  is a transitive relation, we have that for any  $i \in [l]$ ,  $z \sim_{C_X} \tilde{z}_i$ . If  $l \neq k$ , then there exists  $\tilde{z}_i$  such that  $\tilde{z}_i \sim_{C_X} z$  and  $\tilde{z}_i$  satisfies  $\star$ , namely by setting  $\tilde{z} = \tilde{z}_i$ , we get the desired. So, it is left to handle the case where  $l = k$ . In that case, set  $\tilde{z} = \tilde{z}_k$ . By Claim 3.52:

$$\max \{L_{d+1}(u) : u \in \tilde{z}\} \leq \max \{L_{d+1}(u) : u \in \partial^- z\}$$

Yet, since  $\tilde{z} \sim_{C_X} z$ , it follows that  $\partial \tilde{z} = \partial z$ , So:

$$\max \{L_{d+1}(u) : u \in \partial^- z\} = \max \{L_{d+1}(u) : u \in \partial^- \tilde{z}\} \leq \max \{L_{d+1}(u) : u \in z\}$$

Therefore, we have the equality:

$$\max \{L_{d+1}(u) : u \in \tilde{z}\} = \max \{L_{d+1}(u) : u \in \partial^- z\}$$

□

Next, we prove that the sweep-cycle advances the corner of the error's boundary. We assume we are given an error whose corner sees a syndrome, and thereby it is also the corner of the boundary, and show that the sweep-rule application excludes the corner. In other words, the sweep-rule shrinks  $X$ -errors.

**Claim 3.54.** *Let  $z$  be a finite assignment and let  $\xi$  be the result of the application of the sweep rule on it. Then:*

1. *For any  $i \in [d]$ :  $\max \{L_i(v) : v \in \partial^- z\} \geq \max \{L_i(v) : v \in \partial^- \xi\}$*
2. *And for  $i = d + 1$  :  $\max \{L_{d+1}(v) : v \in \partial^- z\} > \max \{L_{d+1}(v) : v \in \partial^- \xi\} + 1$*

*Proof.* The first inequality was proved in Claim 3.48, so it's left to prove the second. First, since the sweep rule is invariant to addition by stabilizers, for any  $\tilde{z}$  such that  $\tilde{z} \sim_{C_X} z$ , the correction applied by the sweep rule on  $\tilde{z}$  is the same as the application on  $z$ . Denote by  $\phi$  the applied correction, by  $\tilde{\xi}$  the result of applying the sweep rule on  $\tilde{z}$ , and by  $w$  the stabilizer which is the difference between  $z$  and  $\tilde{z}$ , namely:

$$\begin{aligned}\xi &= z + \phi \\ \tilde{\xi} &= \tilde{z} + \phi \\ \tilde{z} &= z + w\end{aligned}$$

The  $\partial^-$  boundary of  $\tilde{\xi}$  equals:

$$\partial^- \tilde{\xi} = \partial^- (\tilde{z} + \phi) = \partial^- (z + \phi) = \partial^- \xi$$

So, in total, we have that for any  $\tilde{z}$  such that  $\tilde{z} \sim_{C_X} z$ , it holds that  $\partial^- \tilde{z} = \partial^- z$  and  $\partial^- \tilde{\xi} = \partial^- \xi$ . Therefore, showing that there exists  $\tilde{z} \sim_{C_X} z$  for which the claim holds proves the claim for  $z$ . By Claim 3.53, there is  $\tilde{z} \sim_{C_X} z$  such that:

$$\max \{L_{d+1}(u) : u \in \tilde{z}\} = \max \{L_{d+1}(u) : u \in \partial^- \tilde{z}\}$$

For such  $\tilde{z}$ , any maximum of  $L_{d+1}$  in  $\partial^-\tilde{z}$ , is also a maximum in  $\tilde{z}$ . Denote by  $v_1, \dots, v_k$  the maximum points in  $\partial^-\tilde{z}$ . Since they are maximum points in  $\tilde{z}$ , it holds that for each  $i \in [k]$ ,  $\tilde{z}|_{v_i} = \tilde{z}|_{v_i+}$ , and hence  $\partial^-\tilde{z}|_{v_i} = \partial^-\tilde{z}|_{v_i+}$ . Since  $\tilde{z}|_{v_i+}$  is an assignment rooted at  $v_i$ , then  $v_i$  can suggest  $\tilde{z}|_{v_i+}$  (Claim 3.44), namely the condition in sweep rule is satisfied for vertex  $v_i$ . Thus:

$$\partial^-\tilde{\xi}|_{v_i} = \partial^-\tilde{z}|_{v_i} + \partial^-\phi|_{v_i} = 0$$

Namely, for any  $i$ , the  $i$ th vertex  $v_i$  is not in  $\tilde{\xi}$ . For any vertex  $v$  denote by  $\phi_v$  the correction made by the vertex  $v$ , namely  $\phi = \sum_{v \in \partial^-\tilde{z}} \phi_v$ . By the same arguments as in the proof of Claim 3.52, we have that  $v_j \notin \phi_{v_i}$ . Hence, the vertex domain of  $\tilde{\xi}$  is contained in the union of the vertices of  $\tilde{z}$  with the vertices of  $\cup_{v \in V} \phi_v$ , substituting maximum points  $v_1, v_2, \dots, v_k$ . Overall, we get:

$$\begin{aligned} \max \left\{ L_{d+1}(u) : u \in \partial^-\tilde{\xi} \right\} &\leq \max \left\{ L_{d+1}(u) : u \in \partial^-\tilde{z} \bigcup_{v \in \partial^-\tilde{z}} \phi_v / \bigcup_i v_i \right\} \\ &\leq \max \left\{ L_{d+1}(u) : u \in \partial^-\tilde{z} \right\} - 1 \end{aligned}$$

And we proved the second part of the claim.  $\square$

We finished analyzing the first part of the sweep-cycle that acts in the computational basis. In the next section, we show that the second part of the cycle shrinks phase errors.

### 3.6.1 The Sweep-Rule Phase in the Dual Code

Now, we will think of the binary assignment  $z \in \mathbb{F}_2^{\mathcal{F}_{d'}}$  as the positions of the  $Z$ -errors, after permuting the qubits by the  $\phi$ -transpose. Namely,  $\partial^-z$  is the assignment boundary that we would like to shrink, and  $\partial^+\phi(z)$  is its source prior to the reordering.

In this stage of the sweep-cycle, the sweep-rule acts in opposite directions. Thus, it will be sufficient to show that the extremities of the potential walls in  $\partial^-z$  mirror the extremities of the potential walls of  $\partial^+\phi(z)$ . Subsequently, since the sweep-rule shrinks  $\partial^-z$  (with sign adjustments), we have that the  $\phi$ -transpose of the yielded assignment also admits a shrunk coboundary relative to  $\partial^+\phi(z)$ .

However, we would not be able to show an exact mirroring, yet we show that the situation is close, and that would be enough. Specifically, we will show that for  $g \in S$ , any of the extremities of  $L_g$  in  $\partial^-z$  are higher (sent closer) than the mirrored extremities of  $\partial^+\phi(z)$ . For  $L_{d+1}$ , the extremities of  $\partial^-z$  have an equal  $L_{d+1}$  value to the mirrored extremities in  $\partial^+\phi(z)$  plus  $d - d' - 1$ .

**Claim 3.55.** *Let  $z$  be an assignment. Then:*

1. *For any generator  $g \in S$ , and potential wall  $L_g$  it holds that:*

$$\min_{v' \in \partial^-z} L_g(v') \geq - \max_{v' \in \partial^+\phi(z)} L_g(v')$$

2. The following equality holds:

$$\max_{v' \in \partial^- z} L_{d+1}(v') = \left( - \max_{v' \in \partial^+ \phi(z)} L_{d+1}(v') \right) + d - d' - 1$$

*Proof.* For the first part, observes that a vertex that is minimizing  $L_g$  in  $\partial^- z$  is a root of unsatisfied check. Since  $\phi$ -transpose sends checks to checks, we have that the check  $\partial^- \theta_{\mathbf{v}-1, \mathbf{S}/\mathbf{S}'} = \phi(\partial^+ \theta_{\mathbf{v}, \mathbf{S}'})$  is not satisfied in  $\partial^- z$  if and only if  $\partial^+ \theta_{\mathbf{v}, \mathbf{S}'}$  is not satisfied in  $\partial^+ \phi(z)$ . Thus,

$$\begin{aligned} \min_{v' \in \partial^- z} L_g(v') &= \min \{ L_g(v^{-1}) : \theta_{\mathbf{v}, \mathbf{S}'} \in \partial^+ \phi(z) \} \\ &= - \max \{ L_g(v) : \theta_{\mathbf{v}, \mathbf{S}'} \in \partial^+ \phi(z) \} \\ &\geq - \max \{ L_g(u) : u \in \partial^+ \phi(z) \} \end{aligned}$$

For the second part, observes that if  $\theta_{\mathbf{v}, \mathbf{S}'}$  is unsatisfied check in  $\partial^- z$  then the vertex which gets the minimal value among the vertices on  $\theta_{\mathbf{v}, \mathbf{S}'}$  is the vertex that is the farthest from  $v$ . Namely the vertex:

$$u = \left( \prod_{g \in \mathbf{S}'} g \right) v$$

So, similarly to the first part, and combining that the checks induce  $\partial^+ \phi(z)$  are at dimension  $d' + 1$  we have:

$$\begin{aligned} \min_{v' \in \partial^- z} L_{d+1}(v') &= \min \{ L_{d+1} \left( \left( \prod_{g \in \mathbf{S}/\mathbf{S}'} g \right) v^{-1} \right) : \theta_{\mathbf{v}, \mathbf{S}'} \in \partial^+ \phi(z) \} \\ &= (d - d' - 1) - \max \{ L_{d+1}(v) : \theta_{\mathbf{v}, \mathbf{S}'} \in \partial^+ \phi(z) \} \\ &= (d - d' - 1) - \max \{ L_g(u) : u \in \partial^+ \phi(z) \} \end{aligned}$$

Where the last transition is an equality since the maximum of  $L_{d+1}$  is achieved at a root vertex.  $\square$

Clearly, the equality regarding  $L_{d+1}$  means that advancing 'down' a minimal vertex in  $\partial^- z$  implies advancing 'up' a corresponding maximal vertex in  $\partial^+ \phi(z)$ . The following claim states that the maximum value of  $L_g$  in  $\partial^+ \phi(z)$  can only decrease (the error doesn't spread in the  $g$ -direction) by the application of the sweep-rule in the dual picture ( $\partial^- z$ ).

**Claim 3.56.** For  $g \in S$  denote  $M = \min_{v \in \partial^+ \phi(z)} L_g(v)$ , and denote by  $\xi$  the result of the sweep-rule over  $z$ . Then  $\min_{v \in \partial^+ \phi(\xi)} L_g(v) \leq M$ .

*Proof.* Assume through contradiction that  $\min_{v \in \partial^+ \phi(\xi)} L_g(v) \leq M$ . Thus, there has to be a check that is unsatisfied in  $\phi(\xi)$  and satisfied in  $\phi(z)$ . Denote it by  $\theta_{\mathbf{v}, \mathbf{S}'}$ , and from the inclusion/exclusion relation, it follows that  $\theta_{\mathbf{v}-1, \mathbf{S}/\mathbf{S}'} \in \xi$  while  $\theta_{\mathbf{v}-1, \mathbf{S}/\mathbf{S}'} \notin z$ . Thus, one of the qubits adjacent to  $\theta_{\mathbf{v}-1, \mathbf{S}/\mathbf{S}'}$  was flipped by the sweep-rule. Denote the vertex that flipped the qubits, while performing the sweep-rule, by  $w$  (if there is

more than one pick arbitrary) and the vertex with the maximal  $L_g$  value among the vertices of  $\theta_{v,S'}$  by  $u$ .

For the sake of the proof, we will say that  $g^{-1}$  is on the path from vertex  $w$  to vertex  $v^{-1}$ , if one has to go through an edge corresponding to generator  $g$  (in the opposite direction) for getting to  $v^{-1}$  from  $w$ . There are two options, let's splitting on whether  $g^{-1}$  is on the path from  $w$  to  $v^{-1}$ .

In the first case, it must be that  $L_g(w) = \min L_g(v^{-1})$ , and in addition,  $g \notin S/S'$ , so

$$L_g(u) = L_g(v) = -L_g(v^{-1}) = -(L_g(w) - 1) \leq M$$

In the second case, where  $g^{-1}$  is not on the path from  $w$  to  $v^{-1}$ , it follows that  $L_g(w) = L_g(v^{-1})$ . Denote the flipped face by  $f$ . By the definition of the sweep-rule, there has to be at least one check in the negative local view of  $w$  such that it's contained in  $f$ , and it's unsatisfied in  $\partial^-(z)$  (Otherwise,  $w$  would not flip  $f$ ). Denote it by  $\theta_{x,J}$ , and since  $g^{-1}$  is not on the path between  $w$  and  $v^{-1}$ , then it's also not on the paths from  $w$  to  $x$  and from  $x$  to  $v^{-1}$ , namely  $L_g(x) = L_g(w)$  and  $g \notin J$ . On the other hand,  $\theta_{x^{-1},S/J} \in \partial^+\phi(z)$ , and  $g \in S/J$ , so we get that the maximal value of  $L_g$  in  $\theta_{x^{-1},S/J}$  is  $1 - L_g(x) = 1 - L_g(v^{-1}) \geq L_g(u)$ , in contradiction to the fact that  $u$  exhibits  $L_g$  value greater than  $M$ .  $\square$

Combining the relation of extremis of an error to its extremis in the dual image, with the argument that the sweep-rule shrinks  $X$ -error ( $\partial^-$ -boundaries), we infer that a full sweep-cycle shrinks an error composed of both  $X$ - and  $Z$ -components.

**Corollary 3.57.** *Consider an error whose  $X$ - and  $Z$ -product components lie at positions corresponding to vectors  $z_X, z_Z \in \mathbb{F}_2^{\mathcal{F}_{d'}}$ . Denote by  $\xi_X, \xi_Z \in \mathbb{F}_2^{\mathcal{F}_{d'}}$  the  $X, Z$  positions of the result after the application of a full sweep-cycle. Then:*

1. For any  $i \in [d]$ :

$$\max \{L_i(v) : v \in \partial^- z_X \cup \partial^+ z_Z\} = \max \{L_i(v) : v \in \partial^- \xi_X \cup \partial^+ \xi_Z\}$$

2. And for  $i = d + 1$  :

$$\max \{L_{d+1}(v) : v \in \partial^- z_X \cup \partial^+ z_Z\} > \max \{L_{d+1}(v) : v \in \partial^- \xi_X \cup \partial^+ \xi_Z\} + 1$$

### 3.6.2 Ideal decoder

Although the main role of the section is to show that a single sweep-cycle keeps error clusters under control during a noisy run (by admitting a modest shrinking), an immediate corollary of this is that the application of non-noisy multiple iterations of the sweep-cycle has the potential to erase errors, namely a decoder. Here, a classical measurement is given, we act on classical bits, and the sweep-cycle consists only of the first stage that works over the computational basis, without moving to the dual code. We formulate the corollary as follows:

**Corollary 3.58.** *Consider the  $(d, d')$ -Toric code, induced by a Toric with side length  $n$ . Given an error  $z \in \mathbb{F}_2^{\mathcal{F}_{d'}}$  on that Toric, with  $\mathbf{Size}(z) \leq n - 1$ . Then an application of  $\mathbf{Size}(z)$  sweep cycles (partial cycles consisting only of the first stage) erases the error.*

*Proof.* Notice that since  $\mathbf{Size}(z) \leq n - 1$ , we have that for any  $g \in S$ :

$$\max_{v \in z} L_g(v) - \min_{v \in z} L_g(v) \leq \mathbf{Size}(z) \leq n - 1$$

Thus,  $z$  doesn't spread on a non-trivial cycle and therefore translates to (a collection of) finite error in the  $\infty$ -extension. Denote by  $\xi_t$  the corresponding error on the infinite plane after  $t$  sweep-cycles, and let  $\xi_0$  be the corresponding error on the infinite plane prior to the first cycle. Since  $\xi_0$  is finite, we use Claim 3.54 and have that each sweep-cycle decreases the boundary by at least one, namely:

$$\mathbf{Size}(\partial^- \xi_{t+1}) \leq \mathbf{Size}(\partial^- \xi_t) + 1$$

Therefore, after at most  $\mathbf{Size}(\partial^- z) \leq \mathbf{Size}(z)$  iterations, the boundary of the error vanishes. In particular, the syndrome vanishes. It remains to prove that during the decoding, no logical codewords were turned on. Denote by  $\tilde{\xi}_t$  the correction that was applied at cycle  $t$ . From Claim 3.48, it follows immediately that for any generator  $g \in S$ , it holds that:

$$\max\{L_g(v) : v \in \xi_0 \bigcup_t \tilde{\xi}_t\} \leq \max\{L_g(v) : v \in \xi_0\}$$

And since the sweep-rule defines that vertices flips only bits which they are in their positive local view, we also have:

$$\max\{L_{d+1}(v) : v \in \xi_0 \bigcup_t \tilde{\xi}_t\} \leq \max\{L_{d+1}(v) : v \in \xi_0\}$$

Thus, the support of all the qubits that were touched during the decoding, combined with the support of the initial error, satisfy:

$$\begin{aligned} \mathbf{Size}(\{v : v \in \xi_0 \bigcup_t \tilde{\xi}_t\}) &\leq \mathbf{Size}(\{v : v \in \xi_0\}) \\ &\leq \mathbf{Size}(z) \leq n - 1 \end{aligned}$$

□

### 3.7 Toric Encoded Circuits and Toom's Contours

We are about to zoom out from a single register encoded in the Toric code to describe a fully fault-tolerant computation. For a given quantum circuit, assumed to consist of gates **CX**, **H**, **S**, **T** and measurements, we define its Toric encoded circuit as its version where each qubit is encoded by the Toric code. Formally:

**Definition 3.59** (Troic Encoded Circuit). *Let  $C$  be a quantum circuit. We say that  $C$  is a Toric encoded circuit if the following holds:*

1. *Any layer of the circuit consists of classical and quantum registers, such that there is a Toric code  $\mathcal{C}$  such that the quantum registers are encoded by the nice encoding of  $\mathcal{C}$ . At time  $t = 0$ , the quantum registers are initialized to be either  $|\bar{0}\rangle$ , encoded  $|\mathbf{H}\rangle$ , encoded  $|\mathbf{S}\rangle$ , or encoded  $|\mathbf{T}\rangle$ . The classical registers are initialized to be zeros.*
2. *The layers of  $C$  on the quantum registers at even times are sweep-cycles, and the layers at odd times are realizations of either logical Paulis,  $\mathbf{CX}$ , or measurements in the computational and parity bases. On the classical registers, including the measured register, we allow any two-bit gates.*

For Toric encoded circuits, we define their *base graph*, which can be thought of as a recording of a running from the Toric's point of view. The *base graph* is obtained by taking the Toric's vertices at different times as the vertices and connecting any two sequential in time if they are support faces — qubits — which are either the same or are entangled by a quantum gate.

**Definition 3.60** (Base graph  $G_o$ ). *Let  $C$  be a Toric encoded circuit at depth  $\eta$ . Notice that measurements take quantum registers into classical, Thus any quantum register has a maximal depth, which we denote by  $\{\eta_i\}$ . Let's denote by  $\{\mathcal{G}_i\}$  the Toric complexes that induce the codes. We define the base graph of  $C$ , denoted by  $G_o = (V_o, E_o)$ , as follows:*

1. *The vertices  $V_o$  are tuples, where the first coordinates correspond to a vertex in the disjoint union over the vertices in  $\{\mathcal{G}_i\}$ , and the second coordinate is associated with a time. Namely:*

$$V_o := \bigcup_i (V(\mathcal{G}_i) \times [\eta_i])$$

2. *The edges  $E_o$  are derived from the original edges in  $\mathcal{G}_1, \dots, \mathcal{G}_k$ , with the addition that any two vertices in preceding times  $t$  and  $t + 1$  that support qubits (faces) such that  $C$  acts non-trivially on those qubits at time  $t$  are also connected by an edge. Namely:*

$$E_o := \left\{ \{(v, t), (u, t')\} : \begin{array}{l} \text{if} \\ \text{either there exists } i \text{ such } \{v, u\} \in \mathcal{G}_i \text{ and } t' = t + 1 \\ \text{or there exists } u_i = (g_i, l_i) \in C \text{ such } v, u \in l_{i,2} \text{ and } t = l_{i,1}, t' = l_{i,1} + 1 \end{array} \right\}$$

*Where we define a vertex  $v$  to belong to location  $l$  if there is a qubit-face  $f$  in  $l$  such that  $v$  belongs to its associated face.*

As a concept, if the base graph is a recording of a running from the Torices' point of view, then a *Tooms contour* is a recording of the deviation's evolution in the eyes of the Torices vertices. More technically, the Tooms contour is the restriction of the base graph to vertices that witness a deviation, namely those that see unsatisfied checks.

**Definition 3.61** (Tooms Contour Graph of  $C(\mathcal{E})$ ). *For a quantum circuit  $C$  and set of faults  $\mathcal{E}$ , let us denote the base graph of  $C[\mathcal{E}]$  by  $G_o$ . For each time  $t$ , denote the deviation induced by  $\mathcal{E}$  at time  $t$  by  $\mathcal{D}_t$ . We define the Tooms contour graph  $\mathcal{H} = (V_{\mathcal{H}}, E_{\mathcal{H}})$  as follows:*

1. *The vertices  $V_{\mathcal{H}}$  are the boundary of  $\mathcal{D}$ . Namely:*

$$V_{\mathcal{H}} := \{v_t : v_t = (v, t) \in V_o \text{ and there exists a face } f \in \partial\mathcal{D}_t \text{ such } v \in f\}$$

*We extend the action of potential walls to act on the vertices of  $V_{\mathcal{H}}$  by acting on the associated points in  $\mathbb{R}^d$ . More concretely, for a vertex  $v \in V_{\mathcal{H}}$ , whose corresponding vertex on the infinite  $\mathbb{R}^d$  Toric is  $\tilde{v} \in \mathcal{G}$ , and a potential wall  $L_i$ , the value of  $L_i$  at  $v$  is:*

$$L_i(v) := L_i(\tilde{v})$$

2. *The edges  $E_{\mathcal{H}} \subset E_o$  is partitioned into two types  $A_{\mathcal{H}}$  and  $F_{\mathcal{H}}$ , where for any logical gate  $g$  which applied in time  $t$  in  $C[\mathcal{E}]$  we add edge to  $A_{\mathcal{H}}$  as follow:*

- (a) *If  $g$  is either a logical Pauli, a measurement (both in the computational and phase basis), or an identity, then for any face  $f$  in the register on which  $g$  acts, we add:*

$$\{\{(u, t), (v, t+1)\} : u, v \in f \text{ and } v, u \in V_{\mathcal{H}}\}$$

- (b) *If  $g$  is a logical **CX** then for any physical **CX** in its realization, between faces  $f_1$  into  $f_2$  at time  $t$  we add:*

$$\{\{(u, t), (v, t+1)\} : u \in f_1 \cup f_2, v \in f_1 \cup f_2 \text{ and } v, u \in V_{\mathcal{H}}\}$$

*In addition for any fault  $g$  of  $\mathcal{E}$ , that is applied at time  $t$ , and any face  $f \in \text{Locc}(g)$ , we add the edges:*

$$\{\{(u, t), (v, t+1)\} : u, v \in f \text{ and } u, v \in V_{\mathcal{H}, X}\}$$

*To construct  $F_{\mathcal{H}}$ , we connect any pair of vertices  $(v, t)$ ,  $(u, t)$  if there exists a vertex  $(w, t+1)$  such both of them are connected to it through  $A_{\mathcal{H}}$ . Namely:*

$$F_{\mathcal{H}} = \{e = \{u, v\} \in E_o : \text{exists } w \in V_{\mathcal{H}} \text{ such } \{v, w\}, \{u, w\} \in A_{\mathcal{H}}\}$$

*We call  $A_{\mathcal{H}}$  and  $F_{\mathcal{H}}$  the arrows and forks edges respectively.*

For the analyses, we would like to extend Toom's contour to record in their final layer a partial time-step, namely a computation up to a certain step Definition 3.2.

**Definition 3.62.** For a Toric encoded quantum circuit  $C$ , a set of faults  $\mathcal{E}$ , and a step  $\tau$ , according to the standard order, let  $C[\mathcal{E}]_\tau$  be the partial computation circuit of  $C[\mathcal{E}]$  up to step  $\tau$ . We define the analysis Toom's contour at step  $\tau$   $\mathcal{H}_\tau = (V_\mathcal{H}, E_\mathcal{H})$  to be the graph obtained by taking the Toom's contour of  $C[\mathcal{E}]_\tau$  and adding vertices and edges as follows:

1. For vertices, we define  $t^\star$  as the maximum time of vertices up to step  $\tau$  plus one, and then add the subset:

$$\left\{ v_{t^\star} : v_{t^\star} = (v, t^\star) \text{ and there exists a } d' \pm 1 \text{ dimensional face } f \in \partial D_{t^\star-1} \right. \\ \left. \text{and a vertex } u_{t^\star-1} \text{ such } v_{t^\star}, u_{t^\star-1} \in f \right\}$$

2. For the edges, we add the following arrows:

$$\left\{ \{(u, t^\star - 1), (v, t^\star)\} \text{ if there exists a } d' \pm 1 \text{ dimensional face } f \in \partial D_{t^\star-1} \right. \\ \left. \text{and a vertex such } v_{t^\star}, u_{t^\star-1} \in f \right\}$$

3. Finally, we add forks for vertices at time  $t^\star$  to preserve the property that any two vertices with the same time coordinate, which are connected to a third via arrows, are also connected by a fork.

### 3.8 Space-Time Graph

Not a few of the results about Tooms contours are derived from their directed structure, regardless of their connection to Torices. Thus, we split the discussion to talk about *space-time graphs*, which are graphs whose edges can be partitioned into arrows and forks.

Here, we present the results and proofs first given by Berman and Simon [BS88] and later by Gacs [Gac21] about *space-time graphs*. Although the proofs we give are almost identical, we chose to present them rather than referring to the sources. The reason for this is that in the language appearing in [BS88] and [Gac21], vertices are bits<sup>11</sup>, so conceptually their Toom's contours track different creatures. Thus, jumping into their text while keeping our image in mind might cause confusion, and we want to avoid that.

**Definition 3.63.** Consider a graph  $G = (V, A, F)$ , where  $V$  is a set of vertices, and  $A$  and  $F$  are sets of undirected edges. For  $v \in V$ , denote by  $\text{pre}(v) = \{u \in V : \{u, v\} \in A\}$ , we extend the notion for subsets of vertices  $X \subset V$  by  $\text{pre}(X) = \bigcup_{v \in X} \text{pre}(v)$ . Let  $T : V \rightarrow \mathbb{N}$ , We say that  $(G, T)$  is a time graph if and only if:

1.  $\{x, y\} \in A \Rightarrow T(y) = T(x) + 1$
2. For  $x, y \in V$   $\{x, y\} \in F$  if and only if there exists  $z \in V$  such both  $\{x, z\}, \{y, z\} \in A$ .

---

<sup>11</sup>It is also true that the gates are different, yet that difference alone does not constitute a conceptual change.

We will call to  $T$  the time coordinate, to  $A$  arrows, and to  $F$  forks. Observe that from the second requirement it follows that forks can connect only vertices that have the same time value (set by  $T$ ).

**Remark 3.64.** The Toom's contour graph defined in Definition 3.61 is, by definition of its construction, a time-graph.

The history of a vertex consists of all the vertices that are connected to it by arrows. Here we allow passing through arrows in both directions, so it might be possible that the history of vertex  $u$  contains vertices with the same time coordinate as  $u$ . That motivates to define *slices*. A *slice* is a (maximal) subset of vertices with the same time coordinate such they share the same history.

**Definition 3.65** (History, slice.). For a time graph  $(G, T)$  and a vertex  $u \in V$ , let the history of  $u$ , denoted by  $H_u$ , be the restriction of  $G$  to vertices that both precede  $u$  in time and connect to  $u$  via path of arrows. A slice is a maximal subset of vertices  $K \subset V$  such that for any two vertices  $u, v \in K$ ,  $H_u = H_v$  is satisfied. As a consequence, the time coordinate in  $K$  has to be constant. Thus, we can extend the time coordinate and the history to slices and write for a slice  $K$ ,  $T(K)$  and  $H_K$ .

**Claim 3.66.** Consider slices  $K_1, K_2$  such that  $T(K_1) = T(K_2)$ , then either  $K_1 = K_2$  or  $H_{K_1}, H_{K_2}$  are disjoint.

*Proof.* Assume a non-empty intersection, so there exists  $z \in H_{K_1} \cap H_{K_2}$  such that for any  $x \in K_1$  and  $y \in K_2$ , there exist arrow-paths  $z \rightarrow x$  and  $z \rightarrow y$ . Thus, for any  $w \in H_{K_1}$ , one can concatenate a path  $w \rightarrow x \rightarrow z \rightarrow y$  and conclude that  $y \in H_{K_2}$ .  $\square$

**Definition 3.67** (The graph of slice). Let  $K$  be a slice. The graph of  $K$ , denoted by  $G_K = (V_K, E_K)$ , is the graph whose vertices are slices  $R \subset H_K$  with  $T(R) = T(K) - 1$ . Two vertices are connected by an edge if and only if there is a fork whose ends belong to the slices associated with them. Namely,  $S, R \in V_K$  are connected in  $G_K$  if and only if there is  $\{s, r\} = f \in F$  such that  $s \in S$  and  $r \in R$ .

**Claim 3.68.**  $G_K$  is connected.

*Proof.* Let  $R, S \in V_K$  and consider  $r, s \in V$  such that  $r \in R, s \in S$ . Recall that  $R, S \subset H_K$  and therefore  $r, s \in H_K$ . Thus, by definition of the 'History' there exists a path, passing through arrows only, from  $r$  to  $s$  in  $H_K$ . Consider such a path that is minimal in the number of points  $x$  belong to it, with  $T(x) = T(K)$ . By induction on the number  $k$  of such points we prove that  $R$  and  $S$  are connected in  $G_K$ .

1. Base.  $k = 0$ , In this case, the path from  $r$  to  $s$  lies within  $G_r (= G_s)$ . Hence  $H_r = H_s$ , So  $R = S$ .
2. Induction step. There exists  $y$  on the path from  $r$  to  $s$  such that  $T(y) = T(K)$ . Let  $x$  be the point which precedes  $y$  on the path, and  $z$  the point that follows  $y$ . Since the values of  $T$  at the two ends of an arrow differ by 1, and since  $y$  gets the maximal  $T$  value in  $H_K$  it follows that:

- (a)  $\{x, z\} \subset \text{pre}(y) \Rightarrow \{x, z\} \in F$ .
- (b) The slices of  $x$  and  $z$ , say  $K_x$  and  $K_z$  has time value  $T(K_x) = T(K_z) = T(K) - 1$ , Namely they are both members of  $V_K$ .

Since the path connecting  $r, x$  in  $H_K$  has  $k - 1$  vertices with  $T(\cdot) = T(K)$ , then by the induction hypothesis,  $R$  and  $K_x$  are connected in  $G_K$ , and by similar argument so are  $K_z$  and  $S$ . On the other hand,  $\{x, z\} \Rightarrow \{K_x, K_z\} \in E_K$ . Thus,  $R$  and  $S$  are connected in  $G_K$ .

□

**Definition 3.69** (Spanned Set). Consider a subset  $A \subset \mathbb{R}^d$ , and  $d + 1$  points  $x_1, \dots, x_{d+1}$ . We say that  $\langle A, x_1, \dots, x_{d+1} \rangle$  is a spanned set of  $A$  if for any  $i \in [d + 1]$  and  $s \in A$ , it holds that  $L(s) \leq L_i(x_i)$  and in addition there are  $v_1, \dots, v_{d+1} \in V$ , not necessary different, that achieve the equalities  $L_i(x_i) = L_i(v_i)$ . We name  $x_1, \dots, x_{d+1}$  the poles of  $A$ . Furthermore, we extend the notation to a spanned slice when  $A$  is a slice of some time-graph. Notice that saying  $\langle A, x_1, \dots, x_{d+1} \rangle$  is a spanned set means that  $\text{Size}(A) = \text{Size}(\{x_1, \dots, x_{d+1}\})$ .

Observe that in the case where the subset  $A$  is a slice. Each of these poles can be associated with a vertex of  $G$  that gives the equality. If there are multiple vertices whose give equality, associate the point with one of them arbitrarily. We will use the notion of applying functions originally defined over vertices to the poles, referring to the application over the vertices associated with them. For example  $\text{pre}(x_i) = \text{pre}(v)$  for the vertex  $v \in A$  which satisfies  $L_i(v) = L_i(x_i)$  and therefore is associated with the pole  $x_i$ . Another example is referring to  $x_i$  as a vertex, so when saying 'For  $x_i \in V_k$ ' or 'For  $\{x_i, u\} \in F$ ', we refer to the associated vertex or the edge connecting it to  $u$ .

**Claim 3.70.** Consider a time graph  $(G, T)$ , Let  $K$  be a slice in  $G$ , and let  $\hat{K} = \langle K, x_1, \dots, x_{d+1} \rangle$  be a spanned slice of  $K$  such that  $K \neq H_K$ . Then for some integer  $k$  there exist spanned slices  $\hat{K}_0 = \langle K_0, \cdot \rangle, \dots, \hat{K}_k = \langle K_k, \cdot \rangle$  and Forks  $F_1, \dots, F_k$  such that:

1. For  $i \in [d + 1]$   $\text{pre}_i(x_i)$  belongs to the poles  $\hat{K}_0, \dots, \hat{K}_k$ .
2. Introduce an edge between  $\hat{K}_i$  and  $\hat{K}_j$  if and only if one of the Forks  $F_1, \dots, F_k$  consists of a pole of  $\hat{K}_i$  and a pole of  $\hat{K}_j$ . Then the graph formed from  $\hat{K}_0, \dots, \hat{K}_k$  is connected.
3.  $\sum_{i=0}^k \text{Size}(\hat{K}_i) + \sum_{i=1}^k \text{Size}(F_i) \geq \sum_{i=1}^{d+1} L_i(\text{pre}_i(x_i))$

*Proof.* First Notice that  $K$  doesn't contain leaves in  $(V, A)$ , since a leaf is connected only to itself via arrows, and therefore its 'slice' equals to its 'History'. Thus  $\text{pre}_i(x_i)$  is not empty for  $i = 1, \dots, d + 1$ . Next consider the graph  $G_K = (V_K, E_K)$  from definition 3.67. Since  $\{x_i, \text{pre}_i(x_i)\}$  is an arrow  $\text{pre}_i(x_i)$  belongs to a slice in  $V_K$ . for  $i = 1, \dots, d + 1$  denote by  $R_i$  the slice in  $V_K$  that contains  $\text{pre}_i(x_i)$ .

By claim 3.68  $G_K$  is connected and therefore there exist a minimal collection  $\{K_0, \dots, K_k\}$  of slices form  $V_K$  which contains  $R_1, R_2, \dots, R_{d+1}$ , and which is connected

in  $G_K$ . We pick a set of forks  $\mathbf{F} = \{F_1, \dots, F_k\}$  which realizes a spanning tree for this collection of slices. Later we will identify edges from this spanning tree with the forks from  $\mathbf{F}$ .

For  $i = 1, \dots, d+1$  we set  $\text{pre}_i(v_i)$  to be the  $i$ th pole of  $R_i$ . This assures (1). The set of remaining poles for  $\hat{K}_0, \dots, \hat{K}_k$  will be equal to  $\cup_{i=k}^k F_i$ . This will assure (ii). We will also select poles for  $F_1, \dots, F_k$  to form 'spanned forks'  $\hat{F}_1, \dots, \hat{F}_k$  in such way that:

$$\sum_{i=0}^k \text{Size}(\hat{K}_i) + \sum_{i=1}^k \text{Size}(\hat{F}_i) \geq \sum_{i=1}^{d+1} L_i(\text{pre}_i(v_i))$$

This will assure (3).

Let us denote by  $J_0, \dots, J_{2k}$  the enumerated union  $K_0, \dots, K_k, F_1, \dots, F_k$ . Observe that for any choice of  $(d+1)(2k+1)$  elements  $z_0^1, z_0^2, z_0^3, \dots, z_0^{d+1}, \dots, z_{2k}^{d+1}$  in  $\mathbb{R}^d$ , such that  $z_j^i \in J_j$  it holds that:

$$\sum_{i=0}^k \text{Size}(\hat{K}_i) + \sum_{i=1}^k \text{Size}(\hat{F}_i) \geq \sum_{j,i} L_i(z_j^i) \quad (1)$$

Later, we are going to take the points  $\{z_j^i\}$  from the intersection of  $J_j$ 's. For convenience, let us assume that for the index subset  $X \subset [2k] \cup \{0\}$ , the intersection  $\bigcap_{j \in X} J_j$  returns a single point. If there is more than one, then decide on the point in a way that all the chosen points simultaneously satisfy that for any index subsets  $Y, X$ , such that  $X \cap Y$  and they both introduce a non-trivial intersection  $\bigcap_{j \in Z} J_j : Z \in \{X, Y\}$ , then:

$$\bigcap_{j \in X} J_j = \bigcap_{j \in Y} J_j$$

Now consider a non-trivial maximal intersection  $\bigcap_{j \in X} J_j$ , the intersection is maximal in the sense that for any  $j' \notin X$  it holds that  $\bigcap_{j \in X \cup \{j'\}} J_j = \emptyset$ . We claim that for any  $i$  and for any such  $X$ , there is  $t \in X$  such that  $J_t$  is the successor of  $J_j$  on the path to  $R_i$  for any  $j \in X/\{t\}$ . Assume not. Let  $x, y \in X$ , and denote the paths from  $J_x, J_y$  to the  $i$ th pole by  $\langle J_x, J_{x_2}, \dots, R_i \rangle$ ,  $\langle J_y, J_{y_2}, \dots, R_i \rangle$ , such that  $J_y \neq J_{x_2}$ . If  $y = x_2$ ,  $y_2 = x$ , or  $x_2 = y_2 \in X$ , then pick other  $x, y$  (if there is no such, we get an immediate contradiction). In that case,  $\langle J_x, J_y, J_{y_2}, \dots, R_i \rangle$  is a path from  $J_x$  to  $R_i$  which is different from  $\langle J_x, J_{x_2}, \dots, R_i \rangle$ . Therefore, there are at least two paths from  $J_x$  to the  $i$ th pole, namely, there is a cycle in contradiction to the minimality of  $K_0, \dots, K_k$ .

We will choose the  $z_j^i$  by the following process. Pick a  $z_j^i$  that has not been set yet. If  $J_j = R_i$ , then set  $z_j^i \leftarrow \text{pre}_i(x_i)$  - we call this a type-1 assignment. Otherwise, consider the path from  $J_j$  to  $R_i$  (by connectivity, it has to be such a one, and by minimality, there is exactly one). Let  $J_t$  be the successor on the path, then pick  $z_j^i \in J_j \cap J_t$  - similarly, we call this assignment a type-2 assignment. Since any type-2 assignment is associated with a non-trivial intersection, and any non-trivial intersection

induces a type-2 assignment for all  $i$ 's (since for all  $i$ 's, one of the  $J_j$  on its support is a successor of the rest on their path to the  $i$ th pole), we have that:

$$\begin{aligned}
\sum_{j,i} L_i(z_j^i) &= \sum_{j,i,z_j^i \in \text{type-1}} L_i(z_j^i) + \sum_{j,i,z_j^i \in \text{type-2}} L_i(z_j^i) \\
&= \sum_i^{d+1} L_i(\text{pre}_i(x_i)) + \sum_{X: \bigcap_{j \in X} J_j \neq \emptyset} (|X| - 1) \sum_i^{d+1} L_i \left( \bigcap_{j \in X} J_j \right) \\
&= \sum_i^{d+1} L_i(\text{pre}_i(x_i))
\end{aligned}$$

Plugging it into eq. (1) gives the desired.  $\square$

**Claim 3.71.** *The maximal size of a fork is  $2d' = d$ .*

*Proof.* Consider the rules of forks connecting in Definition 3.61. For forks obtained by rules (a), (b), or as a result of a fault, it's clear that their vertices at their ends are on intersecting faces (when projecting the vertices on  $\mathcal{G}$ ). The maximal fork, in those cases, has the form of:

$$F = \{v, (\prod_{g \in S'_1} g) (\prod_{g \in S'_2} g) v\}$$

Where  $S'_1$  and  $S'_2$  are subsets of  $S$  of size  $d'$ , and therefore the size of such forks is  $\text{Size}(F) = 2d'$ .  $\square$

**Definition 3.72.** *Let  $\hat{K}$  be a spanned slice, and let  $\hat{K}_0, \dots, \hat{K}_k$  be spanned slices in  $H_K$ , and let  $F_1, \dots, F_k$  be spanned forks, such that  $\hat{K}_0, \dots, \hat{K}_k, F_1, \dots, F_k$  satisfy the conditions in Claim 3.70. We call  $\hat{K}_0, \dots, \hat{K}_k, F_1, \dots, F_k$  the predecessor decomposition of  $\hat{K}$ .*

*Furthermore, we say that  $\hat{K}$  is a result of a sweep-cycle, faults, or a logical operation if the layer at time  $T(\hat{K}) - 1$  consists of sweep-cycle gates, fault gates (whose source is  $\mathcal{E}$ ), or either measurement or logical Pauli. The order of the slice is its time modulo 4, namely  $\text{order}(\hat{K}) = T(\hat{K}) \bmod 4$ . Observe that slices that are results of faults have an order that is either 0 or 2, whereas slices that are results of a sweep-cycle or logical operation are of orders 1 and 3, respectively.*

**Corollary 3.73.** *Consider a spanned slice  $\hat{K}$ , at finite size, such that  $K \neq H_K$ . Since  $K \neq H_K$ , it follows that  $\hat{K}$  has a predecessor decomposition, denoted by  $\hat{K}_0, \dots, \hat{K}_k, F_1, \dots, F_k$ . The inequality in Claim 3.70 becomes:*

1. *If  $\hat{K}$  is a result of  $\xi$ -sweep-cycle, then:*

$$\sum_{i=0}^k \text{Size}(\hat{K}_i) + \sum_{i=1}^k \text{Size}(F_i) \geq \text{Size}(\hat{K}) + \xi$$

2. If  $\hat{K}$  is a result of either faults or a logical operation, then:

$$\sum_{i=0}^k \text{Size}(\hat{K}_i) + \sum_{i=1}^k \text{Size}(F_i) \geq \text{Size}(\hat{K})$$

*Proof.* For the sweep-cycle part, we use Corollary 3.57, which states that after each application of the sweep-cycle over a finite size assignment, the maximal  $L_{d+1}$  value of the resulting boundary decreases by 1, while the values of each  $L_g$  do not increase.

When  $\hat{K}$  is a result of either faults<sup>12</sup> or a logical operator, we use the fact that since the operators are transversal, we have that the support of  $\hat{K}$  is contained in the support of  $\cup_0^k \hat{K}_i$ , and therefore for any  $i \in [d+1]$ :

$$\max\{L_i(v) : v \in \hat{K}\} \leq \max\{L_i(v) : v \in \bigcup_{i=0}^k \hat{K}_i\}$$

□

**Claim 3.74.** For a step  $\tau$ , let  $\mathcal{H}_\tau$  be analysis Toom's contour at step  $\tau$ , and let  $t^*$  be the maximal time at that contour. For a spanned slice  $\hat{K}$ , at time  $T(K) = t^*$ , where  $K \neq H_K$ , the inequality in Claim 3.70 becomes:

$$\sum_{i=0}^k \text{Size}(\hat{K}_i) + \sum_{i=1}^k \text{Size}(F_i) \geq \text{Size}(K) - d - d' - 1$$

*Proof.* We allow vertices at the final time layer to be connected by an arrow if they are at a distance of  $d' + 1$  from each other. Therefore, for any  $i \in [d]$ , the value of  $L_i$  for  $v_i$  might be greater by 1 than the value of  $\text{pre}_i(v_i)$ , and the  $L_{d+1}$  for  $v_{d+1}$  might be greater by  $d' + 1$  than the value of the  $d + 1$  pole of  $\hat{K}$ . Hence, overall, we get that:

$$\begin{aligned} \sum_{i=1}^{d+1} L_i(\text{pre}_i(v_i)) &\geq \sum_{i=1}^d (L_i(v_i) - 1) + L_{d+1}(v_{d+1}) - \max d' - 1 \\ &= \text{Size}(K) - d - d' - 1 \end{aligned}$$

□

### 3.9 Explantation of a Spanned Slice

**Definition 3.75.** Consider a Tooms contour graph induced by Toric encoded circuit, with sweep-cycle parameter  $\xi = 1$ , and let  $\alpha, \beta$  be constants and  $\mathcal{X}_0, \mathcal{X}_1, \mathcal{X}_2, \mathcal{X}_3 \in \mathbb{A}$  be quadruple, defining such:

$$\begin{aligned} \alpha &:= 40(d+1)^2, \quad \beta := 5(d+1) \\ \mathcal{X}_r &:= 1 - r \frac{d+1}{\alpha} = 1 - \frac{r}{40(d+1)} \end{aligned}$$

---

<sup>12</sup>Notice that  $\hat{K}$  does not consist of faults since otherwise  $K = H_K$ , so the meaning here is that  $\hat{K}$  contains vertices which weren't flipped in the fault layer.

Given sets  $W$  of points,  $A$  of arrows and  $F$  of forks, we define  $U$  as the set of vertices of the graph induced by the edges of  $A \cup F$ . The sets  $W, A$  and  $F$  form an explanation of a spanned slice  $\hat{K} = \langle K, v_1, \dots, v_{d+1} \rangle$  of order  $\text{order}(\hat{K}) = r$ , if and only if:

1.  $W \cup \{v_1, \dots, v_{d+1}\} \subset U \subset H_K$  and the graph  $(U, A \cup F)$  is connected.
2. All elements of  $W$  are leaves.
3. For  $m = |W|$  and  $s = \mathbf{Size}(K)$  we have  $|A| \leq \alpha(m - \mathcal{X}_r) - \beta s$  and  $|F| < m - 1$ .

Furthermore, for a step  $\tau$  and a spanned slice  $\hat{K}$  in the analysis Toom's contour at step  $\tau$ , we extend the definition of explanation as above, but require the following weaker inequality instead: For  $m = |W|$  and  $s = \mathbf{Size}(K)$ , we have  $|A| \leq \alpha(m + 1) - \beta s$  and  $|F| < m - 1$ .

**Claim 3.76.** Every spanned slice  $K = \langle K, v_1, \dots, v_{d+1} \rangle$  has an explanation.

*Proof.* Let  $h = T(K) - \min_{u \in H_K} T(u)$ . For spans derived from the standard Toom's contours (namely not a analysis Toom's contours), we prove by induction on  $h$ .

1. Base:  $h = 0$ , meaning  $T$  is constant on  $H_K$ , so no arrows connect points of  $H_K$ . Thus,  $H_K$ , as well as  $\mathbf{K}$ , consists only of a single leaf, namely  $\hat{K}$  is a result of a fault, and  $r = \text{order}(\mathcal{X}_r) \in \{0, 2\}$ . In that case, there is a single vertex  $u \in V_{\mathcal{H}}$  such that  $U = W = \{u\}$ , so  $m = 1$ ,  $s = 0$ , and  $|A|, |F| = 0$ . It is easy to check that those values satisfy the requirement.
2. Induction Step:  $h \neq 0$  implies  $K \neq H_K$ . Thus, by claim 3.70, we know that for some  $k$  there exist spanned slices  $\hat{K}_0, \dots, \hat{K}_k$  and forks  $F_1, \dots, F_k$  that satisfy claim 3.70. In particular, for  $r < 3$  it holds that:

$$\sum_{i=0}^k \mathbf{Size}(\hat{K}_i) + \sum_{i=1}^k \mathbf{Size}(F_i) \geq \mathbf{Size}(\hat{K})$$

Whereas, for  $r = 3$ :

$$\sum_{i=0}^k \mathbf{Size}(\hat{K}_i) + \sum_{i=1}^k \mathbf{Size}(F_i) \geq \mathbf{Size}(\hat{K}) + \xi = \mathbf{Size}(\hat{K}) + 1$$

Consider  $i \in \{0, \dots, k\}$ , and denote  $s_i = \mathbf{Size}(\hat{K}_i)$ . By the inductive hypothesis and since  $T(K_i) = T(K) - 1$ , we know that  $\hat{K}_i$  has an explanation formed by a set of leaves  $\mathbf{W}_i$ , a set of arrows  $\mathbf{A}_i$ , and a set of forks  $\mathbf{F}_i$ . Let  $m_i = |\mathbf{W}_i|$ . Thus, the sets  $\mathbf{A}_i$  and  $\mathbf{F}_i$  have at most  $\alpha(m_i - \mathcal{X}_{r-1}) - \beta s_i$  arrows and  $m_i - 1$  forks. We define:

- (a)  $\mathbf{W} = \cup_{i=0}^k \mathbf{W}_i$ , Notice that  $\mathbf{W}_i \subset K_i$  and that  $T(K_i) = T(K_j)$  for all  $i, j$ , thus by Claim 3.66  $\mathbf{W}$  is a union of disjoint set, Hence  $W$  contains  $m = \sum_{i=0}^k m_i$  leaves.

- (b)  $\mathbf{F} = \{F_1, \dots, F_k\} \cup_{i=0}^k \mathbf{F}_i$  with at most  $k + \sum_{i=0}^k m_i - 1 = m - 1$  elements.
- (c)  $\mathbf{A} = \{\{v_i, \text{pre}_i(v_i)\}\} \cup_{i=0}^k \mathbf{A}_i$ . For bounding the number of arrows in  $\mathbf{A}$  we condition upon whether  $r = 3$ . For convenient, let us denote by  $Y$  the indicator, which indicate if  $r = 3$ .

$$\begin{aligned}
& d + 1 + \sum_{i=0}^k \alpha(m_i - \mathcal{X}_{r-1}) - \beta s_i \\
& \leq d + 1 + \alpha m - \mathcal{X}_{r-1} \alpha(k + 1) - \beta(s + Y\xi - k \cdot \mathbf{Size}(\text{fork})) \\
& = \alpha(m - \mathcal{X}_r) - \beta s + (\alpha(\mathcal{X}_r - \mathcal{X}_{r-1}) + d + 1 - \mathcal{X}_{r-1} k \alpha - \beta Y \xi + \beta k \cdot \mathbf{Size}(\text{fork}))
\end{aligned}$$

So it's left to show that the term in the closure is negative for all integers  $k$ :

$$\alpha(\mathcal{X}_r - \mathcal{X}_{r-1}) + d + 1 - \mathcal{X}_{r-1} k \alpha - \beta Y \xi + \beta k \cdot \mathbf{Size}(\text{fork})$$

We do that by showing that for the choice of the parameter values,  $\alpha, \beta, \mathcal{X}_0, \dots, \mathcal{X}_3$ , the slope is negative, and then the value of the term at  $k$  equals zero is negative. For the slope to be negative, we require:

$$-\alpha \mathcal{X}_{r-1} + \beta \mathbf{Size}(\text{fork}) \leq 0 \Rightarrow \mathbf{Size}(\text{fork}) \leq \frac{\alpha}{\beta} \mathcal{X}_{r-1}$$

For negativity at the origin,  $k = 0$ , we require for  $r < 3$ :

$$\begin{aligned}
& (\mathcal{X}_r - \mathcal{X}_{r-1})\alpha + d + 1 \leq 0 \\
& \Rightarrow \mathcal{X}_r \leq \mathcal{X}_{r-1} - \frac{d + 1}{\alpha}
\end{aligned}$$

And for  $r = 3$ :

$$\begin{aligned}
& (\mathcal{X}_3 - \mathcal{X}_2)\alpha + d + 1 - \beta \xi \leq 0 \\
& \Rightarrow \mathcal{X}_3 \leq \mathcal{X}_0 - 3 \frac{d + 1}{\alpha} + \frac{\beta}{\alpha} \xi
\end{aligned}$$

So in total:

$$\begin{aligned}
\mathcal{X}_1 & \leq \mathcal{X}_0 - \frac{d + 1}{\alpha} \\
\mathcal{X}_2 & \leq \mathcal{X}_0 - 2 \frac{d + 1}{\alpha} \\
\mathcal{X}_3 & \leq \mathcal{X}_0 - 3 \frac{d + 1}{\alpha} + \frac{\beta}{\alpha} \xi \\
\mathcal{X}_0 & \leq \mathcal{X}_0 - 4 \frac{d + 1}{\alpha} + \frac{\beta}{\alpha} \xi \\
\mathbf{Size}(\text{fork}) & \leq \frac{\alpha}{\beta} \mathcal{X}_r
\end{aligned}$$

The first three inequalities hold by the definitions of the  $\mathcal{X}_r$ , the fourth is satisfied since  $\frac{\beta}{\alpha} \xi = 4 \frac{d + 1}{\alpha}$ , the last is obtained due to Claim 3.71, that states that the maximal size of a fork equals  $4d$ , and that  $\frac{\alpha}{\beta} \mathcal{X}_r$  is greater than  $4d$ .

Finally, by Claim 3.70, the graphs induced by  $\mathbf{A}_i \cup \mathbf{F}_i$  are connected, thus the graph induced by  $\mathbf{A} \cup \mathbf{F}$  is also connected. Therefore,  $\mathbf{W}, \mathbf{A}, \mathbf{F}$  form an explanation of  $K$ .

It's left to prove for spanned slices in the analysis Toom's contours. Notice, that  $h$  has to be greater than zero, We prove the inequality by repeating on the induction bases, where all the spanned slices that are back in the history of  $K$  are spanned slices in the standard Toom's contour. So the only different is in the bounding of  $\mathbf{A}$ 's size. We use Claim 3.74 and get:

$$\begin{aligned} |\mathbf{A}| &\leq \alpha(m+1) - \beta s \\ &\quad + (-\alpha(1 + \mathcal{X}_{r-1}) + d + 1 - \mathcal{X}_{r-1}k\alpha + d + d' + 1 + \beta k \cdot \mathbf{Size}(\text{fork})) \\ &\leq \alpha(m+1) - \beta s \\ &\quad + (-\alpha + d + 1 - \mathcal{X}_{r-1}k\alpha + d + d' + 1 + \beta k \cdot \mathbf{Size}(\text{fork})) \end{aligned}$$

Where we used the fact that  $\mathcal{X}_{r-1} \in (0, 1)$  for  $r \in \{0, 1, 2, 3\}$ . Clearly, the bound is satisfied since  $\alpha \geq 2d + d' + 1$  and  $\mathcal{X}_{r-1}\alpha \geq \beta \cdot \mathbf{Size}(\text{fork})$ .  $\square$

**Corollary 3.77.** *Let  $\hat{K}$  be a spanned slice with size  $s$ , and explanation with  $|A|$  arrows, and  $|F|$  forks. Then it is induced by at least the following number of faults:*

$$\frac{1}{2^{d'}} \frac{1}{2} (|F| + 1 + \alpha^{-1}(|A| - 1) + \beta s)$$

Furthermore, the ratio of leaves to edges in an explanation is greater than  $\frac{1}{2\alpha} = \frac{1}{80(d+1)^2}$ .

*Proof.* We bound the Claim 3.76 by the number of leaves in the explanation, and use the fact that any  $d'$ -face has  $2^{d'}$  vertices, so each fault contributes at most  $2^{d'}$  leaves to the explanation.  $\square$

[COMMENT] Check what happened if we set  $\xi = \sqrt{d}, \beta = \sqrt{d}$  is that better?

### 3.10 Counting Subtrees.

**Claim 3.78.** *Let  $G = (V, E)$  be a  $\Delta + 1$ -regular graph, and let  $k$  be an integer less than  $|E|$ . Fix a vertex  $r \in V$ . The number of subgraphs rooted at  $r$  with less than  $k$  edges is at most  $\alpha^k$ .*

*Proof.* Denote by  $T_\Delta$  and  $T_2$  the infinity  $\Delta$  and binary tress. There is an injection between the subtrees of  $G$ , rooted at  $v$ , with at most  $k$  edges, to the subtrees of  $T_\Delta$  rooted at  $v$ , with at most  $k$  edges. Moreover, there is an injection from the subtrees of  $T_\Delta$  rooted at  $v$ , with at most  $k$  edges to the subtrees of  $T_2$ , rooted at  $v$ , with at most  $k \log \Delta$  edges.

[COMMENT] In the second map, we think on replacing each of the vertex with  $\Delta - 1$ -leaves binary tree, each leaf is associated with a outgoing edge. .

Thus, it's enough to bound the number of subtrees in  $T_2$  rooted at  $v$ , with at most  $k \log \Delta$  edges, that number is less than the number of binary trees with  $k \log \Delta + 1$  leaves. For exact leaves number we get the  $k \log \Delta$  Catalan number, which its limit is:

$$\sim \frac{4^{k \log \Delta}}{(k \log \Delta)^{\frac{3}{2}} \sqrt{\pi}} \leq \frac{\Delta^{2k}}{(k \log \Delta)^{\frac{3}{2}} \sqrt{\pi}}$$

Therefore we can bound by:

$$\sum_{j=1}^k \frac{\Delta^{2j}}{(j \log \Delta)^{\frac{3}{2}} \sqrt{\pi}} \leq \frac{\Delta^{2k}}{\sqrt{\pi} \log^{\frac{3}{2}} \Delta} \sum_{j=1}^k \frac{1}{j^{\frac{3}{2}}} \leq \zeta\left(\frac{3}{2}\right) \cdot \frac{\Delta^{2k}}{\sqrt{\pi} \log^{\frac{3}{2}} \Delta}$$

□

### 3.11 Tree Separator Lemma

For a tree  $T = (V, E)$  and a vertex  $v \in V$ , we call the subtree obtained by taking the descendants of  $v$  the subtree rooted at  $v$ .

**Claim 3.79.** *Let  $T = (V, E)$  be a tree with  $m > 3$  leaves and  $\tau$  edges, then it has a subtree with  $m' \in (\frac{1}{3}m, \frac{2}{3}m)$  leaves and at most  $\frac{m'}{m}\tau$  edges.*

*Proof.* Order the vertices according to their heights. Denote by  $v \in V$  the lowest vertex for which the subtree rooted at  $v$  has at least  $\frac{1}{3}m$  leaves. Now, denote by  $T_1$  the subtree obtained through the following iterative process over  $v$ 's children:

1. Initialize  $T_1$  as the subtree rooted at  $v$ .
2. For a child  $u$  of  $v$ :
  - (a) Check if erasing from  $T_1$  the subtree rooted at  $u$  doesn't decrease the number of leaves below  $\frac{1}{3}m$ . If so, then we update  $T_1$  to be the result of the erasure.

Clearly, the algorithm is defined such that  $T_1$  has to have at least  $\frac{m}{3}$  leaves. Furthermore, since any child of  $v$  is a root of a subtree with fewer than  $\frac{m}{3}$  leaves (otherwise we get a contradiction to the minimality of  $v$ 's height), we have that if  $T_1$  would have more than  $\frac{2}{3}m$  leaves, then the subtraction of any of its children would yield a tree with at least  $\frac{2}{3}m - \frac{1}{3}m = \frac{1}{3}m$  leaves. Namely,  $v$  has in  $T_1$  a child  $u$  such that the subtraction of the subtree rooted at  $u$  from  $T_1$  results in a subtree with more than  $\frac{1}{3}m$  leaves. But if indeed there were such a child, then the algorithm would erase it, so there is not.

Now let  $T_2 = T/T_1 \cup v$ , namely the tree induced by the subtraction of  $T_1$ 's edges from  $T$ . Observe that since the summation of leaves in  $T_1$  and  $T_2$  is the leaves in  $T$ , and  $T_1$  has no more than  $\frac{2}{3}m$  leaves, and no less than  $\frac{1}{3}m$  leaves, it holds that the number of leaves in  $T_2$  is also in the range  $(\frac{1}{3}m, \frac{2}{3}m)$ . We claim that at least one of the subtrees has fewer than  $\frac{m'}{m}\tau$  edges.

To see this, denote by  $m_1, m_2$  and by  $\tau_1, \tau_2$  the leaves and the edges in  $T_1, T_2$  respectively. Now:

$$\frac{\tau}{m} = \frac{\tau_1 + \tau_2}{m_1 + m_2} = \frac{m_1}{m_1 + m_2} \frac{\tau_1}{m_1} + \frac{m_2}{m_1 + m_2} \frac{\tau_2}{m_2}$$

Namely,  $\frac{\tau}{m}$  is a weighted average of  $\frac{\tau_1}{m_1}$  and  $\frac{\tau_2}{m_2}$ , and therefore it is greater than their minimum. Peak the subtree with the minimal quotient.  $\square$

By repeating recursively on the above construction, we get the following corollary:

**Corollary 3.80.** *Let  $T = (V, E)$  be a tree with  $m$  leaves and  $\tau$  edges. Then, for any  $\alpha > 0$ , it has a subtree with  $m' \in (\frac{1}{3}\alpha m, \frac{2}{3}\alpha m)$  leaves and at most  $\frac{m'}{m}\tau$  edges.*

**Claim 3.81.** *Let  $\gamma, \beta \in \mathbb{R}_{>0}$  and  $n$  be a positive integer. For any tree  $T$  with  $\tau \geq \beta n$  edges and  $m$  leaves such that  $\tau \leq \gamma m$ , there is a subtree  $T'$  of  $T$  with a number of edges  $\tau'$  less than  $\frac{\beta}{2}n$  and a number of leaves greater than  $\frac{\beta}{4\gamma}n$ .*

*Proof.* Since the construction of claim 3.79 preserves the ratio of edges to leaves, we have that for a  $T'$  obtained using the construction, the number of edges satisfies  $\tau' \leq \gamma m'$ . So, it's enough to look for the maximal  $\alpha$  such that:

$$\gamma m' \leq \gamma \frac{2}{3}\alpha m \leq \frac{\beta}{2}n \Rightarrow \alpha = \frac{3\beta}{4\gamma} \frac{n}{m}$$

Which gives  $m' \geq \frac{1}{3}\alpha m = \frac{\beta}{4\gamma}n$ .  $\square$

### 3.12 Proof of the Theorem

**Definition 3.82** (Simulation and Logical Errors). *For a quantum code  $\mathcal{C}$  of length  $n$  and a decoder for  $\mathcal{C}$ , denoted by  $D$ , we say that a Pauli operator  $P \in \mathcal{P}^{\otimes n}$  is a logical error with respect to  $D$  if  $DP$  does not equal the logical identity.*

*For quantum circuits  $C$  and  $\tilde{C}$ , a noise channel  $\mathcal{E}$ , and  $p \in (0, 1)$ , we say that  $\tilde{C}$  simulates  $C$  with probability  $1 - p$  if*

1. *If there is a mapping between the qubits of  $C$  and the registers of  $\tilde{C}$ , along with a decoding procedure such that, at the end of running  $\tilde{C}$ , decoding the registers results in the same quantum states as those produced by running  $C$ .*
2. *The probability induced by  $\mathcal{E}$  that the deviation on one of the registers has a logical error is less than  $p$ .*

**Lemma 3.83.** *For any  $d, d'$ , and a constant  $p_0 \in (0, 1)$  that depends only on  $d$ . Consider a quantum circuit  $C$  with depth  $\mu$  and width  $w$ , and let  $\mathcal{N}_{\mathcal{E}}$  be a local stochastic noise channel with a noise rate  $p < p_0$ . There is a Toric encoded circuit  $\tilde{C}$  such that each of its quantum registers is encoded by an  $n$ -length,  $(d, d')$ -Toric code. It simulates  $C$  with probability:*

*Proof.* We construct  $\tilde{C}$  as follows: for each input wire of  $C$ , we initialize the logical zero  $|0\rangle$  of the  $(d, d')$ -Toric code. For each of the gates  $\mathbf{H}$  and  $\mathbf{S}$ , we initialize the encoded  $|\mathbf{H}\rangle$  and  $|\mathbf{S}\rangle$  states, and for each  $\mathbf{T}$ , we initialize copies of both  $|\mathbf{T}\rangle$  and  $|\mathbf{S}\rangle$  states. The even layers of  $\tilde{C}$  are sweep cycles, while on the odd layers, we set the realization of the logical gates. For  $\mathbf{CX}$ , we set the transversal realization, and for  $\mathbf{H}$ ,  $\mathbf{S}$ , and  $\mathbf{T}$ , we use gate teleportation. Thus the width of  $\tilde{C}$  expands to  $wn + 2\mu n$ . For gate teleportation, we use the decoder in ??, which runs at most at a depth of  $n$ . Thus, the depth of  $\tilde{C}$  expands to  $2(3\mu n)$ .

The decoder successfully decodes any error that does not contain a deviation cluster larger than  $\gamma n^{\frac{1}{d}}$ . Thus, it remains to prove that with probability  $1 - p$ , no deviation cluster exceeds that size. To prove this, we use Claim 3.17, which states that the probability of there being a time  $t$  with an error cluster larger than  $\gamma n^{\frac{1}{d}}$  is bounded by the number of locations multiplied by the probability that step  $\tau$  is the first to admit a deviation cluster of size  $\gamma' n^{\frac{1}{d}}$ , maximized over  $\tau$ . This leads us to prove the following claim:

**Claim 3.84.** *There exist constants  $c_3, c_4, c_5, c_6, \alpha \in \mathbb{R}^+$ , such that for any integer  $s$  and for any step  $\tau$  in the standard order of  $\tilde{C}[\mathcal{E}]$ , the probability that  $\tau$  is the first step where there is a deviation cluster of size greater than  $s$  is less than:*

$$c_3(w + 2\mu)\mu n^2 (\alpha p^{c_4})^s + c_5((w + 2\mu)\mu n^2)^2 (\alpha p^{c_6})^{\frac{1}{2d}n^{\frac{1}{d}}}$$

*Proof.* Denote by  $B_\tau$  the event where  $\tau$  is the first step to have a deviation cluster of size greater than  $\frac{1}{2}n^{\frac{d'}{d}}$ , and by  $A_\tau$  the event where all explanations of deviation clusters up to and including step  $\tau$  have fewer than  $\frac{1}{d}n^{\frac{1}{d}}$  edges. Thus:

$$\Pr_{\sim \mathcal{N}_\mathcal{E}}[B_\tau] \leq \Pr_{\sim \mathcal{N}_\mathcal{E}}[B_\tau | A_\tau] + \Pr_{\sim \mathcal{N}_\mathcal{E}}[\bar{A}_\tau]$$

We begin by bounding the contribution of the right term. According to Corollary 3.77, there exists a constant  $c_1$ , depending only on  $d$ , such that the ratio of leaves to edges in the explanation is at least  $c_1$ . By Claim 3.81, it follows that any such explanation has more than  $\frac{1}{d}n^{\frac{1}{d}}$  edges containing a subtree with fewer than  $\frac{1}{2d}n^{\frac{1}{d}}$  edges, with a leaves-to-edges ratio greater than  $\frac{1}{2}c_1$ . Using the union bound, we bound the probability that there is a vertex in the base graph that is a root of such a subtree.

$$\Pr_{\sim \mathcal{N}_\mathcal{E}}[\bar{A}_\tau] \leq \bigcup_{v \in V_0, \tau' \leq \tau} \Pr_{\sim \mathcal{N}_\mathcal{E}}[v \text{ is a root of subtree in } \mathcal{H}_{\tau'} \text{ with less than } \frac{1}{2d}n^{\frac{1}{d}} \text{ edges and more than } \frac{1}{2}c_1 \frac{1}{2d}n^{\frac{1}{d}} \text{ leaves}]$$

Now, since any two connected vertices are at a space distance of at most

$$\max\{\mathbf{Size}(\text{arrow}), \mathbf{Size}(\text{fork})\} \leq d' \leq d$$

It follows that all the vertices in the subtree are at a space distance of at most  $n^{\frac{1}{d}}$  from each other. Thus, no two of them have the same space coordinate modulo  $n$ . In

particular, projecting the infinite plane back to the finite Toric sends each of the leaves of the subtree to a unique target, and therefore the number of faults that induce the explanation is at least:

$$\frac{1}{2^{d'}} \frac{1}{4d} c_1 n^{\frac{1}{d}}$$

Plugging into the union bounds yields

$$\Pr_{\sim \mathcal{N}_{\mathcal{E}}}[\bar{A}_{\tau}] \leq \tau \cdot 3(w + 2\mu)6\mu n^2 \alpha^{\frac{1}{2d}n^{\frac{1}{d}}} p^{\frac{1}{2d'}\frac{1}{4d}c_1 n^{\frac{1}{d}}} \leq ((w + 2\mu)6\mu n^2)^2 \left( \alpha p^{\frac{1}{2d'+1}c_1} \right)^{\frac{1}{2d}n^{\frac{1}{d}}}$$

It remains to bound the term. By Claim 3.76, there is a constant  $c_2$  depending only on  $d$ , such that any explanation of a slice of size  $s$  has at least  $c_2 s$  edges. Therefore, it suffices to bound the probability that the 'analysis Toom's contour',  $\mathcal{H}_{\tau}$  admits an explanation with more than  $c_2 s$  edges. Since the event is conditioned on the event  $A_{\tau}$ , no explanation has more than  $\frac{1}{d}n^{\frac{1}{d}}$  edges. Thus, the same argument as above shows that the projection of each explanation tree into the finite toric sends its leaves to unique targets. Hence, we obtain:

$$\begin{aligned} \Pr_{\sim \mathcal{N}_{\mathcal{E}}}[B_{\tau}|A_{\tau}] &\leq \bigcup_{v \in V_o, x \geq c_2 s} \Pr_{\sim \mathcal{N}_{\mathcal{E}}}[v \text{ is a root of explanation with number of edges } x|A_{\tau}] \\ &\leq \sum_{x=c_2 s}^{\infty} (w + 2\mu)6\mu n^2 \left( \alpha p^{\frac{1}{2d'}c_2} \right)^x = (w + 2\mu)6\mu n^2 \frac{\left( \alpha p^{\frac{1}{2d'}c_2} \right)^s}{1 - \left( \alpha p^{\frac{1}{2d'}c_2} \right)} \end{aligned}$$

Combing the bounds we have:

$$\Pr_{\sim \mathcal{N}_{\mathcal{E}}}[B_{\tau}] \leq (w + 2\mu)6\mu n^2 \frac{\left( \alpha p^{\frac{1}{2d'}c_2} \right)^{c_2 s}}{1 - \left( \alpha p^{\frac{1}{2d'}c_2} \right)} + ((w + 2\mu)6\mu n^2)^2 \left( \alpha p^{\frac{1}{2d'+1}c_1} \right)^{\frac{1}{2d}n^{\frac{1}{d}}}$$

□

Now, combined with Claim 3.17, with a probability greater than:

$$1 - \Theta \left( ((w + 2\mu)\mu n^2)^3 \right) (\alpha p^{c_7})^{\gamma' n^{\frac{1}{d}}}$$

No error cluster has a size greater than  $\gamma n^{\frac{1}{d}}$ , so the decoder successfully restores the logical state; in other words, no logical error occurs. □

**Theorem 3.85.** *There exists a constant  $p_0 \in (0, 1)$  such that for any local stochastic noise channel  $\mathcal{E}$  with rate  $p < p_0$ , and a quantum circuit  $C$  with depth  $\mu$  and width  $w$ , there exists a toric encoded circuit  $\tilde{C}$ , with depth  $\mu n$  and width  $wn + 2\mu n$  that simulates  $C$  with probability:*

## References

- [Neu56] J. von Neumann. “Probabilistic Logics and the Synthesis of Reliable Organisms From Unreliable Components”. In: *Automata Studies*. Ed. by C. E. Shannon and J. McCarthy. Princeton: Princeton University Press, 1956, pp. 43–98. ISBN: 9781400882618. DOI: [doi:10.1515/9781400882618-003](https://doi.org/10.1515/9781400882618-003). URL: <https://doi.org/10.1515/9781400882618-003>.
- [Lev80] G. Lev. “Size Bounds and Parallel Algorithms for Networks”. PhD thesis. University of Edinburgh, 1980. URL: <https://era.ed.ac.uk/handle/1842/17015>.
- [SV82] Yossi Shiloach and Uzi Vishkin. “An  $O(\log n)$  parallel connectivity algorithm”. In: *Journal of Algorithms* 3.1 (1982), pp. 57–67. ISSN: 0196-6774. DOI: [https://doi.org/10.1016/0196-6774\(82\)90008-6](https://doi.org/10.1016/0196-6774(82)90008-6). URL: <https://www.sciencedirect.com/science/article/pii/0196677482900086>.
- [AS87] Awerbuch and Shiloach. “New Connectivity and MSF Algorithms for Shuffle-Exchange Network and PRAM”. In: *IEEE Transactions on Computers* C-36.10 (1987), pp. 1258–1263. DOI: [10.1109/TC.1987.1676869](https://doi.org/10.1109/TC.1987.1676869).
- [BS88] Piotr Berman and János Simon. “Investigations of fault-tolerant networks of computers”. In: *Proceedings of the Twentieth Annual ACM Symposium on Theory of Computing*. STOC ’88. Chicago, Illinois, USA: Association for Computing Machinery, 1988, pp. 66–77. ISBN: 0897912640. DOI: [10.1145/62212.62219](https://doi.org/10.1145/62212.62219). URL: <https://doi.org/10.1145/62212.62219>.
- [CS96] A. R. Calderbank and Peter W. Shor. “Good quantum error-correcting codes exist”. In: *Physical Review A* 54.2 (Aug. 1996), pp. 1098–1105. DOI: [10.1103/physreva.54.1098](https://doi.org/10.1103/physreva.54.1098). URL: <https://doi.org/10.1103/PhysRevA.54.1098>.
- [Ste96] Andrew Steane. In: *Proceedings of the Royal Society of London. Series A: Mathematical, Physical and Engineering Sciences* 452.1954 (Nov. 1996), pp. 2551–2577. ISSN: 1471-2946. DOI: [10.1098/rspa.1996.0136](https://doi.org/10.1098/rspa.1996.0136). URL: <http://dx.doi.org/10.1098/rspa.1996.0136>.
- [Kit97] A Yu Kitaev. “Quantum computations: algorithms and error correction”. In: *Russian Mathematical Surveys* 52 (1997), pp. 1191–1249. URL: <https://api.semanticscholar.org/CorpusID:250816585>.
- [AB99] Dorit Aharonov and Michael Ben-Or. *Fault-Tolerant Quantum Computation With Constant Error Rate*. 1999. arXiv: [quant-ph/9906129](https://arxiv.org/abs/quant-ph/9906129) [[quant-ph](https://arxiv.org/abs/quant-ph/9906129)].
- [ZLC00] Xinlan Zhou, Debbie W. Leung, and Isaac L. Chuang. “Methodology for quantum logic gate construction”. In: *Physical Review A* 62.5 (Oct. 2000). ISSN: 1094-1622. DOI: [10.1103/physreva.62.052316](https://doi.org/10.1103/physreva.62.052316). URL: <http://dx.doi.org/10.1103/PhysRevA.62.052316>.

- [Den+02] Eric Dennis et al. “Topological quantum memory”. In: *Journal of Mathematical Physics* 43.9 (Sept. 2002), pp. 4452–4505. DOI: [10.1063/1.1499754](https://doi.org/10.1063/1.1499754). URL: <https://doi.org/10.1063/1.1499754>.
- [Ali+08] R. Alicki et al. *On thermal stability of topological qubit in Kitaev’s 4D model*. 2008. arXiv: [0811.0033](https://arxiv.org/abs/0811.0033) [quant-ph]. URL: <https://arxiv.org/abs/0811.0033>.
- [Got14] Daniel Gottesman. *Fault-Tolerant Quantum Computation with Constant Overhead*. 2014. arXiv: [1310.2984](https://arxiv.org/abs/1310.2984) [quant-ph].
- [Bom15] Héctor Bombín. “Gauge color codes: optimal transversal gates and gauge fixing in topological stabilizer codes”. In: *New Journal of Physics* 17.8 (Aug. 2015), p. 083002. DOI: [10.1088/1367-2630/17/8/083002](https://doi.org/10.1088/1367-2630/17/8/083002). URL: <https://doi.org/10.1088/1367-2630/17/8/083002>.
- [FGL18] Omar Fawzi, Antoine Grospellier, and Anthony Leverrier. “Constant Overhead Quantum Fault-Tolerance with Quantum Expander Codes”. In: *2018 IEEE 59th Annual Symposium on Foundations of Computer Science (FOCS)*. IEEE, Oct. 2018, pp. 743–754. DOI: [10.1109/focs.2018.00076](https://doi.org/10.1109/focs.2018.00076). URL: <http://dx.doi.org/10.1109/FOCS.2018.00076>.
- [Gro19] Antoine Grospellier. “Constant time decoding of quantum expander codes and application to fault-tolerant quantum computation”. Theses. Sorbonne Université, Nov. 2019. URL: <https://theses.hal.science/tel-03364419>.
- [KP19] Aleksander Kubica and John Preskill. “Cellular-Automaton Decoders with Provable Thresholds for Topological Codes”. In: *Physical Review Letters* 123.2 (July 2019). ISSN: 1079-7114. DOI: [10.1103/physrevlett.123.020501](https://doi.org/10.1103/physrevlett.123.020501). URL: <http://dx.doi.org/10.1103/PhysRevLett.123.020501>.
- [Gac21] Peter Gacs. *A new version of Toom’s proof*. 2021. arXiv: [2105.05968](https://arxiv.org/abs/2105.05968) [cs.FL]. URL: <https://arxiv.org/abs/2105.05968>.
- [BB24] Nikolas P. Breuckmann and Simon Burton. “Fold-Transversal Clifford Gates for Quantum Codes”. In: *Quantum* 8 (2024), p. 1372. ISSN: 2521-327X. DOI: [10.22331/q-2024-06-13-1372](https://doi.org/10.22331/q-2024-06-13-1372). URL: <http://dx.doi.org/10.22331/q-2024-06-13-1372>.
- [GV24] Alexandre Guernut and Christophe Vuillot. *Fault-Tolerant Constant-Depth Clifford Gates on Toric Codes*. 2024. arXiv: [2411.18287](https://arxiv.org/abs/2411.18287) [quant-ph]. URL: <https://arxiv.org/abs/2411.18287>.
- [NP25] Quynh T. Nguyen and Christopher A. Pattison. *Quantum fault tolerance with constant-space and logarithmic-time overheads*. 2025. arXiv: [2411.03632](https://arxiv.org/abs/2411.03632) [quant-ph]. URL: <https://arxiv.org/abs/2411.03632>.
- [BDL26] Shankar Balasubramanian, Margarita Davydova, and Ethan Lake. “A local automaton for the 2D toric code”. In: *Quantum* 10 (2026), p. 2125. ISSN: 2521-327X. DOI: [10.22331/q-2026-06-02-2125](https://doi.org/10.22331/q-2026-06-02-2125). URL: <http://dx.doi.org/10.22331/q-2026-06-02-2125>.

- [DST26] Gesa Dünnweber, Georgios Styliaris, and Rahul Trivedi. *Quantum Memory and Autonomous Computation in Two Dimensions*. 2026. arXiv: [2601.20818](https://arxiv.org/abs/2601.20818) [quant-ph]. URL: <https://arxiv.org/abs/2601.20818>.
- [SST26] Jan M. Swart, Réka Szabó, and Cristina Toninelli. *Peierls bounds from Toom contours*. 2026. arXiv: [2202.10999](https://arxiv.org/abs/2202.10999) [math.PR]. URL: <https://arxiv.org/abs/2202.10999>.

## 4 Appendix

Below, a semi proof that in CSS code partial correction  $Z^e \rightarrow Z^{\hat{e}}$  doesn't add bit flip errors. It might adds a global phase. I should enter it in a section about CSS coding.

$$\begin{aligned}
& X^f Z^e |w + C_z^\perp\rangle \\
&= X^f Z^e X^w |C_z^\perp\rangle \\
\text{apply } H^{\otimes n} &\mapsto Z^f X^e Z^w |C_z\rangle \\
&= (-1)^{e \cdot w} Z^f Z^w X^e |C_z\rangle \\
\text{partial correction } X^{e+\hat{e}} &\mapsto (-1)^{(e+\hat{e})(f+w)} (-1)^{e \cdot w} Z^f Z^w X^{\hat{e}} |C_z\rangle \\
\text{apply } H^{\otimes n} &\mapsto (-1)^{(e+\hat{e})(f+w)} (-1)^{e \cdot w} X^f X^w Z^{\hat{e}} |C_z^\perp\rangle \\
&= (-1)^{(e+\hat{e})(f+w)} (-1)^{e \cdot w} (-1)^{\hat{e} \cdot w} X^f Z^{\hat{e}} X^w |C_z^\perp\rangle \\
&= (-1)^{(e+\hat{e})f} X^f Z^{\hat{e}} |w + C_z^\perp\rangle
\end{aligned}$$

### 4.1 Base case for Claim 3.51

*Proof.* The parity check matrices are:

[illegible]

Where we mark in blue, brown, and red the first, second, and third types of checks.

$$G_{\mathcal{C}_v} = \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 1 & 1 & 0 \\ 0 & 0 & 1 \\ 1 & 0 & 1 \\ 0 & 1 & 1 \end{bmatrix} \quad G_{\text{Stab}_v} = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 1 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 1 & 0 & 1 & 0 \\ 0 & 1 & 1 & 0 \\ 0 & 0 & 0 & 1 \\ 1 & 0 & 0 & 1 \\ 0 & 1 & 0 & 1 \\ 0 & 0 & 0 & 1 \\ 1 & 0 & 0 & 1 \\ 0 & 0 & 1 & 1 \\ 0 & 0 & 0 & 1 \\ 0 & 1 & 0 & 1 \\ 0 & 0 & 1 & 1 \\ 1 & 0 & 0 & 1 \\ 0 & 1 & 0 & 1 \\ 0 & 0 & 1 & 1 \end{bmatrix}$$

□

## 4.2 Layer Propagation and Time Coarse-Graining

We now switch from propagation along a fixed running to propagation at the level of entire time slices. This second notion is intentionally stronger and less local. In the previous subsection, the purpose was to say: given a fault that already occurred, what is its effect at a later step of the same computation? Here the purpose is different: we want to reorganize the circuit itself, by commuting fault layers forward and grouping them into coarser effective layers. This is the mechanism behind the later renormalization claim for local stochastic noise.

In particular, local propagation keeps the ambient circuit fixed and changes the *description of the error*. Layer propagation, by contrast, changes the *presentation of the circuit* while preserving the implemented channel. This is why the two notions should not be merged into one definition: one is adapted to tracking deviations, while the other is adapted to comparing circuits related by time-unfolding.

**Definition 4.1** (Layer propagation). *Let  $C = \{u_i\}_{i=1}$  be a quantum circuit. For each time coordinate  $t$ , write  $U_t := C|_t$ . The family of non-empty  $t$ -cuts  $\{U_t\}_t$  is called the layer decomposition of  $C$ .*

*Let  $t < t'$  be such that  $U_t$  and  $U_{t'}$  are non-empty and  $U_s = \emptyset$  for every  $t < s < t'$ . The forward propagation of the layer  $U_t$  across the next layer  $U_{t'}$  is the operation that replaces the pair  $(U_t, U_{t'})$  by a pair  $(U_{t'}, V_{t \rightarrow t'})$  satisfying*

$$\prod_{u \in U_t} u \prod_{v \in U_{t'}} v = \prod_{v \in U_{t'}} v \prod_{w \in V_{t \rightarrow t'}} w.$$

The layer  $V_{t \rightarrow t'}$  is called the propagation expression of  $U_t$  across  $U_{t'}$ .

More generally, if  $t < t'$ , the forward propagation of  $U_t$  to time  $t'$  is obtained by iterating the above operation through the successive non-empty cuts between times  $t$  and  $t'$ . The resulting propagated layer is denoted by  $V_{t \rightarrow t'}$  and is again called the propagation expression of  $U_t$  to time  $t'$ . The resulting circuit has layer decomposition

$$\dots, U_{t-1}, U_t, U_{t+1}, \dots, U_{t'}, U_{t'+1}, \dots \mapsto \dots, U_{t-1}, U_{t+1}, \dots, U_{t'}, V_{t \rightarrow t'}, U_{t'+1}, \dots$$

After propagation we update the time coordinates so that they agree with the new layer in which each gate is applied.

**Claim 4.2.** Assume that every gate in  $C$  acts on at most  $\Delta$  qubits. Then every circuit obtained from  $C$  by forward layer propagation also consists of gates acting on at most  $\Delta$  qubits.

*Proof.* Propagating a gate  $u \in U_i$  across a layer  $U_{i+1}$  conjugates  $u$  by the product of the gates in  $U_{i+1}$  that intersect its support. Since the gates inside  $U_{i+1}$  are pairwise disjoint, each qubit in the support of  $u$  participates in at most one gate from  $U_{i+1}$ . Therefore the support of the propagated image of  $u$  is contained in the union of the supports of at most  $\Delta$  gates, each of arity at most  $\Delta$ , but only one such gate can be associated with each qubit of  $u$ . Consequently the propagated image still acts on at most  $\Delta$  wires. Applying this argument repeatedly proves the claim.  $\square$

**Definition 4.3** ( $C \sim_P C'$ ). For quantum circuits  $C$  and  $C'$ , we write  $C \sim_P C'$  if one can be obtained from the other by a finite sequence of layer propagations.

By construction,  $\sim_P$  preserves the implemented channel. Indeed, if  $C \sim_P C'$  and  $\rho$  is any mixed state on the input register, then

$$C \circ \rho = C' \circ \rho.$$

**Definition 4.4** (Witness family in the backward light cone). Let  $W$  be a propagation expression obtained from a block of  $c$  layers of a noisy circuit after propagating all even fault layers to the end of the block. For a subset  $S \subset \text{Loc}(W)$ , we define the witness family of  $S$ , denoted by  $\mathcal{W}(S)$ , to be the collection of all minimal sets

$$S' \subset \Lambda(S)$$

such that there exists a fault pattern containing  $S'$  whose propagation produces all the faults at the locations in  $S$ . Here minimality is with respect to inclusion.

**Claim 4.5.** Let  $c \geq 2$  be even, let  $C$  be a depth- $c/2$  circuit whose gates have arity at most  $\Delta$ , and let  $C[\mathcal{E}]$  be the circuit obtained by inserting the faults of  $\mathcal{E}$  between the computational layers. Write the layer decomposition of  $C[\mathcal{E}]$  as

$$U_0, U_1, \dots, U_c,$$

where the even layers are fault layers and the odd layers are computational layers. Propagate the fault layers  $U_2, U_4, \dots, U_{c-2}$  forward beyond  $U_{c-1}$ , in reverse order, and denote by  $V^{(1)}$  the resulting propagation expression obtained by grouping together those propagated layers with the terminal fault layer  $U_c$ . Then for every  $S \subset \text{Loc}(V^{(1)})$  the witness family  $\mathcal{W}(S)$  is non-empty, and every element  $S' \in \mathcal{W}(S)$  satisfies

$$S' \subset \Lambda(S) \cap \bigcup_{k=0}^{c/2} U_{2k}$$

and

$$|S'| \geq \frac{|S|}{\Delta^c}.$$

Consequently,

$$\{S \subset \text{Loc}(V^{(1)})\} \subset \bigcup_{S' \in \mathcal{W}(S)} \{S' \subset \text{Loc}(\mathcal{E})\}.$$

*Proof.* Suppose that the event  $\{S \subset \text{Loc}(V^{(1)})\}$  occurs. Then there exists at least one set of original fault locations whose propagation produces all the faults in  $S$ . Among all such sets choose one that is minimal with respect to inclusion, and denote it by  $S'$ . By construction,  $S' \in \mathcal{W}(S)$ , so the witness family is non-empty.

Since every element of  $S$  is obtained by propagating some original fault through at most  $c$  layers, and propagation never leaves the backward light cone of the produced qubits, every location in  $S'$  lies in  $\Lambda(S) \cap \bigcup_{k=0}^{c/2} U_{2k}$ .

It remains to bound the size of  $S'$ . A single fault location can influence at most  $\Delta^c$  qubits in the final layer of the block, because at each of the at most  $c$  propagation steps the support can branch to at most  $\Delta$  qubits. Therefore any set of original faults capable of generating all elements of  $S$  must contain at least  $|S|/\Delta^c$  fault locations. In particular, this holds for the minimal producing set  $S'$ , so  $|S'| \geq |S|/\Delta^c$ .

Finally, whenever  $S \subset \text{Loc}(V^{(1)})$  occurs, at least one minimal producing set  $S' \in \mathcal{W}(S)$  is fully contained in the realized fault set  $\text{Loc}(\mathcal{E})$ . This proves the event inclusion.  $\square$

We state Claim 3.8 in the language of layer propagation.

**Claim 4.6.** *Let  $\mathcal{N}_{\mathcal{E}}$  be a local stochastic noise channel with rate  $p$ , and let  $C$  be a quantum circuit whose gates have arity at most  $\Delta$ . Fix an even integer  $c$ . Then there exists a local stochastic noise channel  $\mathcal{N}_{\mathcal{E}_q}$  with rate*

$$q := \left(2^{H(\Delta^{-c})\Delta^c} p\right)^{\Delta^{-c}},$$

such that

$$C[\mathcal{E}]_1 \sim_P C[\mathcal{E}_q]_{c/2}.$$

In particular, up to a constant depending only on  $\Delta$  and  $c$ , the rate  $q$  behaves like  $p^{\Delta^{-c}}$ .

*Proof of Claim 3.8.* Partition the subjected circuit  $C[\mathcal{E}]_1$  into consecutive blocks of  $c$  layers. Inside each block, propagate all internal even fault layers to the end of the block, exactly as in Claim 4.5. Doing this block by block yields a new circuit  $C'$  in which each block of  $c/2$  computational layers is followed by a single coarse-grained fault layer. Therefore  $C' = C[\mathcal{E}']_{c/2}$  for a suitable random fault set  $\mathcal{E}'$ , and by construction

$$C[\mathcal{E}]_1 \sim_P C[\mathcal{E}']_{c/2}.$$

It remains to prove that  $\mathcal{E}'$  is local stochastic. Fix one coarse-grained propagation expression  $V^{(i)}$  and a subset  $S \subset \text{Loc}(V^{(i)})$ . By Claim 4.5, the event  $\{S \subset \text{Loc}(V^{(i)})\}$  implies that at least one witness set  $S' \in \mathcal{W}(S)$  is fully contained in the original fault set  $\text{Loc}(\mathcal{E})$ , and every such witness satisfies  $|S'| \geq |S|/\Delta^c$ . Hence

$$\begin{aligned} \Pr[S \subset \text{Loc}(V^{(i)})] &\leq \Pr\left[\bigcup_{S' \in \mathcal{W}(S)} \{S' \subset \text{Loc}(\mathcal{E})\}\right] \\ &\leq \sum_{S' \in \mathcal{W}(S)} \Pr[S' \subset \text{Loc}(\mathcal{E})]. \end{aligned}$$

The channel  $\mathcal{N}_{\mathcal{E}}$  is local stochastic with rate  $p$ , so each term is at most  $p^{|S'|}$ . Moreover, the backward light cone of each effective fault has size bounded by a constant depending only on  $\Delta$  and  $c$ , so the number of candidate witnesses of size  $\ell$  is at most

$$\binom{\Delta^c |S|}{\ell}.$$

Choosing  $\ell = \lceil |S|/\Delta^c \rceil$  and using the standard entropy bound

$$\binom{\Delta^c |S|}{|S|/\Delta^c} \leq 2^{H(\Delta^{-2c})\Delta^c |S|},$$

we obtain

$$\Pr[S \subset \text{Loc}(V^{(i)})] \leq \left(2^{H(\Delta^{-2c})\Delta^c} p\right)^{|S|/\Delta^c} = q^{|S|}.$$

Since this bound is uniform over all subsets  $S$  and all coarse-grained layers, the induced random set  $\mathcal{E}'$  is local stochastic with rate  $q$ . Setting  $\mathcal{E}_q = \mathcal{E}'$  completes the proof.  $\square$

### 4.3 Checks Commutation

Suppose that:

$$(\partial^+ \theta_{\mathbf{v}, \mathbf{A}})(\partial^- \theta_{\mathbf{u}, \mathbf{B}}) = \left( \sum_{g \in S/A} \theta_{\mathbf{v}, \mathbf{A} \cup \mathbf{g}} + \theta_{\mathbf{g}^{-1} \mathbf{v}, \mathbf{A} \cup \mathbf{g}} \right) \left( \sum_{g \in B} \theta_{\mathbf{u}, \mathbf{B}/\mathbf{g}} + \theta_{\mathbf{g} \mathbf{u}, \mathbf{B}/\mathbf{g}} \right)$$

Split into cases based on whether  $v$  equals  $u$ .

1. If  $v = u$ , then for any  $g, g' \in S$ , it holds that  $gv \neq u$ ,  $g'^{-1}u$ , and  $v \neq g'^{-1}u$ . Thus, only terms of the form

$$\theta_{\mathbf{v}, \mathbf{A} \cup \mathbf{g}} \theta_{\mathbf{u}, \mathbf{B}/\mathbf{g}'}$$

can contribute to the product, yet for any  $g, g'$  for which this term is not zeroing out, it follows that  $g \in B$  and  $g' \notin A$ , and therefore the term

$$\theta_{\mathbf{v}, \mathbf{A} \cup \mathbf{g}'} \theta_{\mathbf{u}, \mathbf{B}/\mathbf{g}}$$

Is not zero as well. Therefore, the number of non-zero terms is even, namely the sum equals zero.

2. If there is  $g$  such that  $gv = u$ , then first notice that for any  $g', g'' \in S/g \cup \{e\}$ , we have  $g'v \neq u$ . So only terms of the form

$$\text{either } \theta_{\mathbf{g}\mathbf{v}, \mathbf{A} \cup \mathbf{g}} \theta_{\mathbf{u}, \mathbf{B}/\mathbf{g}'} \text{ or } \theta_{\mathbf{v}, \mathbf{A} \cup \mathbf{g}'} \theta_{\mathbf{g}^{-1}\mathbf{u}, \mathbf{B}/\mathbf{g}}$$

can contribute. Similarly to the above, if

$$\theta_{\mathbf{g}\mathbf{v}, \mathbf{A} \cup \mathbf{g}} \theta_{\mathbf{u}, \mathbf{B}/\mathbf{g}'} \neq 0$$

then  $g \in B$  and  $g' \notin A$ . So

$$\theta_{\mathbf{v}, \mathbf{A} \cup \mathbf{g}'} \theta_{\mathbf{g}^{-1}\mathbf{u}, \mathbf{B}/\mathbf{g}}$$

is also not zeroing out, and again the number of non-zeros is even.