



Hands-on Lab: Sub-queries and Nested SELECTS in MySQL using phpMyAdmin

Estimated time needed: 20 minutes

In this lab, you will learn how to create tables and load data in the MySQL database service using the phpMyAdmin graphical user interface (GUI) tool.

Software Used in this Lab

In this lab, you will use MySQL MySQL is a Relational Database Management System (RDBMS) designed to efficiently store, manipulate, and retrieve data.



To complete this lab you will utilize MySQL relational database service available as part of IBM Skills Network Labs (SN Labs) Cloud IDE. SN Labs is a virtual lab environment used in this course.

Database Used in this Lab


The database used in this lab is an internal database. You will be working on a sample HR database. This HR database schema consists of 5 tables called EMPLOYEES, JOB_HISTORY, JOBS, DEPARTMENTS and LOCATIONS. Each table has a few rows of sample data. The following diagram shows the tables for the HR database:

SAMPLE HR DATABASE TABLES

EMP_ID	F_NAME	L_NAME	SSN	B_DATE	SEX	ADDRESS	JOB_ID	SALARY	MANAGER_ID	DEP_ID
E1001	John	Thomas	123456	1976-01-09	М	5631 Rice, OakPark,IL	100	100000	30001	2
E1002	Alice	James	123457	1972-07-31	F	980 Berry In, Elgin,IL	200	80000	30002	5
E1003	Steve	Wells	123458	1980-08-10	м	291 Springs, Gary, IL	300	50000	30002	5

JOB_HISTO	DRY			JOBS				
EMPL_ID	START_DATE	JOBS_ID	DEPT_ID	JOB_IDENT	JOB_TITLE	MIN_SALARY	MAX_SALARY	
E1001	2000-01-30	100	2	100	Sr. Architect	60000	100000	
E1002	2010-08-16	200	5	200	Sr.SoftwareDeveloper	60000	80000	
E1003	2016-08-10	300	5	300	Jr.SoftwareDeveloper	40000	60000	

DEPT_ID_DEP	DEP_NAME	MANAGER_ID	LOC_ID	
2	Architect Group	30001	L0001	
5	Software Development	30002	L0002	
7	Design Team	30003	L0003	
5	Software	30004	L0004	



Objectives

After completing this lab you will be able to:

- Write SQL queries that demonstrate the necessity of using sub-queries
- Compose sub-queries in the where clause
- Build Column Expressions (i.e. sub-query in place of a column)
- Write Table Expressions (i.e. sub-query in place of a table)

In this lab, you will run through some SQL practice problems that will provide hands-on experience with nested SQL SELECT statements (also known as Subqueries).

How does a typical Nested SELECT statement syntax look?

```
SELECT column_name [, column_name ]
FROM table1 [, table2 ]
WHERE column_name OPERATOR
(SELECT column_name [, column_name ]
FROM table1 [, table2 ]
WHERE condition);
```

Exercise:

1. Problem:

Execute a failing query (i.e. one which gives an error) to retrieve all employees records whose salary is lower than the average salary.

- ► Hint
- ► Solution
- ▶ Output

2. Problem:

Execute a working query using a sub-select to retrieve all employees records whose salary is lower than the average salary.

▼ Hint

Put AVG(SALARY) of the inner SELECT in comparison with SALARY of the outer SELECT.

▼ Solution

▼ Output



3. Problem:

Execute a failing query (i.e. one which gives an error) to retrieve all employees records with EMPID, SALARY and maximum salary as MAXSALARY in every row.

▼ Hint

Use the MAX aggregate function.

▼ Solution

```
select EMP_ID, SALARY, MAX(SALARY) AS MAX_SALARY
from EMPLOYEES;
```

▼ Output

Hide query box

Error

SQL query: Copy 0

select EMP_ID, SALARY, MAX(SALARY) AS MAX_SALARY from EMPLOYEES LIMIT 0, 25

MySQL said: ()

#1140 - In aggregated query without GROUP BY, expression #1 of SELECT list contains nonaggregated column 'HR.EMPLOY sql_mode=only_full_group_by

4. Problem:

Execute a Column Expression that retrieves all employees records with EMPID, SALARY and maximum salary as MAXSALARY in every row.


▼ Hint

Use the SELECT (which retrieves MAX(SALARY)) as a column of the other SELECT.

▼ Solution

select EMP_ID, SALARY, (select MAX(SALARY) from EMPLOYEES) AS MAX_SALARY from EMPLOYEES;

▼ Output

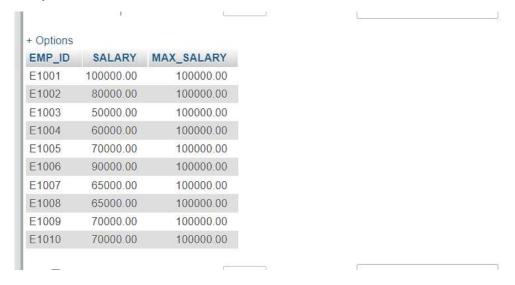

5. Problem:

Execute a Table Expression for the EMPLOYEES table that excludes columns with sensitive employee data (i.e. does not include columns: SSN, B DATE, SEX, ADDRESS, SALARY).


▼ Hint

Use a SELECT (which retrieves non-sensitive employee data) after FROM of the other SELECT.

▼ Solution

 $\verb|select * from (select EMP_ID, F_NAME, L_NAME, DEP_ID from EMPLOYEES)| AS EMP4ALL; \\$

▼ Output

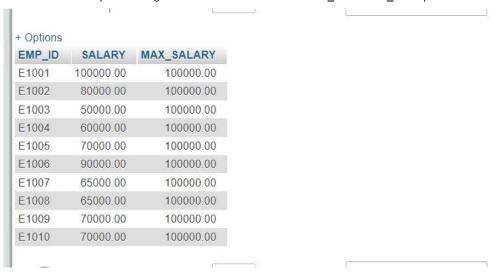

Solution Script

If you would like to run all the solution queries of the SQL problems in this lab with a script, download the script below. Import the script to the mysql phpadmin interface and run it. Follow Hands-on Lab: Create tables using SQL scripts and Load data into tables on how to upload a script to mysql phpadmin.

• SubQueriesSolutionScript.sql

Congratulations! You have completed this lab, and you are ready for the next topic.

Author(s)

Lakshmi Holla

Malika Singla

Changelog

Date	Version	Changed by	Change Description
2021-11-01	0.1	Lakshmi Holla, Malika Singla	Initial Version

© IBM Corporation 2021. All rights reserved.

Previous