


# *Our game project*


- Modules of the project
- Interaction with player
- Physics engine structure
- Unit structure
- Collision matching
- Collision events
- GUI

# Modules of the project

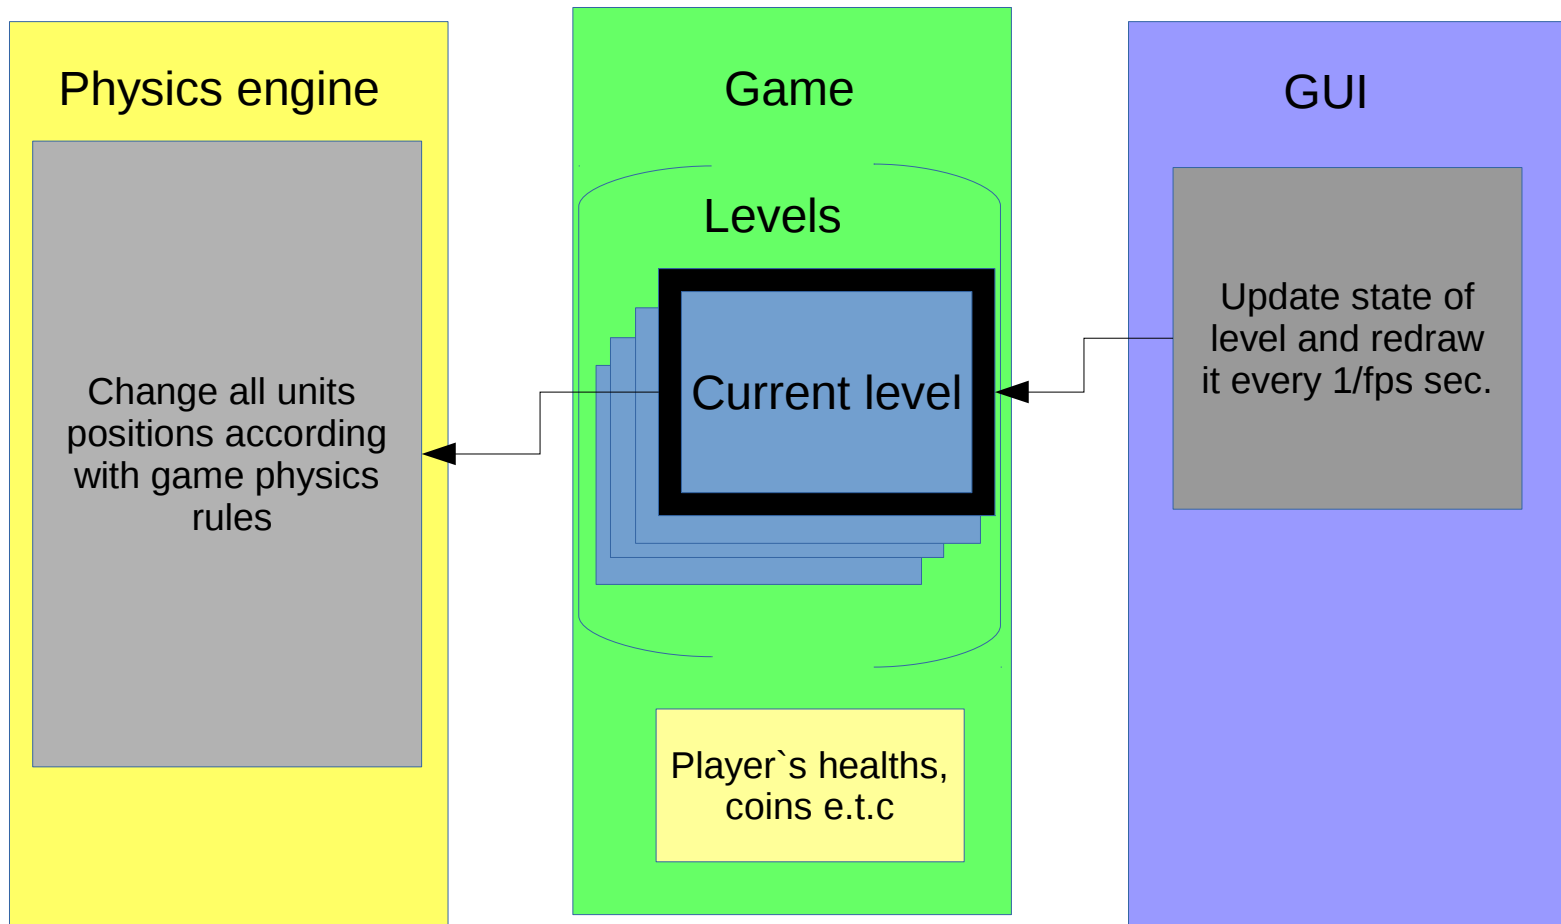

# Modules of the project - GUI

- GUI layer of the project does not know about any details of game. It has only API of game which can give for GUI coordinates of rectangles of all units to drawing and textures associated with every drawn rectangle.
- Also GameAPI has function to update states of units by one frame.
- GUI draws all rectangles in the level, fill it by associated textures and call function to update state of the game. After it GUI repeats this sequence of actions by every  $1/\text{FPS}$  seconds.

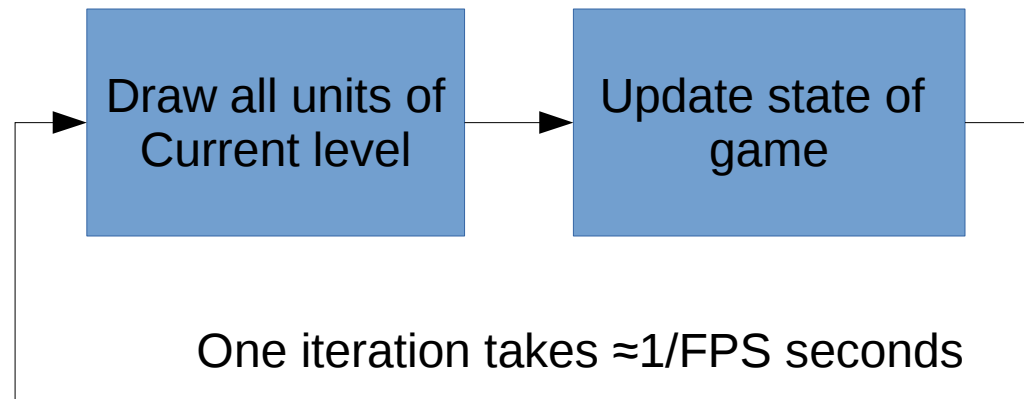


# Modules of the project - Game


- Game layer contains levels, player`s statistics and data like a coins, health, e.t.c.
- Game has API for GUI: in our implementation of this architecture game implements GameAPI class.
- In our implementation of the Game it is class Game and interface GameAPI which is implemented by this class. Also in our implementation Game`s constructor takes reference for shared buffer of keys states (see Interaction with player).

# Modules of the project — Physics engine

- Levels are objects of World class which represents one world's items and functions which describe relations between them.
- World have function for updating states of all it's items according to physics rules which are described by internal world functions.
- World consists of units: every game item is unit in the world.

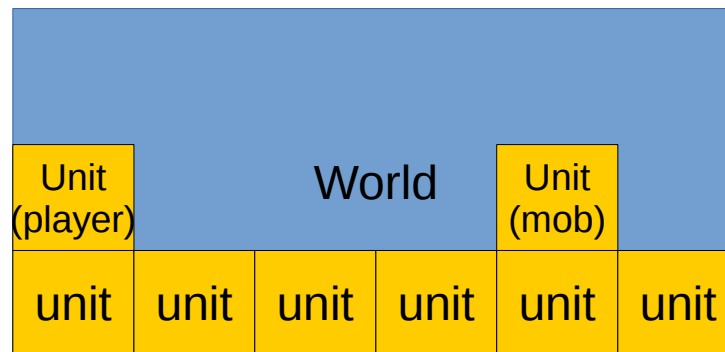


# Interaction with player

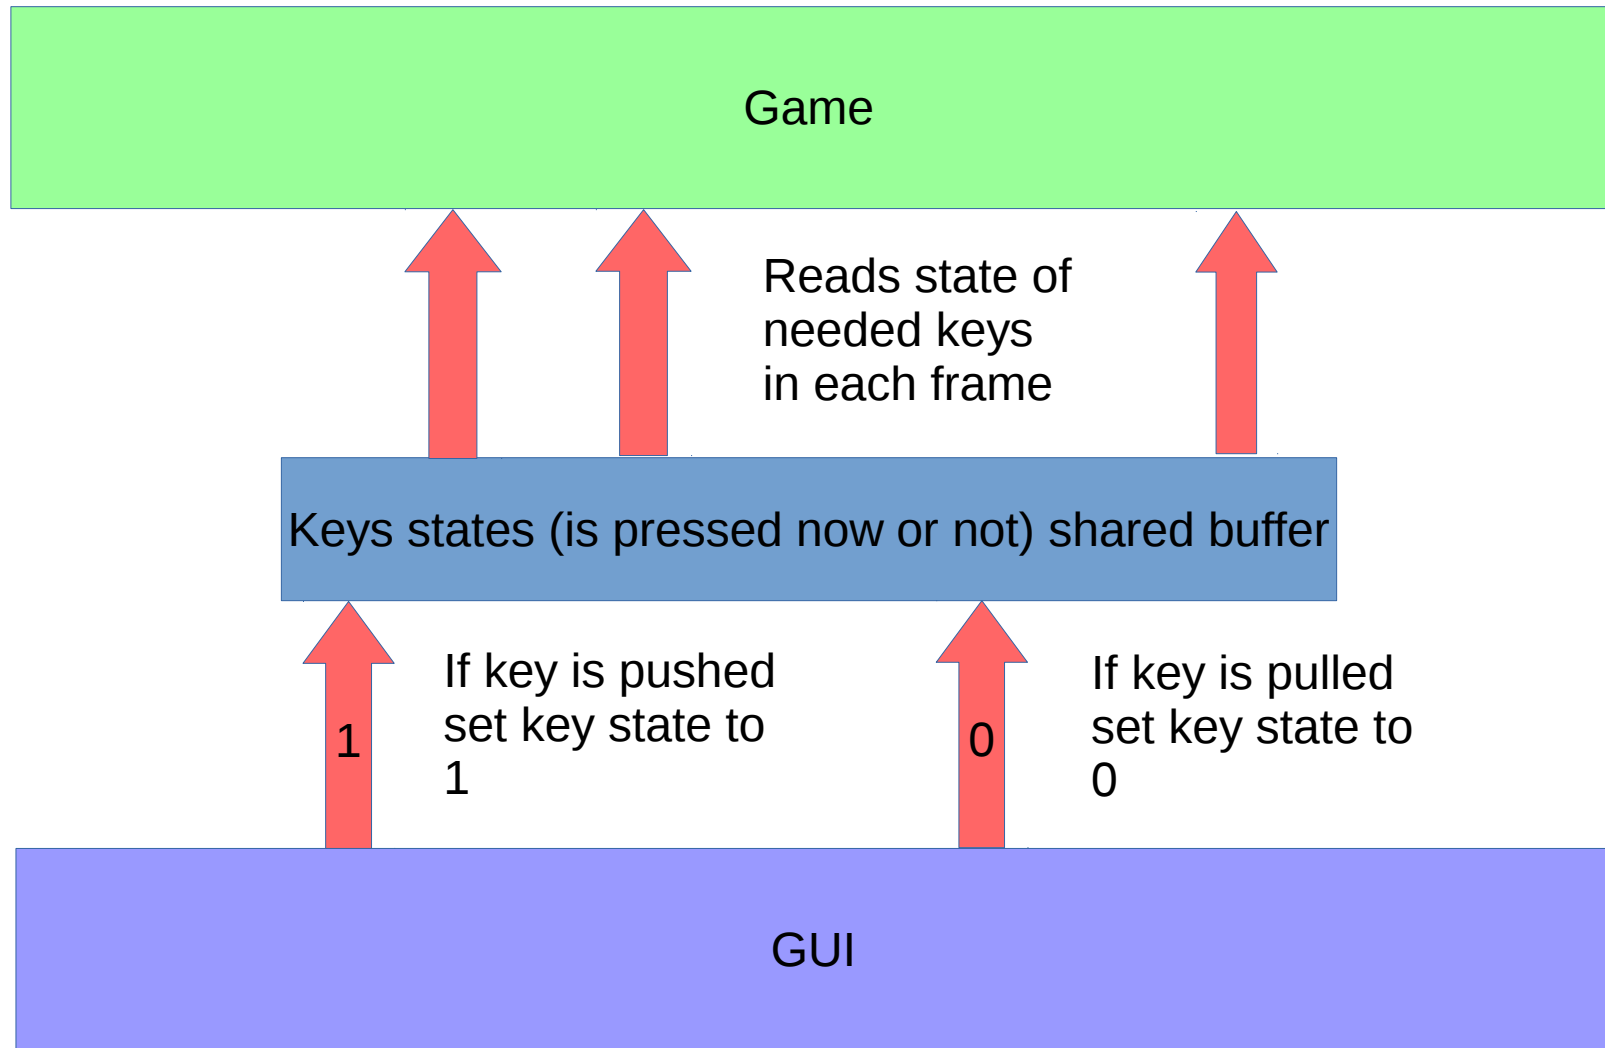


# Physics engine structure

- World represents engine functionality.

# Unit structure

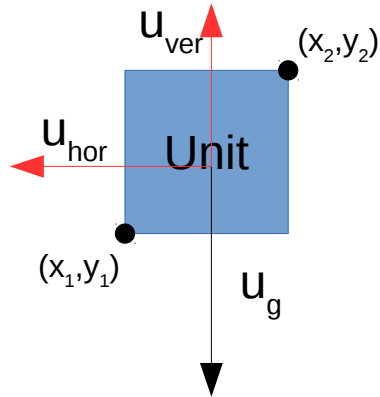

$$[\vec{u}] = \frac{\text{points}}{\text{frame}}$$

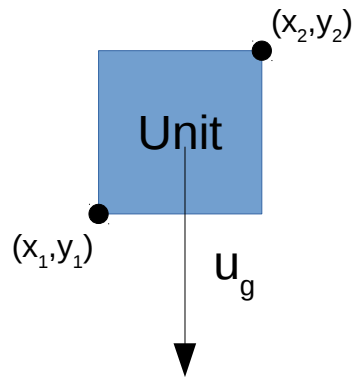

Size and position of unit can be described by two points: left bottom  $(x_1, y_1)$  and top right  $(x_2, y_2)$ .

For describe current state of the unit in the world it's enough to have a two current speed vectors: vertical and horizontal. Measure of speed in our game context is points per frame. Each frame = n seconds. Also it is speed given by gravitation, and it always force unit.


If unit is alone with no other units, it has only vertical gravitation speed, witch make unit move down.

If two blocks bumped, block with lower priority takes speed of block with higher priority. So each unit should have priority. Units of ground and walls normally have the largest priority.



# *Collision matching*


Position of A < position of B:

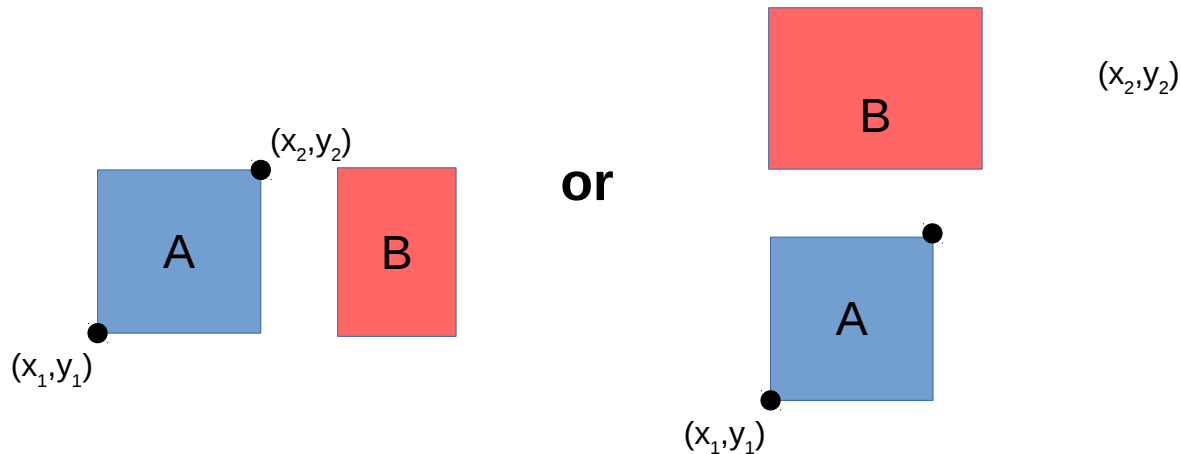

Unit A position is less than unit B position if end of A by x is less than begin of B by x or top side of A is less than bottom side of B. In the other cases collision has place.  
In the engine it means that if **NOT(A < B) AND NOT(B < A)** then they are collided.

# *Collision matching*

- There are three sets of objects: static, mobs and players.
- Collisions are matching only between different sets.

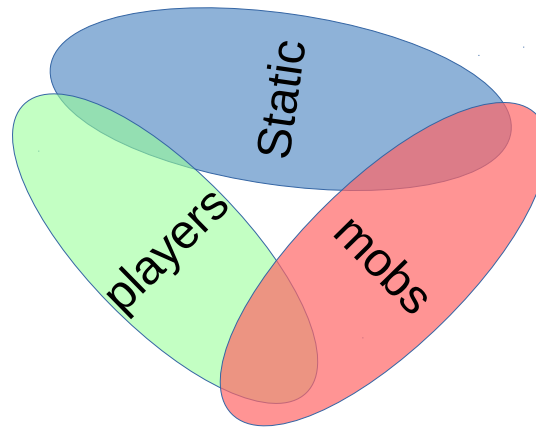

# Collision events

- Each collision cause changing of speeds and positions of units