
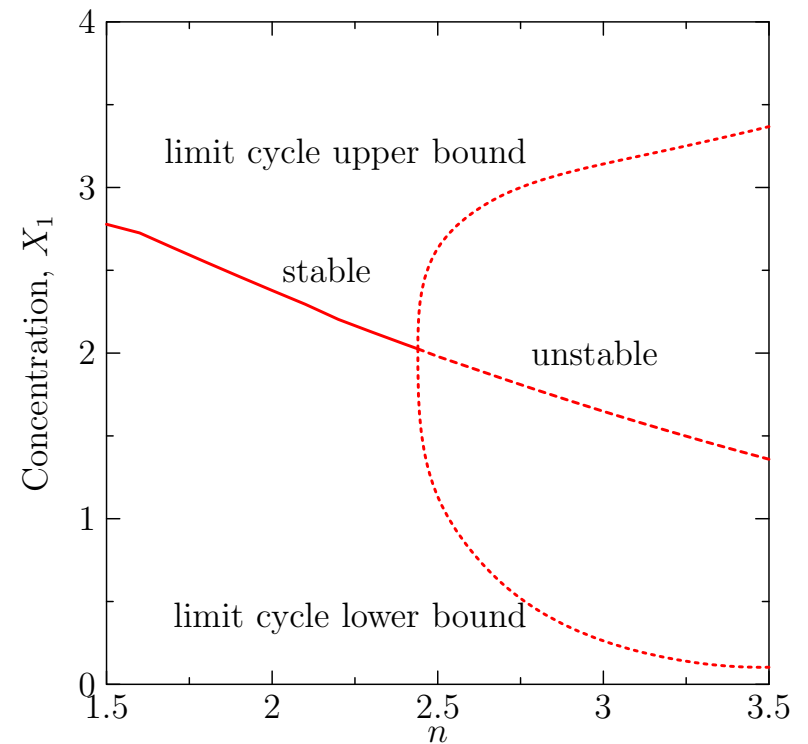


Computational Biology


Lecture 4: *Dynamical Systems*

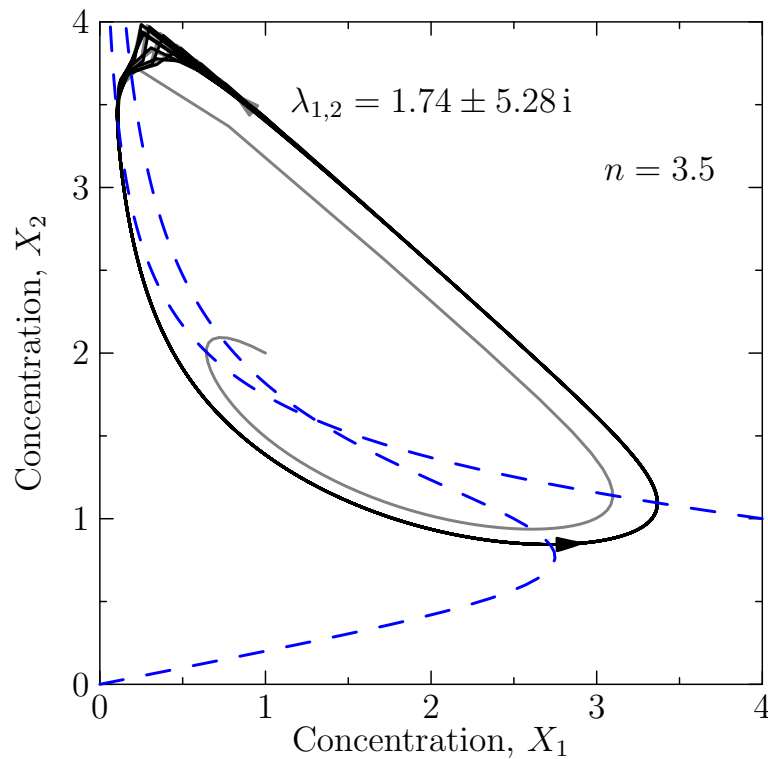

ODEs, nullclines, fixed points, stability analysis, bifurcations

Outline

1. **Understanding ODEs**
2. Stability
3. Bifurcations

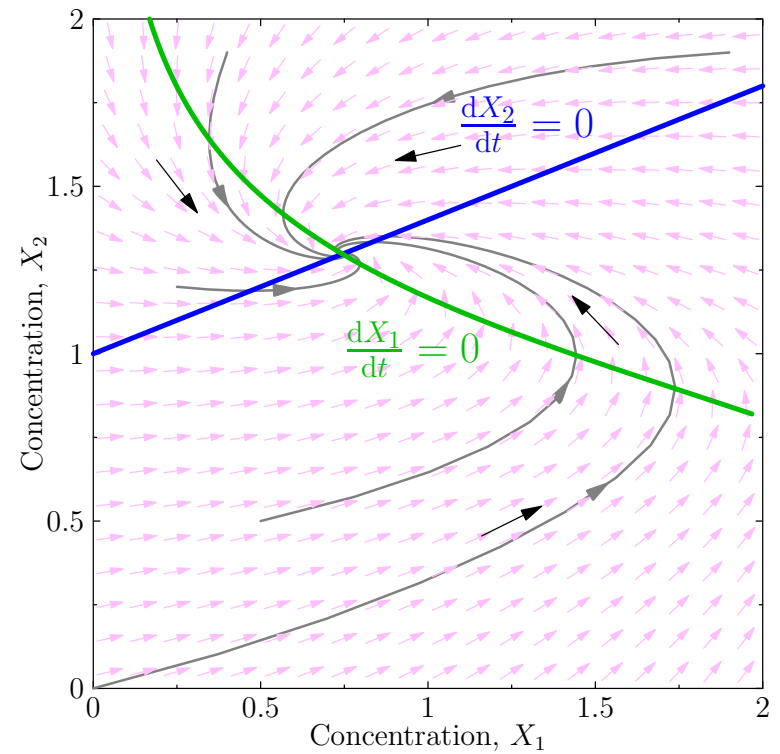

Dynamical Systems

- In the last lecture we saw that we could model the dynamics of a system of molecules $\mathbf{X} = (X_i | i = 1, 2, \dots, n)$ in terms of differential equations

$$\frac{dX_i}{dt} = f_i(\mathbf{X})$$

- These model the mean behaviour of a set of chemical equations
- Provide the number of molecules is sufficiently large this model is accurate
- In this lecture we look at mathematical tools for understanding sets of first order differential equations

Dynamical Systems

- In the last lecture we saw that we could model the dynamics of a system of molecules $\mathbf{X} = (X_i | i = 1, 2, \dots, n)$ in terms of differential equations

$$\frac{dX_i}{dt} = f_i(\mathbf{X}) \quad \text{or} \quad \frac{d[X_i]}{dt} = f_i([\mathbf{X}])$$

- These model the mean behaviour of a set of chemical equations
- Provide the number of molecules is sufficiently large this model is accurate
- In this lecture we look at mathematical tools for understanding sets of first order differential equations

Dynamical Systems

- In the last lecture we saw that we could model the dynamics of a system of molecules $\mathbf{X} = (X_i | i = 1, 2, \dots, n)$ in terms of differential equations

$$\frac{dX_i}{dt} = f_i(\mathbf{X}) \quad \text{or} \quad \frac{d[X_i]}{dt} = f_i([\mathbf{X}])$$

- These model the mean behaviour of a set of chemical equations
- Provide the number of molecules is sufficiently large this model is accurate
- In this lecture we look at mathematical tools for understanding sets of first order differential equations

Dynamical Systems

- In the last lecture we saw that we could model the dynamics of a system of molecules $\mathbf{X} = (X_i | i = 1, 2, \dots, n)$ in terms of differential equations

$$\frac{dX_i}{dt} = f_i(\mathbf{X}) \quad \text{or} \quad \frac{d[X_i]}{dt} = f_i([\mathbf{X}])$$

- These model the mean behaviour of a set of chemical equations
- Provide the number of molecules is sufficiently large this model is accurate
- In this lecture we look at mathematical tools for understanding sets of first order differential equations

Dynamical Systems


- In the last lecture we saw that we could model the dynamics of a system of molecules $\mathbf{X} = (X_i | i = 1, 2, \dots, n)$ in terms of differential equations

$$\frac{dX_i}{dt} = f_i(\mathbf{X}) \quad \text{or} \quad \frac{d[X_i]}{dt} = f_i([\mathbf{X}])$$

- These model the mean behaviour of a set of chemical equations
- Provide the number of molecules is sufficiently large this model is accurate
- In this lecture we look at mathematical tools for understanding sets of first order differential equations


Two Species

- Consider the simple system

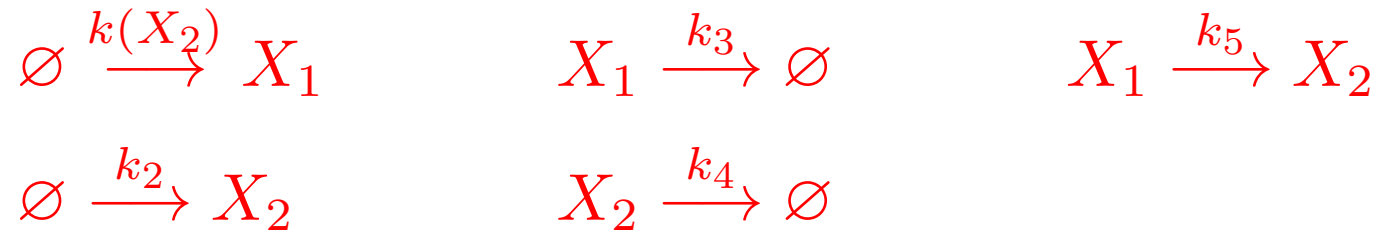

- Where X_2 represses the expression of X_1

$$k(X_2) = \frac{k_1}{1 + (X_2/K)^n}$$

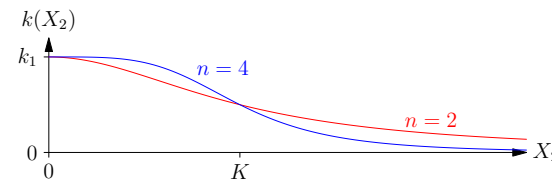


- Leading to the coupled ODEs

$$\begin{aligned} \frac{dX_1(t)}{dt} &= f_1(X_1, X_2) = \frac{k_1}{1 + (X_2(t)/K)^n} - k_3 X_1(t) - k_5 X_1(t) \\ \frac{dX_2(t)}{dt} &= f_2(X_1, X_2) = k_2 + k_5 X_1(t) - k_4 X_2(t) \end{aligned}$$


Two Species

- Consider the simple system

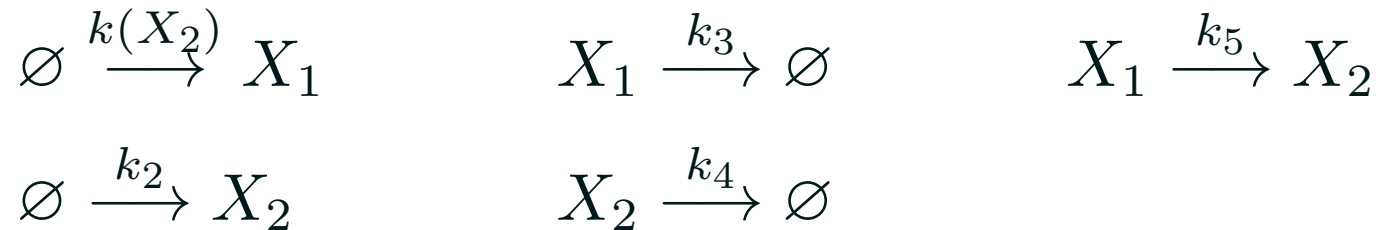

- Where X_2 represses the expression of X_1

$$k(X_2) = \frac{k_1}{1 + (X_2/K)^n}$$

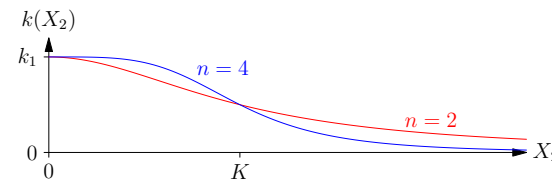


- Leading to the coupled ODEs

$$\begin{aligned} \frac{dX_1(t)}{dt} &= f_1(X_1, X_2) = \frac{k_1}{1 + (X_2(t)/K)^n} - k_3 X_1(t) - k_5 X_1(t) \\ \frac{dX_2(t)}{dt} &= f_2(X_1, X_2) = k_2 + k_5 X_1(t) - k_4 X_2(t) \end{aligned}$$


Two Species

- Consider the simple system

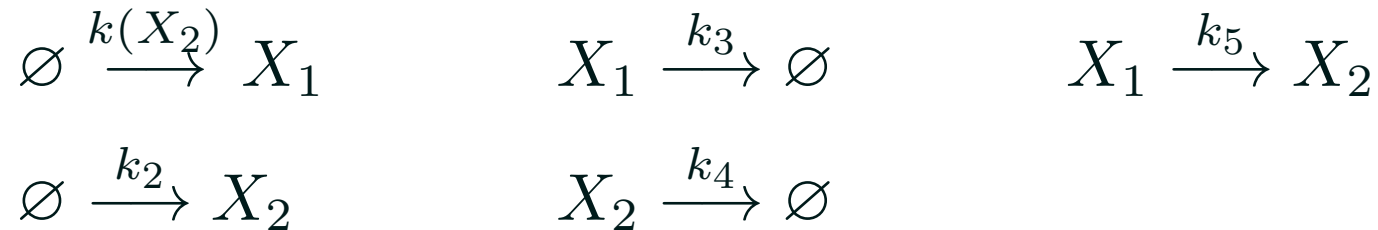

- Where X_2 represses the expression of X_1



$$k(X_2) = \frac{k_1}{1 + (X_2/K)^n}$$

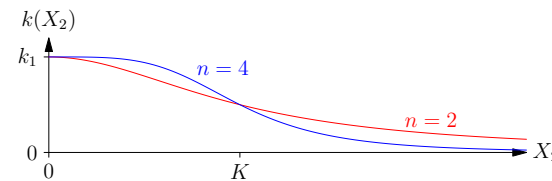

- Leading to the coupled ODEs



$$\begin{aligned} \frac{dX_1(t)}{dt} &= f_1(X_1, X_2) = \frac{k_1}{1 + (X_2(t)/K)^n} - k_3 X_1(t) - k_5 X_1(t) \\ \frac{dX_2(t)}{dt} &= f_2(X_1, X_2) = k_2 + k_5 X_1(t) - k_4 X_2(t) \end{aligned}$$

Solving the Dynamics

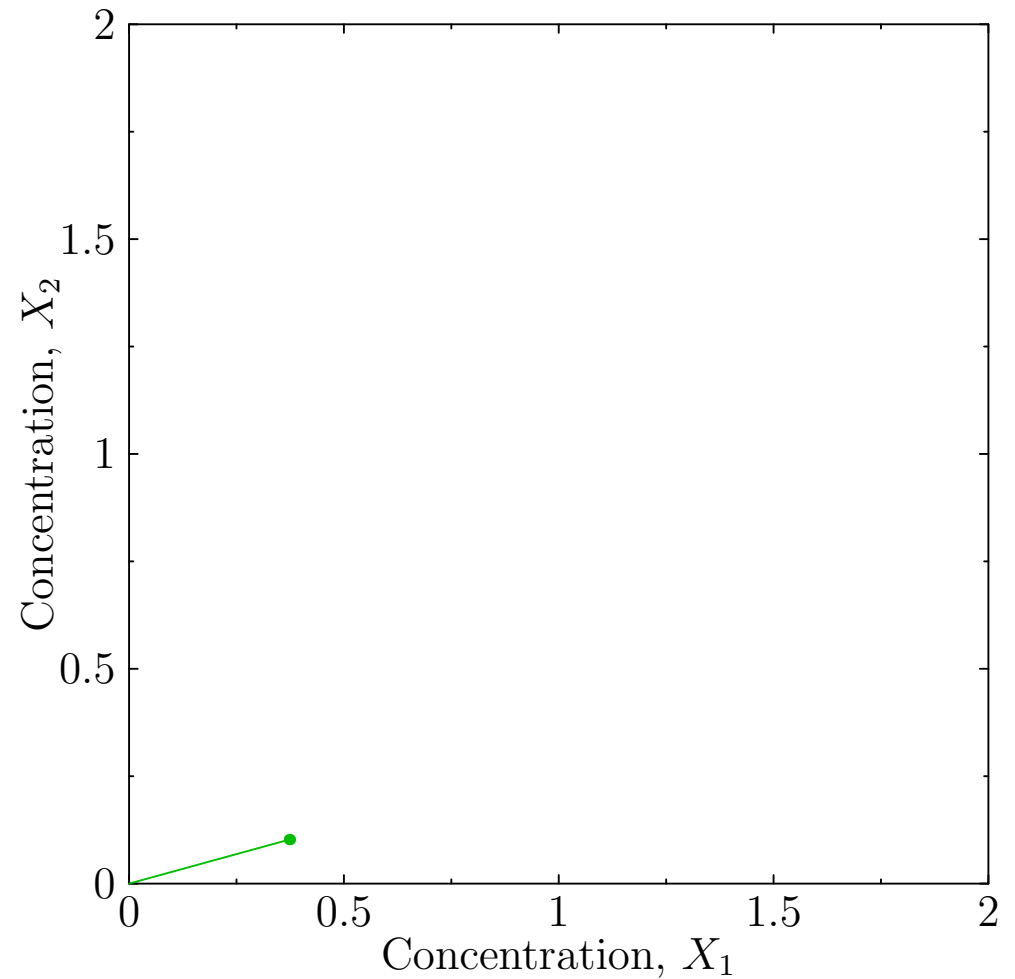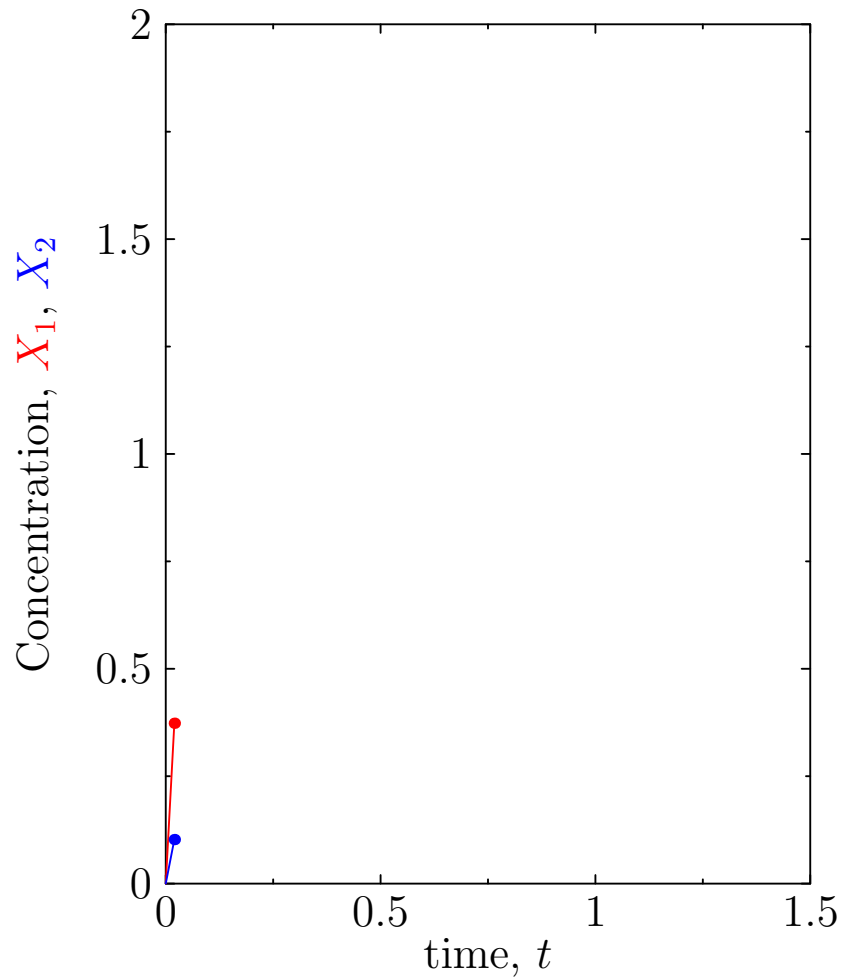



$$K = 1, k_1 = 20, k_2 = k_3 = k_4 = 5, k_5 = 2, n = 4$$

Solving the Dynamics

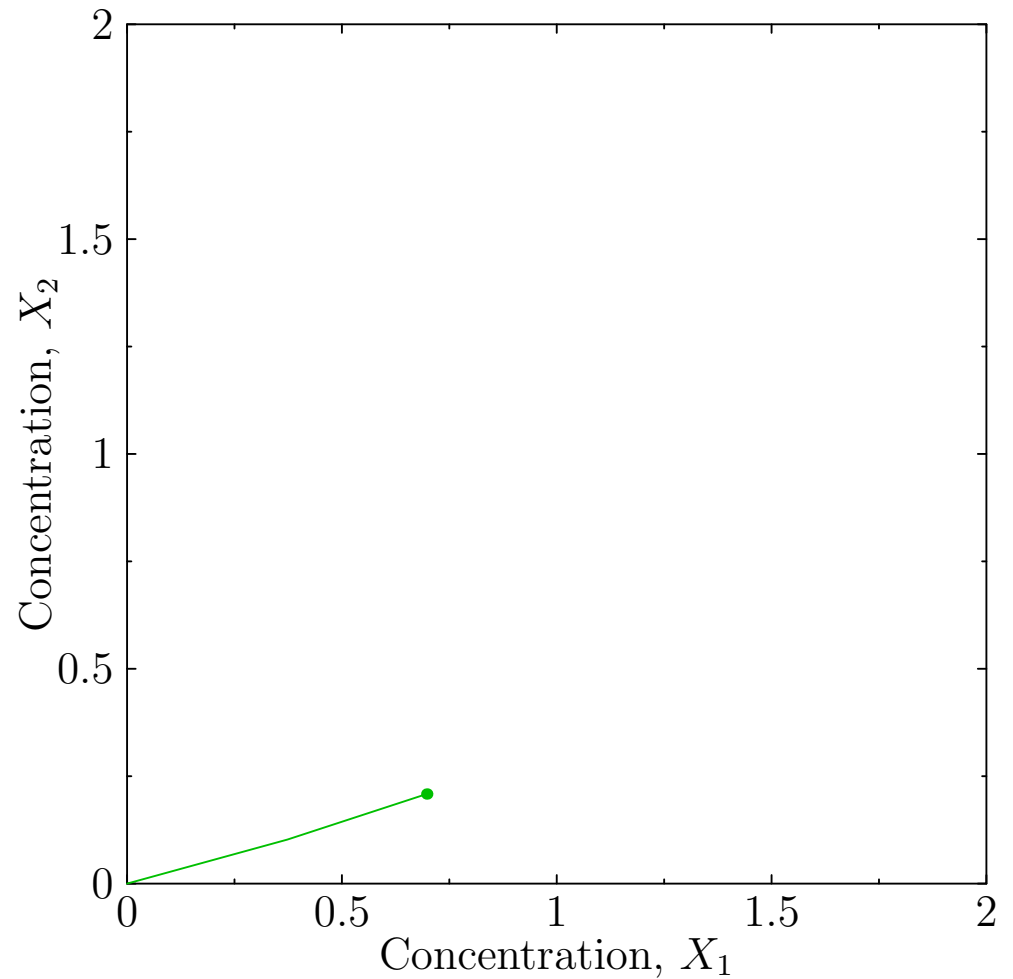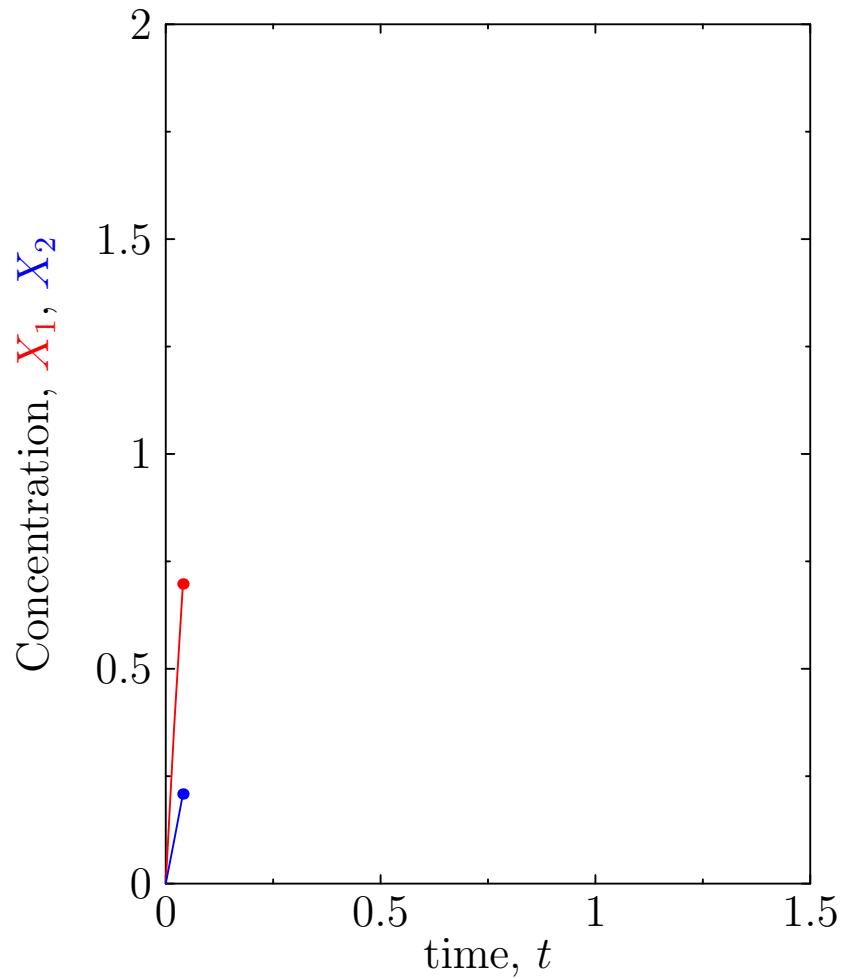



$$K = 1, k_1 = 20, k_2 = k_3 = k_4 = 5, k_5 = 2, n = 4$$

Solving the Dynamics

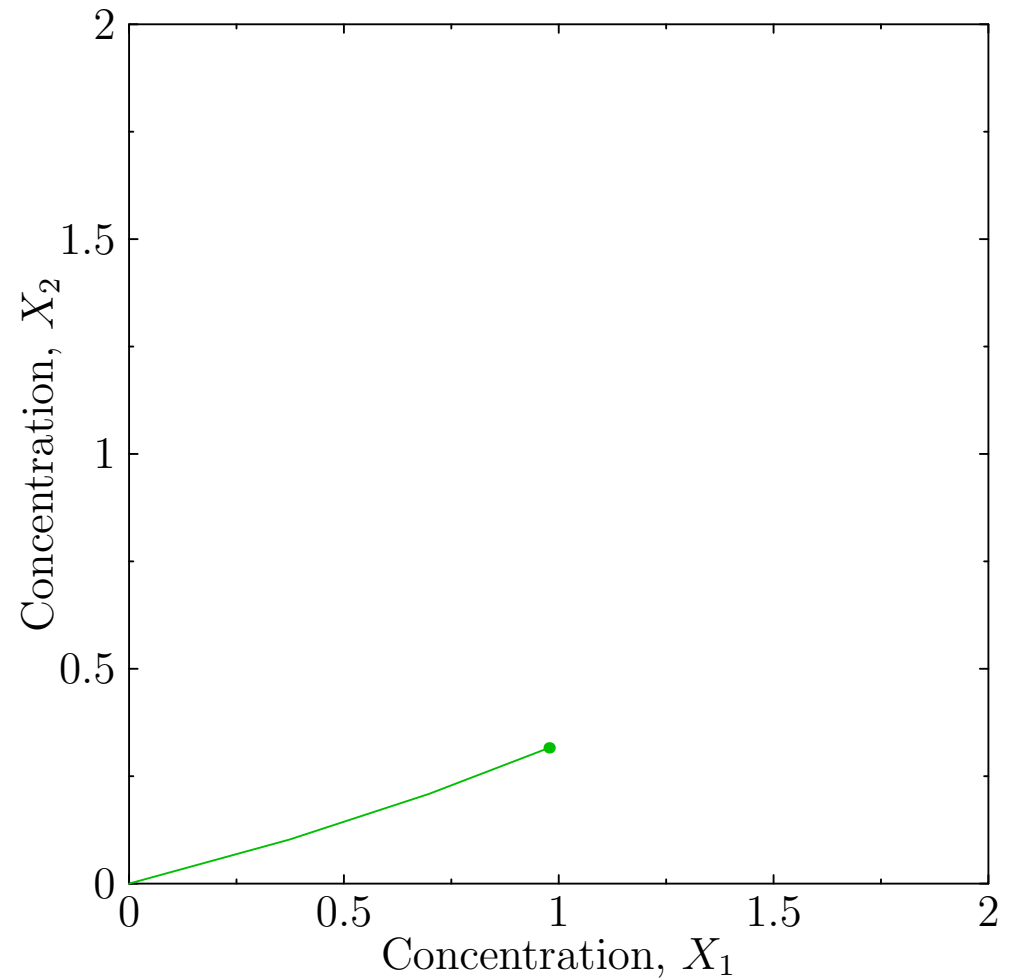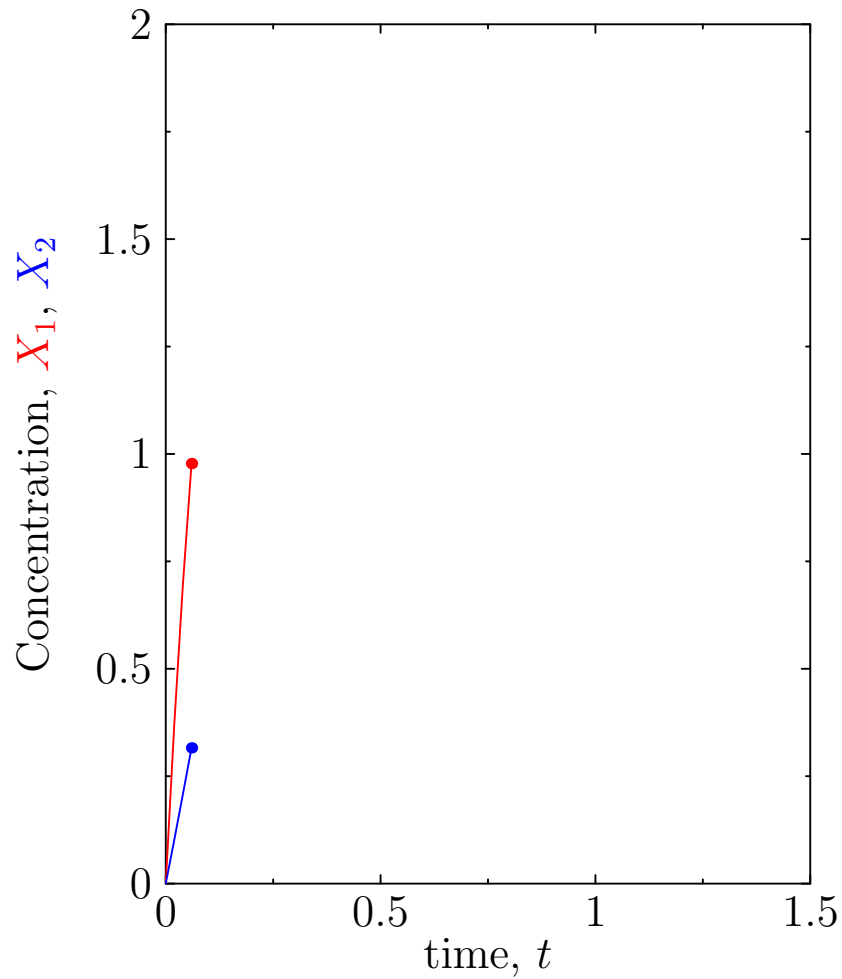



$$K = 1, k_1 = 20, k_2 = k_3 = k_4 = 5, k_5 = 2, n = 4$$

Solving the Dynamics

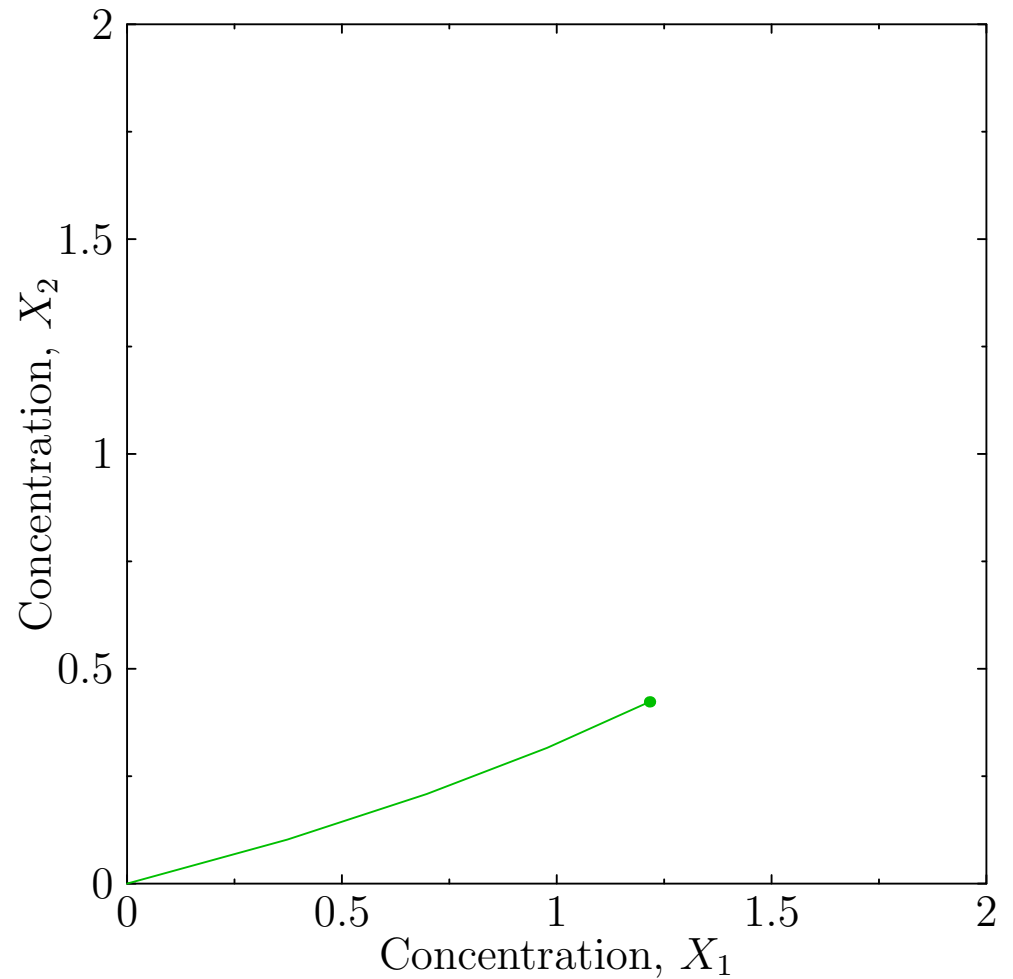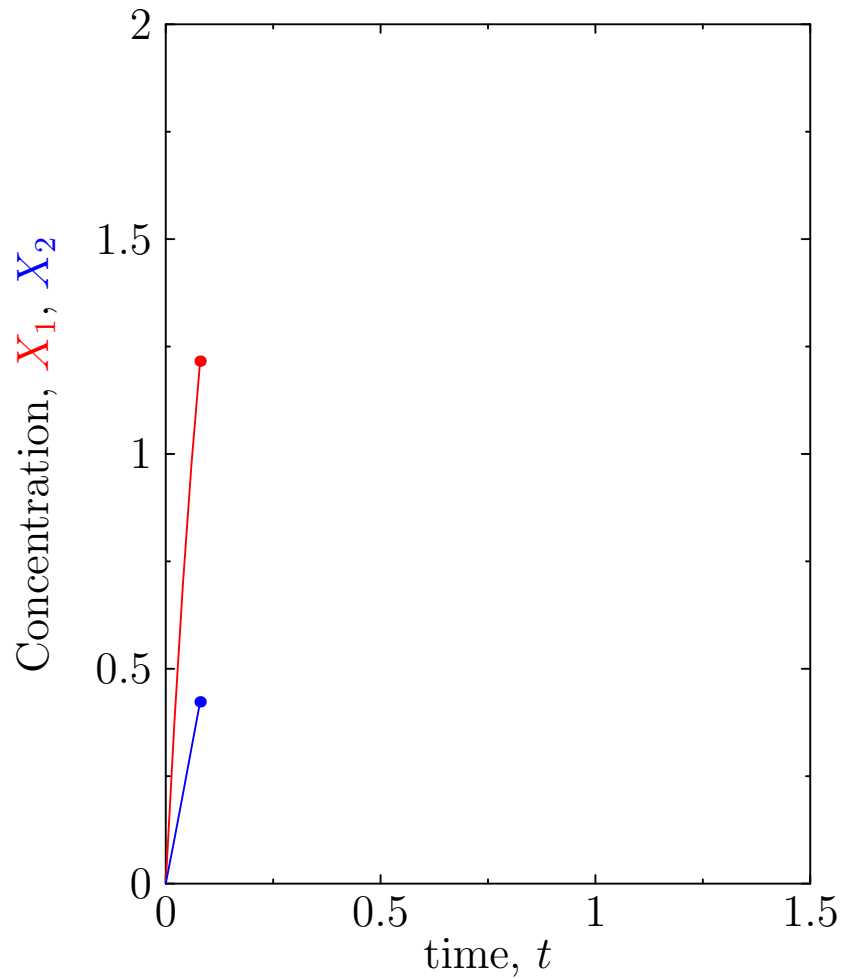



$$K = 1, k_1 = 20, k_2 = k_3 = k_4 = 5, k_5 = 2, n = 4$$

Solving the Dynamics

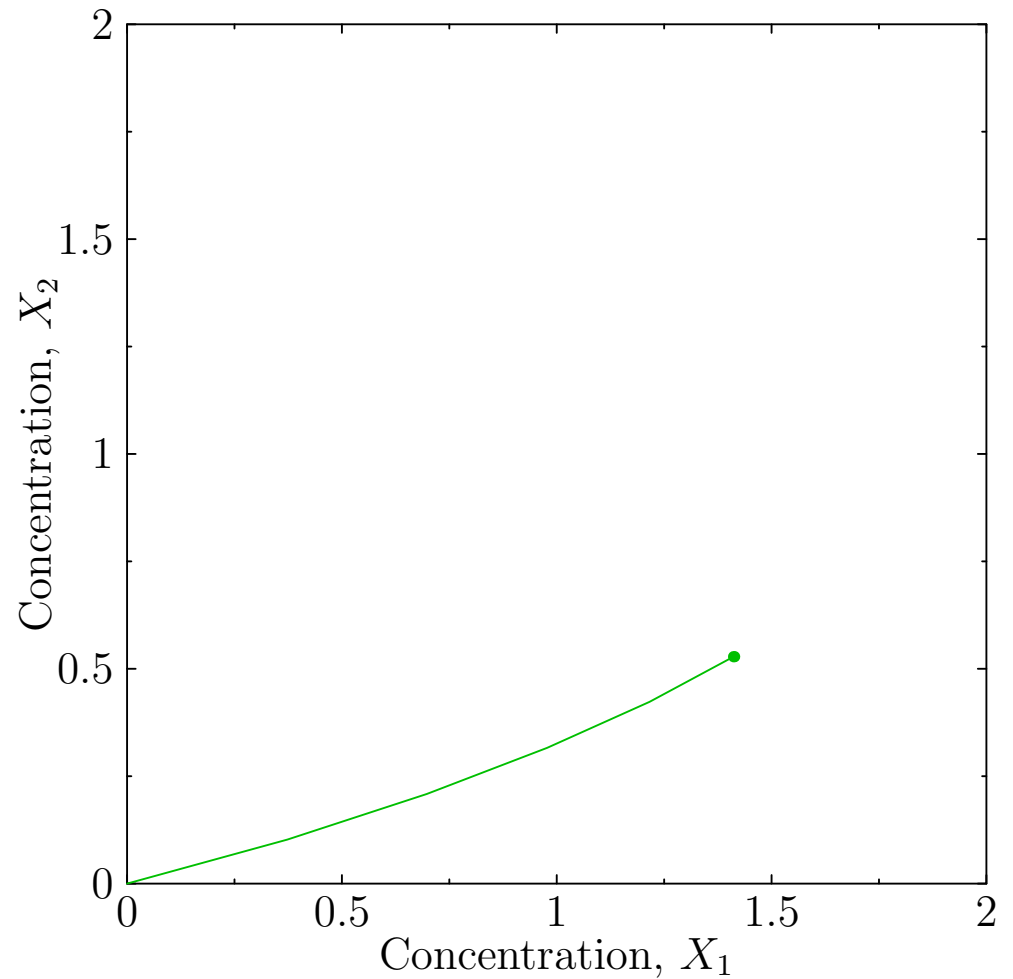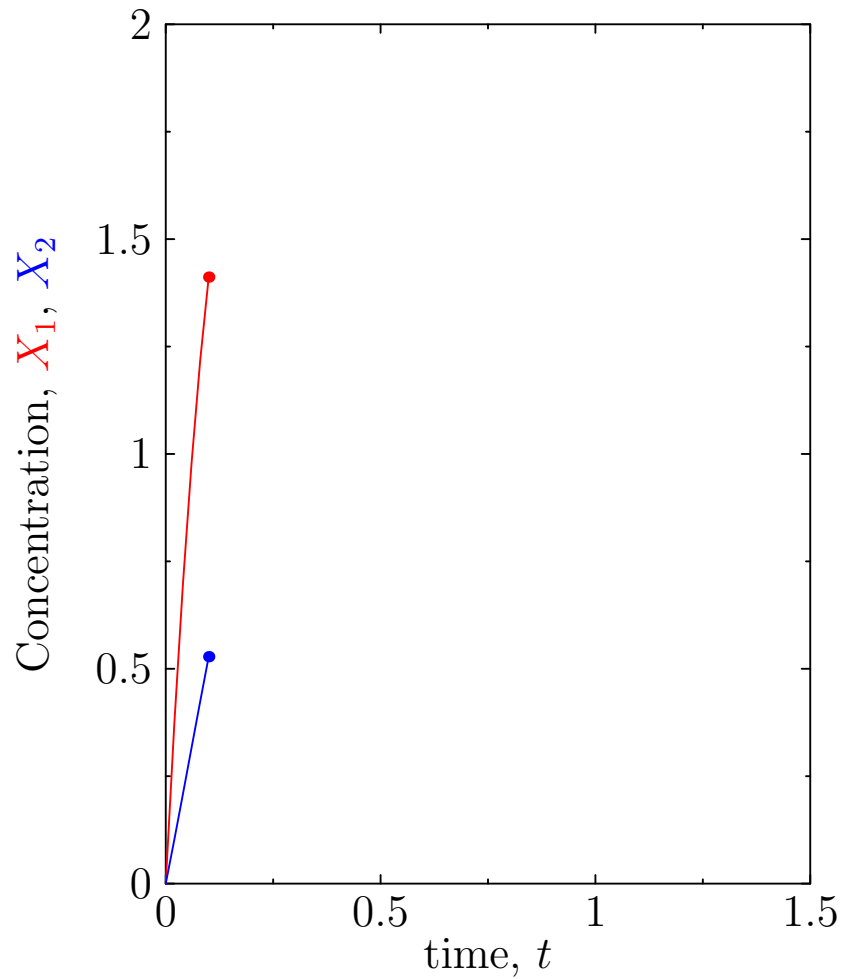



$$K = 1, k_1 = 20, k_2 = k_3 = k_4 = 5, k_5 = 2, n = 4$$

Solving the Dynamics

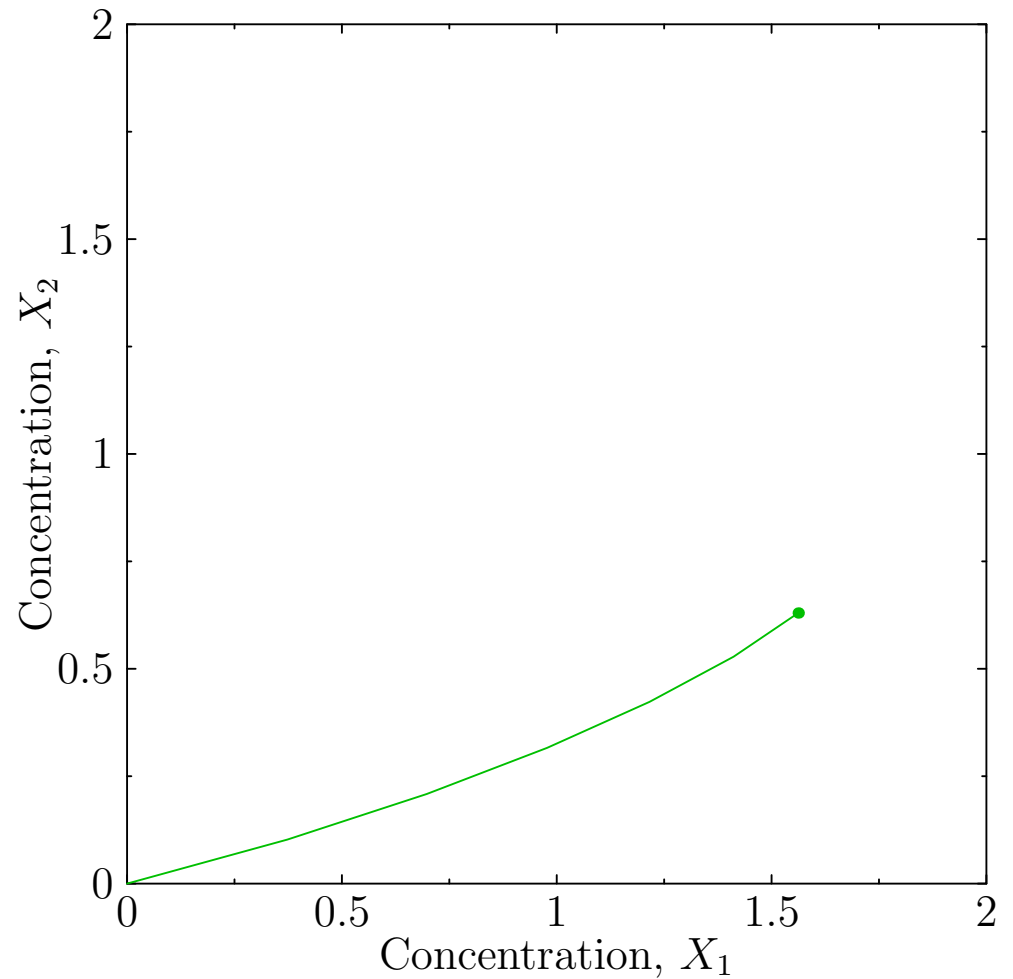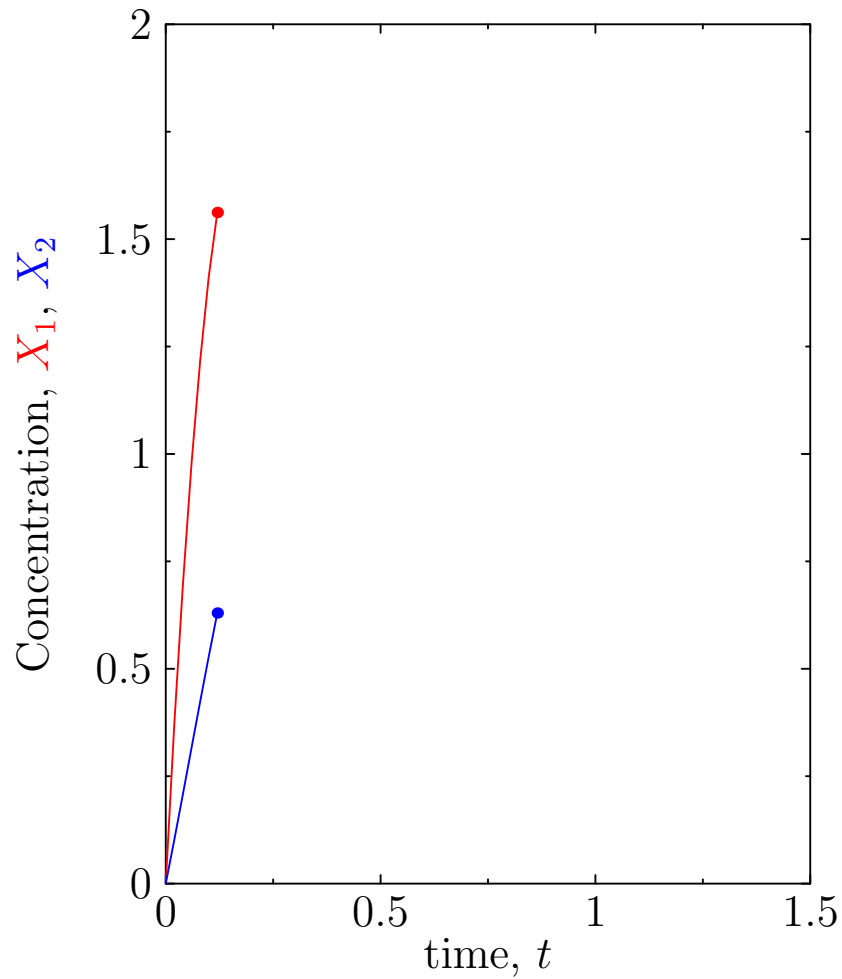



$$K = 1, k_1 = 20, k_2 = k_3 = k_4 = 5, k_5 = 2, n = 4$$

Solving the Dynamics

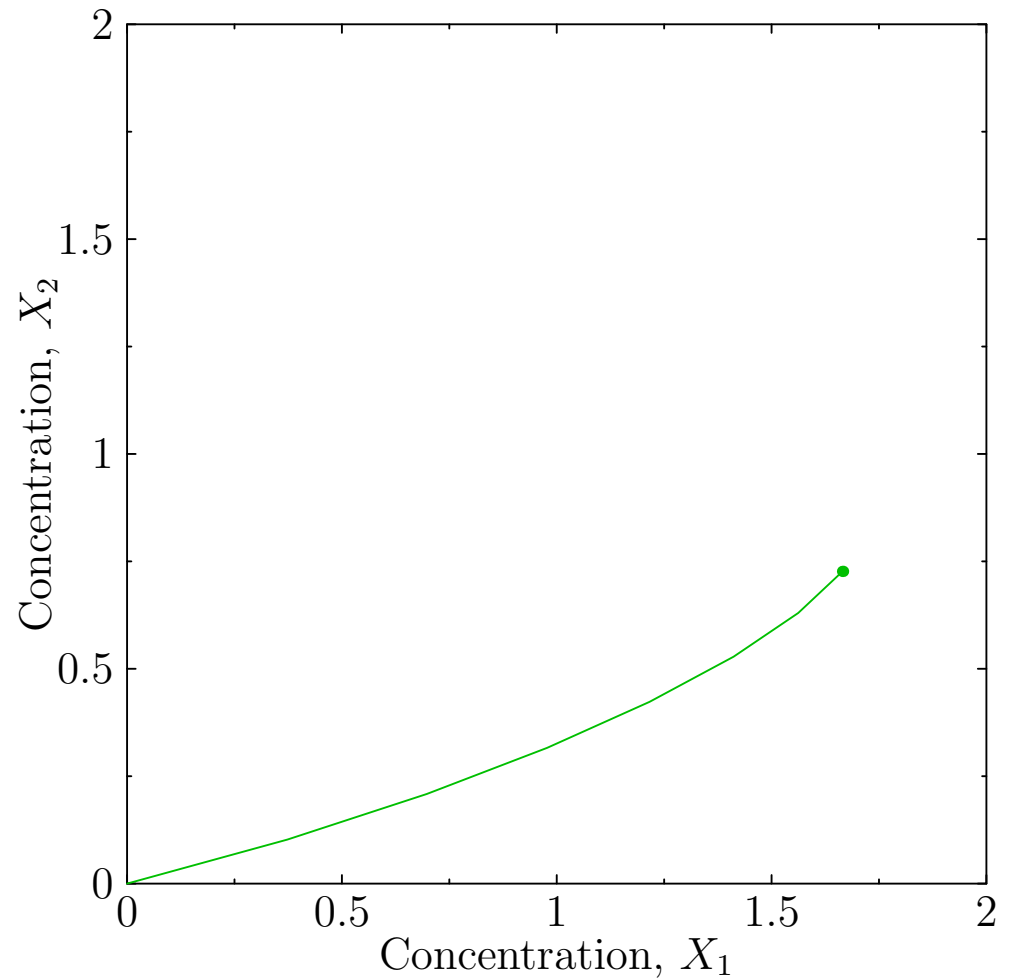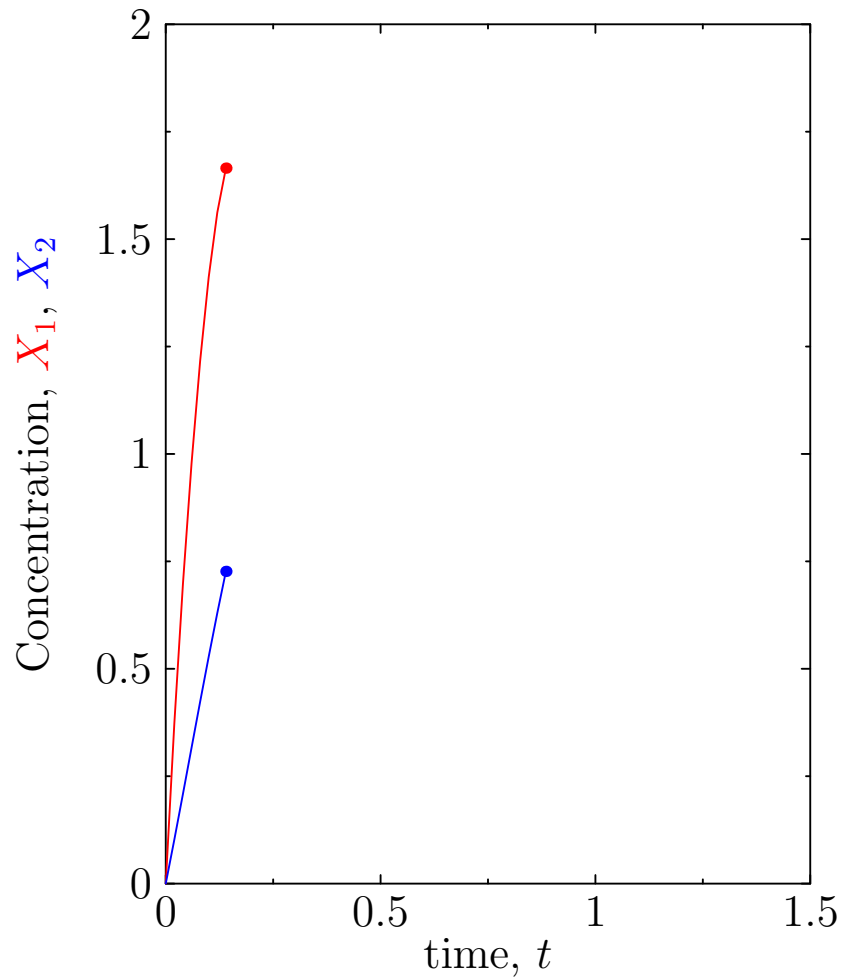



$$K = 1, k_1 = 20, k_2 = k_3 = k_4 = 5, k_5 = 2, n = 4$$

Solving the Dynamics

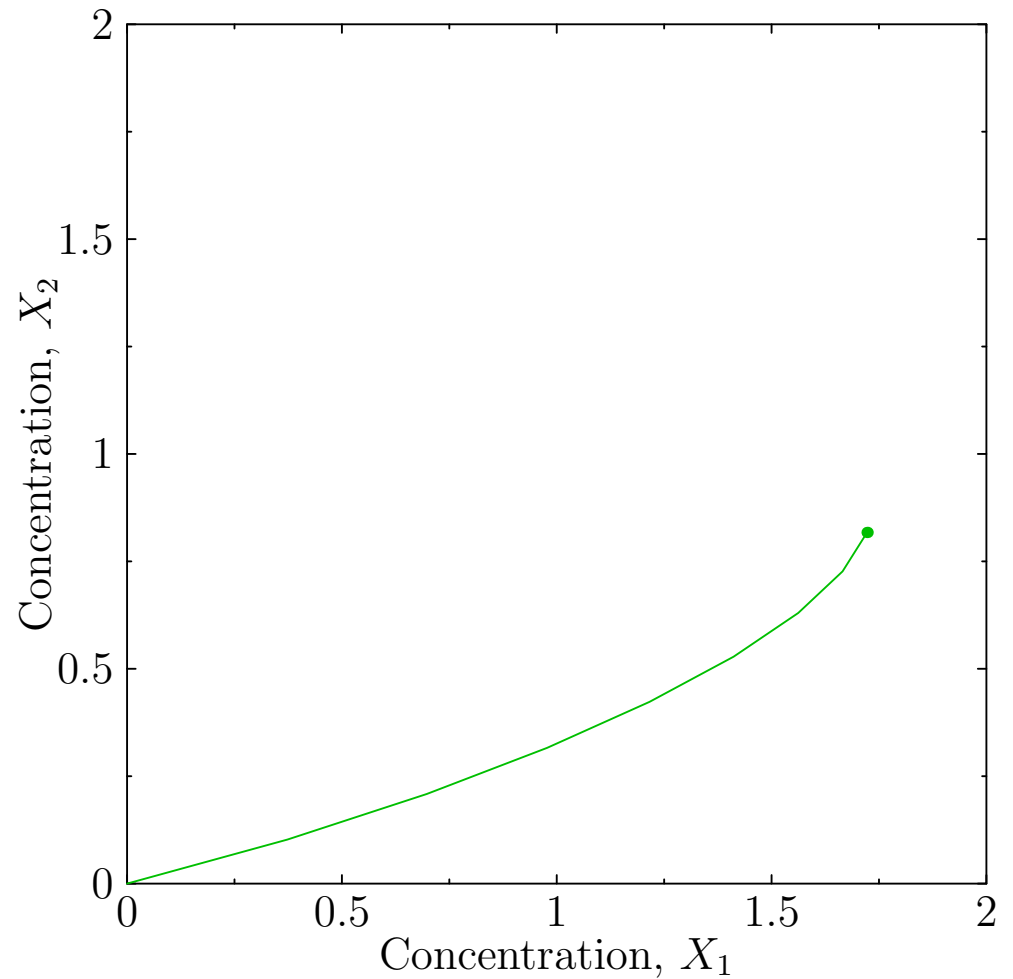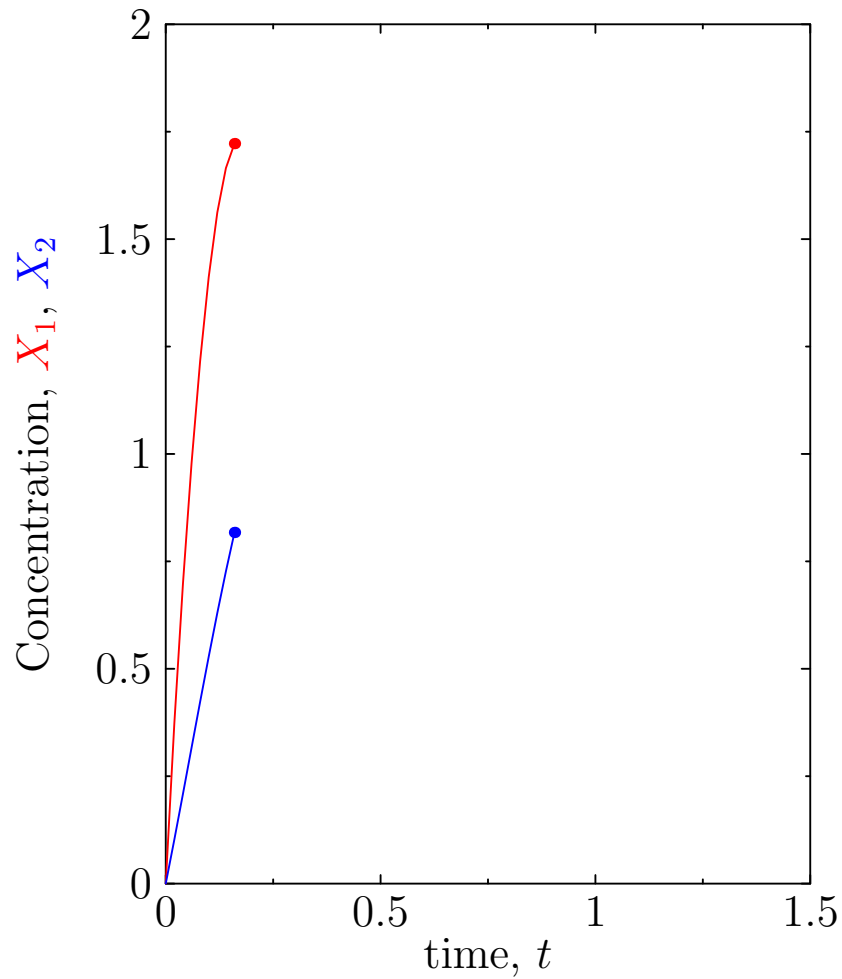



$$K = 1, k_1 = 20, k_2 = k_3 = k_4 = 5, k_5 = 2, n = 4$$

Solving the Dynamics

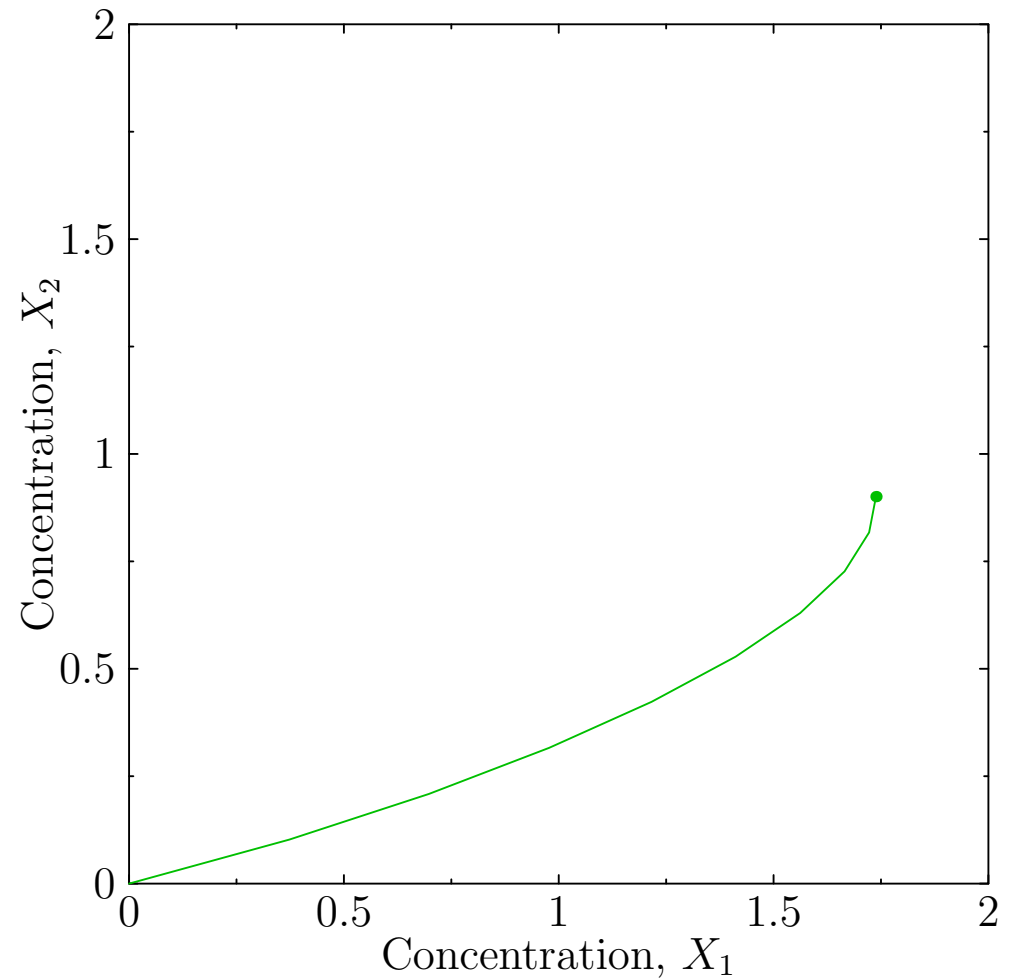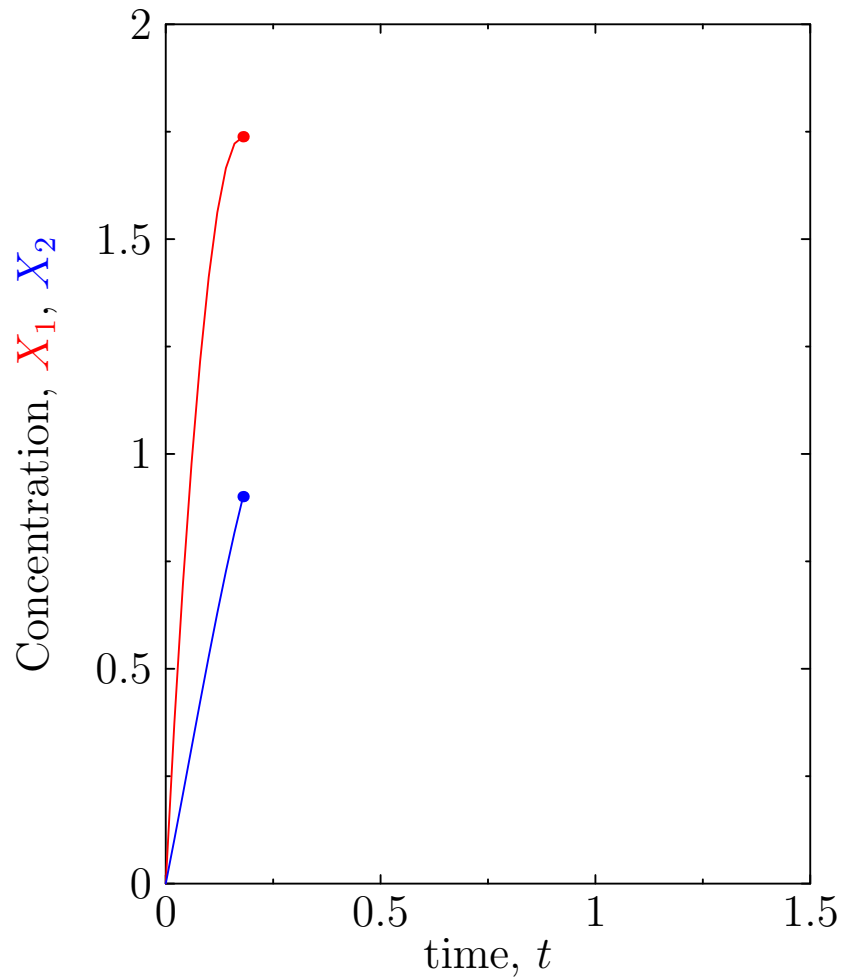



$$K = 1, k_1 = 20, k_2 = k_3 = k_4 = 5, k_5 = 2, n = 4$$

Solving the Dynamics

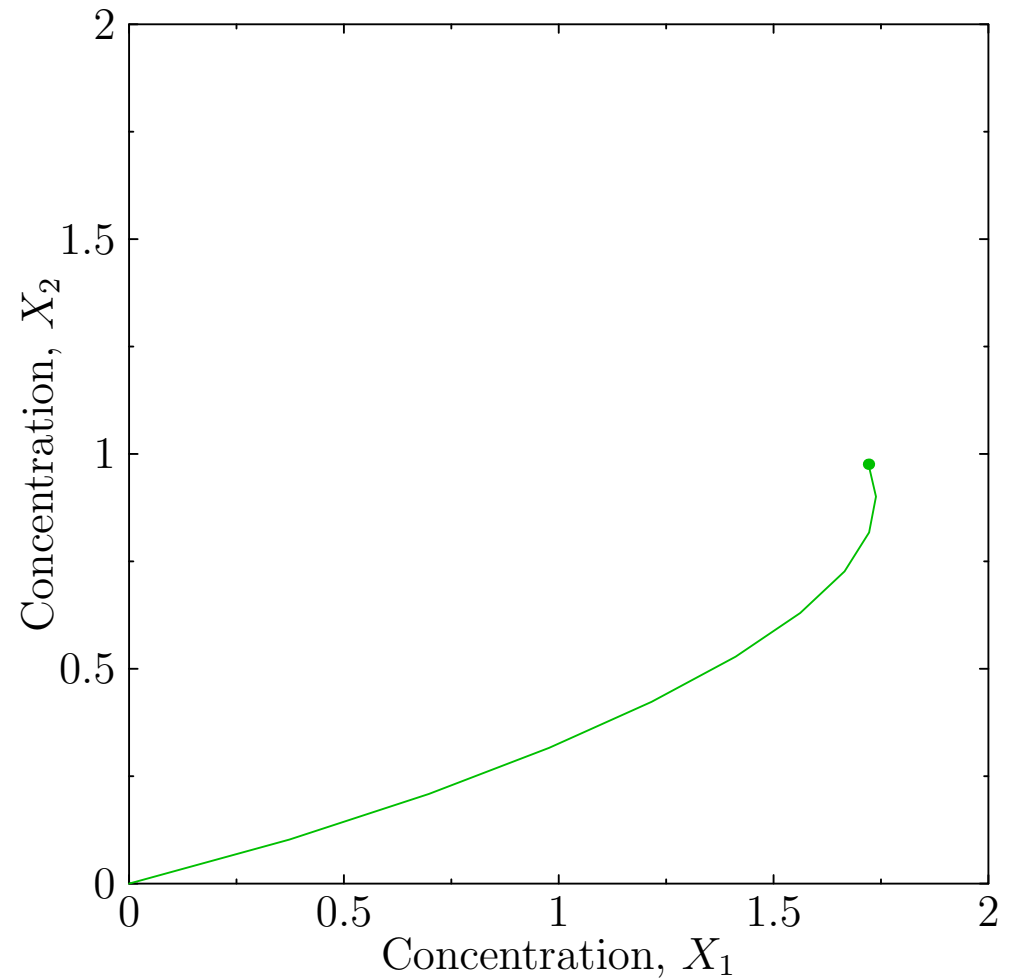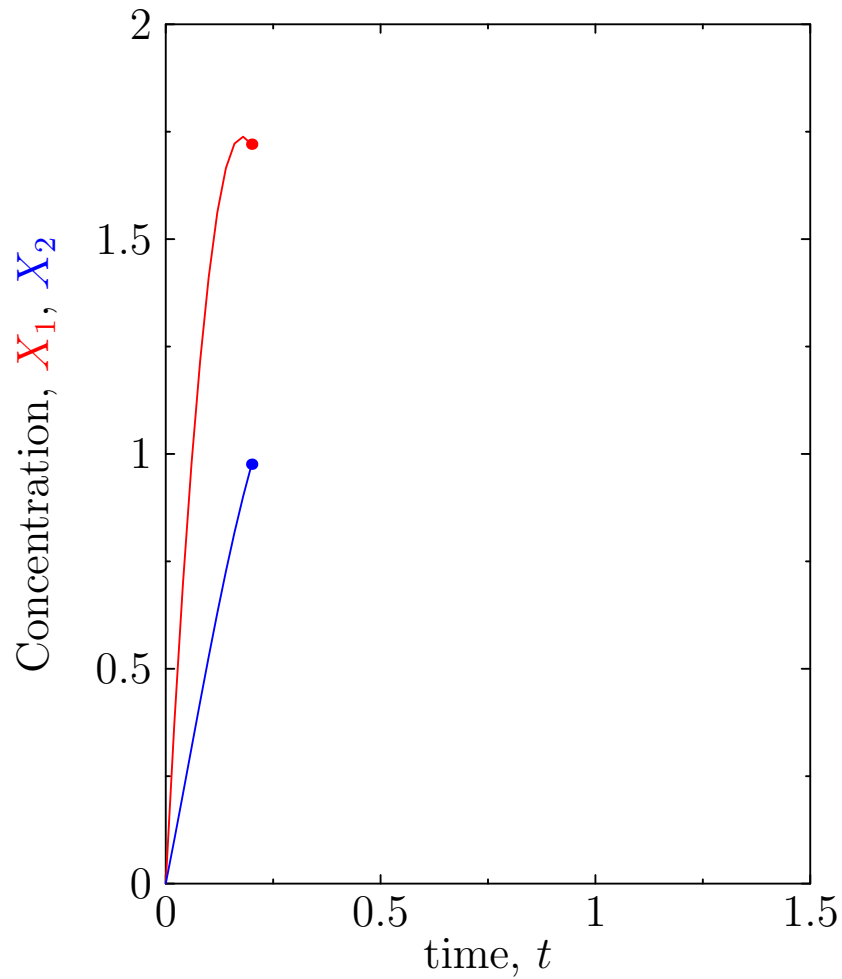



$$K = 1, k_1 = 20, k_2 = k_3 = k_4 = 5, k_5 = 2, n = 4$$

Solving the Dynamics

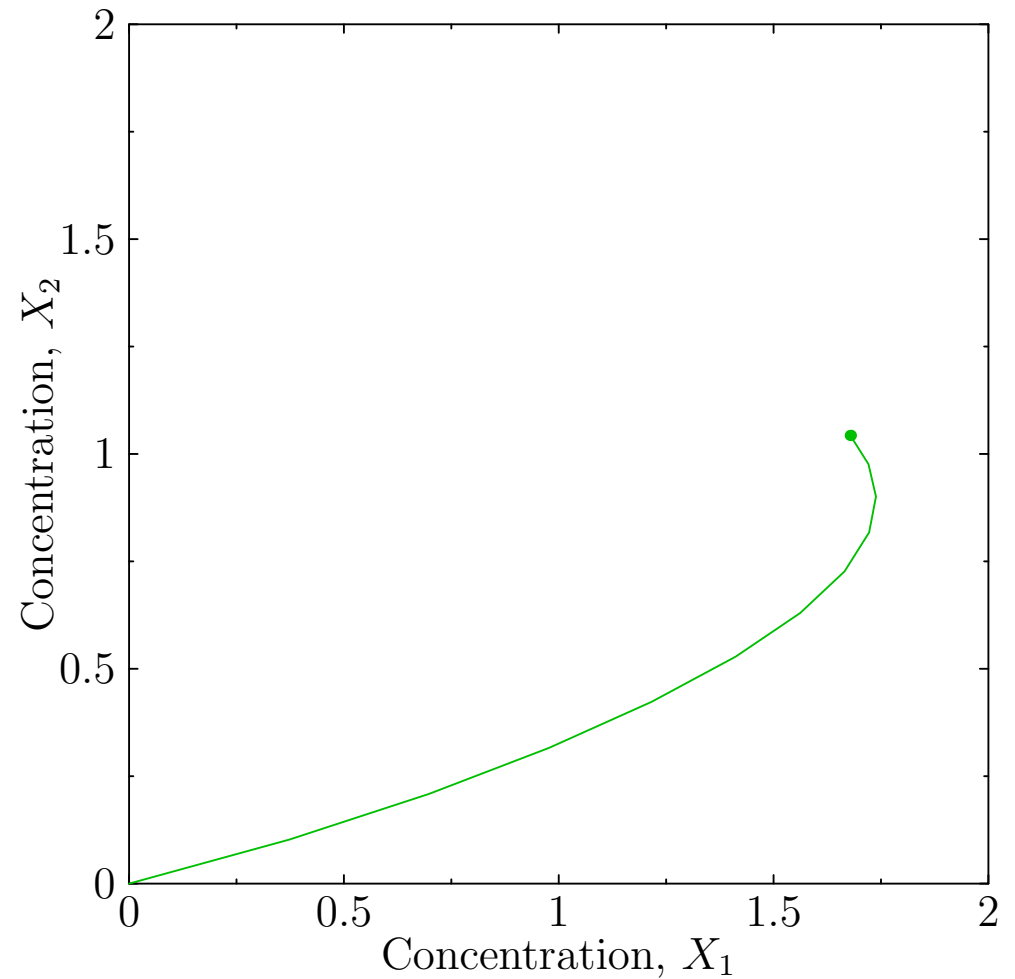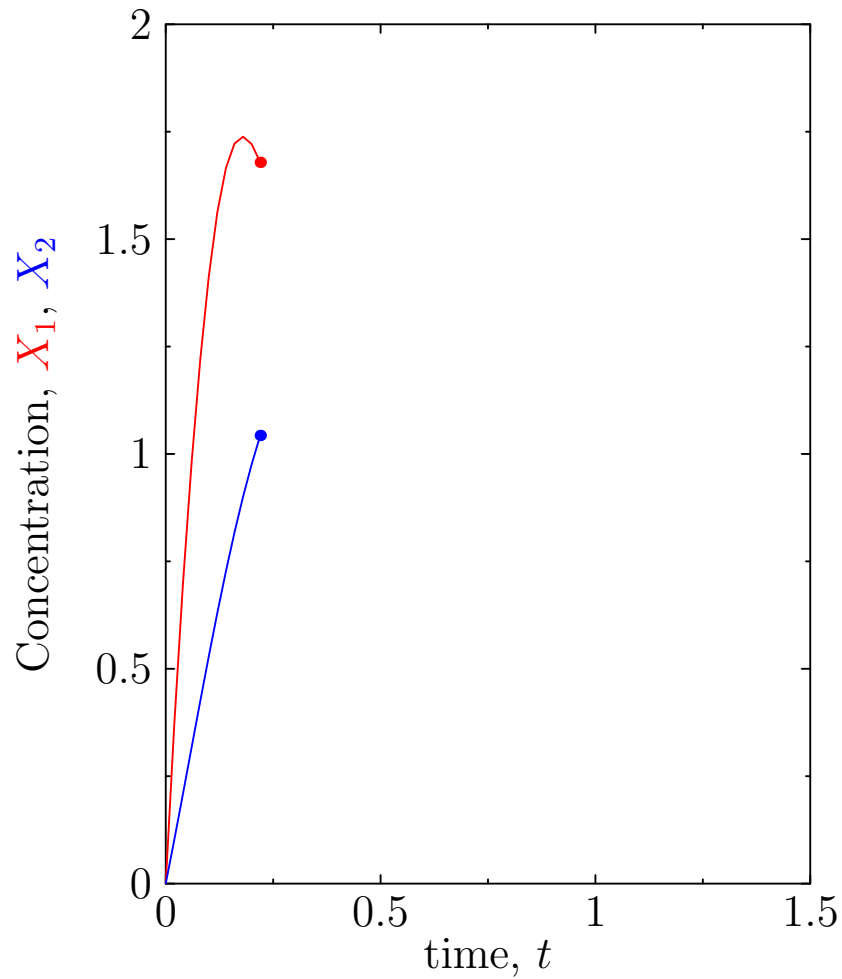



$$K = 1, k_1 = 20, k_2 = k_3 = k_4 = 5, k_5 = 2, n = 4$$

Solving the Dynamics

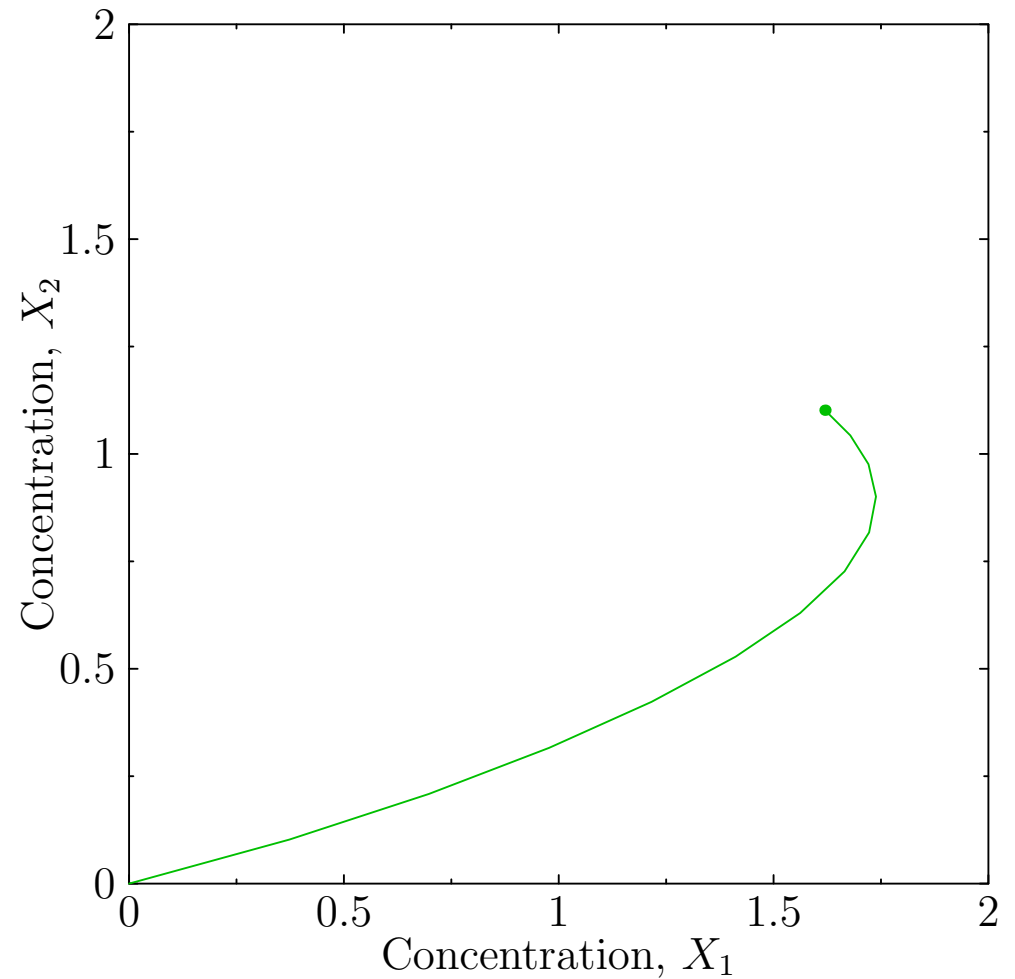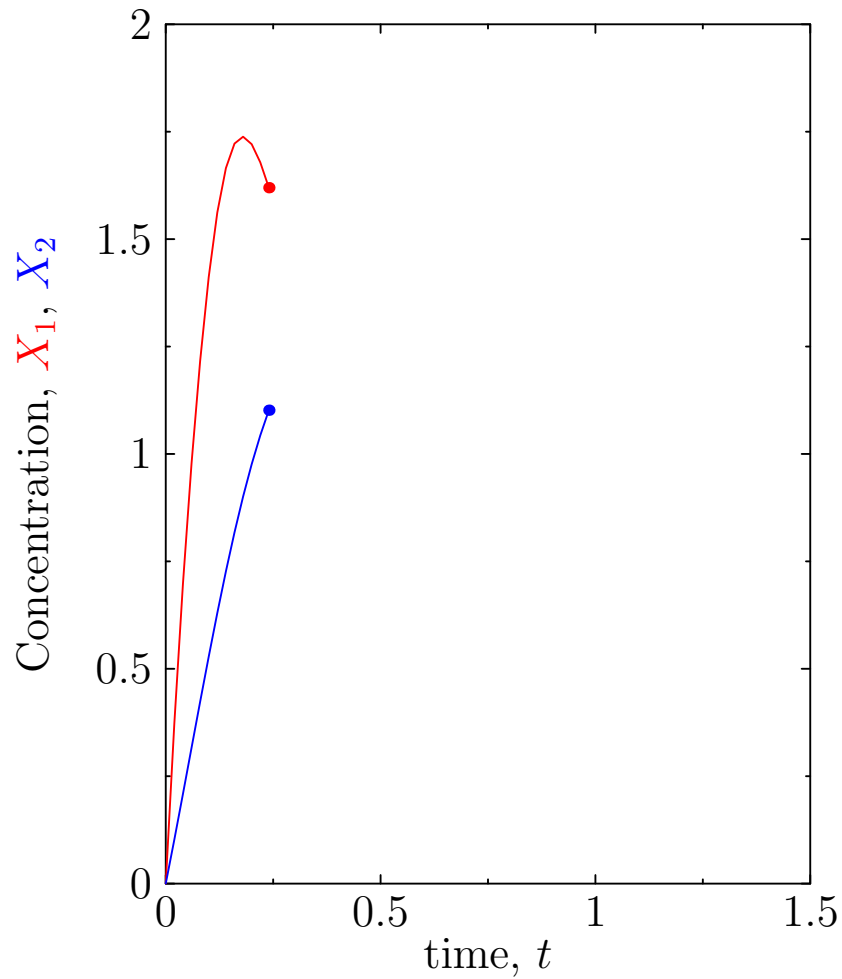



$$K = 1, k_1 = 20, k_2 = k_3 = k_4 = 5, k_5 = 2, n = 4$$

Solving the Dynamics

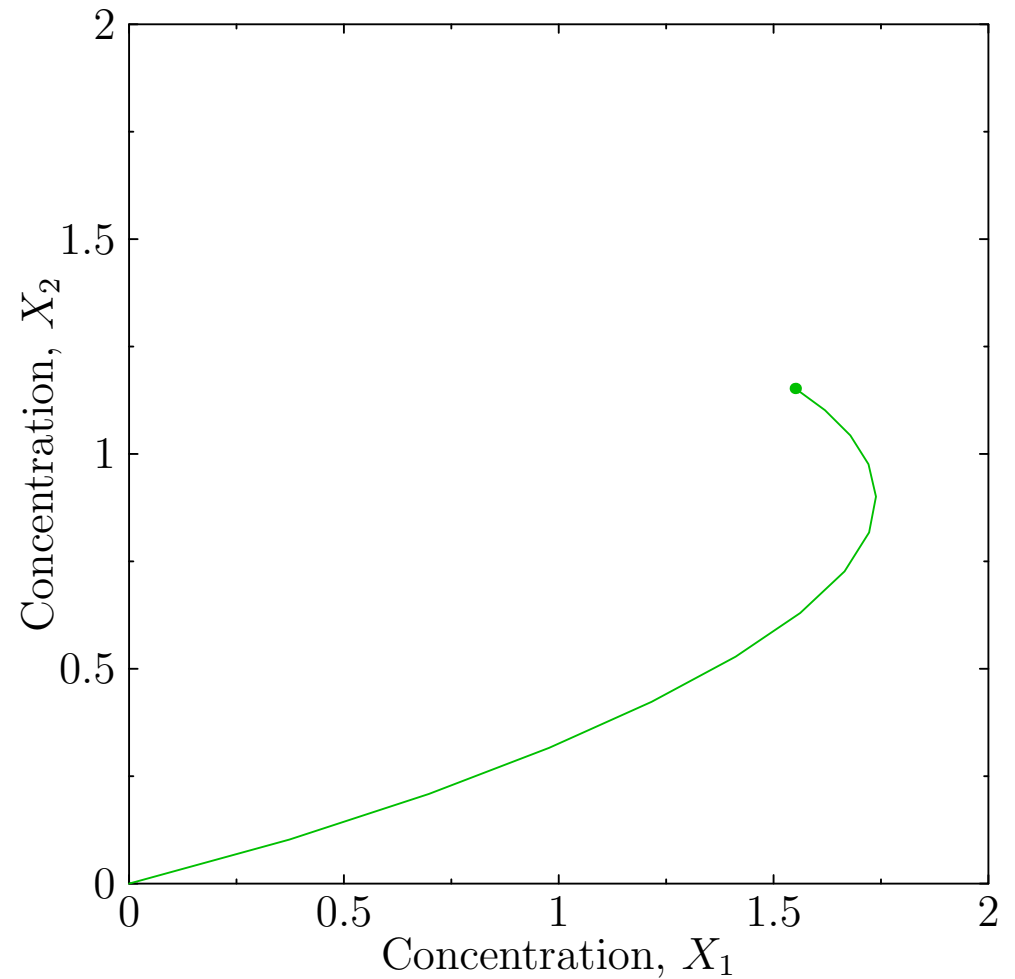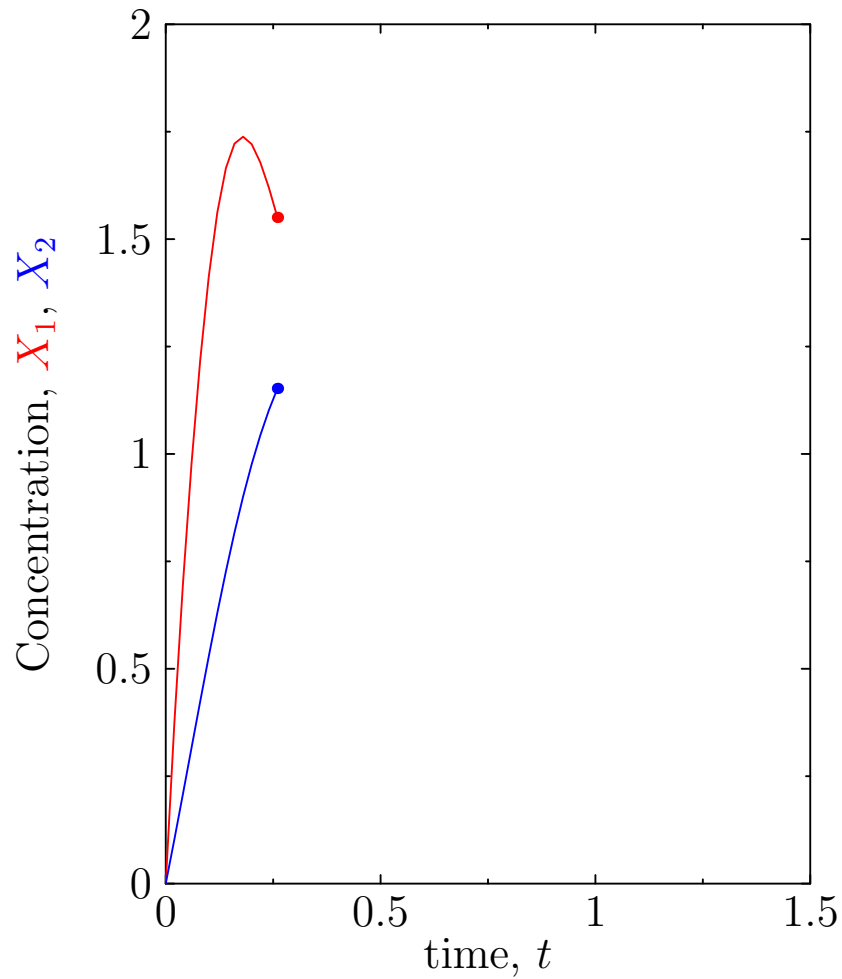



$$K = 1, k_1 = 20, k_2 = k_3 = k_4 = 5, k_5 = 2, n = 4$$

Solving the Dynamics

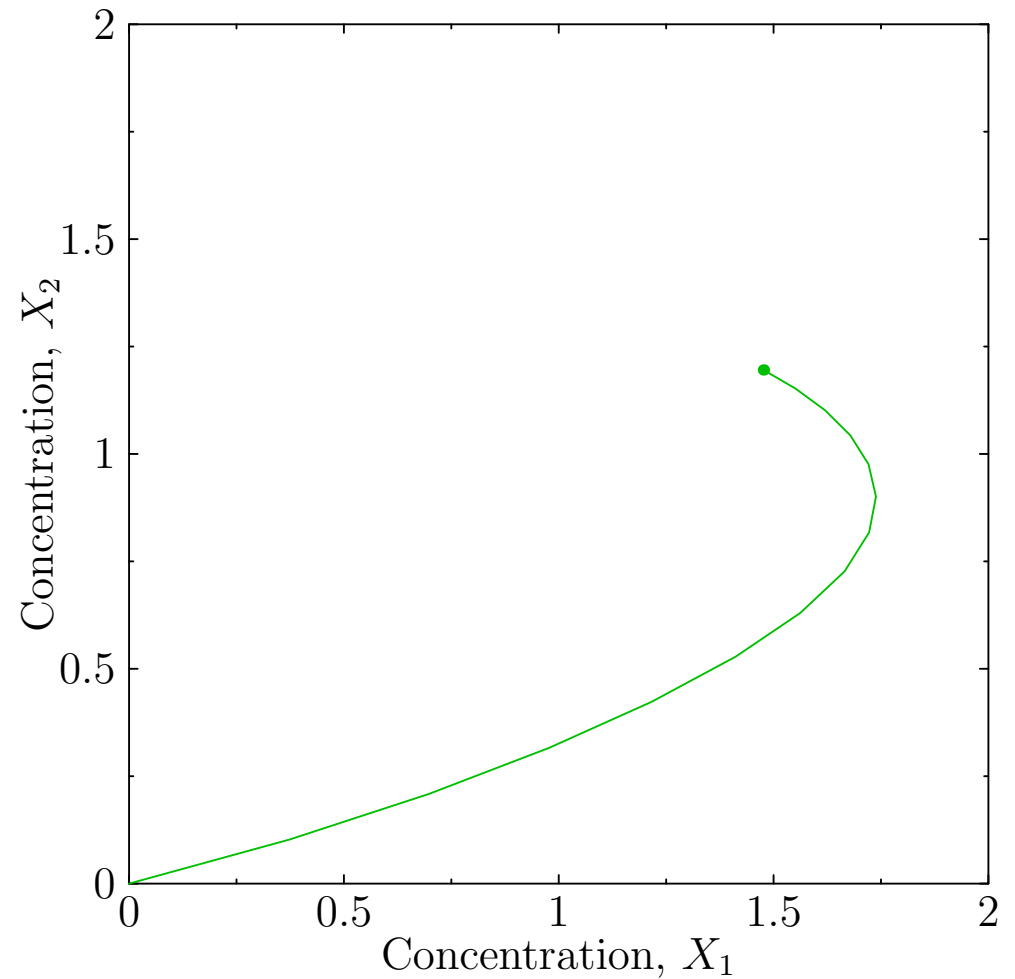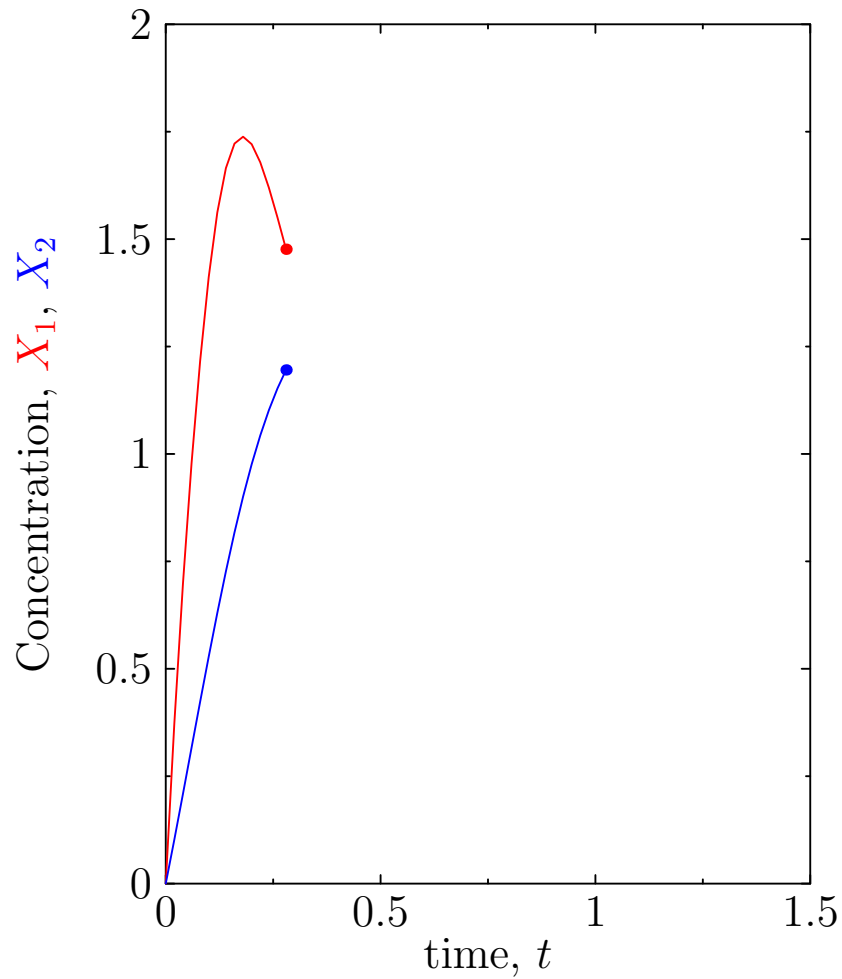



$$K = 1, k_1 = 20, k_2 = k_3 = k_4 = 5, k_5 = 2, n = 4$$

Solving the Dynamics

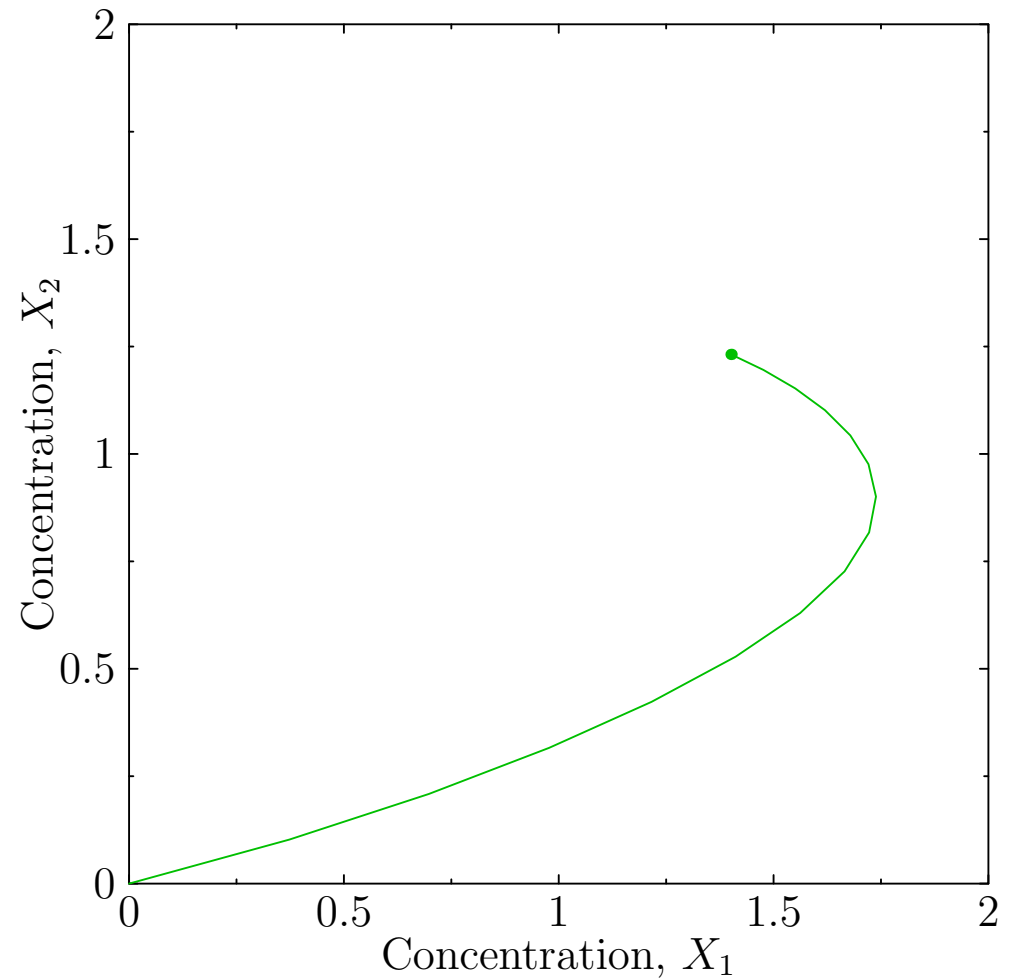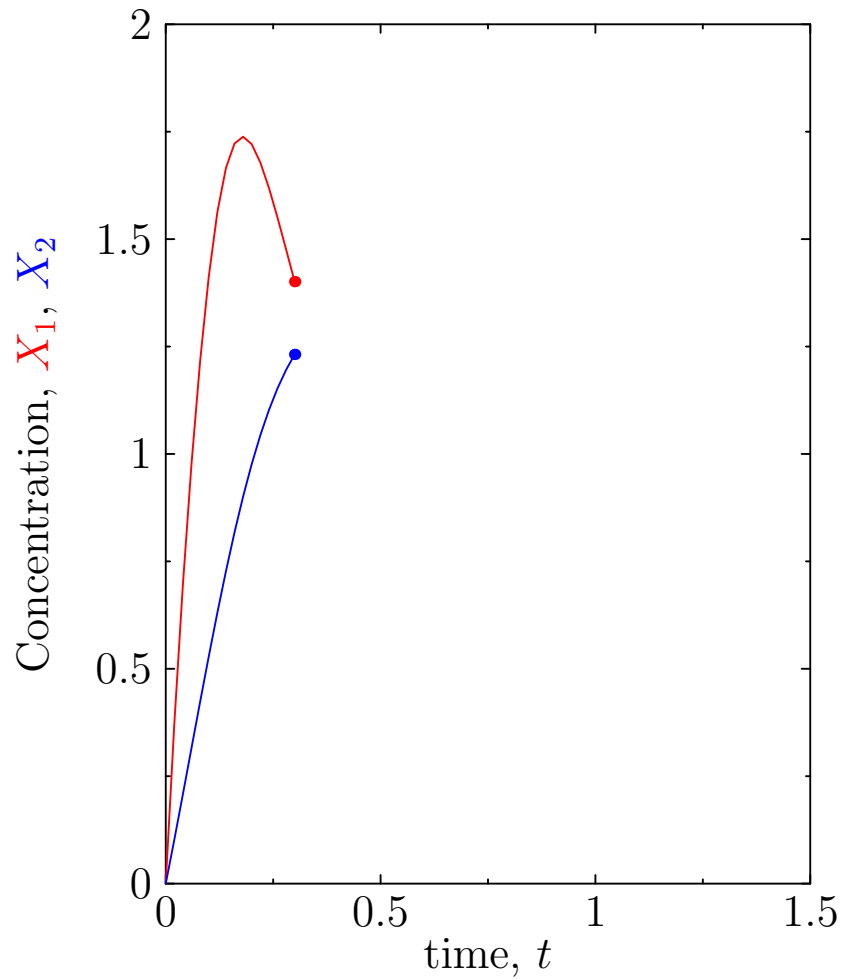



$$K = 1, k_1 = 20, k_2 = k_3 = k_4 = 5, k_5 = 2, n = 4$$

Solving the Dynamics

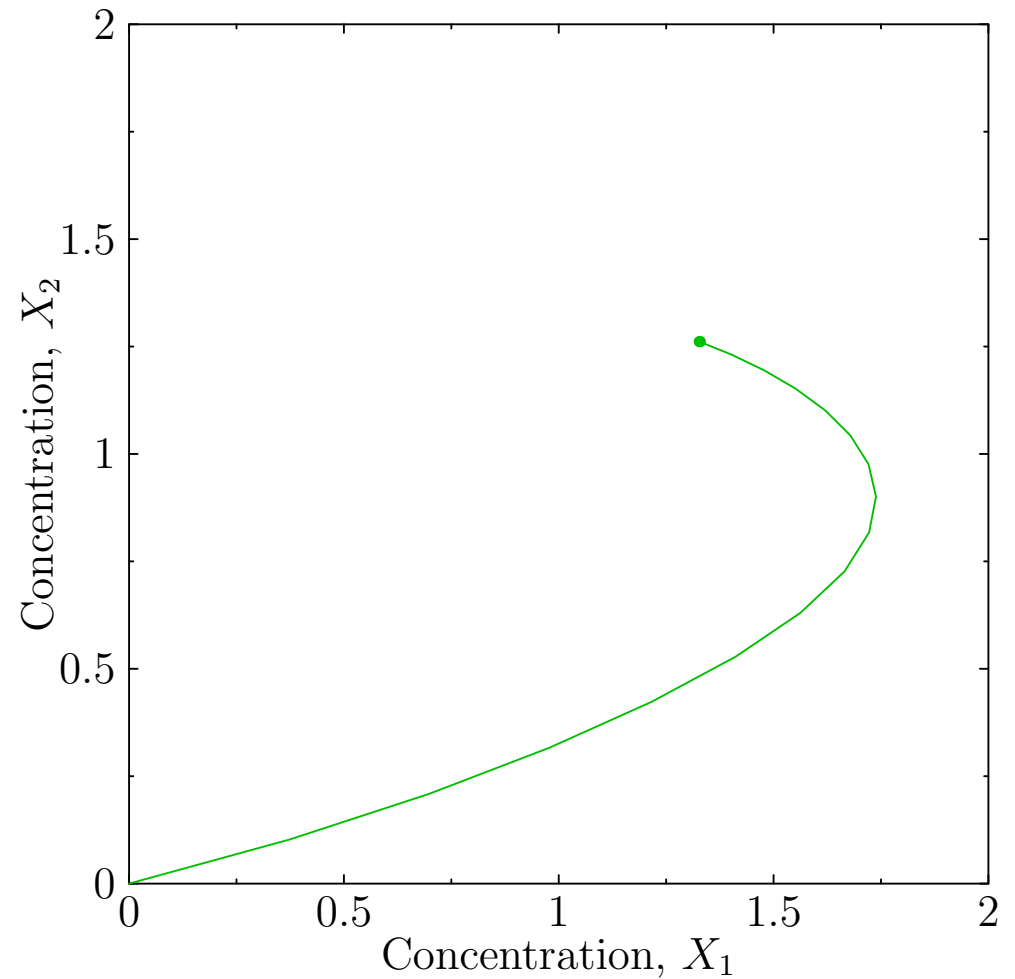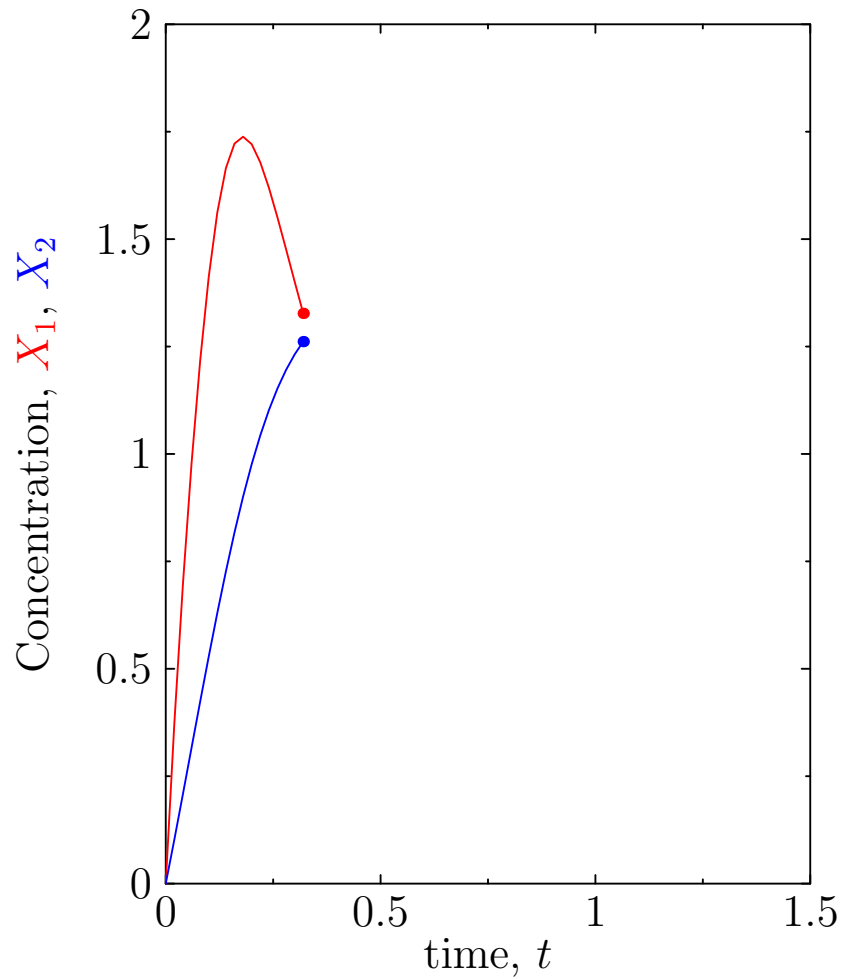



$$K = 1, k_1 = 20, k_2 = k_3 = k_4 = 5, k_5 = 2, n = 4$$

Solving the Dynamics

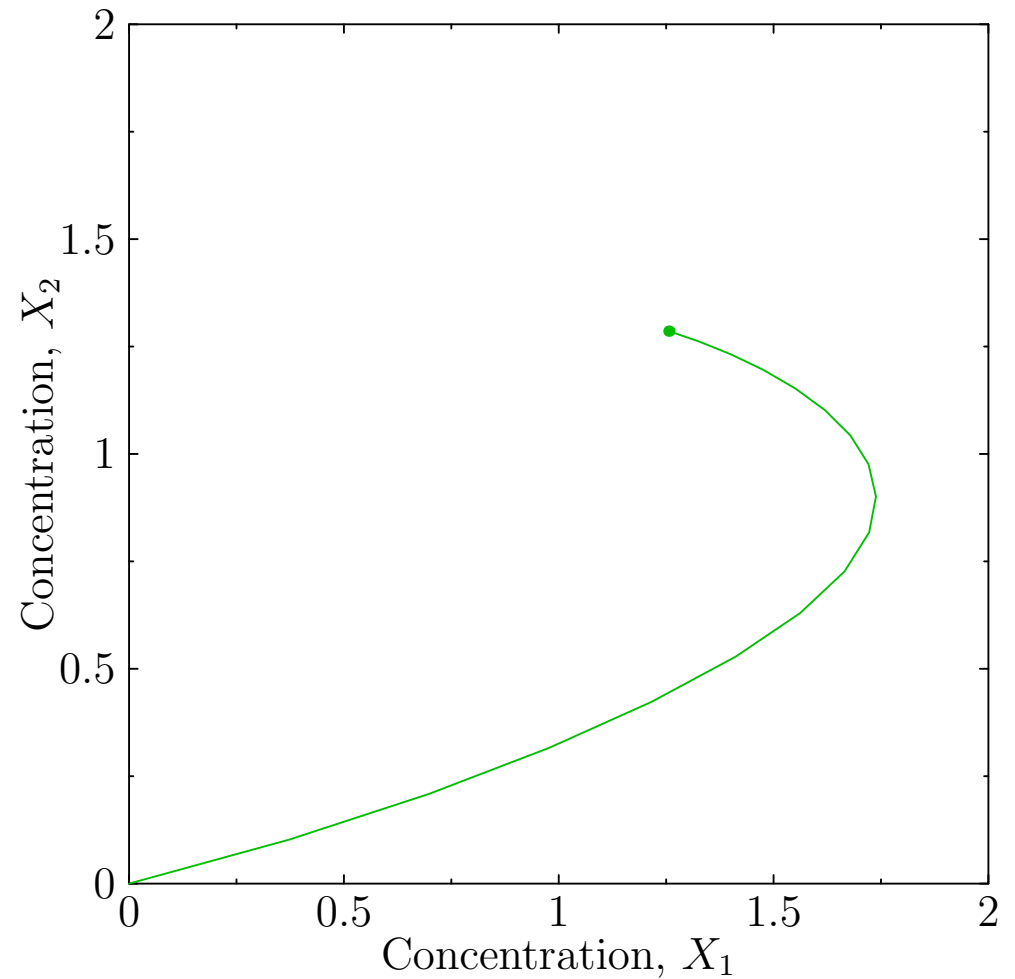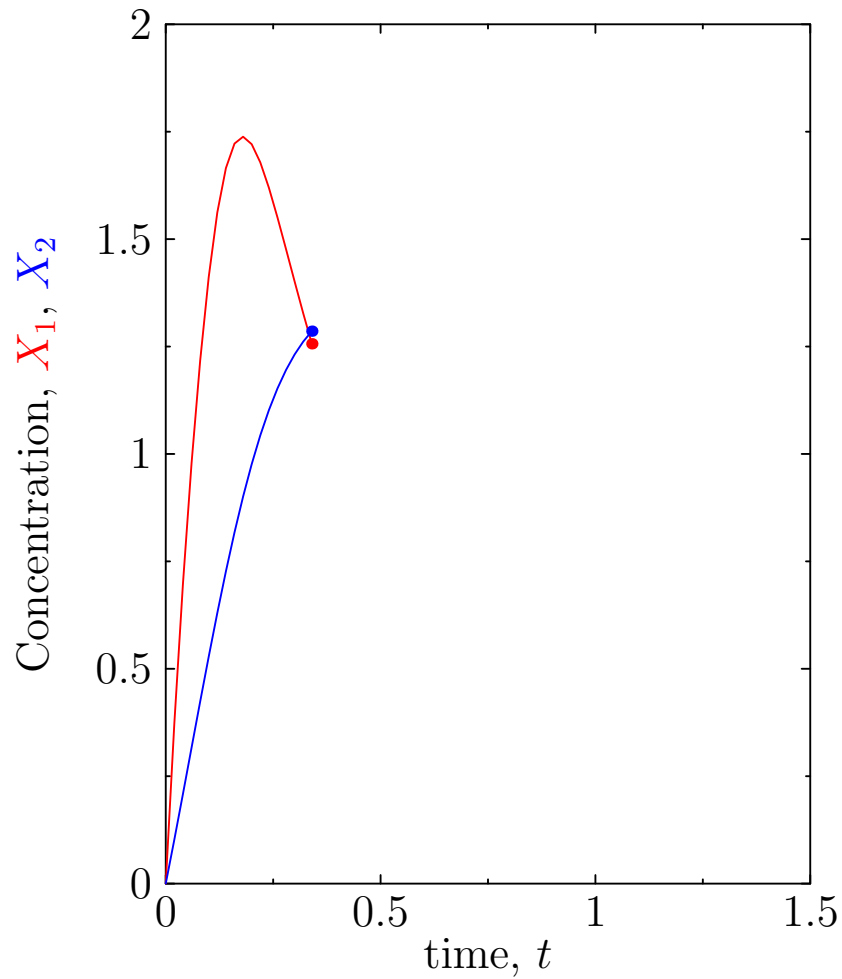



$$K = 1, k_1 = 20, k_2 = k_3 = k_4 = 5, k_5 = 2, n = 4$$

Solving the Dynamics

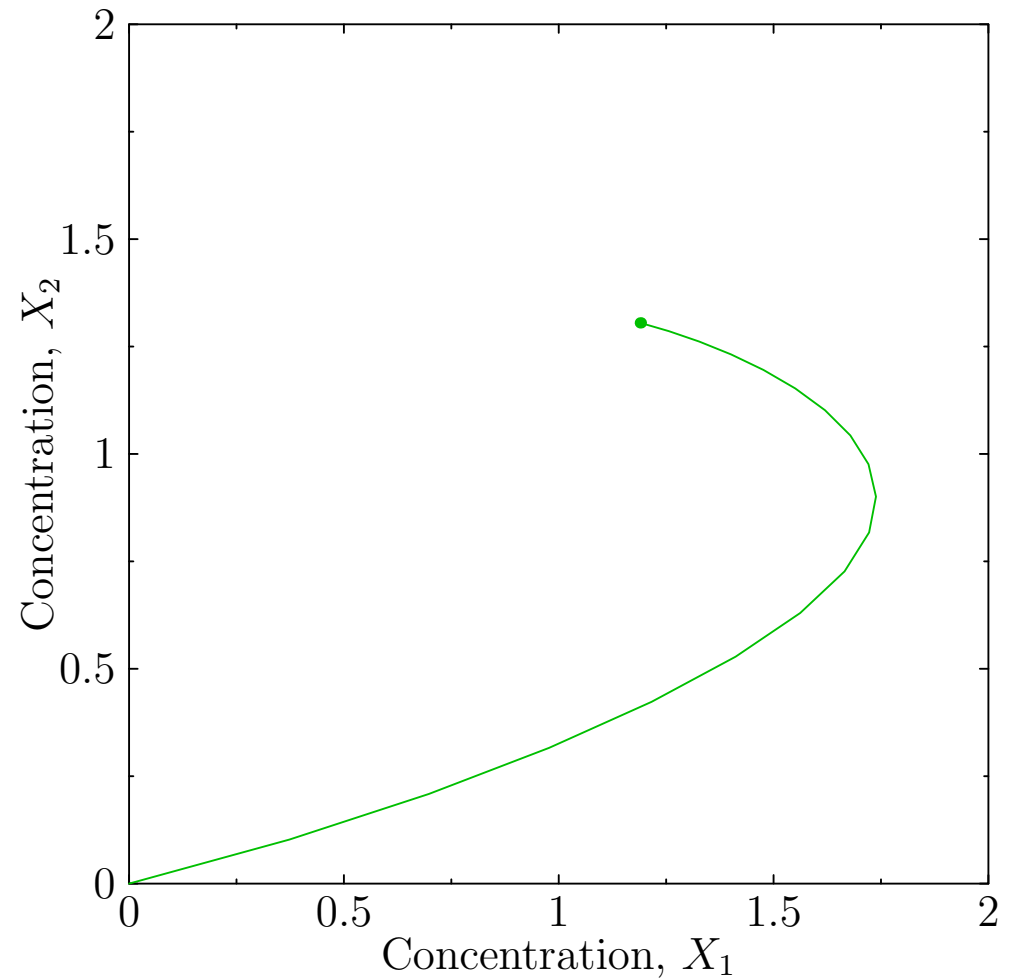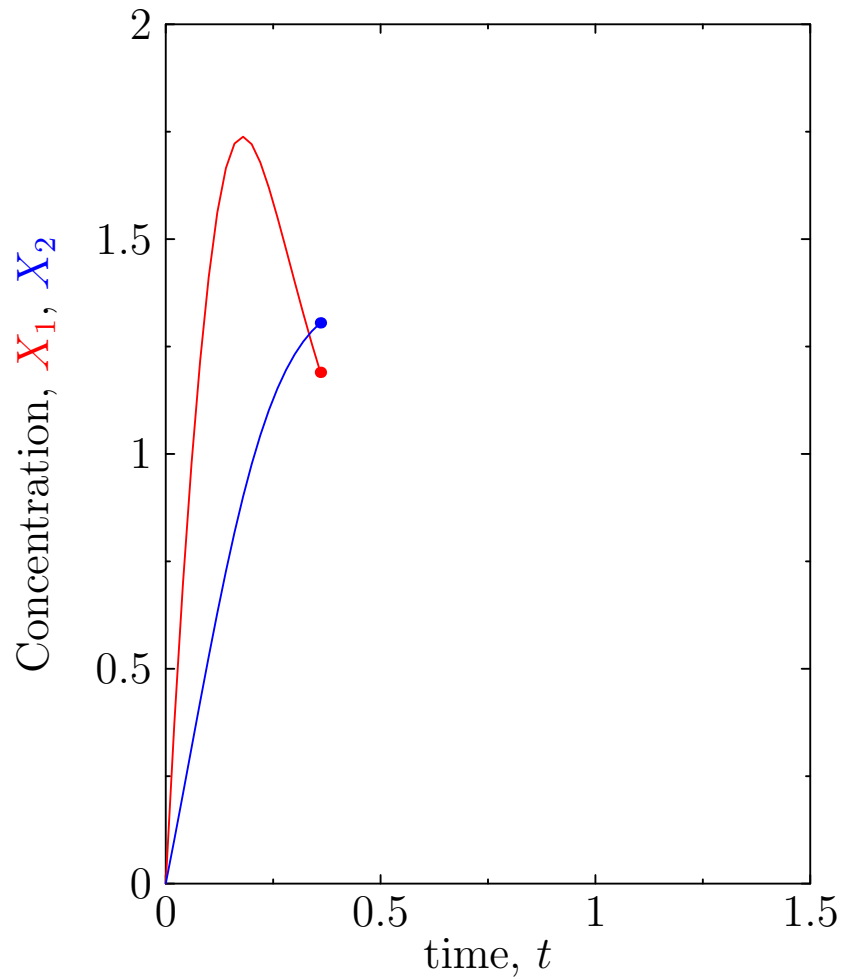



$$K = 1, k_1 = 20, k_2 = k_3 = k_4 = 5, k_5 = 2, n = 4$$

Solving the Dynamics

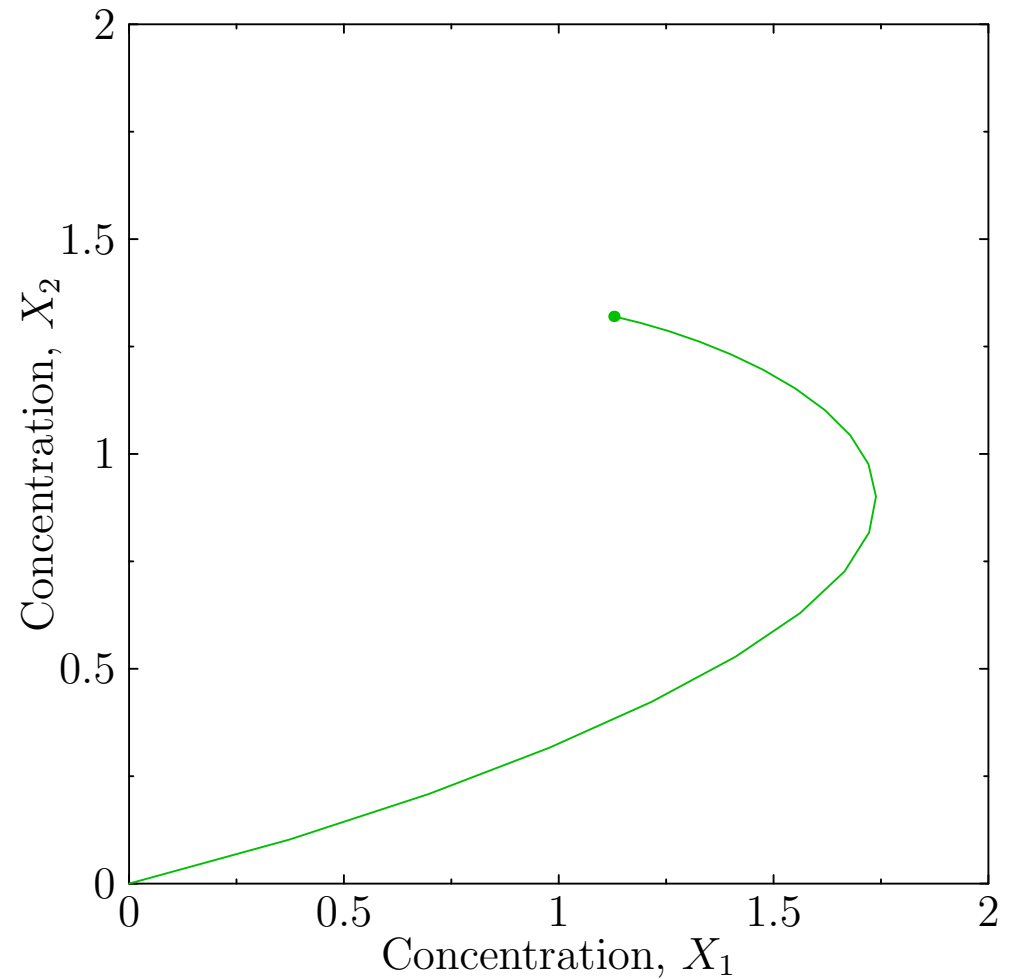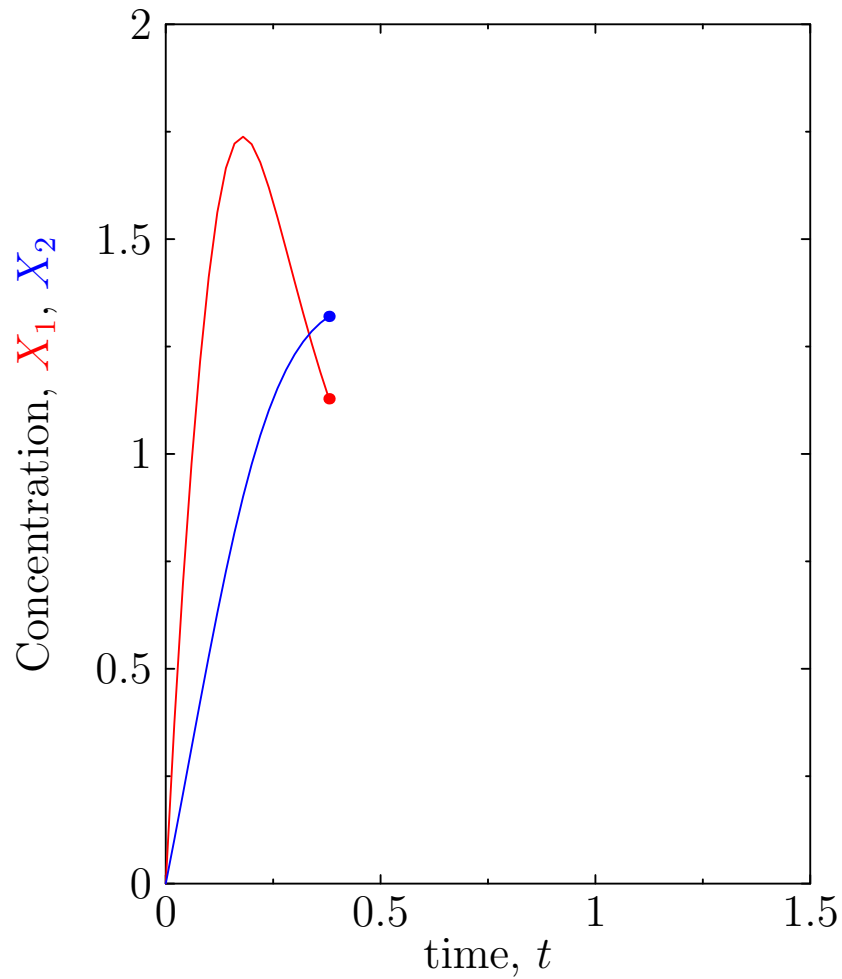



$$K = 1, k_1 = 20, k_2 = k_3 = k_4 = 5, k_5 = 2, n = 4$$

Solving the Dynamics

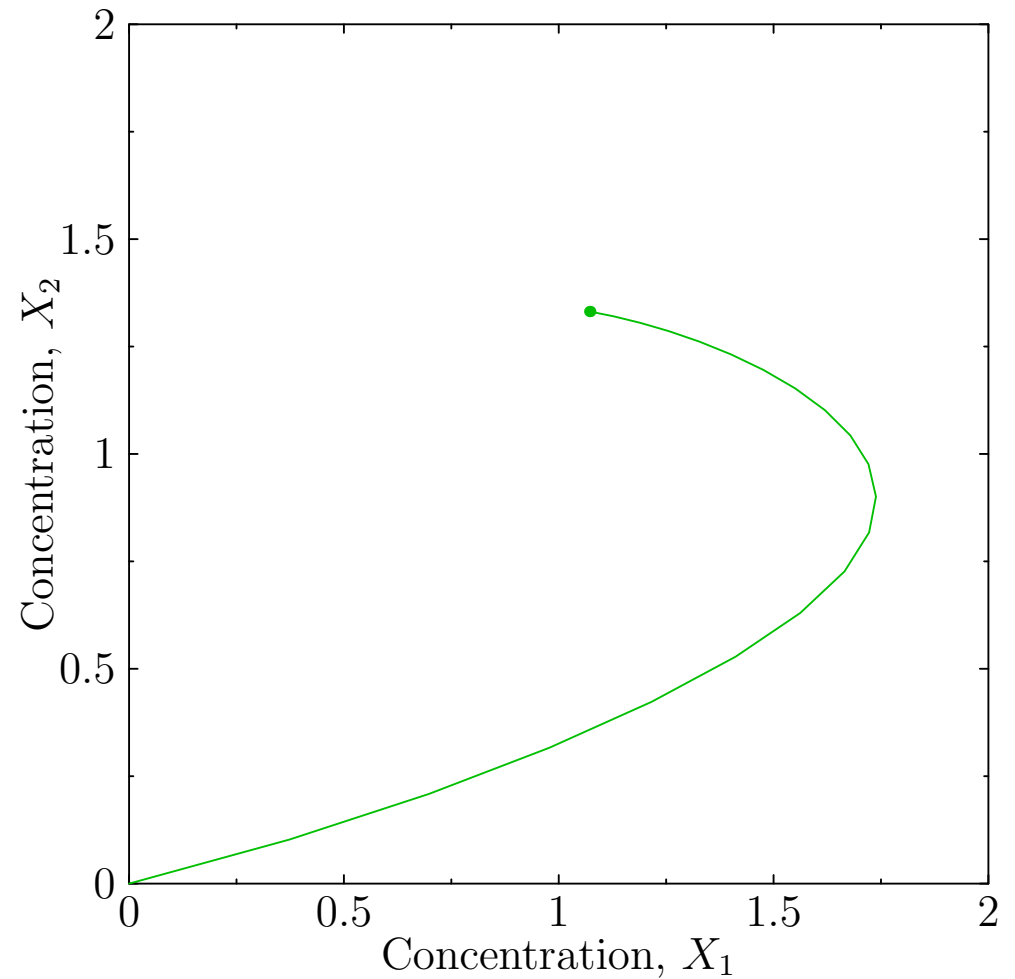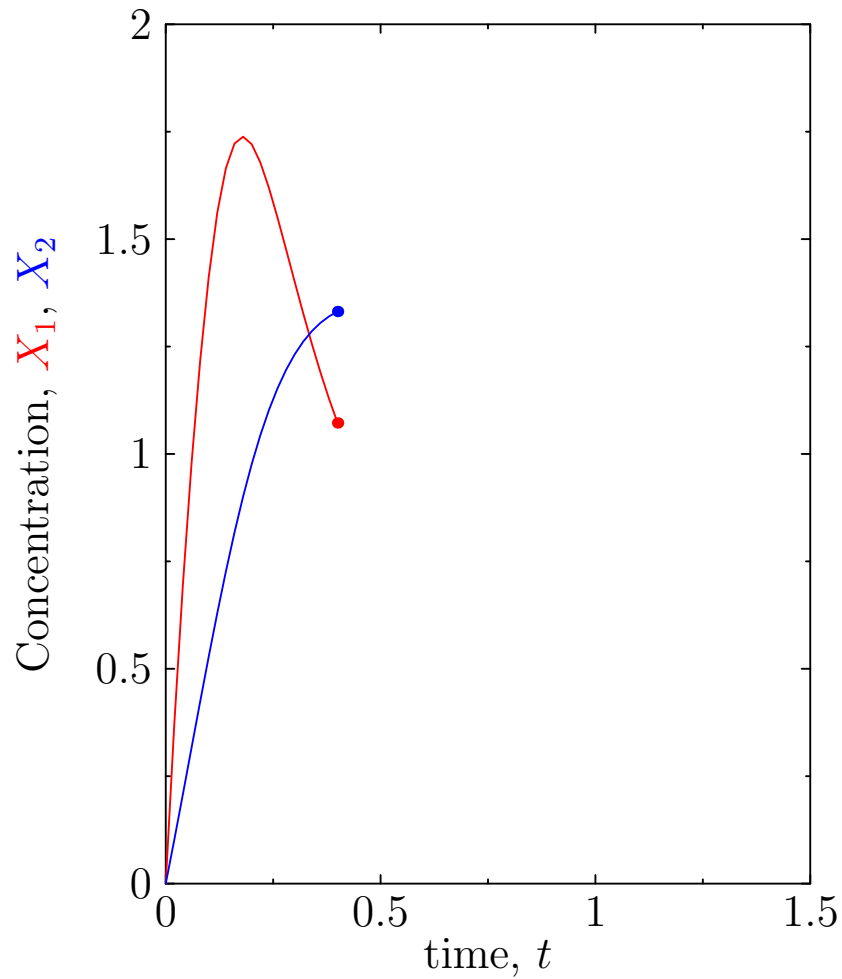



$$K = 1, k_1 = 20, k_2 = k_3 = k_4 = 5, k_5 = 2, n = 4$$

Solving the Dynamics

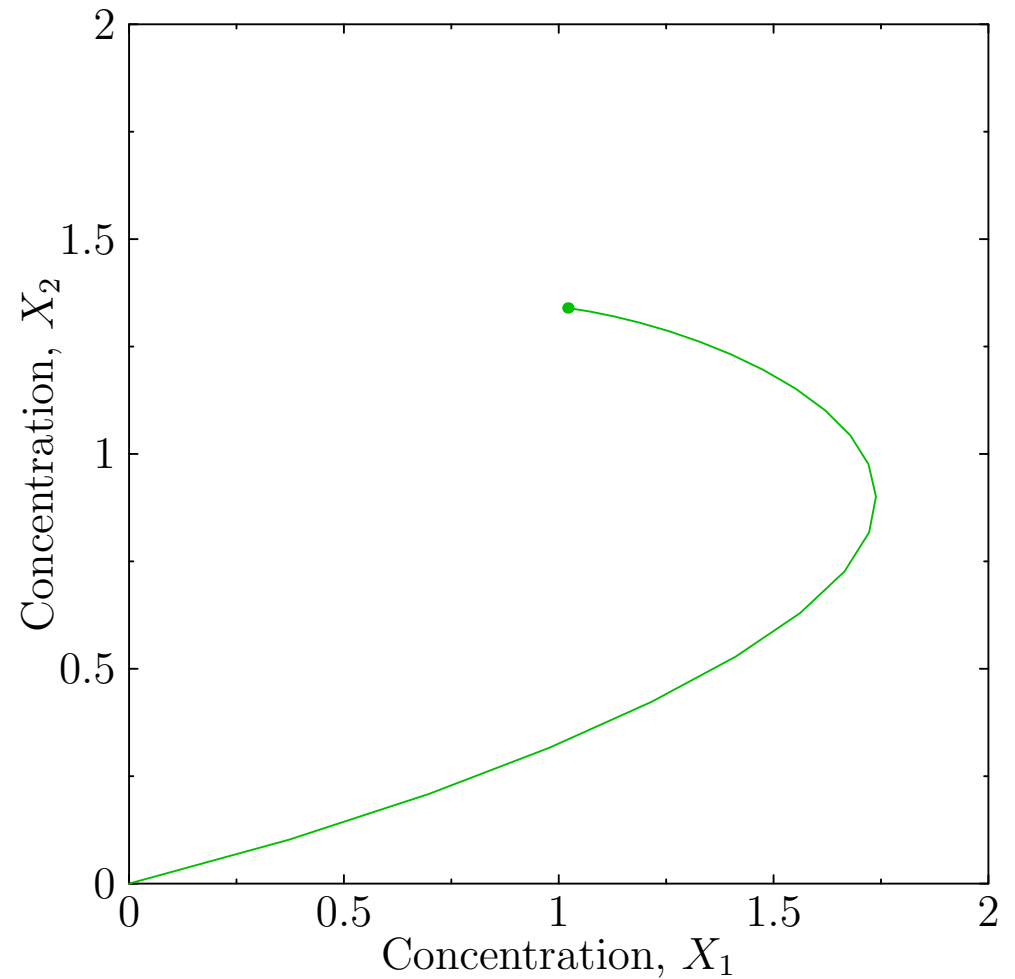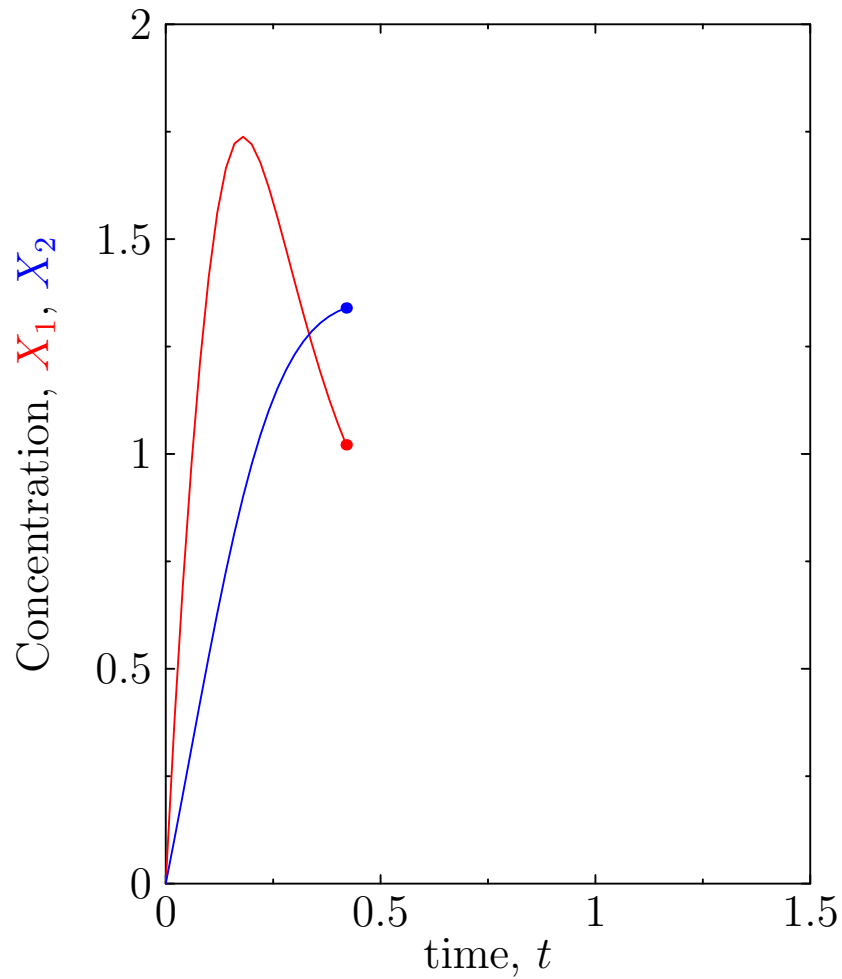



$$K = 1, k_1 = 20, k_2 = k_3 = k_4 = 5, k_5 = 2, n = 4$$

Solving the Dynamics

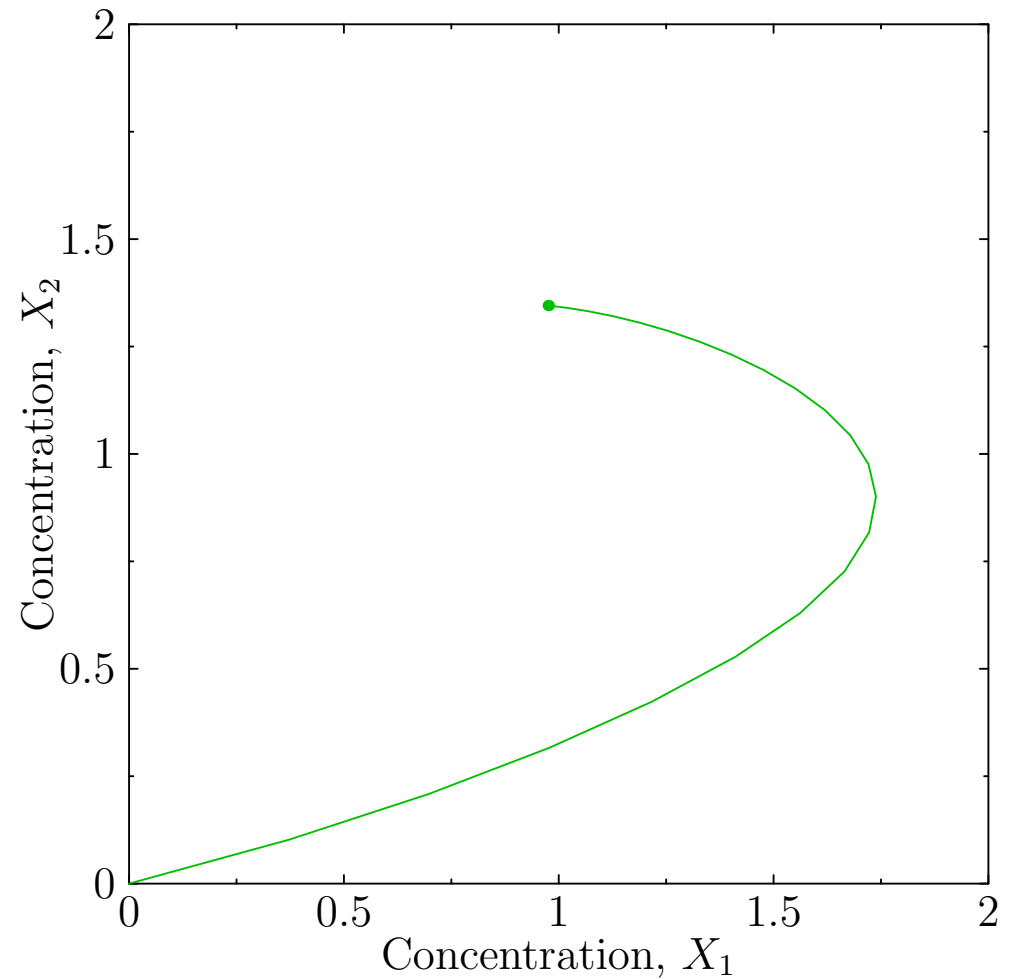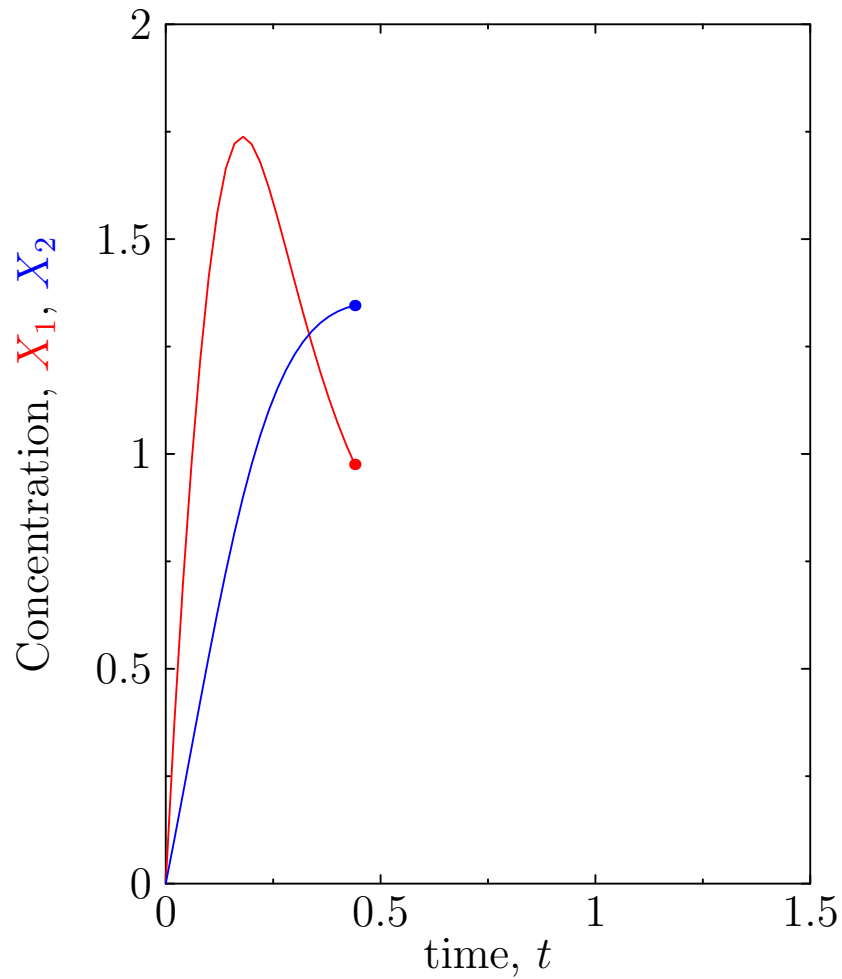



$$K = 1, k_1 = 20, k_2 = k_3 = k_4 = 5, k_5 = 2, n = 4$$

Solving the Dynamics

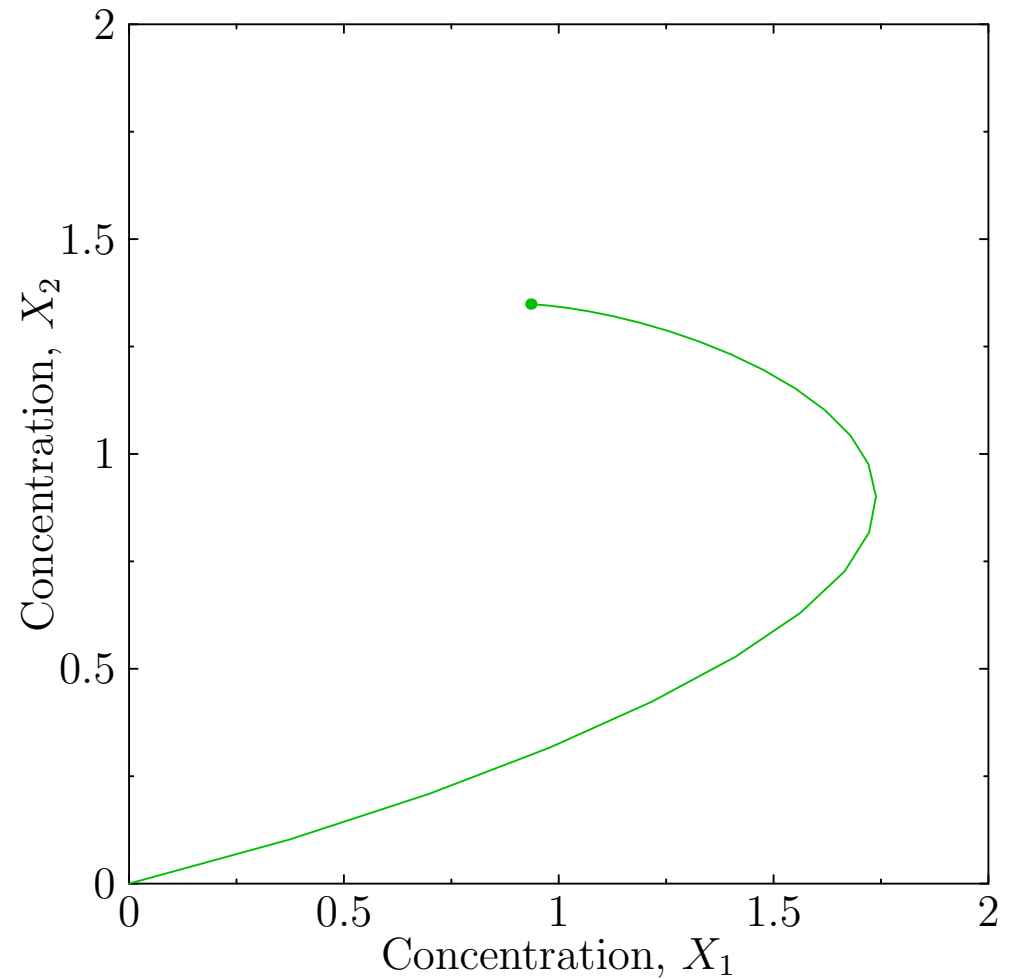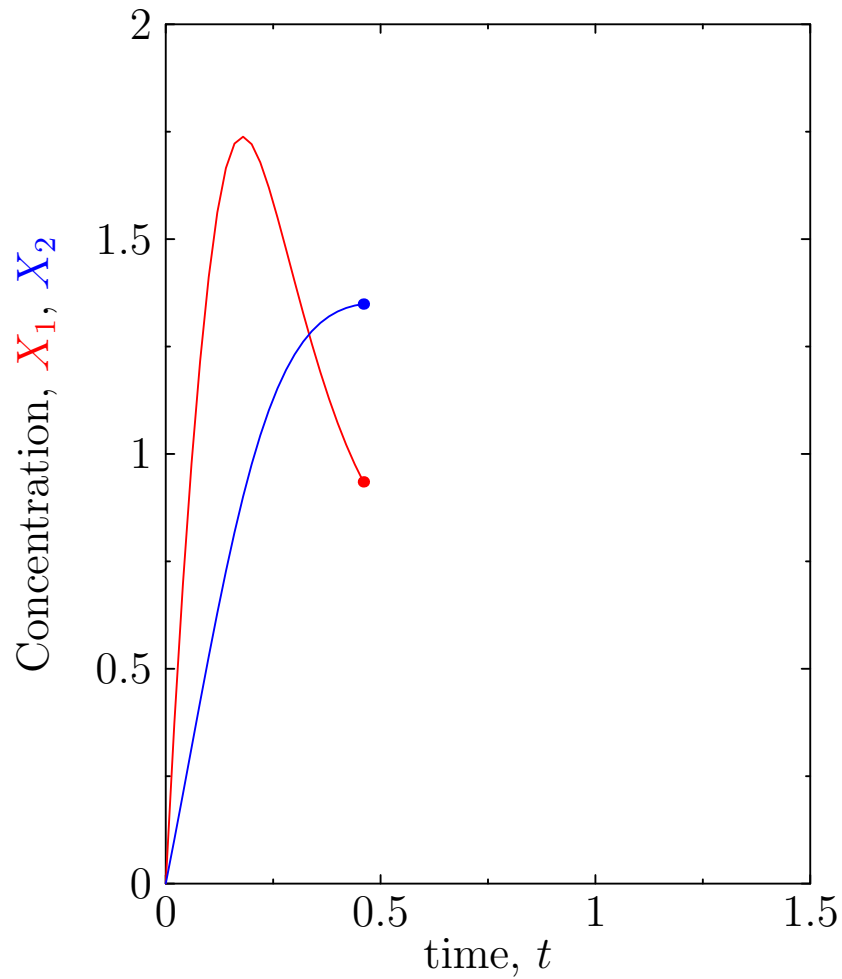



$$K = 1, k_1 = 20, k_2 = k_3 = k_4 = 5, k_5 = 2, n = 4$$

Solving the Dynamics

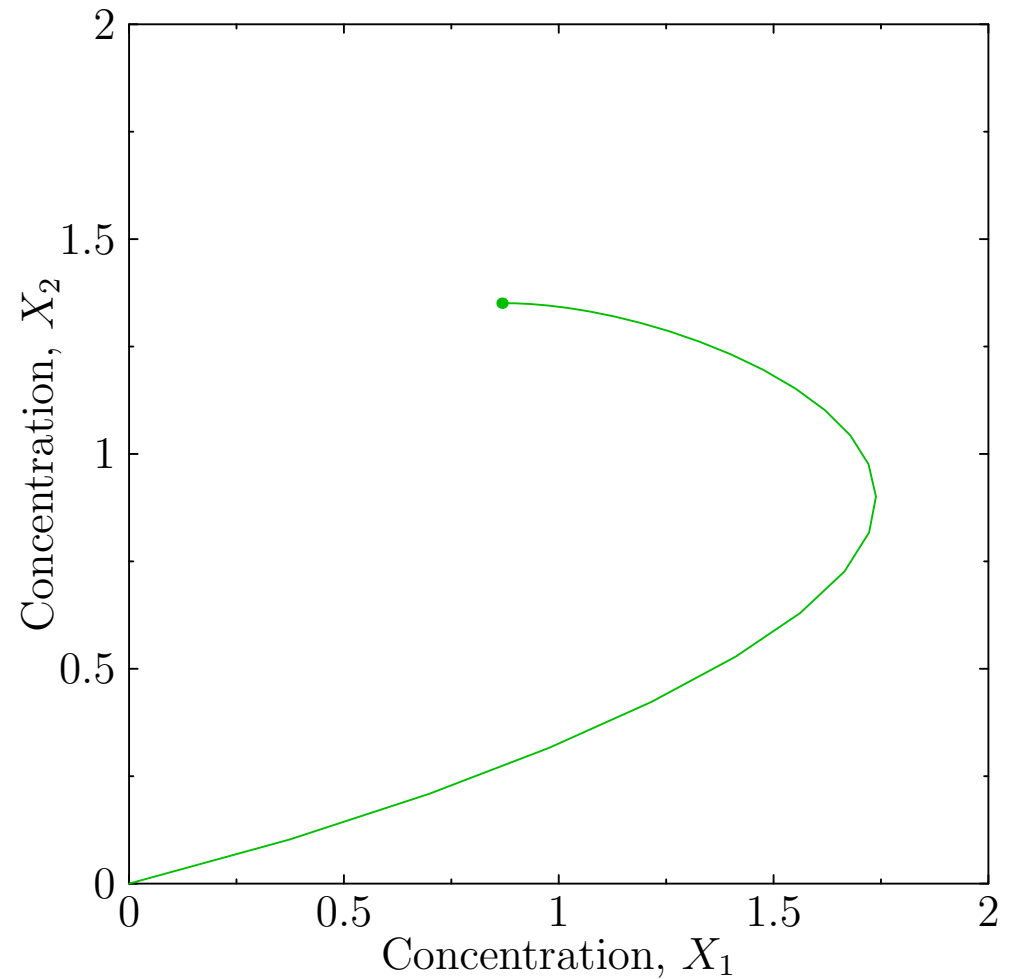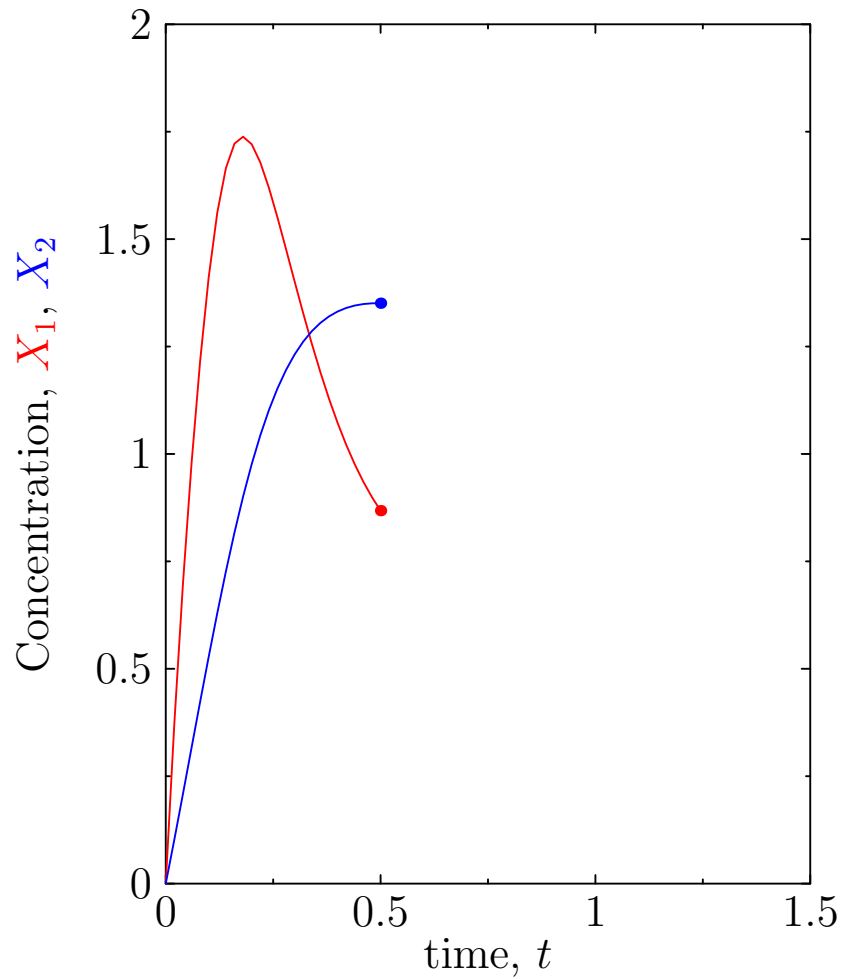



$$K = 1, k_1 = 20, k_2 = k_3 = k_4 = 5, k_5 = 2, n = 4$$

Solving the Dynamics

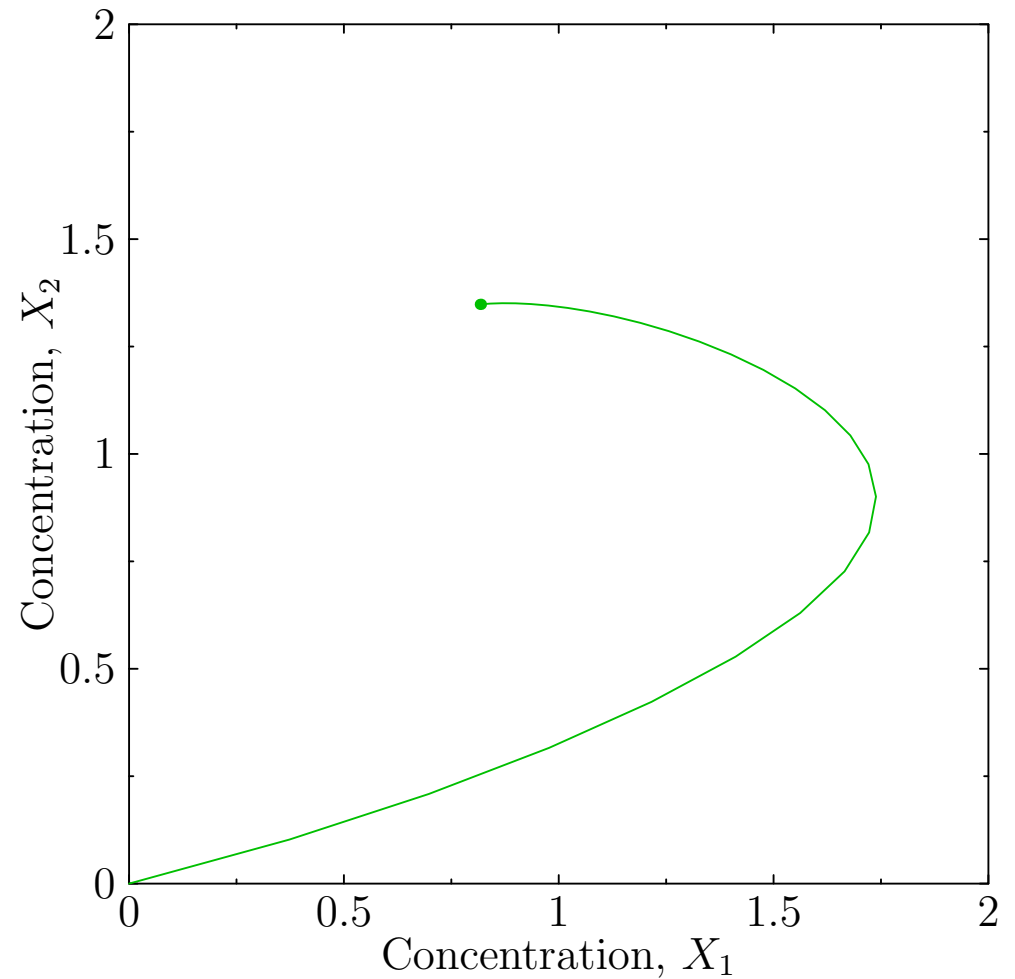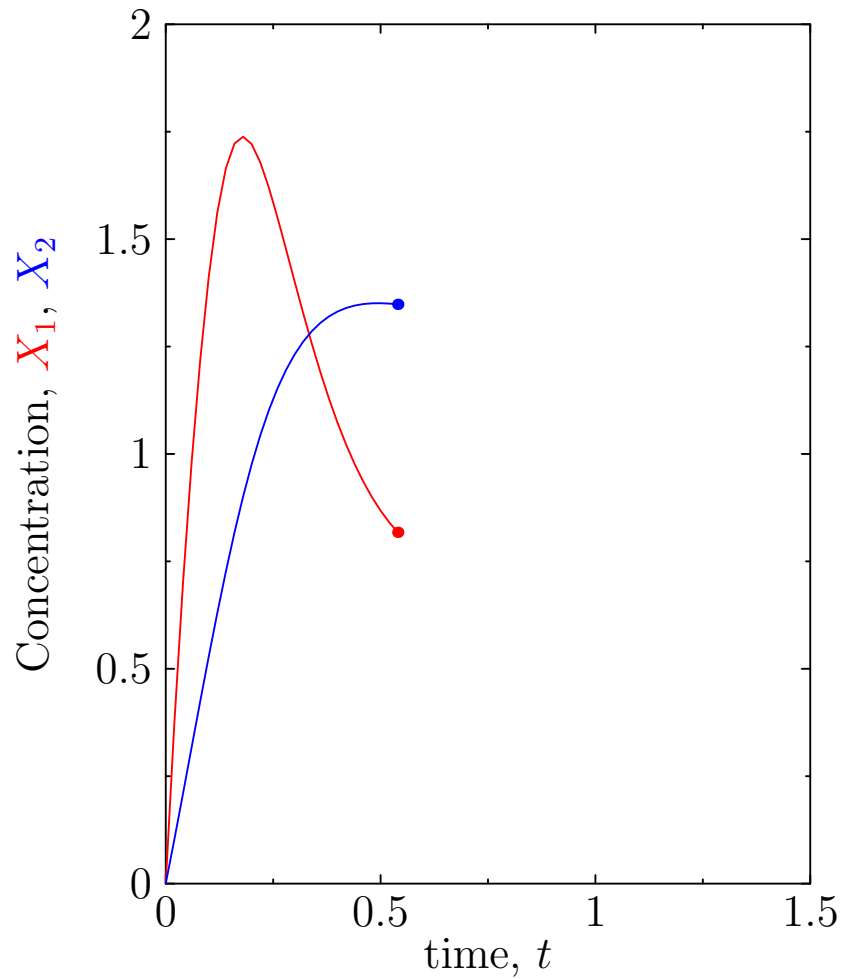



$$K = 1, k_1 = 20, k_2 = k_3 = k_4 = 5, k_5 = 2, n = 4$$

Solving the Dynamics

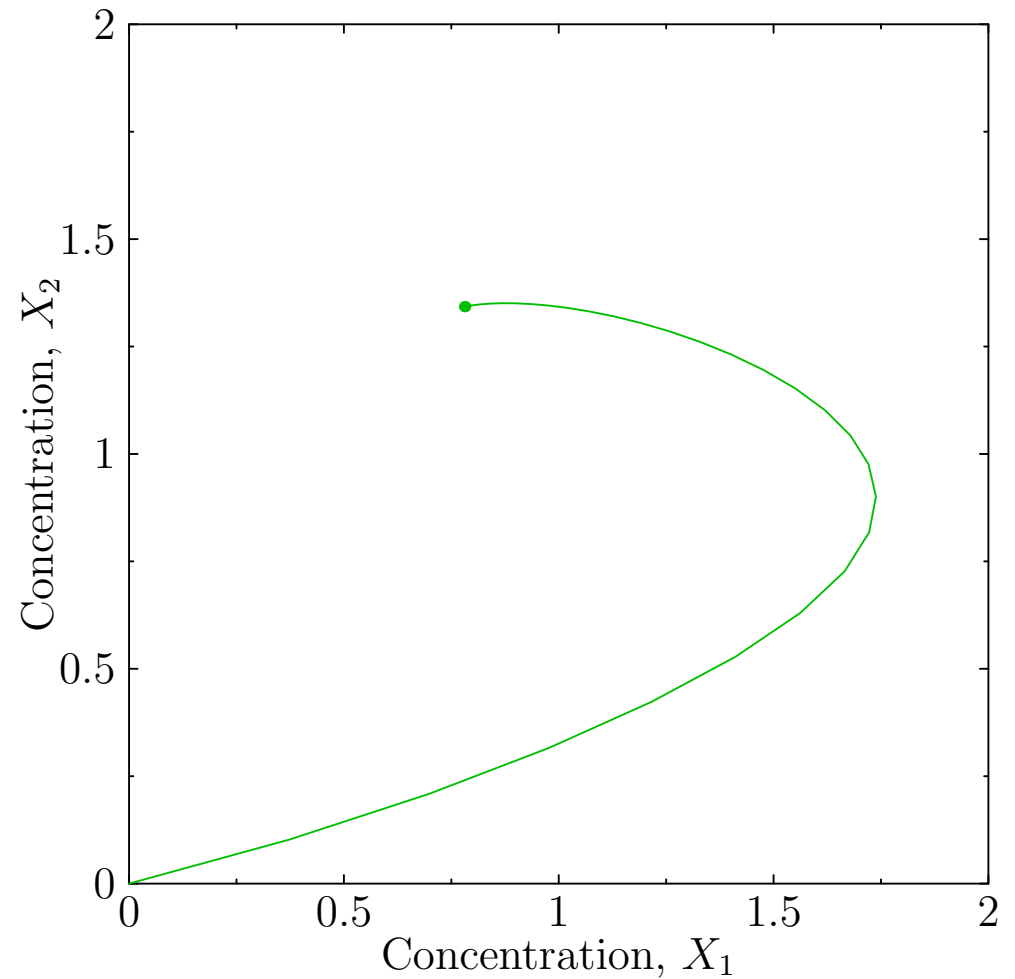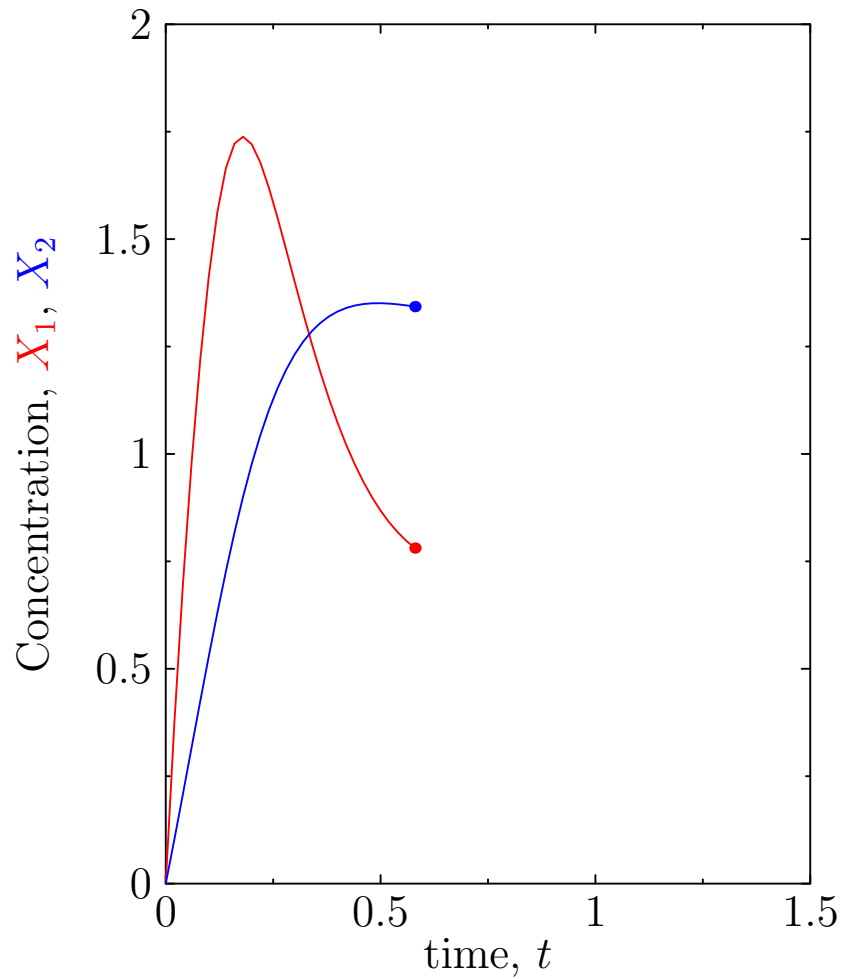



$$K = 1, k_1 = 20, k_2 = k_3 = k_4 = 5, k_5 = 2, n = 4$$

Solving the Dynamics

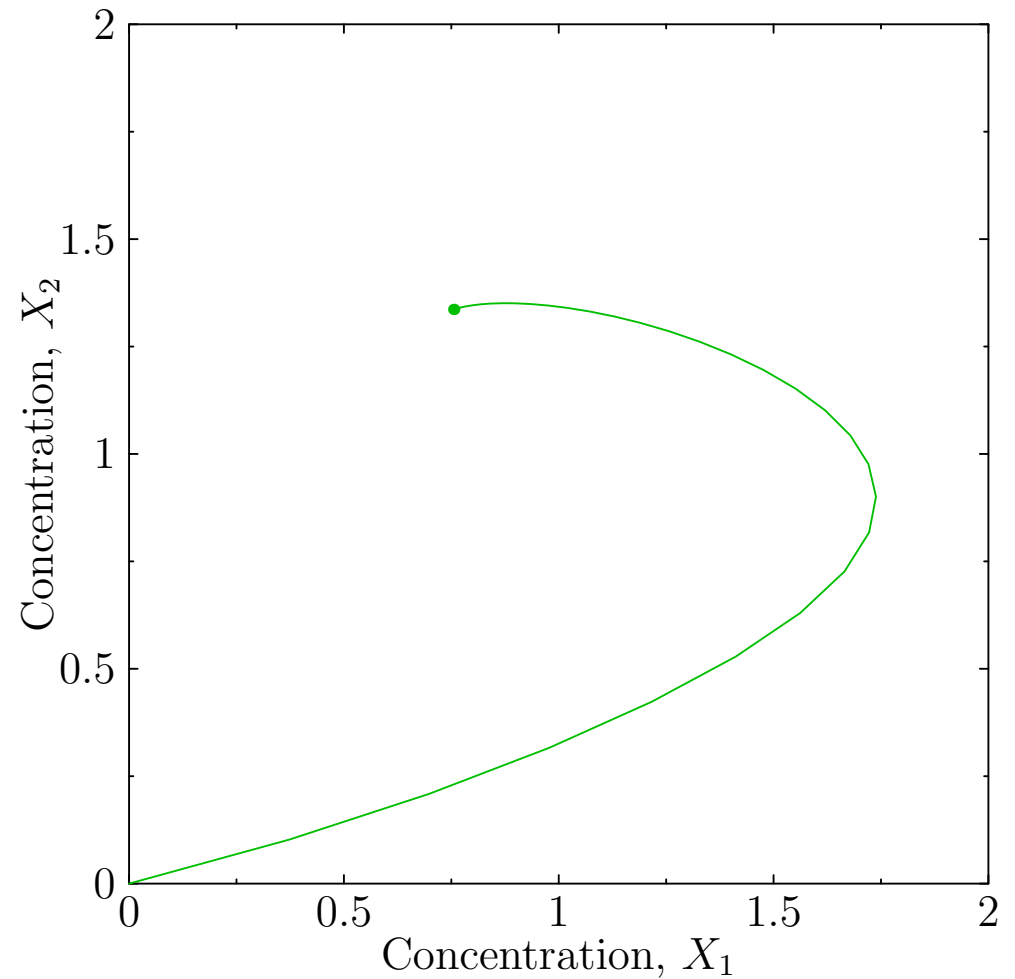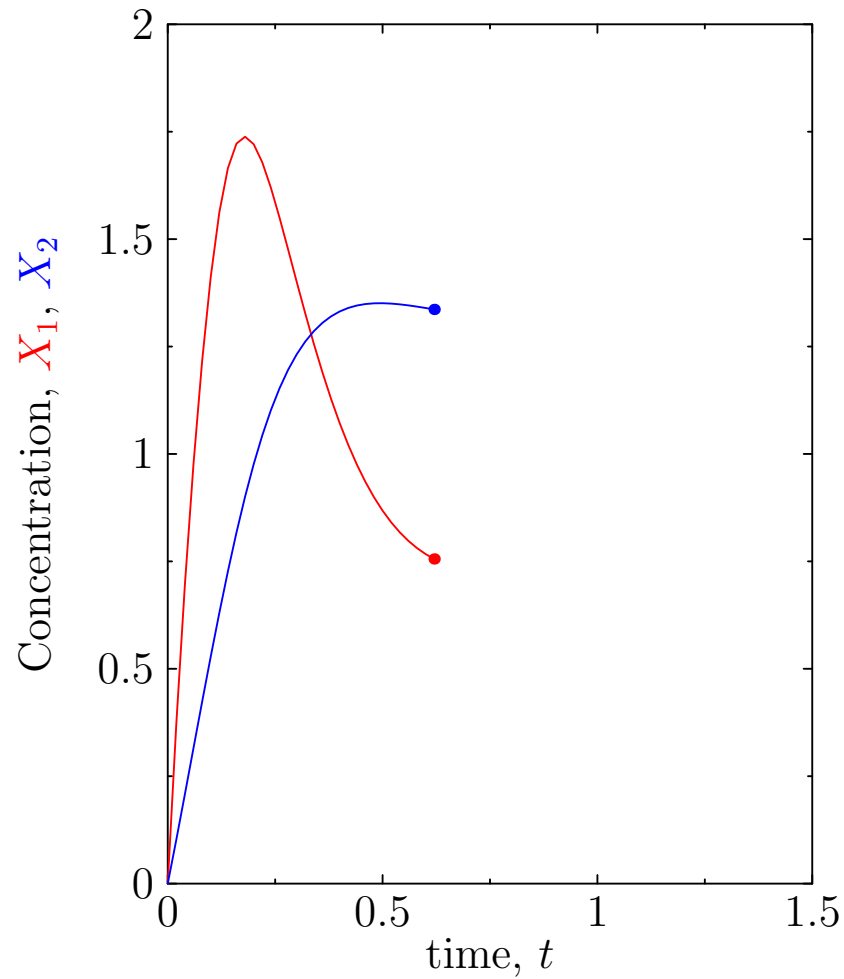



$$K = 1, k_1 = 20, k_2 = k_3 = k_4 = 5, k_5 = 2, n = 4$$

Solving the Dynamics

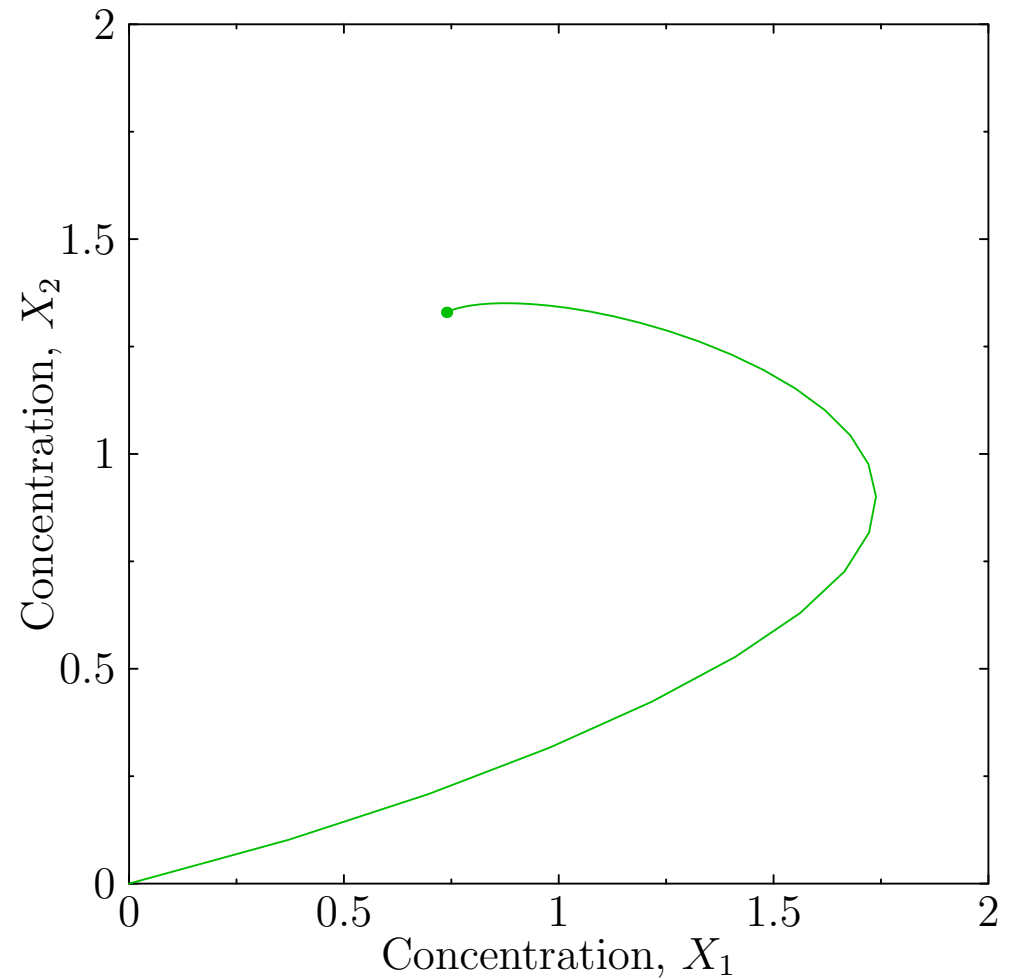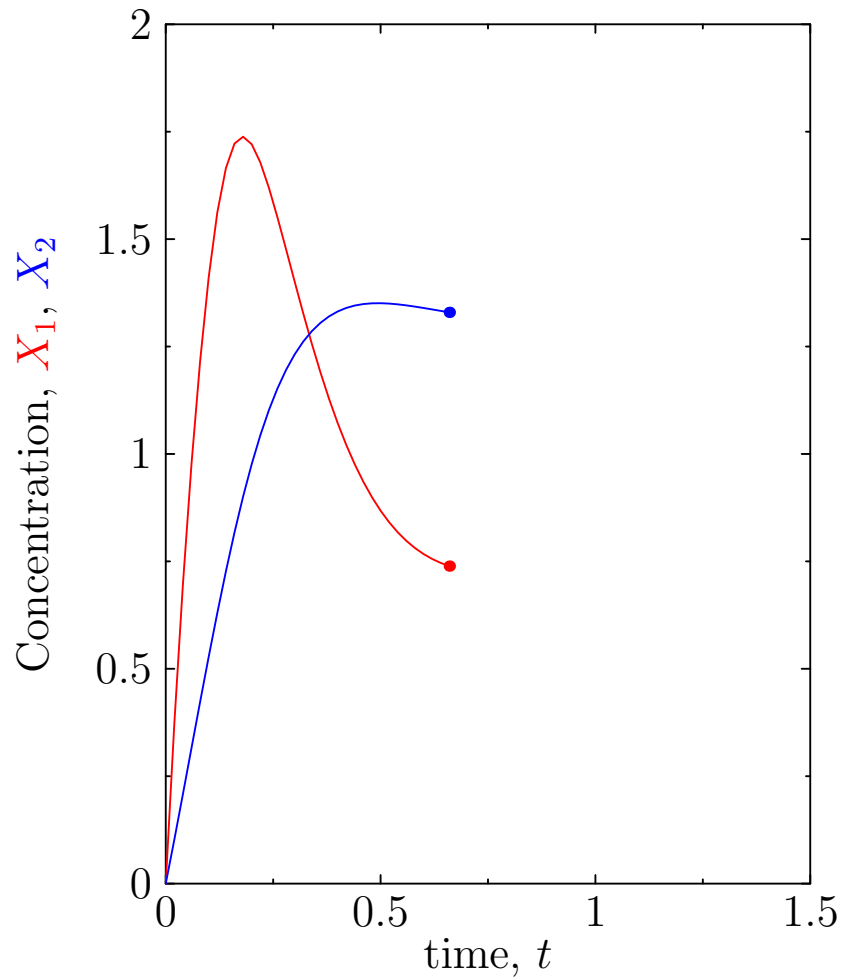



$$K = 1, k_1 = 20, k_2 = k_3 = k_4 = 5, k_5 = 2, n = 4$$

Solving the Dynamics

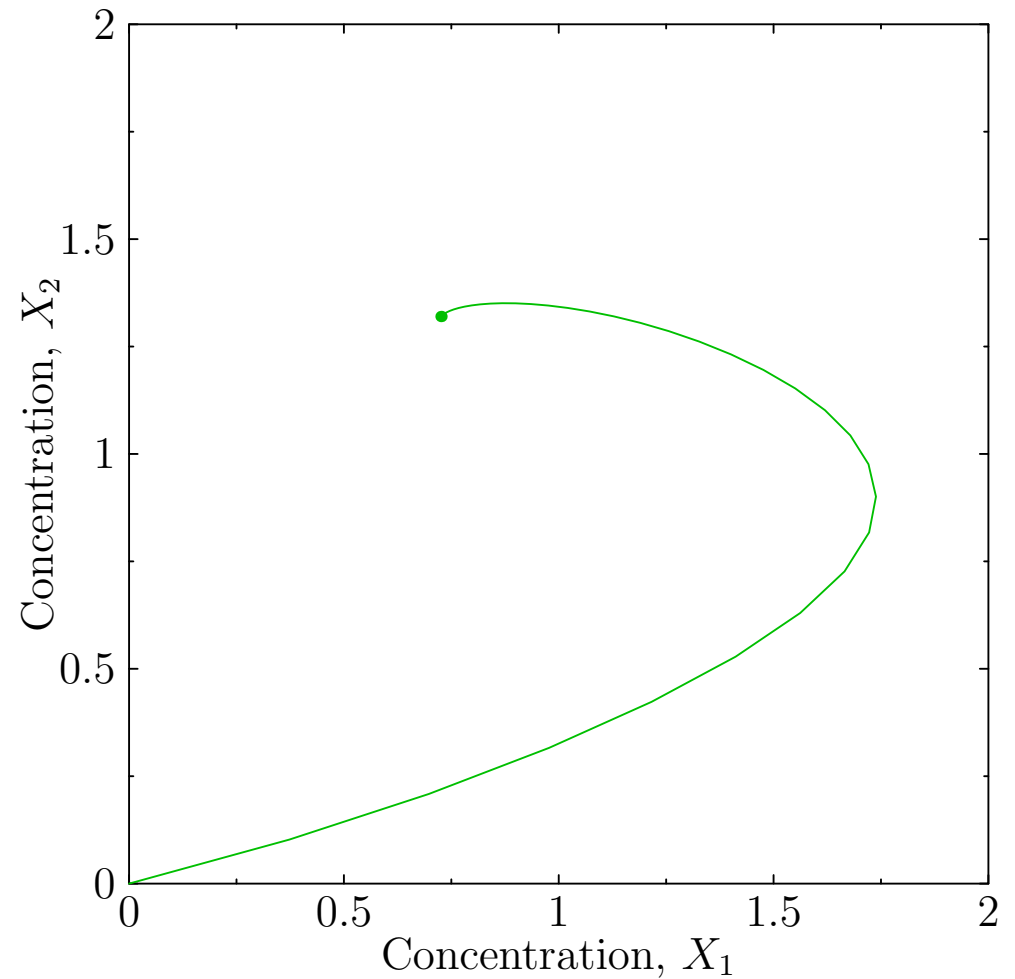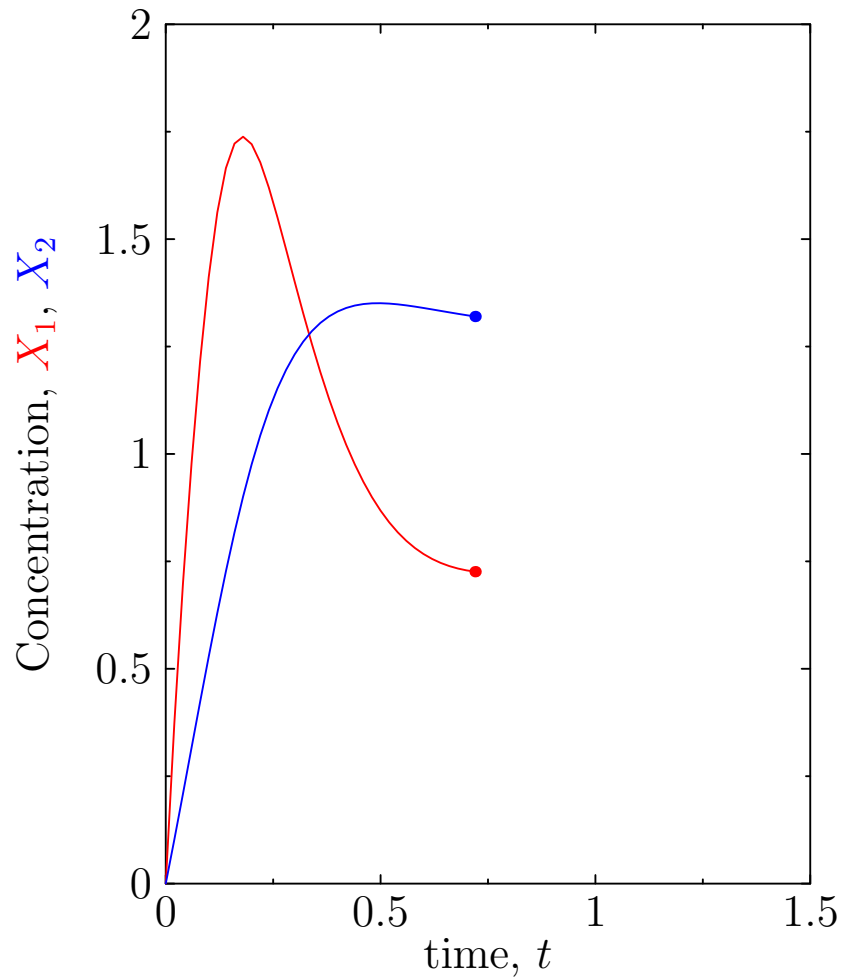



$$K = 1, k_1 = 20, k_2 = k_3 = k_4 = 5, k_5 = 2, n = 4$$

Solving the Dynamics

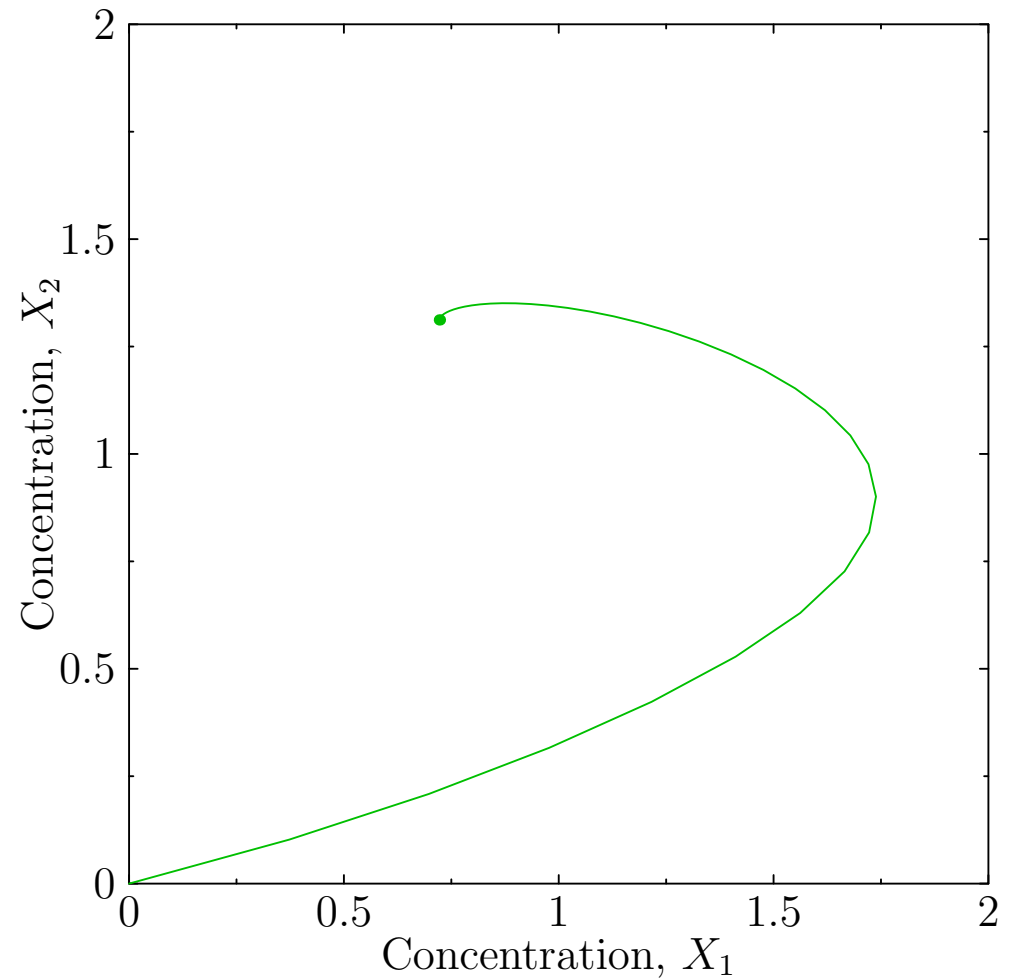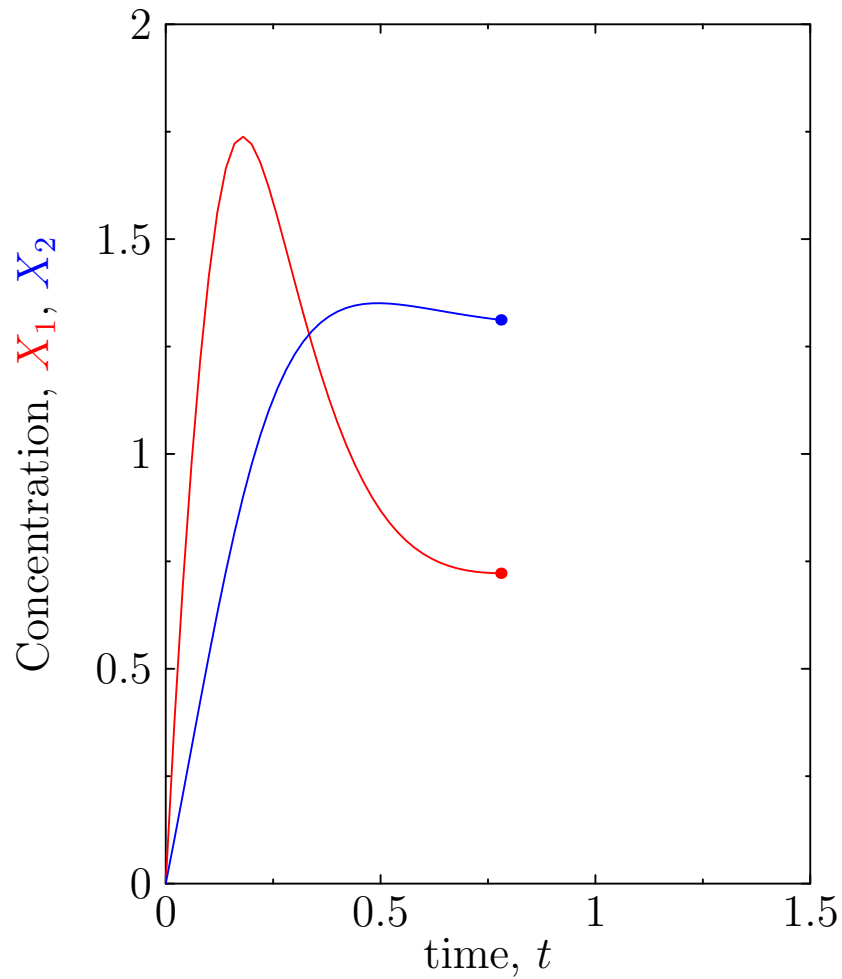



$$K = 1, k_1 = 20, k_2 = k_3 = k_4 = 5, k_5 = 2, n = 4$$

Solving the Dynamics

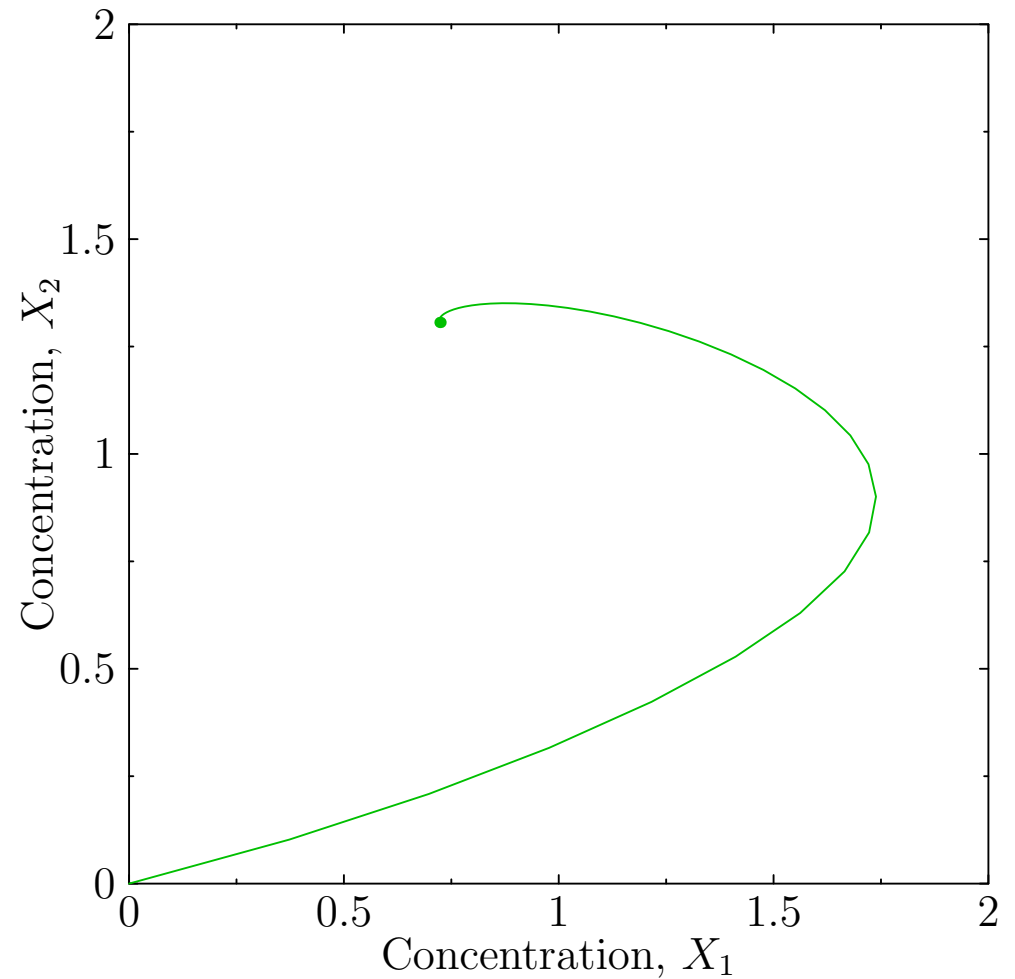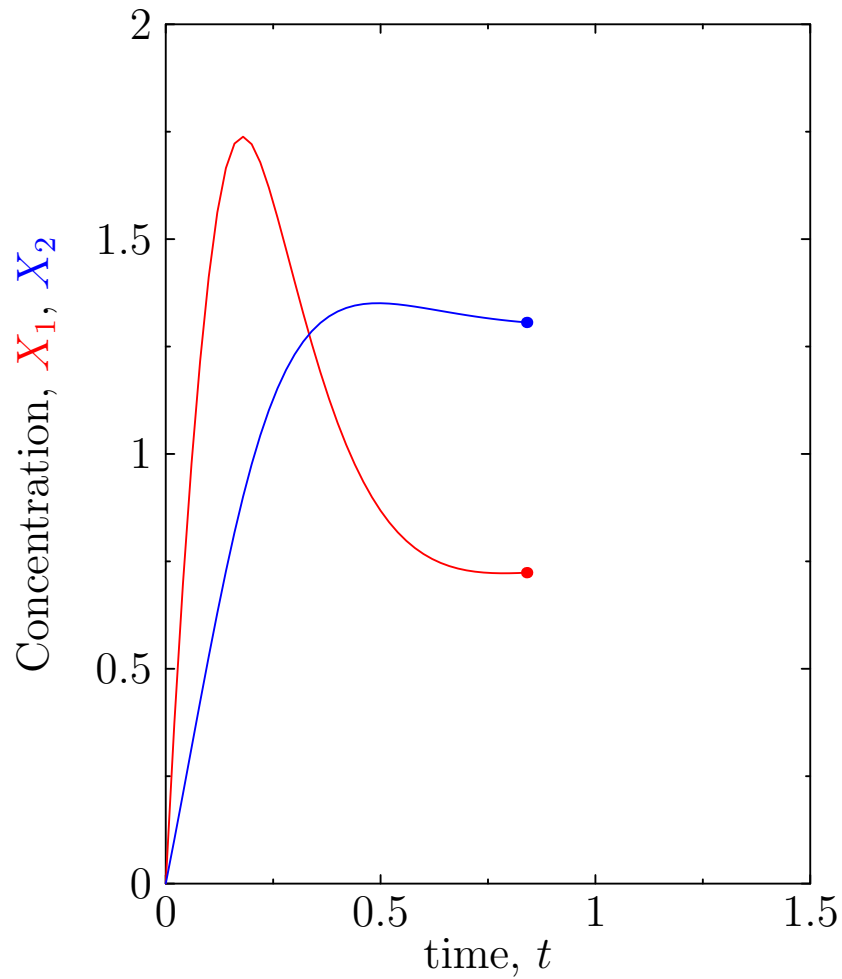



$$K = 1, k_1 = 20, k_2 = k_3 = k_4 = 5, k_5 = 2, n = 4$$

Solving the Dynamics

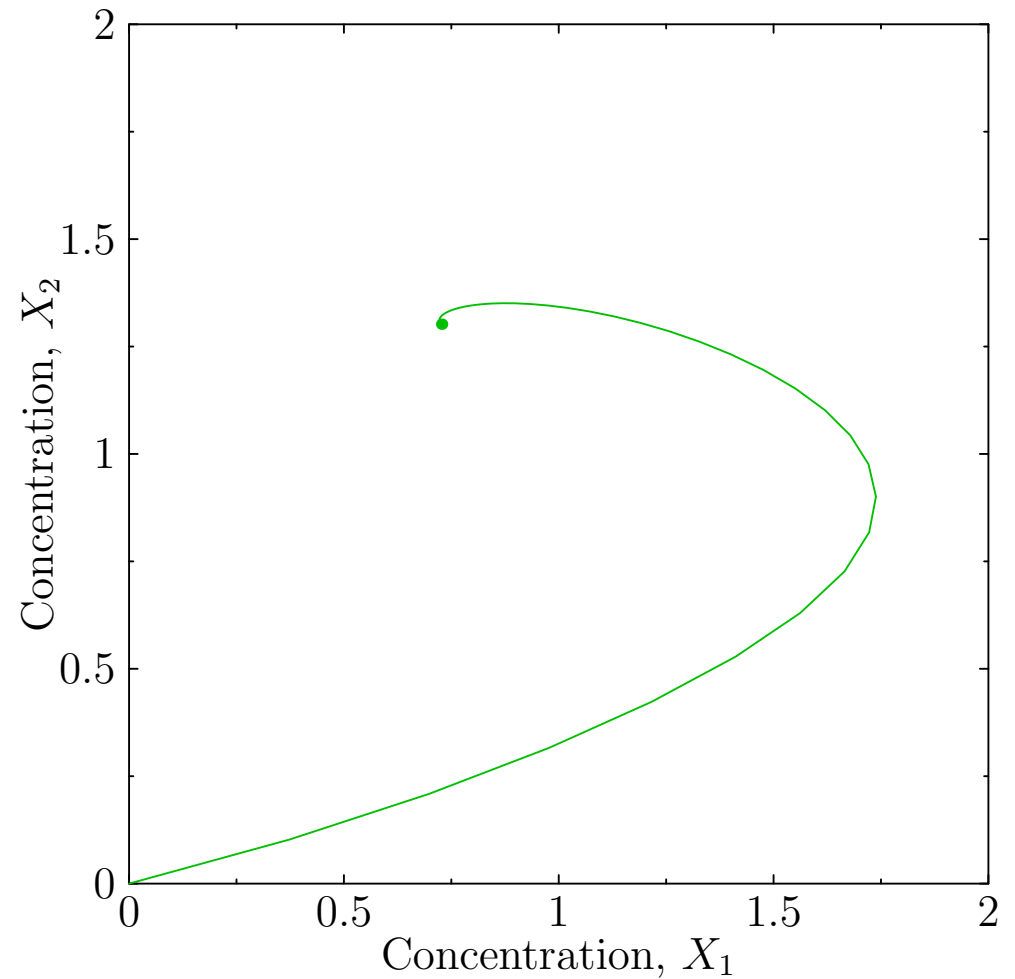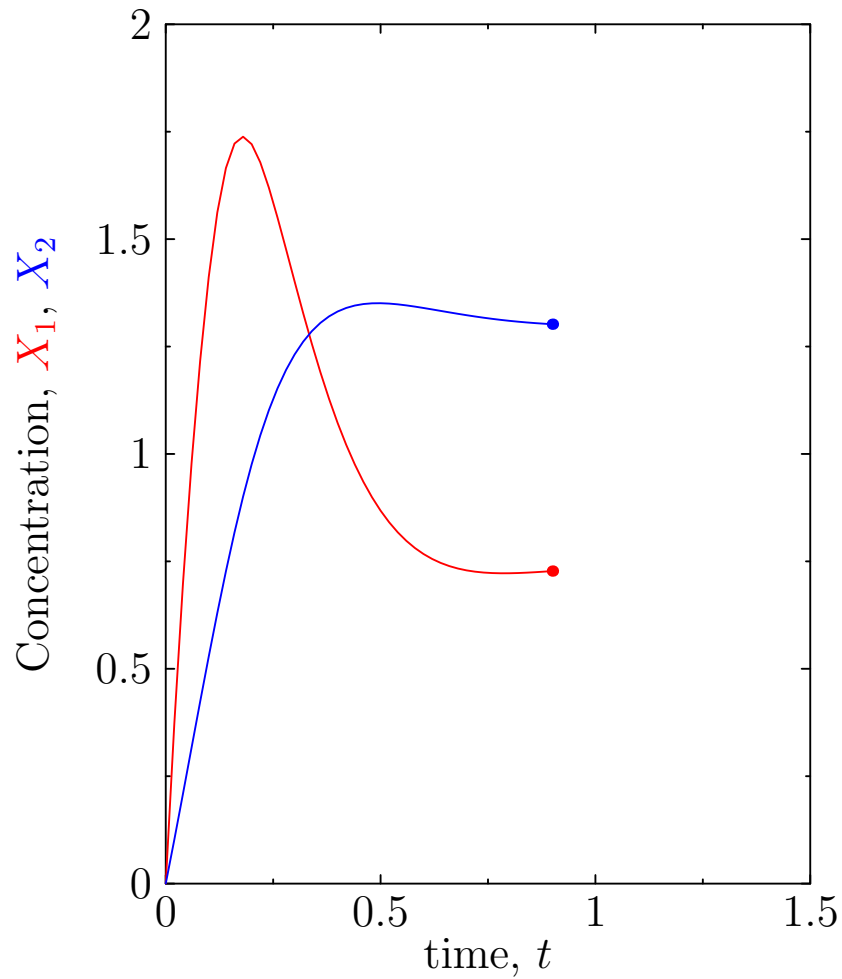



$$K = 1, k_1 = 20, k_2 = k_3 = k_4 = 5, k_5 = 2, n = 4$$

Solving the Dynamics

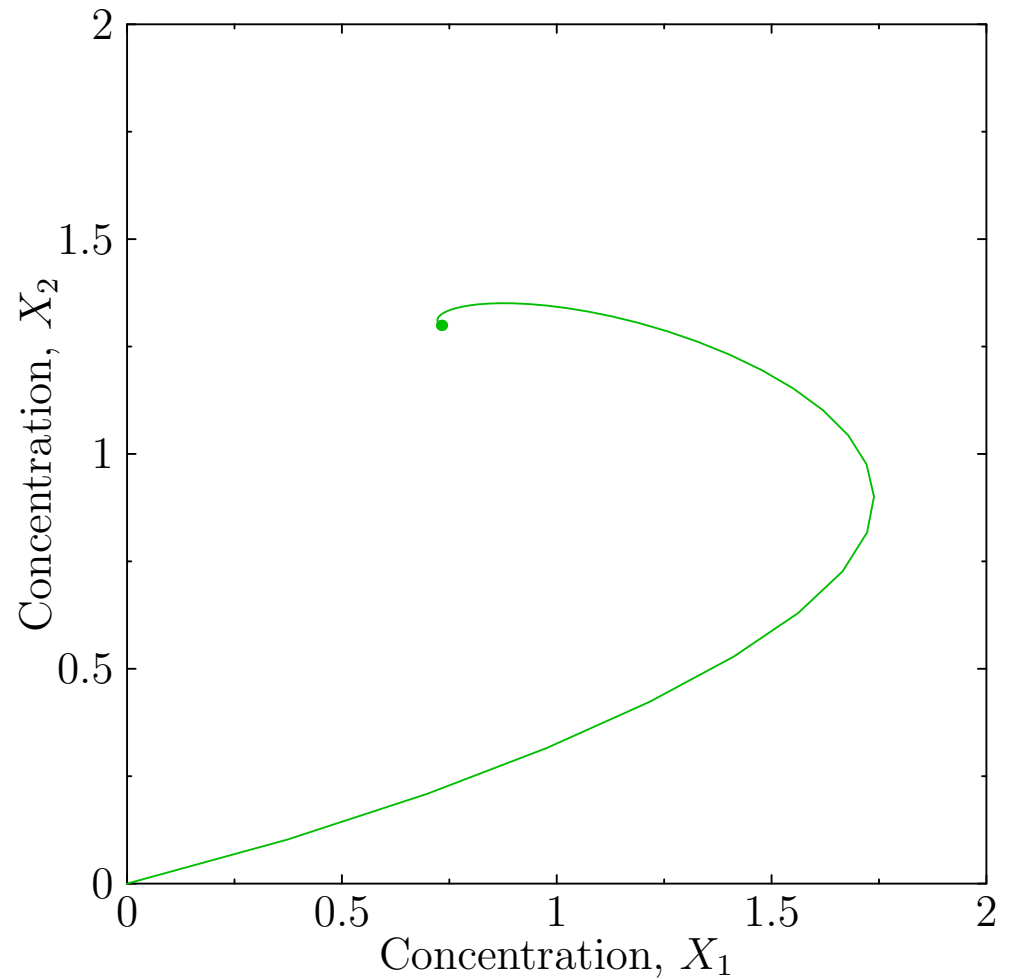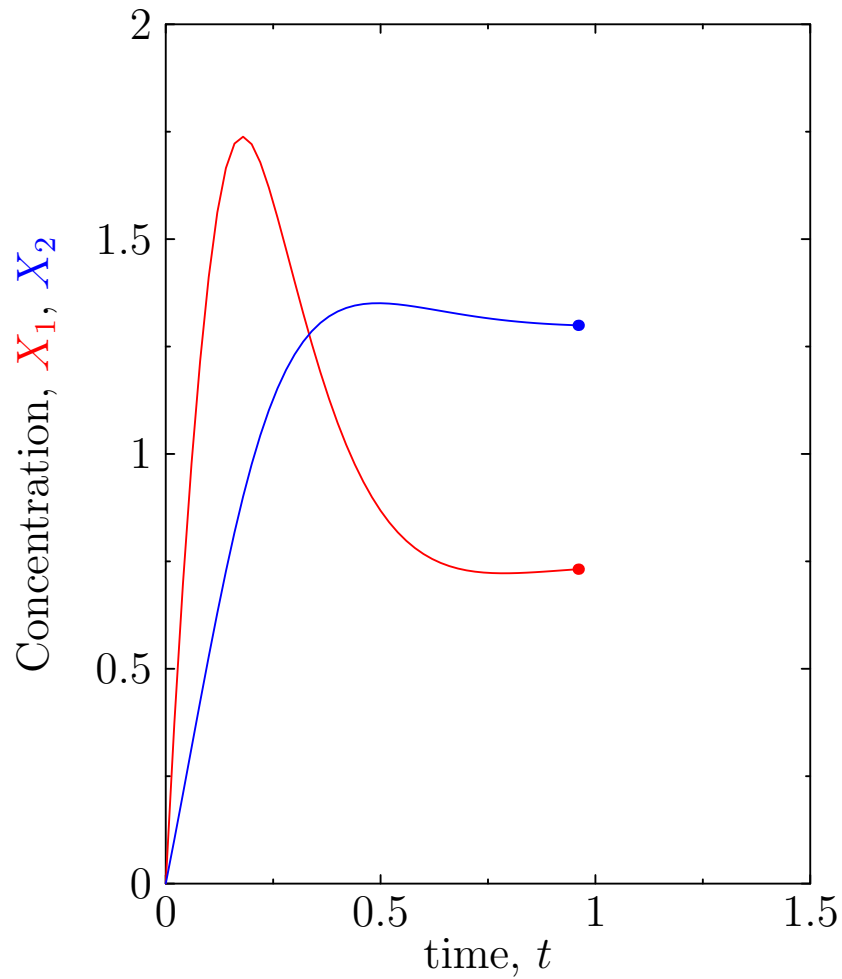



$$K = 1, k_1 = 20, k_2 = k_3 = k_4 = 5, k_5 = 2, n = 4$$

Solving the Dynamics

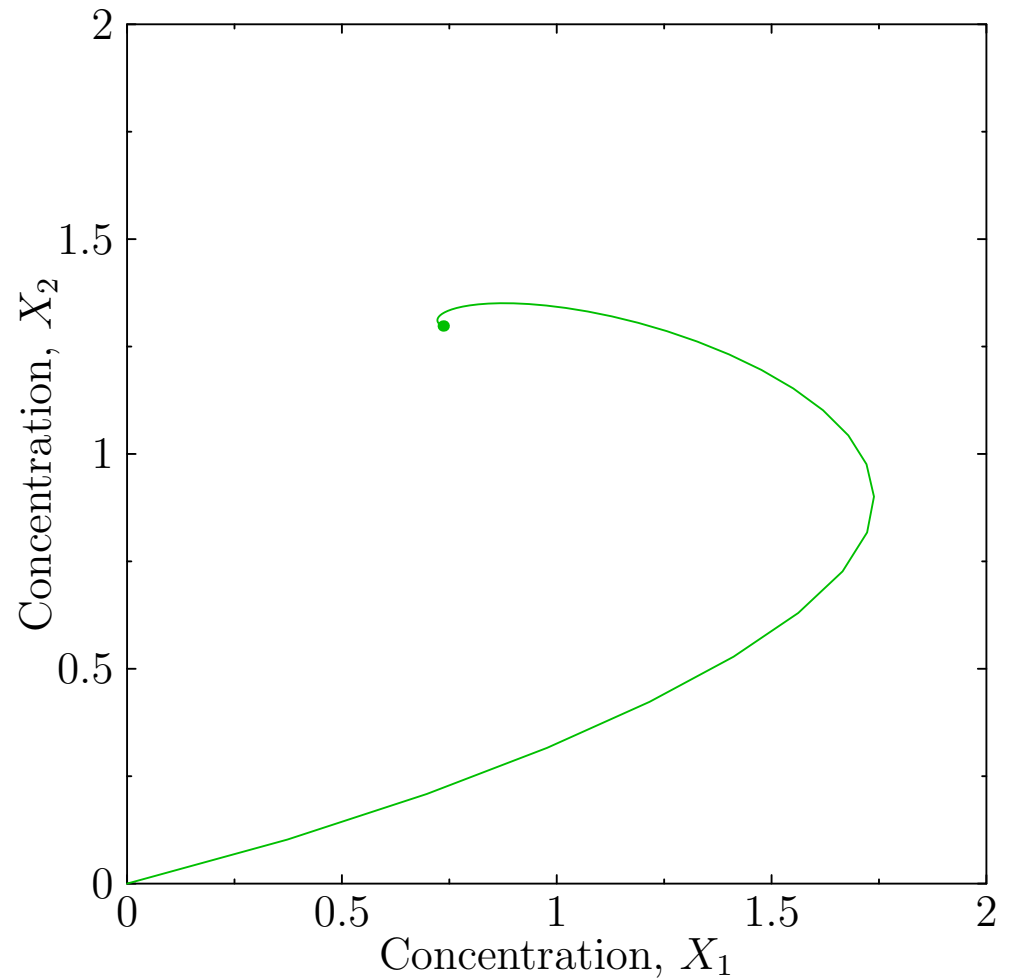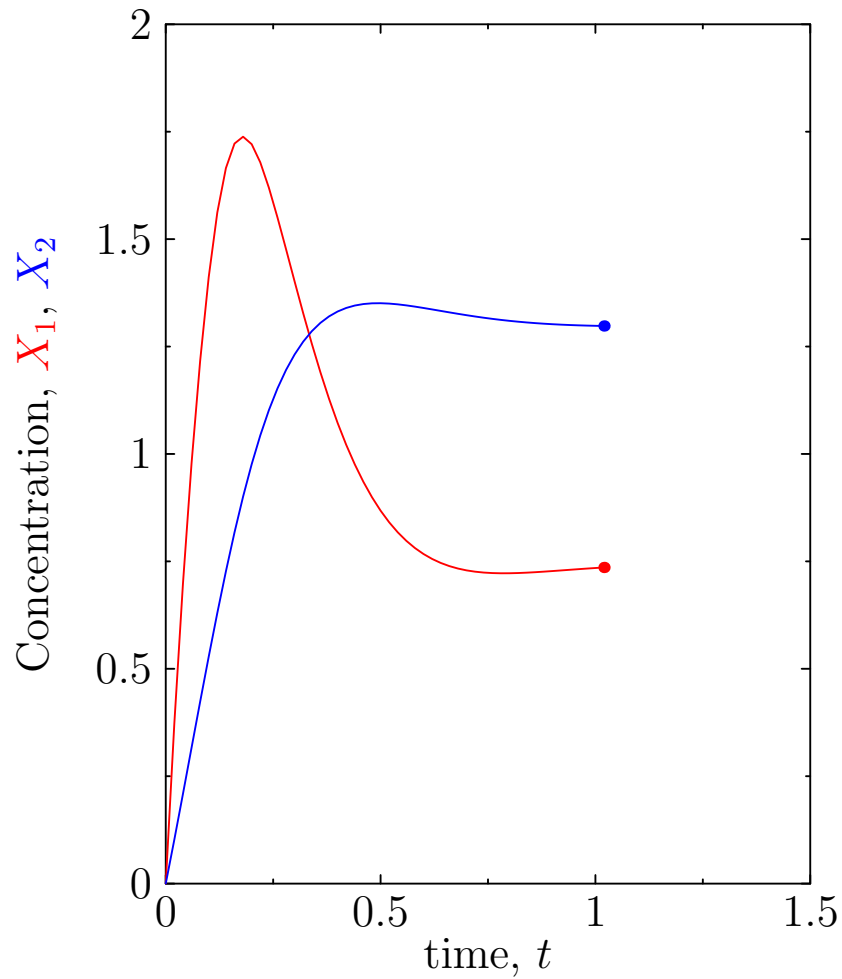



$$K = 1, k_1 = 20, k_2 = k_3 = k_4 = 5, k_5 = 2, n = 4$$

Solving the Dynamics

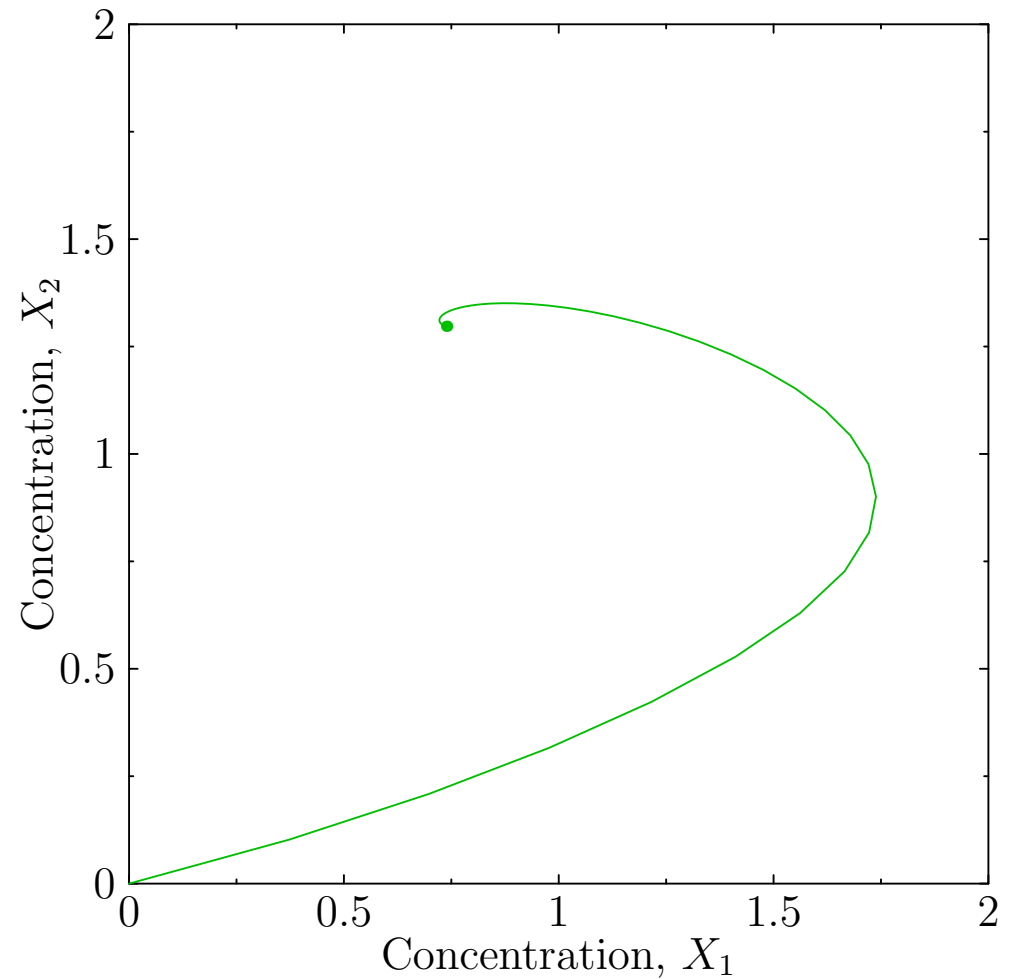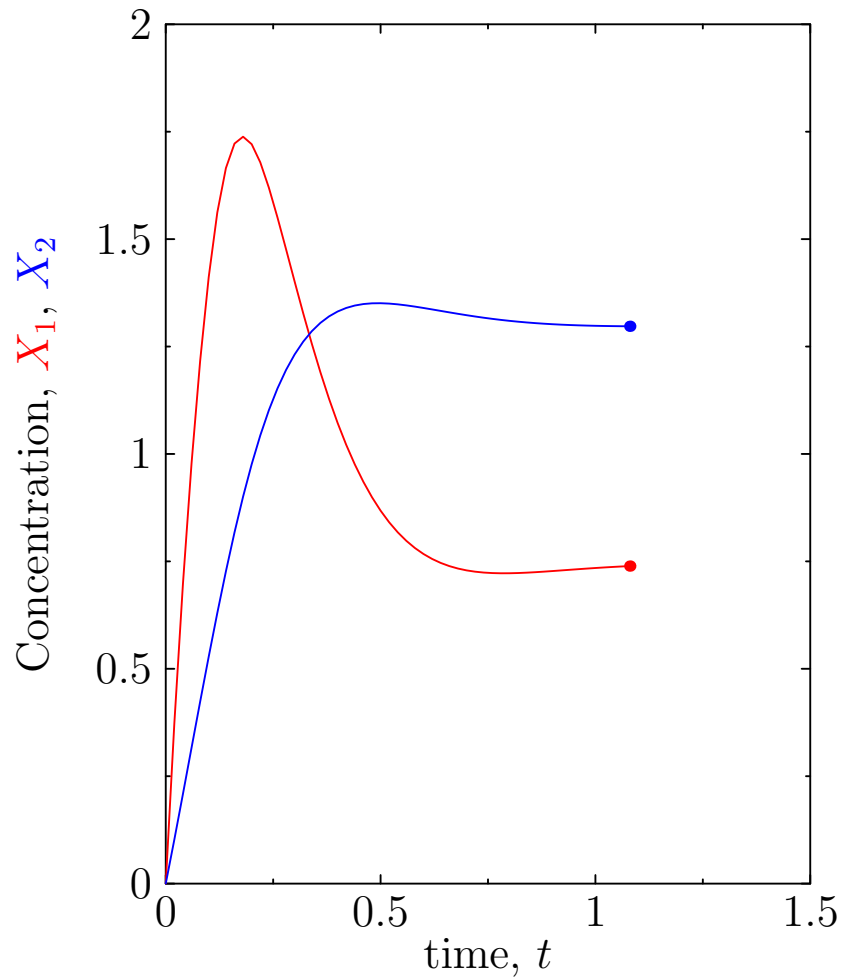



$$K = 1, k_1 = 20, k_2 = k_3 = k_4 = 5, k_5 = 2, n = 4$$

Solving the Dynamics

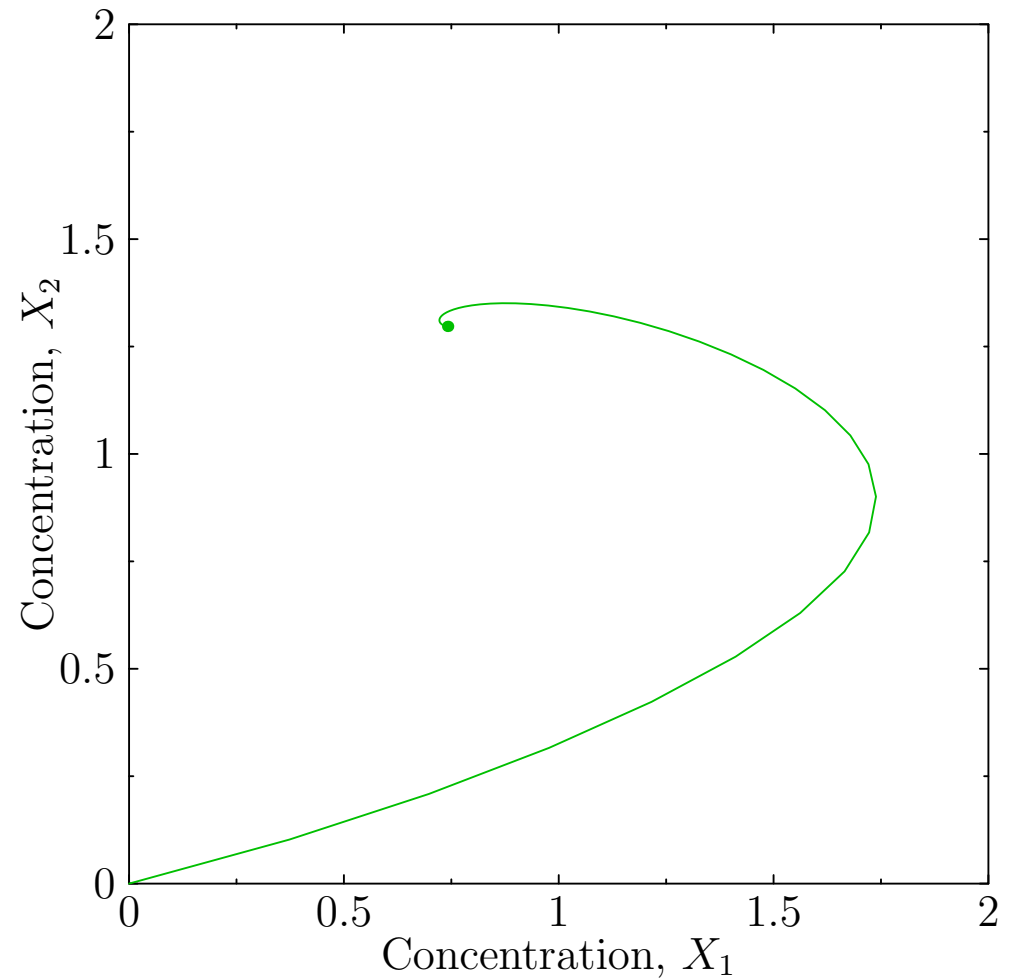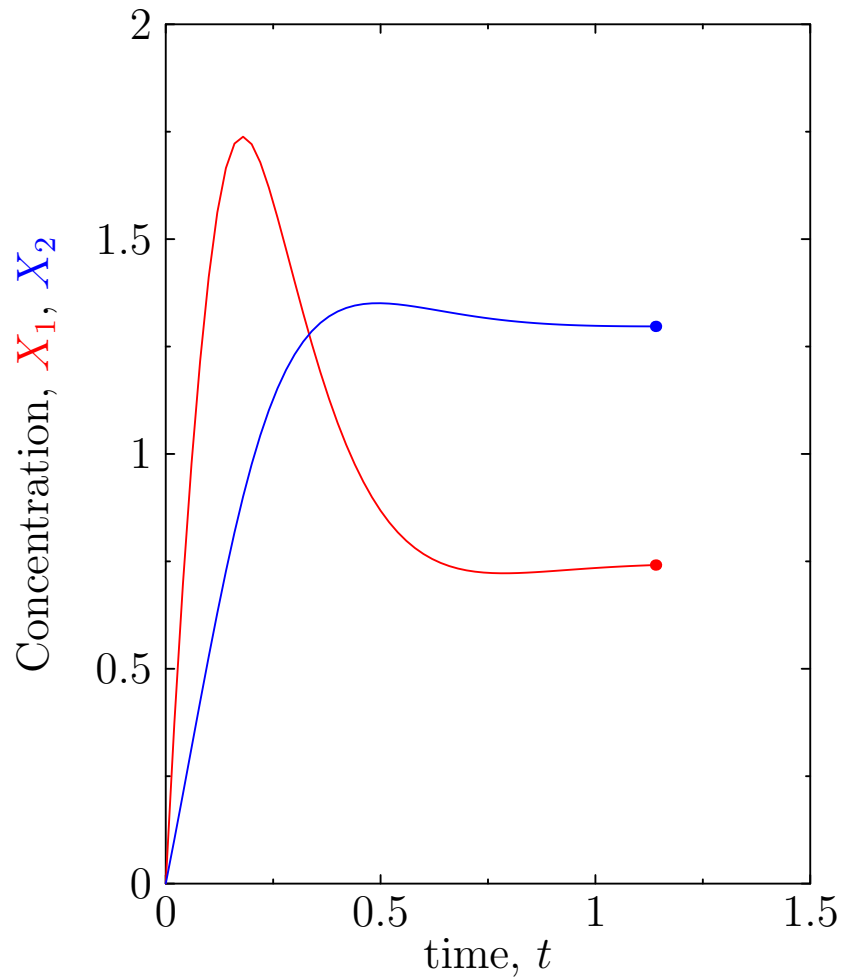



$$K = 1, k_1 = 20, k_2 = k_3 = k_4 = 5, k_5 = 2, n = 4$$

Solving the Dynamics

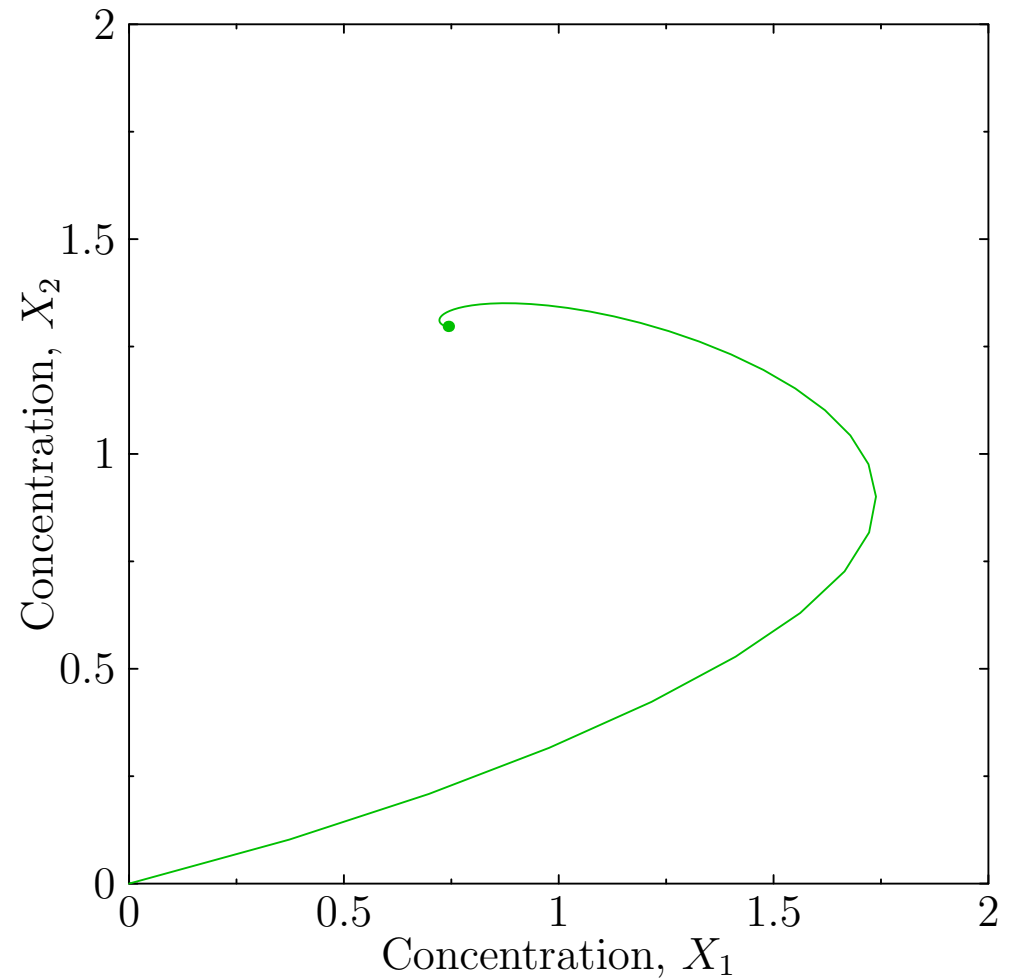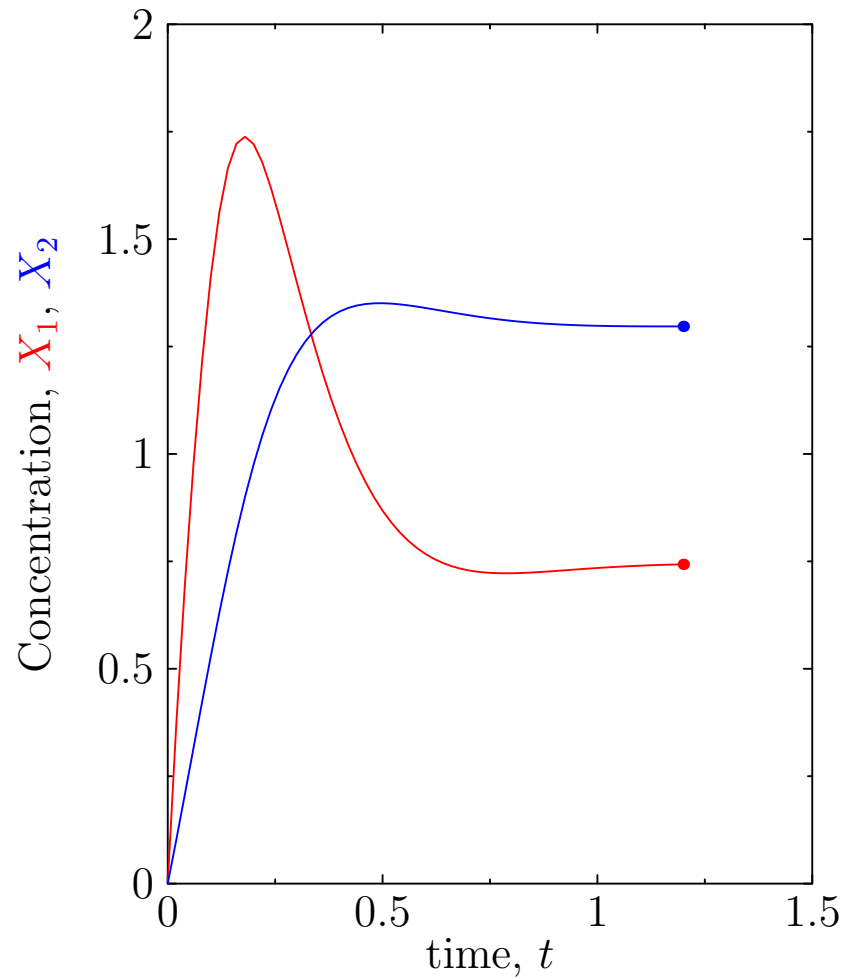



$$K = 1, k_1 = 20, k_2 = k_3 = k_4 = 5, k_5 = 2, n = 4$$

Solving the Dynamics

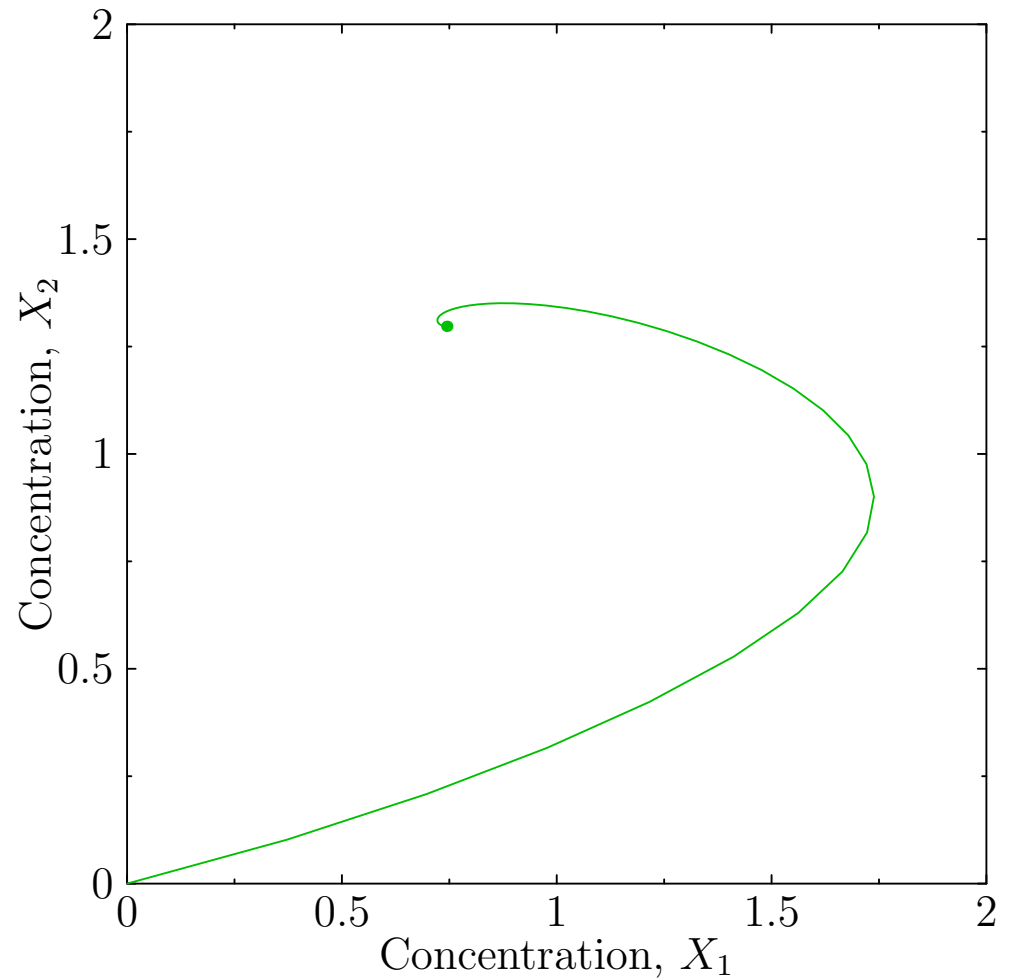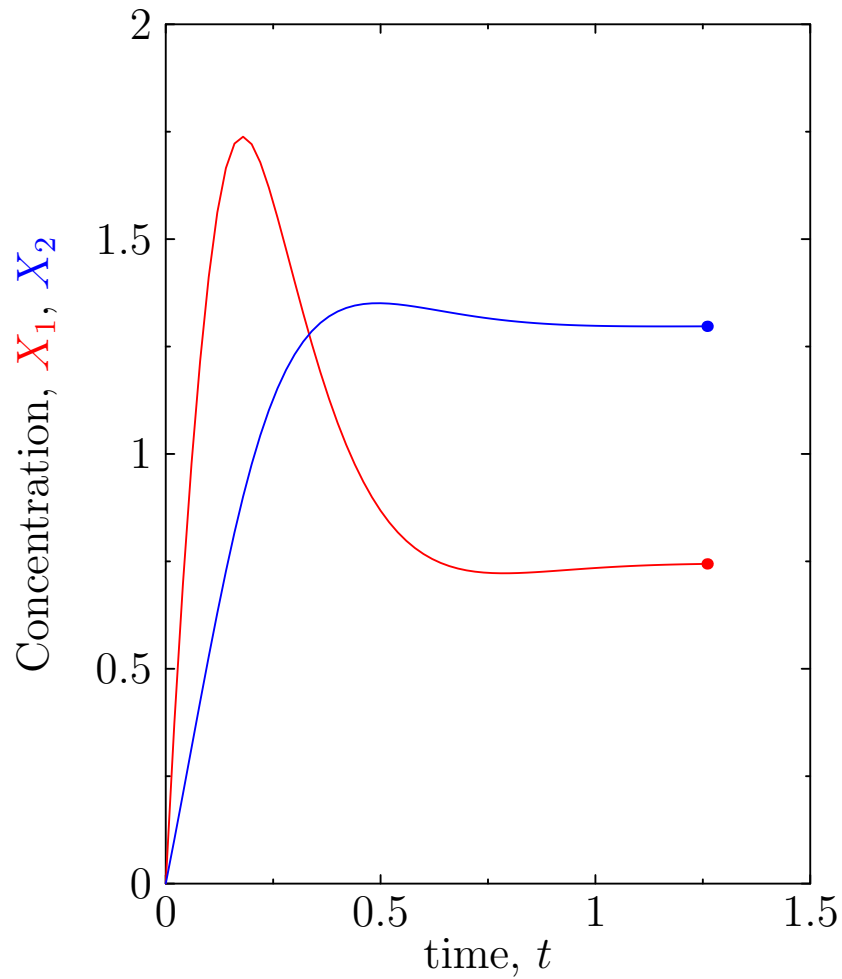



$$K = 1, k_1 = 20, k_2 = k_3 = k_4 = 5, k_5 = 2, n = 4$$

Solving the Dynamics

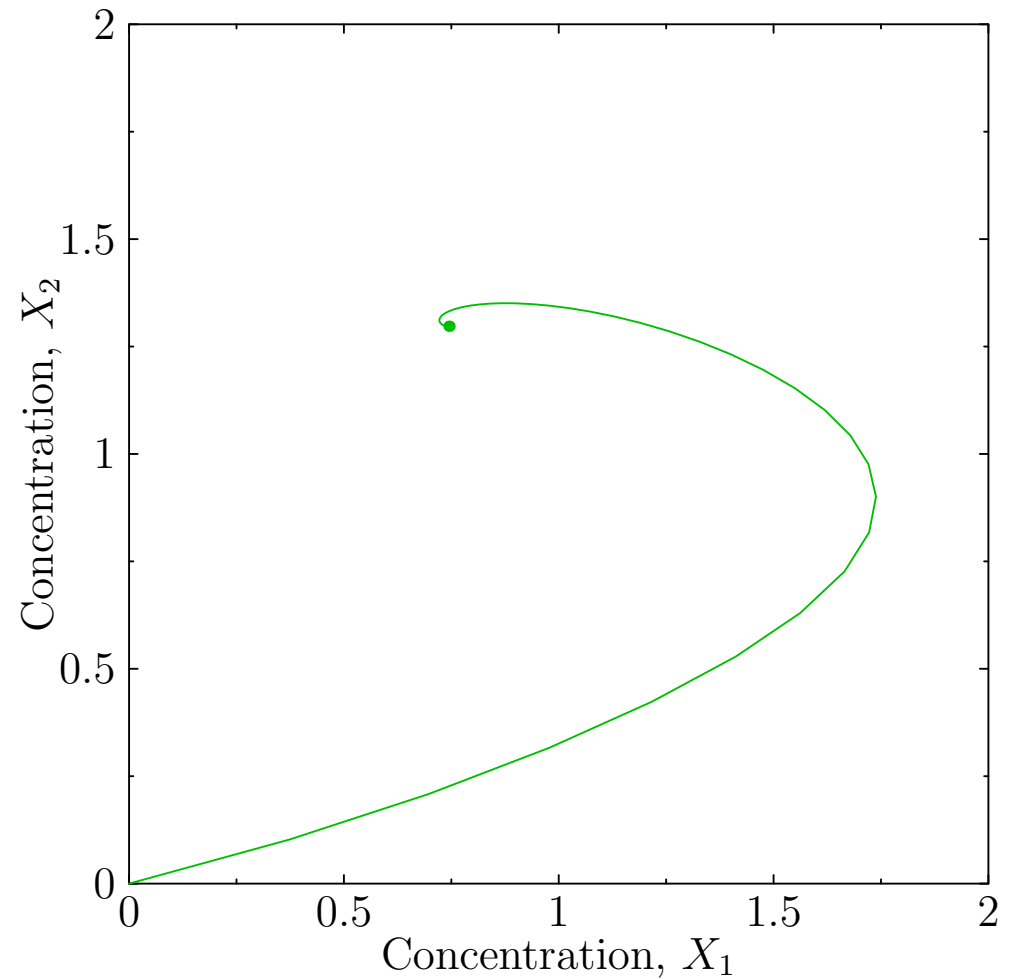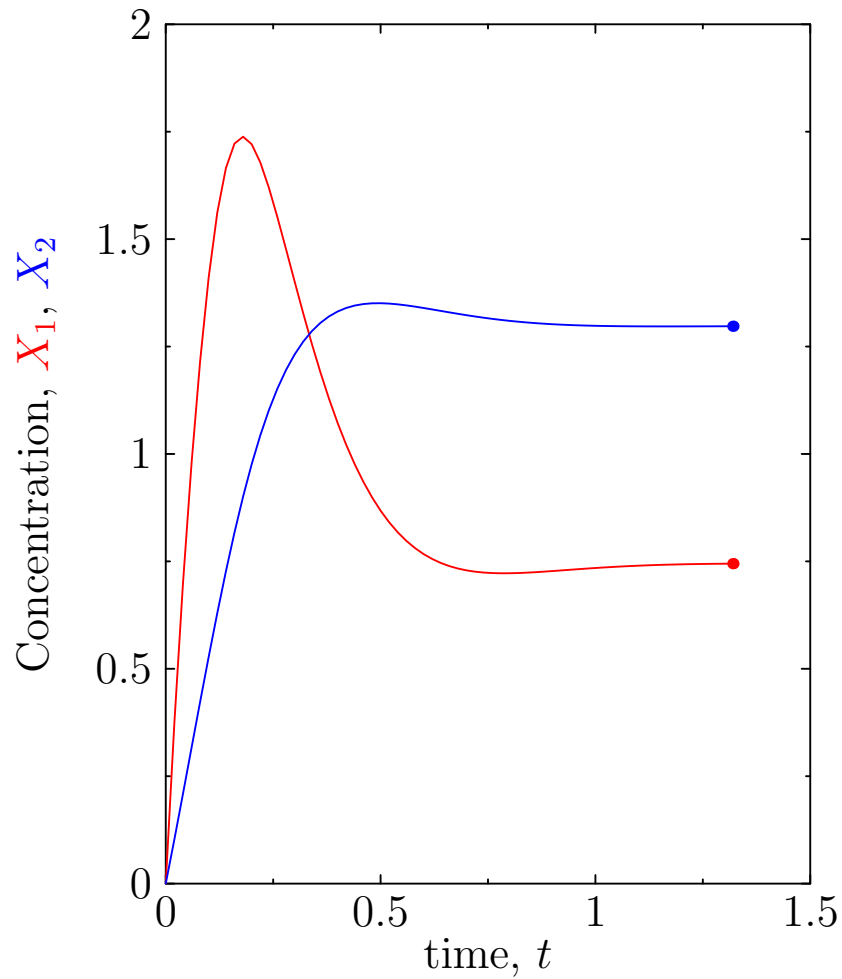



$$K = 1, k_1 = 20, k_2 = k_3 = k_4 = 5, k_5 = 2, n = 4$$

Solving the Dynamics

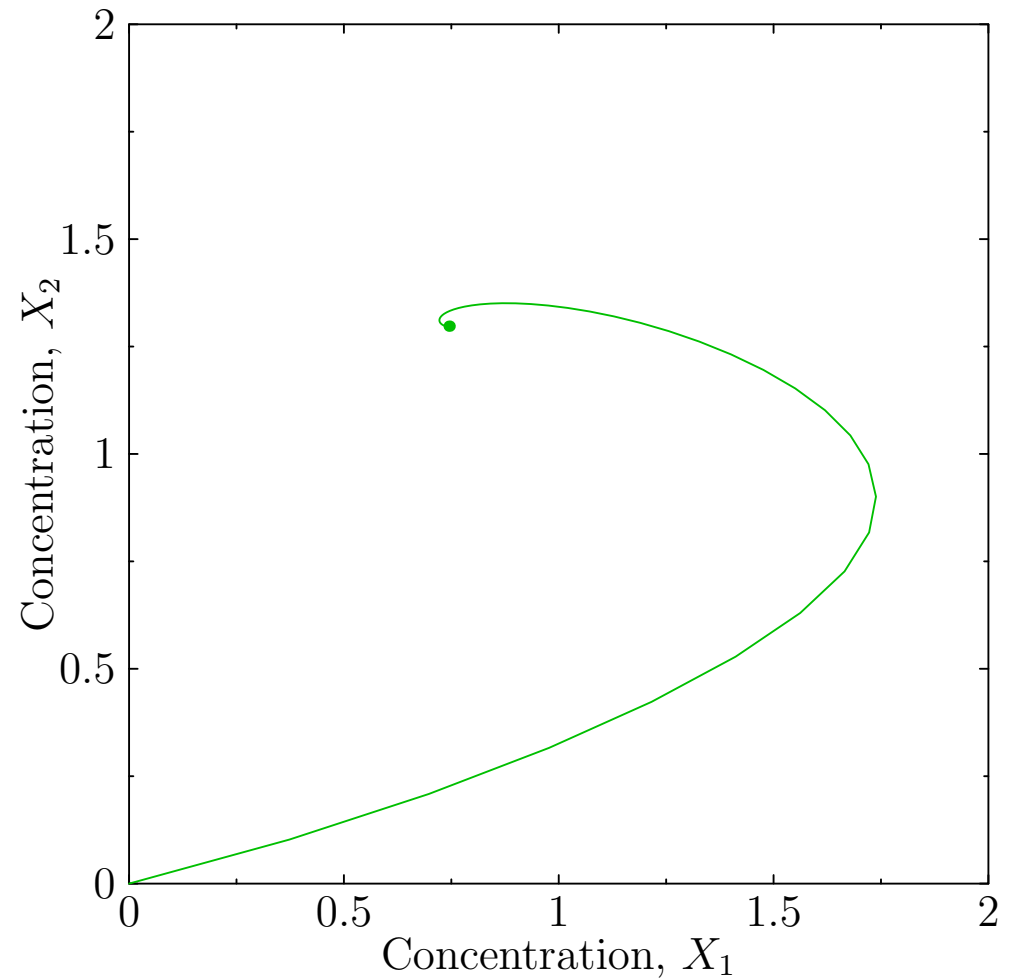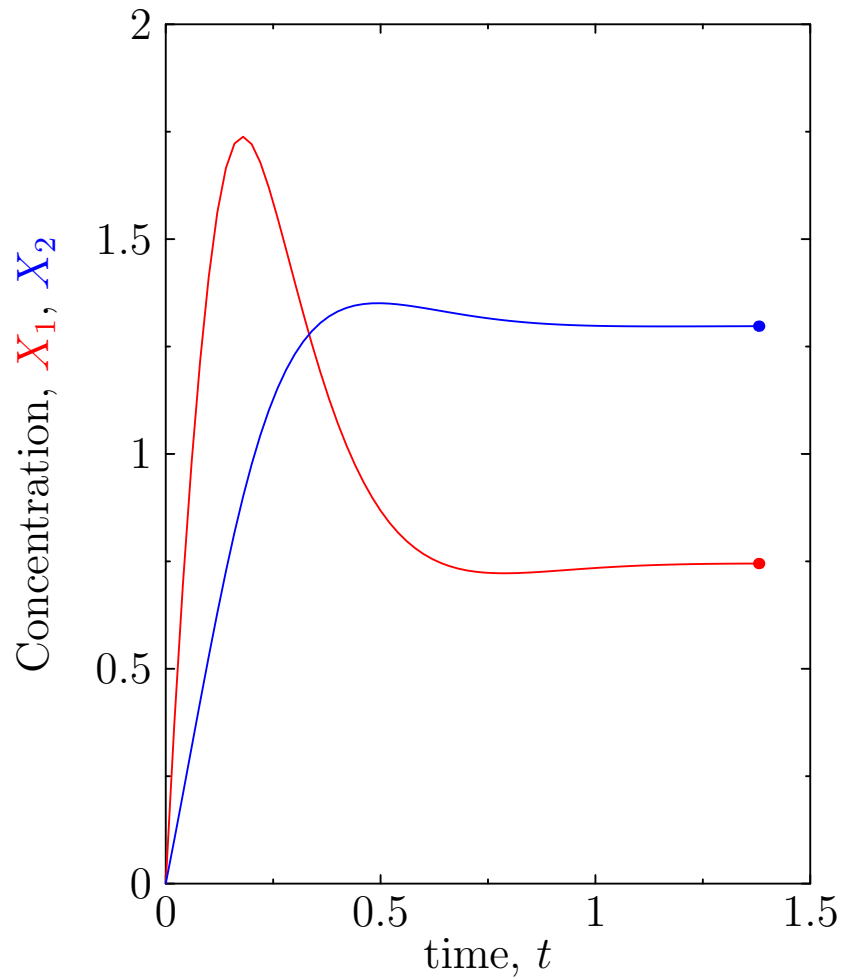



$$K = 1, k_1 = 20, k_2 = k_3 = k_4 = 5, k_5 = 2, n = 4$$

Solving the Dynamics

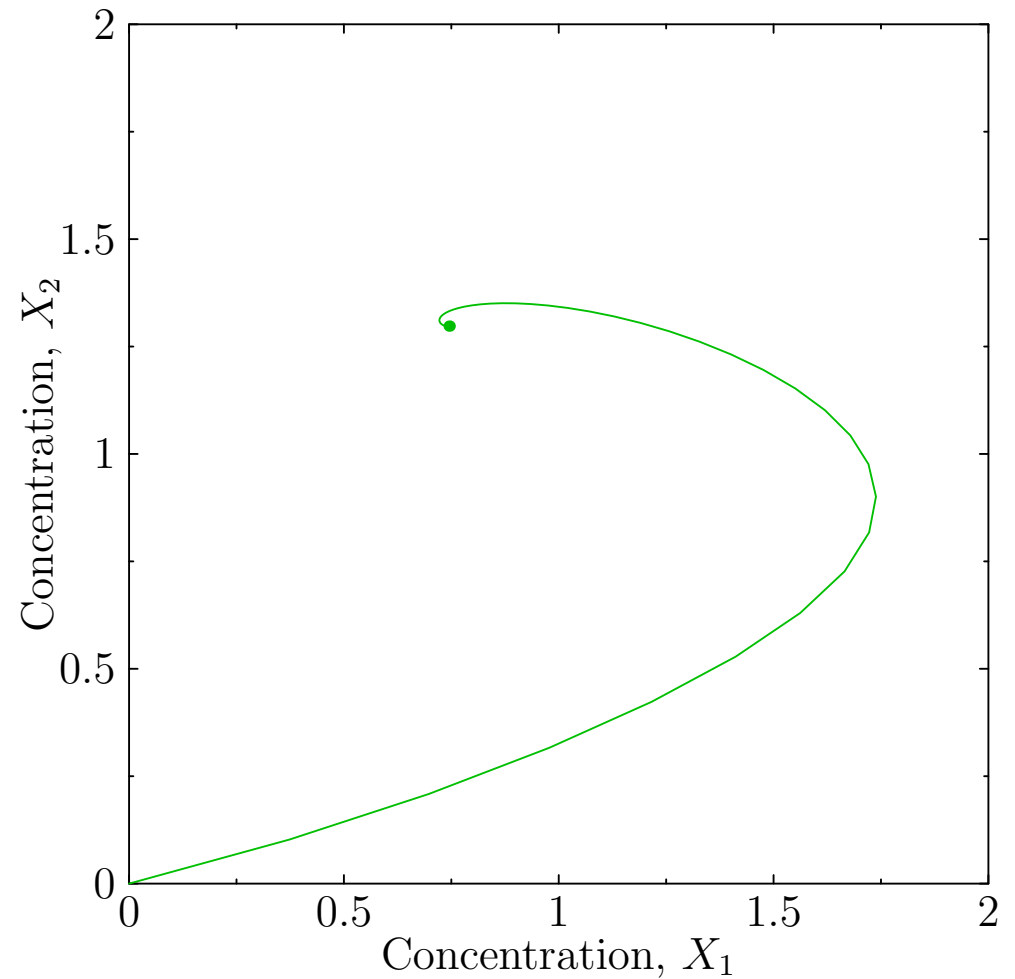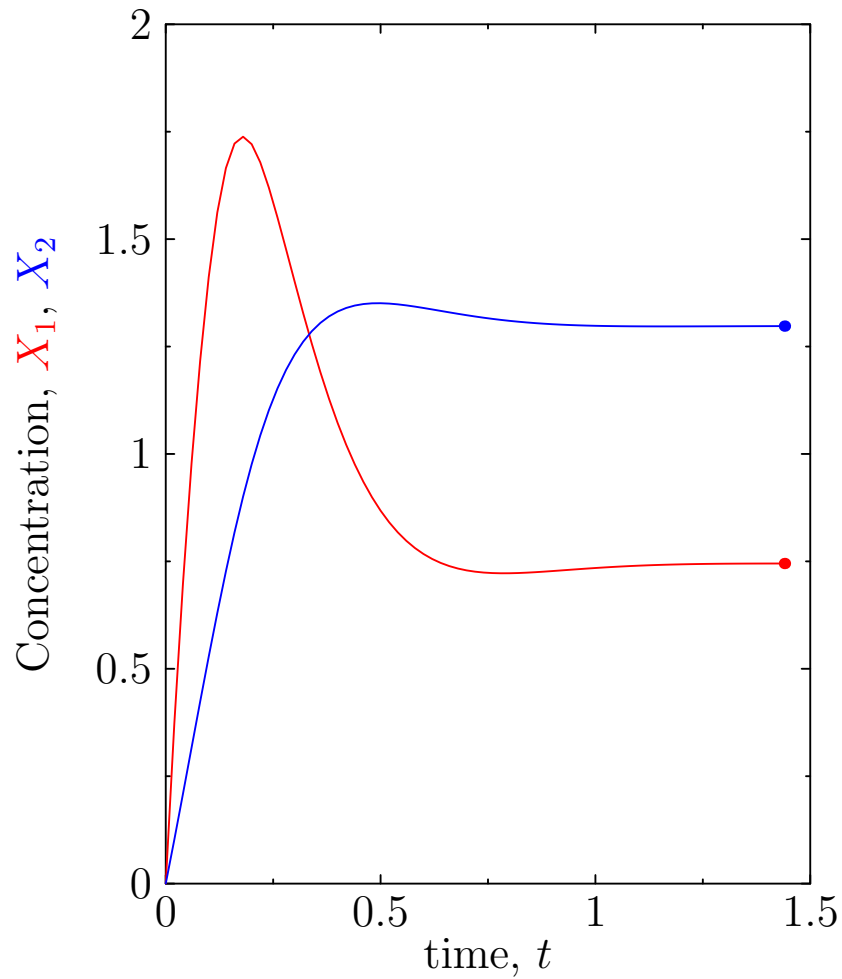


$$K = 1, k_1 = 20, k_2 = k_3 = k_4 = 5, k_5 = 2, n = 4$$

Solving the Dynamics

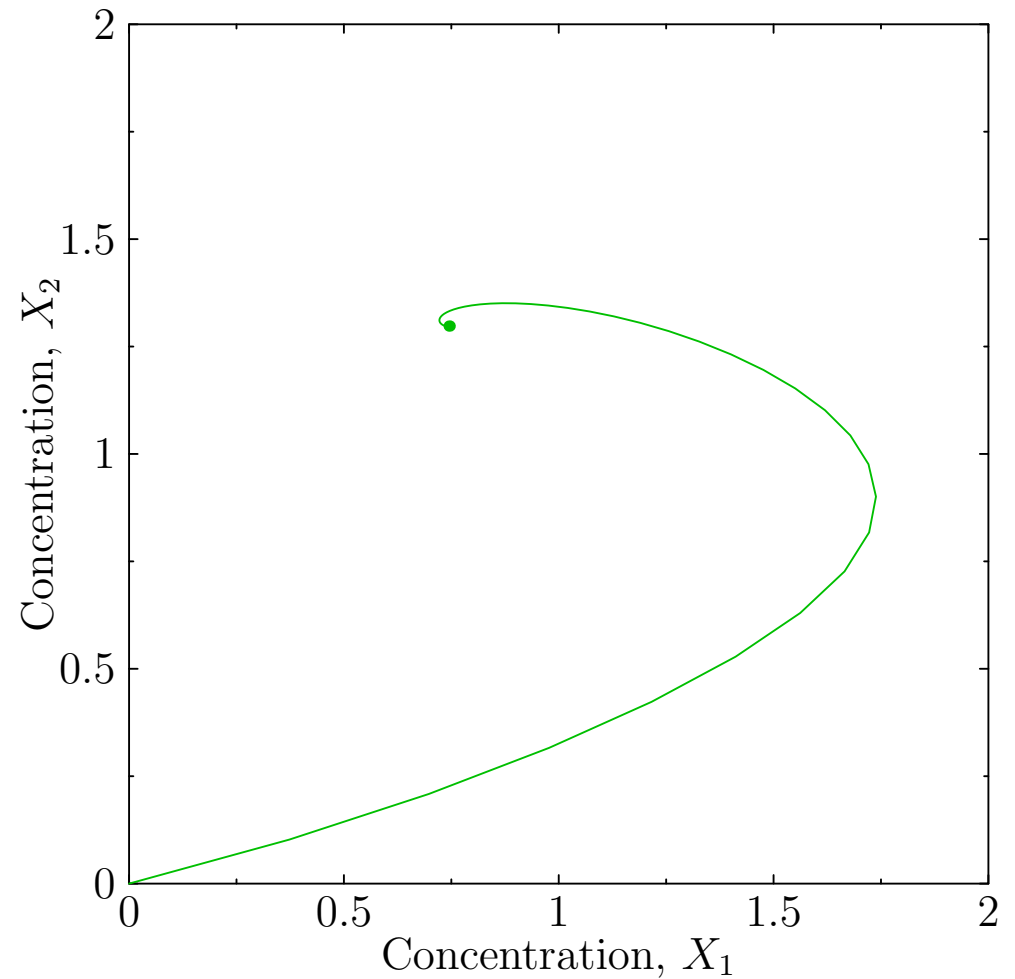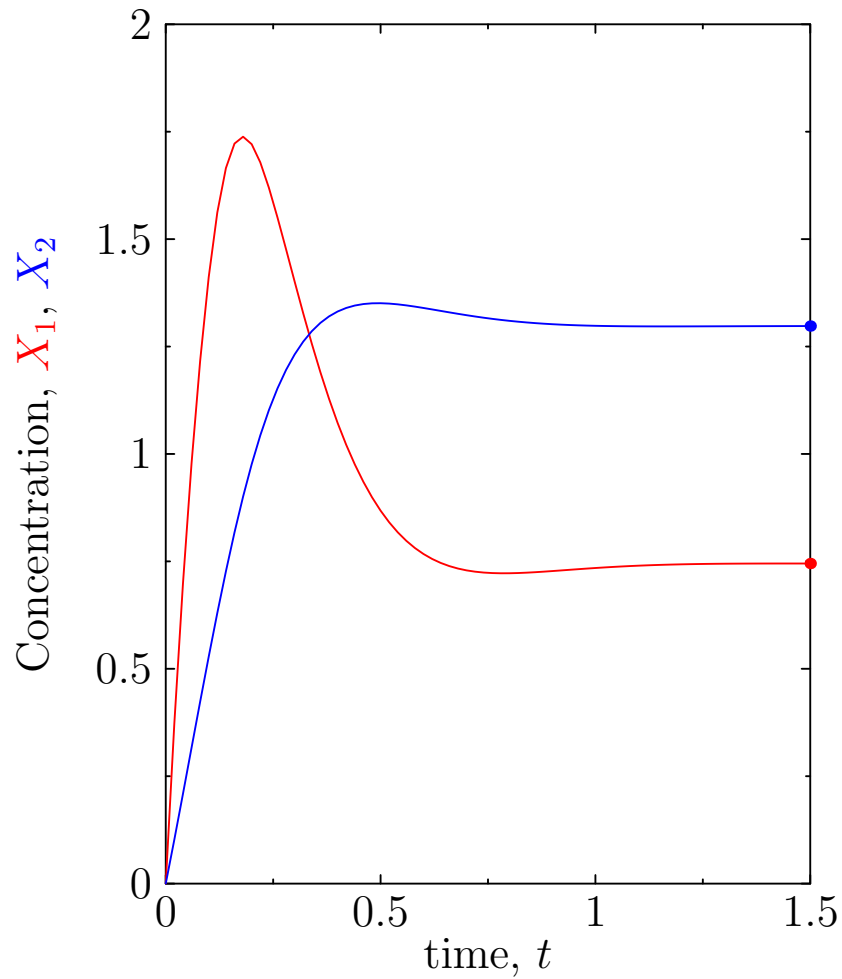


$$K = 1, k_1 = 20, k_2 = k_3 = k_4 = 5, k_5 = 2, n = 4$$

Trajectories

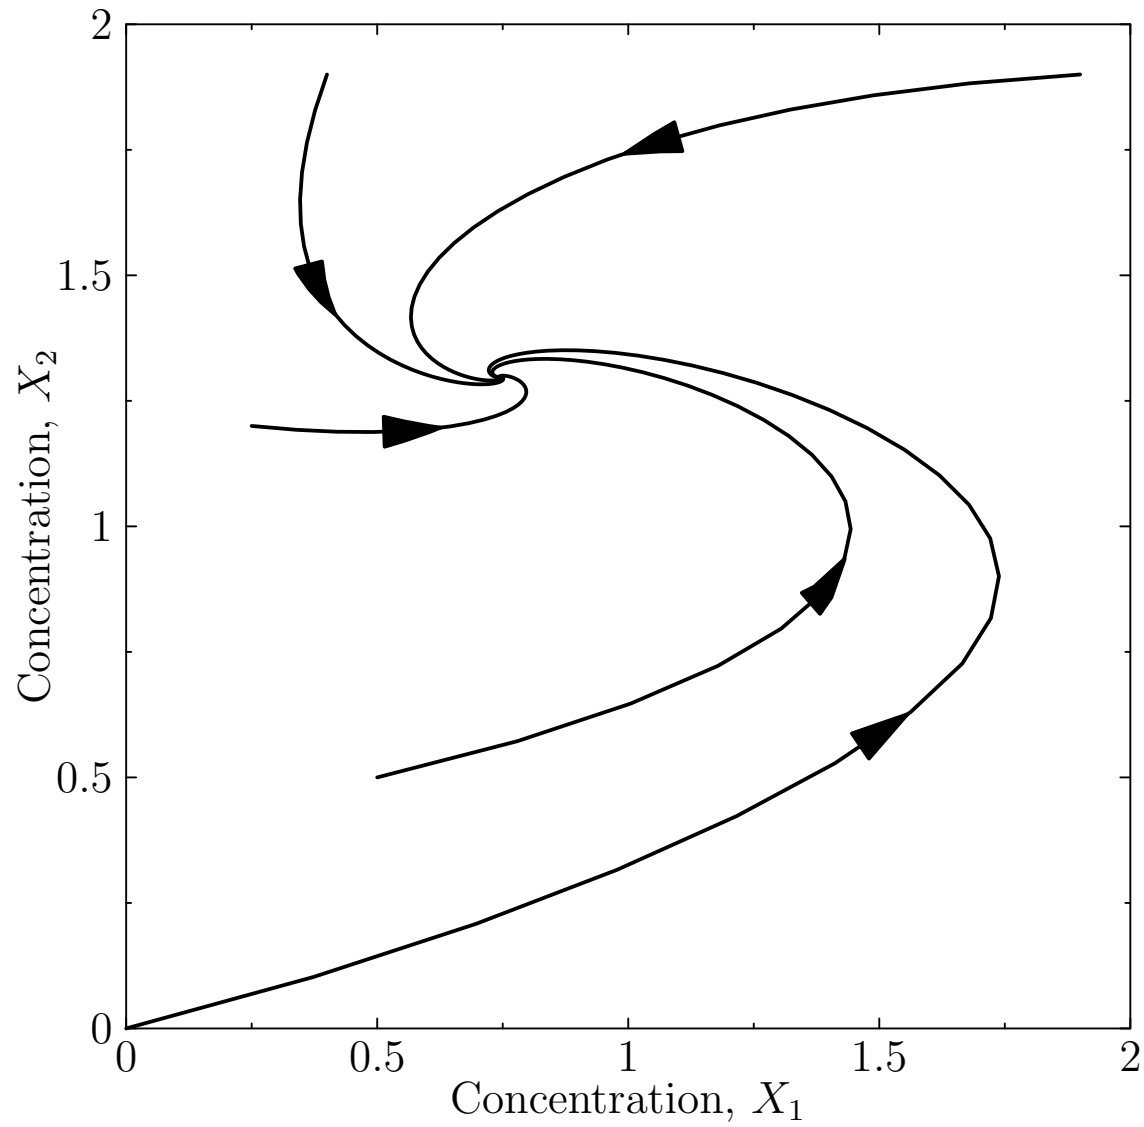

Trajectories

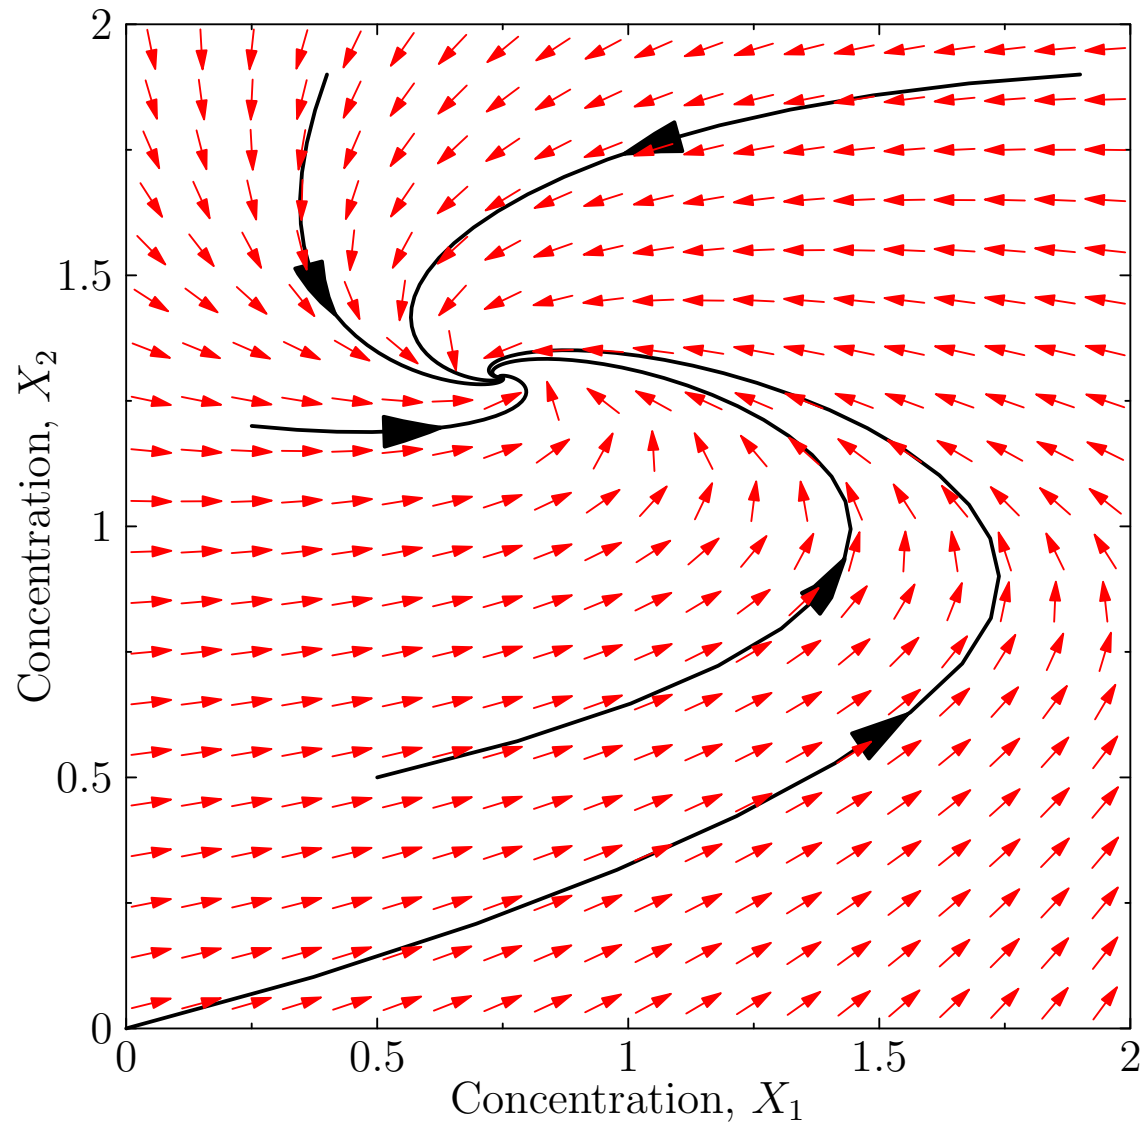

Nullclines

- To get a better understanding of the dynamics we look at the **nullclines** defined by $dX_i/dt = 0$
- In our system

$$\frac{dX_1}{dt} = \frac{k_1}{1 + (X_2/K)^n} - k_3 X_1 - k_5 X_1 = 0 \Rightarrow X_1 = \frac{k_1}{(k_3 + k_5)(1 + (X_2/K)^n)}$$

$$\frac{dX_2}{dt} = k_2 + k_5 X_1 - k_4 X_2 = 0 \Rightarrow X_2 = \frac{k_2 + k_5 X_1}{k_4}$$

- The intersection of the nullclines defines the stationary points

Nullclines

- To get a better understanding of the dynamics we look at the **nullclines** defined by $dX_i/dt = 0$
- In our system

$$\frac{dX_1}{dt} = \frac{k_1}{1 + (X_2/K)^n} - k_3 X_1 - k_5 X_1 = 0 \Rightarrow X_1 = \frac{k_1}{(k_3 + k_5)(1 + (X_2/K)^n)}$$

$$\frac{dX_2}{dt} = k_2 + k_5 X_1 - k_4 X_2 = 0 \Rightarrow X_2 = \frac{k_2 + k_5 X_1}{k_4}$$

- The intersection of the nullclines defines the stationary points

Nullclines

- To get a better understanding of the dynamics we look at the **nullclines** defined by $dX_i/dt = 0$
- In our system

$$\frac{dX_1}{dt} = \frac{k_1}{1 + (X_2/K)^n} - k_3 X_1 - k_5 X_1 = 0 \Rightarrow X_1 = \frac{k_1}{(k_3 + k_5)(1 + (X_2/K)^n)}$$

$$\frac{dX_2}{dt} = k_2 + k_5 X_1 - k_4 X_2 = 0 \Rightarrow X_2 = \frac{k_2 + k_5 X_1}{k_4}$$

- The intersection of the nullclines defines the stationary points

Nullclines


- To get a better understanding of the dynamics we look at the **nullclines** defined by $dX_i/dt = 0$
- In our system

$$\frac{dX_1}{dt} = \frac{k_1}{1 + (X_2/K)^n} - k_3 X_1 - k_5 X_1 = 0 \Rightarrow X_1 = \frac{k_1}{(k_3 + k_5)(1 + (X_2/K)^n)}$$


$$\frac{dX_2}{dt} = k_2 + k_5 X_1 - k_4 X_2 = 0 \Rightarrow X_2 = \frac{k_2 + k_5 X_1}{k_4}$$

- The intersection of the nullclines defines the stationary points


Nullclines

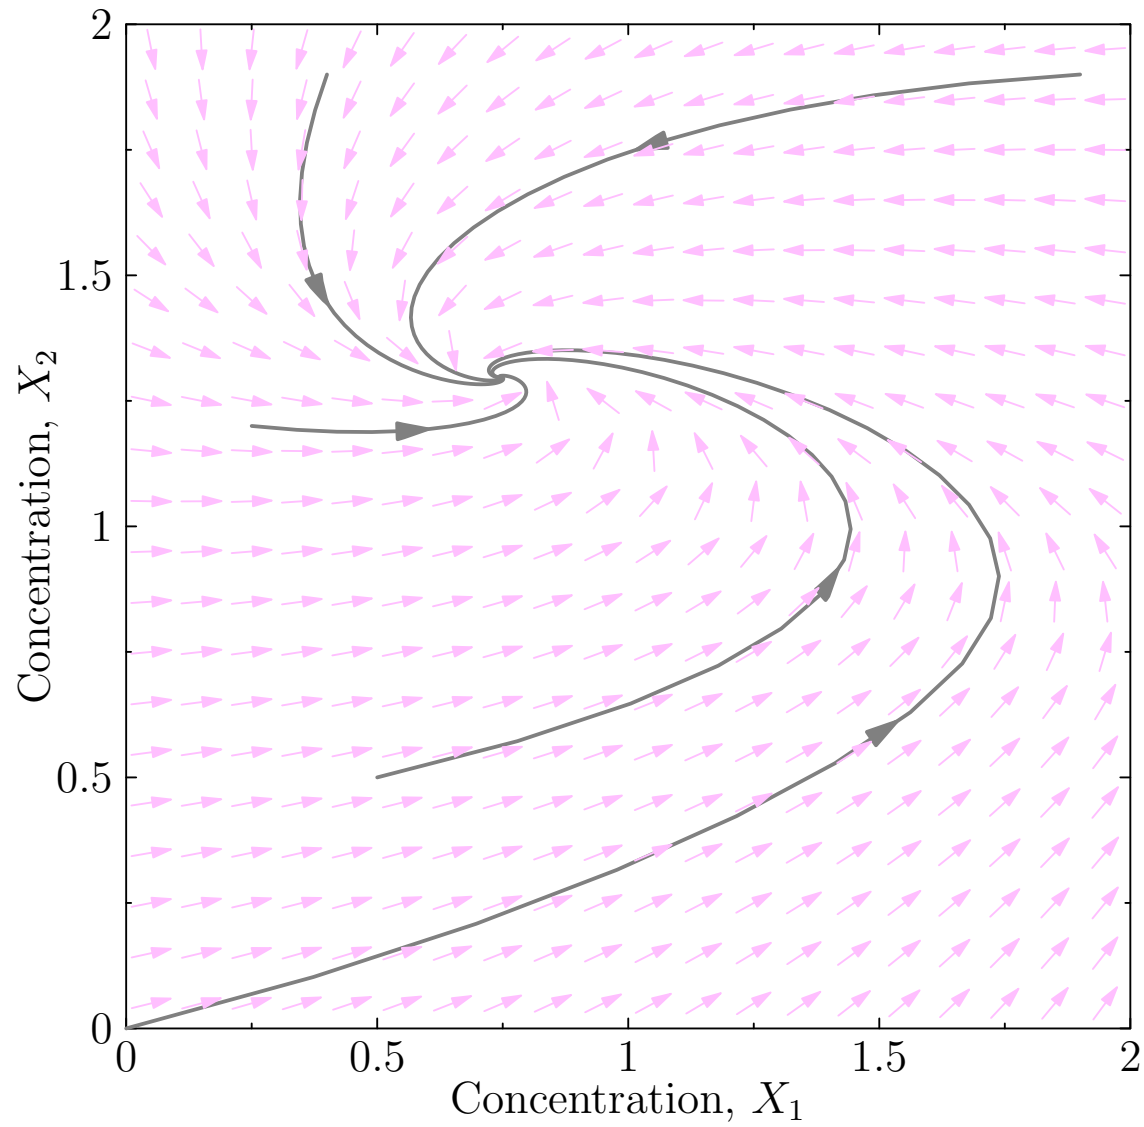


Nullclines

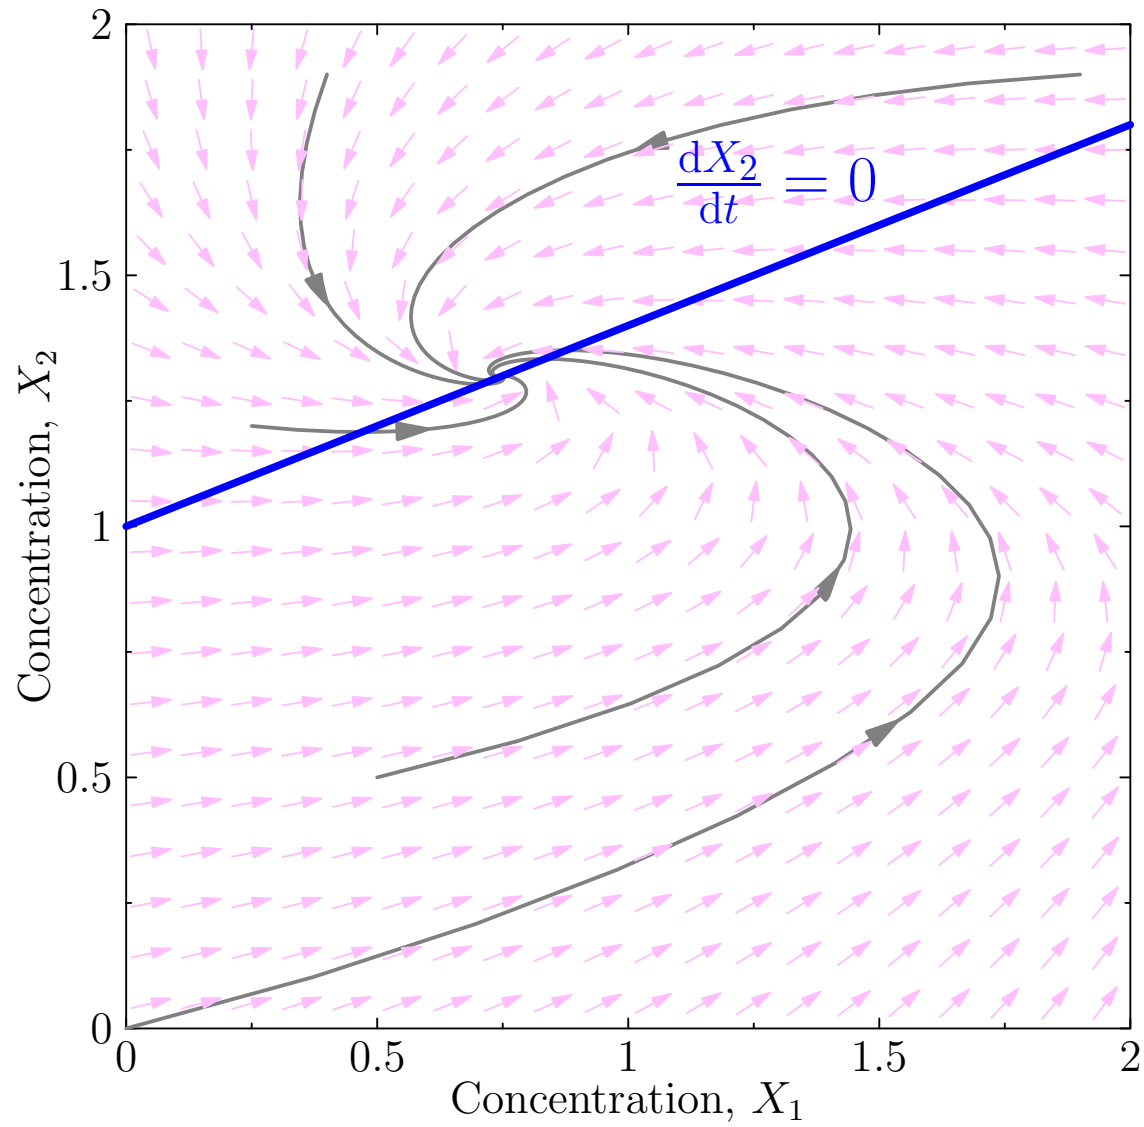

Nullclines

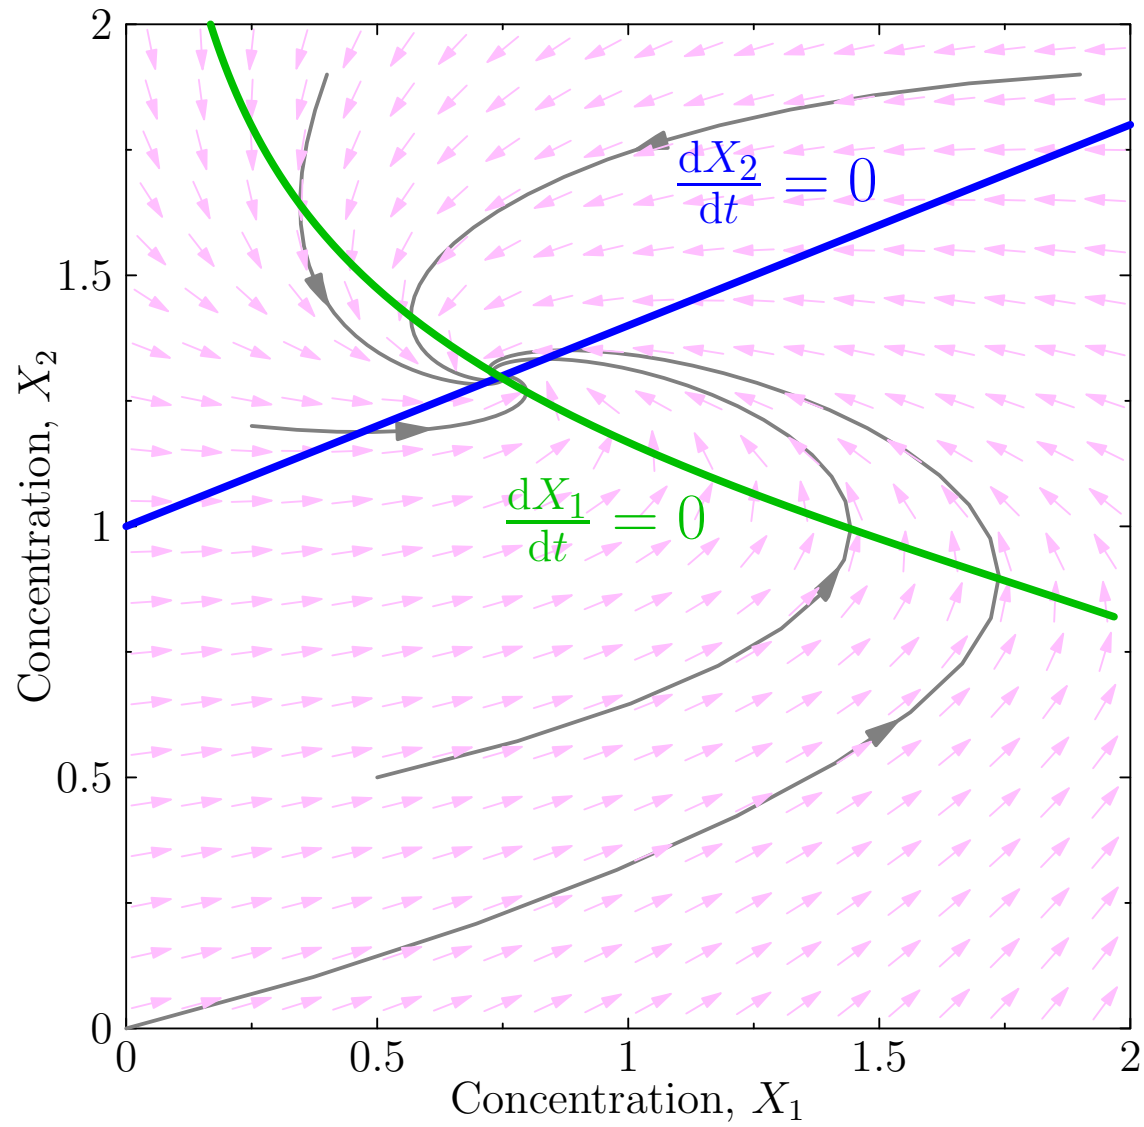


Nullclines

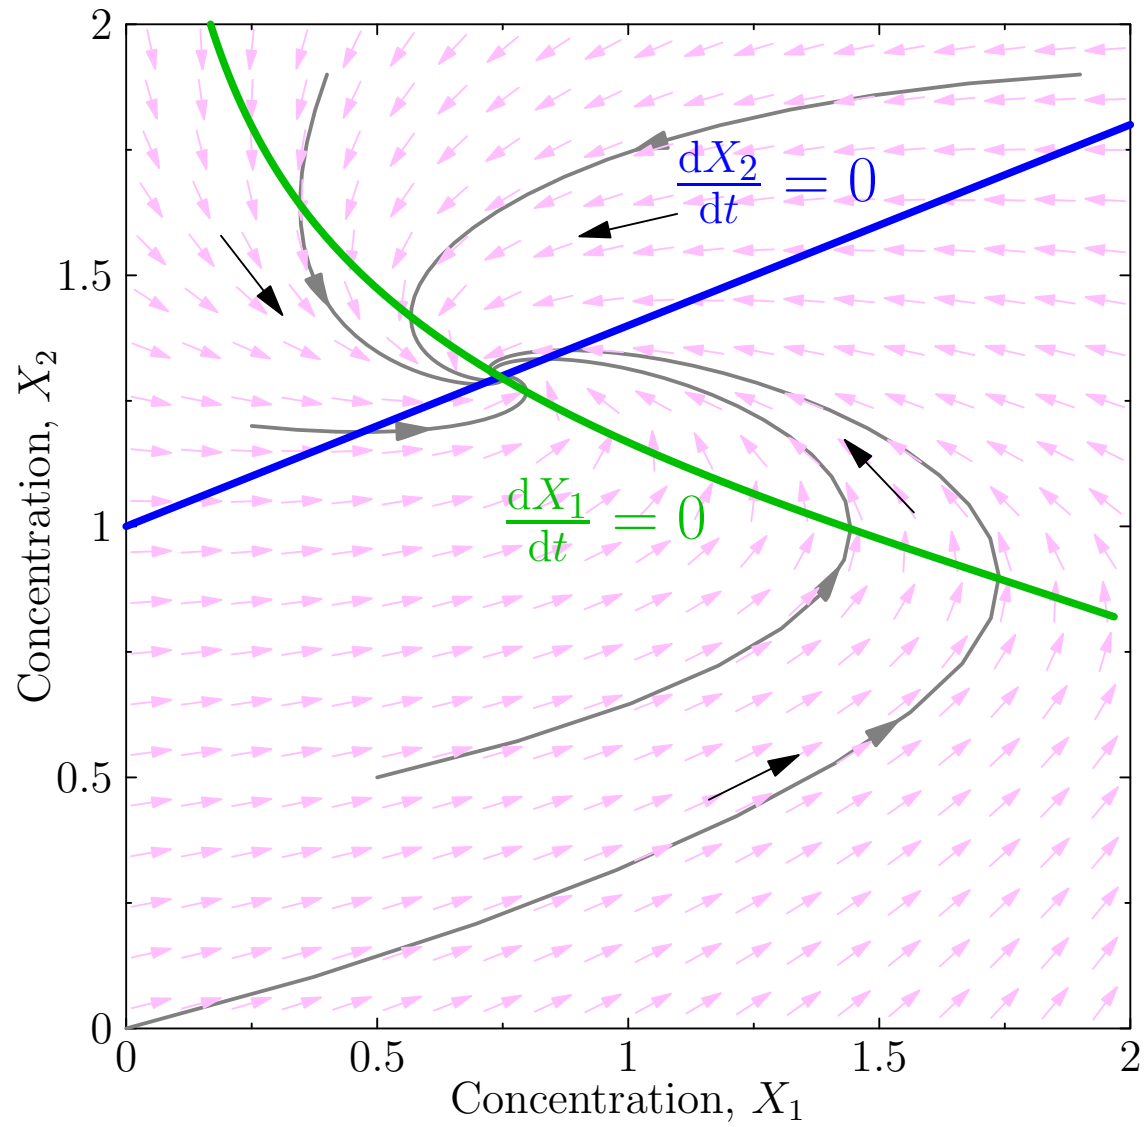

Outline

1. Understanding ODEs
2. **Stability**
3. Bifurcations

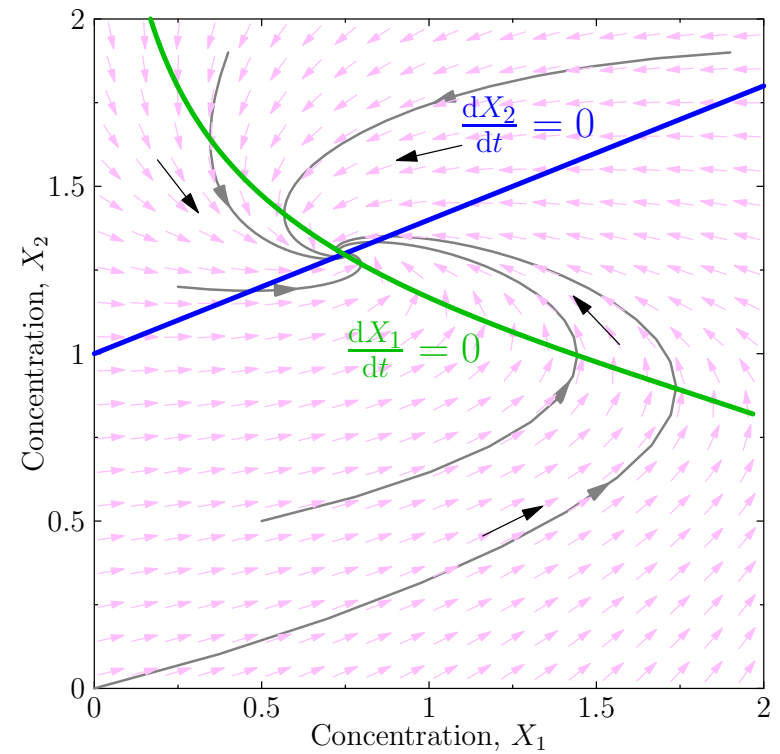

Bistability

- Let's consider a slightly different system where X_1 and X_2 inhibits each others' expression

$$\frac{dX_1(t)}{dt} = f_1(\mathbf{X}) = \frac{k_1}{1 + (X_2(t)/K_2)^{n_1}} - k_3 X_1(t)$$

$$\frac{dX_2(t)}{dt} = f_2(\mathbf{X}) = \frac{k_2}{1 + (X_1(t)/K_1)^{n_2}} - k_4 X_2(t)$$

- If we consider the symmetric case $k_1 = k_2 = 20$, $K_1 = K_2 = 1$, $k_3 = k_4 = 5$, $n_1 = n_2 = 4$ we end up with three fixed points

Bistability


- Let's consider a slightly different system where X_1 and X_2 inhibits each others' expression

$$\frac{dX_1(t)}{dt} = f_1(\mathbf{X}) = \frac{k_1}{1 + (X_2(t)/K_2)^{n_1}} - k_3 X_1(t)$$


$$\frac{dX_2(t)}{dt} = f_2(\mathbf{X}) = \frac{k_2}{1 + (X_1(t)/K_1)^{n_2}} - k_4 X_2(t)$$

- If we consider the symmetric case $k_1 = k_2 = 20$, $K_1 = K_2 = 1$, $k_3 = k_4 = 5$, $n_1 = n_2 = 4$ we end up with three fixed points


Nullclines and Bistability

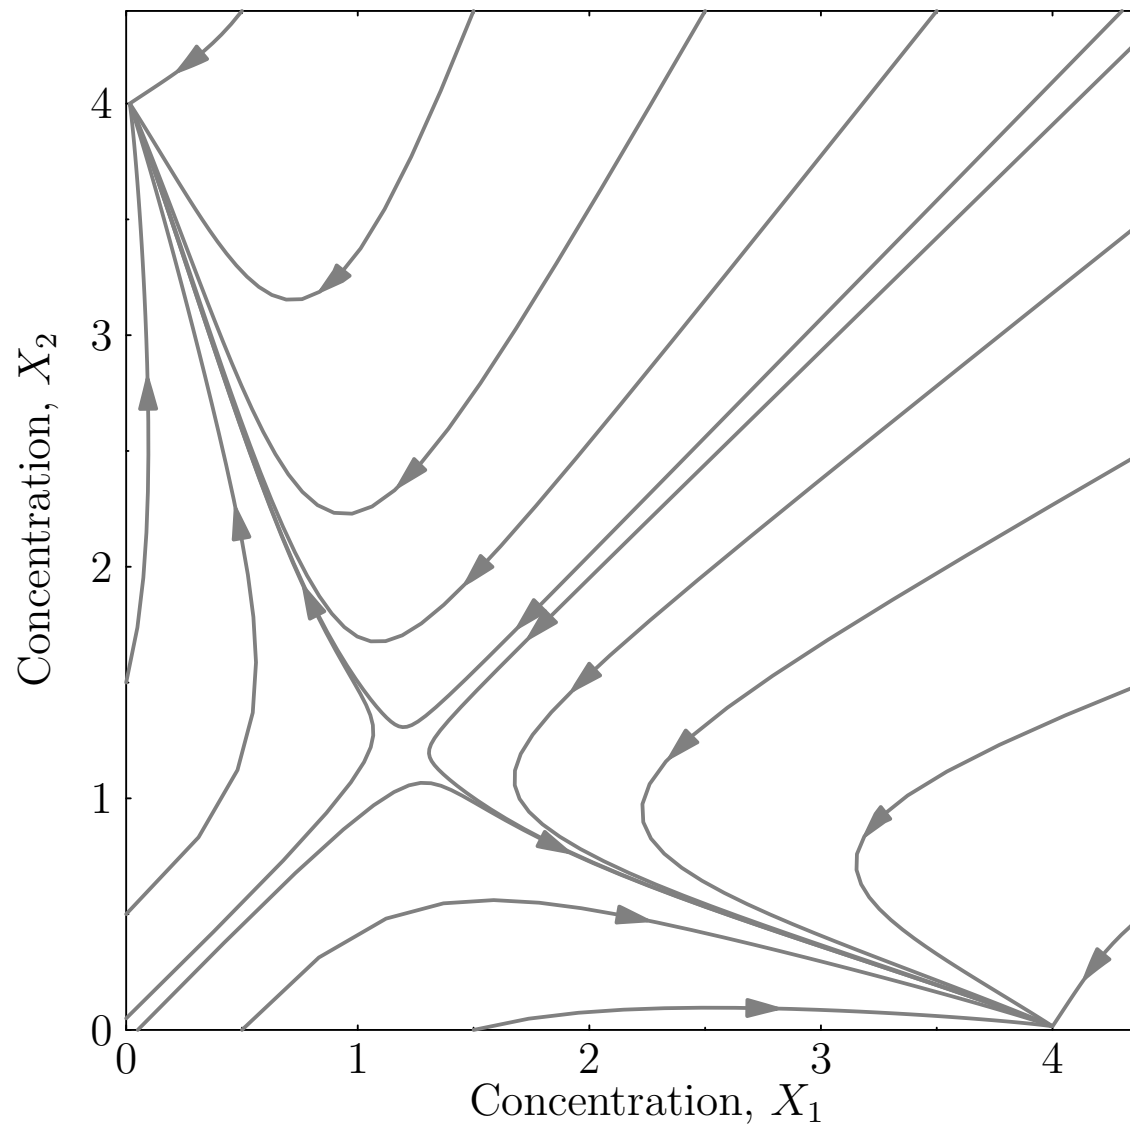


Nullclines and Bistability

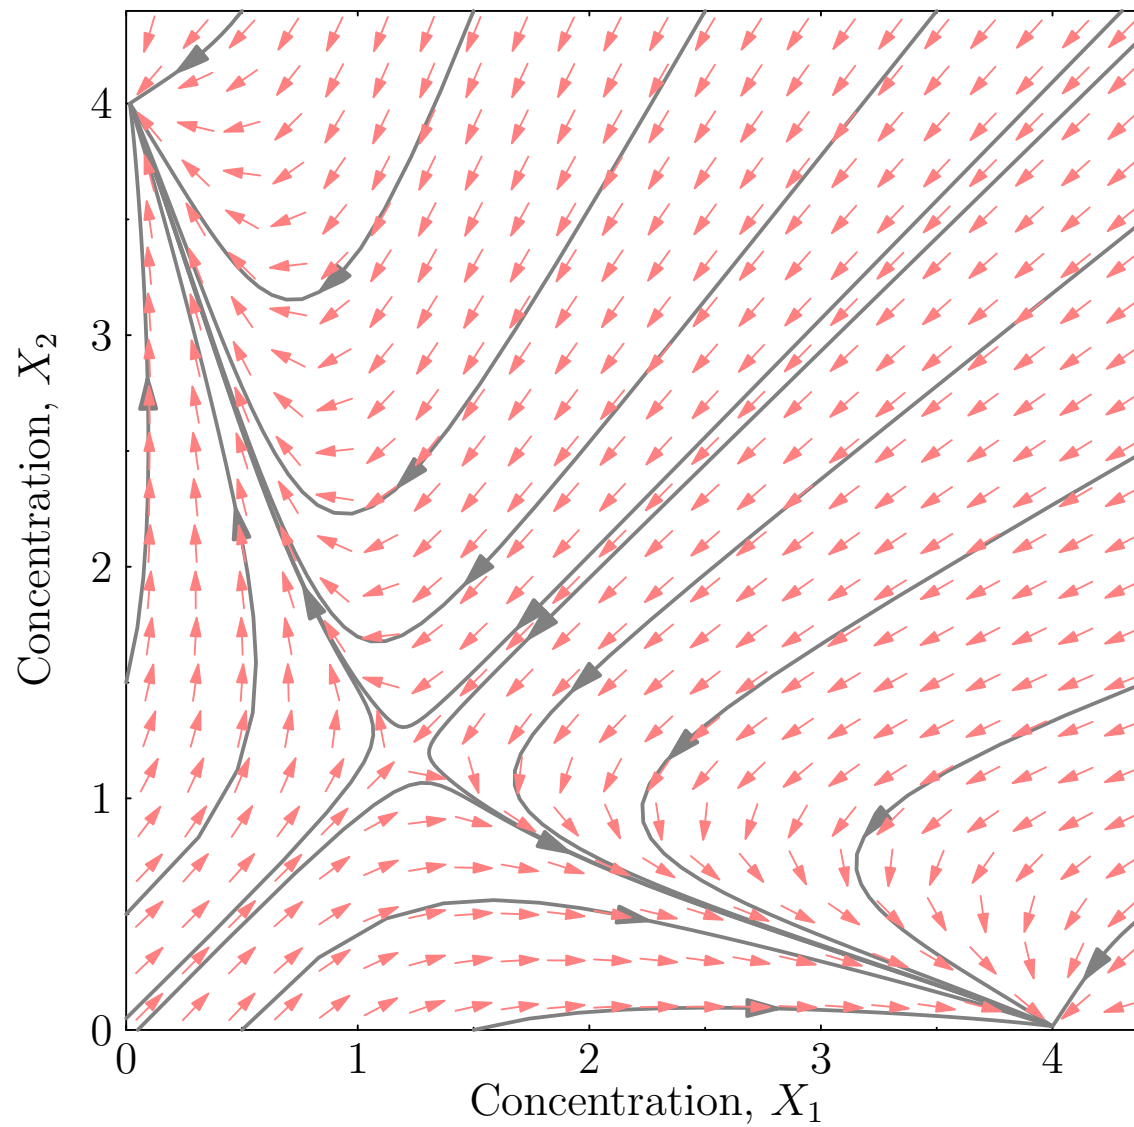


Nullclines and Bistability

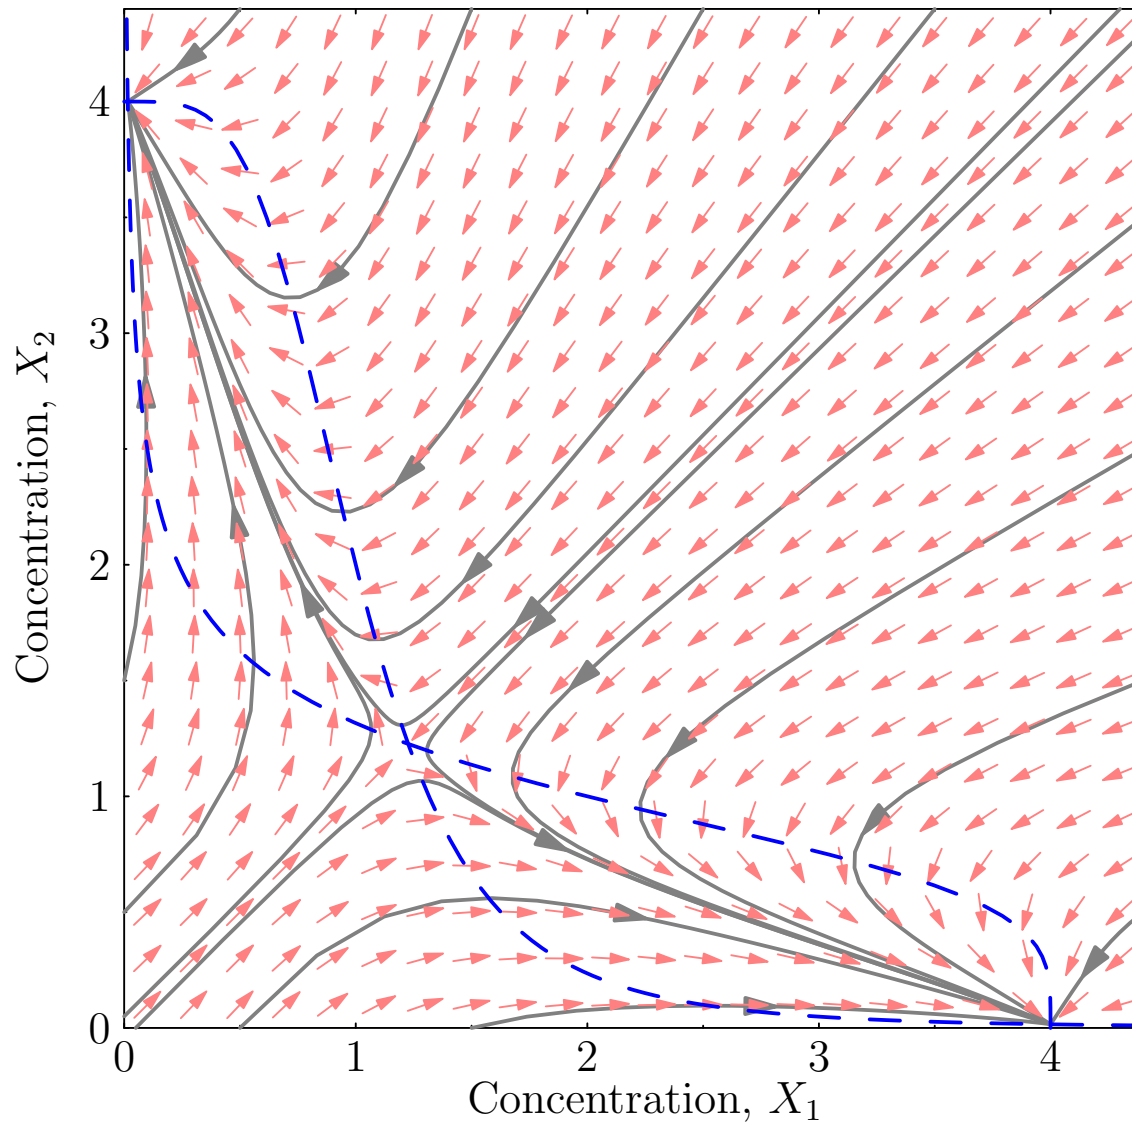

Nullclines and Bistability

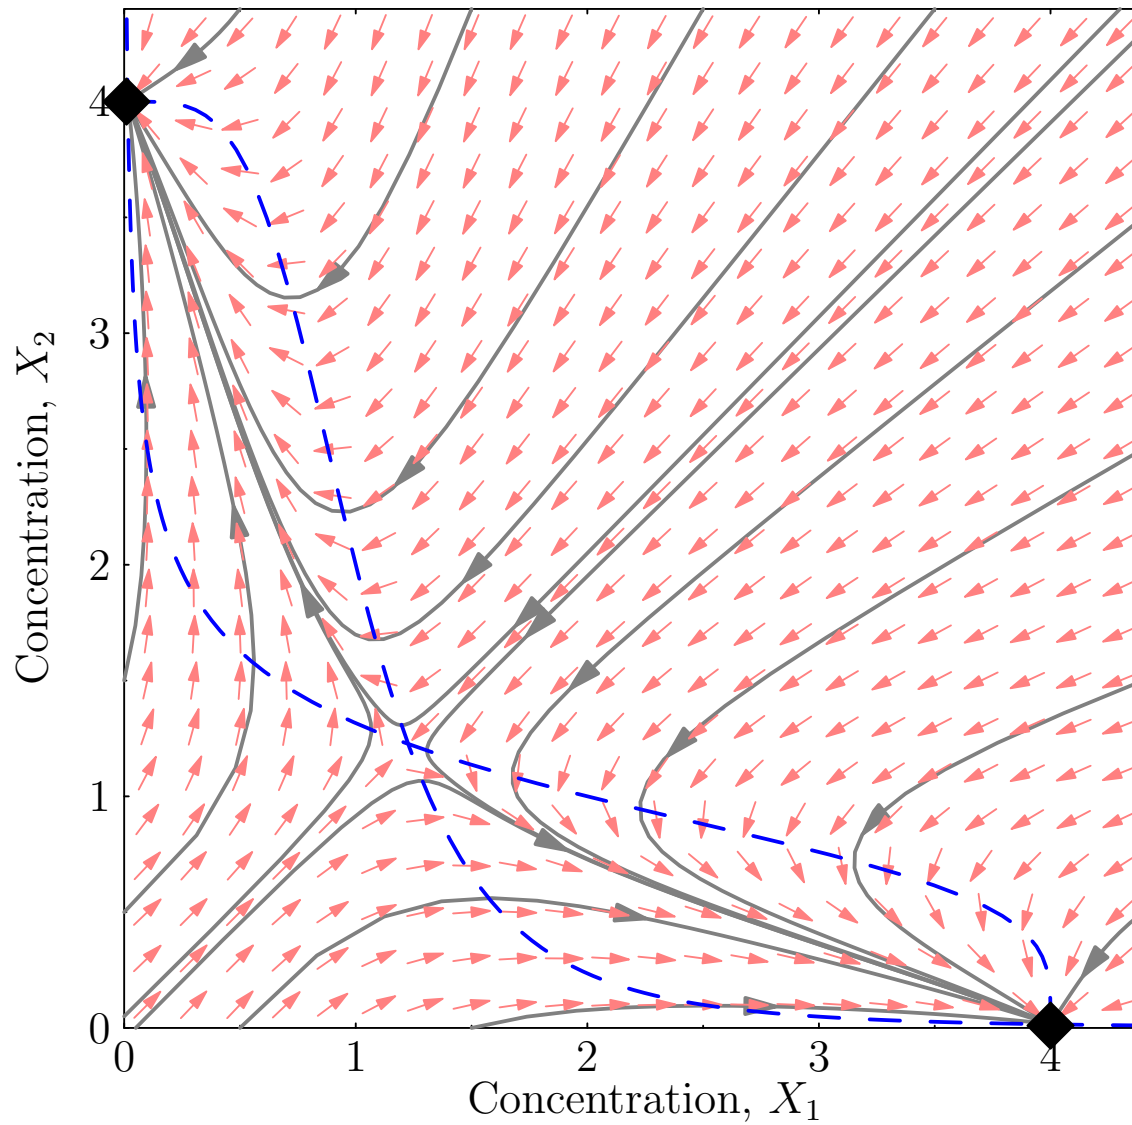


Nullclines and Bistability

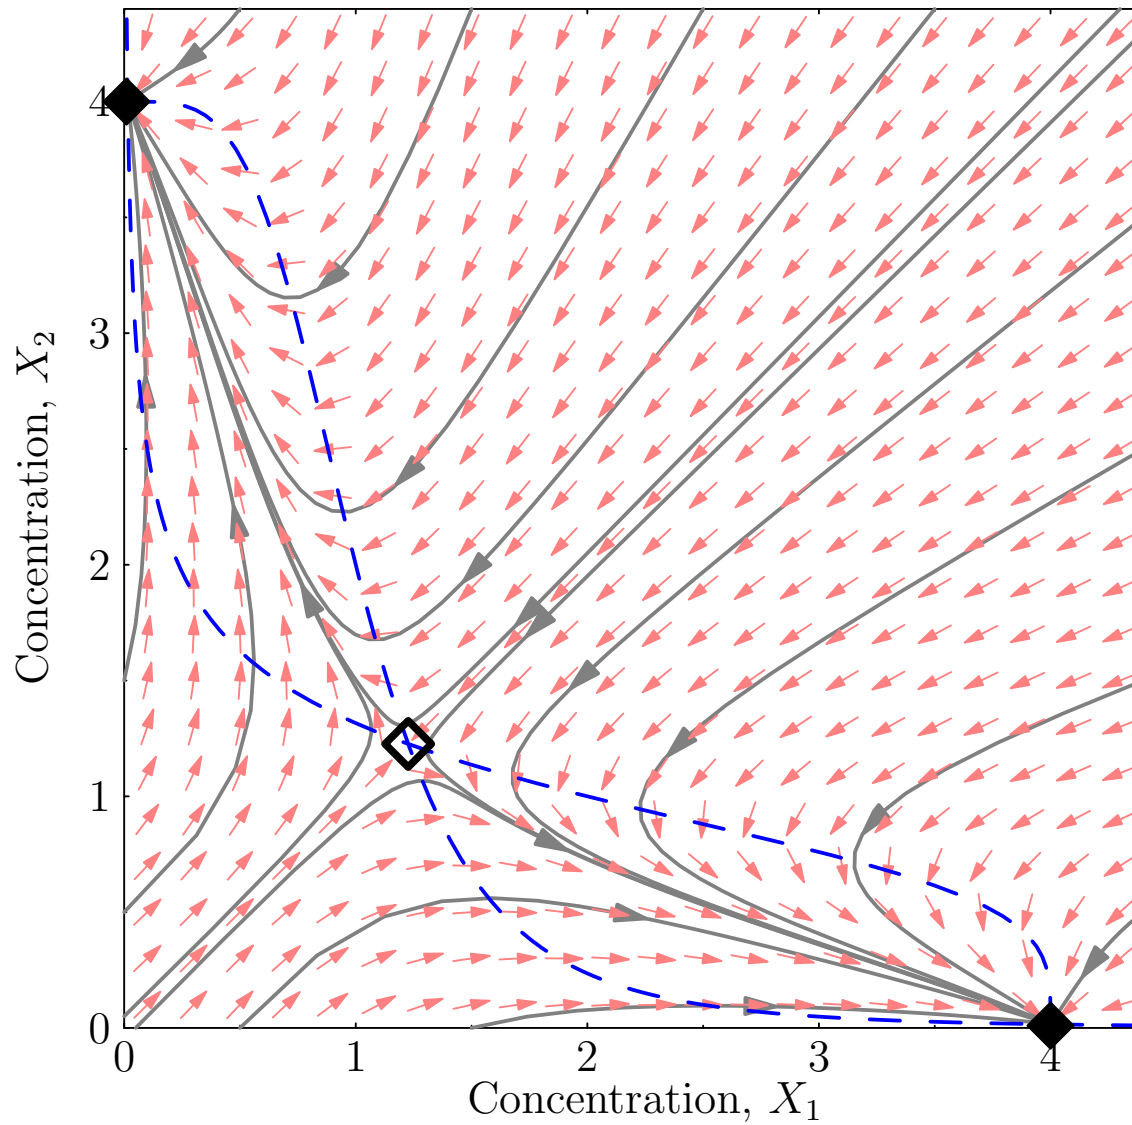


Stability

- Points can be stable or unstable

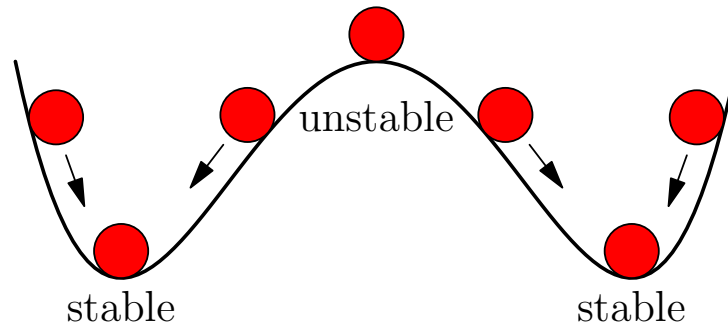


- Above 1D we can also have saddle-points

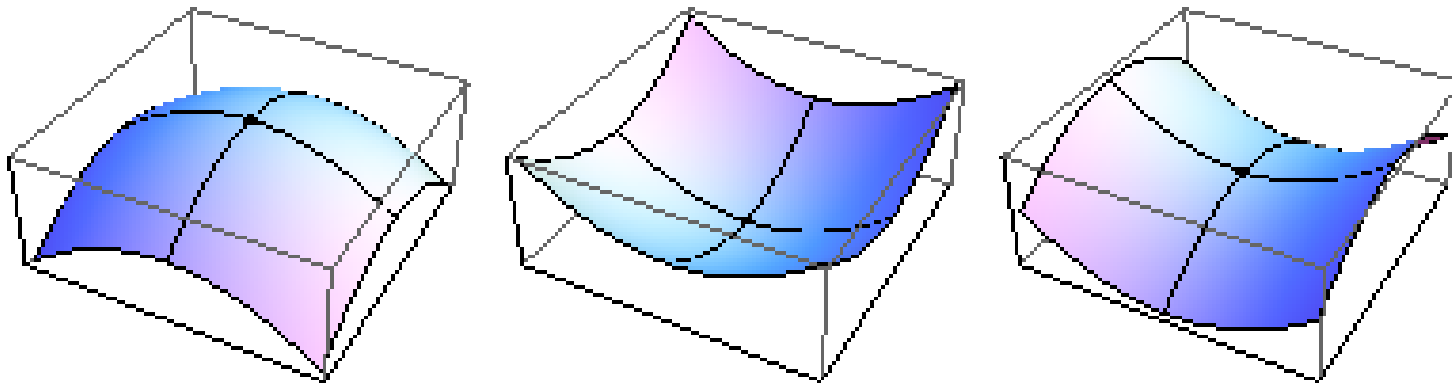


Stability

- Points can be stable or unstable

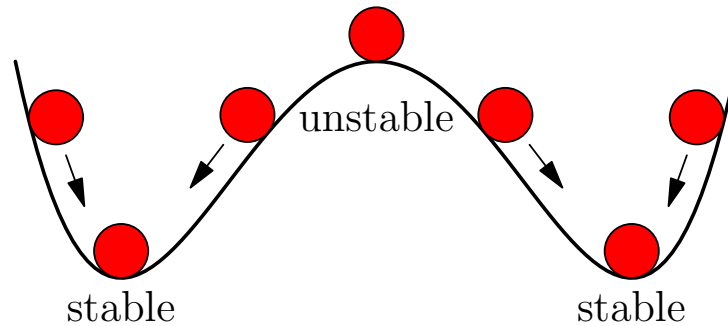

- Above 1D we can also have saddle-points

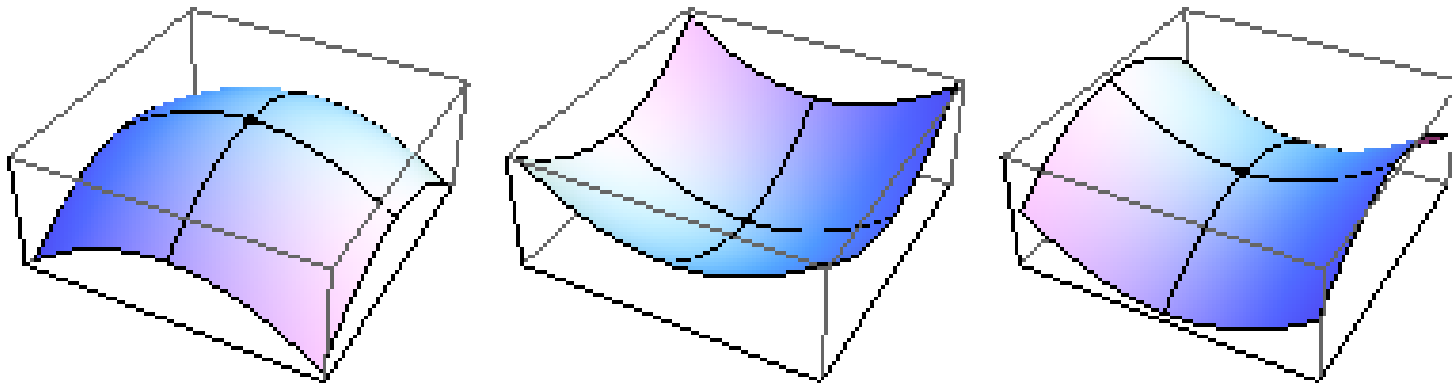

Expand Around Fixed-Point

- To study stability at a fixed-point $\mathbf{X}^*$ we look at what happens when we make a small perturbation ϵ

$$\frac{dX_i}{dt} = f_i(\mathbf{X}^* + \epsilon) \approx f_i(\mathbf{X}^*) + \epsilon^T \nabla f_i(\mathbf{X}^*) = \epsilon^T \nabla f_i(\mathbf{X}^*)$$

since $f_i(\mathbf{X}^*) = 0$ (we are at a fixed-point)

- Where

$$\epsilon^T \nabla f_i(\mathbf{X}^*) = \epsilon_1 \frac{\partial f_i(\mathbf{X}^*)}{\partial X_1} + \epsilon_2 \frac{\partial f_i(\mathbf{X}^*)}{\partial X_2} + \dots + \epsilon_n \frac{\partial f_i(\mathbf{X}^*)}{\partial X_n}$$

Expand Around Fixed-Point

- To study stability at a fixed-point $\mathbf{X}^*$ we look at what happens when we make a small perturbation ϵ

$$\frac{dX_i}{dt} = f_i(\mathbf{X}^* + \epsilon) \approx f_i(\mathbf{X}^*) + \epsilon^T \nabla f_i(\mathbf{X}^*) = \epsilon^T \nabla f_i(\mathbf{X}^*)$$

since $f_i(\mathbf{X}^*) = 0$ (we are at a fixed-point)

- Where

$$\epsilon^T \nabla f_i(\mathbf{X}^*) = \epsilon_1 \frac{\partial f_i(\mathbf{X}^*)}{\partial X_1} + \epsilon_2 \frac{\partial f_i(\mathbf{X}^*)}{\partial X_2} + \dots + \epsilon_n \frac{\partial f_i(\mathbf{X}^*)}{\partial X_n}$$

Expand Around Fixed-Point

- To study stability at a fixed-point $\mathbf{X}^*$ we look at what happens when we make a small perturbation ϵ

$$\frac{dX_i}{dt} = f_i(\mathbf{X}^* + \epsilon) \approx f_i(\mathbf{X}^*) + \epsilon^T \nabla f_i(\mathbf{X}^*) = \epsilon^T \nabla f_i(\mathbf{X}^*)$$

since $f_i(\mathbf{X}^*) = 0$ (we are at a fixed-point)

- Where

$$\epsilon^T \nabla f_i(\mathbf{X}^*) = \epsilon_1 \frac{\partial f_i(\mathbf{X}^*)}{\partial X_1} + \epsilon_2 \frac{\partial f_i(\mathbf{X}^*)}{\partial X_2} + \dots + \epsilon_n \frac{\partial f_i(\mathbf{X}^*)}{\partial X_n}$$

Expand Around Fixed-Point

- To study stability at a fixed-point $\mathbf{X}^*$ we look at what happens when we make a small perturbation ϵ

$$\frac{dX_i}{dt} = f_i(\mathbf{X}^* + \epsilon) \approx f_i(\mathbf{X}^*) + \epsilon^T \nabla f_i(\mathbf{X}^*) = \epsilon^T \nabla f_i(\mathbf{X}^*)$$

since $f_i(\mathbf{X}^*) = 0$ (we are at a fixed-point)

- Where

$$\epsilon^T \nabla f_i(\mathbf{X}^*) = \epsilon_1 \frac{\partial f_i(\mathbf{X}^*)}{\partial X_1} + \epsilon_2 \frac{\partial f_i(\mathbf{X}^*)}{\partial X_2} + \dots + \epsilon_n \frac{\partial f_i(\mathbf{X}^*)}{\partial X_n}$$

Jacobian

- In vector form

$$\frac{d\mathbf{X}}{dt} = \mathbf{f}(\mathbf{X}^* + \boldsymbol{\epsilon}) = \mathbf{J} \boldsymbol{\epsilon} + O(\epsilon^2)$$

- where $\mathbf{J}$ is the **Jacobian** matrix with elements

$$J_{ij} = \left. \frac{\partial f_i(\mathbf{X})}{\partial X_j} \right|_{\mathbf{X}=\mathbf{X}^*}$$

- Note that this is just saying

$$\frac{dX_i}{dt} \approx \epsilon_1 \frac{\partial f_i(\mathbf{X}^*)}{\partial X_1} + \epsilon_2 \frac{\partial f_i(\mathbf{X}^*)}{\partial X_2} + \cdots + \epsilon_n \frac{\partial f_i(\mathbf{X}^*)}{\partial X_n}$$

Jacobian

- In vector form

$$\frac{d\mathbf{X}}{dt} = \mathbf{f}(\mathbf{X}^* + \boldsymbol{\epsilon}) = \mathbf{J} \boldsymbol{\epsilon} + O(\boldsymbol{\epsilon}^2)$$

- where $\mathbf{J}$ is the **Jacobian** matrix with elements

$$J_{ij} = \left. \frac{\partial f_i(\mathbf{X})}{\partial X_j} \right|_{\mathbf{X}=\mathbf{X}^*}$$

- Note that this is just saying

$$\frac{dX_i}{dt} \approx \epsilon_1 \frac{\partial f_i(\mathbf{X}^*)}{\partial X_1} + \epsilon_2 \frac{\partial f_i(\mathbf{X}^*)}{\partial X_2} + \cdots + \epsilon_n \frac{\partial f_i(\mathbf{X}^*)}{\partial X_n}$$

Jacobian

- In vector form

$$\frac{d\mathbf{X}}{dt} = \mathbf{f}(\mathbf{X}^* + \boldsymbol{\epsilon}) = \mathbf{J} \boldsymbol{\epsilon} + O(\epsilon^2)$$

- where $\mathbf{J}$ is the **Jacobian** matrix with elements

$$J_{ij} = \left. \frac{\partial f_i(\mathbf{X})}{\partial X_j} \right|_{\mathbf{X}=\mathbf{X}^*}$$

- Note that this is just saying

$$\frac{dX_i}{dt} \approx \epsilon_1 \frac{\partial f_i(\mathbf{X}^*)}{\partial X_1} + \epsilon_2 \frac{\partial f_i(\mathbf{X}^*)}{\partial X_2} + \cdots + \epsilon_n \frac{\partial f_i(\mathbf{X}^*)}{\partial X_n}$$

Jacobian

- In vector form

$$\frac{d\mathbf{X}}{dt} = \mathbf{f}(\mathbf{X}^* + \boldsymbol{\epsilon}) = \mathbf{J} \boldsymbol{\epsilon} + O(\epsilon^2)$$

- where $\mathbf{J}$ is the **Jacobian** matrix with elements

$$J_{ij} = \left. \frac{\partial f_i(\mathbf{X})}{\partial X_j} \right|_{\mathbf{X}=\mathbf{X}^*}$$

- Note that this is just saying

$$\frac{dX_i}{dt} \approx \epsilon_1 \frac{\partial f_i(\mathbf{X}^*)}{\partial X_1} + \epsilon_2 \frac{\partial f_i(\mathbf{X}^*)}{\partial X_2} + \cdots + \epsilon_n \frac{\partial f_i(\mathbf{X}^*)}{\partial X_n}$$

Linear Approximation

- Let $\epsilon(t) = \mathbf{X}(t) - \mathbf{X}^*$ then (since $d\epsilon(t) = d\mathbf{X}(t)$)

$$\frac{d\epsilon(t)}{dt} = \frac{d\mathbf{X}(t)}{dt} \approx \mathbf{J} \epsilon(t)$$

- To solve this we note that we can write most square matrices $\mathbf{J}$ as

$$\mathbf{J} = \mathbf{V} \mathbf{\Lambda} \mathbf{V}^{-1}$$

- Where $\mathbf{\Lambda}$ is a diagonal matrix whose elements $\Lambda_{ii} = \lambda_i$ are eigenvalues of $\mathbf{J}$ and the columns of $\mathbf{V}$ are the eigenvectors

Linear Approximation

- Let $\epsilon(t) = \mathbf{X}(t) - \mathbf{X}^*$ then (since $d\epsilon(t) = d\mathbf{X}(t)$)

$$\frac{d\epsilon(t)}{dt} = \frac{d\mathbf{X}(t)}{dt} \approx \mathbf{J} \epsilon(t)$$

- To solve this we note that we can write most square matrices $\mathbf{J}$ as

$$\mathbf{J} = \mathbf{V} \mathbf{\Lambda} \mathbf{V}^{-1}$$

- Where $\mathbf{\Lambda}$ is a diagonal matrix whose elements $\Lambda_{ii} = \lambda_i$ are eigenvalues of $\mathbf{J}$ and the columns of $\mathbf{V}$ are the eigenvectors

Linear Approximation

- Let $\epsilon(t) = \mathbf{X}(t) - \mathbf{X}^*$ then (since $d\epsilon(t) = d\mathbf{X}(t)$)

$$\frac{d\epsilon(t)}{dt} = \frac{d\mathbf{X}(t)}{dt} \approx \mathbf{J} \epsilon(t)$$

- To solve this we note that we can write most square matrices $\mathbf{J}$ as

$$\mathbf{J} = \mathbf{V} \mathbf{\Lambda} \mathbf{V}^{-1}$$

- Where $\mathbf{\Lambda}$ is a diagonal matrix whose elements $\Lambda_{ii} = \lambda_i$ are eigenvalues of $\mathbf{J}$ and the columns of $\mathbf{V}$ are the eigenvectors

Eigensystem of a General Matrix

- For a general (non-symmetric) matrix $\mathbf{M}$ the vector $\mathbf{v}_i$ is an (right-handed) eigenvector if

$$\mathbf{M} \mathbf{v}_i = \lambda_i \mathbf{v}_i$$

- There are also left-handed eigenvectors $\mathbf{u}_i$ with the same eigenvalues, λ_i , such that

$$\mathbf{u}_i^T \mathbf{M} = \lambda_i \mathbf{u}_i^T$$

- In general $\mathbf{v}_i \neq \mathbf{u}_i$ although if $\lambda_i \neq \lambda_j$ then $\mathbf{u}_i^T \mathbf{v}_j = 0$
- The eigenvalues and eigen-vectors are either real or exist in complex conjugate pairs $\lambda_j = \lambda_i^*$ and $\mathbf{v}_j = \mathbf{v}_i^*$

Eigensystem of a General Matrix

- For a general (non-symmetric) matrix $\mathbf{M}$ the vector $\mathbf{v}_i$ is an (right-handed) eigenvector if

$$\mathbf{M} \mathbf{v}_i = \lambda_i \mathbf{v}_i$$

- There are also left-handed eigenvectors $\mathbf{u}_i$ with the same eigenvalues, λ_i , such that

$$\mathbf{u}_i^T \mathbf{M} = \lambda_i \mathbf{u}_i^T$$

- In general $\mathbf{v}_i \neq \mathbf{u}_i$ although if $\lambda_i \neq \lambda_j$ then $\mathbf{u}_i^T \mathbf{v}_j = 0$
- The eigenvalues and eigen-vectors are either real or exist in complex conjugate pairs $\lambda_j = \lambda_i^*$ and $\mathbf{v}_j = \mathbf{v}_i^*$

Eigensystem of a General Matrix

- For a general (non-symmetric) matrix $\mathbf{M}$ the vector $\mathbf{v}_i$ is an (right-handed) eigenvector if

$$\mathbf{M} \mathbf{v}_i = \lambda_i \mathbf{v}_i$$

- There are also left-handed eigenvectors $\mathbf{u}_i$ with the same eigenvalues, λ_i , such that

$$\mathbf{u}_i^T \mathbf{M} = \lambda_i \mathbf{u}_i^T$$

- In general $\mathbf{v}_i \neq \mathbf{u}_i$ although if $\lambda_i \neq \lambda_j$ then $\mathbf{u}_i^T \mathbf{v}_j = 0$
- The eigenvalues and eigen-vectors are either real or exist in complex conjugate pairs $\lambda_j = \lambda_i^*$ and $\mathbf{v}_j = \mathbf{v}_i^*$

Eigensystem of a General Matrix

- For a general (non-symmetric) matrix $\mathbf{M}$ the vector $\mathbf{v}_i$ is an (right-handed) eigenvector if

$$\mathbf{M} \mathbf{v}_i = \lambda_i \mathbf{v}_i$$

- There are also left-handed eigenvectors $\mathbf{u}_i$ with the same eigenvalues, λ_i , such that

$$\mathbf{u}_i^T \mathbf{M} = \lambda_i \mathbf{u}_i^T$$

- In general $\mathbf{v}_i \neq \mathbf{u}_i$ although if $\lambda_i \neq \lambda_j$ then $\mathbf{u}_i^T \mathbf{v}_j = 0$
- The eigenvalues and eigen-vectors are either real or exist in complex conjugate pairs $\lambda_j = \lambda_i^*$ and $\mathbf{v}_j = \mathbf{v}_i^*$

Matrix Decomposition

- If we write

$$\mathbf{V} = (\mathbf{v}_1 \quad \mathbf{v}_2 \quad \cdots \quad \mathbf{v}_n) \quad \mathbf{\Lambda} = \begin{pmatrix} \lambda_1 & 0 & \cdots & 0 \\ 0 & \lambda_2 & \cdots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \cdots & \lambda_n \end{pmatrix}$$

- Then $\mathbf{M} = \mathbf{V} \mathbf{\Lambda} \mathbf{V}^{-1} = \mathbf{V} \mathbf{\Lambda} \mathbf{U} = \mathbf{U}^{-1} \mathbf{\Lambda} \mathbf{U}$

- where $\mathbf{U} = \mathbf{V}^{-1}$ has rows equal to $\mathbf{u}_i^T$

- Multiplying $\mathbf{M}$ on the right by $\mathbf{V}$ we find

$$\mathbf{M} \mathbf{V} = (\mathbf{V} \mathbf{\Lambda} \mathbf{V}^{-1}) \mathbf{V} = \mathbf{V} \mathbf{\Lambda} \quad \Rightarrow \quad \mathbf{M} \mathbf{v}_i = \lambda_i \mathbf{v}_i$$

- Multiplying $\mathbf{M}$ on the left by $\mathbf{U} = \mathbf{V}^{-1}$

$$\mathbf{U} \mathbf{M} = \mathbf{U} (\mathbf{U}^{-1} \mathbf{\Lambda} \mathbf{U}) = \mathbf{\Lambda} \mathbf{U} \quad \Rightarrow \quad \mathbf{u}_i^T \mathbf{M} = \lambda_i \mathbf{u}_i^T$$

Matrix Decomposition

- If we write

$$\mathbf{V} = (\mathbf{v}_1 \quad \mathbf{v}_2 \quad \cdots \quad \mathbf{v}_n) \quad \mathbf{\Lambda} = \begin{pmatrix} \lambda_1 & 0 & \cdots & 0 \\ 0 & \lambda_2 & \cdots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \cdots & \lambda_n \end{pmatrix}$$

- Then $\mathbf{M} = \mathbf{V} \mathbf{\Lambda} \mathbf{V}^{-1} = \mathbf{V} \mathbf{\Lambda} \mathbf{U} = \mathbf{U}^{-1} \mathbf{\Lambda} \mathbf{U}$

- where $\mathbf{U} = \mathbf{V}^{-1}$ has rows equal to $\mathbf{u}_i^T$

- Multiplying $\mathbf{M}$ on the right by $\mathbf{V}$ we find

$$\mathbf{M} \mathbf{V} = (\mathbf{V} \mathbf{\Lambda} \mathbf{V}^{-1}) \mathbf{V} = \mathbf{V} \mathbf{\Lambda} \quad \Rightarrow \quad \mathbf{M} \mathbf{v}_i = \lambda_i \mathbf{v}_i$$

- Multiplying $\mathbf{M}$ on the left by $\mathbf{U} = \mathbf{V}^{-1}$

$$\mathbf{U} \mathbf{M} = \mathbf{U} (\mathbf{U}^{-1} \mathbf{\Lambda} \mathbf{U}) = \mathbf{\Lambda} \mathbf{U} \quad \Rightarrow \quad \mathbf{u}_i^T \mathbf{M} = \lambda_i \mathbf{u}_i^T$$

Matrix Decomposition

- If we write

$$\mathbf{V} = (\mathbf{v}_1 \quad \mathbf{v}_2 \quad \cdots \quad \mathbf{v}_n) \quad \mathbf{\Lambda} = \begin{pmatrix} \lambda_1 & 0 & \cdots & 0 \\ 0 & \lambda_2 & \cdots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \cdots & \lambda_n \end{pmatrix}$$

- Then $\mathbf{M} = \mathbf{V} \mathbf{\Lambda} \mathbf{V}^{-1} = \mathbf{V} \mathbf{\Lambda} \mathbf{U} = \mathbf{U}^{-1} \mathbf{\Lambda} \mathbf{U}$
- where $\mathbf{U} = \mathbf{V}^{-1}$ has rows equal to $\mathbf{u}_i^T$
- Multiplying $\mathbf{M}$ on the right by $\mathbf{V}$ we find

$$\mathbf{M} \mathbf{V} = (\mathbf{V} \mathbf{\Lambda} \mathbf{V}^{-1}) \mathbf{V} = \mathbf{V} \mathbf{\Lambda} \quad \Rightarrow \quad \mathbf{M} \mathbf{v}_i = \lambda_i \mathbf{v}_i$$

- Multiplying $\mathbf{M}$ on the left by $\mathbf{U} = \mathbf{V}^{-1}$

$$\mathbf{U} \mathbf{M} = \mathbf{U} (\mathbf{U}^{-1} \mathbf{\Lambda} \mathbf{U}) = \mathbf{\Lambda} \mathbf{U} \quad \Rightarrow \quad \mathbf{u}_i^T \mathbf{M} = \lambda_i \mathbf{u}_i^T$$

Linearised Solution

- Multiply the linear approximation by $\mathbf{V}^{-1}$

$$\frac{d\boldsymbol{\epsilon}(t)}{dt} = \mathbf{V}\boldsymbol{\Lambda}\mathbf{V}^{-1}\boldsymbol{\epsilon}(t) \quad \Rightarrow \quad \frac{d\mathbf{V}^{-1}\boldsymbol{\epsilon}(t)}{dt} = \boldsymbol{\Lambda}\mathbf{V}^{-1}\boldsymbol{\epsilon}(t)$$

- Writing $\hat{\boldsymbol{\epsilon}}(t) = \mathbf{V}^{-1}\boldsymbol{\epsilon}(t)$ then

$$\frac{d\hat{\boldsymbol{\epsilon}}(t)}{dt} = \boldsymbol{\Lambda}\hat{\boldsymbol{\epsilon}}(t) \quad \text{or} \quad \frac{d\hat{\epsilon}_i(t)}{dt} = \lambda_i \hat{\epsilon}_i(t)$$

- With solution

$$\hat{\epsilon}_i(t) = e^{\lambda_i t} \hat{\epsilon}_i(0)$$

Linearised Solution

- Multiply the linear approximation by $\mathbf{V}^{-1}$

$$\frac{d\boldsymbol{\epsilon}(t)}{dt} = \mathbf{V}\boldsymbol{\Lambda}\mathbf{V}^{-1}\boldsymbol{\epsilon}(t) \quad \Rightarrow \quad \frac{d\mathbf{V}^{-1}\boldsymbol{\epsilon}(t)}{dt} = \boldsymbol{\Lambda}\mathbf{V}^{-1}\boldsymbol{\epsilon}(t)$$

- Writing $\hat{\boldsymbol{\epsilon}}(t) = \mathbf{V}^{-1}\boldsymbol{\epsilon}(t)$ then

$$\frac{d\hat{\boldsymbol{\epsilon}}(t)}{dt} = \boldsymbol{\Lambda}\hat{\boldsymbol{\epsilon}}(t) \quad \text{or} \quad \frac{d\hat{\epsilon}_i(t)}{dt} = \lambda_i \hat{\epsilon}_i(t)$$

- With solution

$$\hat{\epsilon}_i(t) = e^{\lambda_i t} \hat{\epsilon}_i(0)$$

Linearised Solution

- Multiply the linear approximation by $\mathbf{V}^{-1}$

$$\frac{d\boldsymbol{\epsilon}(t)}{dt} = \mathbf{V}\boldsymbol{\Lambda}\mathbf{V}^{-1}\boldsymbol{\epsilon}(t) \quad \Rightarrow \quad \frac{d\mathbf{V}^{-1}\boldsymbol{\epsilon}(t)}{dt} = \boldsymbol{\Lambda}\mathbf{V}^{-1}\boldsymbol{\epsilon}(t)$$

- Writing $\hat{\boldsymbol{\epsilon}}(t) = \mathbf{V}^{-1}\boldsymbol{\epsilon}(t)$ then

$$\frac{d\hat{\boldsymbol{\epsilon}}(t)}{dt} = \boldsymbol{\Lambda}\hat{\boldsymbol{\epsilon}}(t) \quad \text{or} \quad \frac{d\hat{\epsilon}_i(t)}{dt} = \lambda_i \hat{\epsilon}_i(t)$$

- With solution

$$\hat{\epsilon}_i(t) = e^{\lambda_i t} \hat{\epsilon}_i(0)$$

Linearised Solution

- Multiply the linear approximation by $\mathbf{V}^{-1}$

$$\frac{d\boldsymbol{\epsilon}(t)}{dt} = \mathbf{V}\boldsymbol{\Lambda}\mathbf{V}^{-1}\boldsymbol{\epsilon}(t) \quad \Rightarrow \quad \frac{d\mathbf{V}^{-1}\boldsymbol{\epsilon}(t)}{dt} = \boldsymbol{\Lambda}\mathbf{V}^{-1}\boldsymbol{\epsilon}(t)$$

- Writing $\hat{\boldsymbol{\epsilon}}(t) = \mathbf{V}^{-1}\boldsymbol{\epsilon}(t)$ then

$$\frac{d\hat{\boldsymbol{\epsilon}}(t)}{dt} = \boldsymbol{\Lambda}\hat{\boldsymbol{\epsilon}}(t) \quad \text{or} \quad \frac{d\hat{\epsilon}_i(t)}{dt} = \lambda_i \hat{\epsilon}_i(t)$$


- With solution

$$\hat{\epsilon}_i(t) = e^{\lambda_i t} \hat{\epsilon}_i(0)$$

Example


$$\mathbf{J} = \begin{pmatrix} 2 & 1 \\ 3 & -1 \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.784 & -0.255 \\ 0.621 & 0.967 \end{pmatrix} \begin{pmatrix} 2.791 & 0 \\ 0 & -1.791 \end{pmatrix} \begin{pmatrix} 1.055 & 0.278 \\ -0.677 & 0.856 \end{pmatrix}$$

$$\hat{\epsilon}_i(t) \approx e^{\lambda_i t} \hat{\epsilon}_i(0)$$




Example

$$\mathbf{J} = \begin{pmatrix} 2 & 1 \\ 3 & -1 \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.784 & -0.255 \\ 0.621 & 0.967 \end{pmatrix} \begin{pmatrix} 2.791 & 0 \\ 0 & -1.791 \end{pmatrix} \begin{pmatrix} 1.055 & 0.278 \\ -0.677 & 0.856 \end{pmatrix}$$

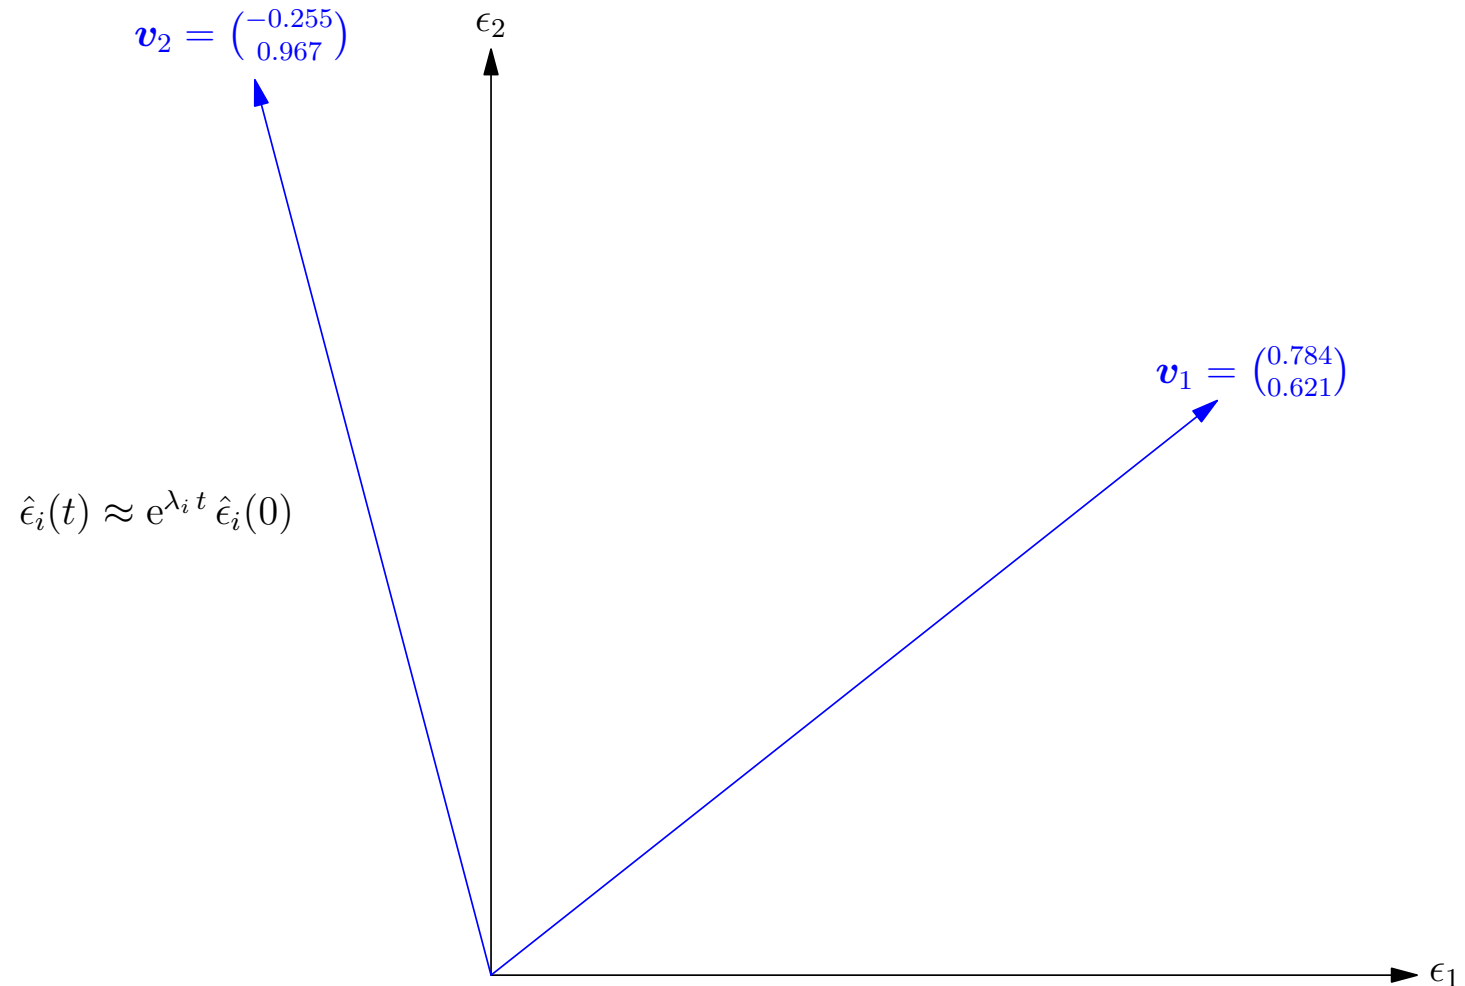


Example

$$\mathbf{J} = \begin{pmatrix} 2 & 1 \\ 3 & -1 \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.784 & -0.255 \\ 0.621 & 0.967 \end{pmatrix} \begin{pmatrix} 2.791 & 0 \\ 0 & -1.791 \end{pmatrix} \begin{pmatrix} 1.055 & 0.278 \\ -0.677 & 0.856 \end{pmatrix}$$

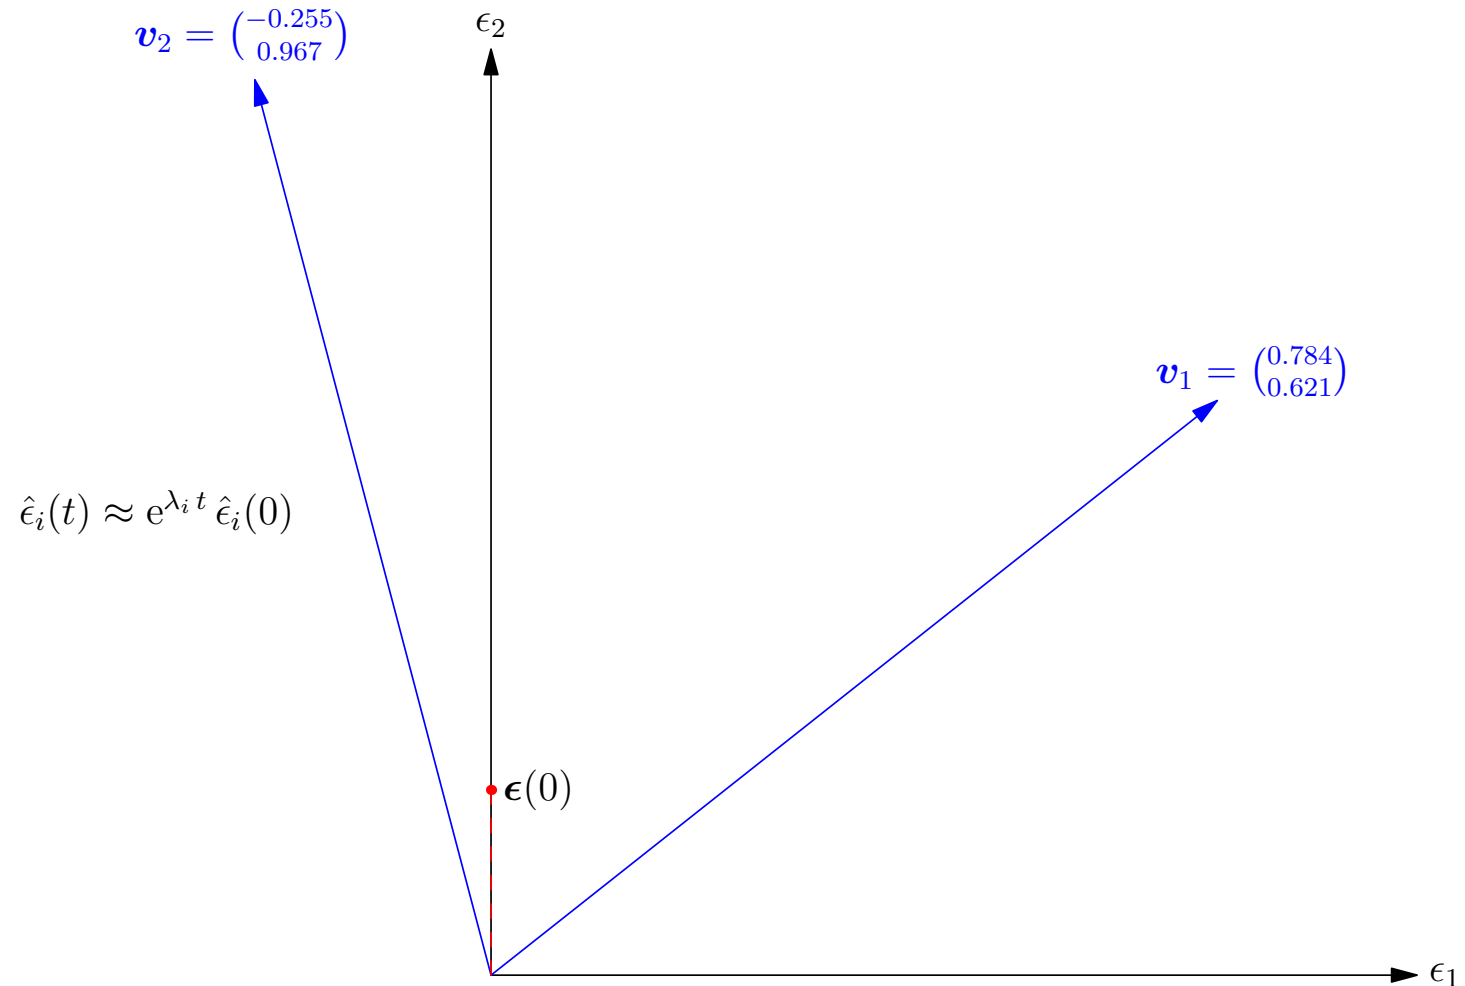


Example

$$\mathbf{J} = \begin{pmatrix} 2 & 1 \\ 3 & -1 \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.784 & -0.255 \\ 0.621 & 0.967 \end{pmatrix} \begin{pmatrix} 2.791 & 0 \\ 0 & -1.791 \end{pmatrix} \begin{pmatrix} 1.055 & 0.278 \\ -0.677 & 0.856 \end{pmatrix}$$

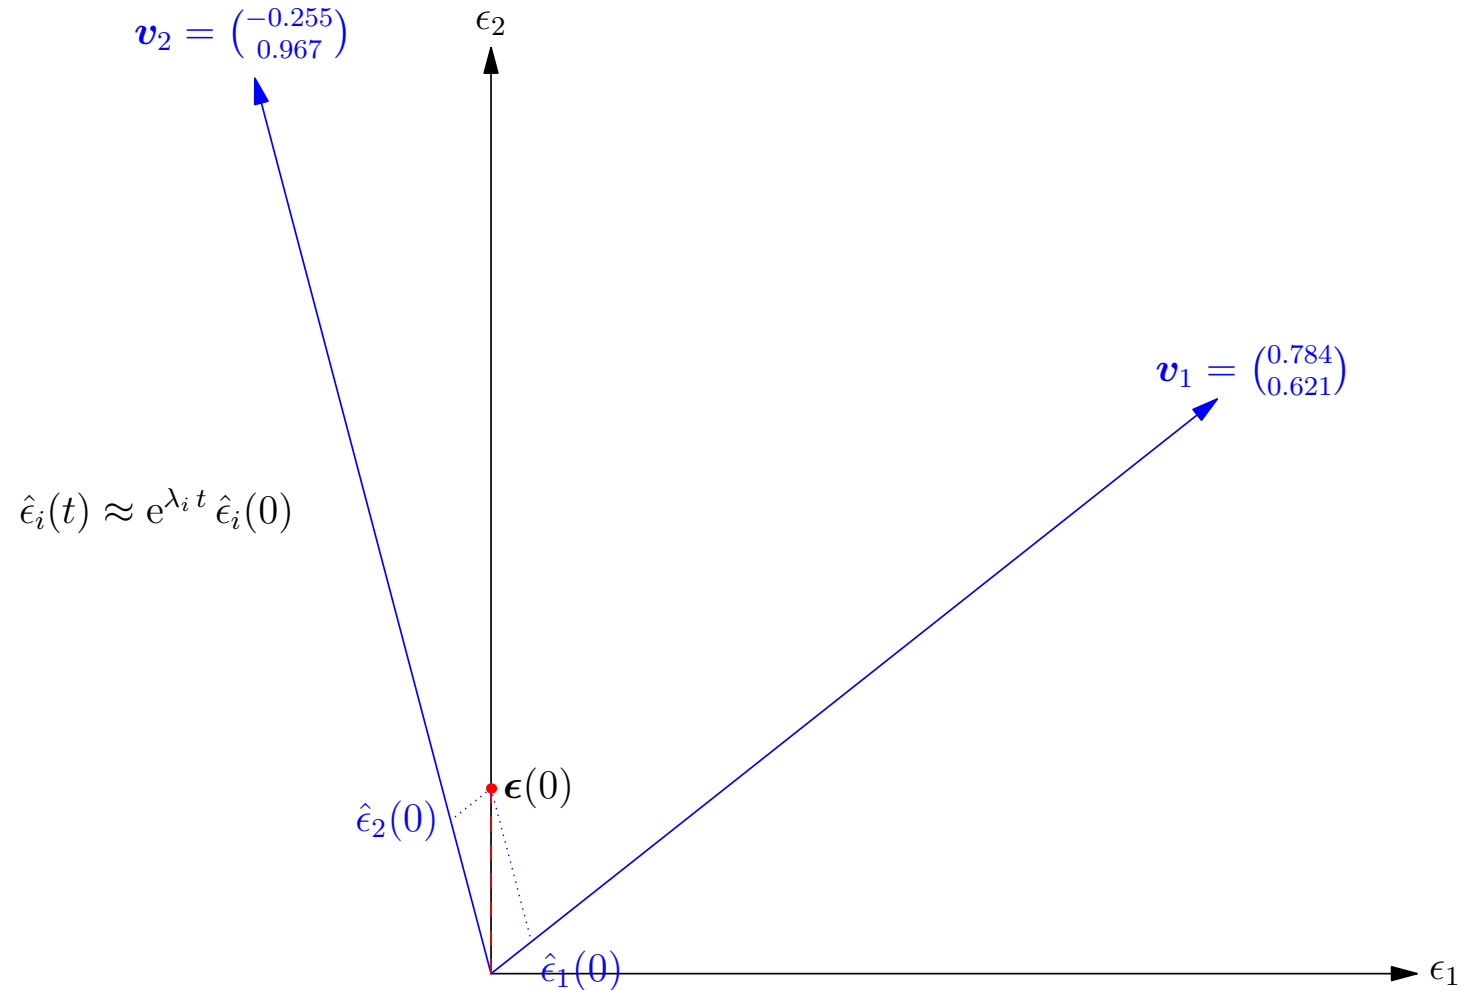


Example

$$\mathbf{J} = \begin{pmatrix} 2 & 1 \\ 3 & -1 \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.784 & -0.255 \\ 0.621 & 0.967 \end{pmatrix} \begin{pmatrix} 2.791 & 0 \\ 0 & -1.791 \end{pmatrix} \begin{pmatrix} 1.055 & 0.278 \\ -0.677 & 0.856 \end{pmatrix}$$

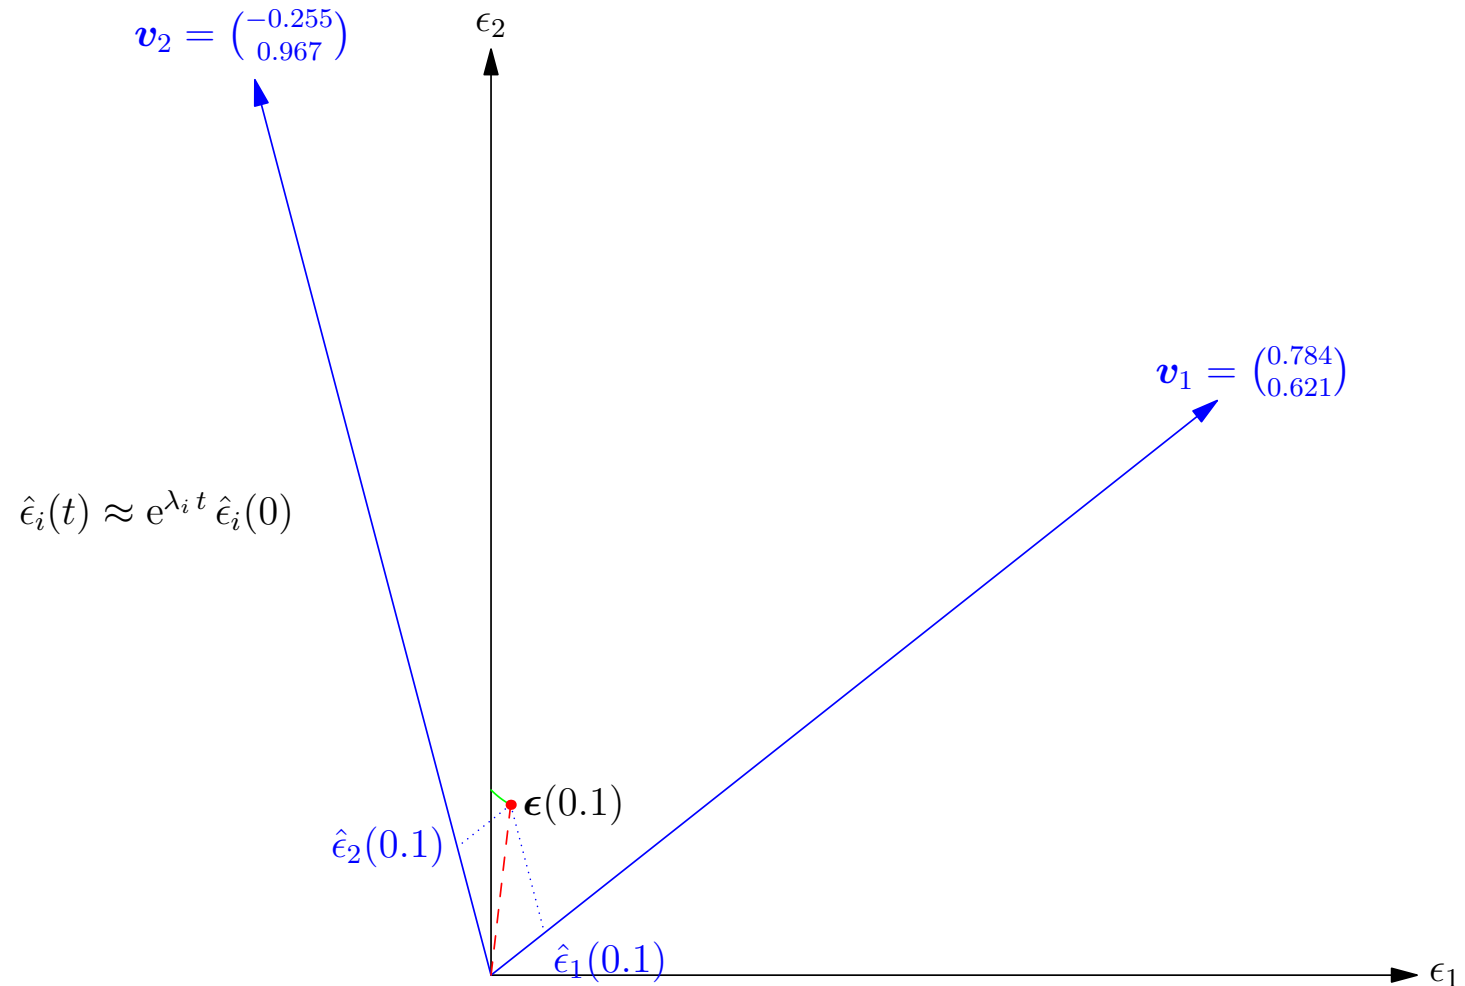


Example

$$\mathbf{J} = \begin{pmatrix} 2 & 1 \\ 3 & -1 \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.784 & -0.255 \\ 0.621 & 0.967 \end{pmatrix} \begin{pmatrix} 2.791 & 0 \\ 0 & -1.791 \end{pmatrix} \begin{pmatrix} 1.055 & 0.278 \\ -0.677 & 0.856 \end{pmatrix}$$

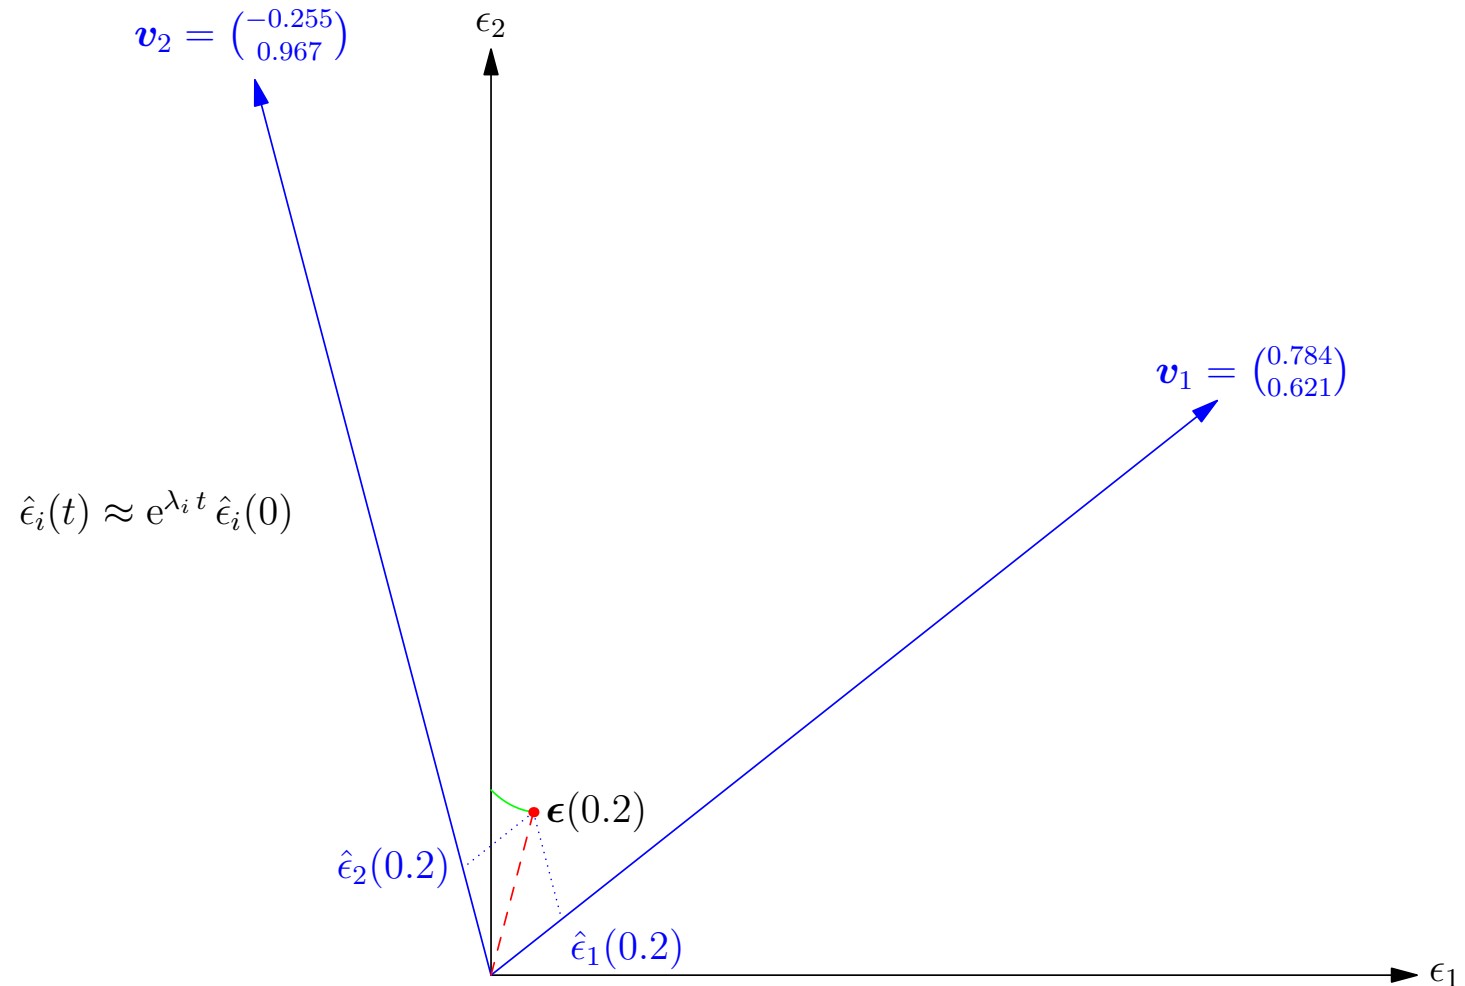


Example

$$\mathbf{J} = \begin{pmatrix} 2 & 1 \\ 3 & -1 \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.784 & -0.255 \\ 0.621 & 0.967 \end{pmatrix} \begin{pmatrix} 2.791 & 0 \\ 0 & -1.791 \end{pmatrix} \begin{pmatrix} 1.055 & 0.278 \\ -0.677 & 0.856 \end{pmatrix}$$

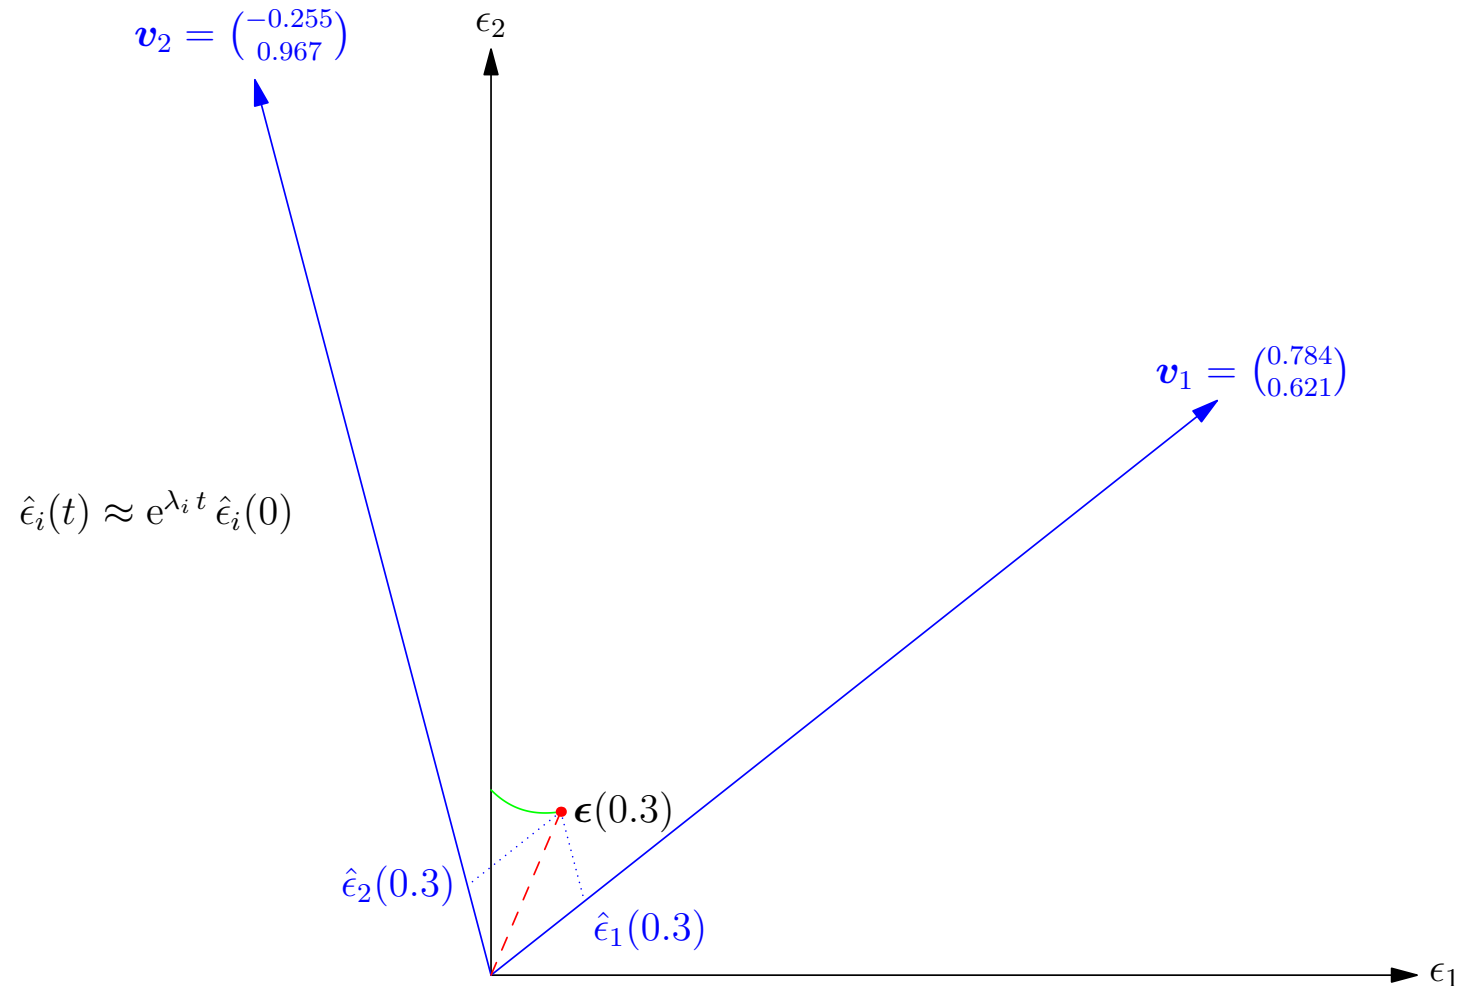


Example

$$\mathbf{J} = \begin{pmatrix} 2 & 1 \\ 3 & -1 \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.784 & -0.255 \\ 0.621 & 0.967 \end{pmatrix} \begin{pmatrix} 2.791 & 0 \\ 0 & -1.791 \end{pmatrix} \begin{pmatrix} 1.055 & 0.278 \\ -0.677 & 0.856 \end{pmatrix}$$

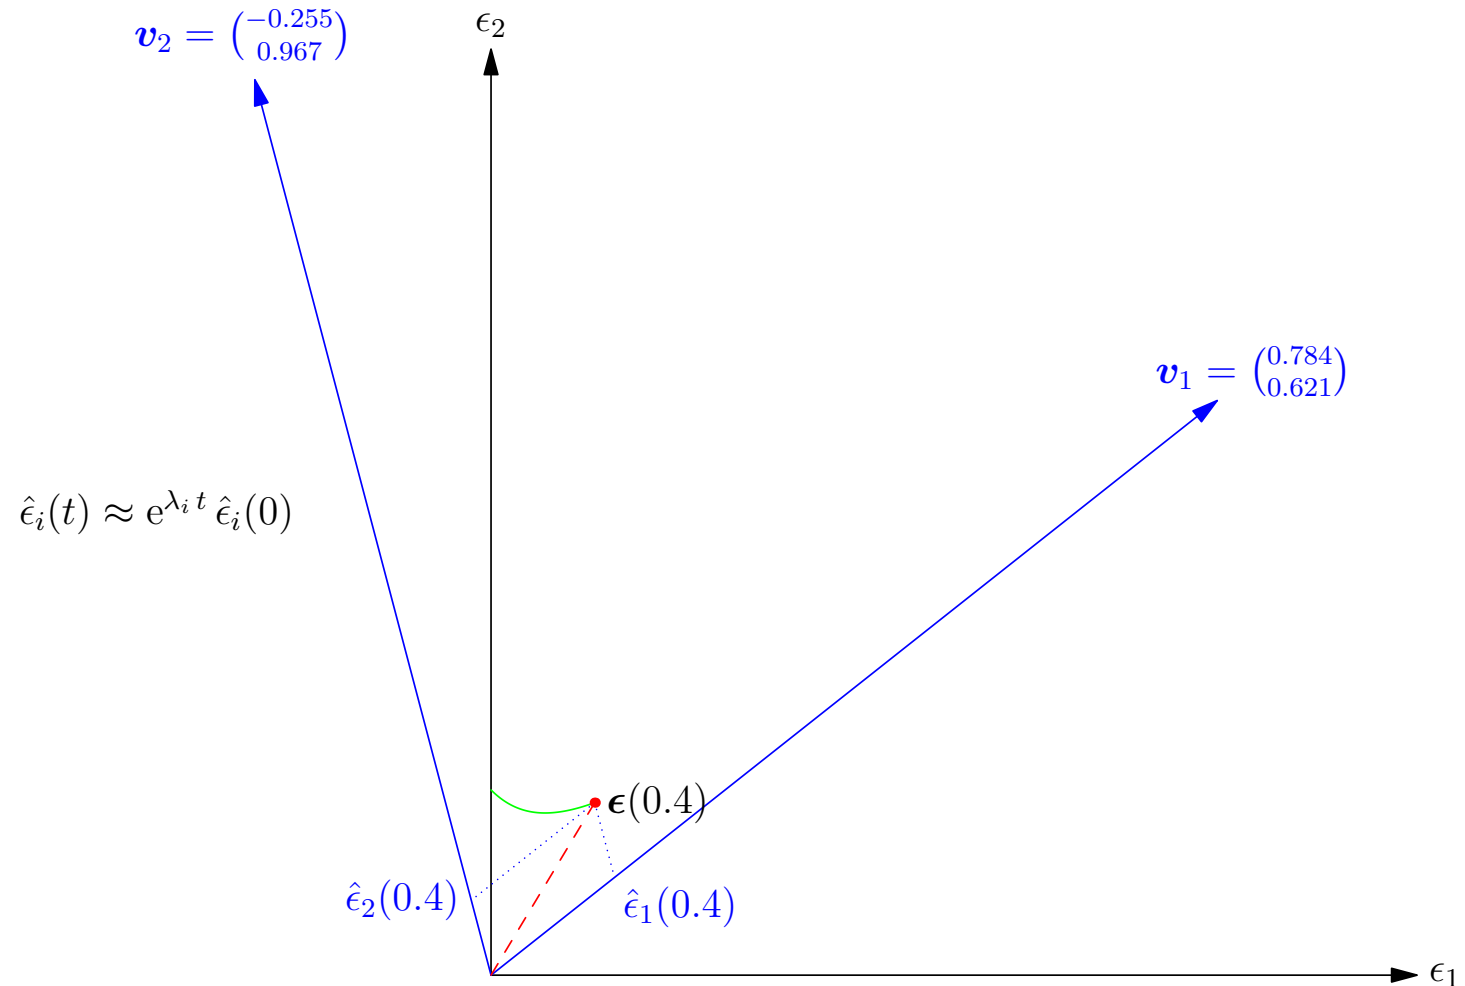


Example

$$\mathbf{J} = \begin{pmatrix} 2 & 1 \\ 3 & -1 \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.784 & -0.255 \\ 0.621 & 0.967 \end{pmatrix} \begin{pmatrix} 2.791 & 0 \\ 0 & -1.791 \end{pmatrix} \begin{pmatrix} 1.055 & 0.278 \\ -0.677 & 0.856 \end{pmatrix}$$

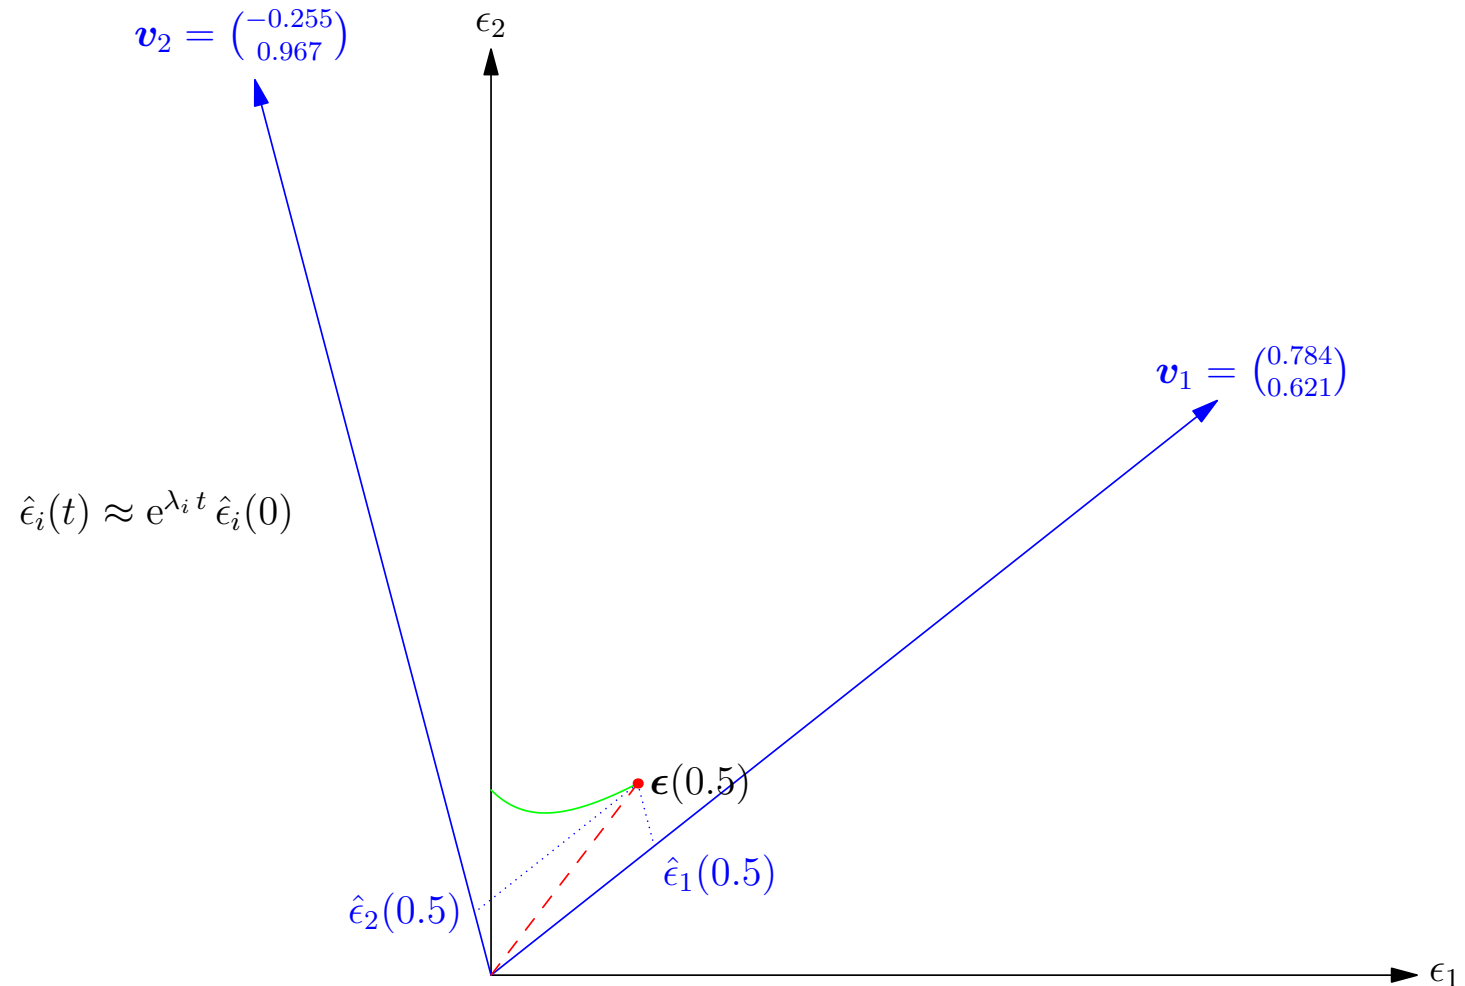


Example

$$\mathbf{J} = \begin{pmatrix} 2 & 1 \\ 3 & -1 \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.784 & -0.255 \\ 0.621 & 0.967 \end{pmatrix} \begin{pmatrix} 2.791 & 0 \\ 0 & -1.791 \end{pmatrix} \begin{pmatrix} 1.055 & 0.278 \\ -0.677 & 0.856 \end{pmatrix}$$

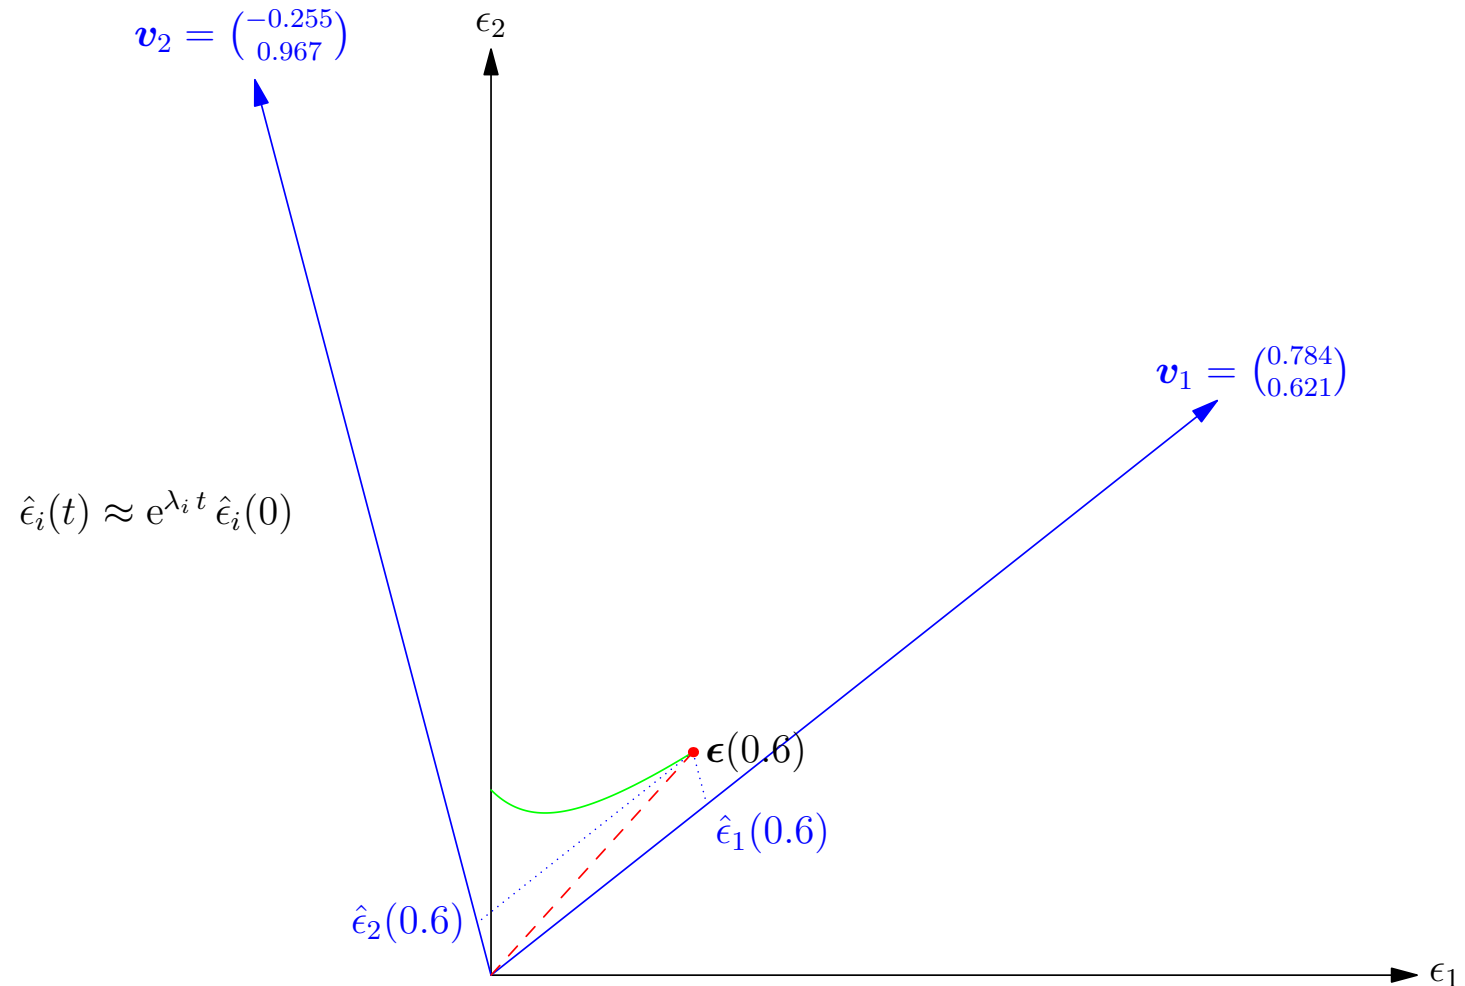


Example

$$\mathbf{J} = \begin{pmatrix} 2 & 1 \\ 3 & -1 \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.784 & -0.255 \\ 0.621 & 0.967 \end{pmatrix} \begin{pmatrix} 2.791 & 0 \\ 0 & -1.791 \end{pmatrix} \begin{pmatrix} 1.055 & 0.278 \\ -0.677 & 0.856 \end{pmatrix}$$

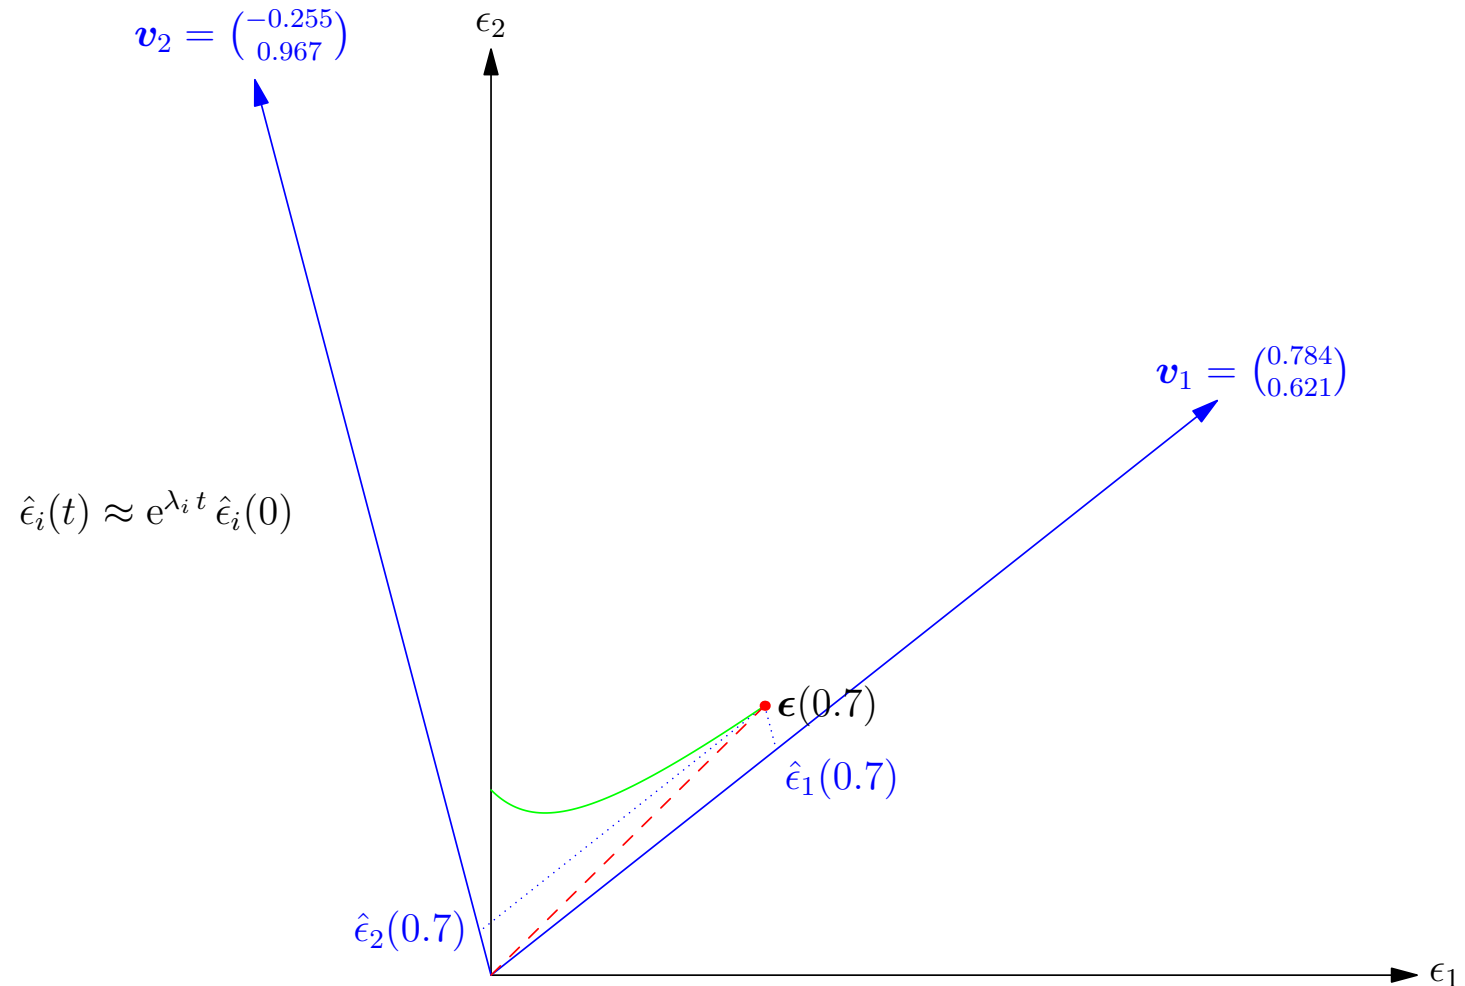


Example

$$\mathbf{J} = \begin{pmatrix} 2 & 1 \\ 3 & -1 \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.784 & -0.255 \\ 0.621 & 0.967 \end{pmatrix} \begin{pmatrix} 2.791 & 0 \\ 0 & -1.791 \end{pmatrix} \begin{pmatrix} 1.055 & 0.278 \\ -0.677 & 0.856 \end{pmatrix}$$

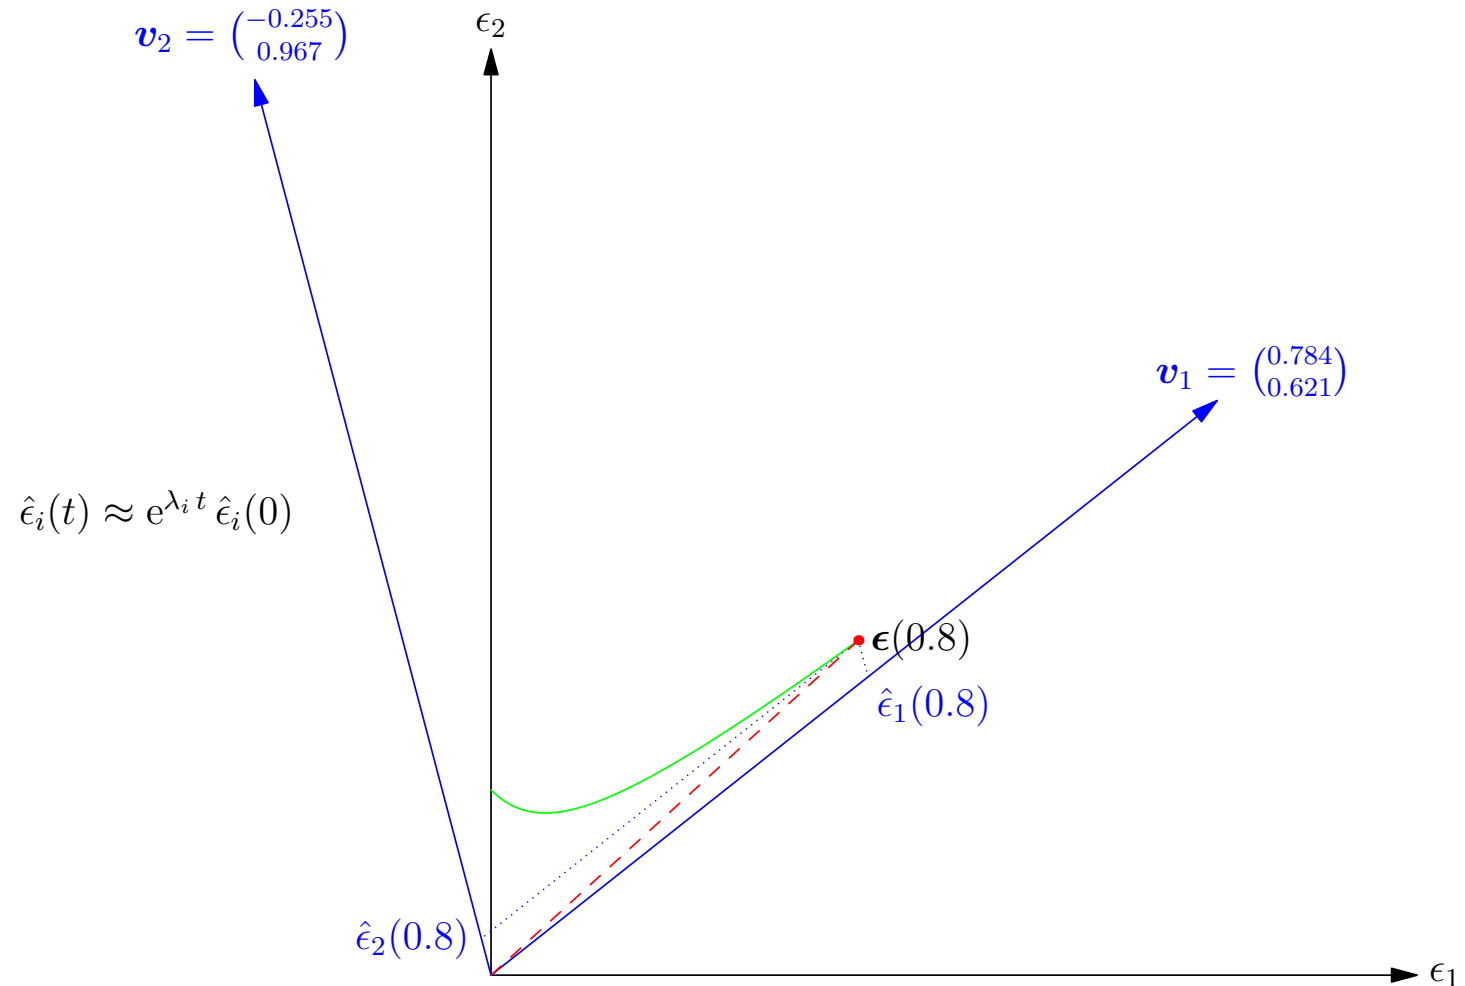


Example

$$\mathbf{J} = \begin{pmatrix} 2 & 1 \\ 3 & -1 \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.784 & -0.255 \\ 0.621 & 0.967 \end{pmatrix} \begin{pmatrix} 2.791 & 0 \\ 0 & -1.791 \end{pmatrix} \begin{pmatrix} 1.055 & 0.278 \\ -0.677 & 0.856 \end{pmatrix}$$

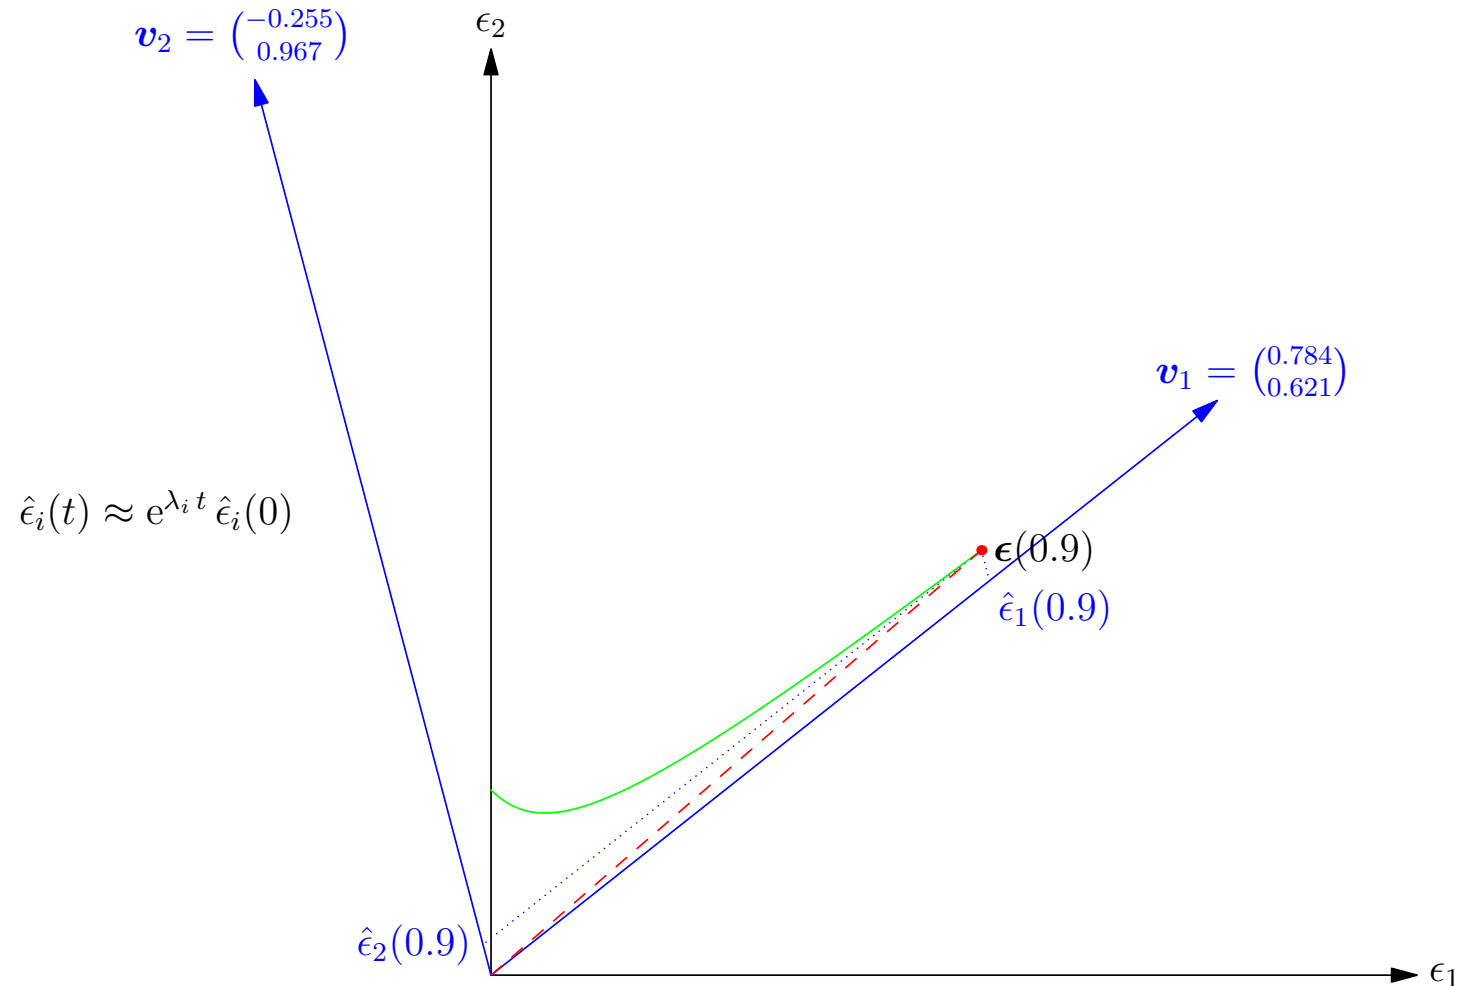


Example

$$\mathbf{J} = \begin{pmatrix} 2 & 1 \\ 3 & -1 \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.784 & -0.255 \\ 0.621 & 0.967 \end{pmatrix} \begin{pmatrix} 2.791 & 0 \\ 0 & -1.791 \end{pmatrix} \begin{pmatrix} 1.055 & 0.278 \\ -0.677 & 0.856 \end{pmatrix}$$

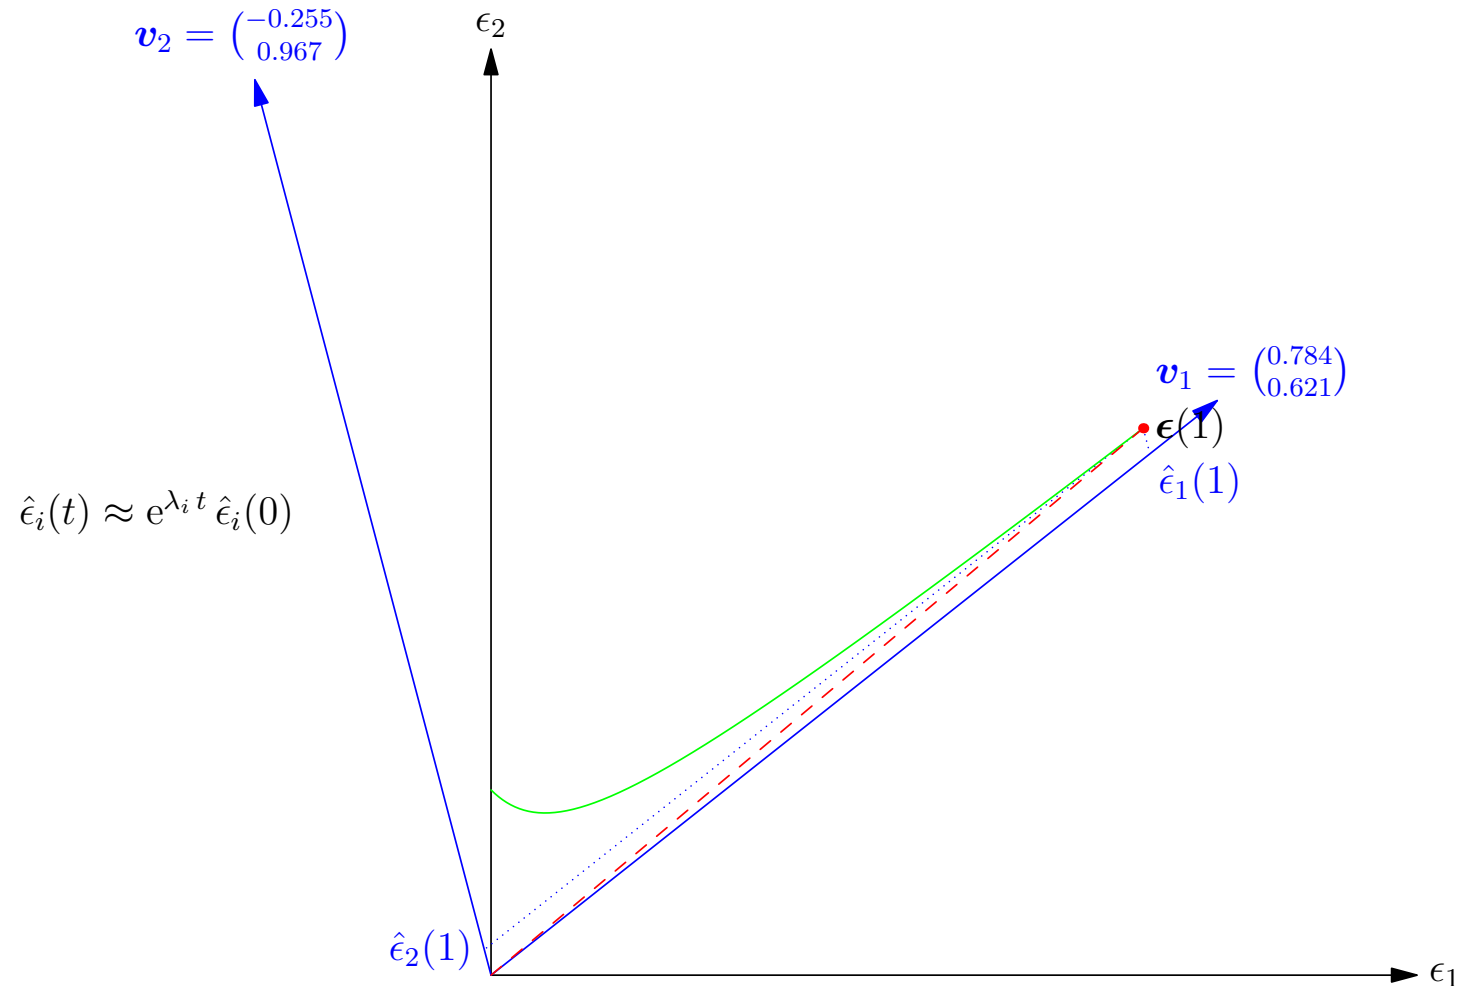

Example

$$\mathbf{J} = \begin{pmatrix} 2 & 1 \\ 3 & -1 \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.784 & -0.255 \\ 0.621 & 0.967 \end{pmatrix} \begin{pmatrix} 2.791 & 0 \\ 0 & -1.791 \end{pmatrix} \begin{pmatrix} 1.055 & 0.278 \\ -0.677 & 0.856 \end{pmatrix}$$

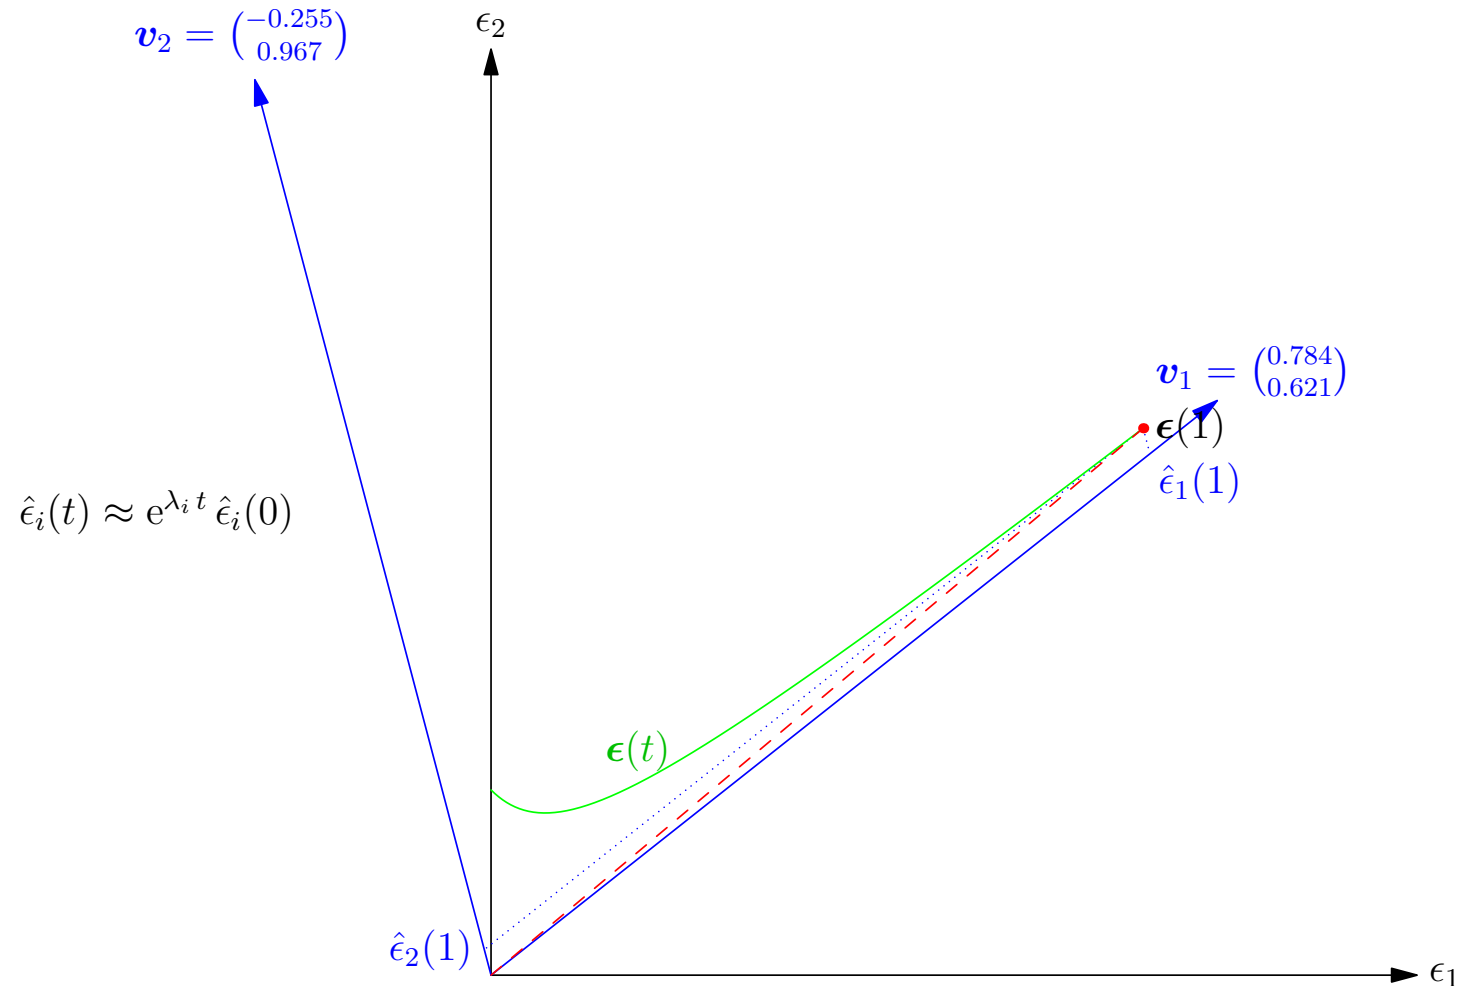

Stability Analysis

- If $\Re(\lambda_i) < 0$ for all i the fixed point is stable (all sufficiently small perturbations shrink)
- If there exists an i such that $\Re(\lambda_i) > 0$ then the fixed point is unstable
- If $\Re(\lambda_i) < 0$ and $\Re(\lambda_j) > 0$ then we are at an unstable saddle point
- Note that the Jacobian is not symmetric which means the eigenvalues can occur in complex conjugate pairs (i.e. $\lambda_i^* = \lambda_j$)
- In this case the trajectories will either spiral in to the fixed point or spiral away from the fixed point

Stability Analysis

- If $\Re(\lambda_i) < 0$ for all i the fixed point is stable (all sufficiently small perturbations shrink)
- If there exists an i such that $\Re(\lambda_i) > 0$ then the fixed point is unstable
- If $\Re(\lambda_i) < 0$ and $\Re(\lambda_j) > 0$ then we are at an unstable saddle point
- Note that the Jacobian is not symmetric which means the eigenvalues can occur in complex conjugate pairs (i.e. $\lambda_i^* = \lambda_j$)
- In this case the trajectories will either spiral in to the fixed point or spiral away from the fixed point

Stability Analysis

- If $\Re(\lambda_i) < 0$ for all i the fixed point is stable (all sufficiently small perturbations shrink)
- If there exists an i such that $\Re(\lambda_i) > 0$ then the fixed point is unstable
- If $\Re(\lambda_i) < 0$ and $\Re(\lambda_j) > 0$ then we are at an unstable saddle point
- Note that the Jacobian is not symmetric which means the eigenvalues can occur in complex conjugate pairs (i.e. $\lambda_i^* = \lambda_j$)
- In this case the trajectories will either spiral in to the fixed point or spiral away from the fixed point

Stability Analysis


- If $\Re(\lambda_i) < 0$ for all i the fixed point is stable (all sufficiently small perturbations shrink)
- If there exists an i such that $\Re(\lambda_i) > 0$ then the fixed point is unstable
- If $\Re(\lambda_i) < 0$ and $\Re(\lambda_j) > 0$ then we are at an unstable saddle point
- Note that the Jacobian is not symmetric which means the eigenvalues can occur in complex conjugate pairs (i.e. $\lambda_i^* = \lambda_j$)
- In this case the trajectories will either spiral in to the fixed point or spiral away from the fixed point

Stability Analysis


- If $\Re(\lambda_i) < 0$ for all i the fixed point is stable (all sufficiently small perturbations shrink)
- If there exists an i such that $\Re(\lambda_i) > 0$ then the fixed point is unstable
- If $\Re(\lambda_i) < 0$ and $\Re(\lambda_j) > 0$ then we are at an unstable saddle point
- Note that the Jacobian is not symmetric which means the eigenvalues can occur in complex conjugate pairs (i.e. $\lambda_i^* = \lambda_j$)
- In this case the trajectories will either spiral in to the fixed point or spiral away from the fixed point

Oscillator

- Consider a chain with a positive feedback



$$k(X_2) = k_1 (1 + (X_2/K)^n)$$




$$\frac{dX_1(t)}{dt} = k_0 - k_1 \left(1 + \left(\frac{X_2(t)}{K} \right)^n \right) X_1(t)$$

$$\frac{dX_2(t)}{dt} = k_1 \left(1 + \left(\frac{X_2(t)}{K} \right)^n \right) X_1(t) - k_2 X_2(t)$$


- Consider $k_0 = 8$, $k_1 = 1$, $K = 1$, $k_2 = 5$ and $n = 2$
- Large values of X_2 will result in most of X_1 being turned into X_2 , then X_2 will decay rapidly allowing X_1 to increase

Oscillator

- Consider a chain with a positive feedback



$$k(X_2) = k_1 (1 + (X_2/K)^n)$$




$$\frac{dX_1(t)}{dt} = k_0 - k_1 \left(1 + \left(\frac{X_2(t)}{K} \right)^n \right) X_1(t)$$

$$\frac{dX_2(t)}{dt} = k_1 \left(1 + \left(\frac{X_2(t)}{K} \right)^n \right) X_1(t) - k_2 X_2(t)$$


- Consider $k_0 = 8$, $k_1 = 1$, $K = 1$, $k_2 = 5$ and $n = 2$
- Large values of X_2 will result in most of X_1 being turned into X_2 , then X_2 will decay rapidly allowing X_1 to increase

Oscillator

- Consider a chain with a positive feedback



$$k(X_2) = k_1 (1 + (X_2/K)^n)$$




$$\frac{dX_1(t)}{dt} = k_0 - k_1 \left(1 + \left(\frac{X_2(t)}{K} \right)^n \right) X_1(t)$$

$$\frac{dX_2(t)}{dt} = k_1 \left(1 + \left(\frac{X_2(t)}{K} \right)^n \right) X_1(t) - k_2 X_2(t)$$


- Consider $k_0 = 8$, $k_1 = 1$, $K = 1$, $k_2 = 5$ and $n = 2$
- Large values of X_2 will result in most of X_1 being turned into X_2 , then X_2 will decay rapidly allowing X_1 to increase

Oscillator

- Consider a chain with a positive feedback



$$k(X_2) = k_1 (1 + (X_2/K)^n)$$




$$\frac{dX_1(t)}{dt} = k_0 - k_1 \left(1 + \left(\frac{X_2(t)}{K} \right)^n \right) X_1(t)$$


$$\frac{dX_2(t)}{dt} = k_1 \left(1 + \left(\frac{X_2(t)}{K} \right)^n \right) X_1(t) - k_2 X_2(t)$$

- Consider $k_0 = 8$, $k_1 = 1$, $K = 1$, $k_2 = 5$ and $n = 2$
- Large values of X_2 will result in most of X_1 being turned into X_2 , then X_2 will decay rapidly allowing X_1 to increase


Nullclines and Bistability

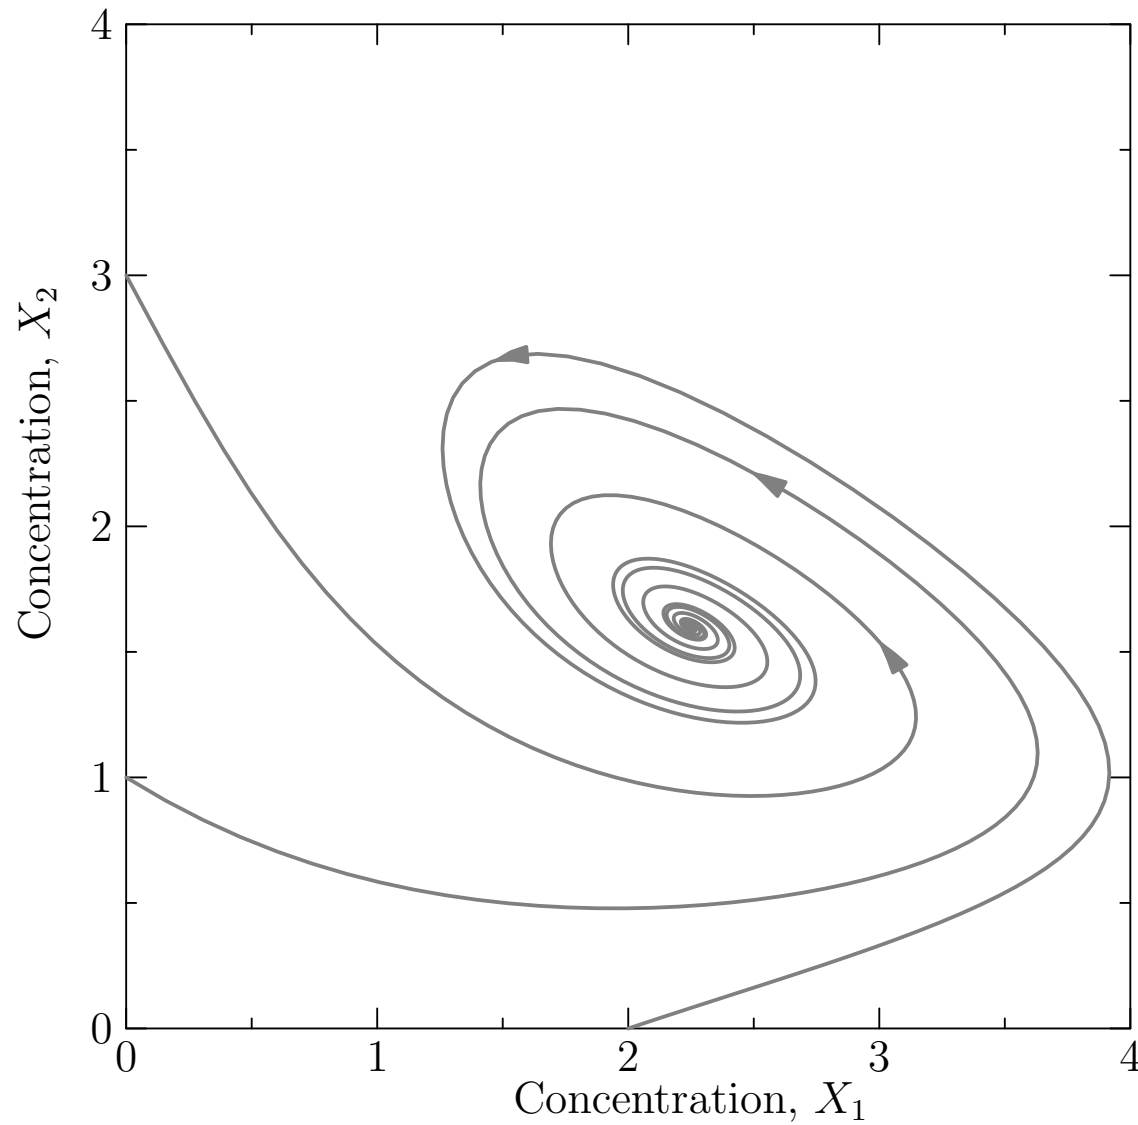

Nullclines and Bistability

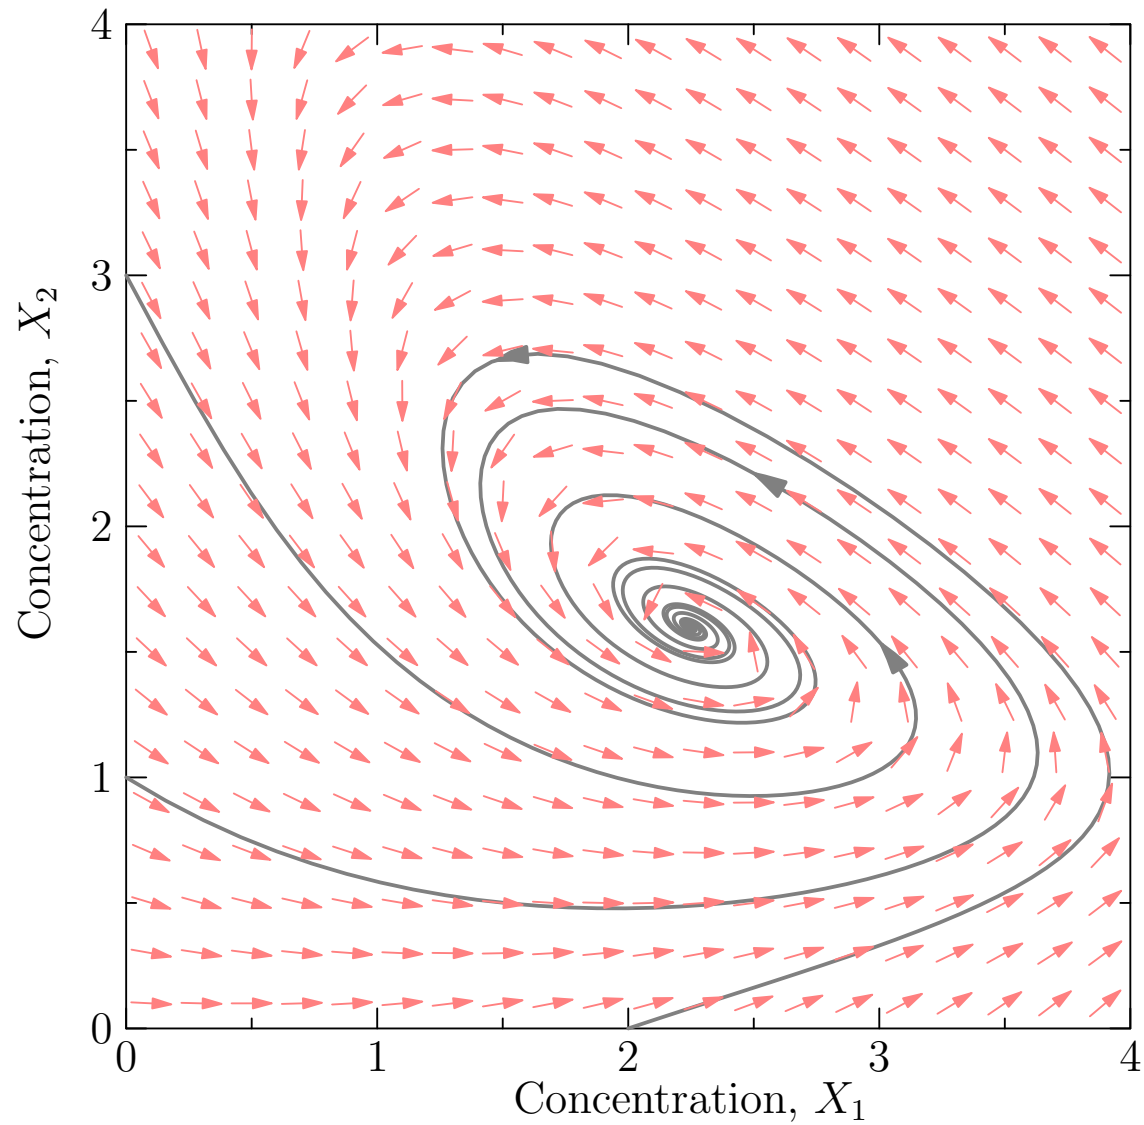

Nullclines and Bistability

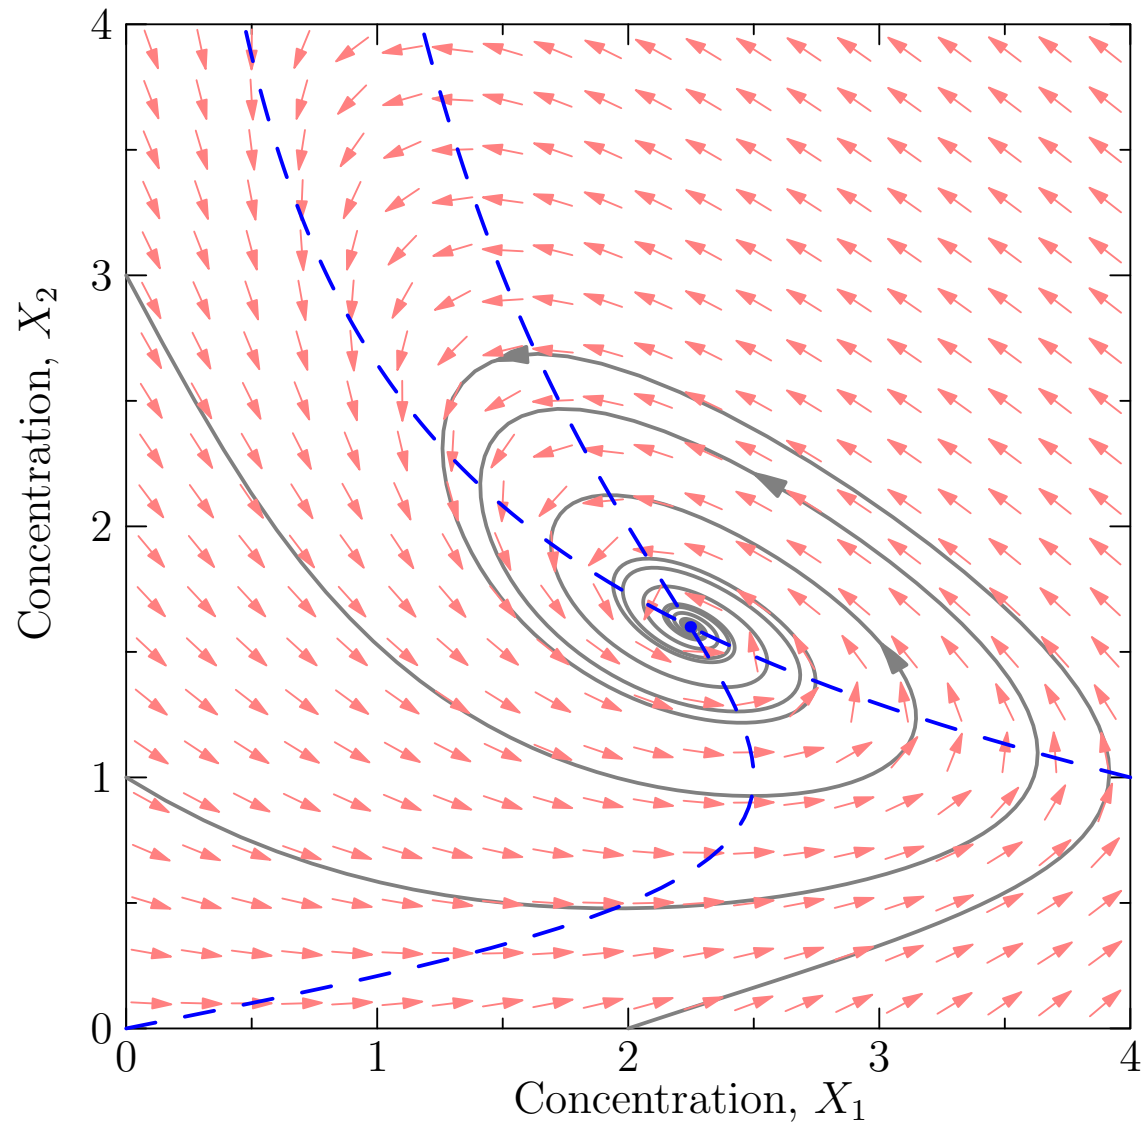

Fixed Point Equations

- Our dynamical equations are

$$\begin{aligned}\frac{dX_1(t)}{dt} &= f_1(\mathbf{X}(t)) = k_0 - k_1 \left(1 + \left(\frac{X_2(t)}{K} \right)^n \right) X_1(t) \\ \frac{dX_2(t)}{dt} &= f_2(\mathbf{X}(t)) = k_1 \left(1 + \left(\frac{X_2(t)}{K} \right)^n \right) X_1(t) - k_2 X_2(t)\end{aligned}$$

- With $k_0 = 8$, $k_1 = 1$, $K = 1$, $k_2 = 5$ and $n = 2$
- The fixed point is at $\mathbf{X}^* = \left(\frac{k_0}{k_1(1+(k_0/(K k_2))^n)}, \frac{k_0}{k_2} \right) = \left(\frac{200}{89}, \frac{8}{5} \right)$
- The Jacobian $J_{ij} = \partial f_i(\mathbf{X}(t))/\partial X_j$ is

$$\mathbf{J} = \begin{pmatrix} -k_1 \left(1 + \left(\frac{X_2^*}{K} \right)^n \right) & -\frac{n k_1}{K} \left(\frac{X_2^*}{K} \right)^{n-1} X_1^* \\ k_1 \left(1 + \left(\frac{X_2^*}{K} \right)^n \right) & \frac{n k_1}{K} \left(\frac{X_2^*}{K} \right)^{n-1} X_1^* - k_2 \end{pmatrix} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix}$$

Fixed Point Equations

- Our dynamical equations are

$$\frac{dX_1(t)}{dt} = f_1(\mathbf{X}(t)) = k_0 - k_1 \left(1 + \left(\frac{X_2(t)}{K} \right)^n \right) X_1(t)$$

$$\frac{dX_2(t)}{dt} = f_2(\mathbf{X}(t)) = k_1 \left(1 + \left(\frac{X_2(t)}{K} \right)^n \right) X_1(t) - k_2 X_2(t)$$

- With $k_0 = 8$, $k_1 = 1$, $K = 1$, $k_2 = 5$ and $n = 2$

- The fixed point is at $\mathbf{X}^* = \left(\frac{k_0}{k_1(1+(k_0/(K k_2))^n)}, \frac{k_0}{k_2} \right) = \left(\frac{200}{89}, \frac{8}{5} \right)$

- The Jacobian $J_{ij} = \partial f_i(\mathbf{X}(t))/\partial X_j$ is

$$\mathbf{J} = \begin{pmatrix} -k_1 \left(1 + \left(\frac{X_2^*}{K} \right)^n \right) & -\frac{n k_1}{K} \left(\frac{X_2^*}{K} \right)^{n-1} X_1^* \\ k_1 \left(1 + \left(\frac{X_2^*}{K} \right)^n \right) & \frac{n k_1}{K} \left(\frac{X_2^*}{K} \right)^{n-1} X_1^* - k_2 \end{pmatrix} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix}$$

Fixed Point Equations

- Our dynamical equations are

$$\begin{aligned}\frac{dX_1(t)}{dt} &= f_1(\mathbf{X}(t)) = k_0 - k_1 \left(1 + \left(\frac{X_2(t)}{K}\right)^n\right) X_1(t) \\ \frac{dX_2(t)}{dt} &= f_2(\mathbf{X}(t)) = k_1 \left(1 + \left(\frac{X_2(t)}{K}\right)^n\right) X_1(t) - k_2 X_2(t)\end{aligned}$$

- With $k_0 = 8$, $k_1 = 1$, $K = 1$, $k_2 = 5$ and $n = 2$
- The fixed point is at $\mathbf{X}^* = \left(\frac{k_0}{k_1(1+(k_0/(K k_2))^n)}, \frac{k_0}{k_2}\right) = \left(\frac{200}{89}, \frac{8}{5}\right)$
- The Jacobian $J_{ij} = \partial f_i(\mathbf{X}(t))/\partial X_j$ is

$$\mathbf{J} = \begin{pmatrix} -k_1 \left(1 + \left(\frac{X_2^*}{K}\right)^n\right) & -\frac{n k_1}{K} \left(\frac{X_2^*}{K}\right)^{n-1} X_1^* \\ k_1 \left(1 + \left(\frac{X_2^*}{K}\right)^n\right) & \frac{n k_1}{K} \left(\frac{X_2^*}{K}\right)^{n-1} X_1^* - k_2 \end{pmatrix} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix}$$

Fixed Point Equations

- Our dynamical equations are

$$\begin{aligned}\frac{dX_1(t)}{dt} &= f_1(\mathbf{X}(t)) = k_0 - k_1 \left(1 + \left(\frac{X_2(t)}{K}\right)^n\right) X_1(t) \\ \frac{dX_2(t)}{dt} &= f_2(\mathbf{X}(t)) = k_1 \left(1 + \left(\frac{X_2(t)}{K}\right)^n\right) X_1(t) - k_2 X_2(t)\end{aligned}$$

- With $k_0 = 8$, $k_1 = 1$, $K = 1$, $k_2 = 5$ and $n = 2$
- The fixed point is at $\mathbf{X}^* = \left(\frac{k_0}{k_1(1+(k_0/(K k_2))^n)}, \frac{k_0}{k_2}\right) = \left(\frac{200}{89}, \frac{8}{5}\right)$
- The Jacobian $J_{ij} = \partial f_i(\mathbf{X}(t))/\partial X_j$ is

$$\mathbf{J} = \begin{pmatrix} -k_1 \left(1 + \left(\frac{X_2^*}{K}\right)^n\right) & -\frac{n k_1}{K} \left(\frac{X_2^*}{K}\right)^{n-1} X_1^* \\ k_1 \left(1 + \left(\frac{X_2^*}{K}\right)^n\right) & \frac{n k_1}{K} \left(\frac{X_2^*}{K}\right)^{n-1} X_1^* - k_2 \end{pmatrix} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix}$$

Eigen Decomposition

- Plugging this into Matlab (using $\text{eig}(\mathbf{J})$)

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V} \begin{pmatrix} -0.68 + 4.16i & 0 \\ 0 & -0.68 - 4.16i \end{pmatrix} \mathbf{V}^{-1}$$

- where

$$\mathbf{V} = \begin{pmatrix} 0.82 & 0.82 \\ -0.33 - 0.47i & -0.33 + 0.47i \end{pmatrix}$$

- Or $T = \text{tr } \mathbf{J} = J_{11} + J_{22}$ and $D = \det(\mathbf{J}) = J_{11} J_{22} - J_{12} J_{21}$
then $\lambda_{1,2} = T/2 \pm \sqrt{T^2/4 - D}$
- The eigenvalues have a large complex component which causes a significant spiralling

Eigen Decomposition

- Plugging this into Matlab (using $\text{eig}(\mathbf{J})$)

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V} \begin{pmatrix} -0.68 + 4.16i & 0 \\ 0 & -0.68 - 4.16i \end{pmatrix} \mathbf{V}^{-1}$$

- where

$$\mathbf{V} = \begin{pmatrix} 0.82 & 0.82 \\ -0.33 - 0.47i & -0.33 + 0.47i \end{pmatrix}$$

- Or $T = \text{tr } \mathbf{J} = J_{11} + J_{22}$ and $D = \det(\mathbf{J}) = J_{11} J_{22} - J_{12} J_{21}$
then $\lambda_{1,2} = T/2 \pm \sqrt{T^2/4 - D}$
- The eigenvalues have a large complex component which causes a significant spiralling

Eigen Decomposition

- Plugging this into Matlab (using $\text{eig}(\mathbf{J})$)

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V} \begin{pmatrix} -0.68 + 4.16i & 0 \\ 0 & -0.68 - 4.16i \end{pmatrix} \mathbf{V}^{-1}$$

- where

$$\mathbf{V} = \begin{pmatrix} 0.82 & 0.82 \\ -0.33 - 0.47i & -0.33 + 0.47i \end{pmatrix}$$

- Or $T = \text{tr } \mathbf{J} = J_{11} + J_{22}$ and $D = \det(\mathbf{J}) = J_{11} J_{22} - J_{12} J_{21}$
then $\lambda_{1,2} = T/2 \pm \sqrt{T^2/4 - D}$
- The eigenvalues have a large complex component which causes a significant spiralling

Eigen Decomposition

- Plugging this into Matlab (using $\text{eig}(\mathbf{J})$)

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V} \begin{pmatrix} -0.68 + 4.16i & 0 \\ 0 & -0.68 - 4.16i \end{pmatrix} \mathbf{V}^{-1}$$


- where

$$\mathbf{V} = \begin{pmatrix} 0.82 & 0.82 \\ -0.33 - 0.47i & -0.33 + 0.47i \end{pmatrix}$$

- Or $T = \text{tr } \mathbf{J} = J_{11} + J_{22}$ and $D = \det(\mathbf{J}) = J_{11} J_{22} - J_{12} J_{21}$
then $\lambda_{1,2} = T/2 \pm \sqrt{T^2/4 - D}$
- The eigenvalues have a large complex component which causes a significant spiralling


Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$




Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$




Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$

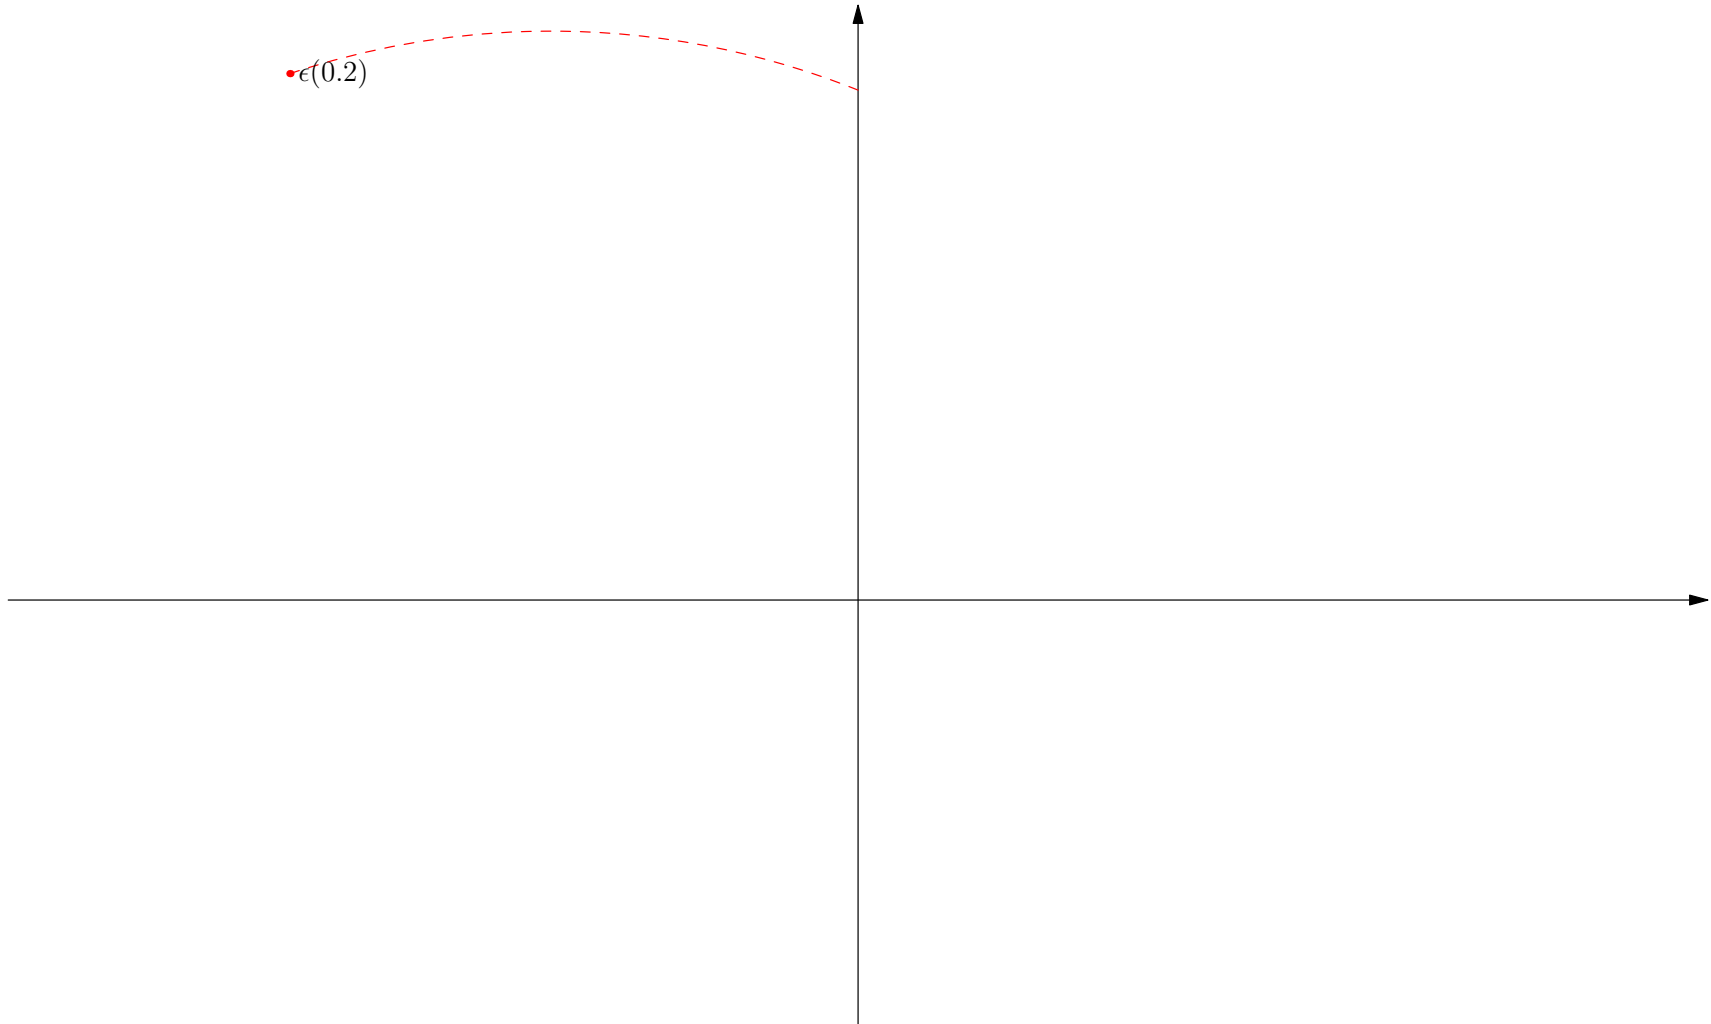


Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$

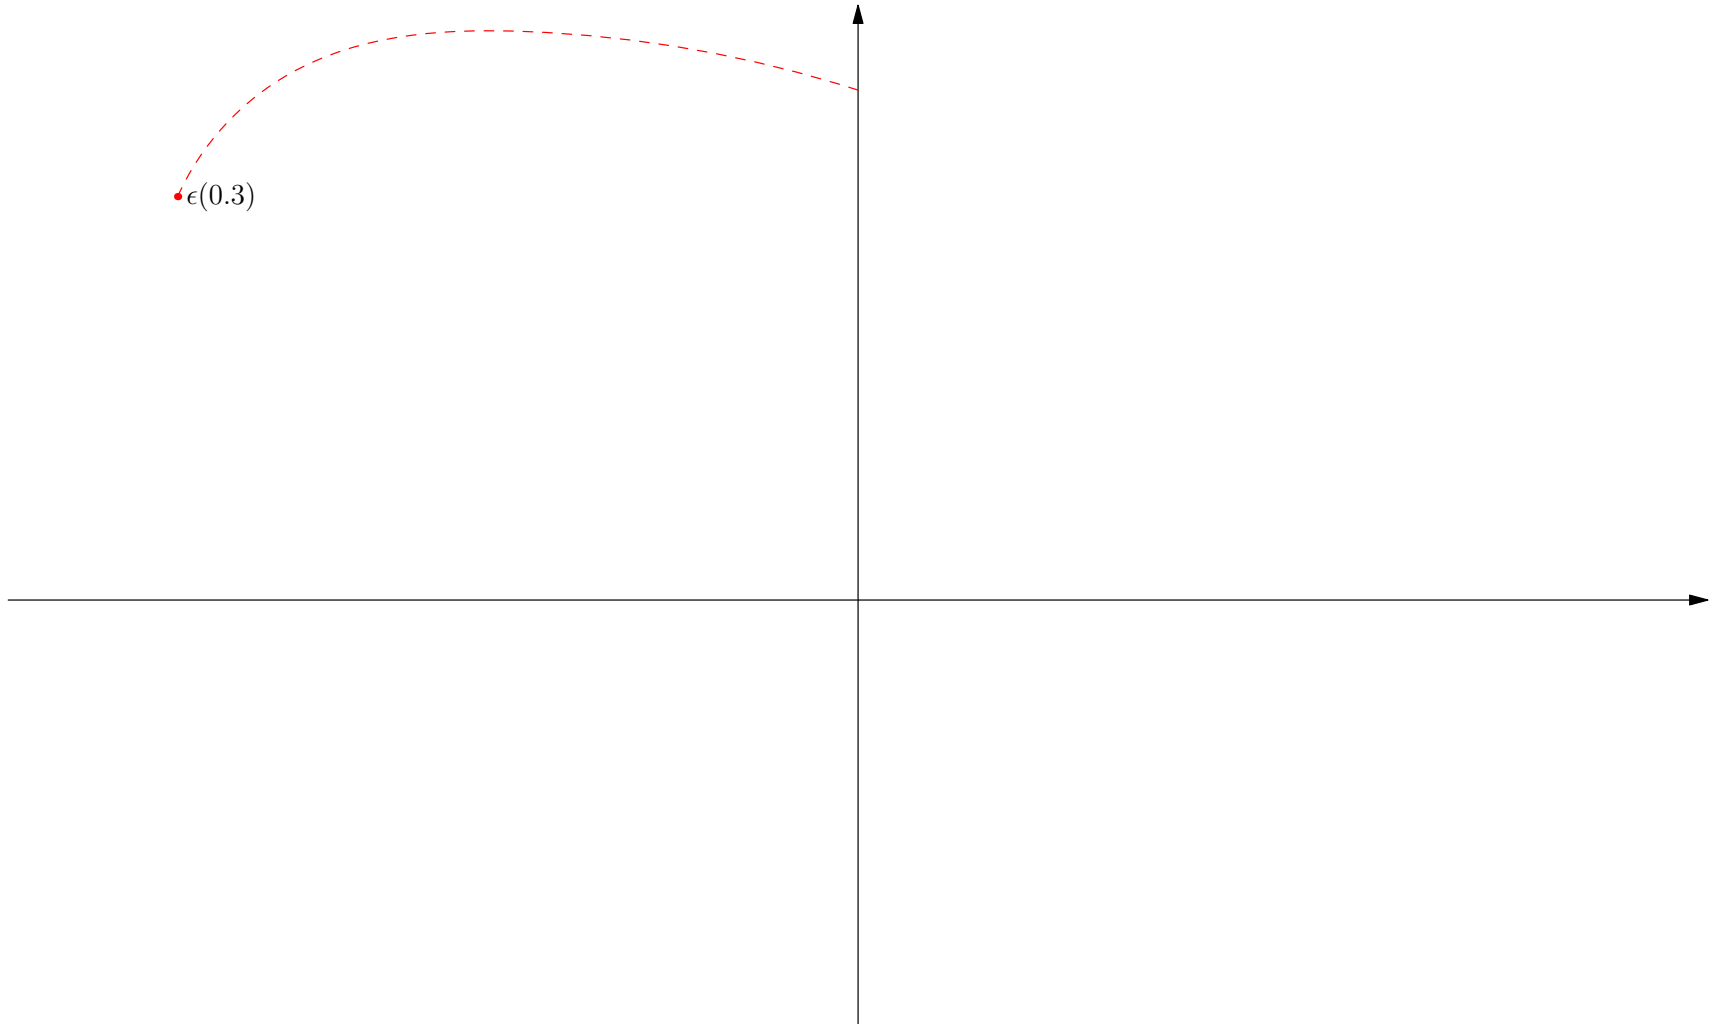


Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$

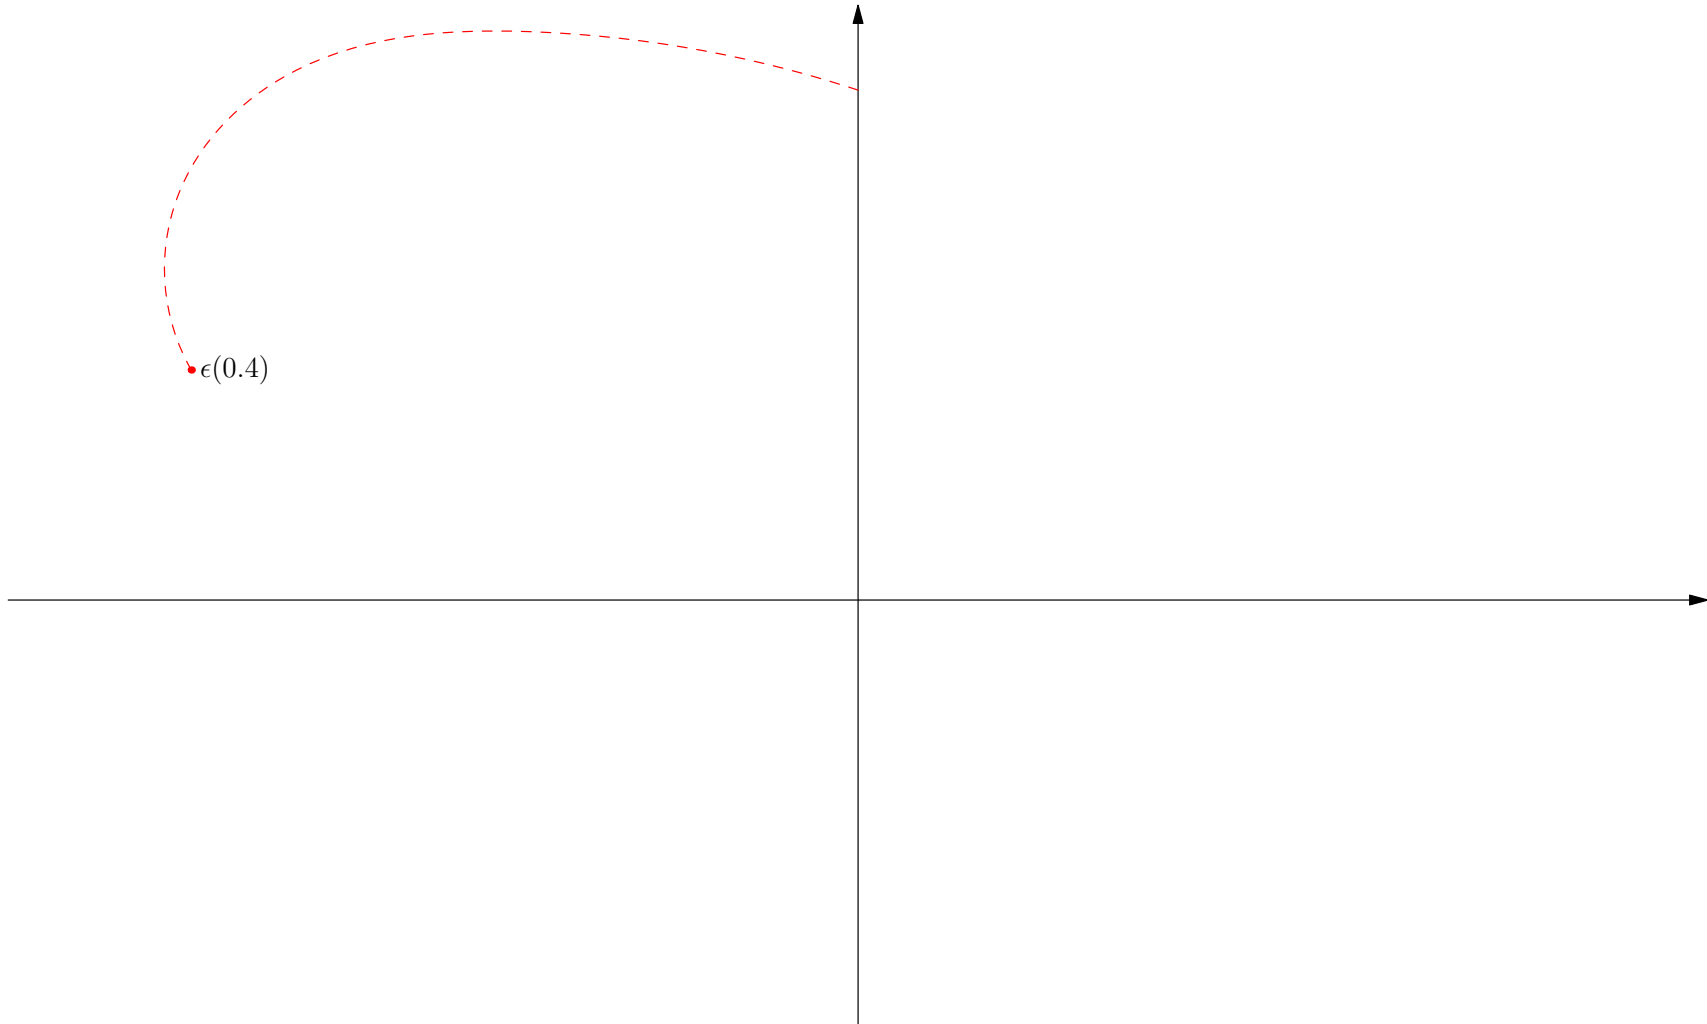


Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V} \mathbf{\Lambda} \mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$

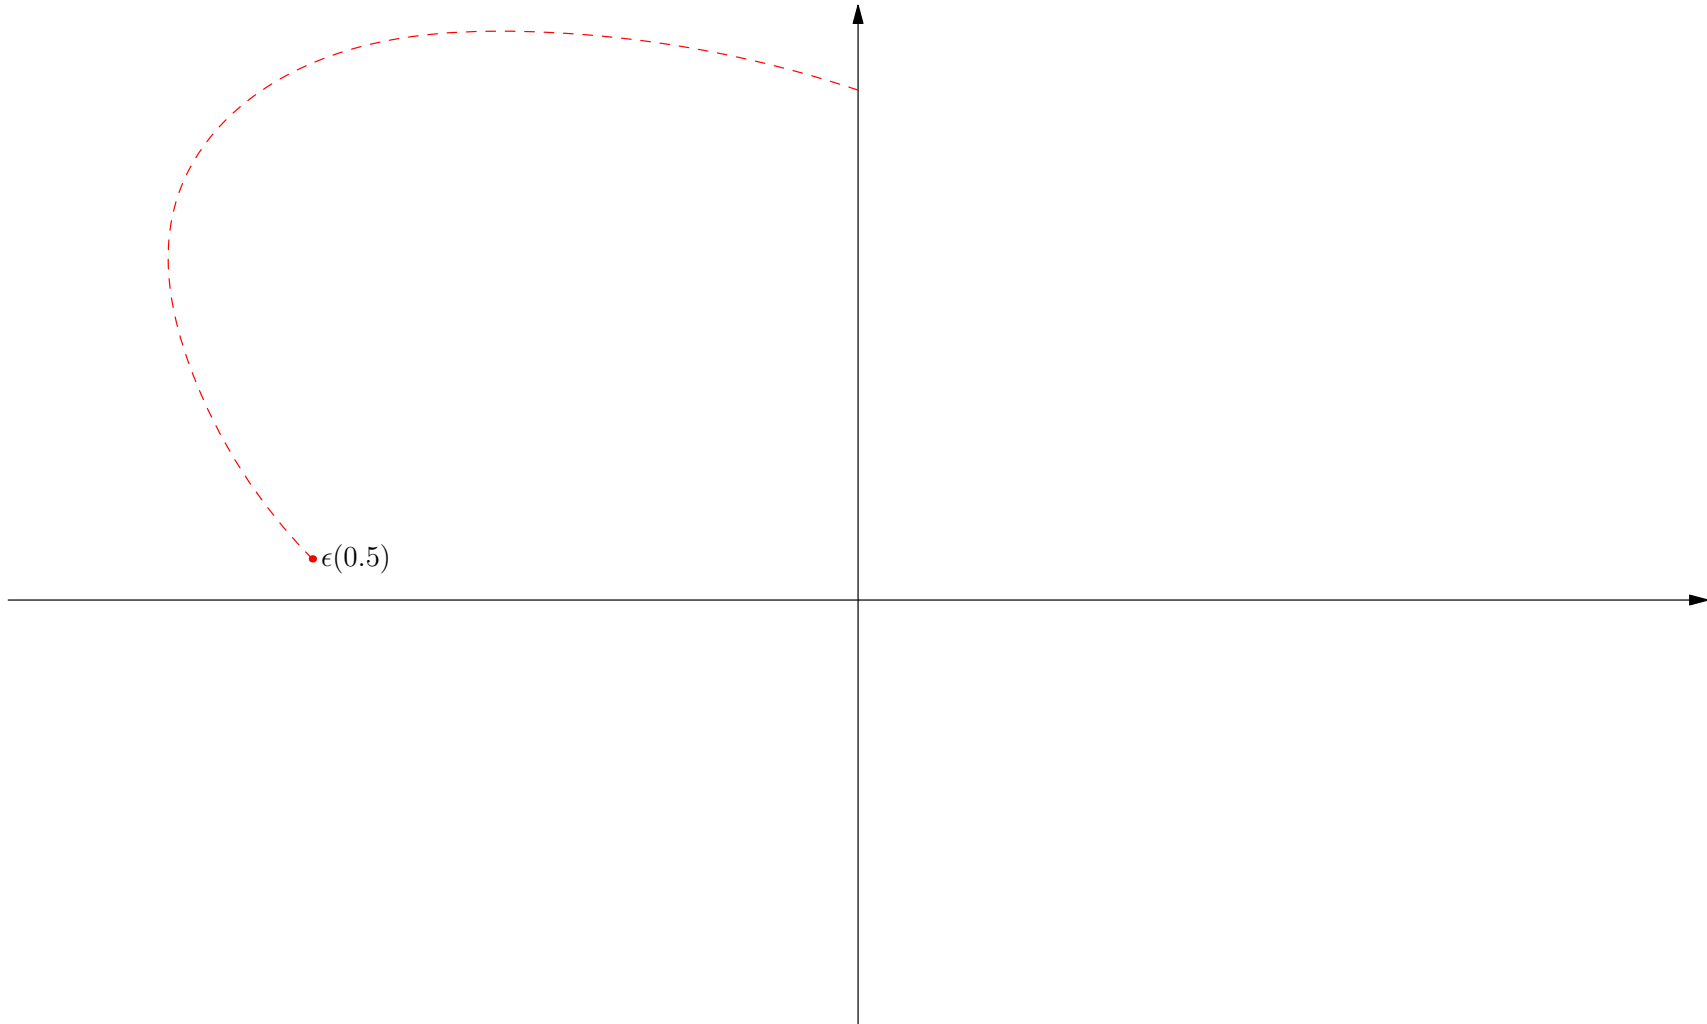


Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$

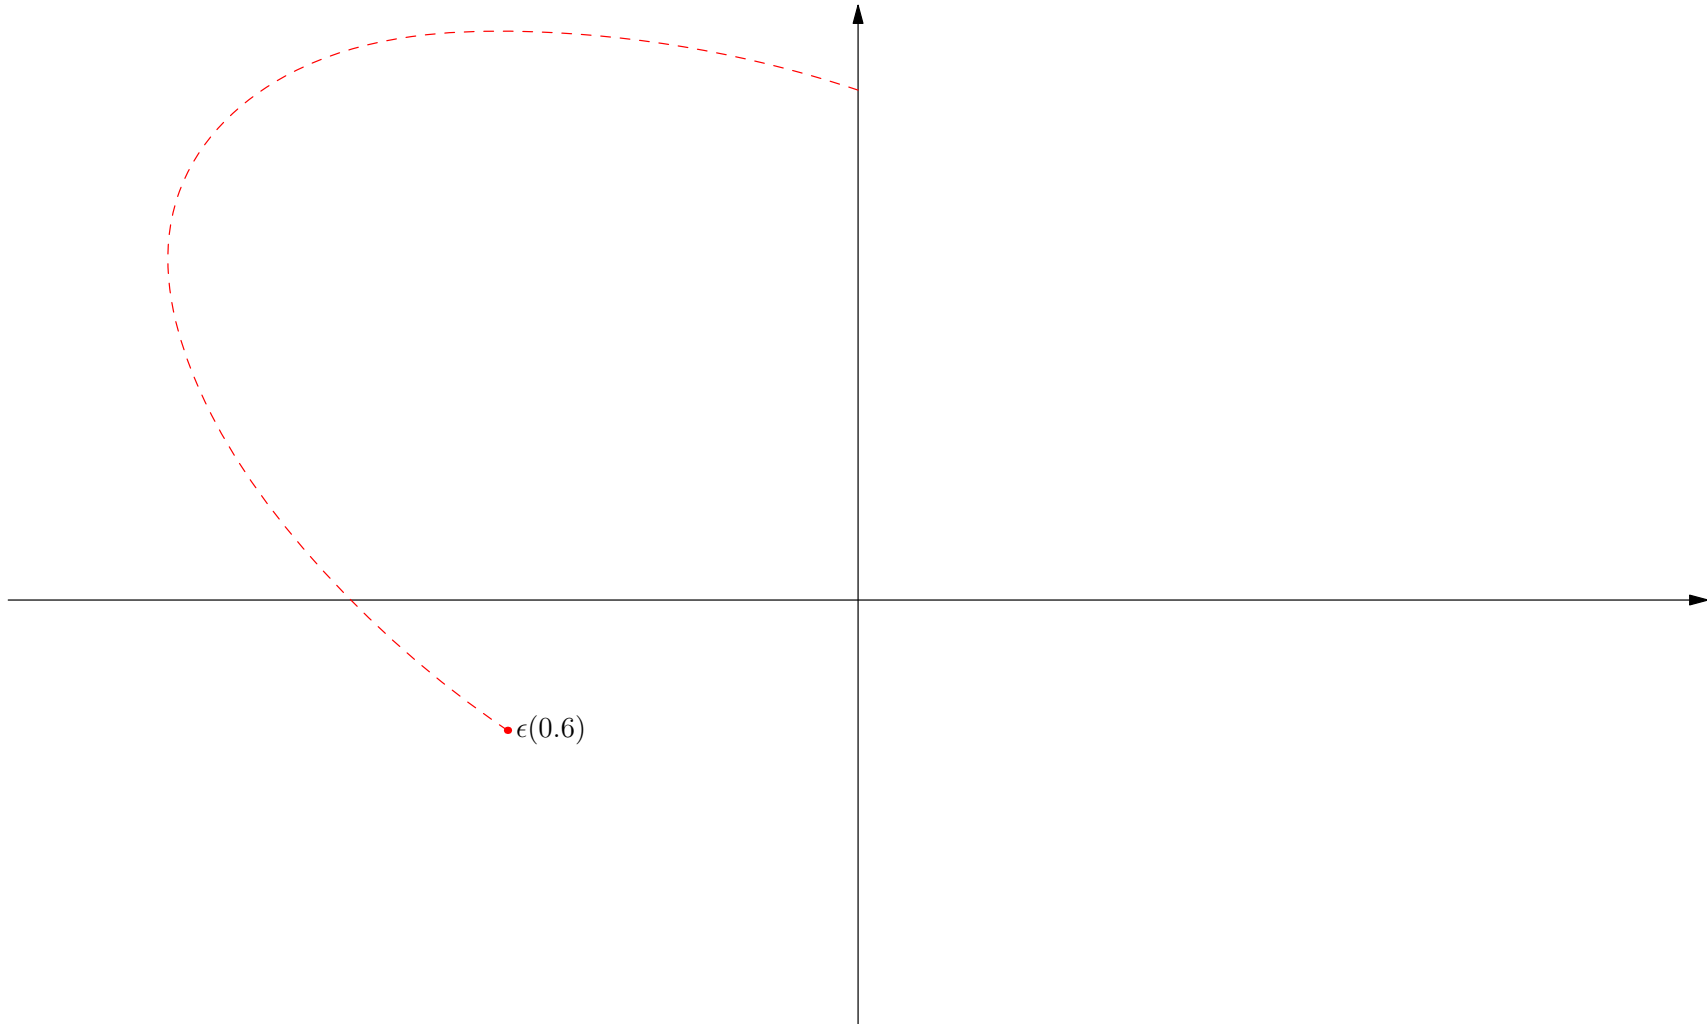


Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$

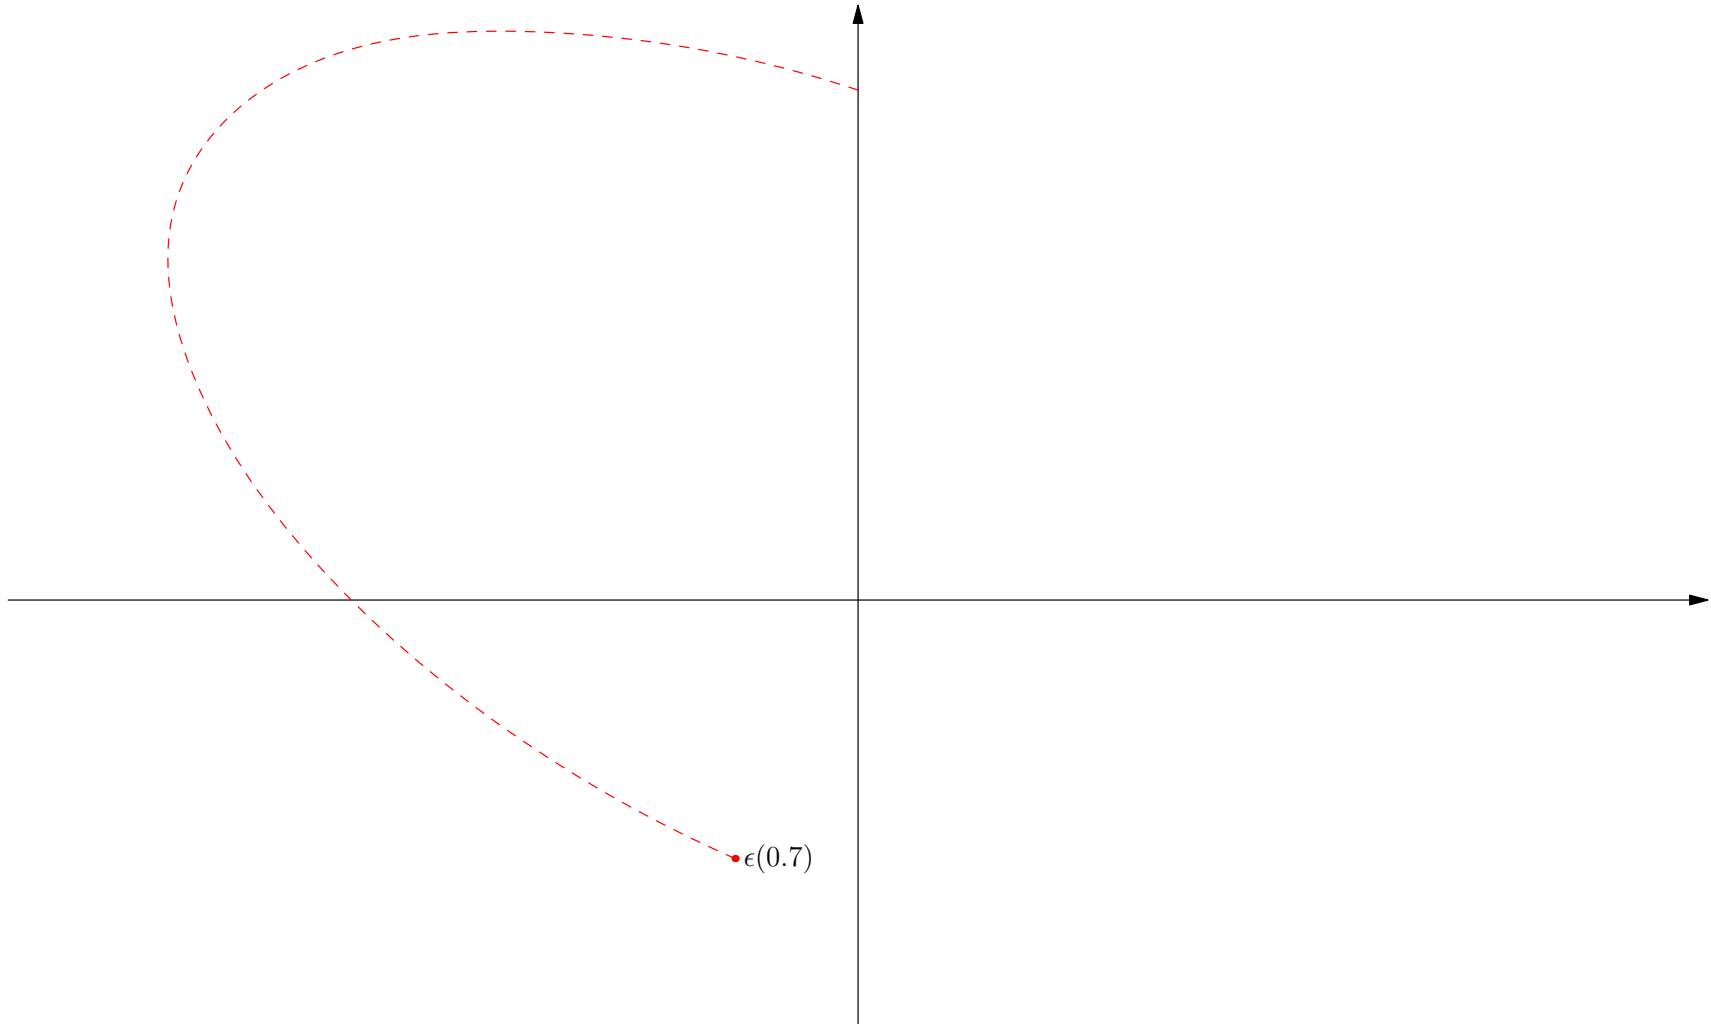


Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$

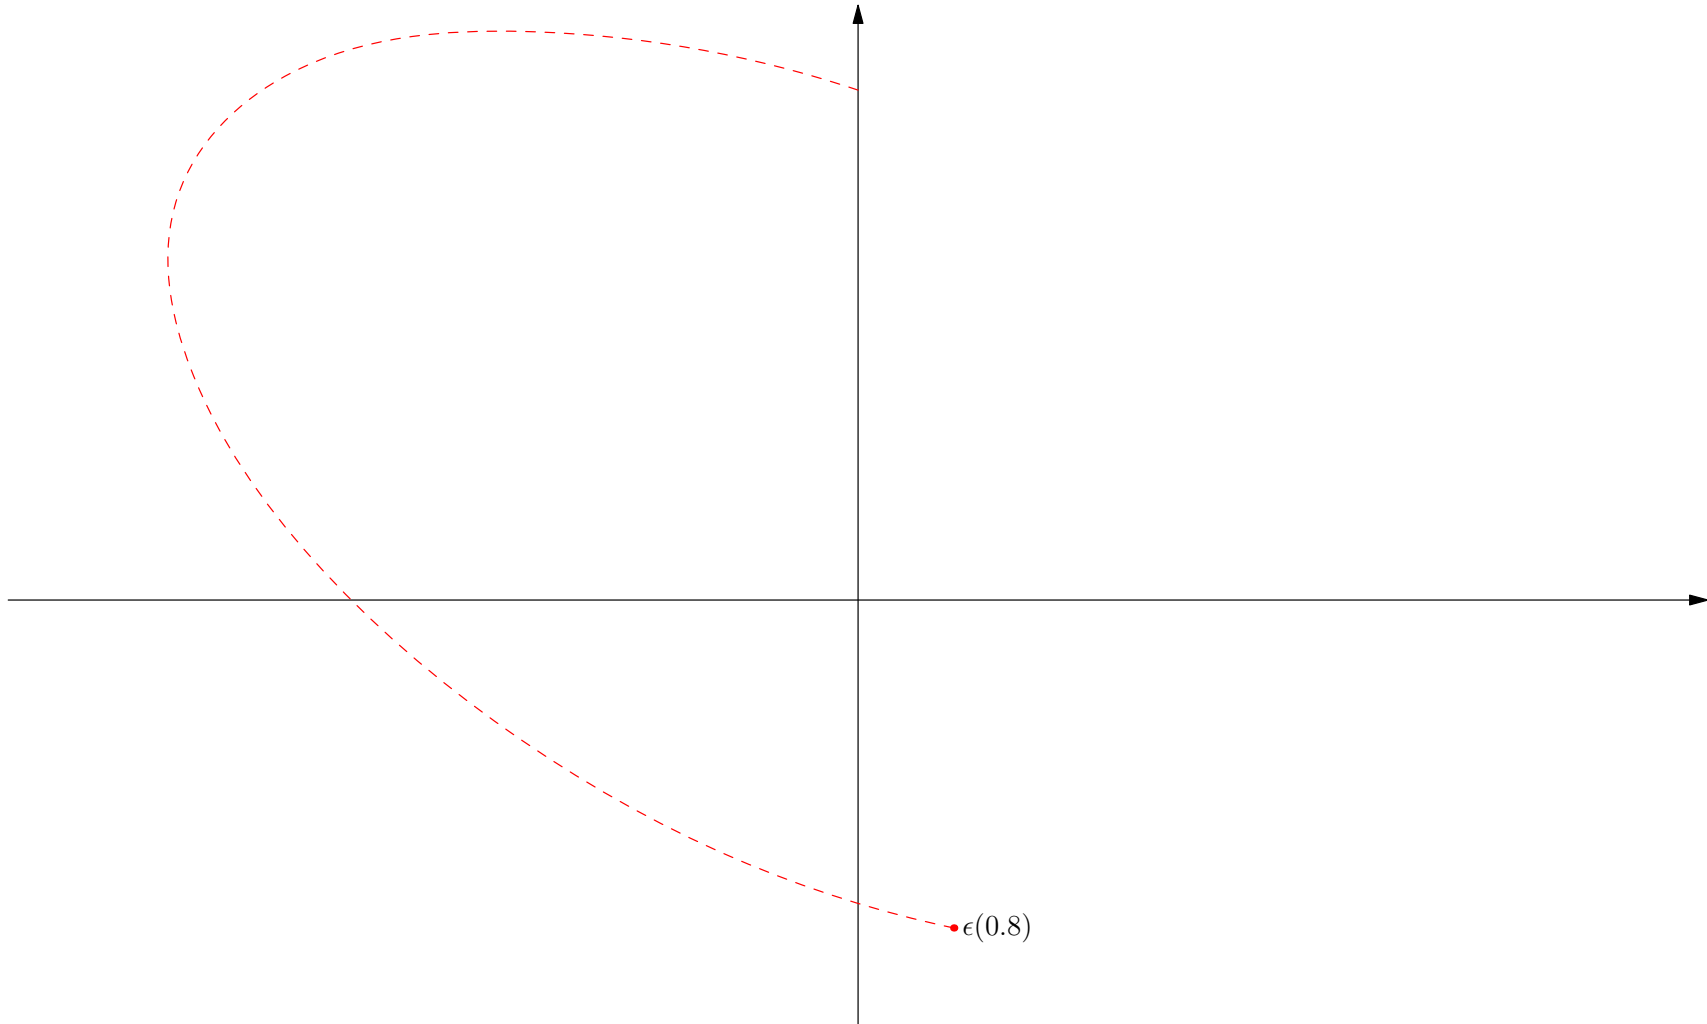


Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$

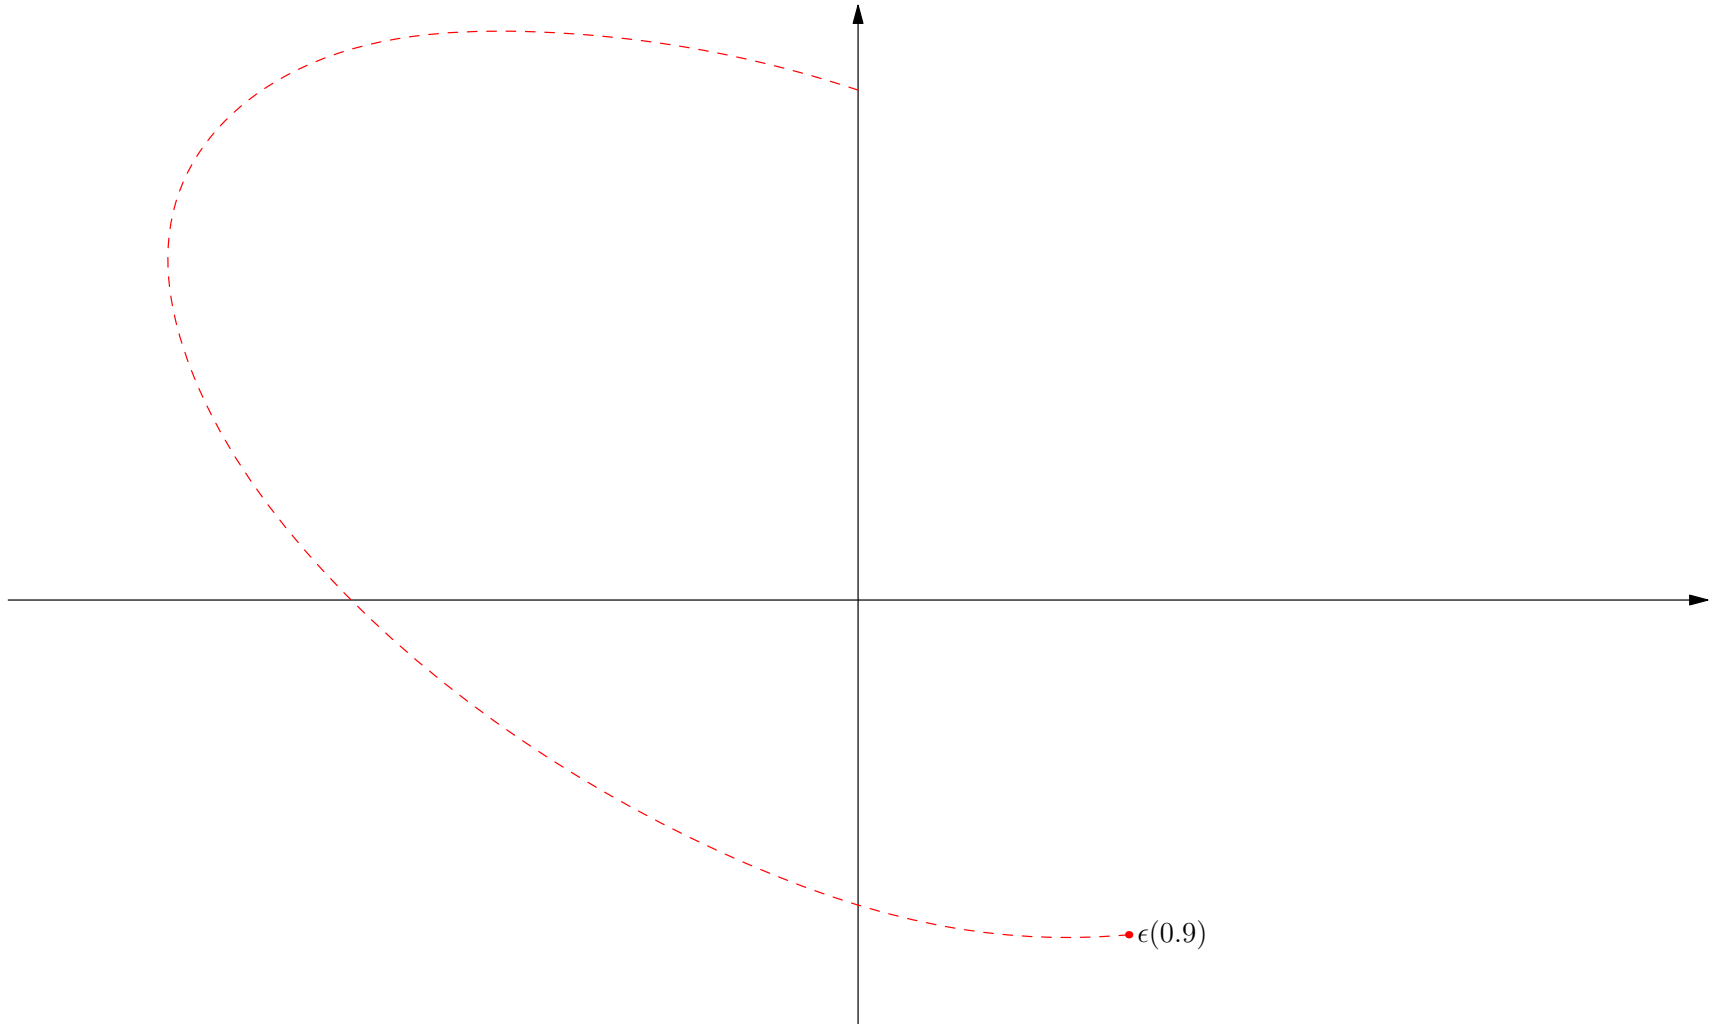


Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V} \mathbf{\Lambda} \mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$

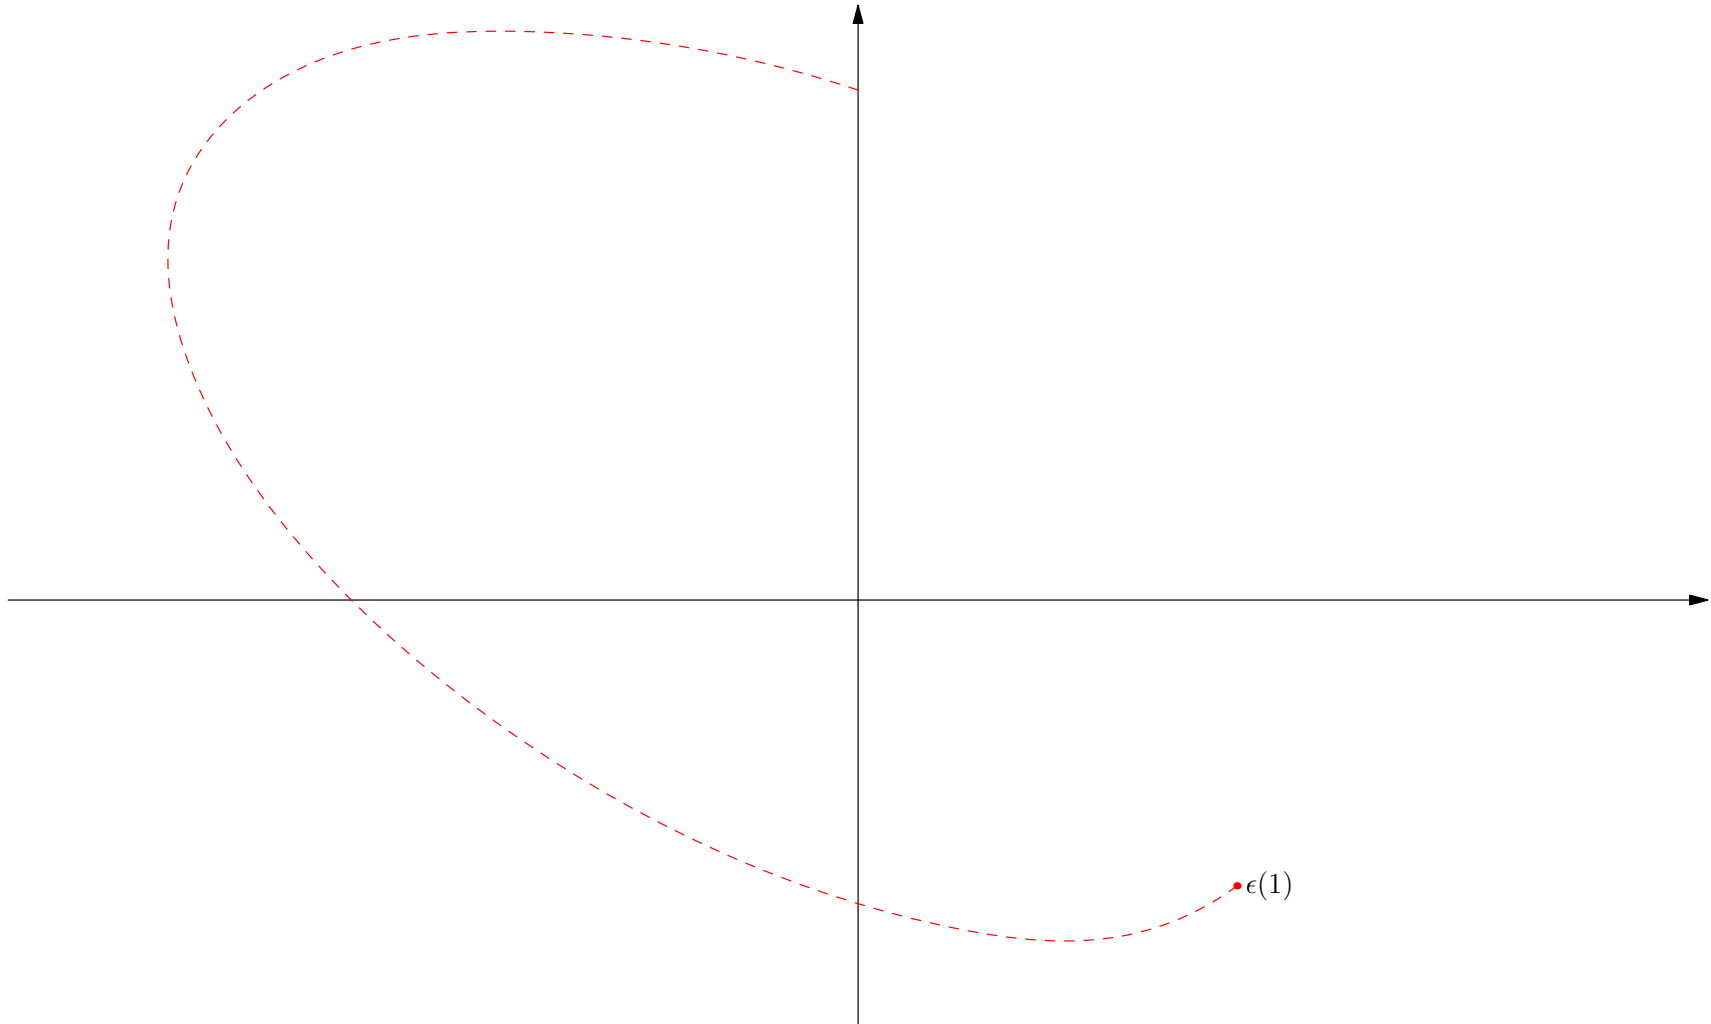


Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$

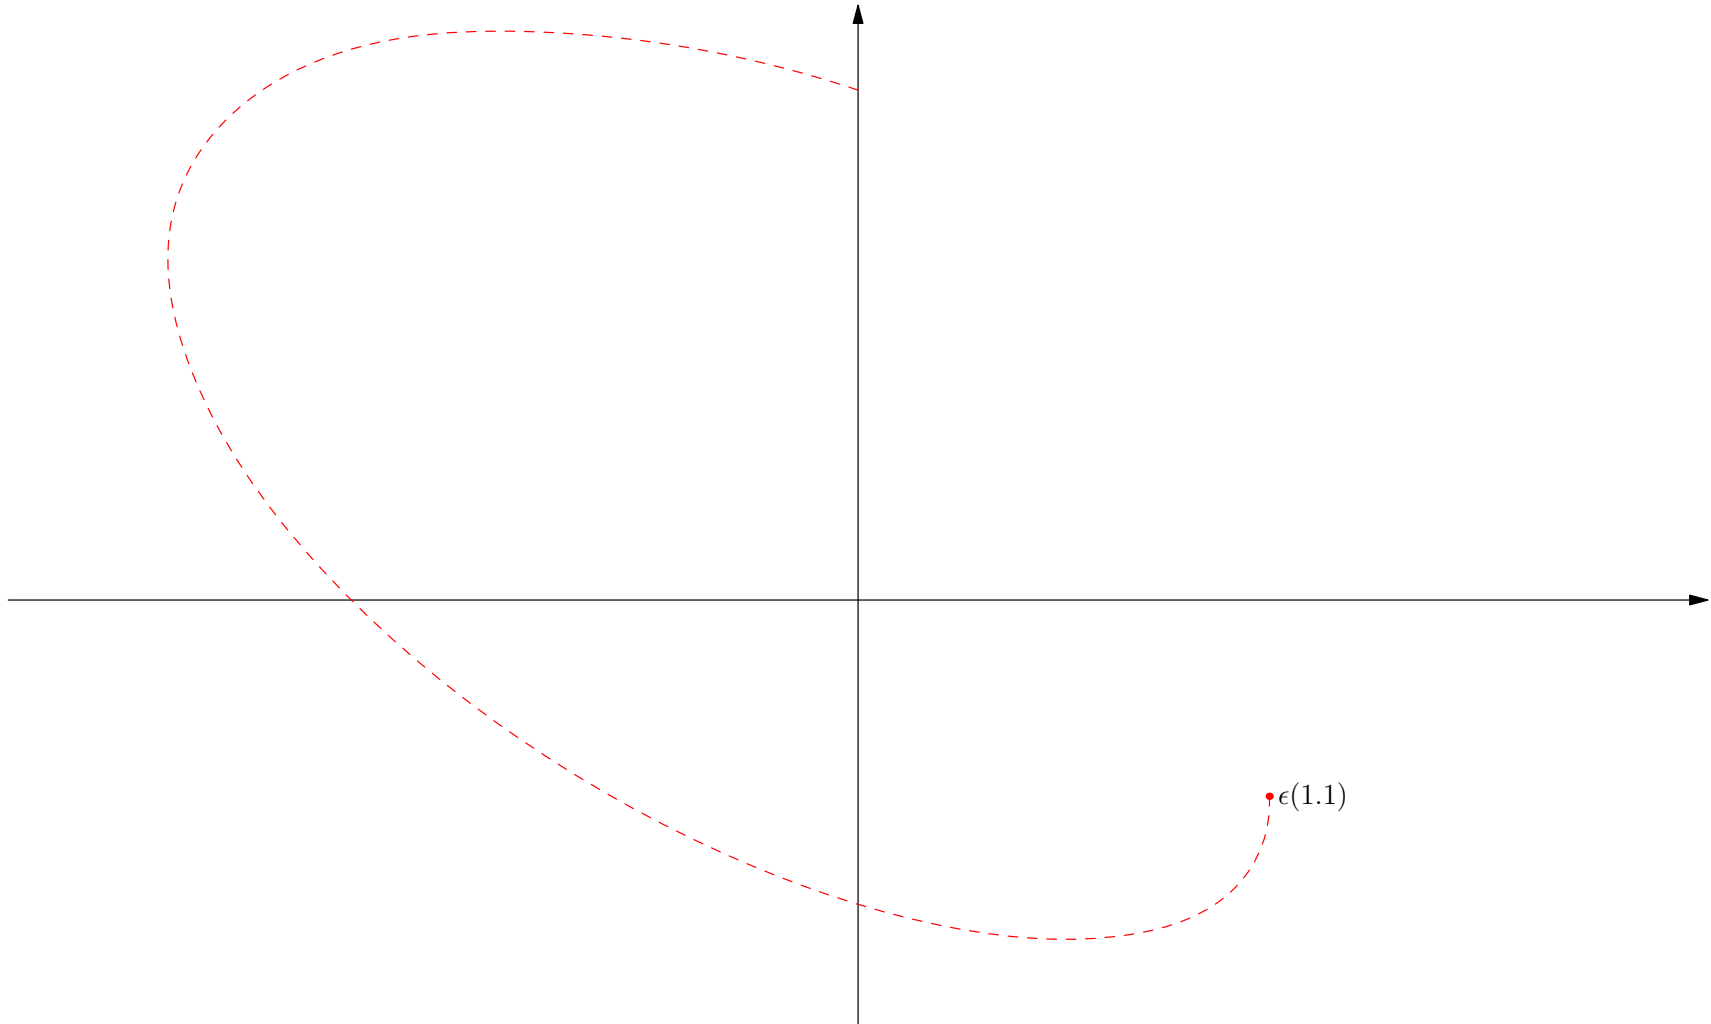


Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$

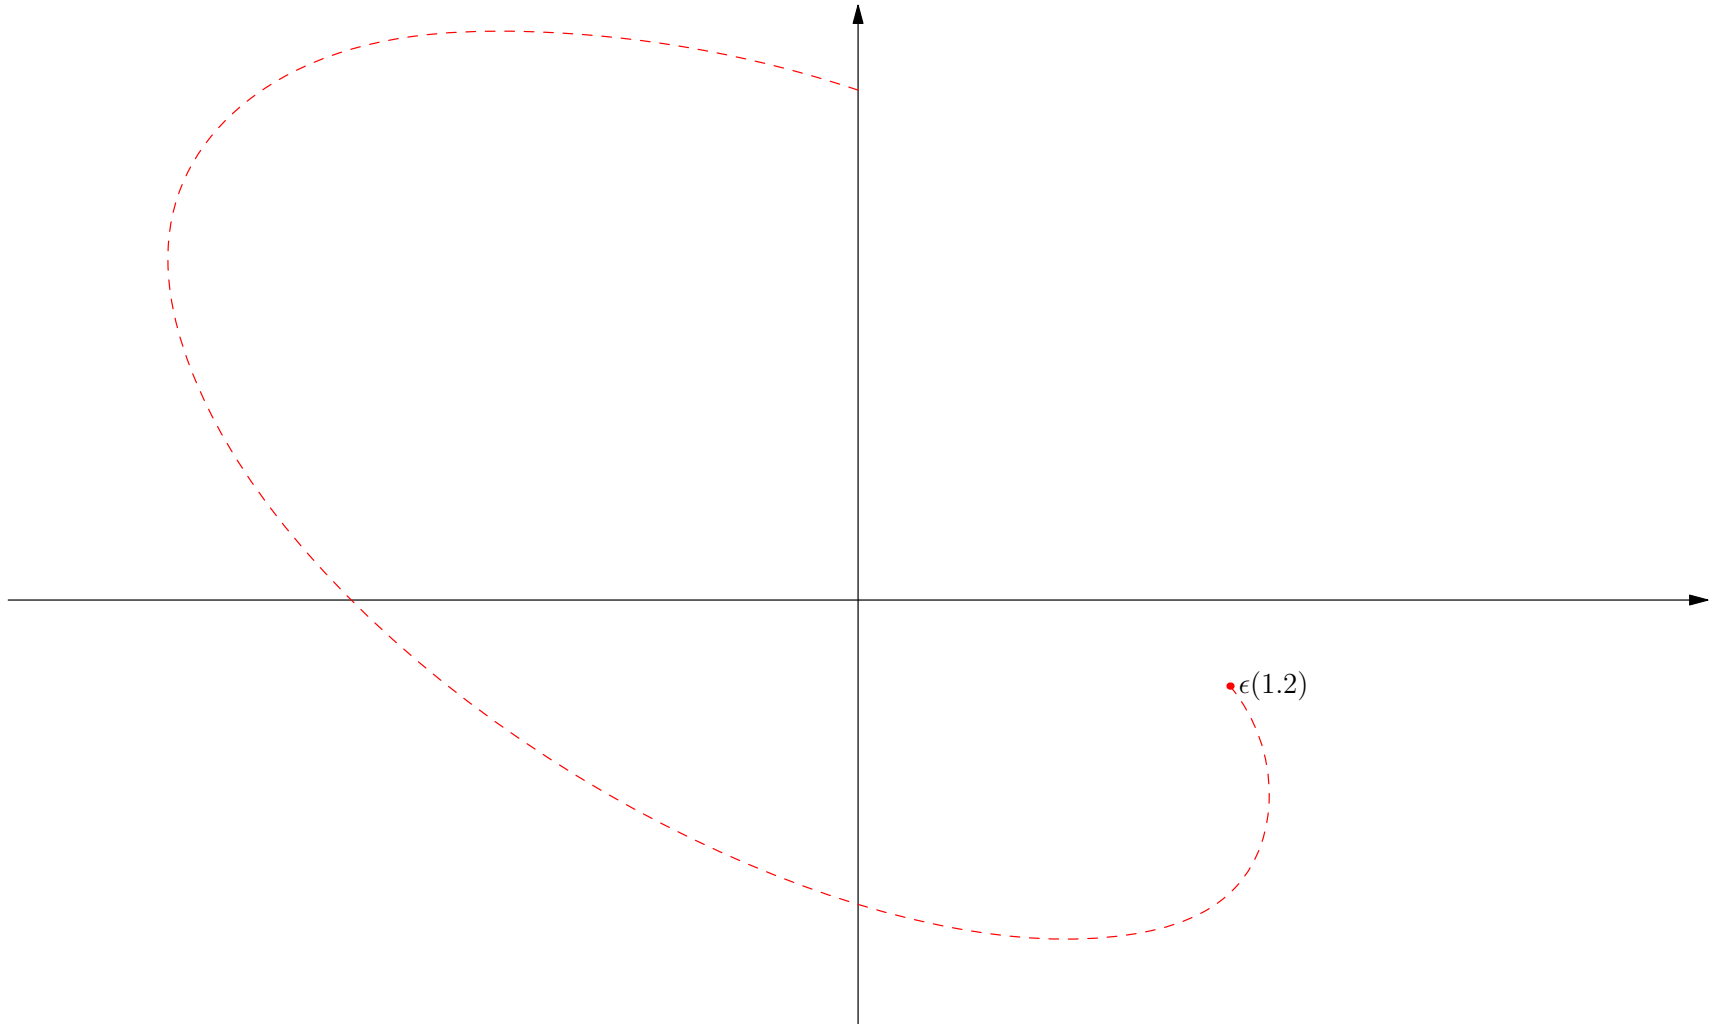


Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$

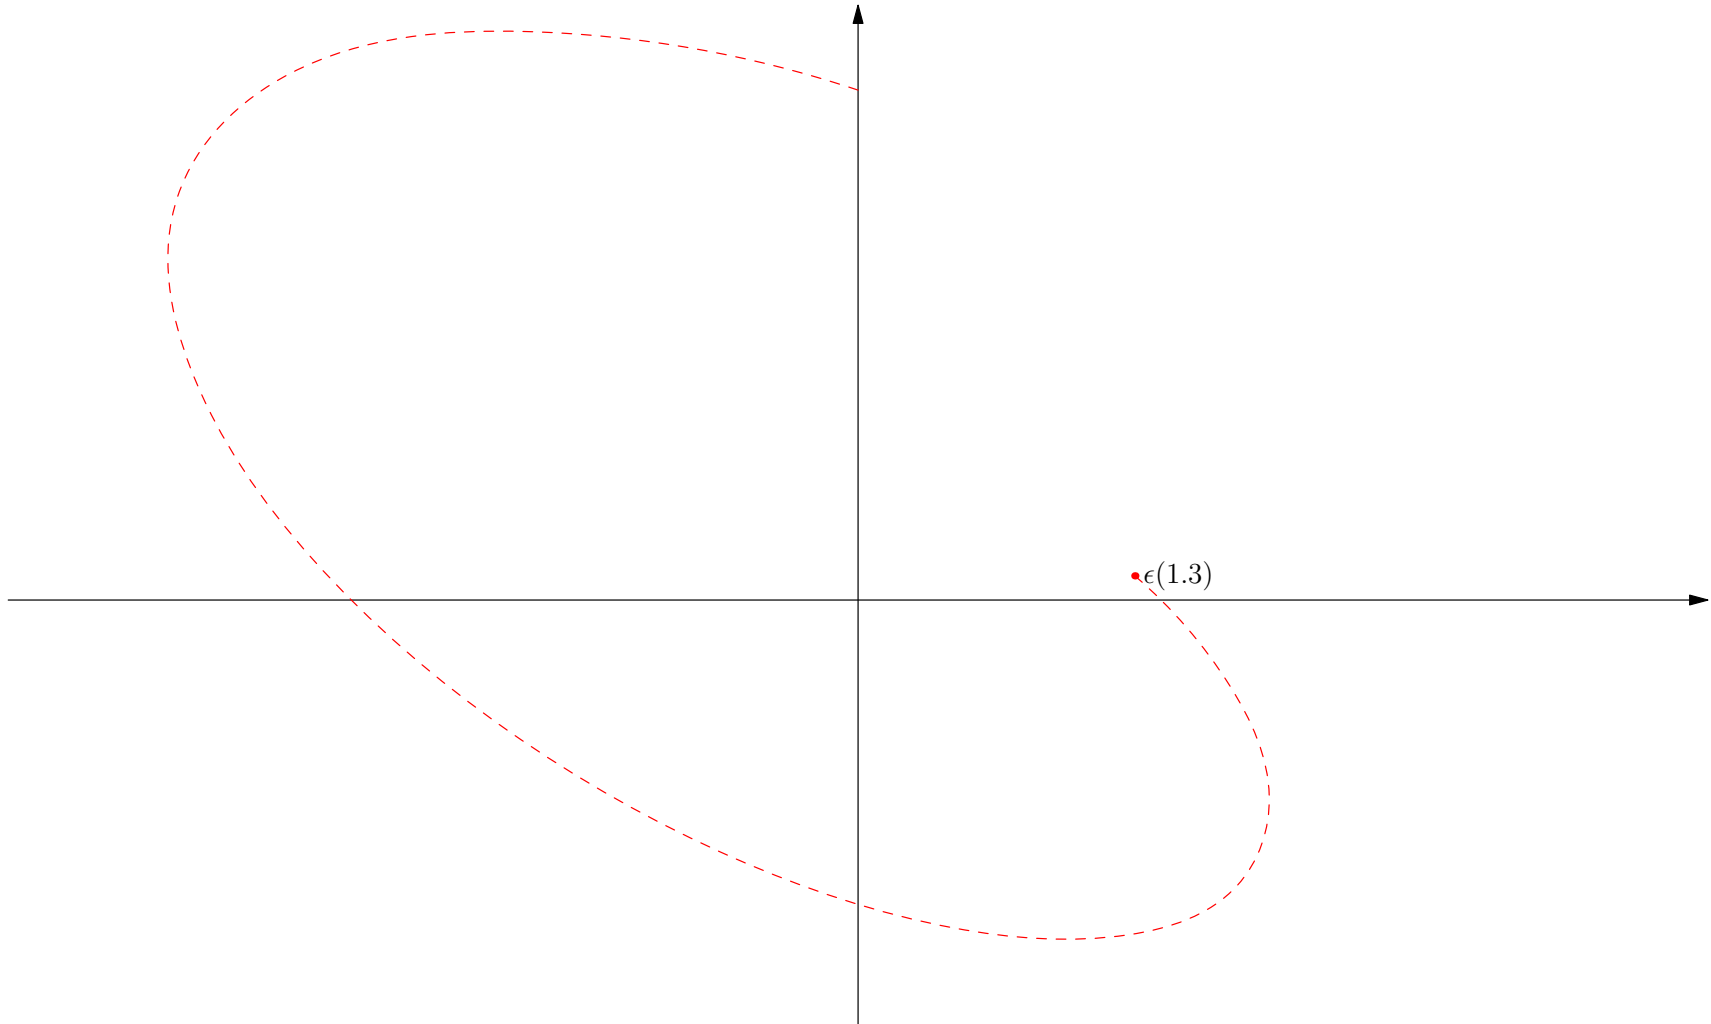


Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$

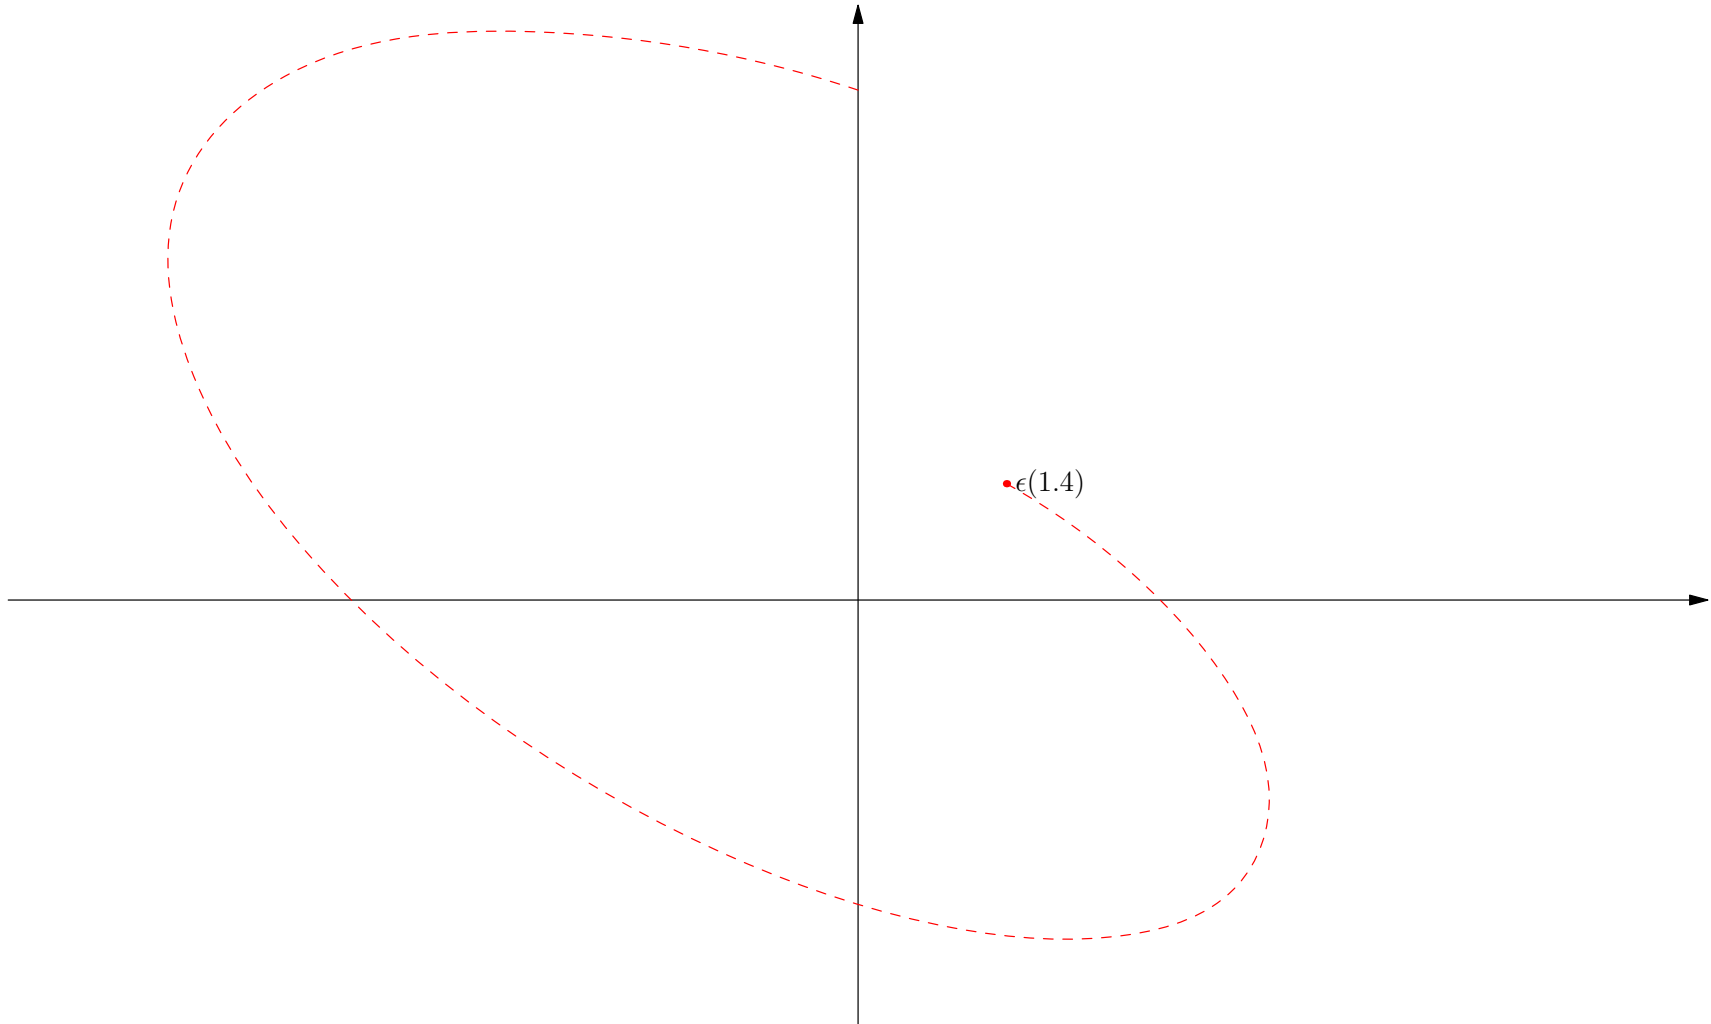


Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$

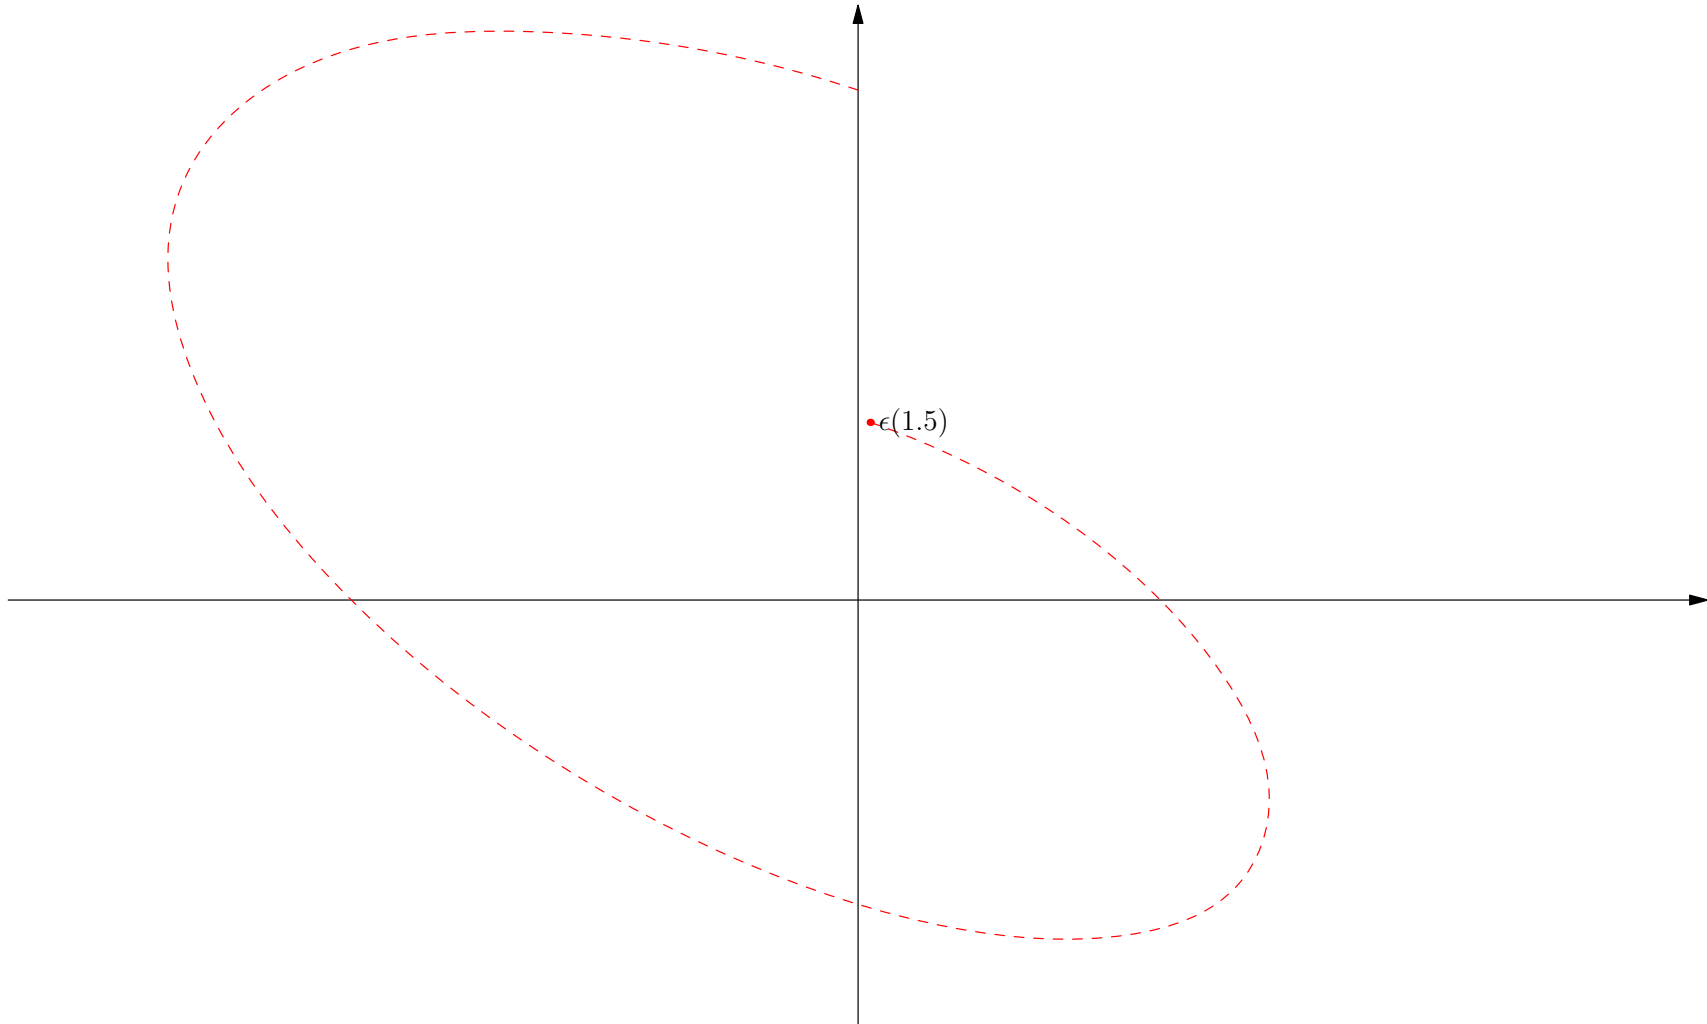


Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$

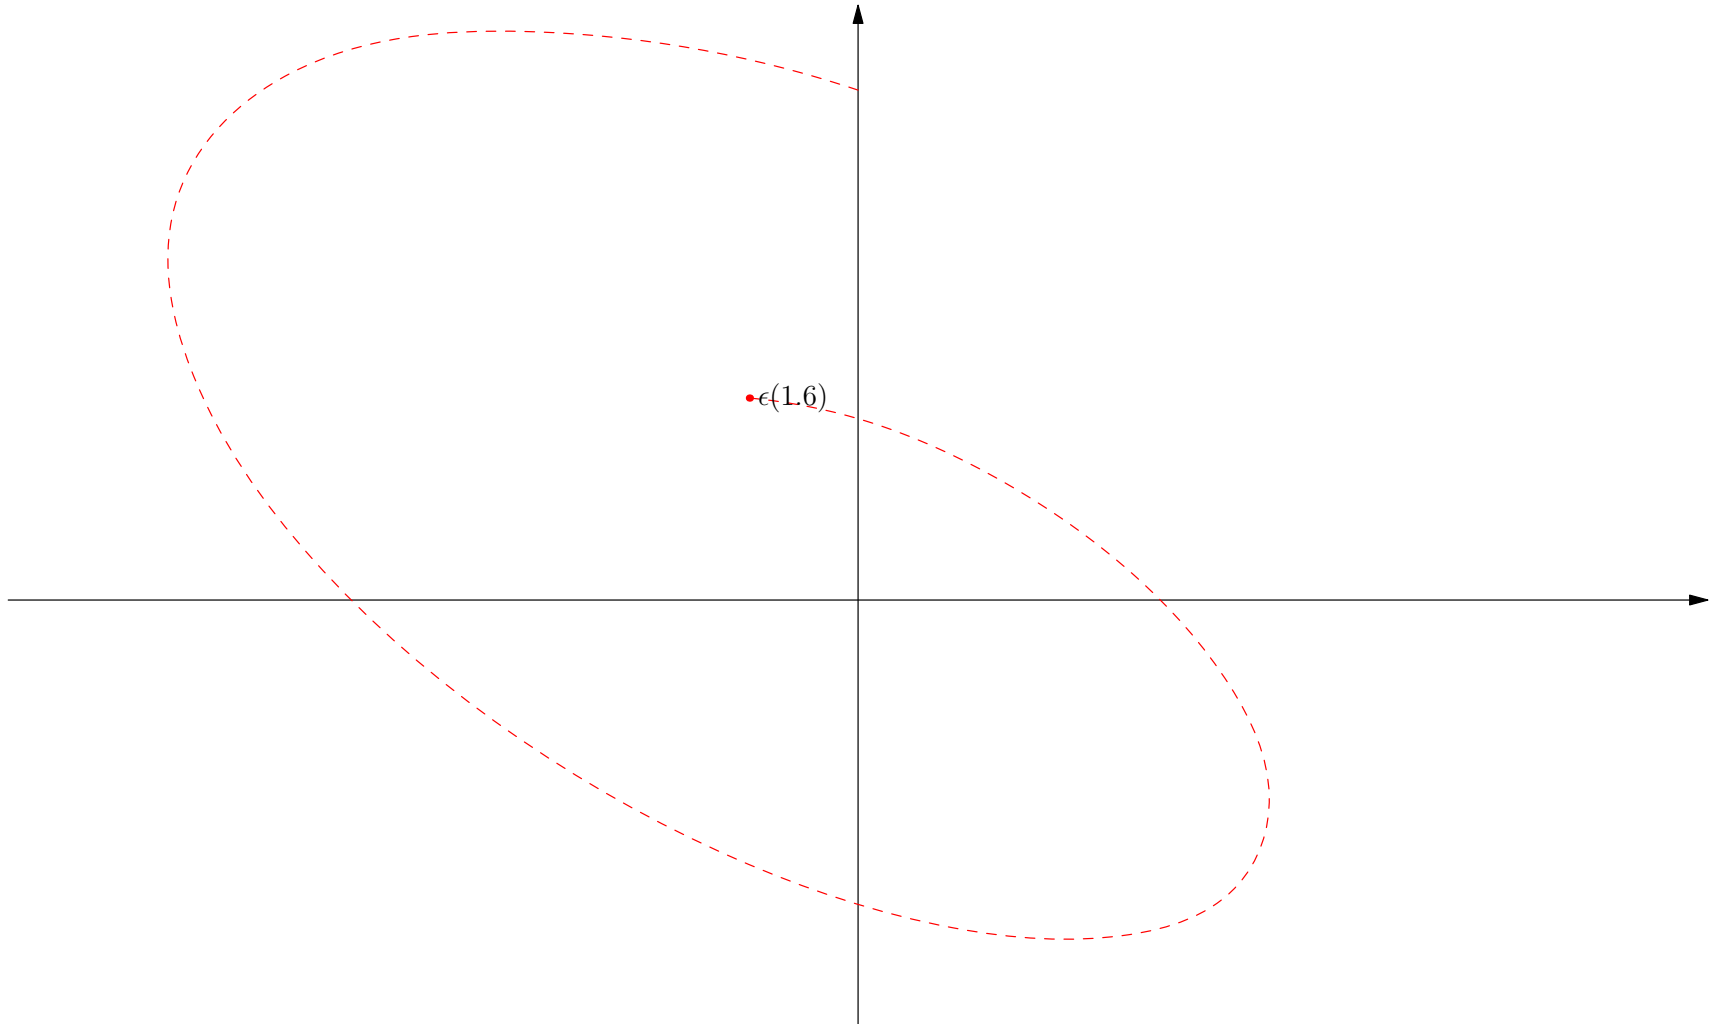

Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$

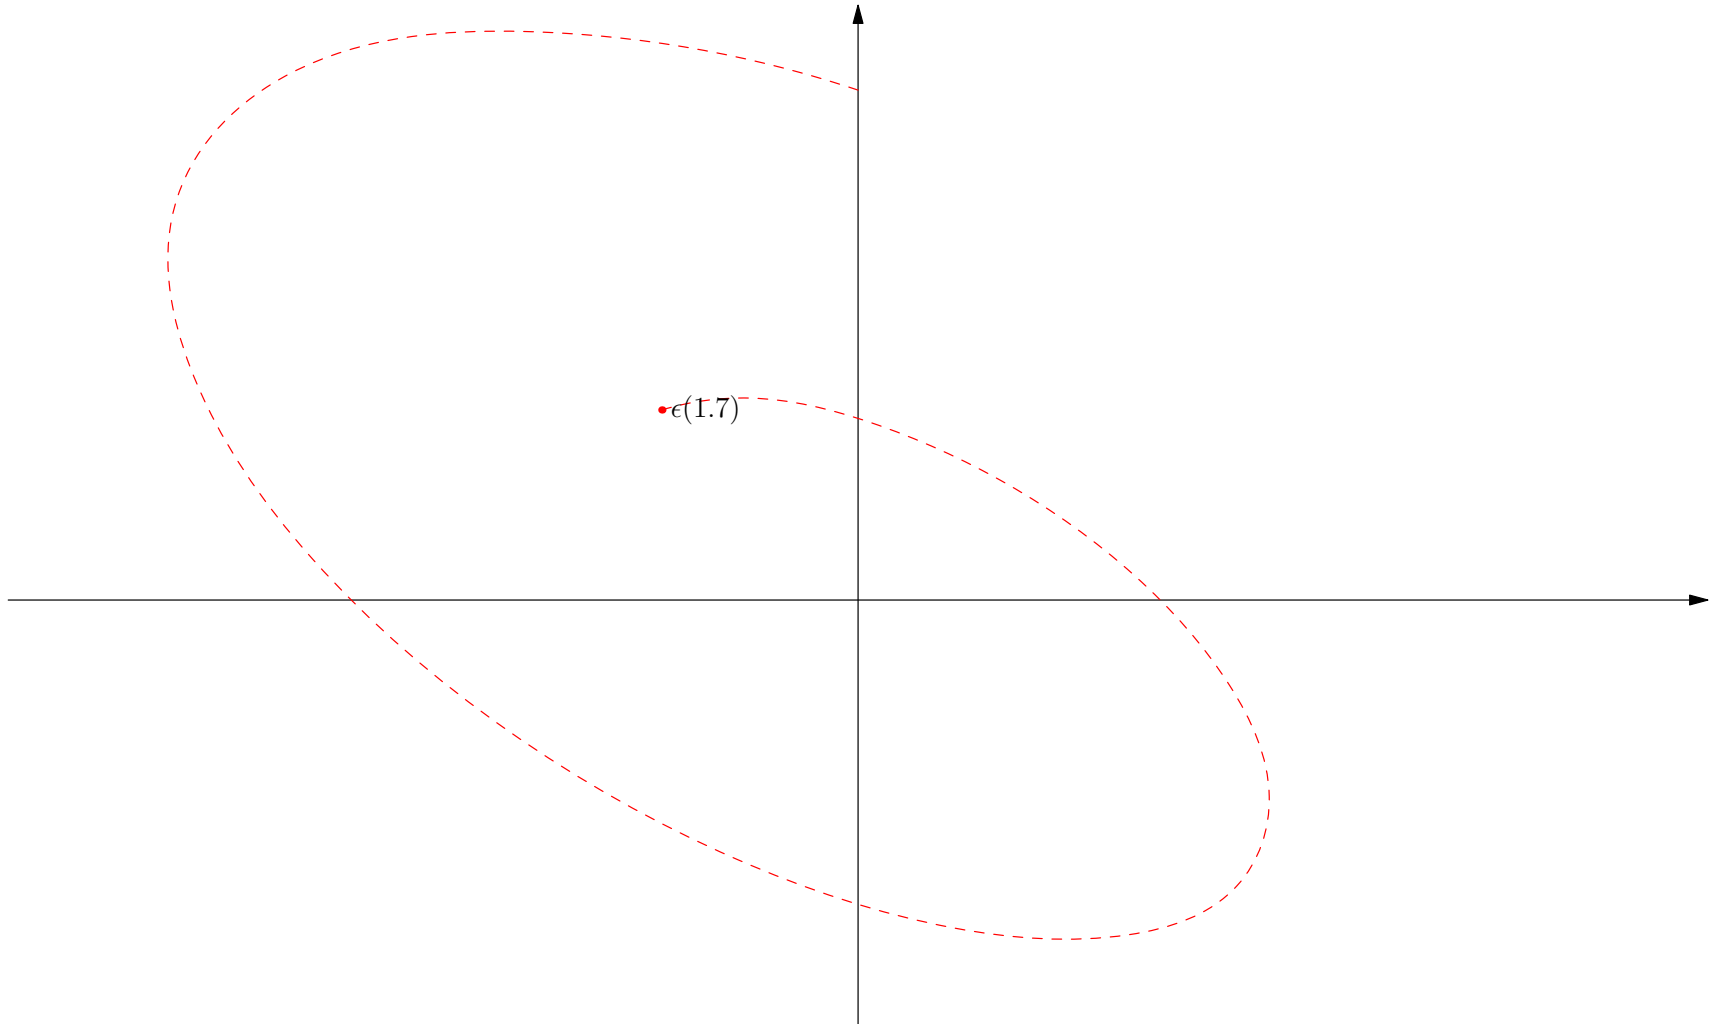


Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$




Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V} \mathbf{\Lambda} \mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$

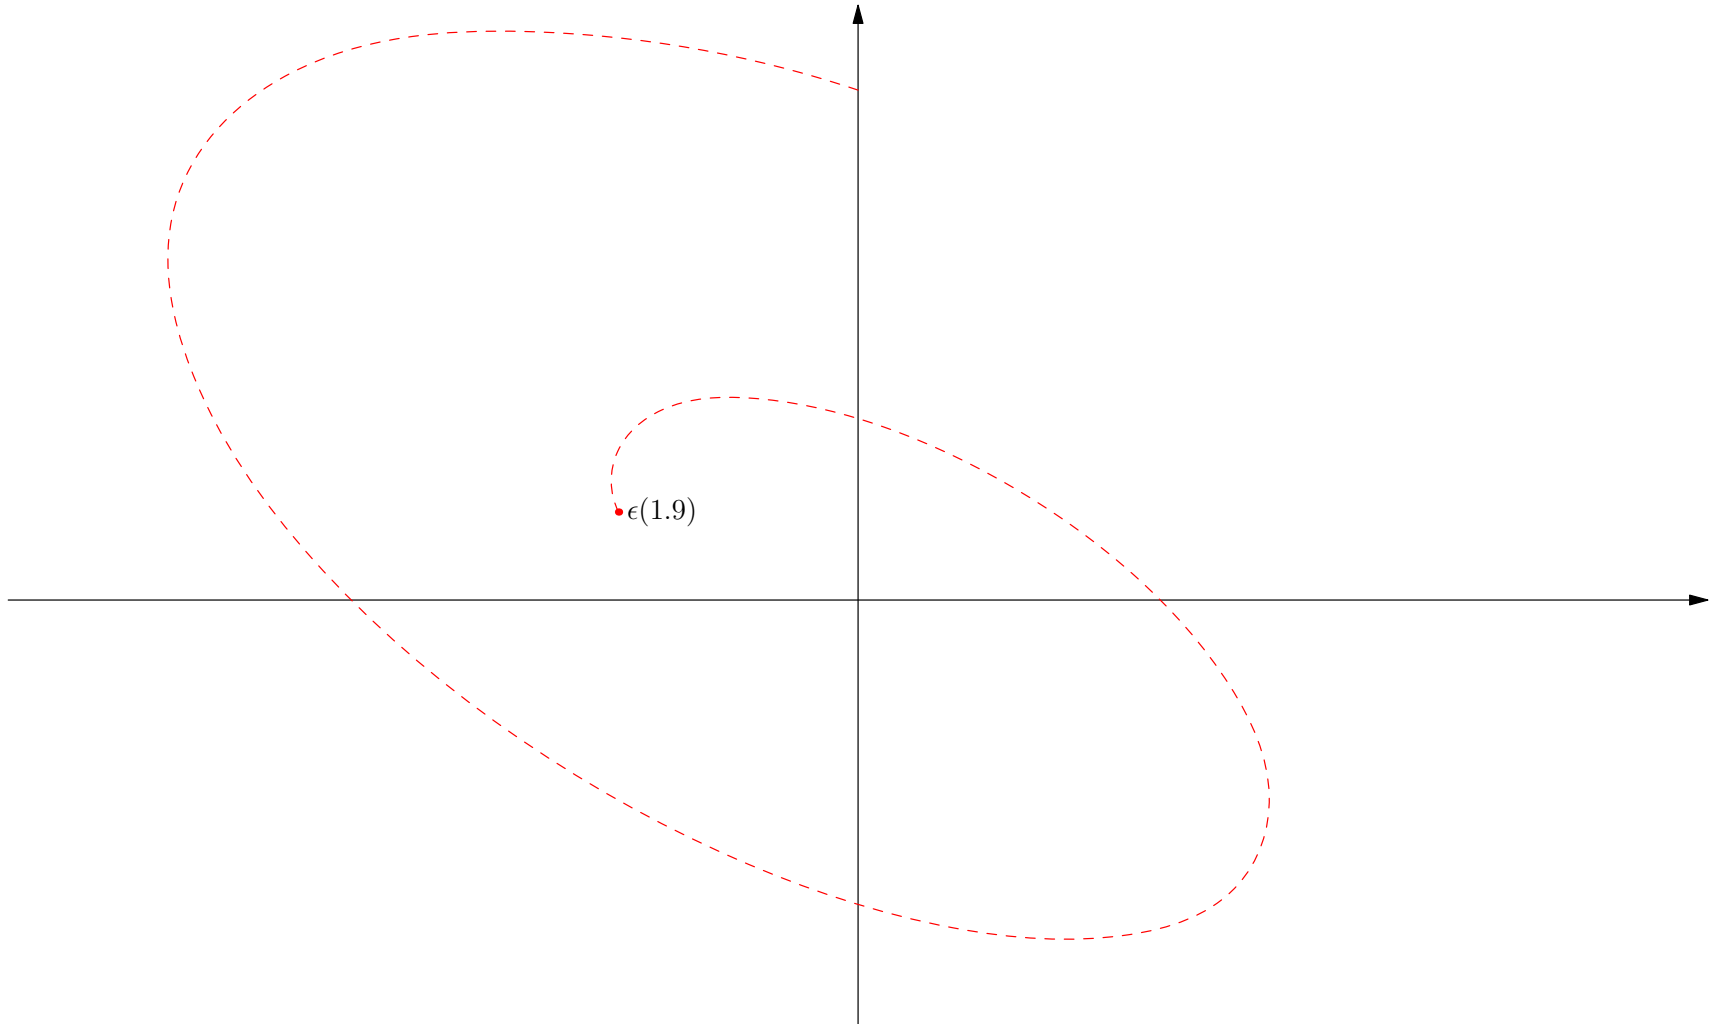


Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$

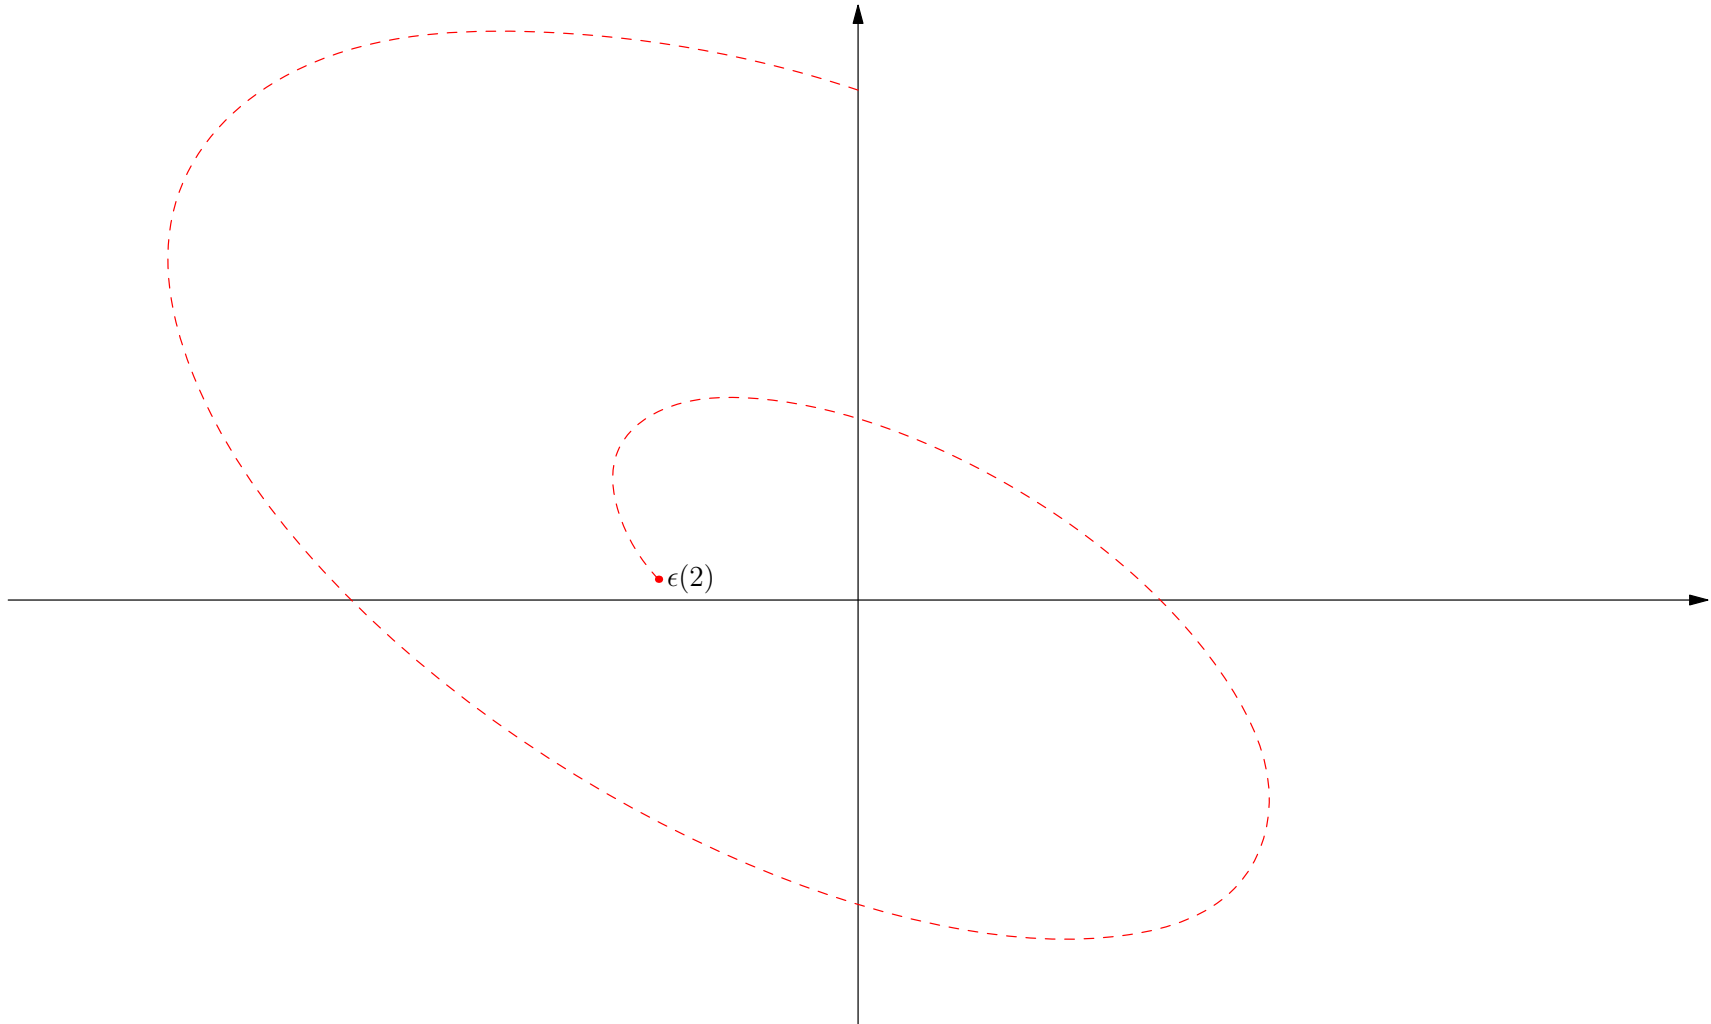


Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$

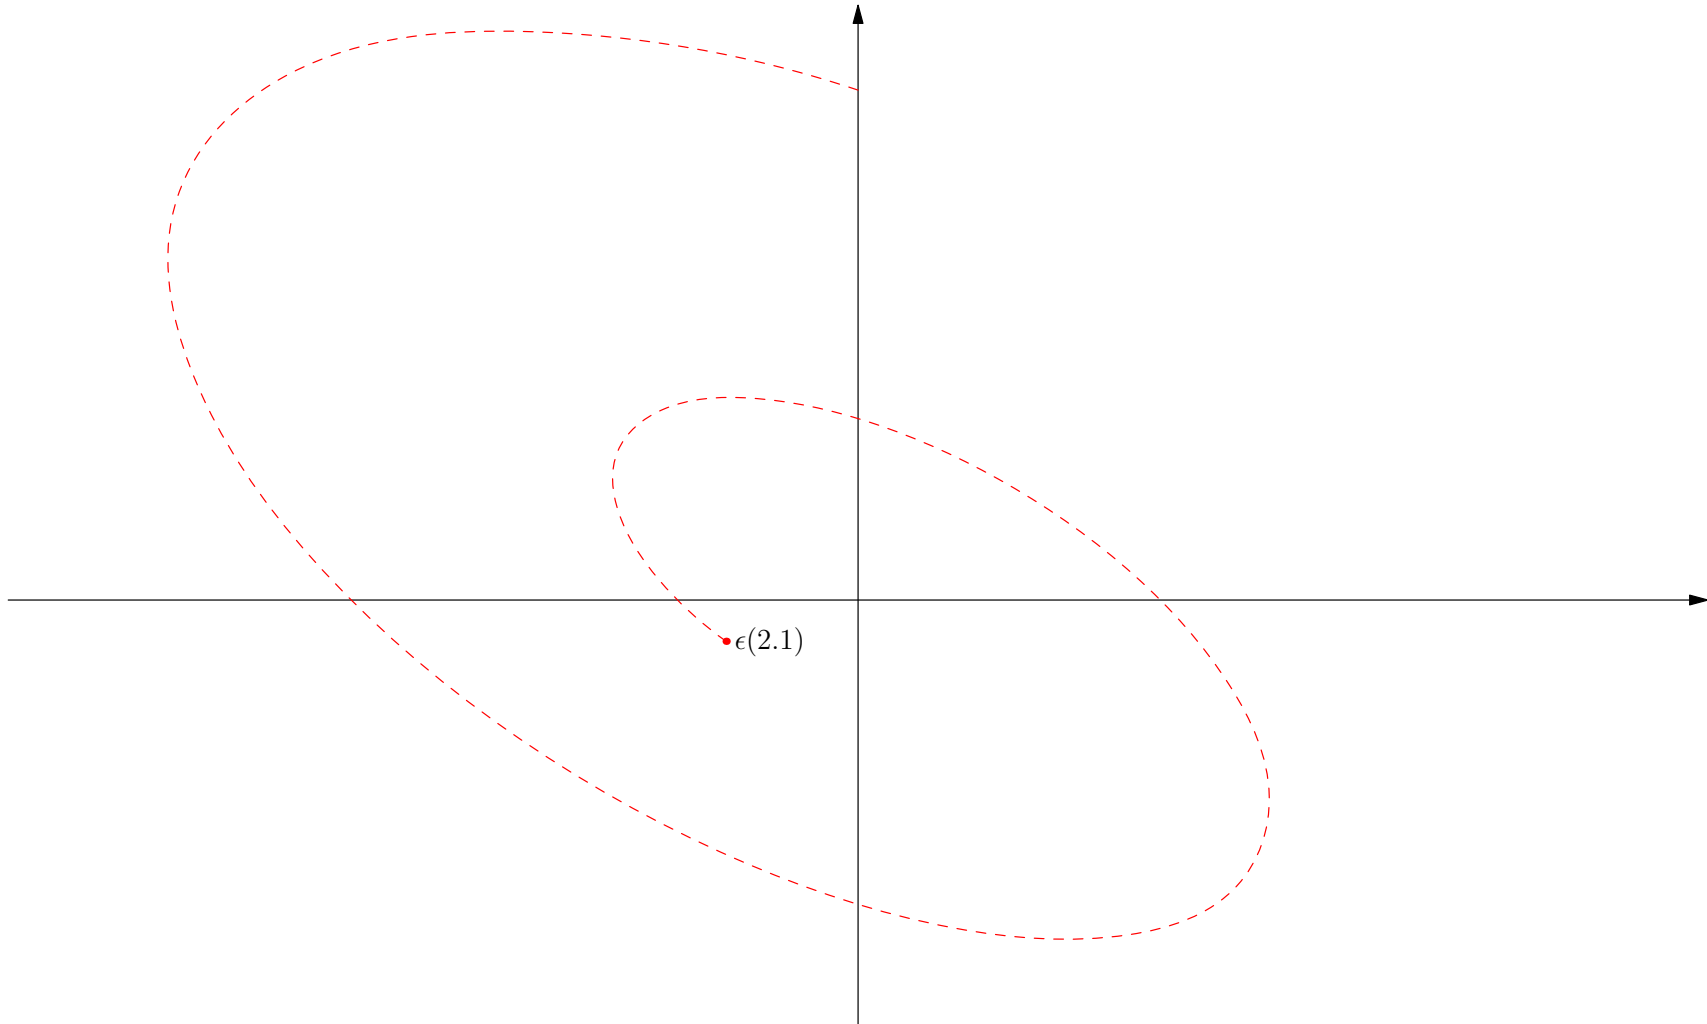


Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$

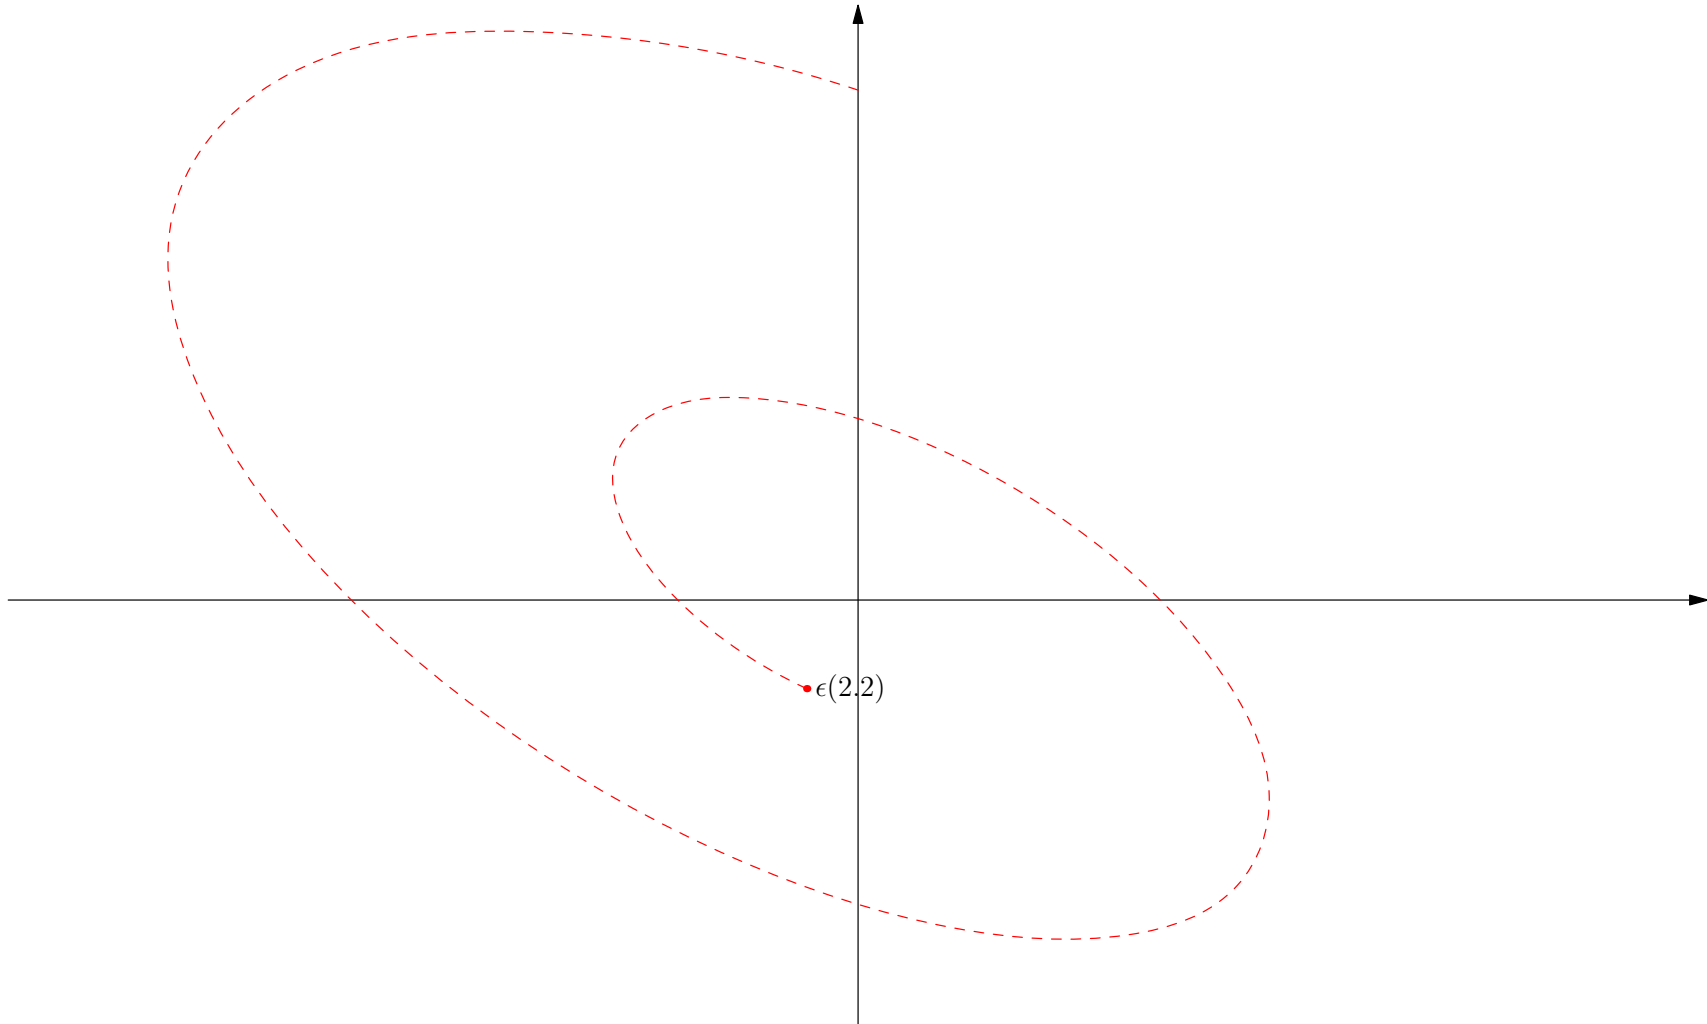


Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$

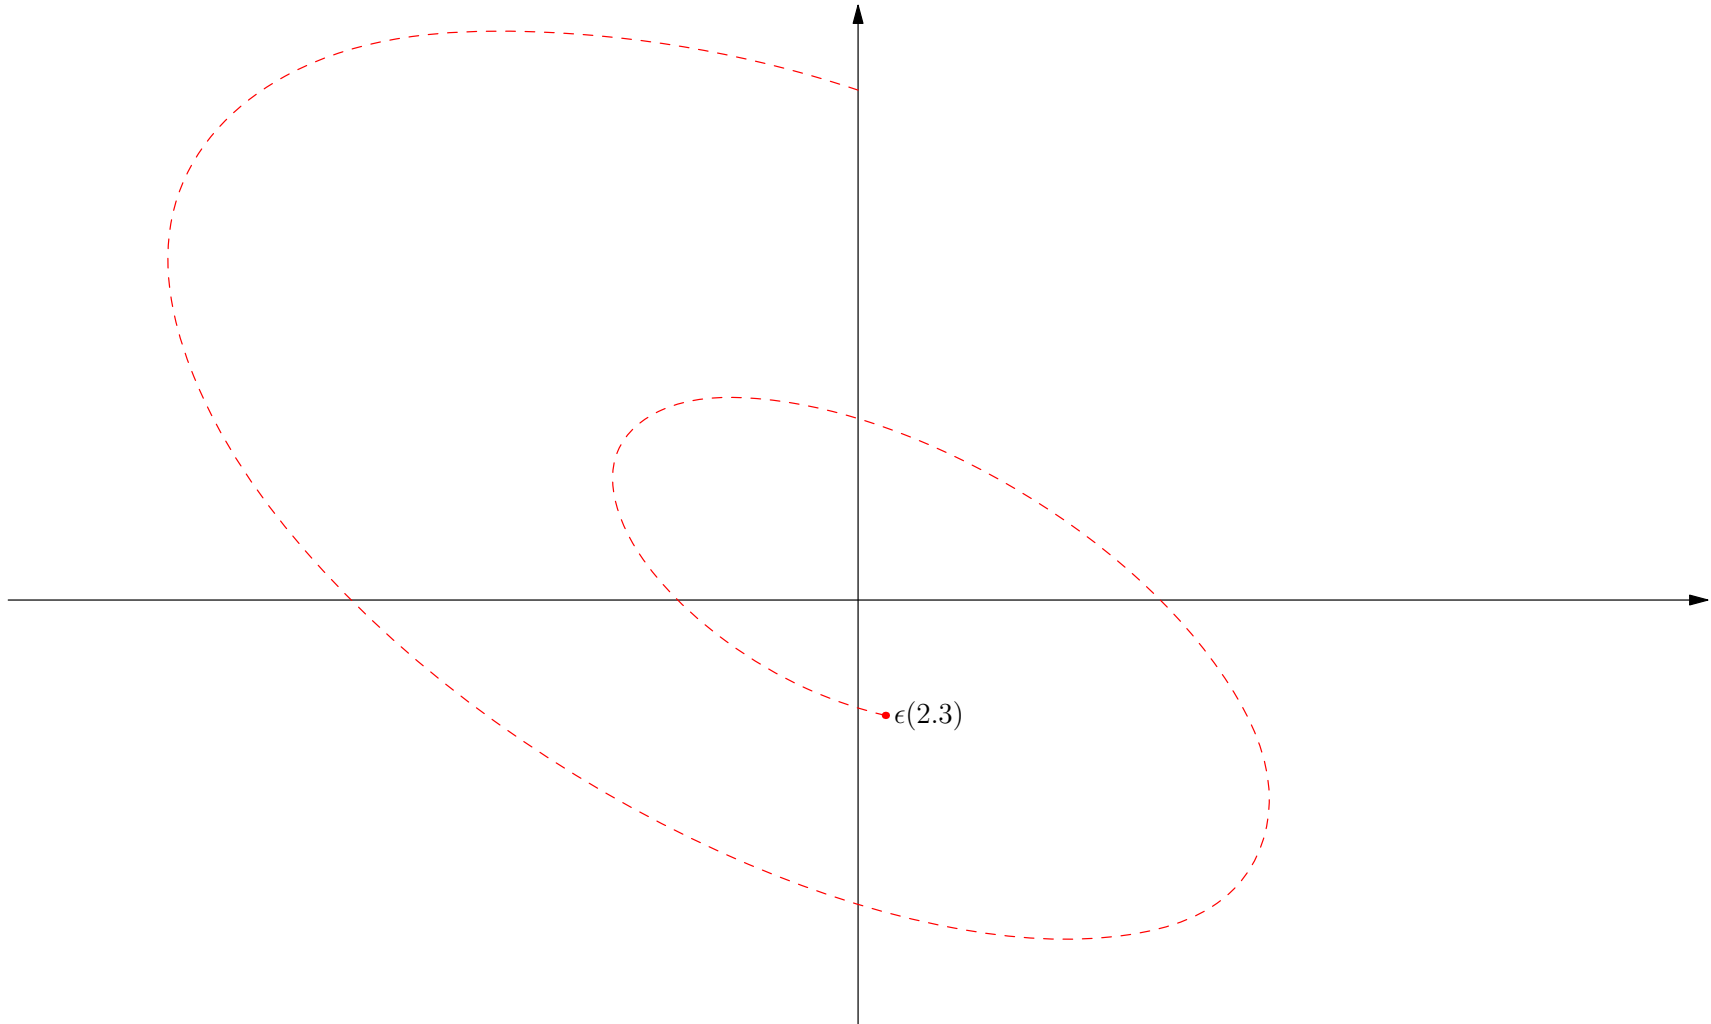


Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$

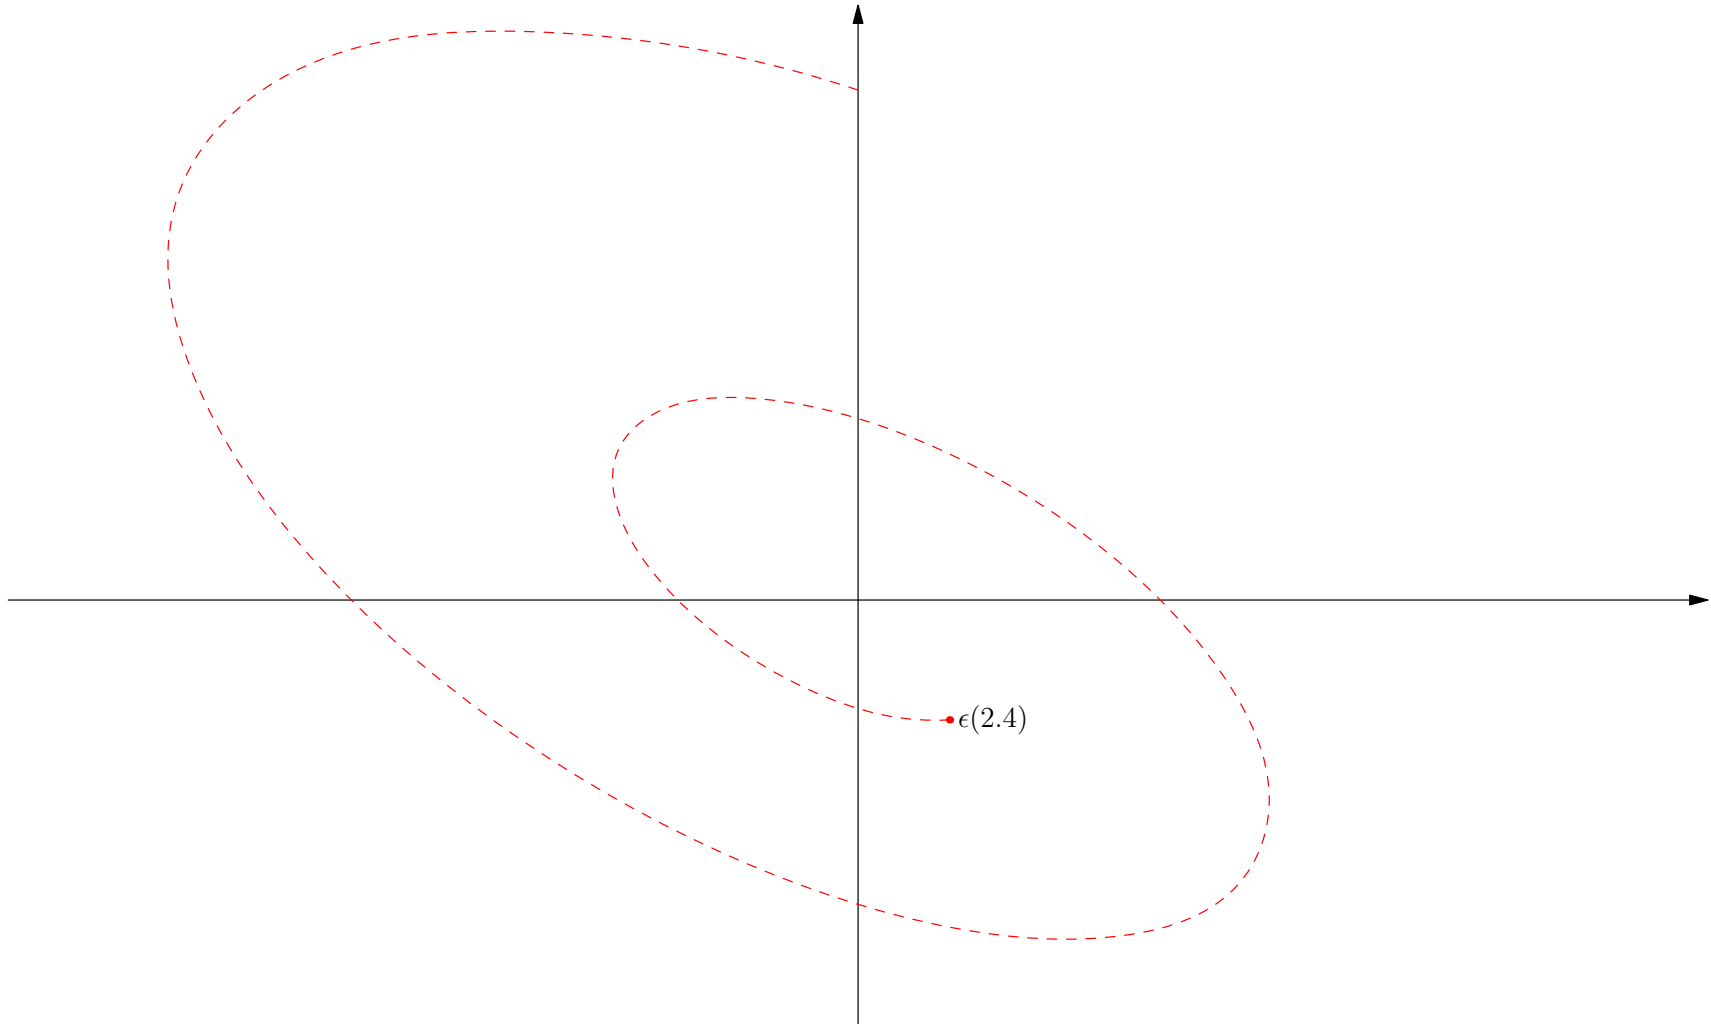


Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$

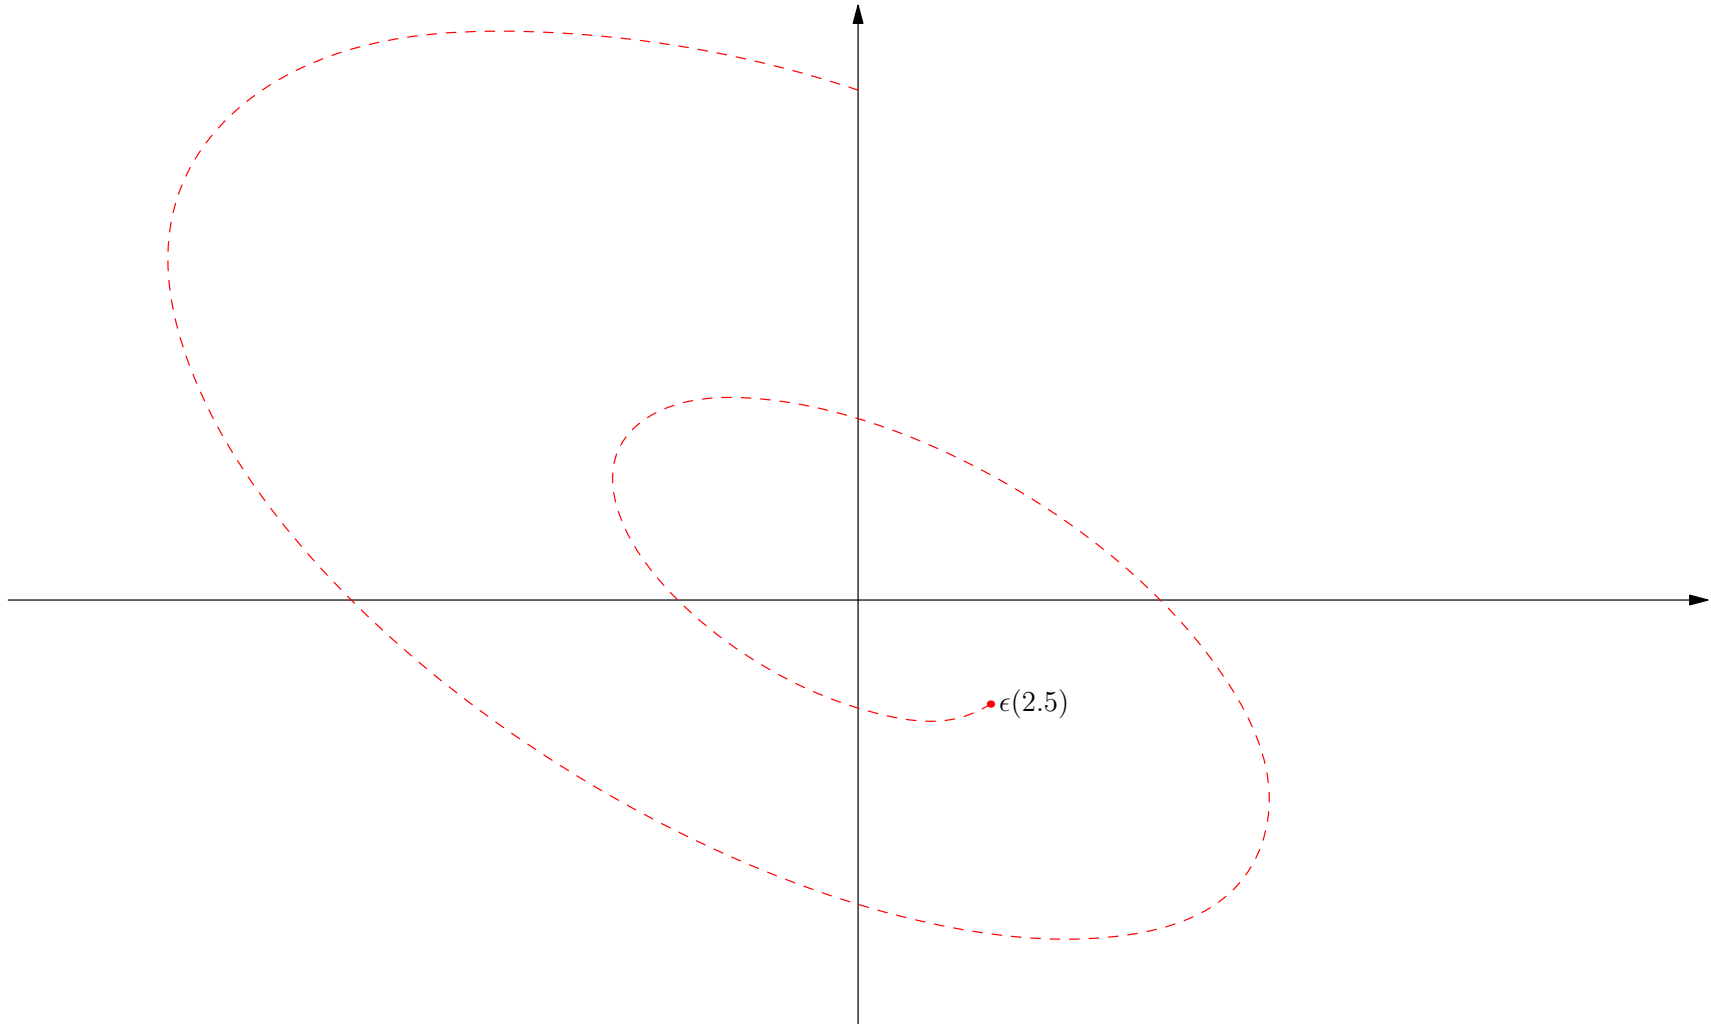


Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$

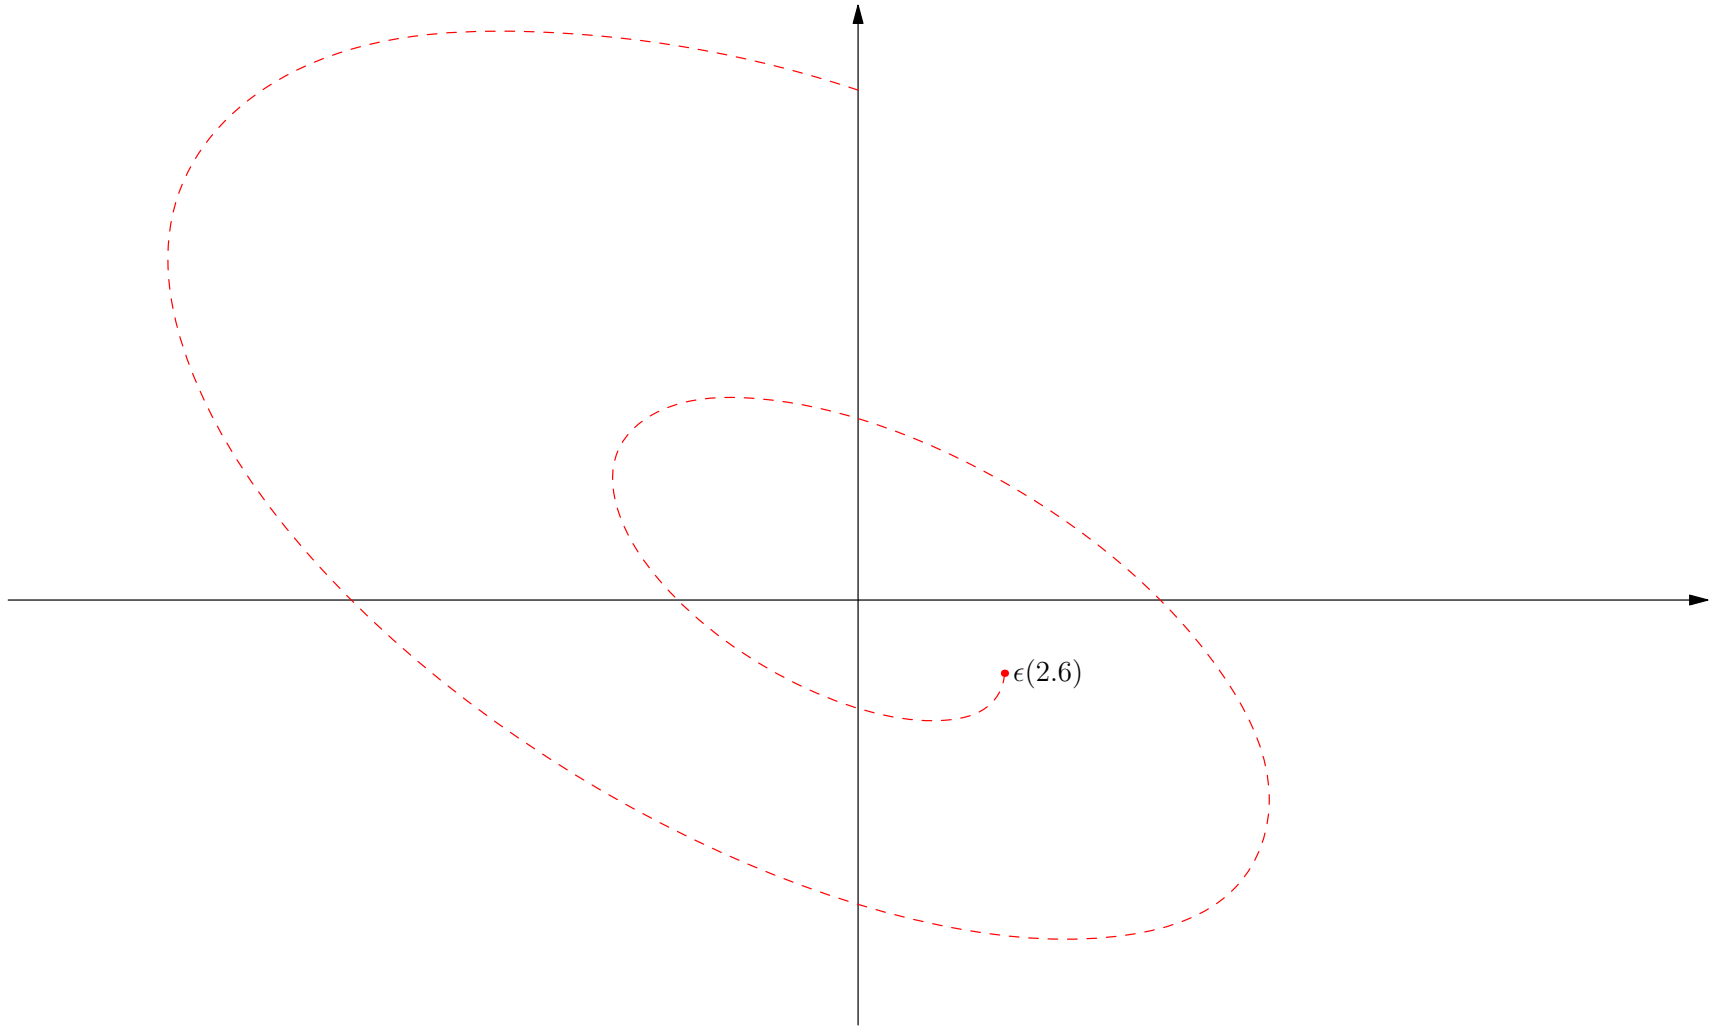


Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$

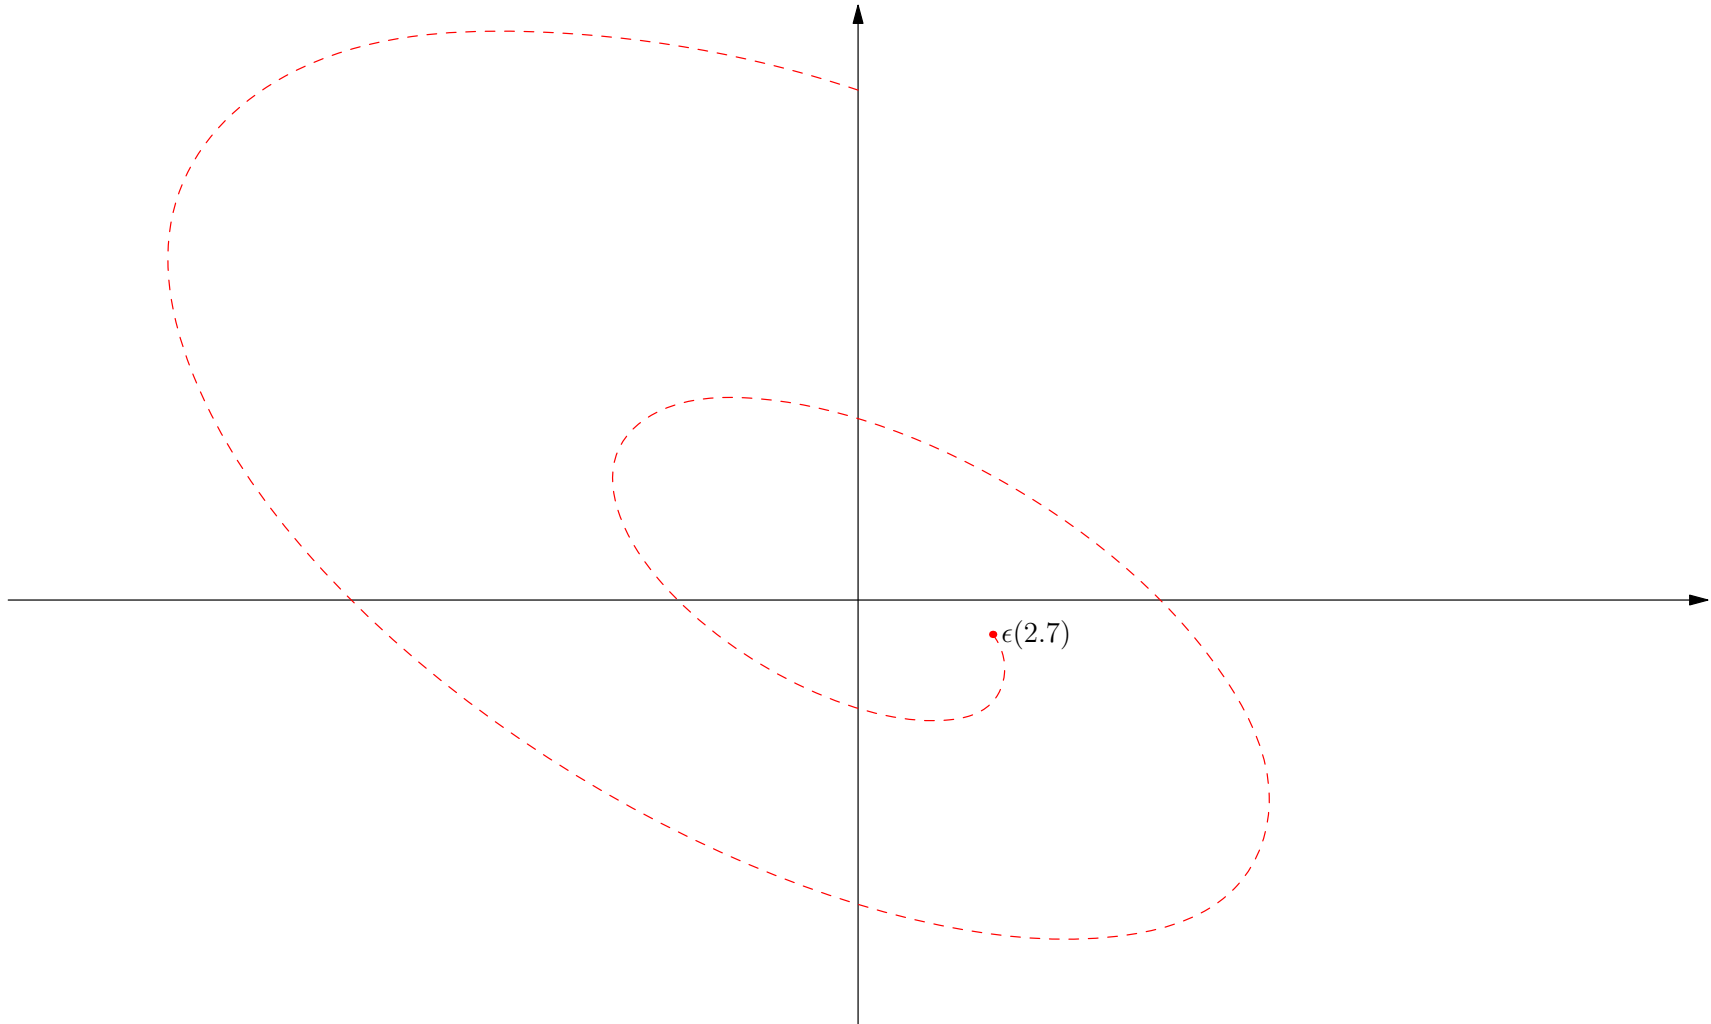


Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$

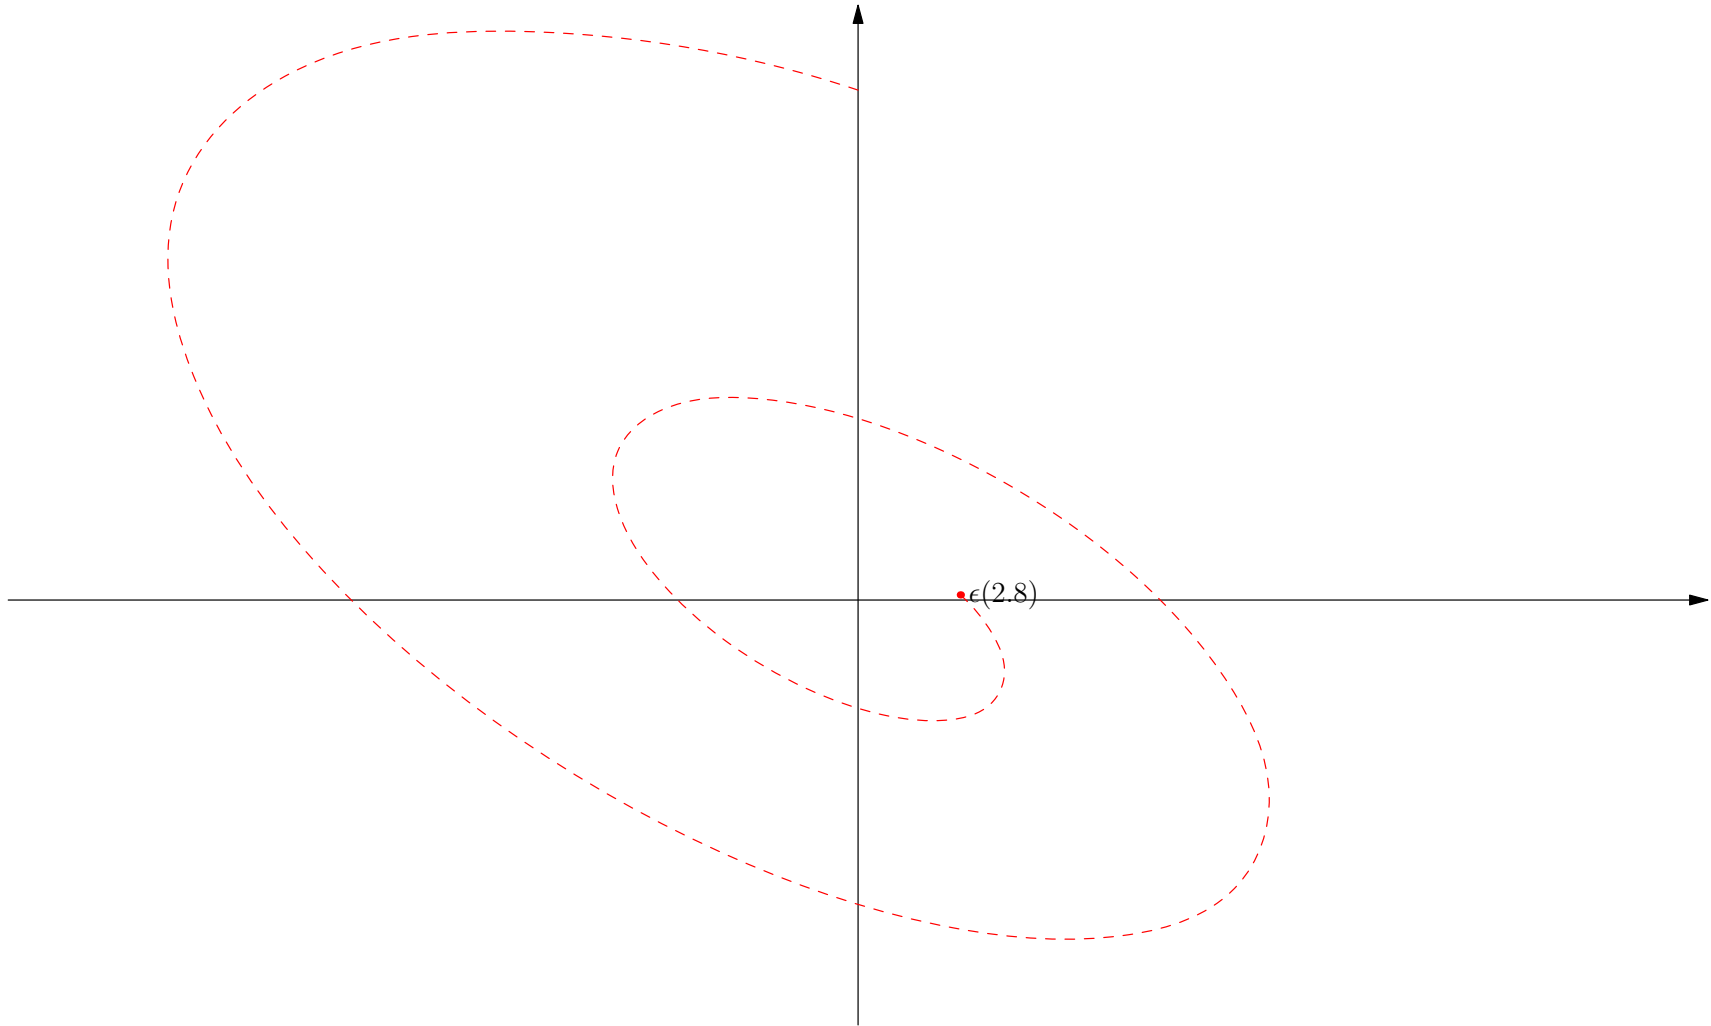


Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$

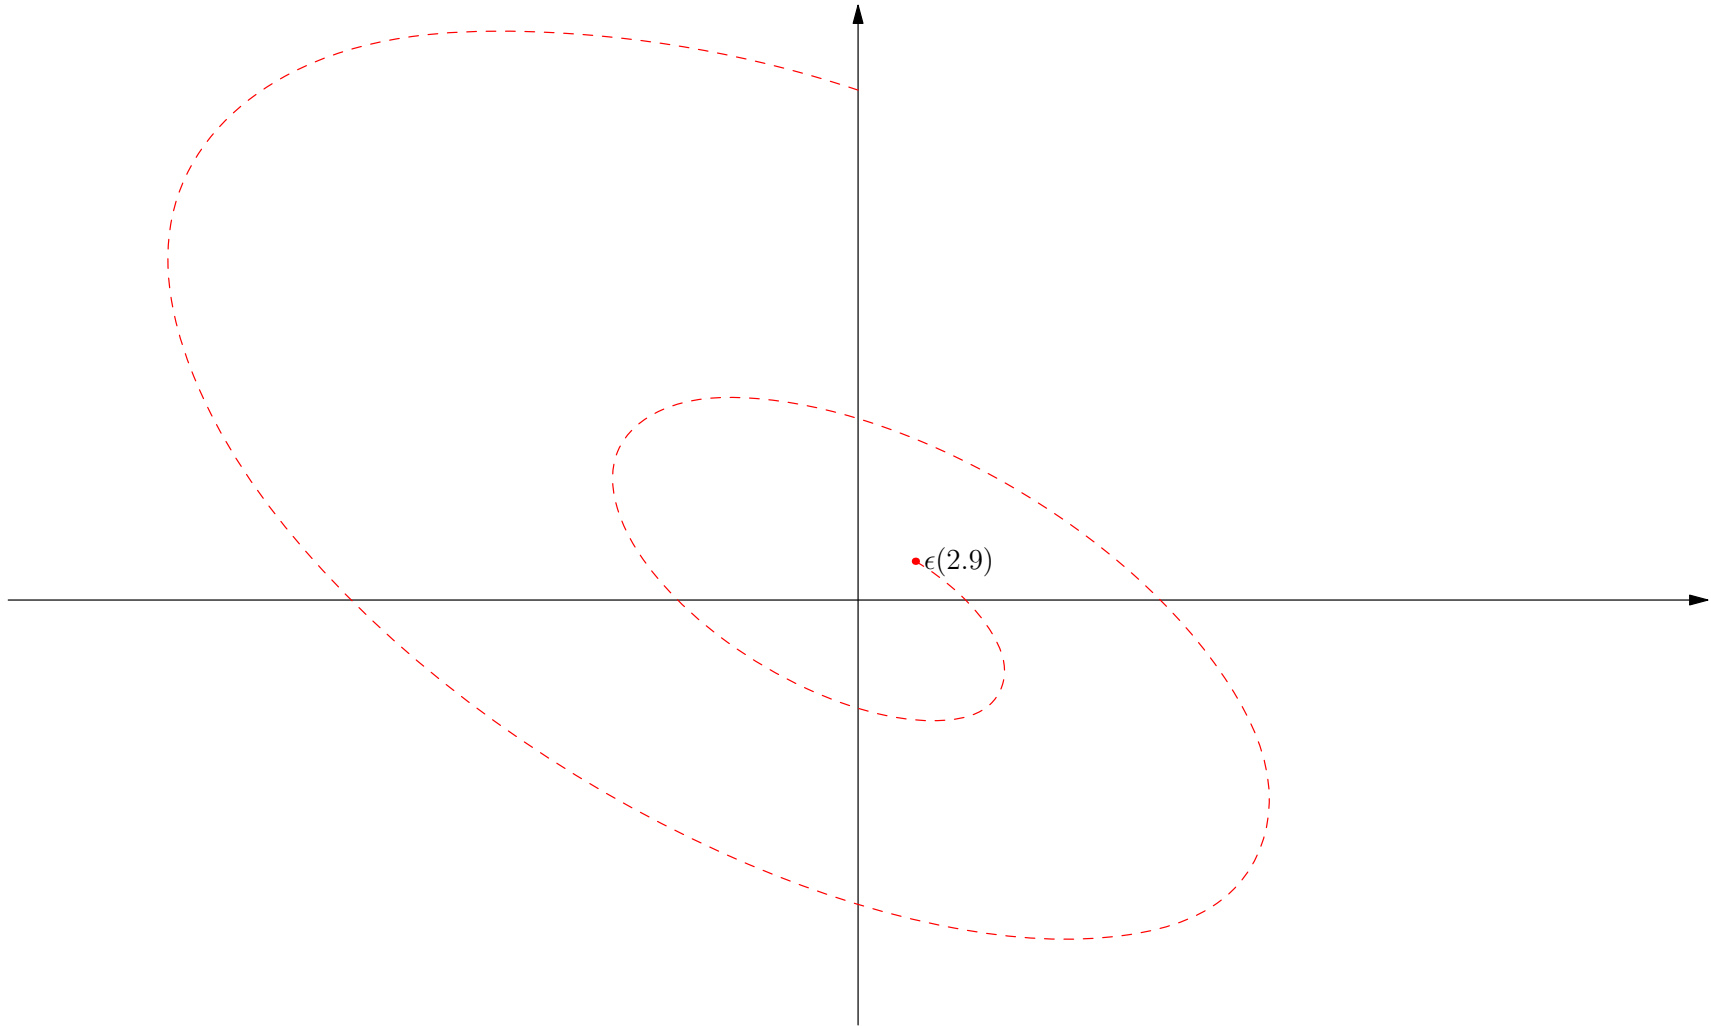


Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$

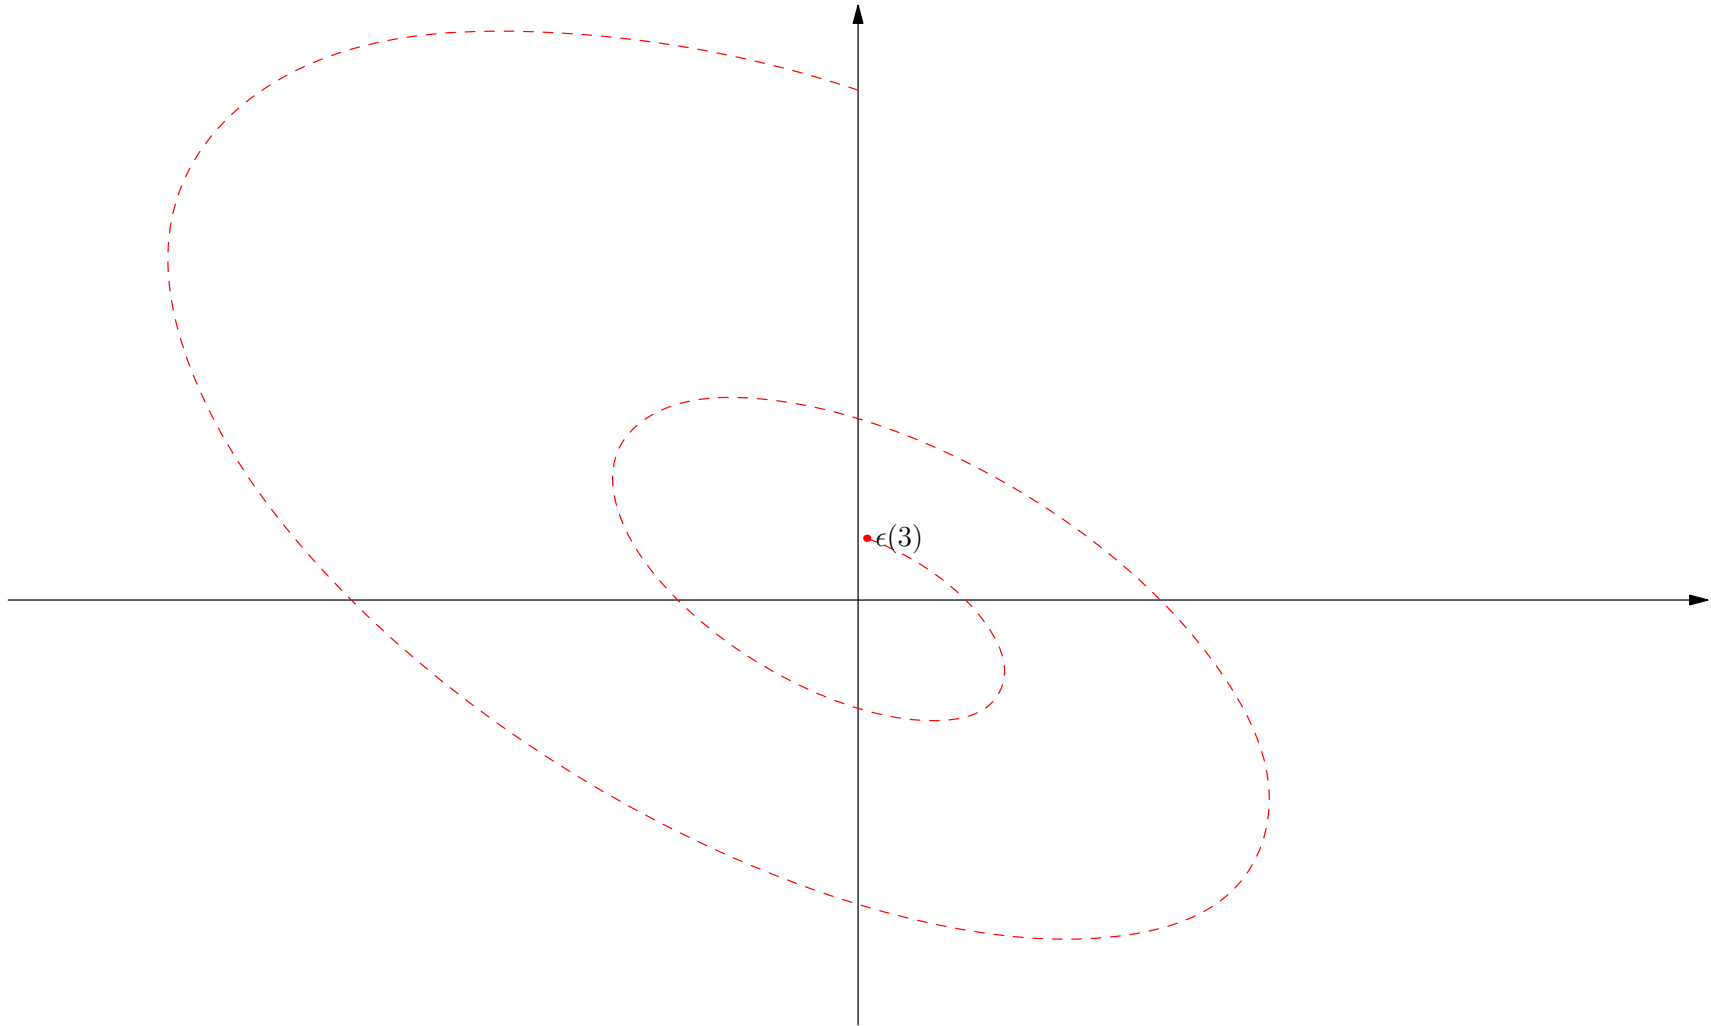


Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$

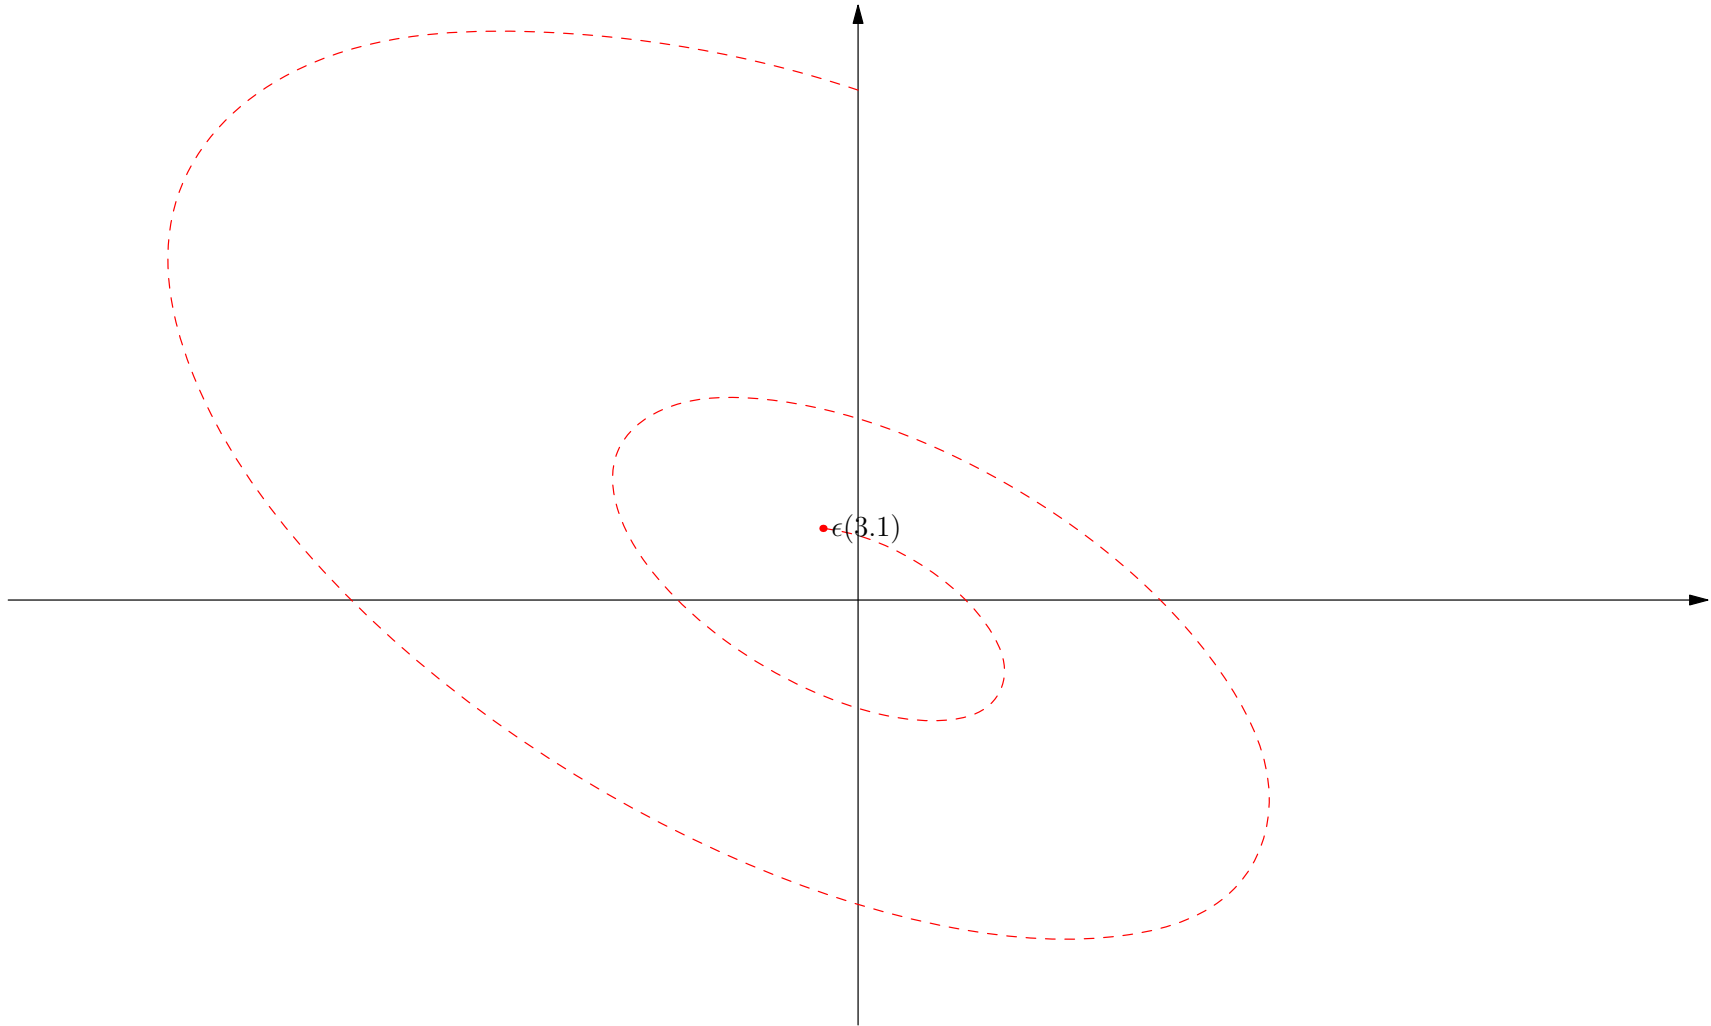


Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$

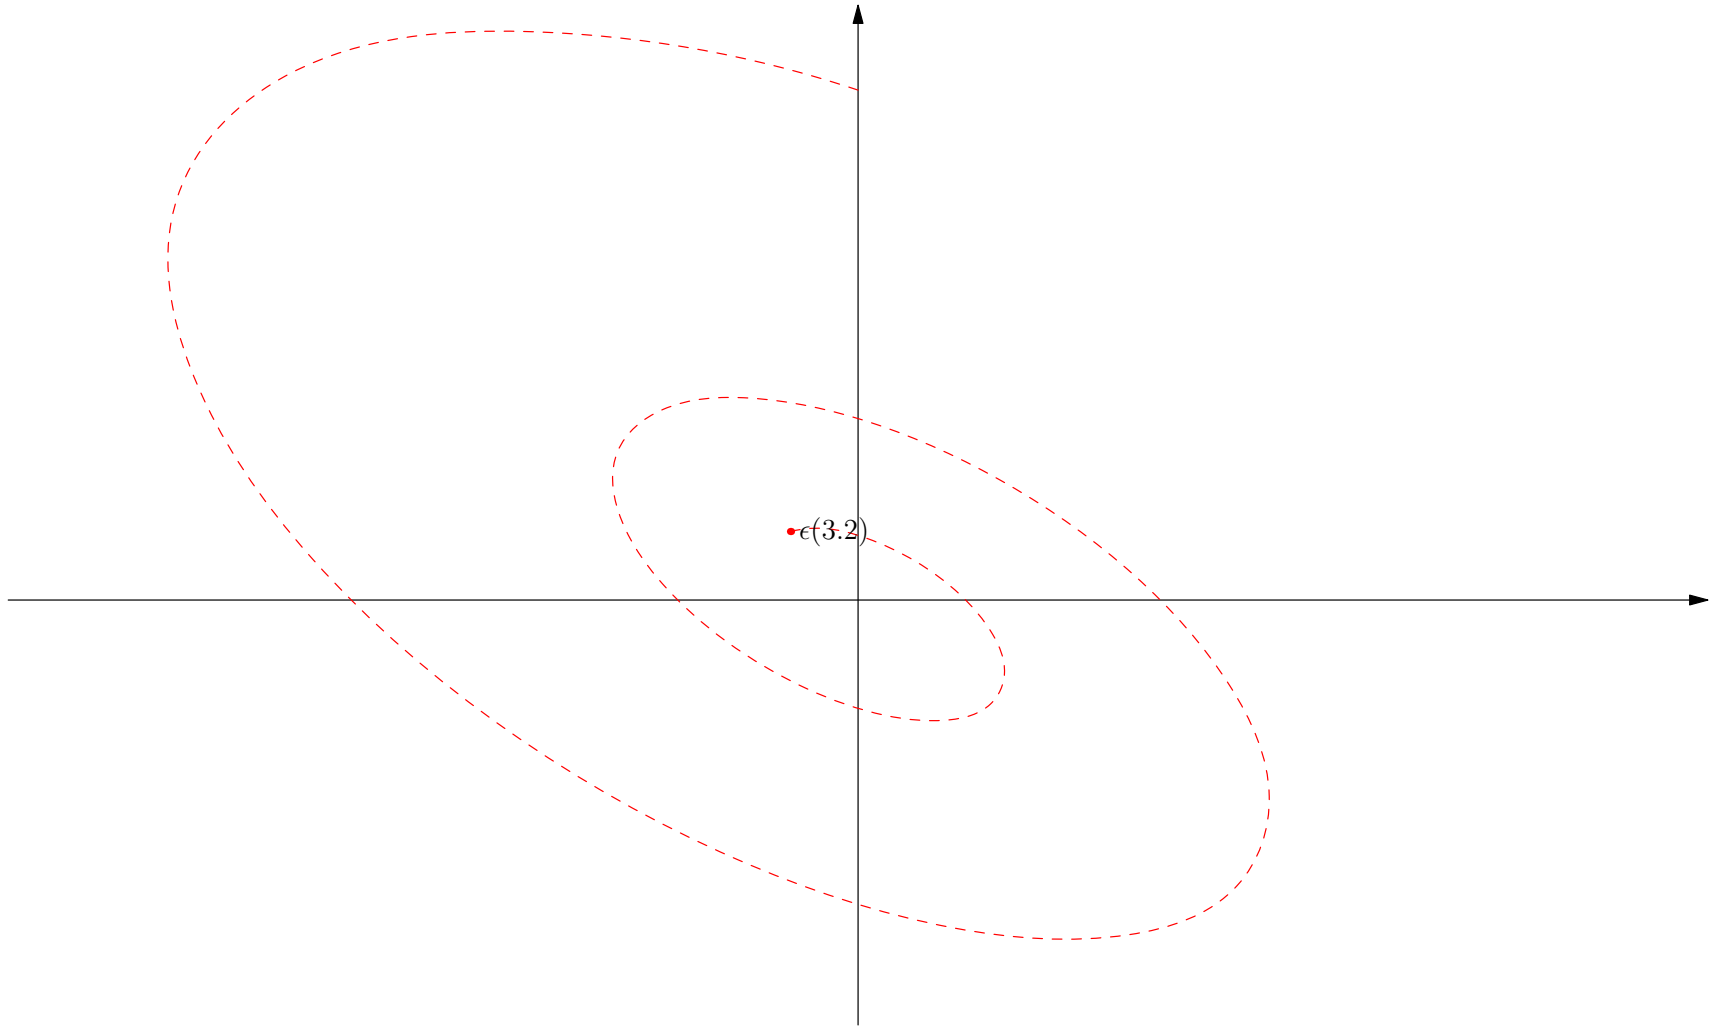


Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$

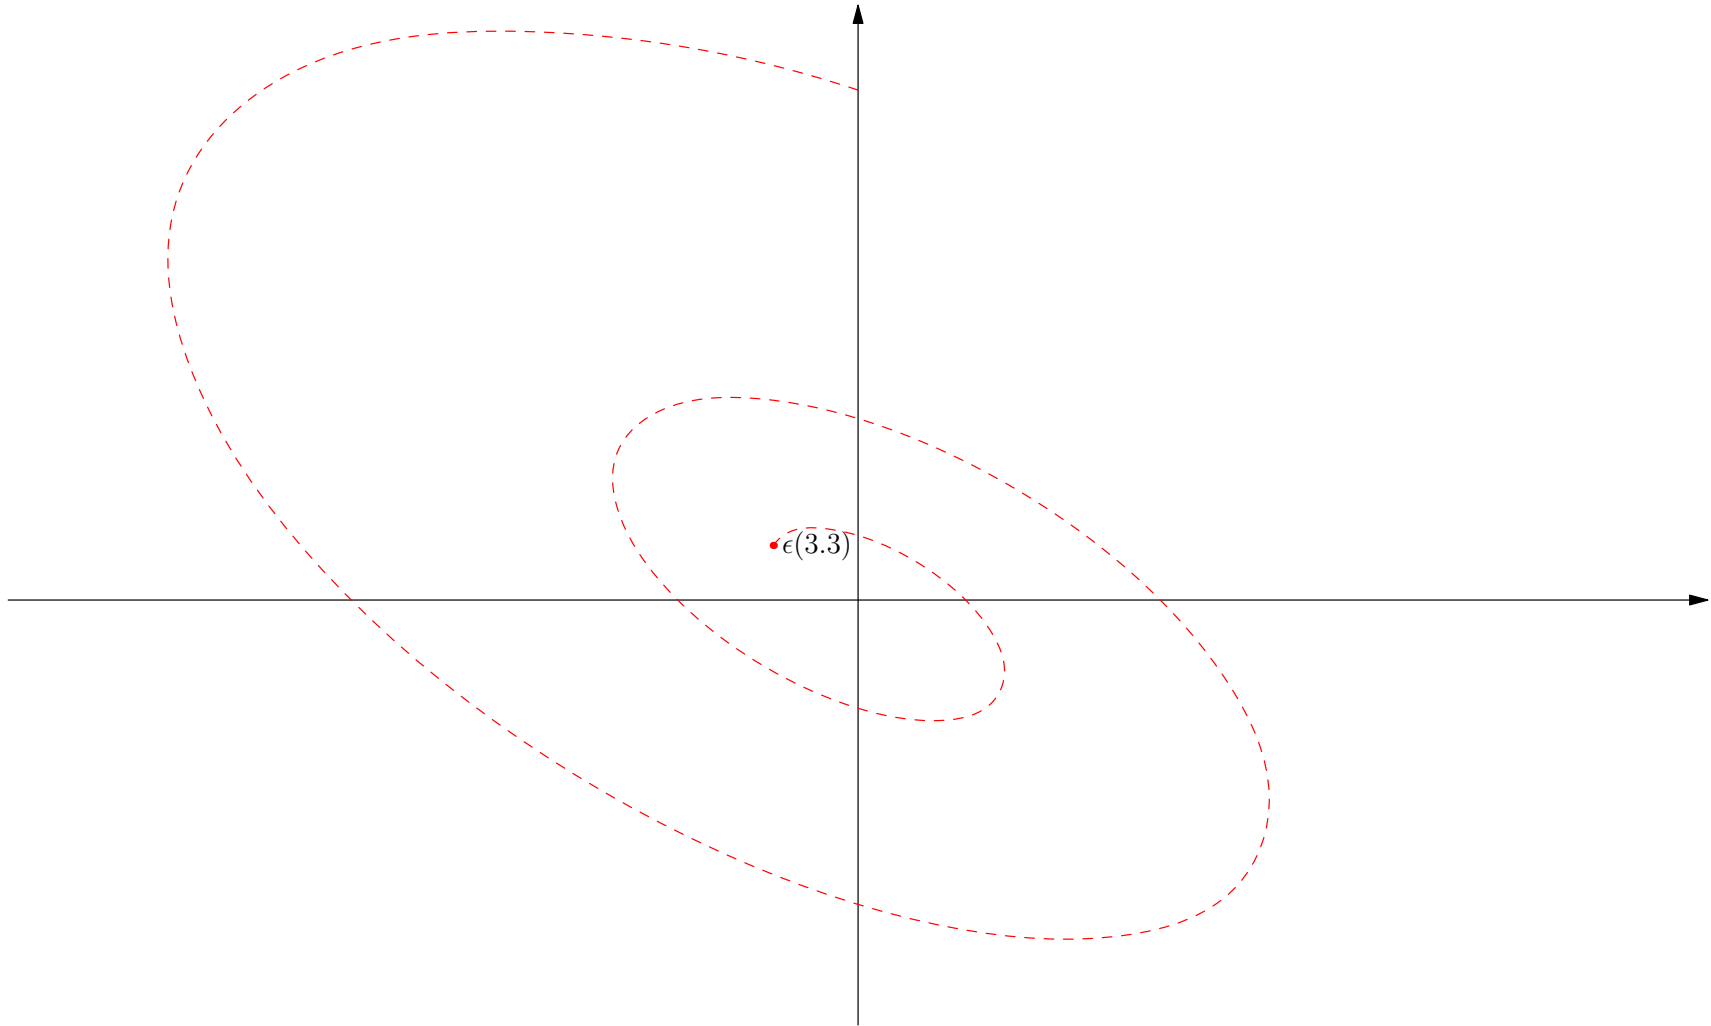


Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$

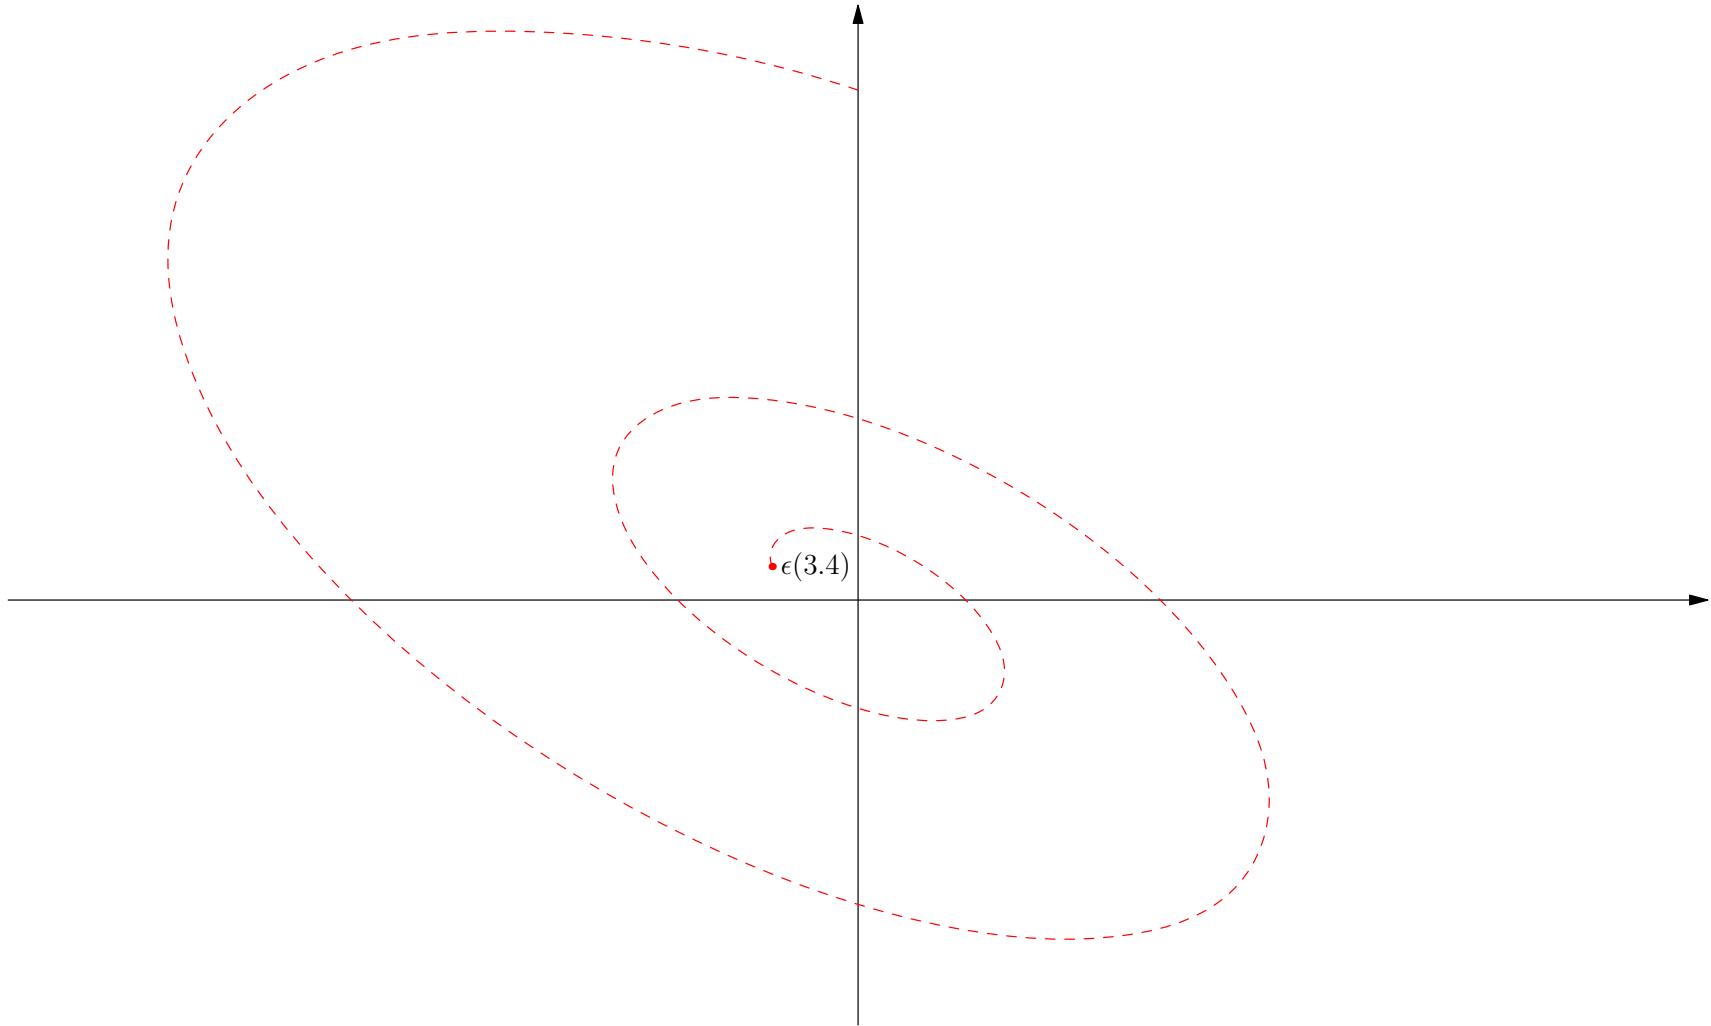


Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$

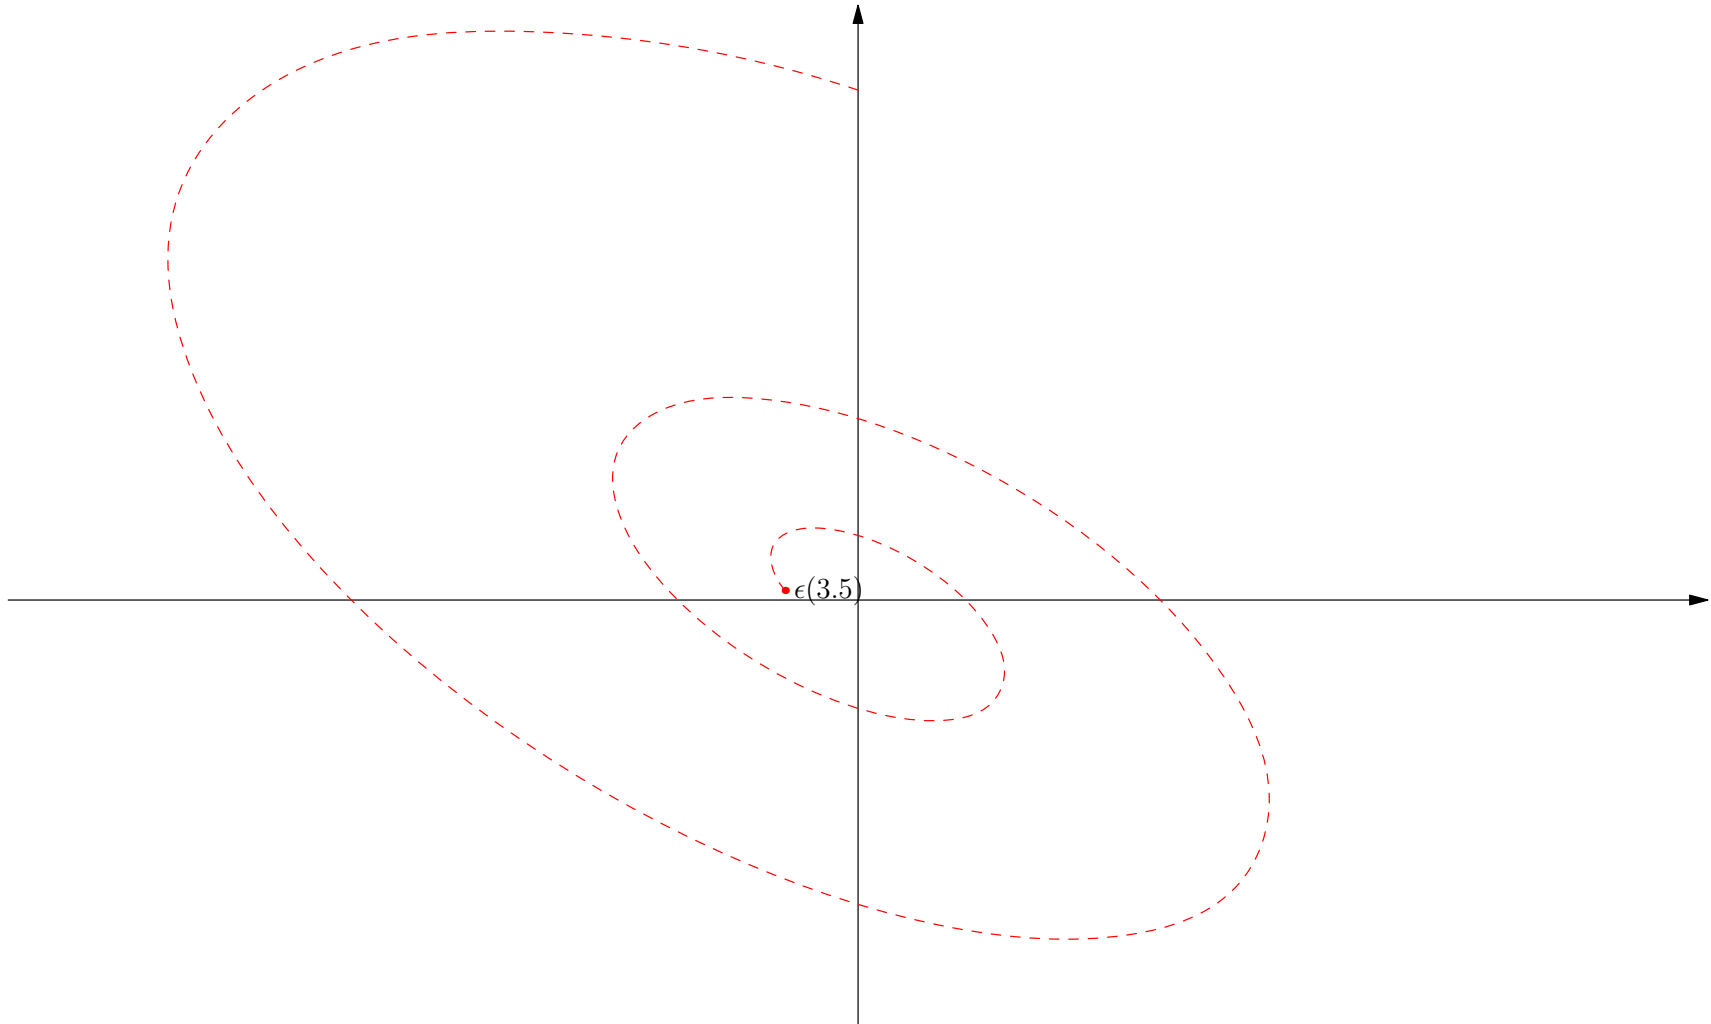


Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$

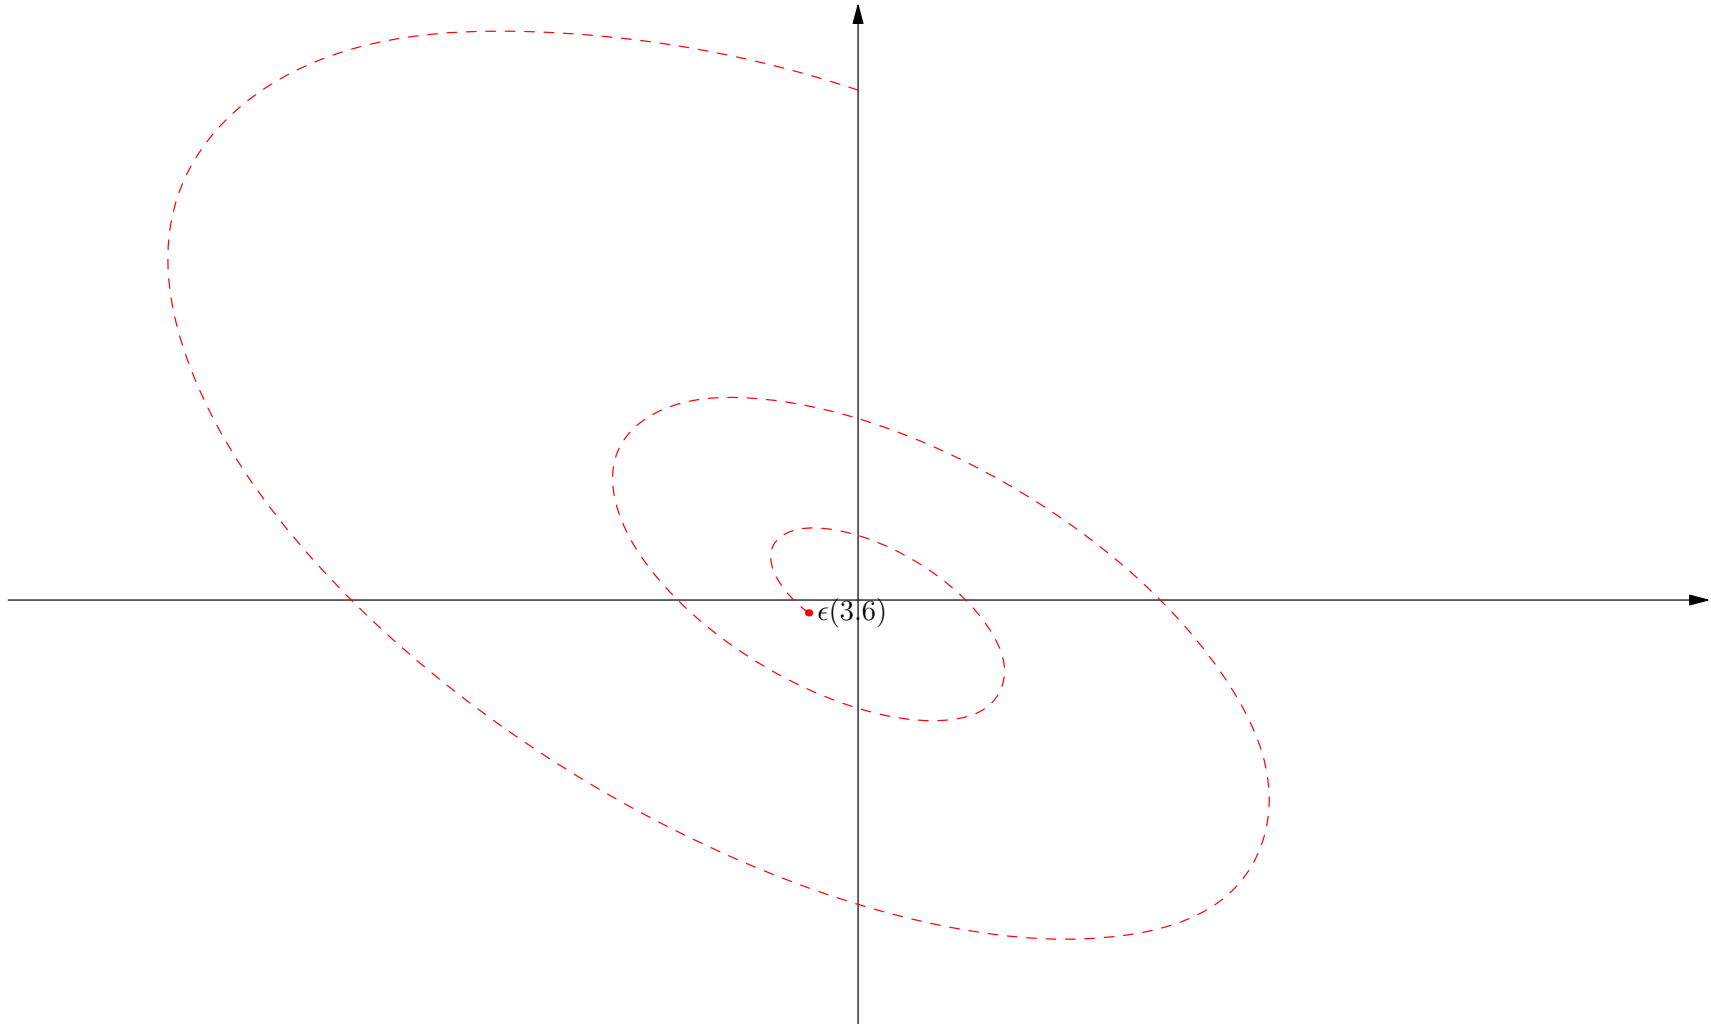


Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$

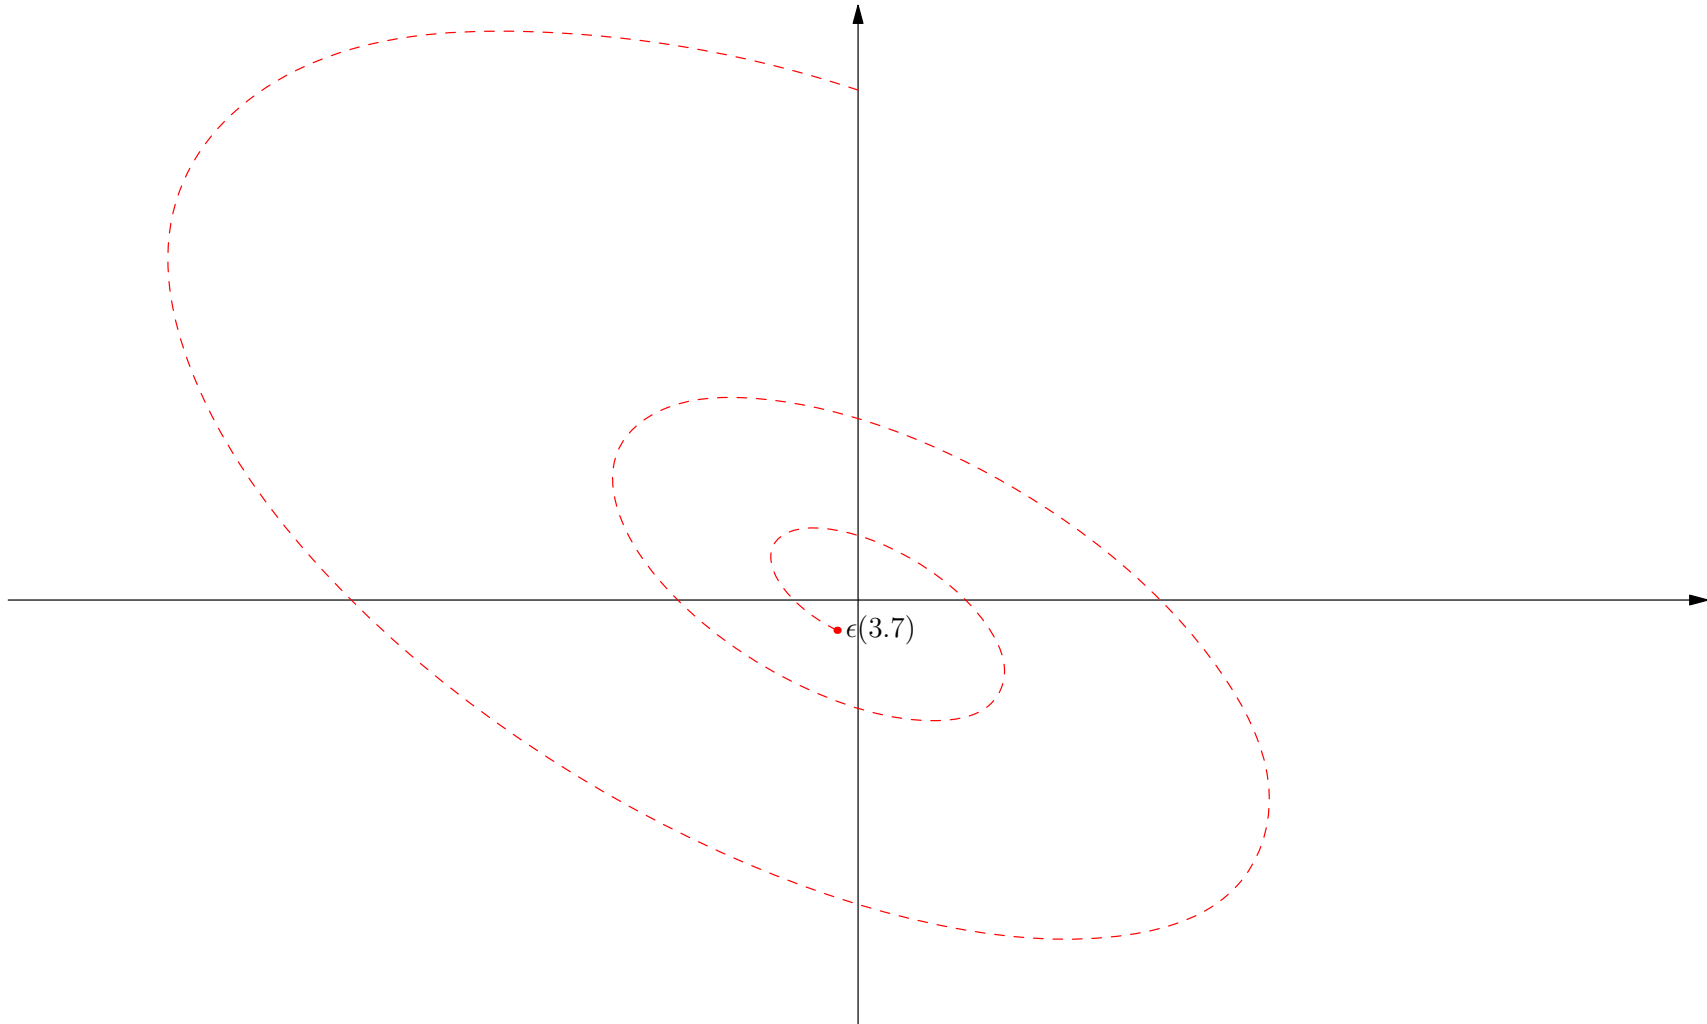


Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$

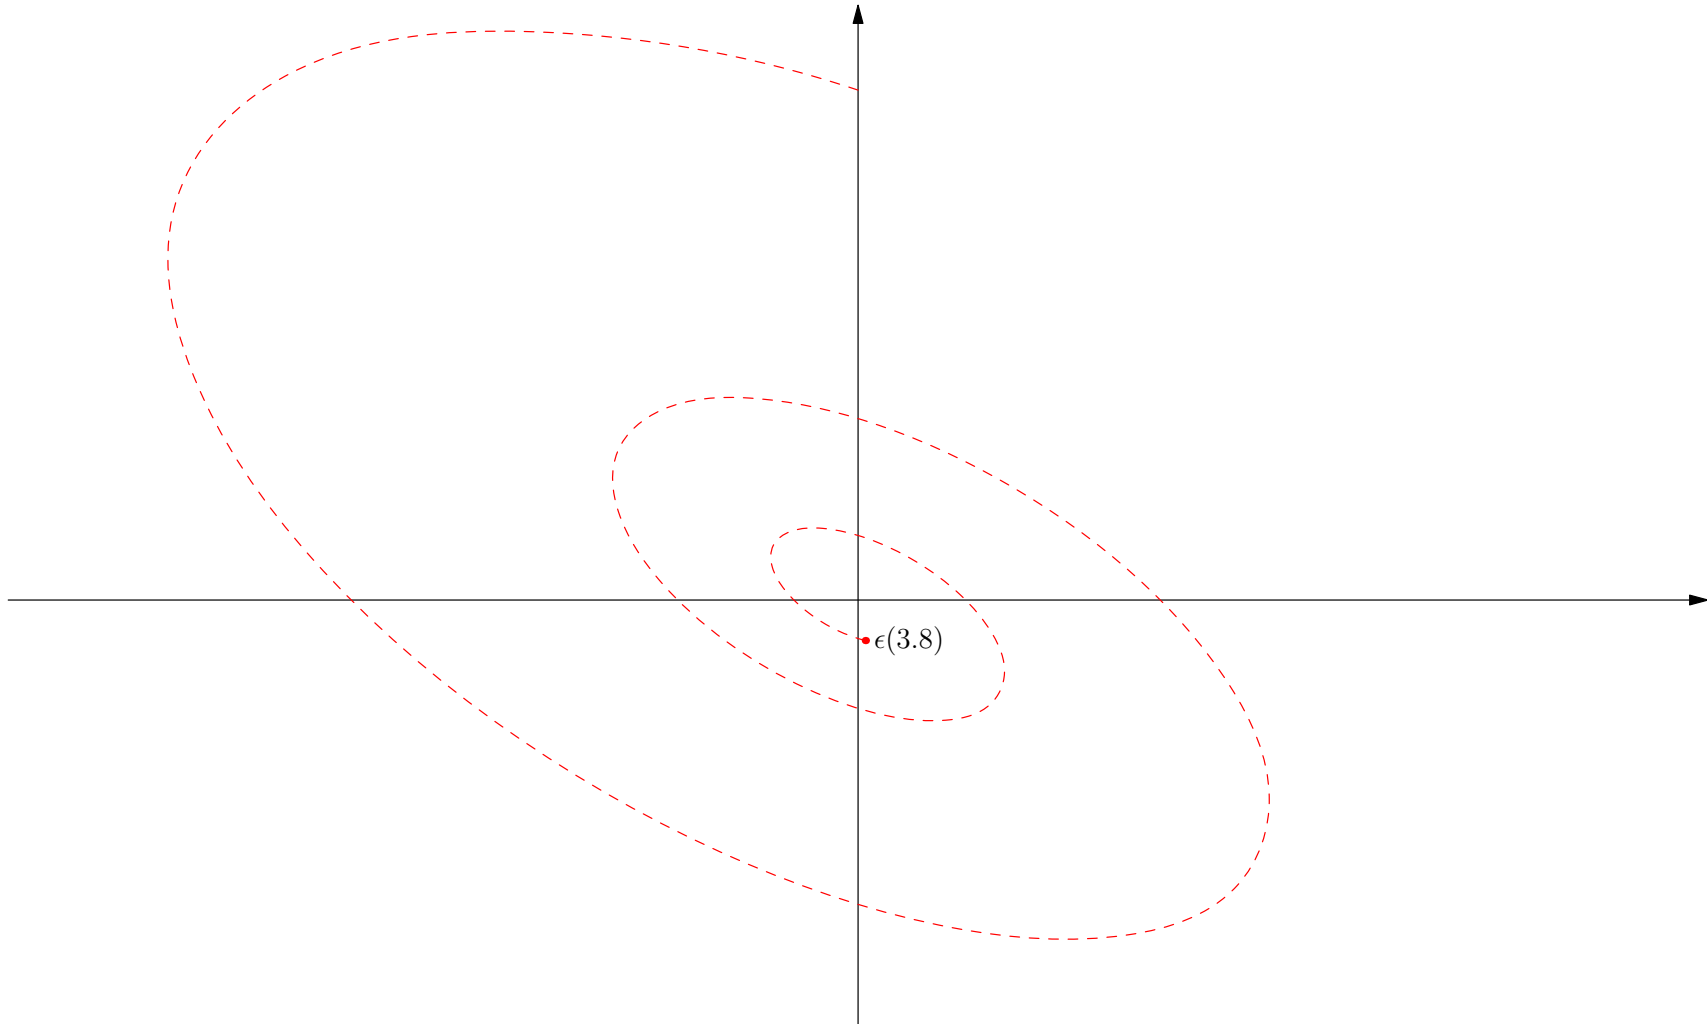


Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$

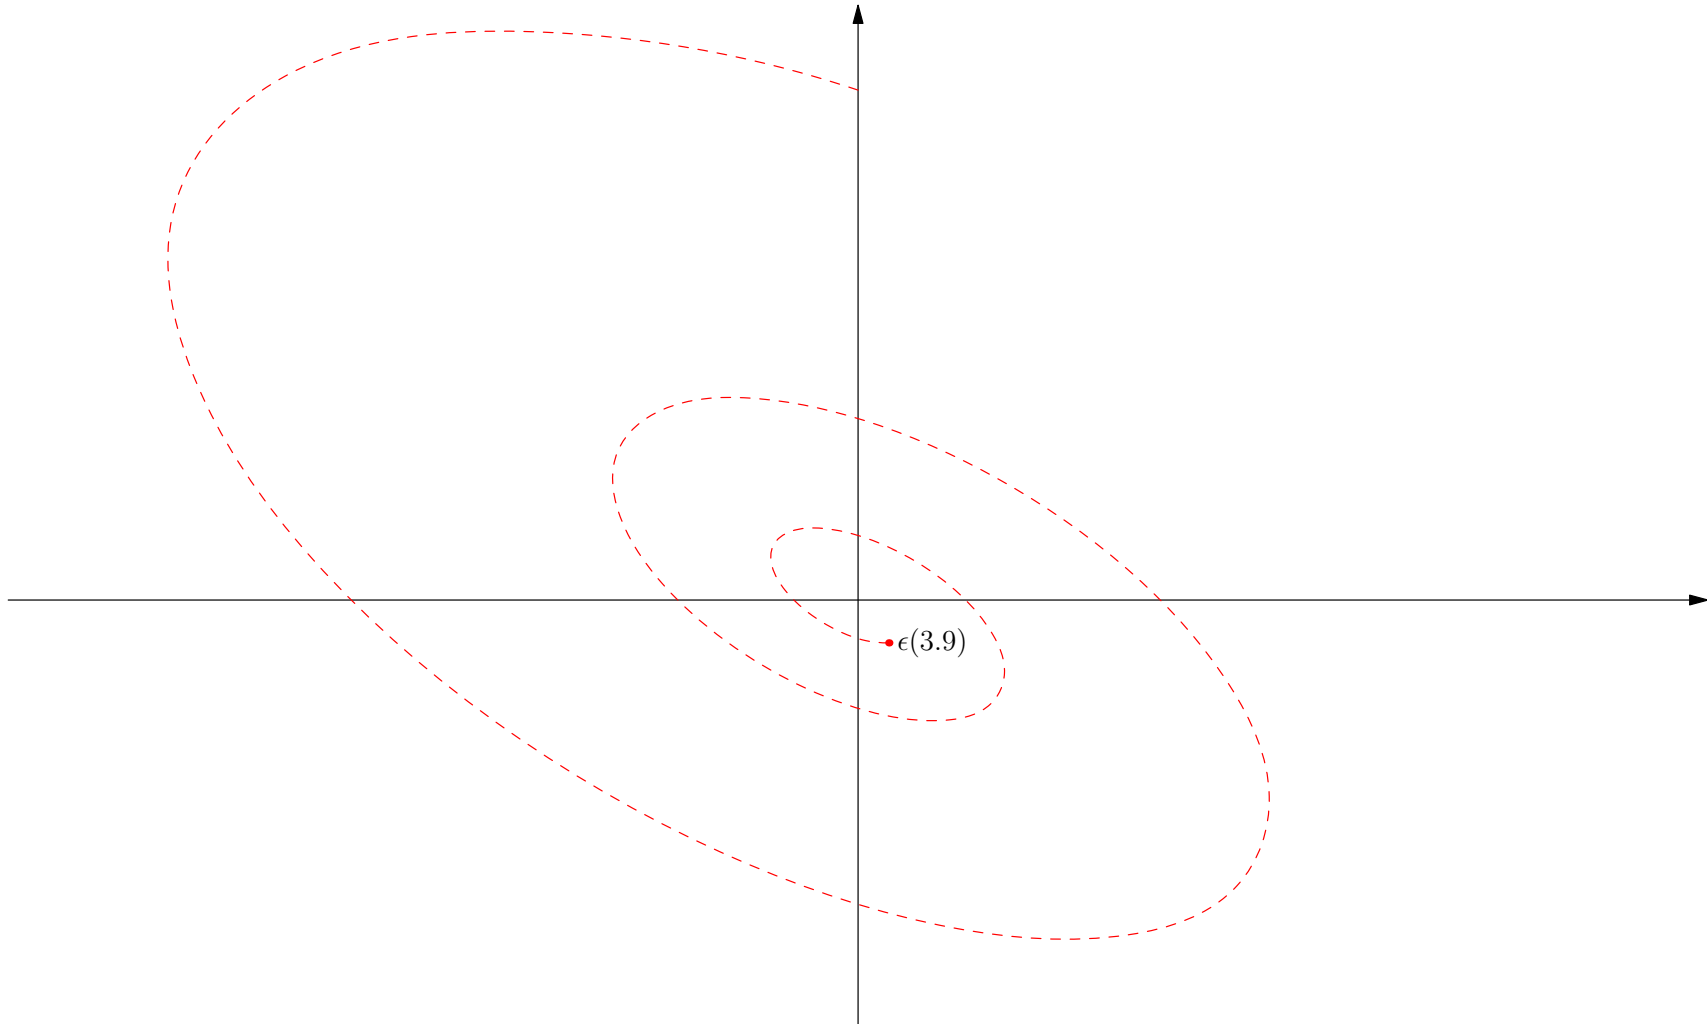


Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$

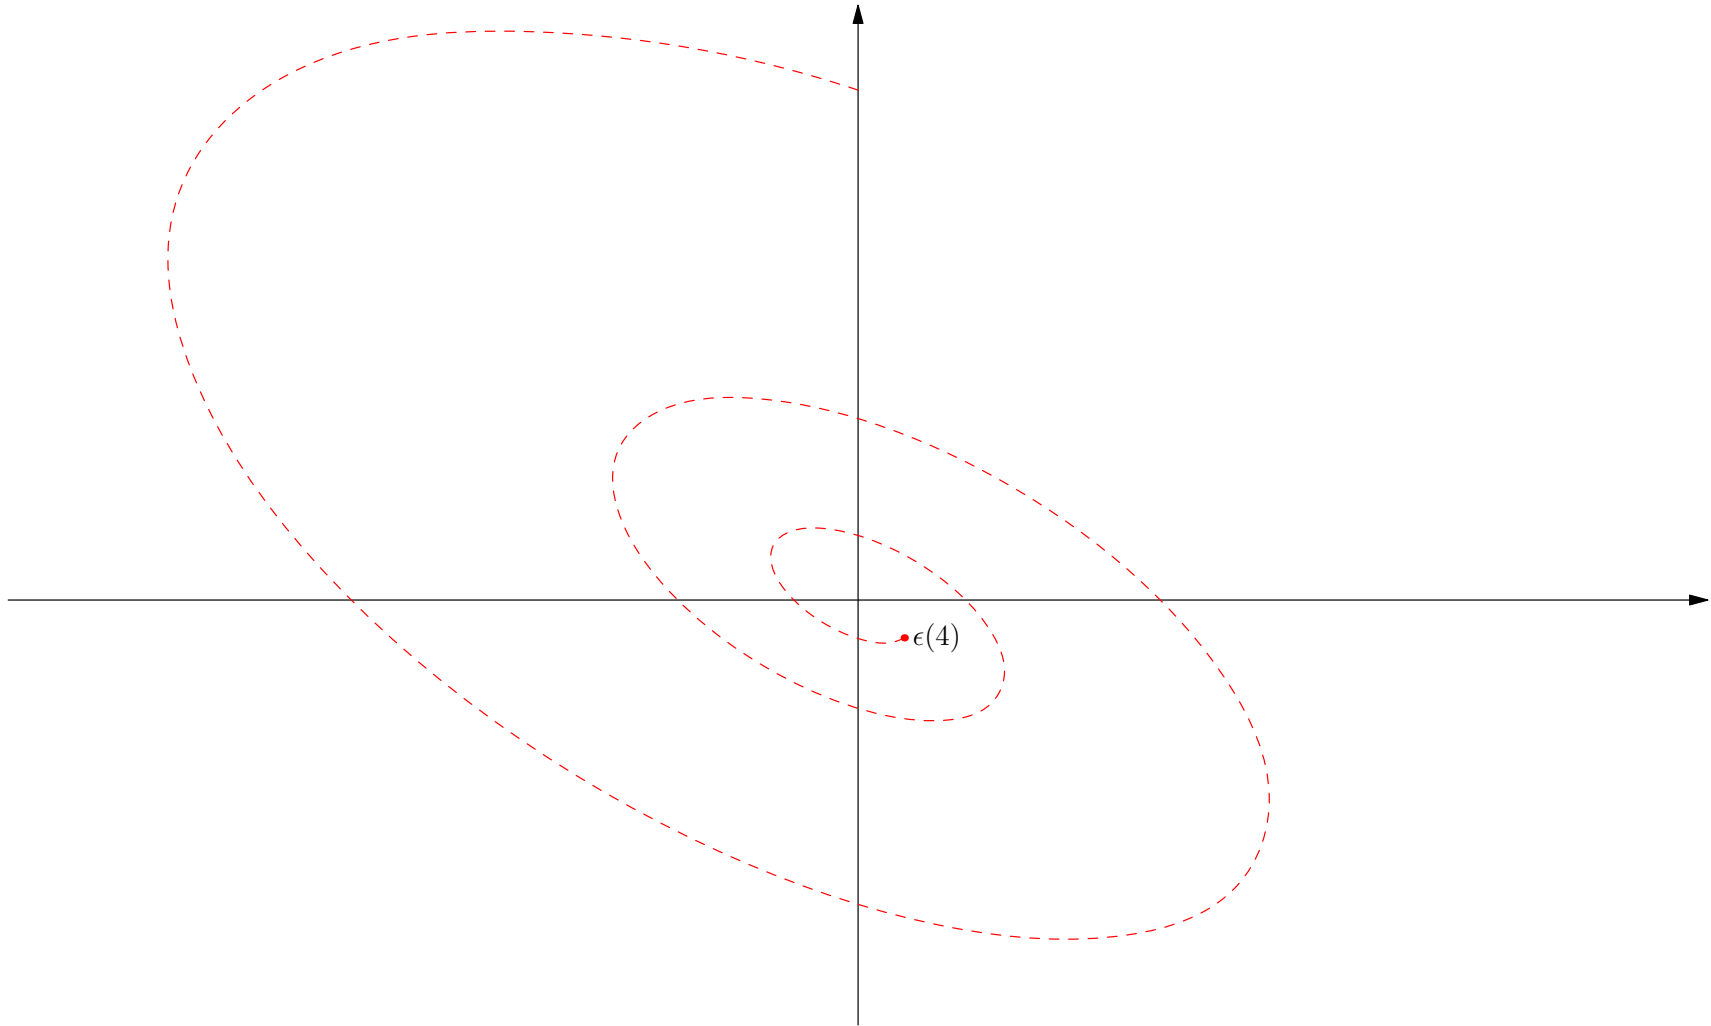


Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$

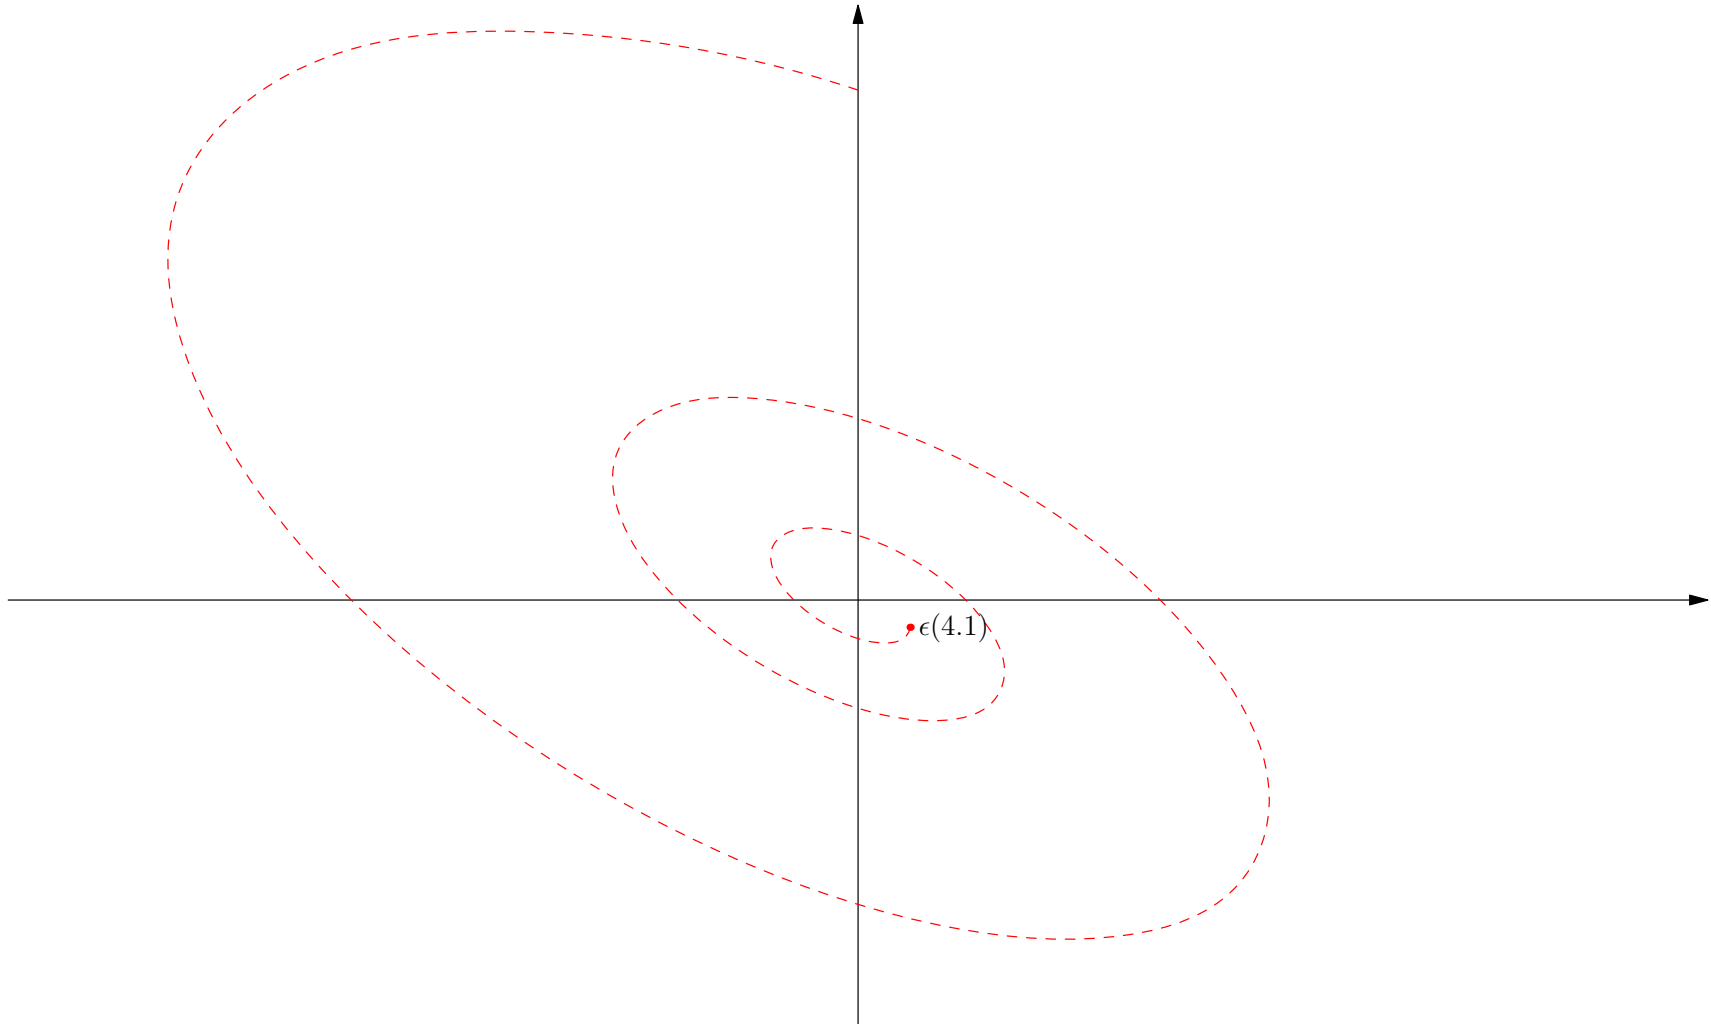


Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$

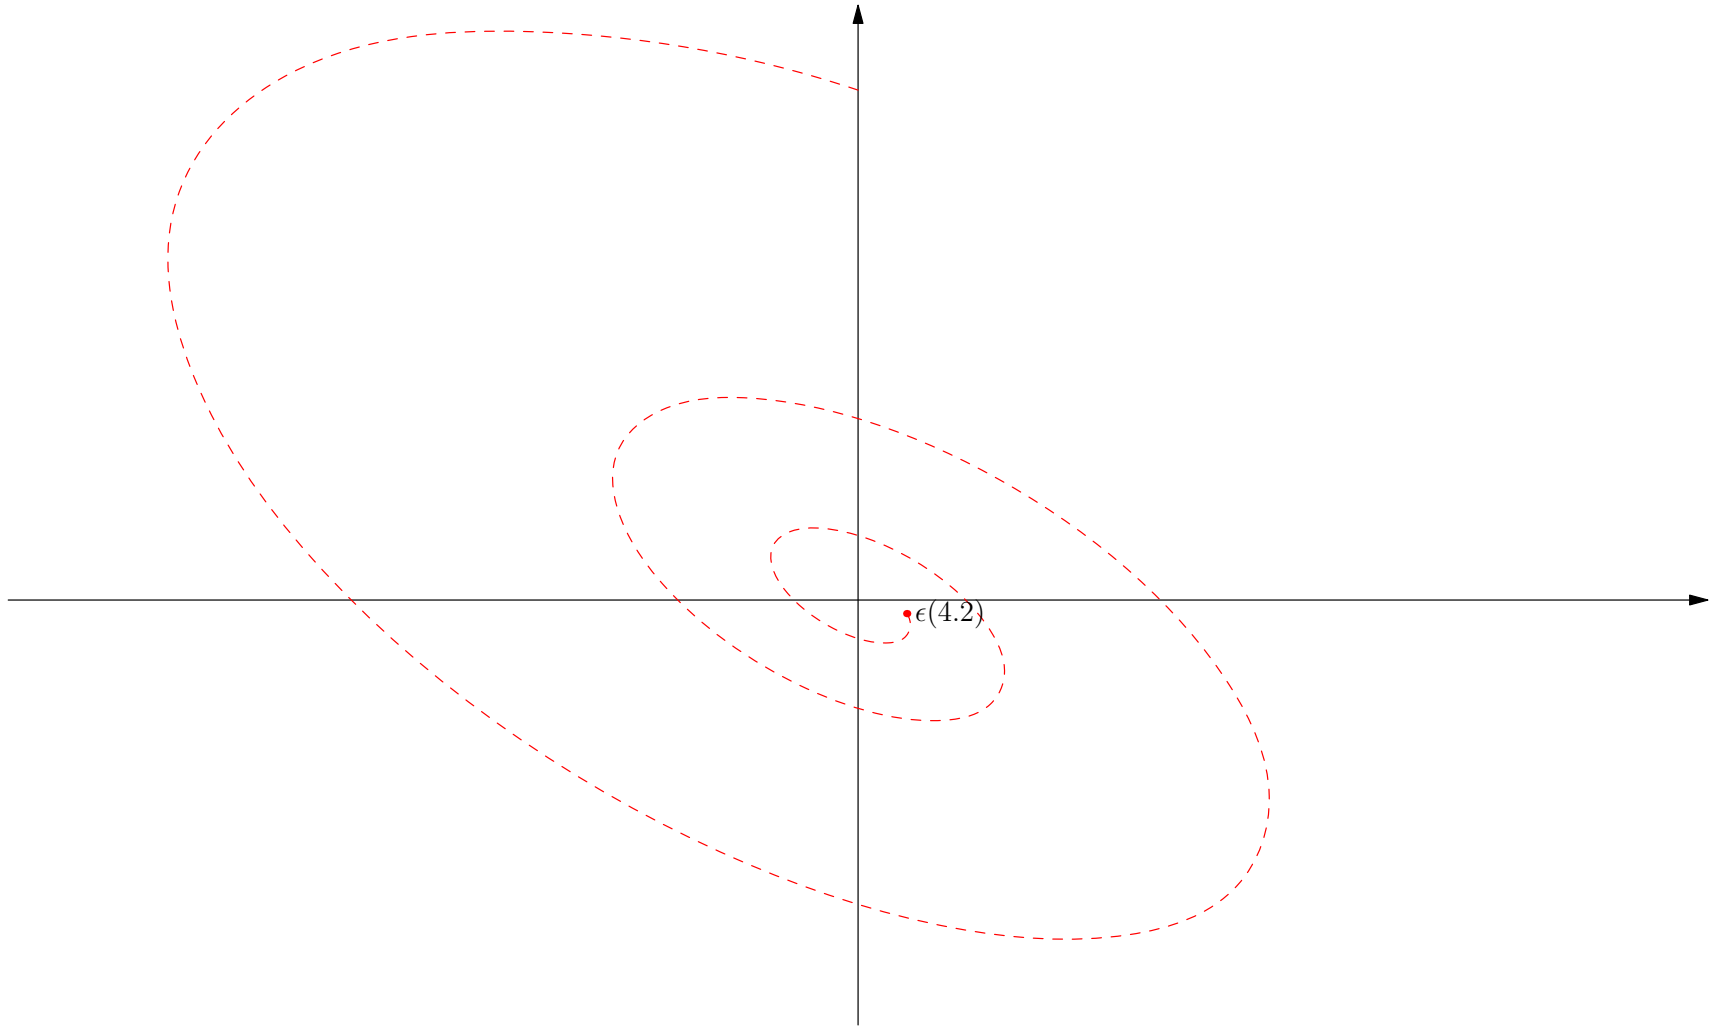


Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$

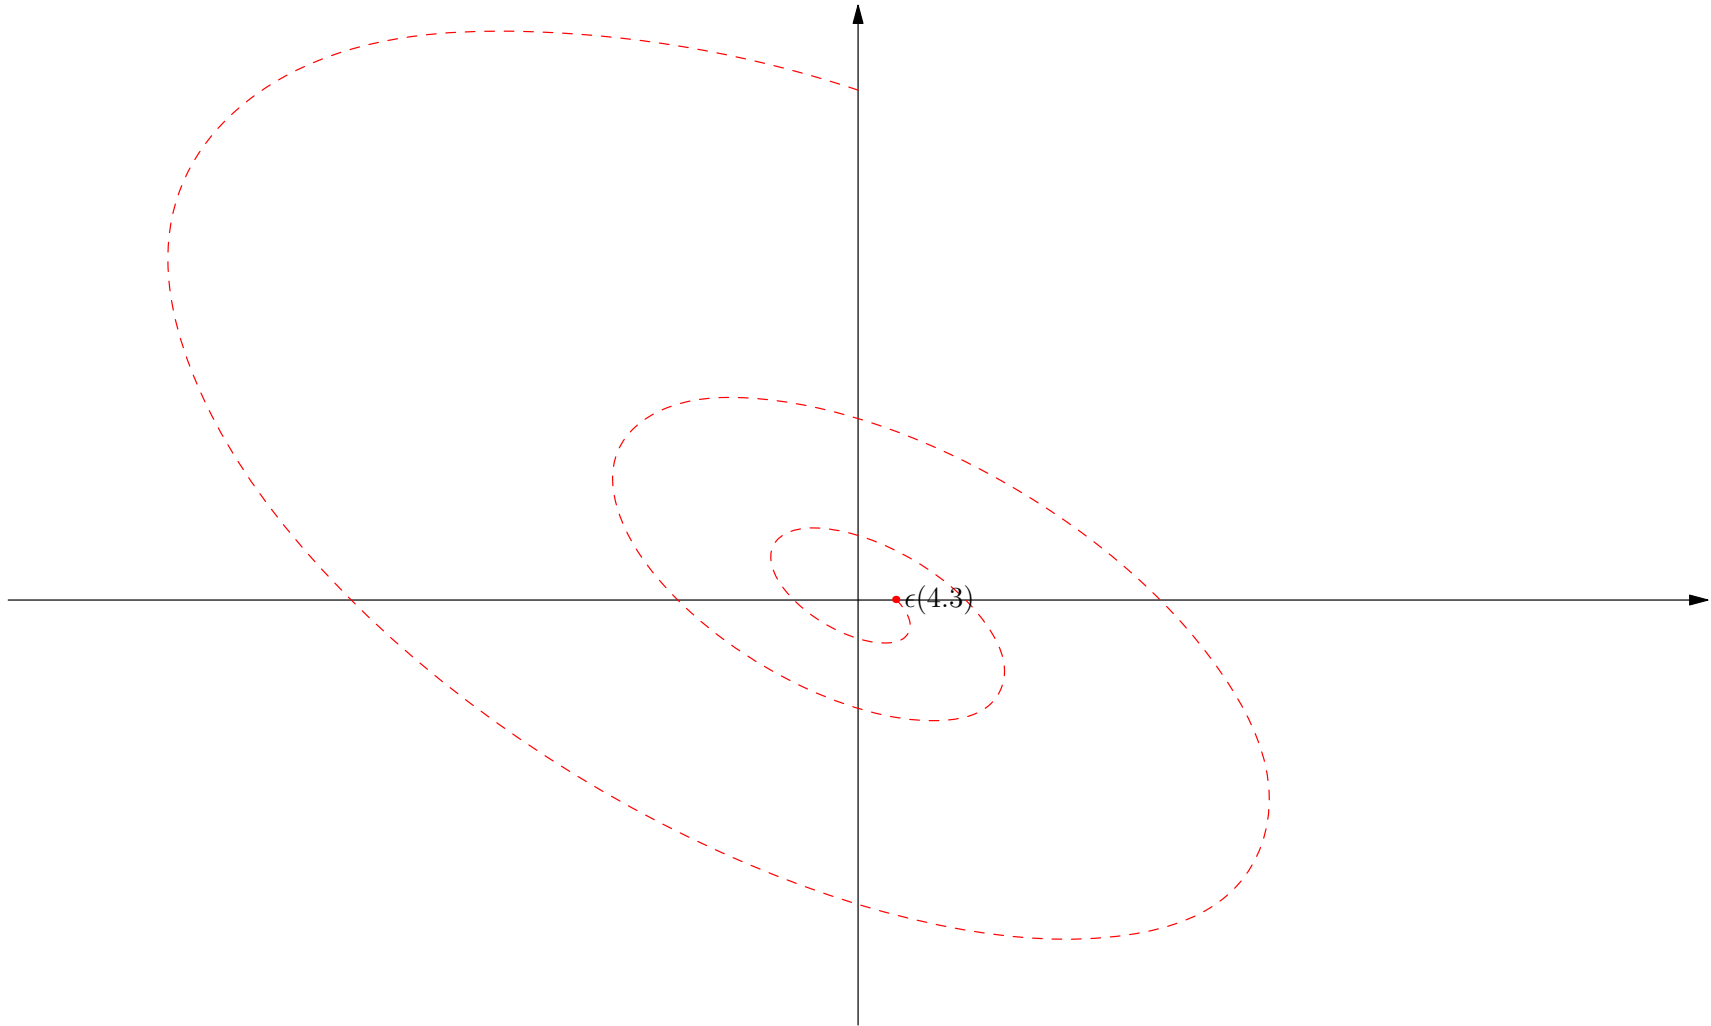


Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$

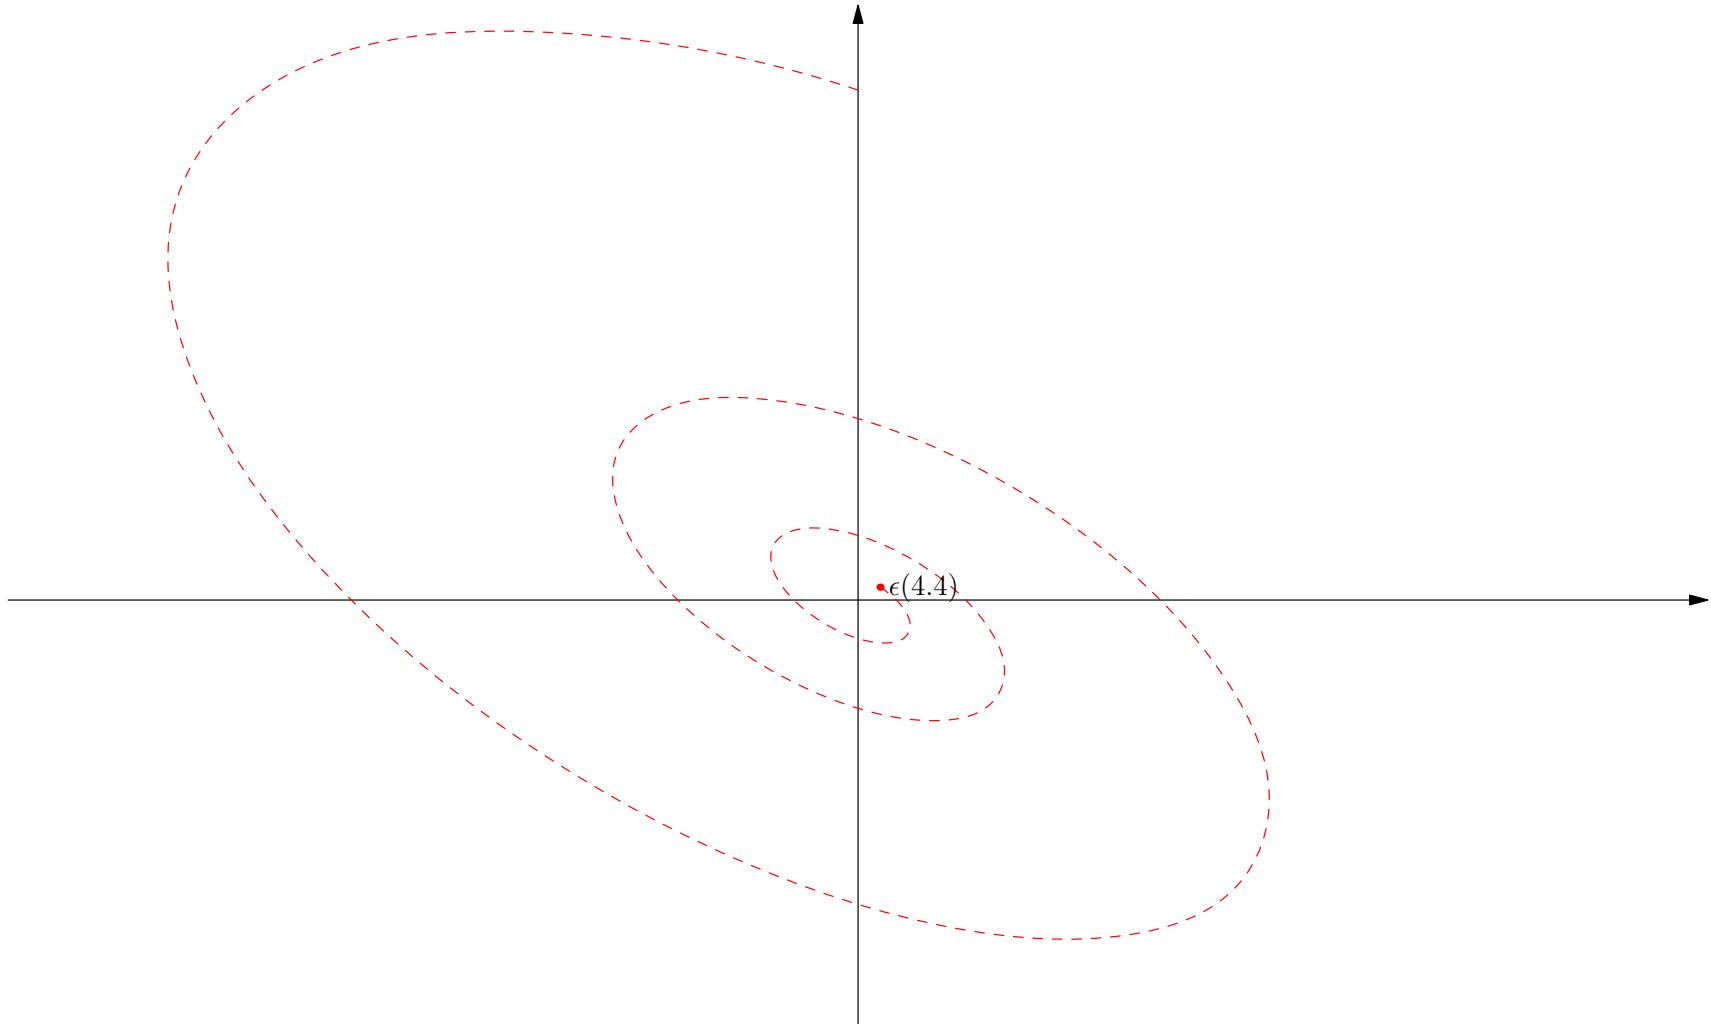


Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$

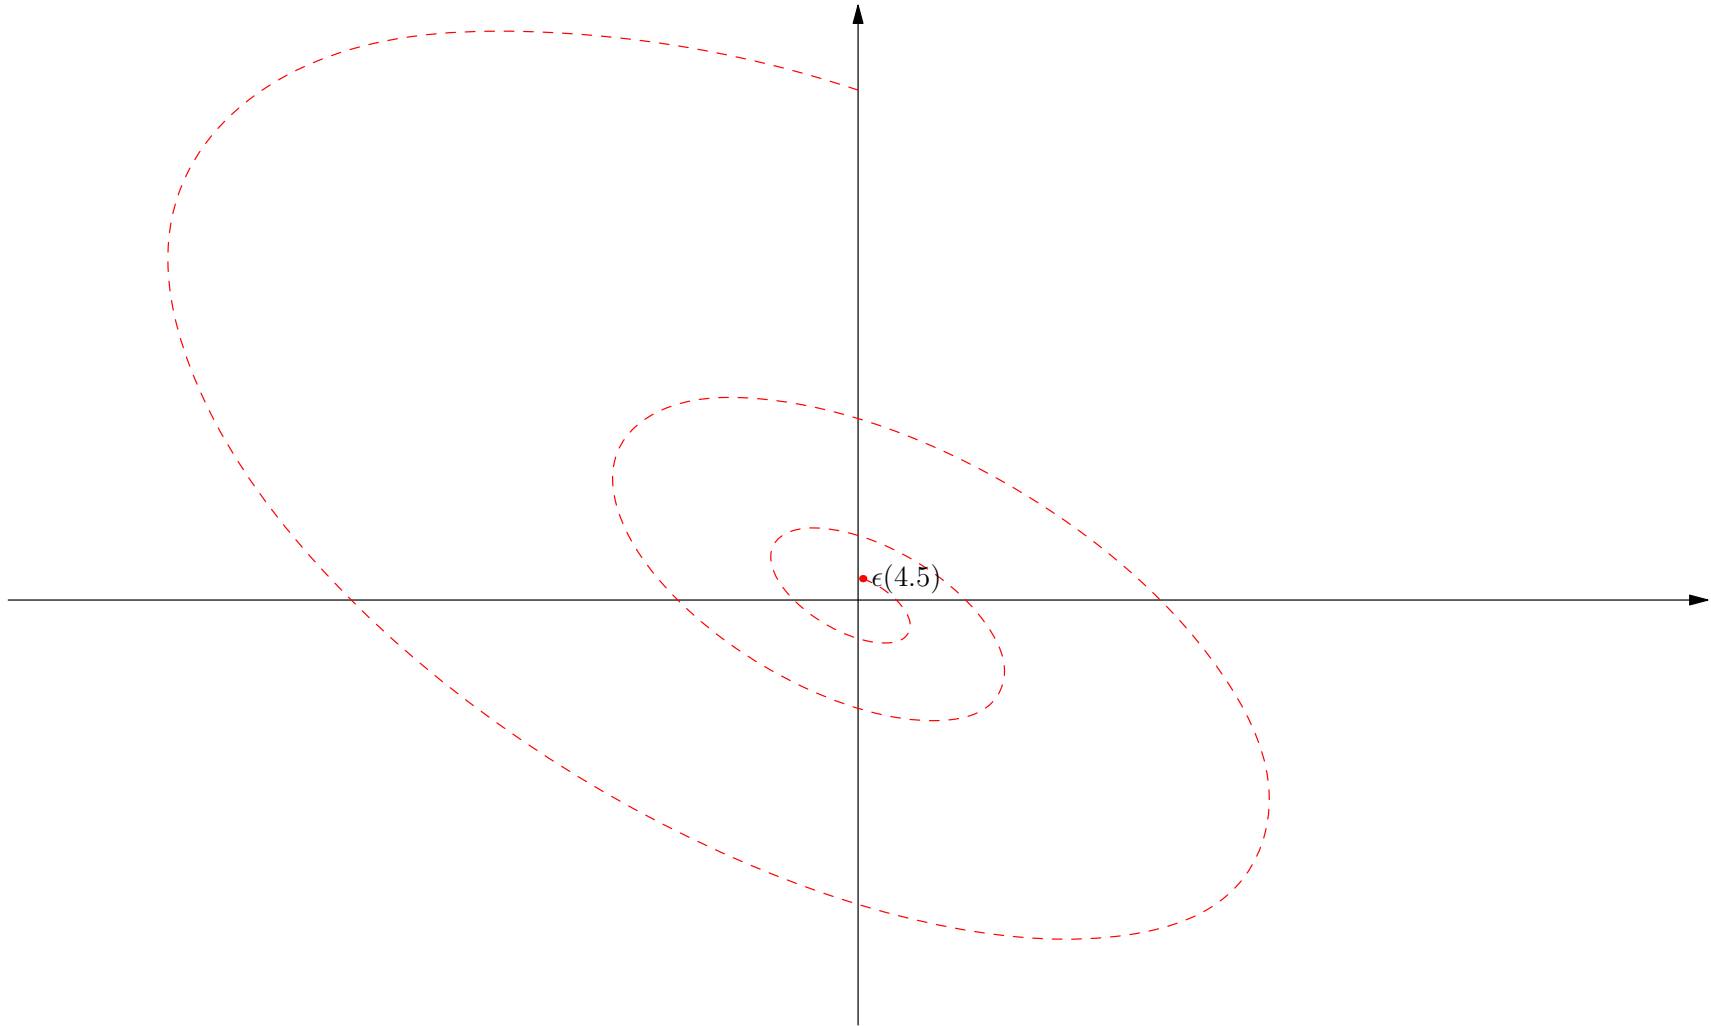


Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$

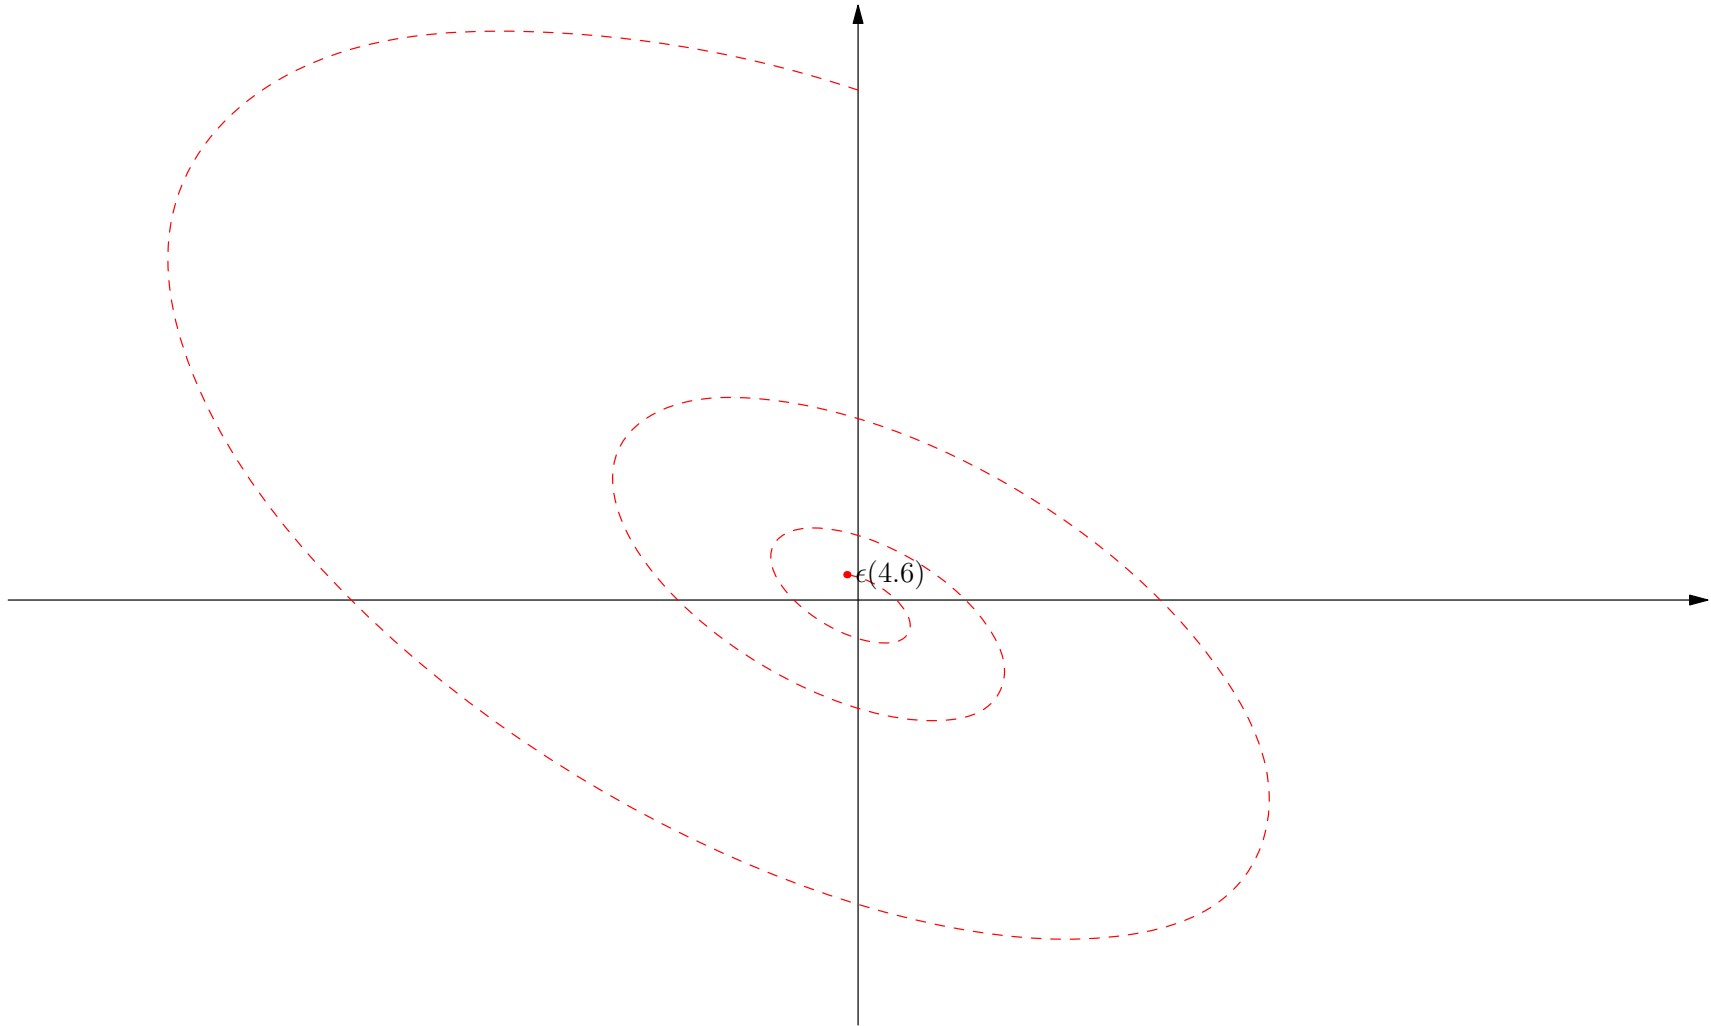


Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$

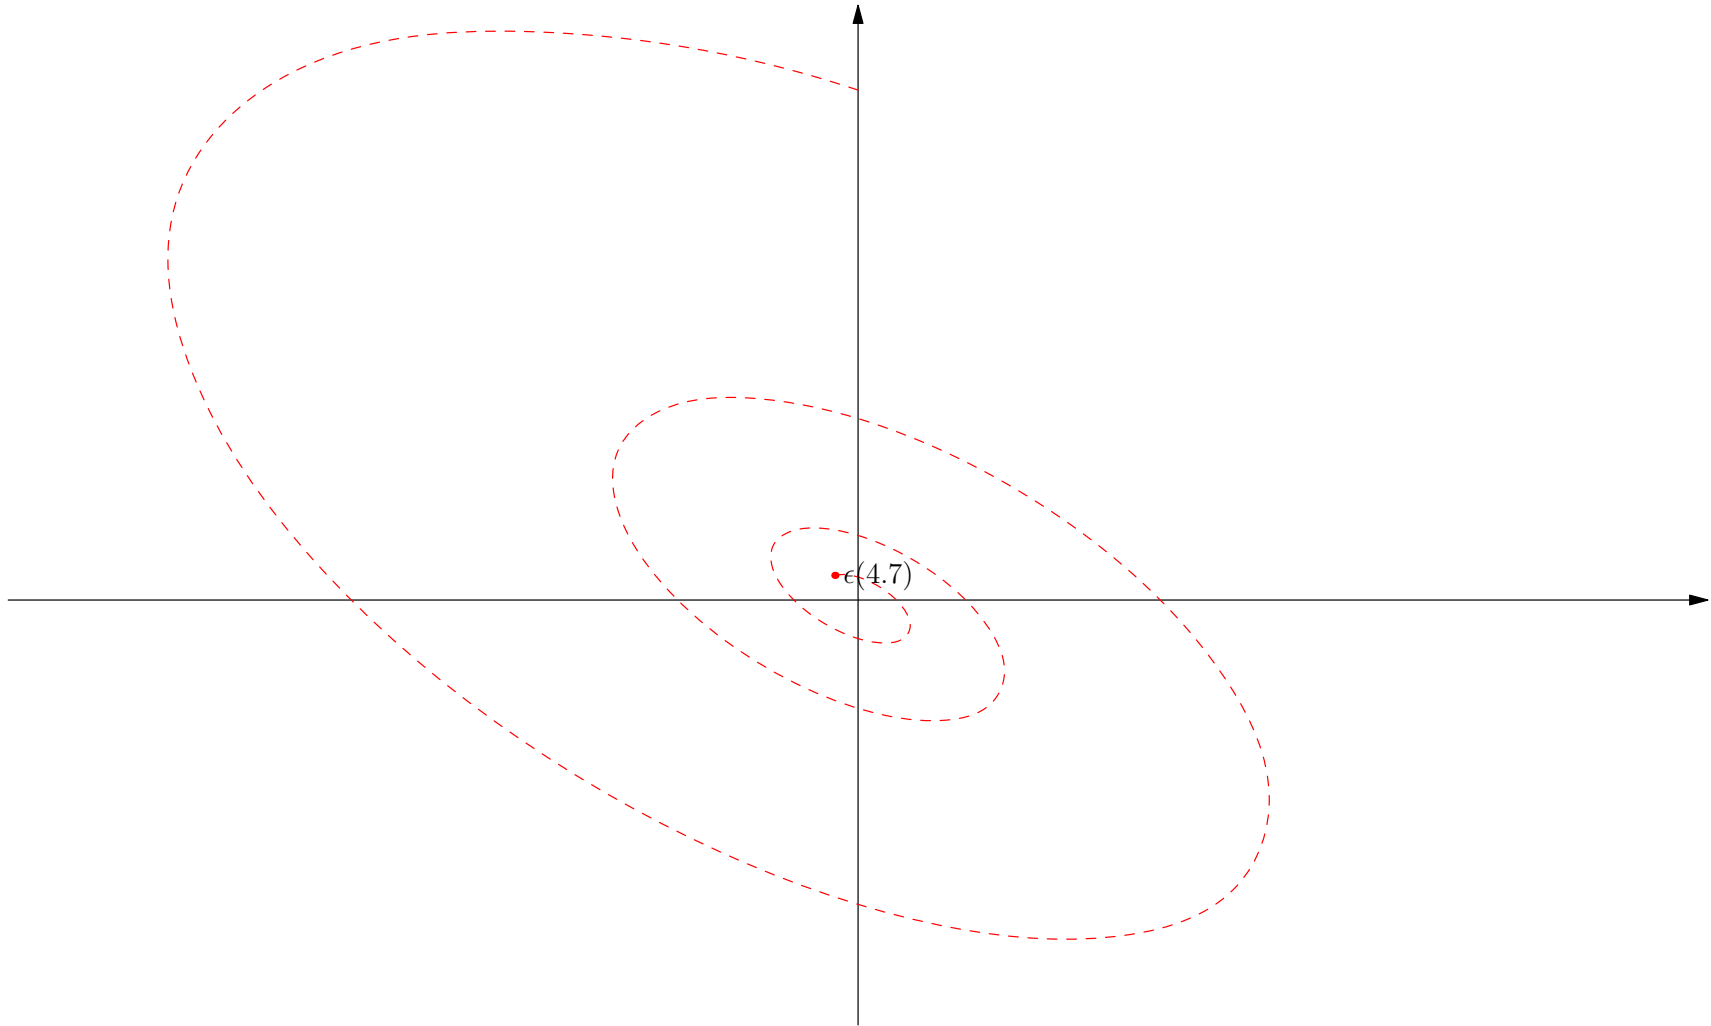


Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$

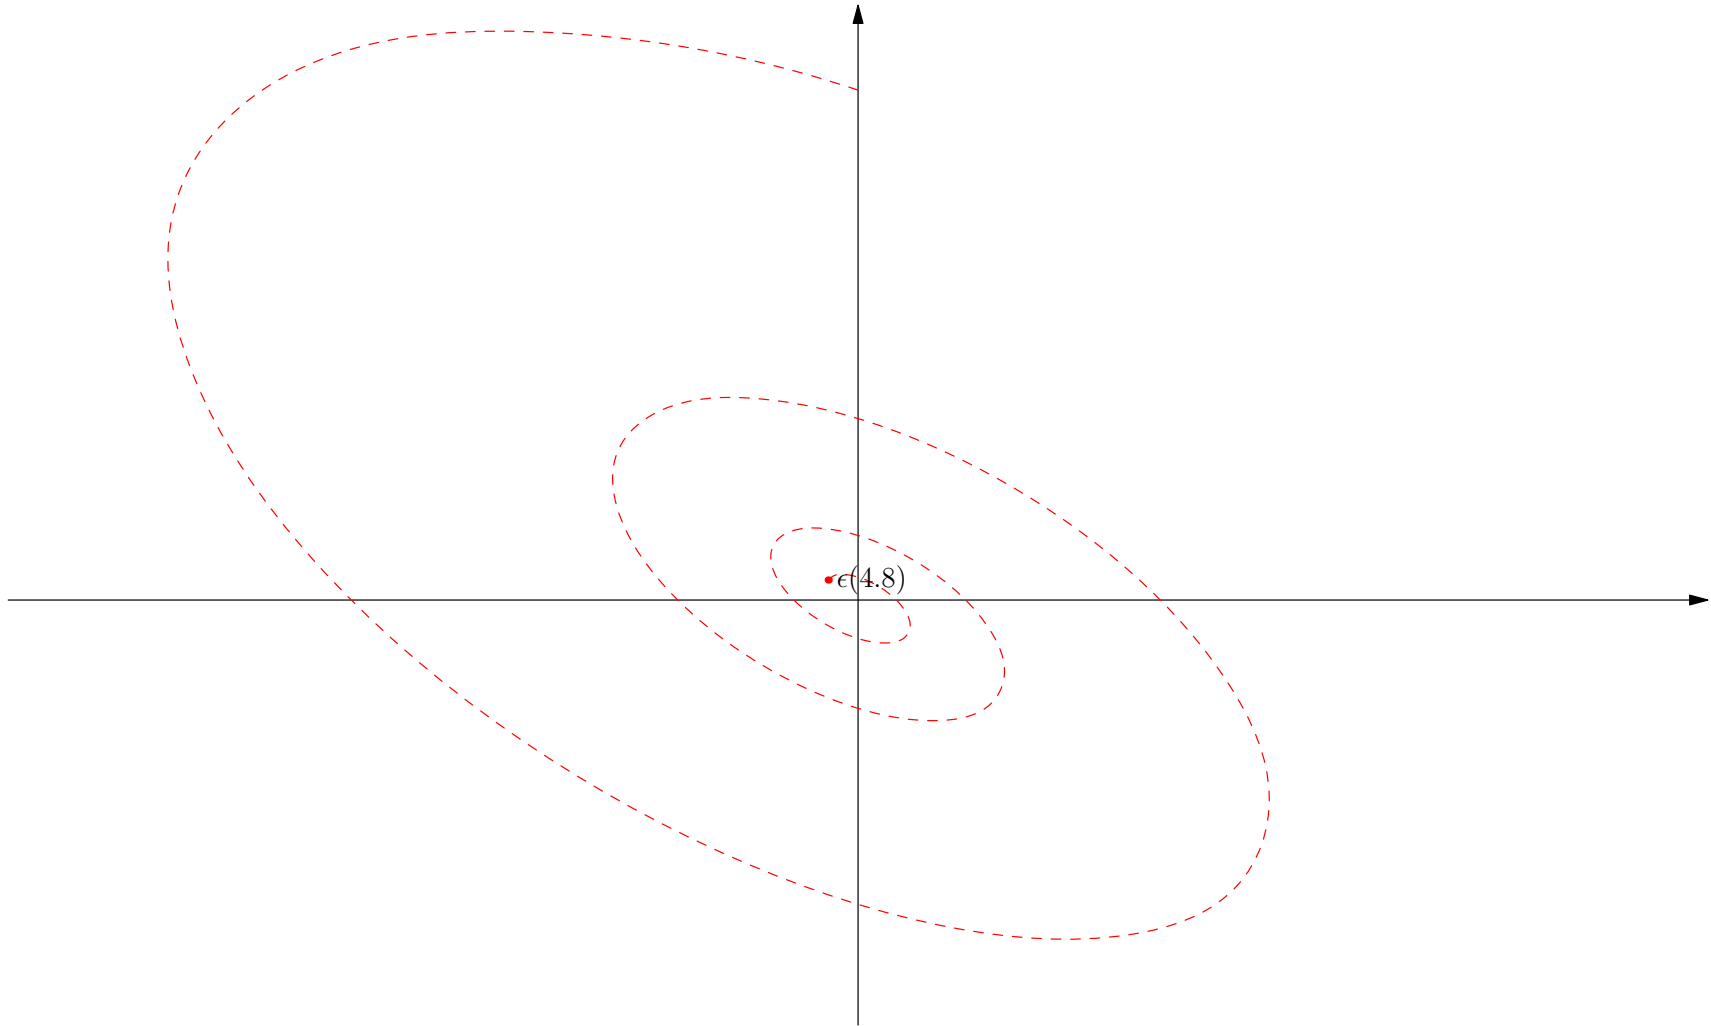


Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$

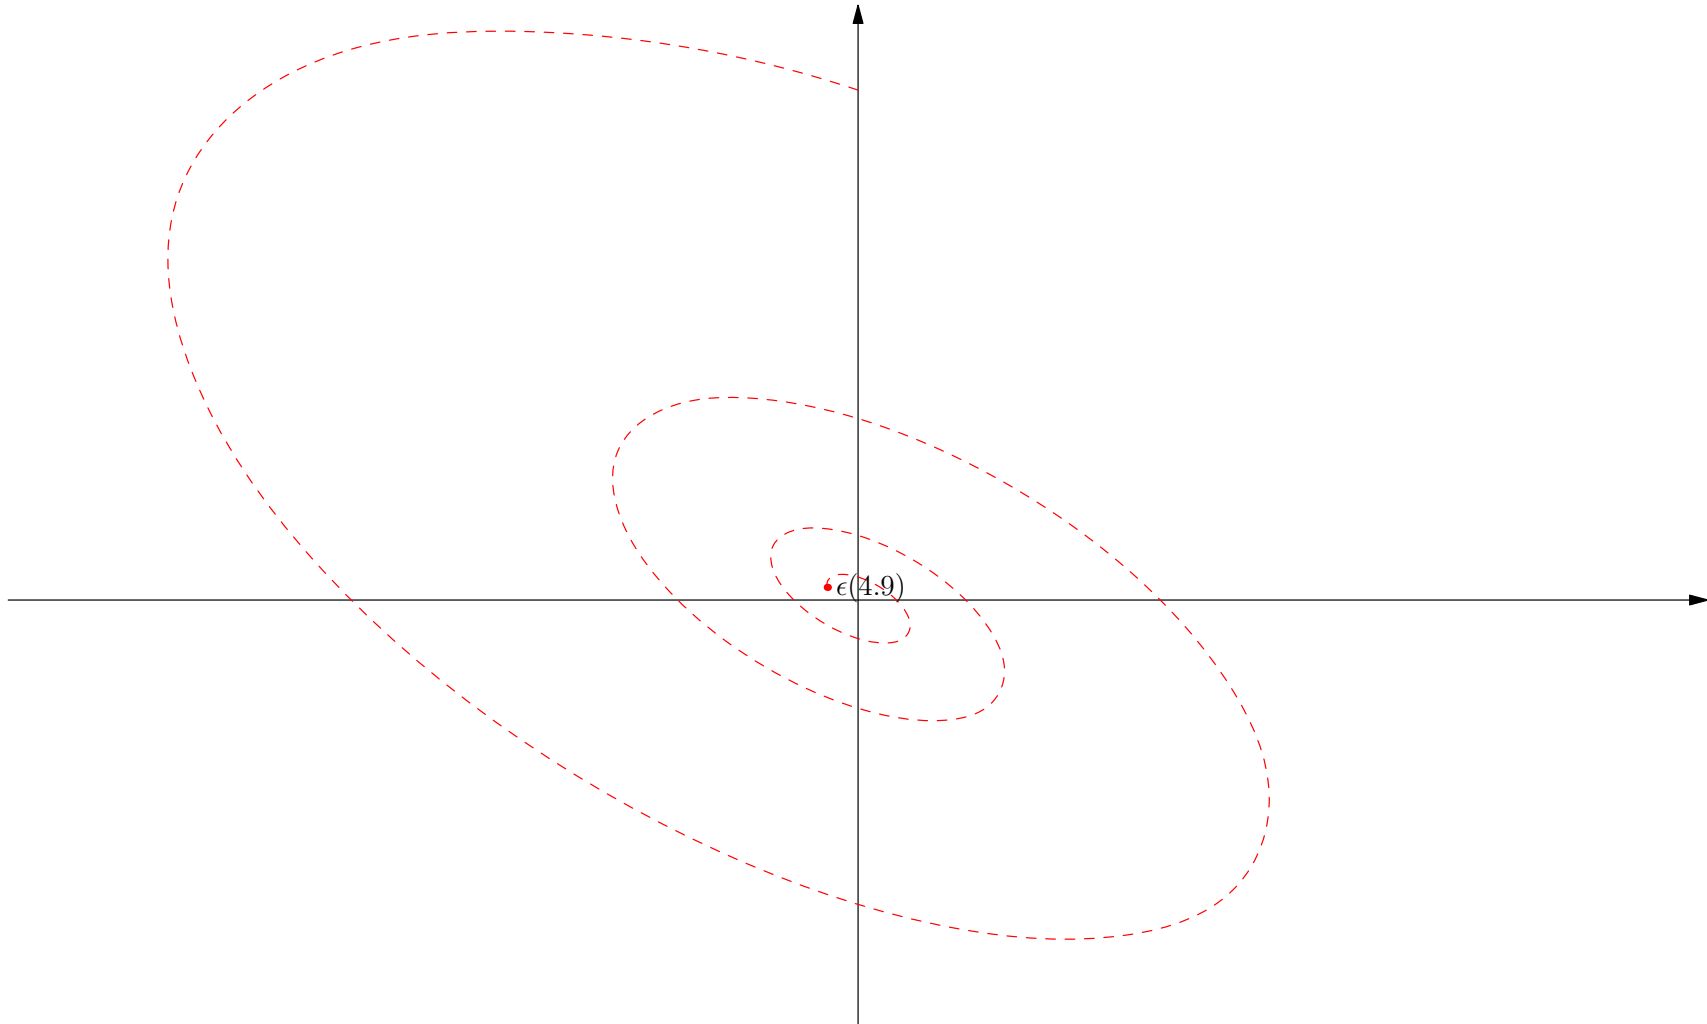

Dynamics

$$\mathbf{J} = \begin{pmatrix} \frac{-89}{25} & \frac{-640}{89} \\ \frac{89}{25} & \frac{195}{89} \end{pmatrix} = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^{-1} = \begin{pmatrix} 0.818 & 0.818 \\ -0.327 - 0.473i & -0.327 + 0.473i \end{pmatrix} \begin{pmatrix} -0.685 + 4.163i & 0 \\ 0 & -0.685 - 4.163i \end{pmatrix} \begin{pmatrix} 0.611 + 0.422i & 1.056i \\ 0.611 - 0.422i & -1.056i \end{pmatrix}$$

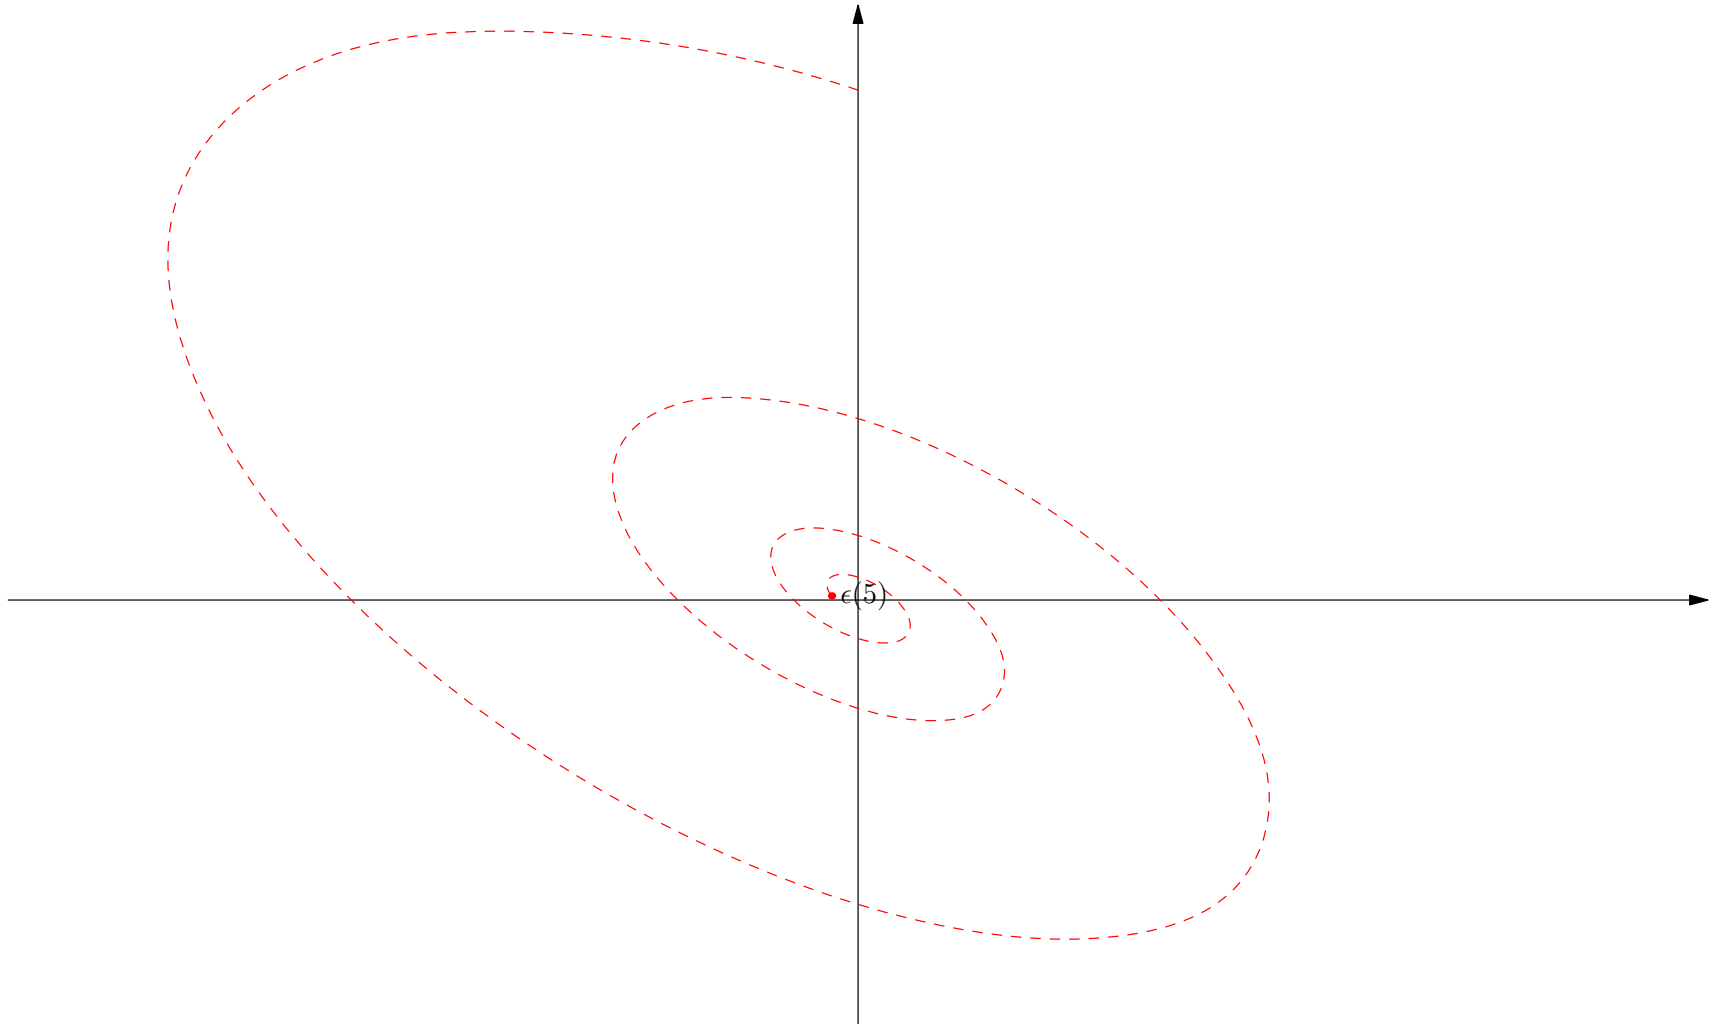

Incidentally. . .

- A property of traces ($\text{tr } \mathbf{M} = \sum_i M_{ii}$) is

$$\text{tr } \mathbf{A} \mathbf{B} = \sum_{i,j} A_{ij} B_{ji}$$

- Using $\mathbf{J} = \mathbf{V} \mathbf{\Lambda} \mathbf{V}^{-1}$

$$\text{tr } \mathbf{J} = \text{tr } \mathbf{V} \mathbf{\Lambda} \mathbf{V}^{-1}$$

- Two properties of determinants is that $|\mathbf{A} \mathbf{B}| = |\mathbf{A}| |\mathbf{B}|$ and $|\mathbf{M}^{-1}| = |\mathbf{M}|^{-1}$ thus

$$|\mathbf{J}| = |\mathbf{V}| |\mathbf{\Lambda}| |\mathbf{V}^{-1}|$$

- If $\lambda_1 = T/2 - \sqrt{T^2/4 - D}$ and $\lambda_2 = T/2 + \sqrt{T^2/4 - D}$ then

$$\lambda_1 + \lambda_2 = T$$

$$\lambda_1 \times \lambda_2 = D$$

Incidentally. . .

- A property of traces ($\text{tr } \mathbf{M} = \sum_i M_{ii}$) is

$$\text{tr } \mathbf{A} \mathbf{B} = \sum_{i,j} A_{ij} B_{ji} = \sum_{i,j} B_{ji} A_{ij}$$

- Using $\mathbf{J} = \mathbf{V} \mathbf{\Lambda} \mathbf{V}^{-1}$

$$\text{tr } \mathbf{J} = \text{tr } \mathbf{V} \mathbf{\Lambda} \mathbf{V}^{-1}$$

- Two properties of determinants is that $|\mathbf{A} \mathbf{B}| = |\mathbf{A}| |\mathbf{B}|$ and $|\mathbf{M}^{-1}| = |\mathbf{M}|^{-1}$ thus

$$|\mathbf{J}| = |\mathbf{V}| |\mathbf{\Lambda}| |\mathbf{V}^{-1}|$$

- If $\lambda_1 = T/2 - \sqrt{T^2/4 - D}$ and $\lambda_2 = T/2 + \sqrt{T^2/4 - D}$ then

$$\lambda_1 + \lambda_2 = T$$

$$\lambda_1 \times \lambda_2 = D$$

Incidentally. . .

- A property of traces ($\text{tr } \mathbf{M} = \sum_i M_{ii}$) is

$$\text{tr } \mathbf{A} \mathbf{B} = \sum_{i,j} A_{ij} B_{ji} = \sum_{i,j} B_{ji} A_{ij} = \text{tr } \mathbf{B} \mathbf{A}$$

- Using $\mathbf{J} = \mathbf{V} \mathbf{\Lambda} \mathbf{V}^{-1}$

$$\text{tr } \mathbf{J} = \text{tr } \mathbf{V} \mathbf{\Lambda} \mathbf{V}^{-1}$$

- Two properties of determinants is that $|\mathbf{A} \mathbf{B}| = |\mathbf{A}| |\mathbf{B}|$ and $|\mathbf{M}^{-1}| = |\mathbf{M}|^{-1}$ thus

$$|\mathbf{J}| = |\mathbf{V}| |\mathbf{\Lambda}| |\mathbf{V}^{-1}|$$

- If $\lambda_1 = T/2 - \sqrt{T^2/4 - D}$ and $\lambda_2 = T/2 + \sqrt{T^2/4 - D}$ then

$$\lambda_1 + \lambda_2 = T$$

$$\lambda_1 \times \lambda_2 = D$$

Incidentally. . .

- A property of traces ($\text{tr } \mathbf{M} = \sum_i M_{ii}$) is

$$\text{tr } \mathbf{A} \mathbf{B} = \sum_{i,j} A_{ij} B_{ji} = \sum_{i,j} B_{ji} A_{ij} = \text{tr } \mathbf{B} \mathbf{A}$$

- Using $\mathbf{J} = \mathbf{V} \mathbf{\Lambda} \mathbf{V}^{-1}$

$$\text{tr } \mathbf{J} = \text{tr } \mathbf{V} \mathbf{\Lambda} \mathbf{V}^{-1}$$

- Two properties of determinants is that $|\mathbf{A} \mathbf{B}| = |\mathbf{A}| |\mathbf{B}|$ and $|\mathbf{M}^{-1}| = |\mathbf{M}|^{-1}$ thus

$$|\mathbf{J}| = |\mathbf{V}| |\mathbf{\Lambda}| |\mathbf{V}^{-1}|$$

- If $\lambda_1 = T/2 - \sqrt{T^2/4 - D}$ and $\lambda_2 = T/2 + \sqrt{T^2/4 - D}$ then

$$\lambda_1 + \lambda_2 = T$$

$$\lambda_1 \times \lambda_2 = D$$

Incidentally. . .

- A property of traces ($\text{tr } \mathbf{M} = \sum_i M_{ii}$) is

$$\text{tr } \mathbf{A} \mathbf{B} = \sum_{i,j} A_{ij} B_{ji} = \sum_{i,j} B_{ji} A_{ij} = \text{tr } \mathbf{B} \mathbf{A}$$

- Using $\mathbf{J} = \mathbf{V} \mathbf{\Lambda} \mathbf{V}^{-1}$

$$\text{tr } \mathbf{J} = \text{tr } \mathbf{V} \mathbf{\Lambda} \mathbf{V}^{-1} = \text{tr } \mathbf{V}^{-1} \mathbf{V} \mathbf{\Lambda}$$

- Two properties of determinants is that $|\mathbf{A} \mathbf{B}| = |\mathbf{A}| |\mathbf{B}|$ and $|\mathbf{M}^{-1}| = |\mathbf{M}|^{-1}$ thus

$$|\mathbf{J}| = |\mathbf{V}| |\mathbf{\Lambda}| |\mathbf{V}^{-1}|$$

- If $\lambda_1 = T/2 - \sqrt{T^2/4 - D}$ and $\lambda_2 = T/2 + \sqrt{T^2/4 - D}$ then

$$\lambda_1 + \lambda_2 = T$$

$$\lambda_1 \times \lambda_2 = D$$

Incidentally. . .

- A property of traces ($\text{tr } \mathbf{M} = \sum_i M_{ii}$) is

$$\text{tr } \mathbf{A} \mathbf{B} = \sum_{i,j} A_{ij} B_{ji} = \sum_{i,j} B_{ji} A_{ij} = \text{tr } \mathbf{B} \mathbf{A}$$

- Using $\mathbf{J} = \mathbf{V} \mathbf{\Lambda} \mathbf{V}^{-1}$

$$\text{tr } \mathbf{J} = \text{tr } \mathbf{V} \mathbf{\Lambda} \mathbf{V}^{-1} = \text{tr } \mathbf{V}^{-1} \mathbf{V} \mathbf{\Lambda} = \text{tr } \mathbf{\Lambda}$$

- Two properties of determinants is that $|\mathbf{A} \mathbf{B}| = |\mathbf{A}| |\mathbf{B}|$ and $|\mathbf{M}^{-1}| = |\mathbf{M}|^{-1}$ thus

$$|\mathbf{J}| = |\mathbf{V}| |\mathbf{\Lambda}| |\mathbf{V}^{-1}|$$

- If $\lambda_1 = T/2 - \sqrt{T^2/4 - D}$ and $\lambda_2 = T/2 + \sqrt{T^2/4 - D}$ then

$$\lambda_1 + \lambda_2 = T$$

$$\lambda_1 \times \lambda_2 = D$$

Incidentally. . .

- A property of traces ($\text{tr } \mathbf{M} = \sum_i M_{ii}$) is

$$\text{tr } \mathbf{A} \mathbf{B} = \sum_{i,j} A_{ij} B_{ji} = \sum_{i,j} B_{ji} A_{ij} = \text{tr } \mathbf{B} \mathbf{A}$$

- Using $\mathbf{J} = \mathbf{V} \mathbf{\Lambda} \mathbf{V}^{-1}$

$$\text{tr } \mathbf{J} = \text{tr } \mathbf{V} \mathbf{\Lambda} \mathbf{V}^{-1} = \text{tr } \mathbf{V}^{-1} \mathbf{V} \mathbf{\Lambda} = \text{tr } \mathbf{\Lambda} = \sum_i \lambda_i$$

- Two properties of determinants is that $|\mathbf{A} \mathbf{B}| = |\mathbf{A}| |\mathbf{B}|$ and $|\mathbf{M}^{-1}| = |\mathbf{M}|^{-1}$ thus

$$|\mathbf{J}| = |\mathbf{V}| |\mathbf{\Lambda}| |\mathbf{V}^{-1}|$$

- If $\lambda_1 = T/2 - \sqrt{T^2/4 - D}$ and $\lambda_2 = T/2 + \sqrt{T^2/4 - D}$ then

$$\lambda_1 + \lambda_2 = T$$

$$\lambda_1 \times \lambda_2 = D$$

Incidentally. . .

- A property of traces ($\text{tr } \mathbf{M} = \sum_i M_{ii}$) is

$$\text{tr } \mathbf{A} \mathbf{B} = \sum_{i,j} A_{ij} B_{ji} = \sum_{i,j} B_{ji} A_{ij} = \text{tr } \mathbf{B} \mathbf{A}$$

- Using $\mathbf{J} = \mathbf{V} \mathbf{\Lambda} \mathbf{V}^{-1}$

$$\text{tr } \mathbf{J} = \text{tr } \mathbf{V} \mathbf{\Lambda} \mathbf{V}^{-1} = \text{tr } \mathbf{V}^{-1} \mathbf{V} \mathbf{\Lambda} = \text{tr } \mathbf{\Lambda} = \sum_i \lambda_i$$

- Two properties of determinants is that $|\mathbf{A} \mathbf{B}| = |\mathbf{A}| |\mathbf{B}|$ and $|\mathbf{M}^{-1}| = |\mathbf{M}|^{-1}$ thus

$$|\mathbf{J}| = |\mathbf{V}| |\mathbf{\Lambda}| |\mathbf{V}^{-1}|$$

- If $\lambda_1 = T/2 - \sqrt{T^2/4 - D}$ and $\lambda_2 = T/2 + \sqrt{T^2/4 - D}$ then

$$\lambda_1 + \lambda_2 = T$$

$$\lambda_1 \times \lambda_2 = D$$

Incidentally. . .

- A property of traces ($\text{tr } \mathbf{M} = \sum_i M_{ii}$) is

$$\text{tr } \mathbf{A} \mathbf{B} = \sum_{i,j} A_{ij} B_{ji} = \sum_{i,j} B_{ji} A_{ij} = \text{tr } \mathbf{B} \mathbf{A}$$

- Using $\mathbf{J} = \mathbf{V} \mathbf{\Lambda} \mathbf{V}^{-1}$

$$\text{tr } \mathbf{J} = \text{tr } \mathbf{V} \mathbf{\Lambda} \mathbf{V}^{-1} = \text{tr } \mathbf{V}^{-1} \mathbf{V} \mathbf{\Lambda} = \text{tr } \mathbf{\Lambda} = \sum_i \lambda_i$$

- Two properties of determinants is that $|\mathbf{A} \mathbf{B}| = |\mathbf{A}| |\mathbf{B}|$ and $|\mathbf{M}^{-1}| = |\mathbf{M}|^{-1}$ thus

$$|\mathbf{J}| = |\mathbf{V}| |\mathbf{\Lambda}| |\mathbf{V}^{-1}| = |\mathbf{\Lambda}|$$

- If $\lambda_1 = T/2 - \sqrt{T^2/4 - D}$ and $\lambda_2 = T/2 + \sqrt{T^2/4 - D}$ then

$$\lambda_1 + \lambda_2 = T$$

$$\lambda_1 \times \lambda_2 = D$$

Incidentally. . .

- A property of traces ($\text{tr } \mathbf{M} = \sum_i M_{ii}$) is

$$\text{tr } \mathbf{A} \mathbf{B} = \sum_{i,j} A_{ij} B_{ji} = \sum_{i,j} B_{ji} A_{ij} = \text{tr } \mathbf{B} \mathbf{A}$$

- Using $\mathbf{J} = \mathbf{V} \mathbf{\Lambda} \mathbf{V}^{-1}$

$$\text{tr } \mathbf{J} = \text{tr } \mathbf{V} \mathbf{\Lambda} \mathbf{V}^{-1} = \text{tr } \mathbf{V}^{-1} \mathbf{V} \mathbf{\Lambda} = \text{tr } \mathbf{\Lambda} = \sum_i \lambda_i$$

- Two properties of determinants is that $|\mathbf{A} \mathbf{B}| = |\mathbf{A}| |\mathbf{B}|$ and $|\mathbf{M}^{-1}| = |\mathbf{M}|^{-1}$ thus

$$|\mathbf{J}| = |\mathbf{V}| |\mathbf{\Lambda}| |\mathbf{V}^{-1}| = |\mathbf{\Lambda}| = \prod_i \lambda_i$$

- If $\lambda_1 = T/2 - \sqrt{T^2/4 - D}$ and $\lambda_2 = T/2 + \sqrt{T^2/4 - D}$ then

$$\lambda_1 + \lambda_2 = T$$

$$\lambda_1 \times \lambda_2 = D$$

Incidentally. . .

- A property of traces ($\text{tr } \mathbf{M} = \sum_i M_{ii}$) is

$$\text{tr } \mathbf{A} \mathbf{B} = \sum_{i,j} A_{ij} B_{ji} = \sum_{i,j} B_{ji} A_{ij} = \text{tr } \mathbf{B} \mathbf{A}$$

- Using $\mathbf{J} = \mathbf{V} \mathbf{\Lambda} \mathbf{V}^{-1}$

$$\text{tr } \mathbf{J} = \text{tr } \mathbf{V} \mathbf{\Lambda} \mathbf{V}^{-1} = \text{tr } \mathbf{V}^{-1} \mathbf{V} \mathbf{\Lambda} = \text{tr } \mathbf{\Lambda} = \sum_i \lambda_i$$

- Two properties of determinants is that $|\mathbf{A} \mathbf{B}| = |\mathbf{A}| |\mathbf{B}|$ and $|\mathbf{M}^{-1}| = |\mathbf{M}|^{-1}$ thus

$$|\mathbf{J}| = |\mathbf{V}| |\mathbf{\Lambda}| |\mathbf{V}^{-1}| = |\mathbf{\Lambda}| = \prod_i \lambda_i$$

- If $\lambda_1 = T/2 - \sqrt{T^2/4 - D}$ and $\lambda_2 = T/2 + \sqrt{T^2/4 - D}$ then

$$\lambda_1 + \lambda_2 = T$$

$$\lambda_1 \times \lambda_2 = D$$

High Dimensional Systems

- We have only considered simple systems with two species of molecules
- Much of the analysis techniques generalise to higher dimensions, but it is far harder to get closed form solutions
- Using programs like Mathematica it is often easy to find fixed point solutions numerically
- However, in biology different reactions happen at very different rates
- We often concentrate on the slowest reactions and assume all the other reactions have reached equilibrium (however, beware this needs to be analysed)

High Dimensional Systems

- We have only considered simple systems with two species of molecules
- Much of the analysis techniques generalise to higher dimensions, but it is far harder to get closed form solutions
- Using programs like Mathematica it is often easy to find fixed point solutions numerically
- However, in biology different reactions happen at very different rates
- We often concentrate on the slowest reactions and assume all the other reactions have reached equilibrium (however, beware this needs to be analysed)

High Dimensional Systems

- We have only considered simple systems with two species of molecules
- Much of the analysis techniques generalise to higher dimensions, but it is far harder to get closed form solutions
- Using programs like Mathematica it is often easy to find fixed point solutions numerically
- However, in biology different reactions happen at very different rates
- We often concentrate on the slowest reactions and assume all the other reactions have reached equilibrium (however, beware this needs to be analysed)

High Dimensional Systems


- We have only considered simple systems with two species of molecules
- Much of the analysis techniques generalise to higher dimensions, but it is far harder to get closed form solutions
- Using programs like Mathematica it is often easy to find fixed point solutions numerically
- However, in biology different reactions happen at very different rates
- We often concentrate on the slowest reactions and assume all the other reactions have reached equilibrium (however, beware this needs to be analysed)

High Dimensional Systems

- We have only considered simple systems with two species of molecules
- Much of the analysis techniques generalise to higher dimensions, but it is far harder to get closed form solutions
- Using programs like Mathematica it is often easy to find fixed point solutions numerically
- However, in biology different reactions happen at very different rates
- We often concentrate on the slowest reactions and assume all the other reactions have reached equilibrium (however, beware this needs to be analysed)

Outline

1. Understanding ODEs
2. Stability
3. **Bifurcations**

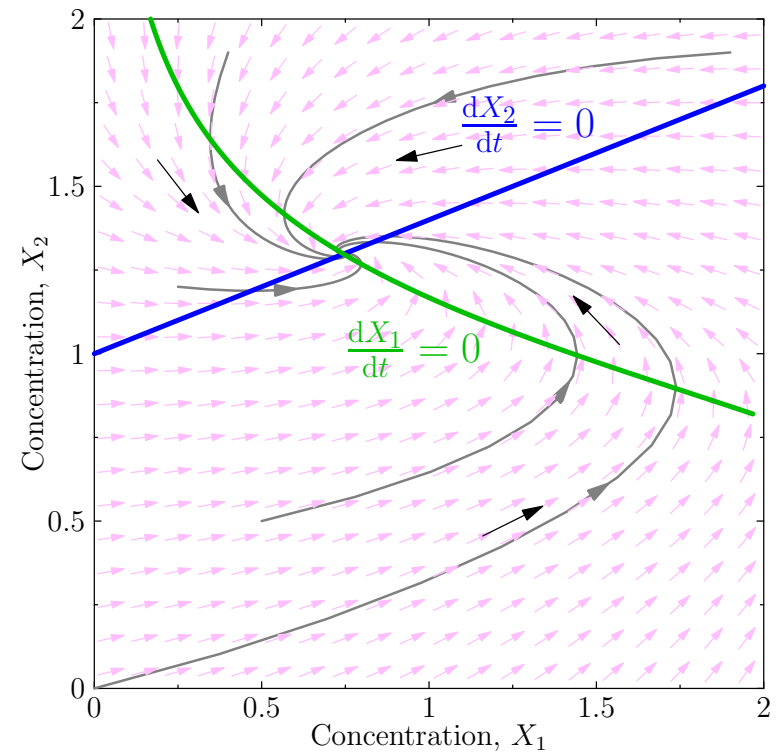

Back to Bistability

- Recall that we could create a bistable system through mutual inhibition

$$\begin{aligned}\frac{dX_1(t)}{dt} &= \frac{k_1}{1 + (X_2(t)/K_2)^{n_1}} - k_3 X_1(t) \\ \frac{dX_2(t)}{dt} &= \frac{k_2}{1 + (X_1(t)/K_1)^{n_2}} - k_4 X_2(t)\end{aligned}$$

- Let $k_2 = 20$, $K_1 = K_2 = 1$, $k_3 = k_4 = 5$, $n_1 = n_2 = 2$
- But now we look at varying the parameter k_1
- The fixed points are given where the nullclines intersect

Back to Bistability

- Recall that we could create a bistable system through mutual inhibition

$$\begin{aligned}\frac{dX_1(t)}{dt} &= \frac{k_1}{1 + (X_2(t)/K_2)^{n_1}} - k_3 X_1(t) \\ \frac{dX_2(t)}{dt} &= \frac{k_2}{1 + (X_1(t)/K_1)^{n_2}} - k_4 X_2(t)\end{aligned}$$

- Let $k_2 = 20$, $K_1 = K_2 = 1$, $k_3 = k_4 = 5$, $n_1 = n_2 = 2$
- But now we look at varying the parameter k_1
- The fixed points are given where the nullclines intersect

Back to Bistability

- Recall that we could create a bistable system through mutual inhibition

$$\begin{aligned}\frac{dX_1(t)}{dt} &= \frac{k_1}{1 + (X_2(t)/K_2)^{n_1}} - k_3 X_1(t) \\ \frac{dX_2(t)}{dt} &= \frac{k_2}{1 + (X_1(t)/K_1)^{n_2}} - k_4 X_2(t)\end{aligned}$$

- Let $k_2 = 20$, $K_1 = K_2 = 1$, $k_3 = k_4 = 5$, $n_1 = n_2 = 2$
- But now we look at varying the parameter k_1
- The fixed points are given where the nullclines intersect



Back to Bistability

- Recall that we could create a bistable system through mutual inhibition



$$\begin{aligned}\frac{dX_1(t)}{dt} &= \frac{k_1}{1 + (X_2(t)/K_2)^{n_1}} - k_3 X_1(t) \\ \frac{dX_2(t)}{dt} &= \frac{k_2}{1 + (X_1(t)/K_1)^{n_2}} - k_4 X_2(t)\end{aligned}$$

- Let $k_2 = 20$, $K_1 = K_2 = 1$, $k_3 = k_4 = 5$, $n_1 = n_2 = 2$
- But now we look at varying the parameter k_1
- The fixed points are given where the nullclines intersect



Varying k_1

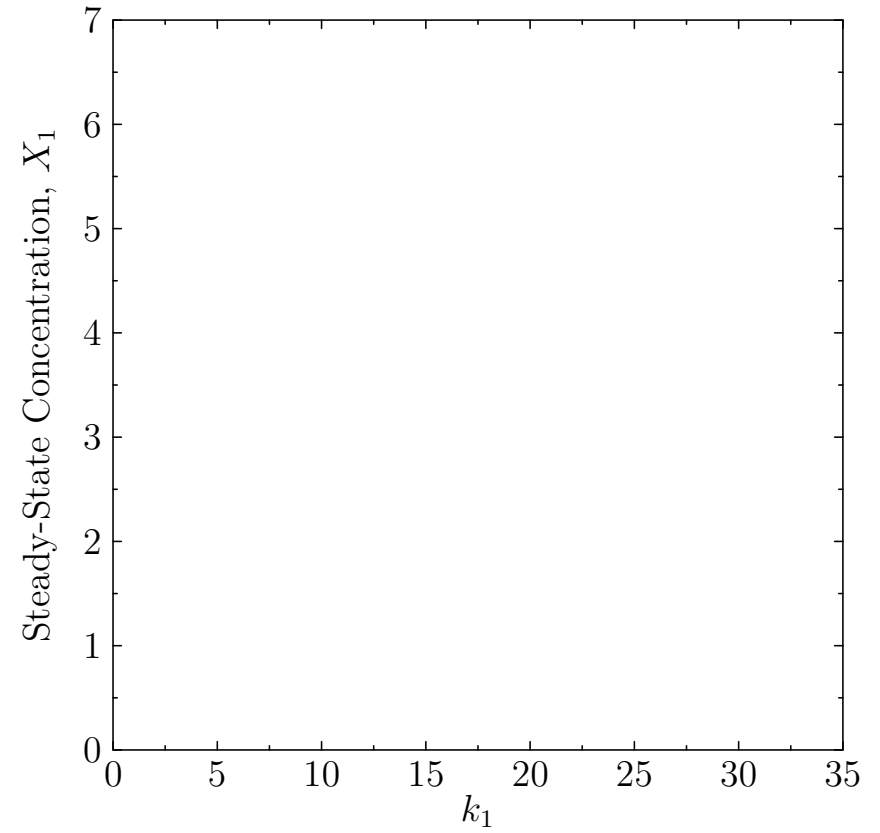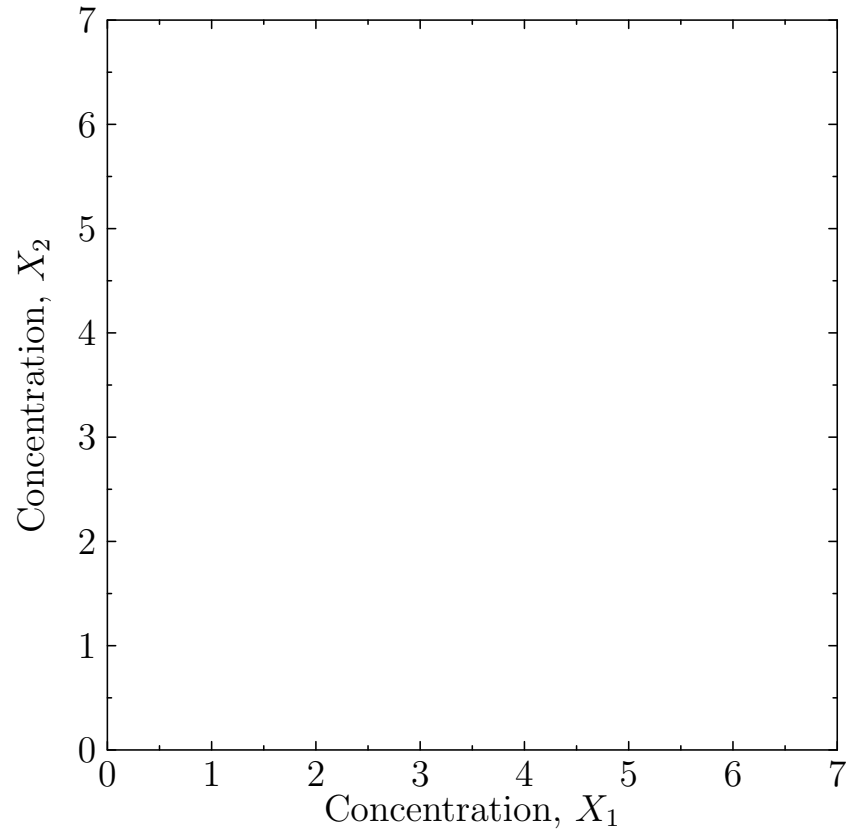



Varying k_1

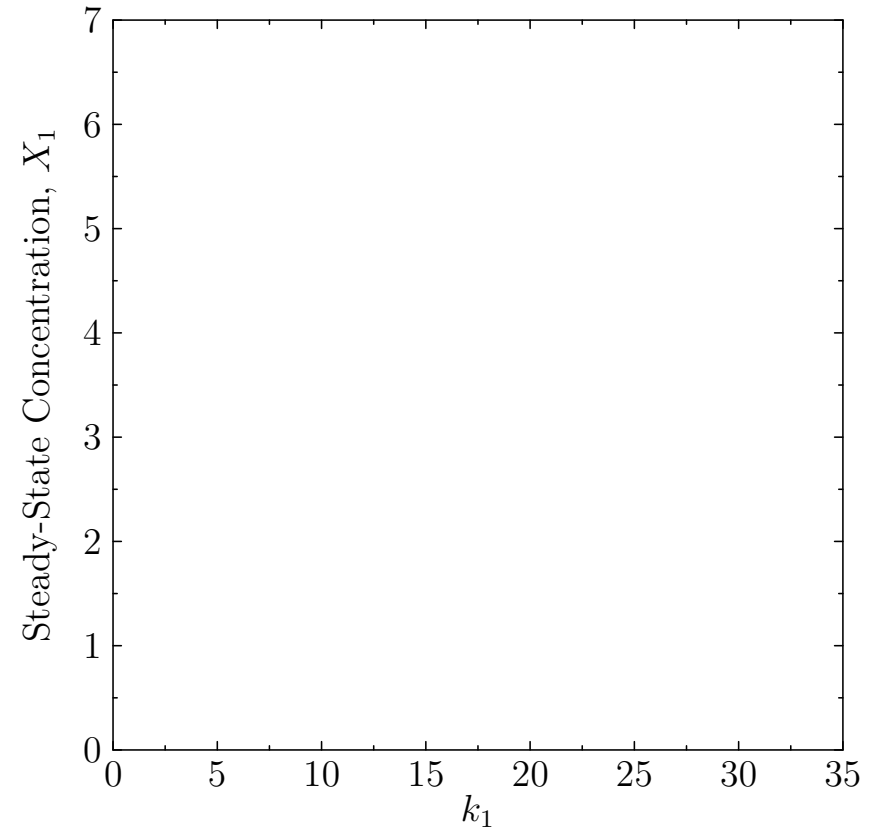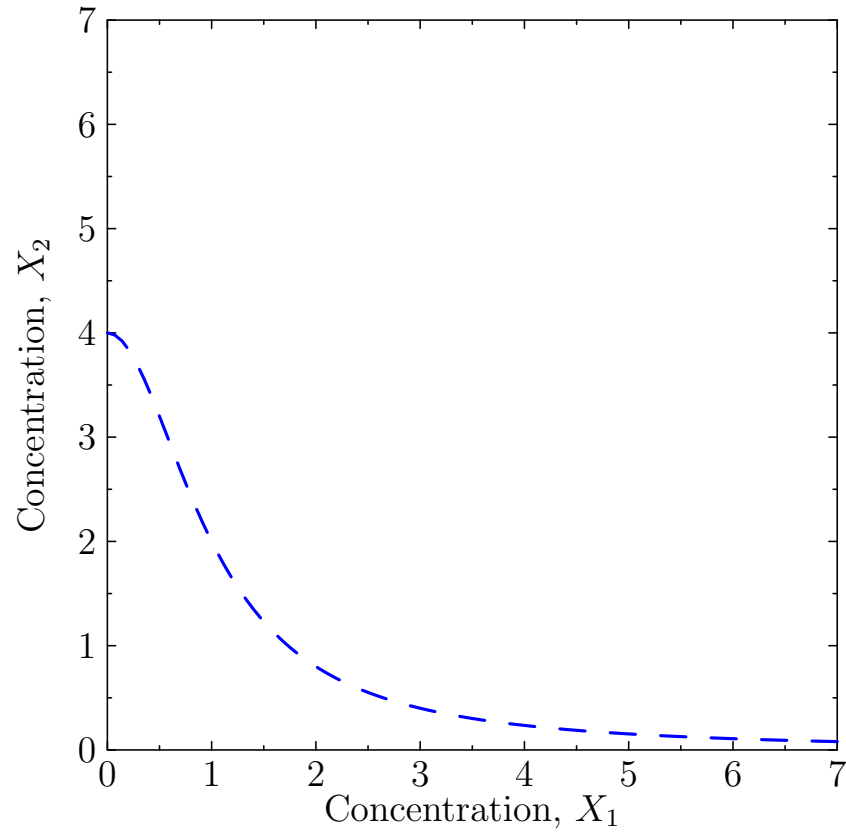



Varying k_1

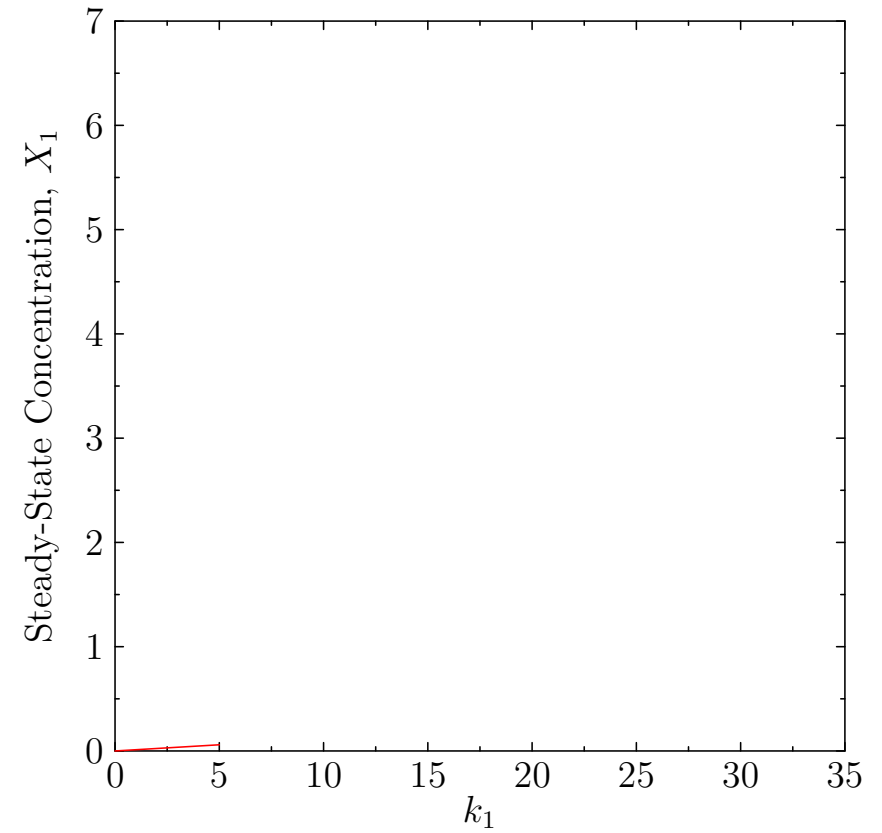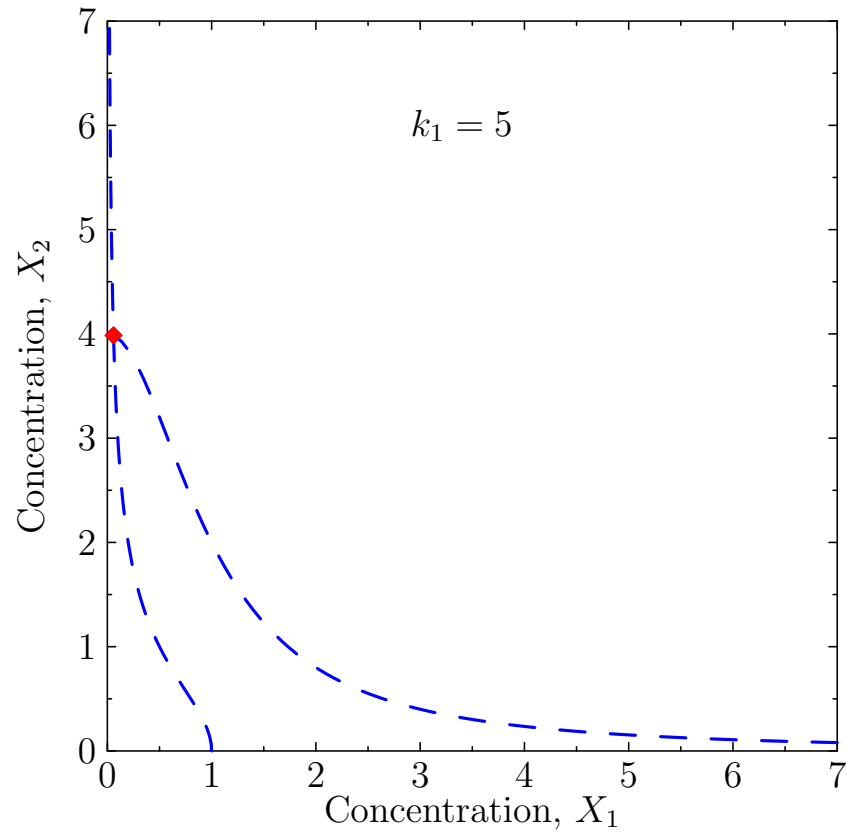



Varying k_1

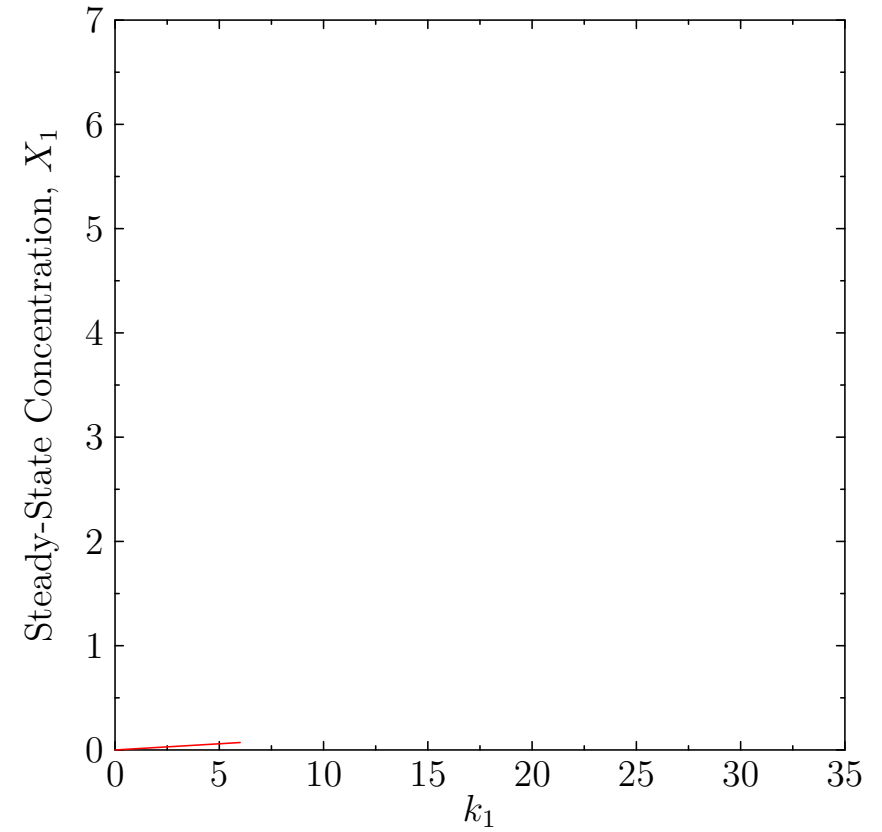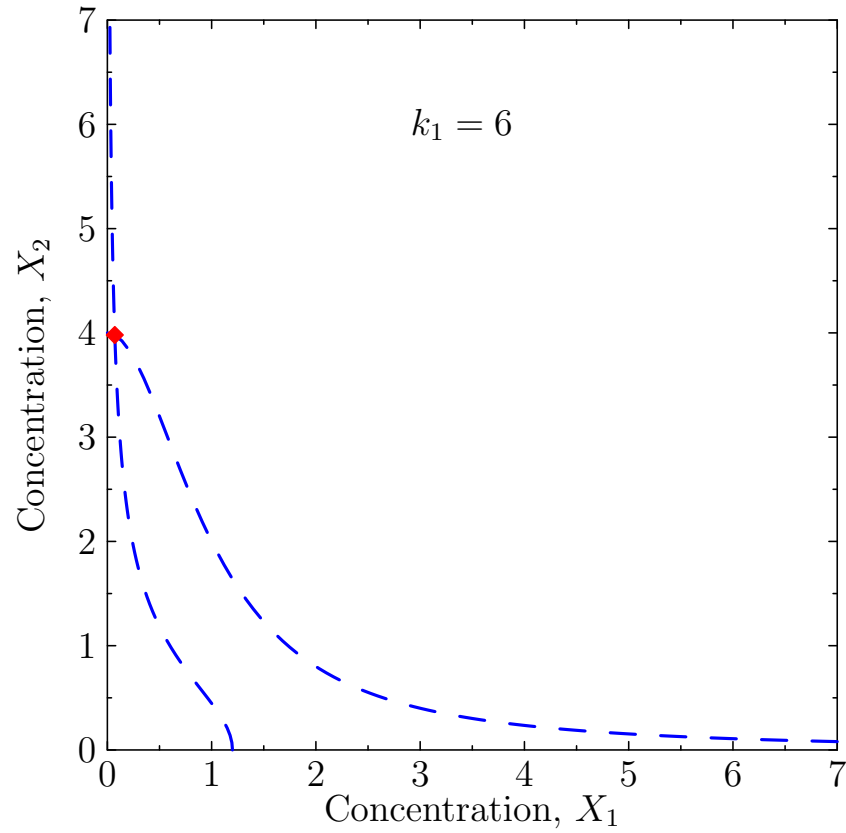



Varying k_1

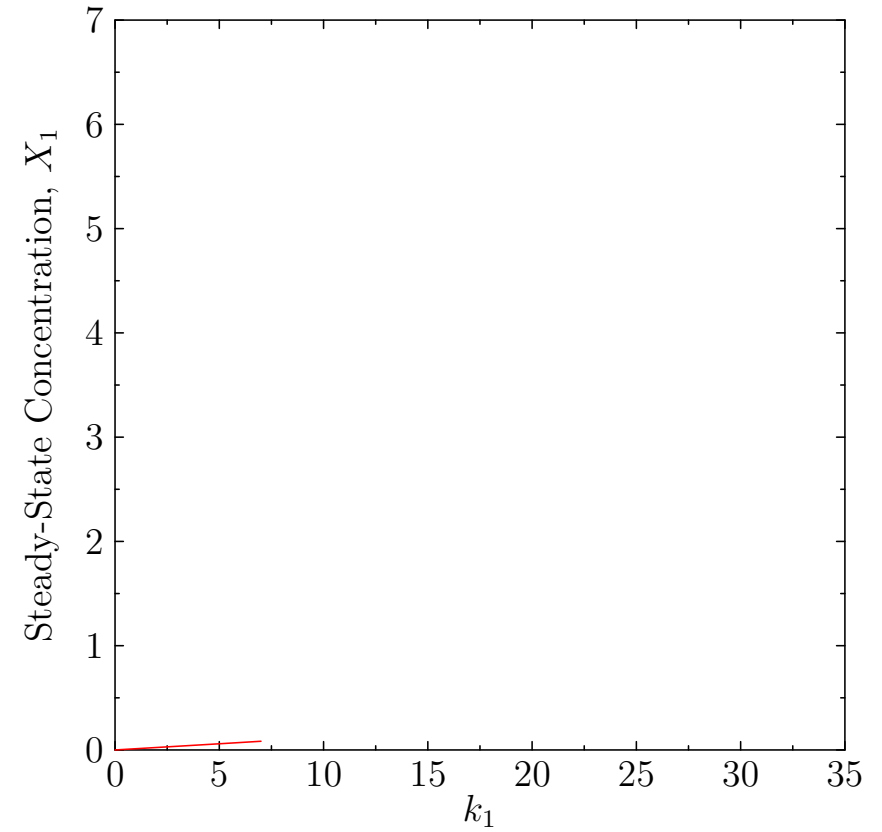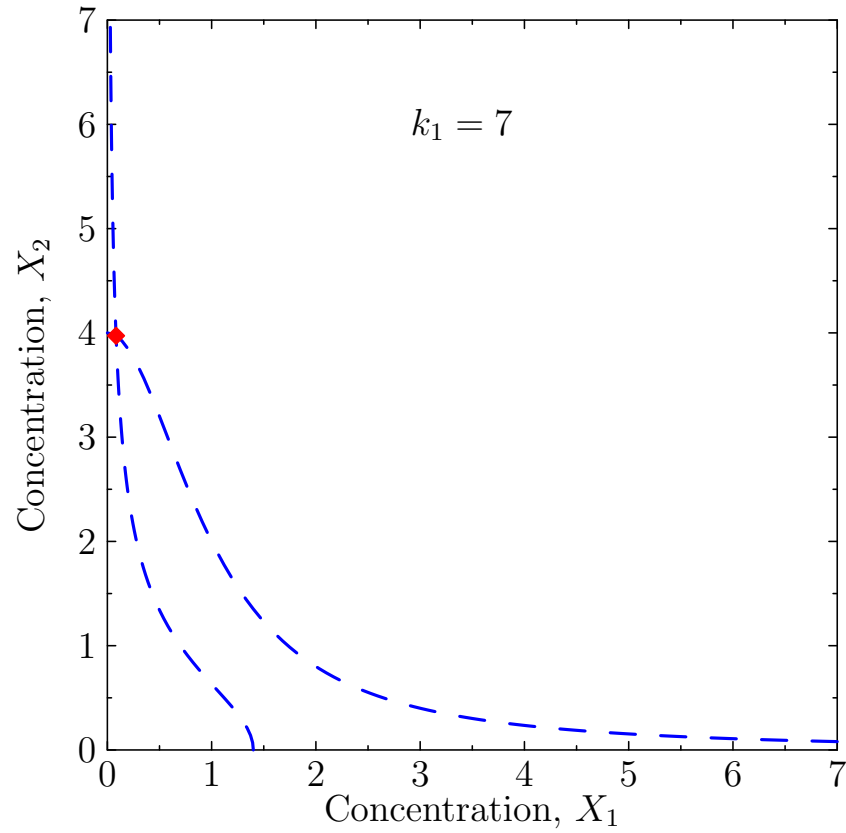



Varying k_1

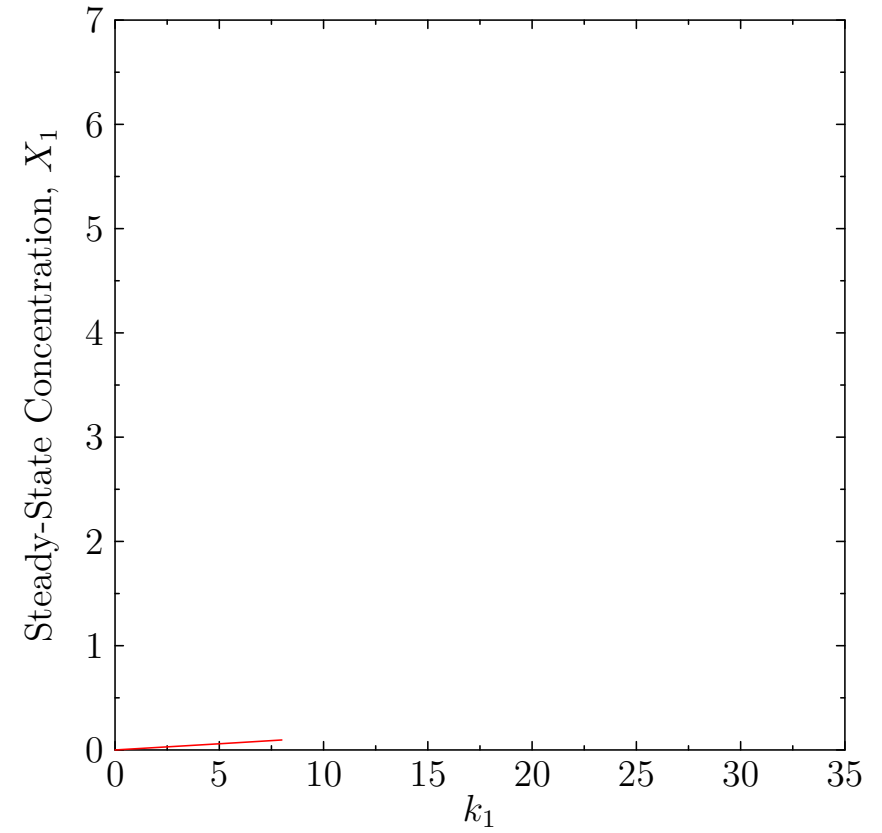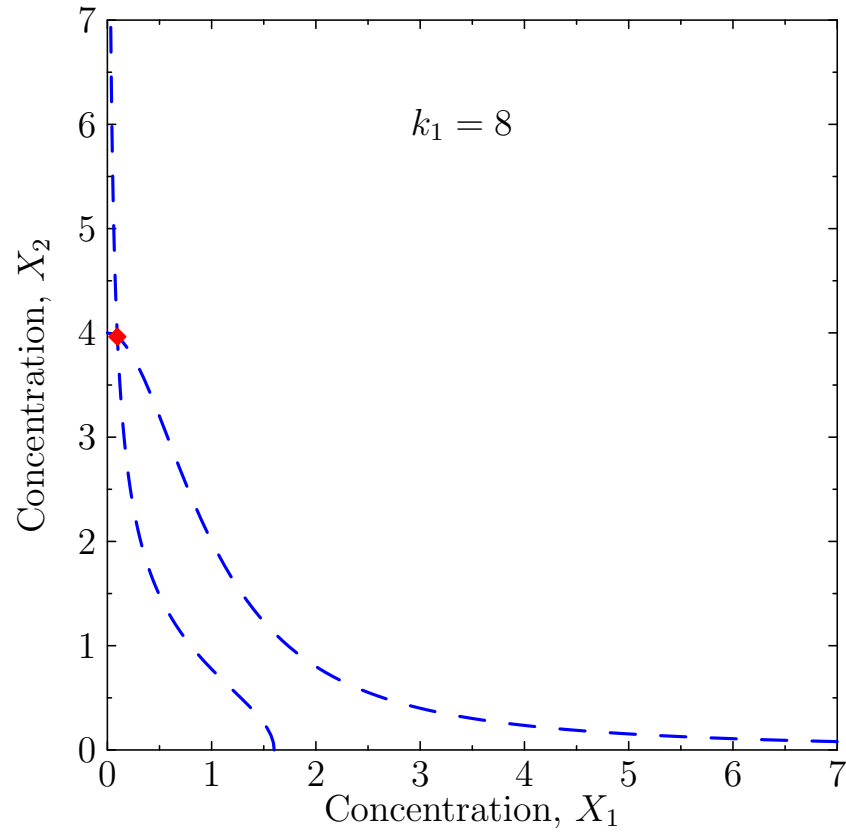



Varying k_1

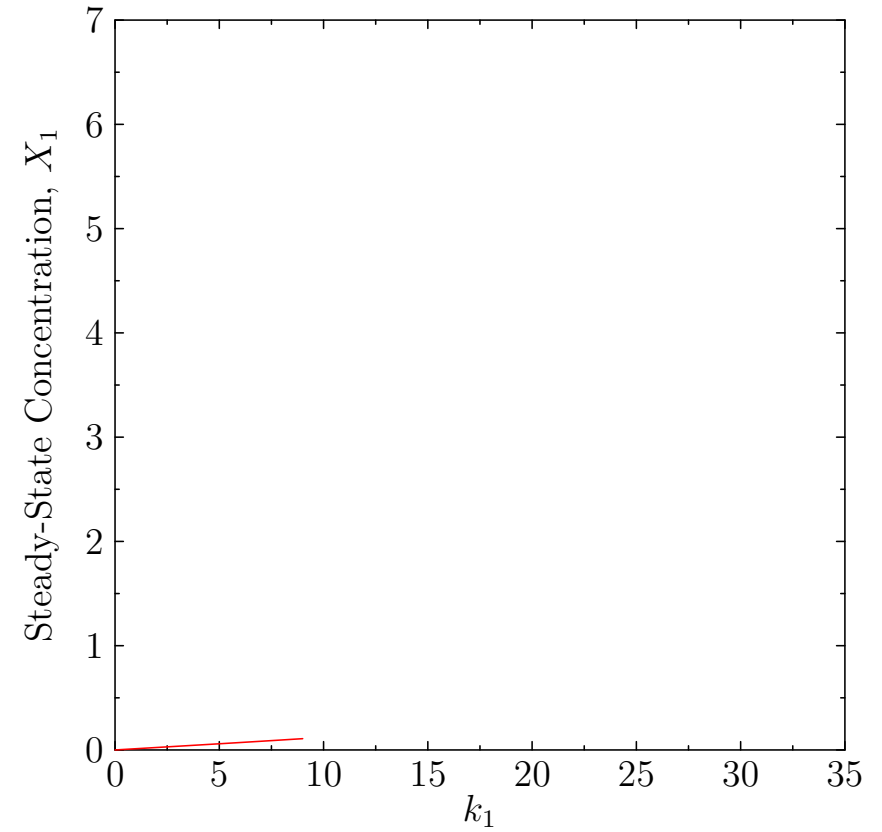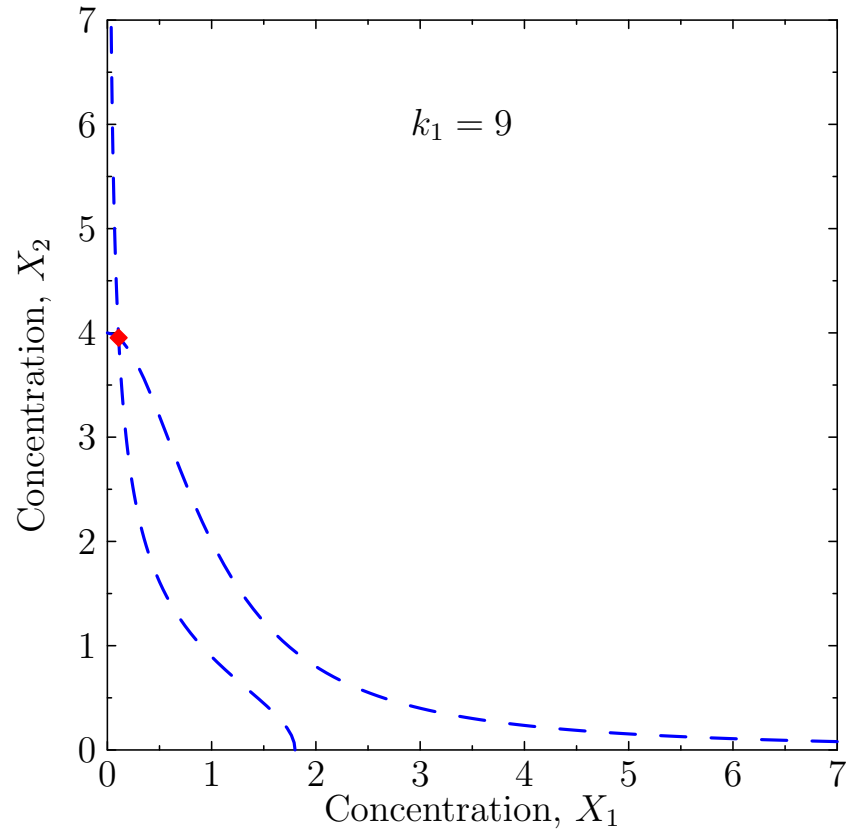



Varying k_1

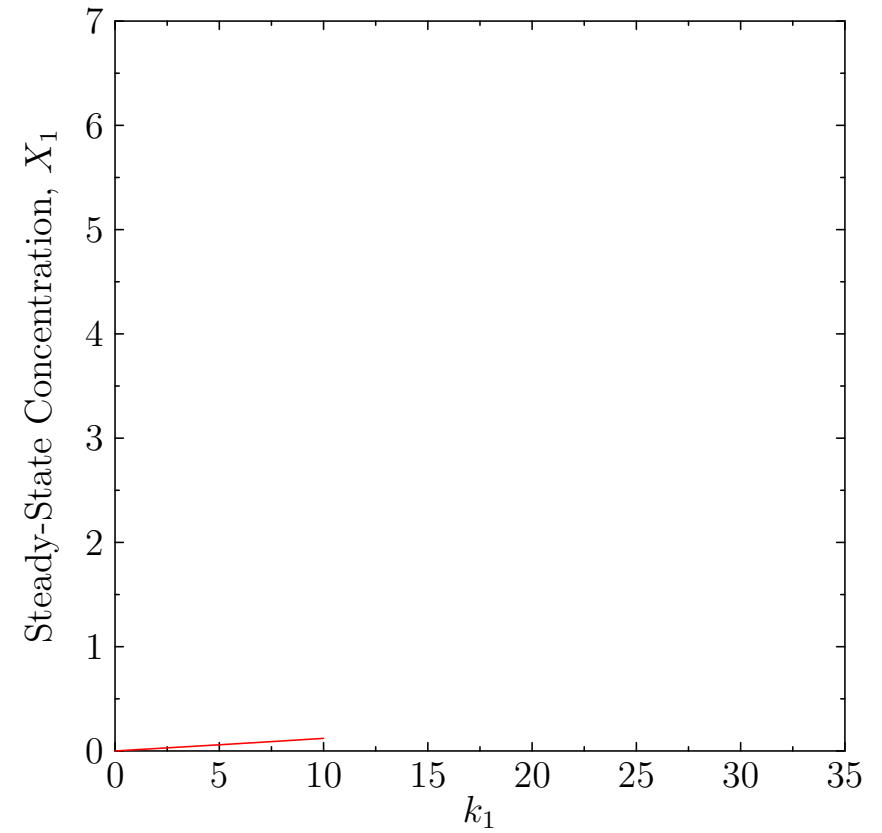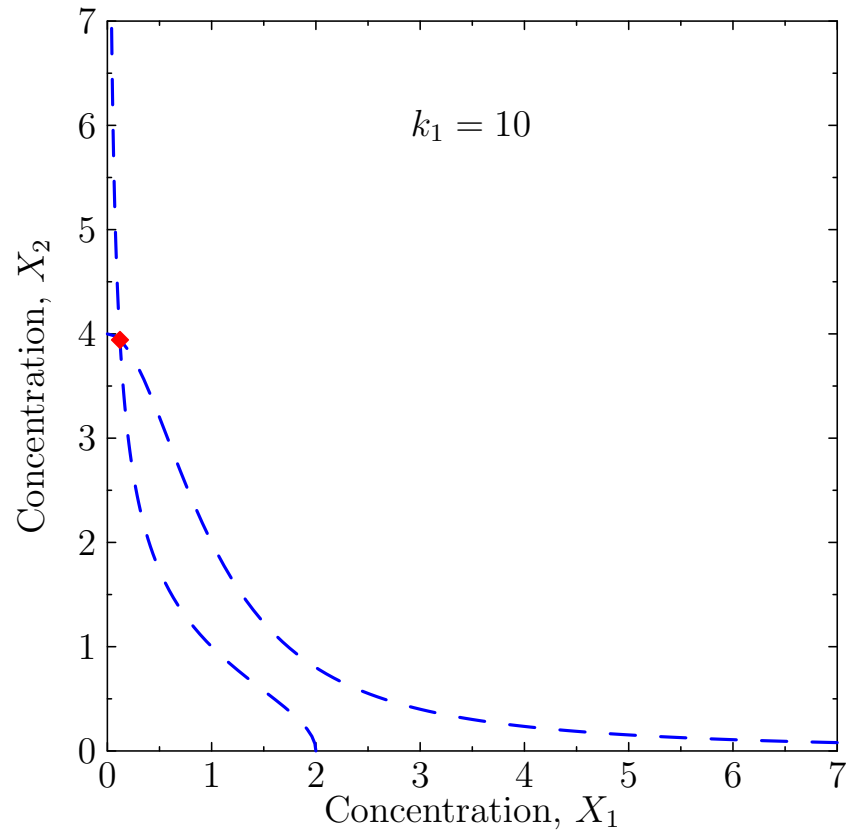



Varying k_1

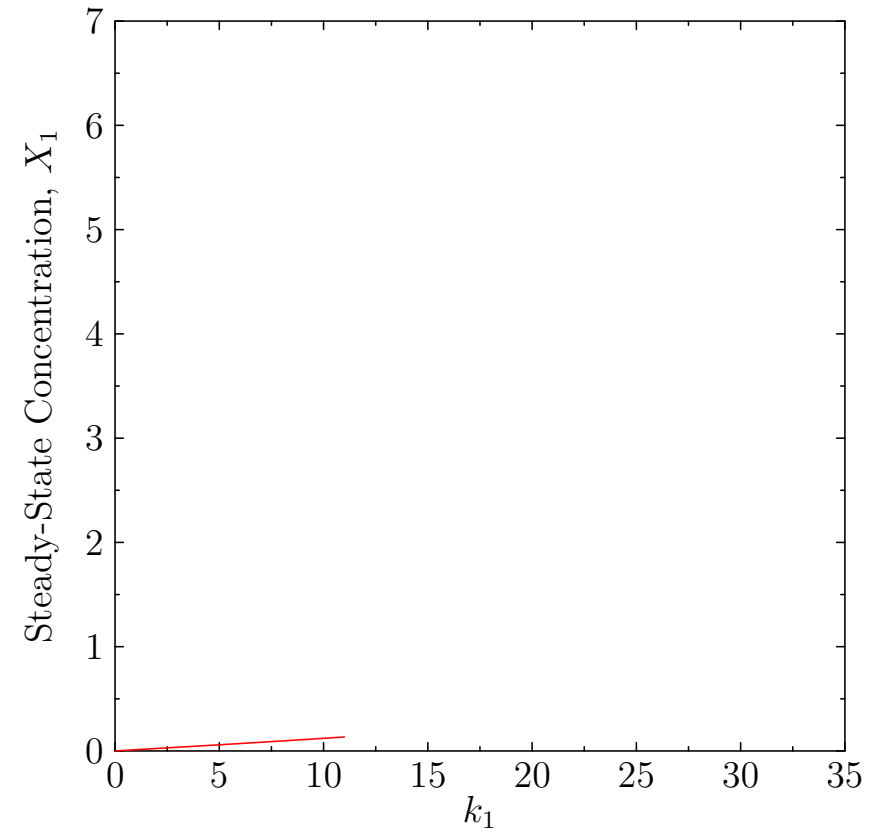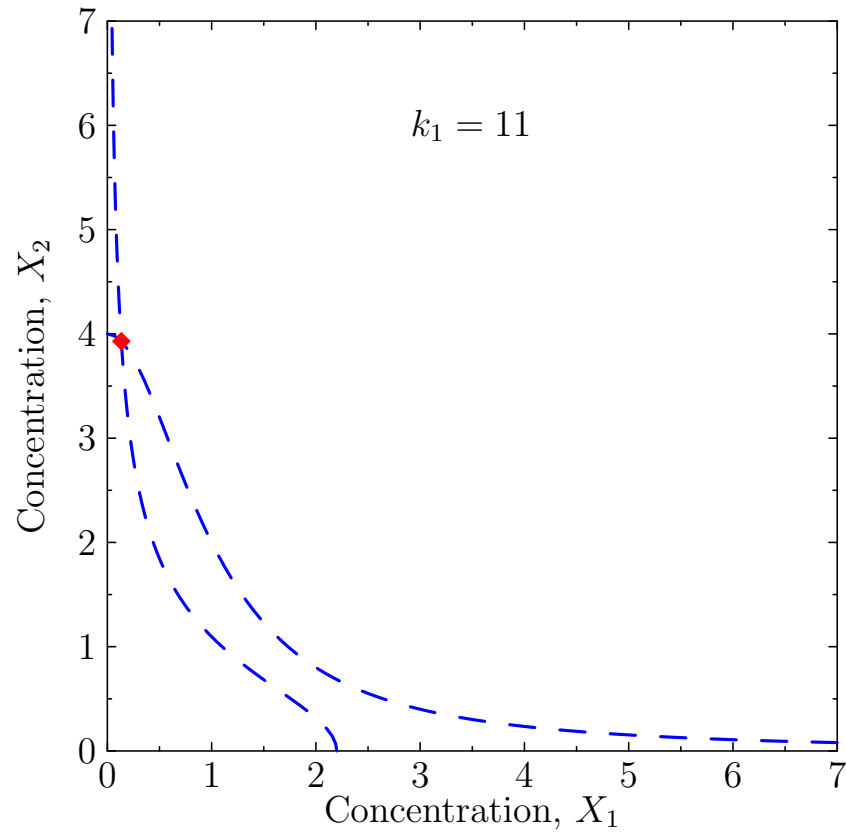



Varying k_1

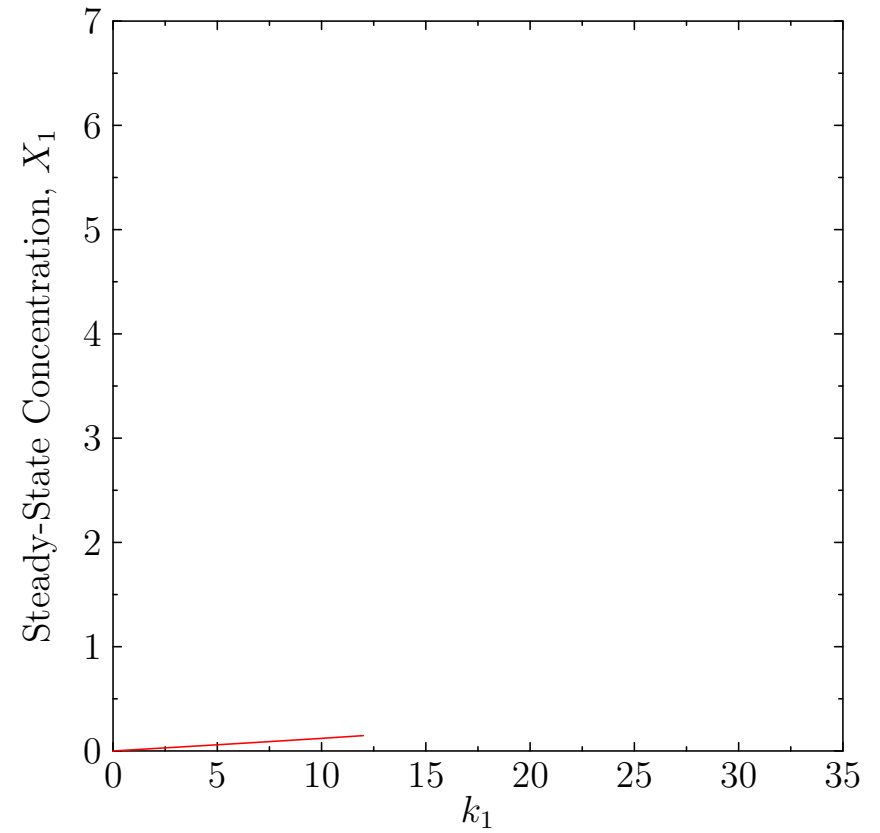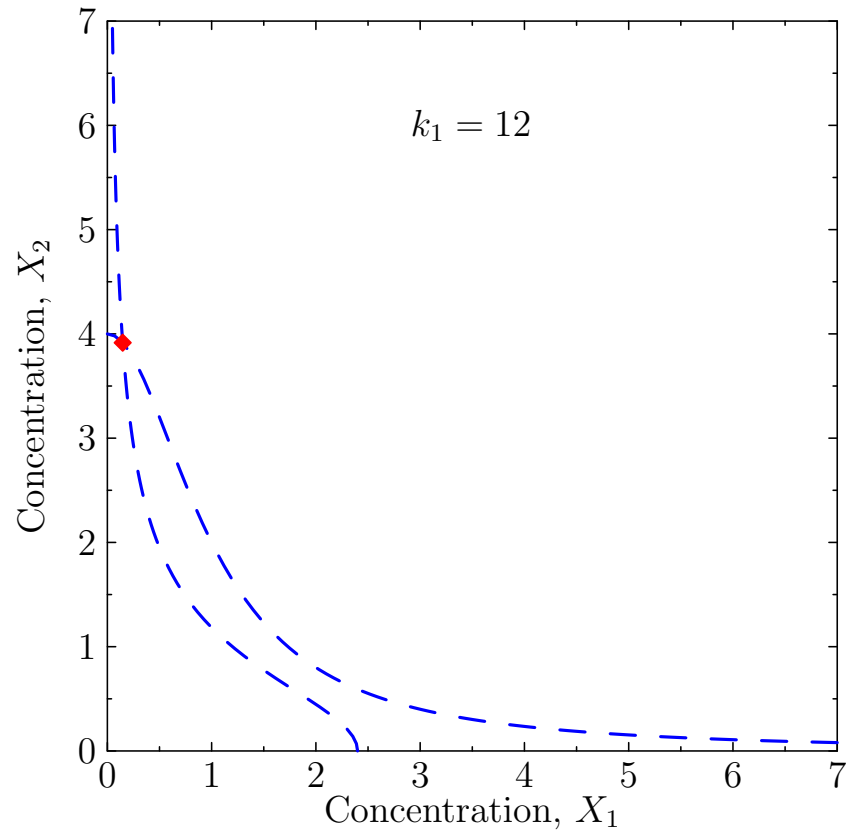



Varying k_1

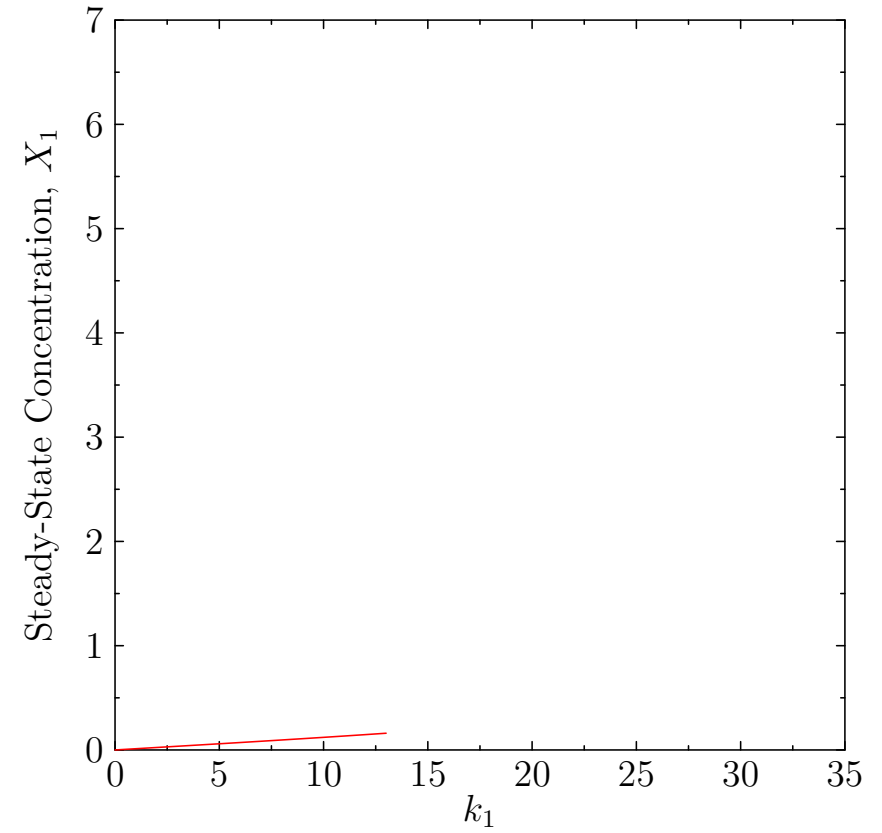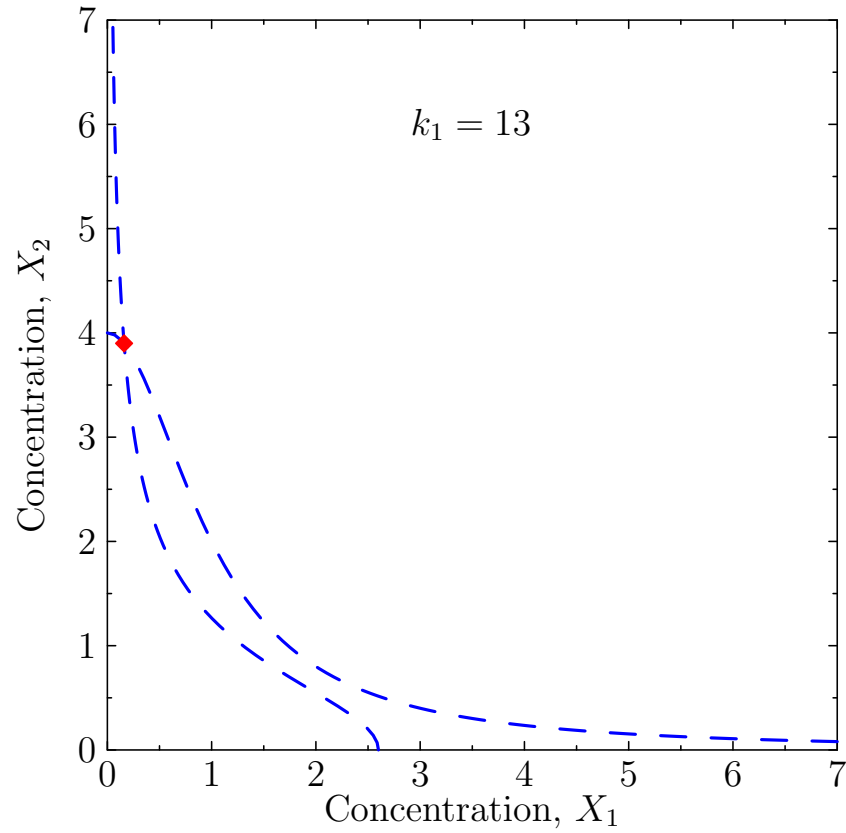



Varying k_1

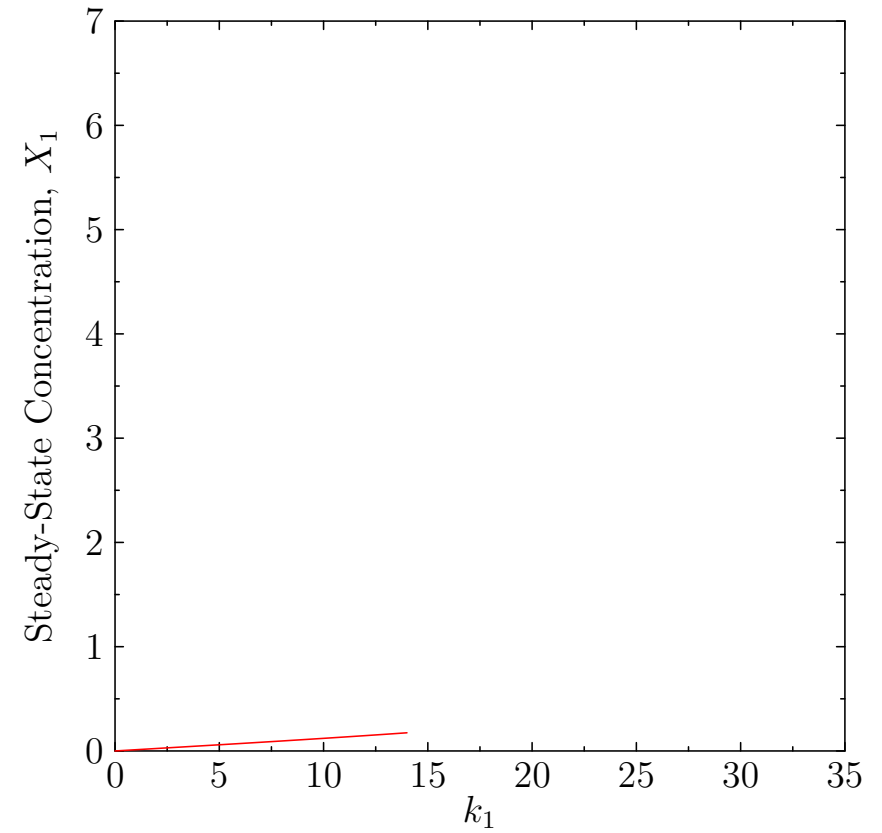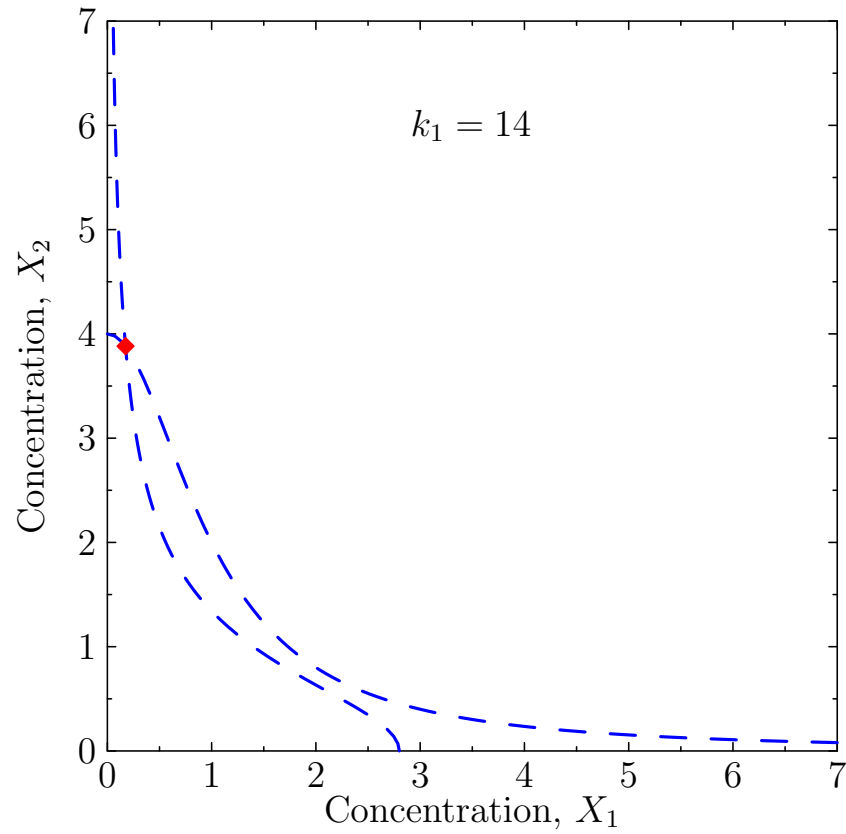



Varying k_1

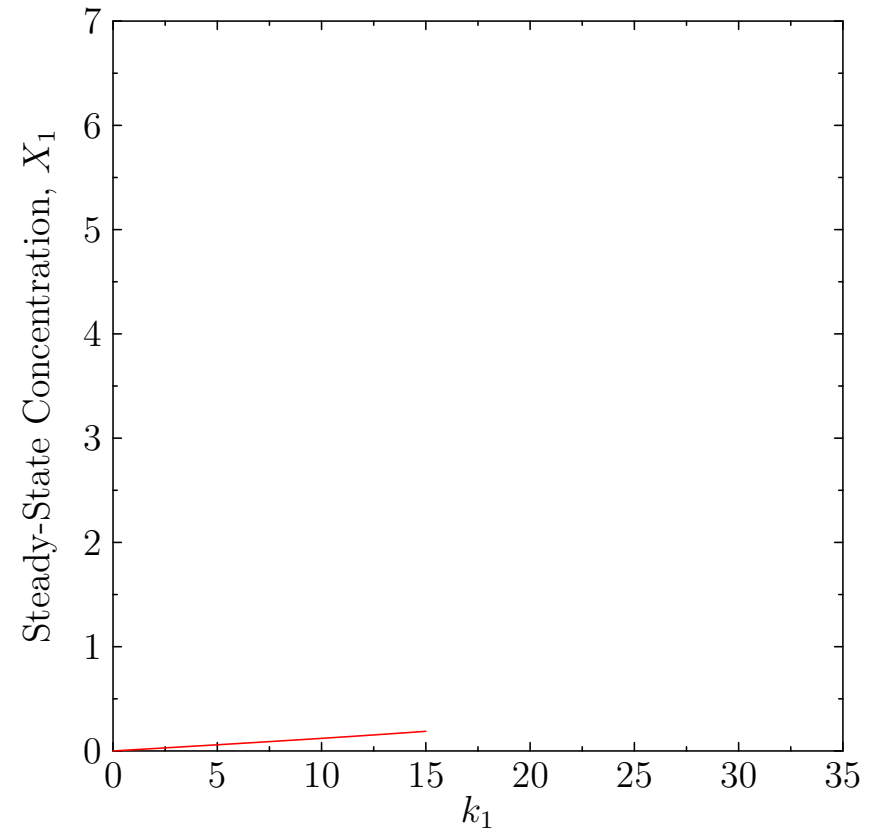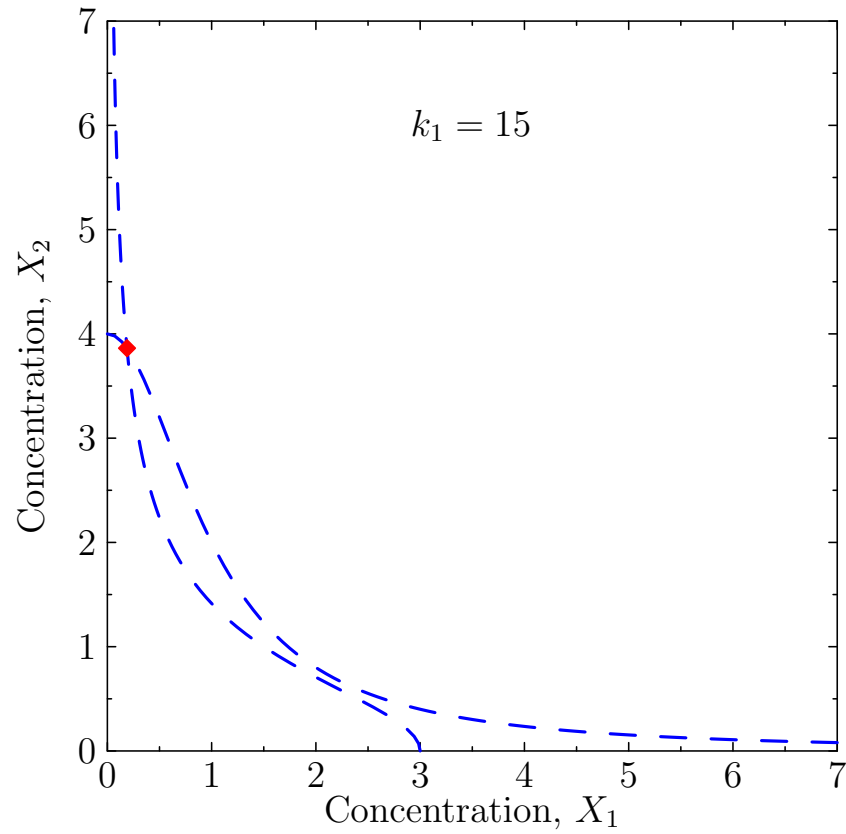



Varying k_1

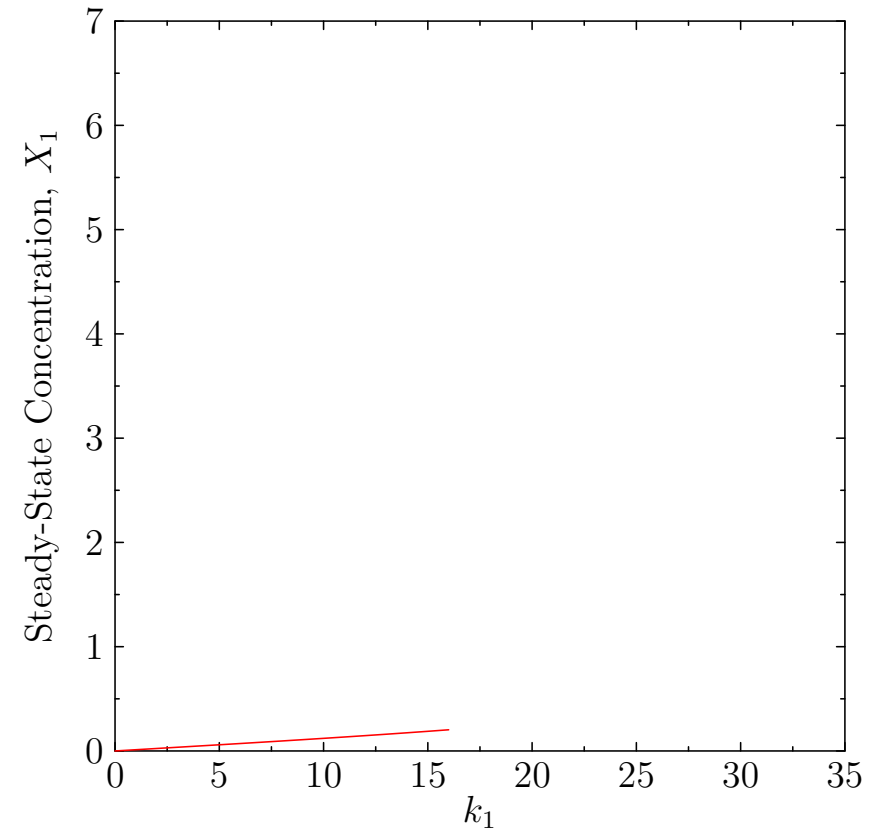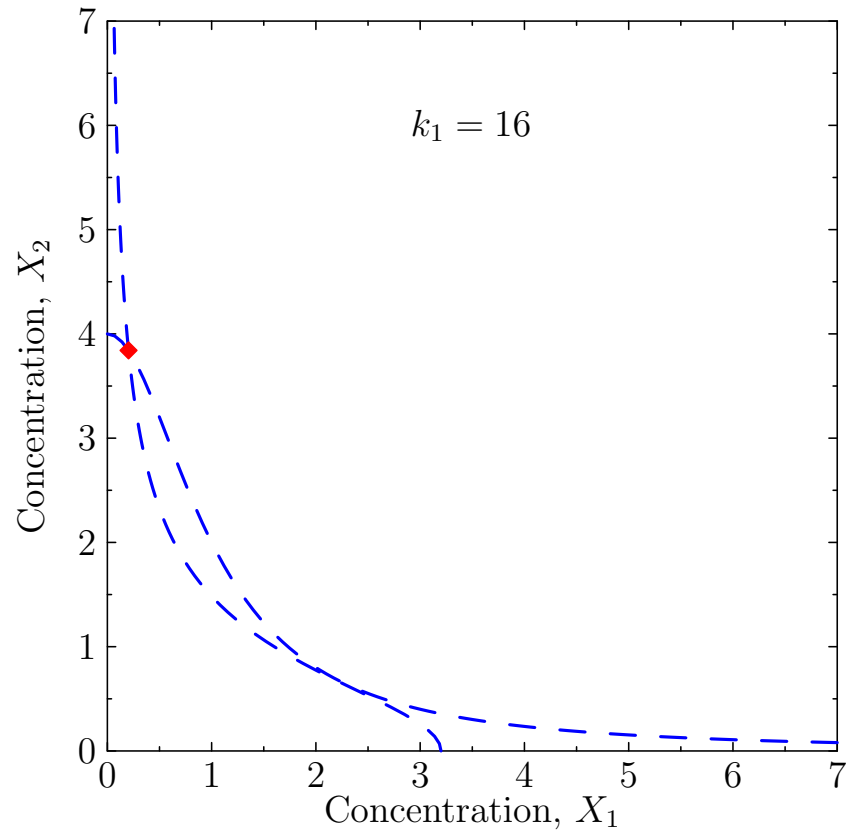



Varying k_1

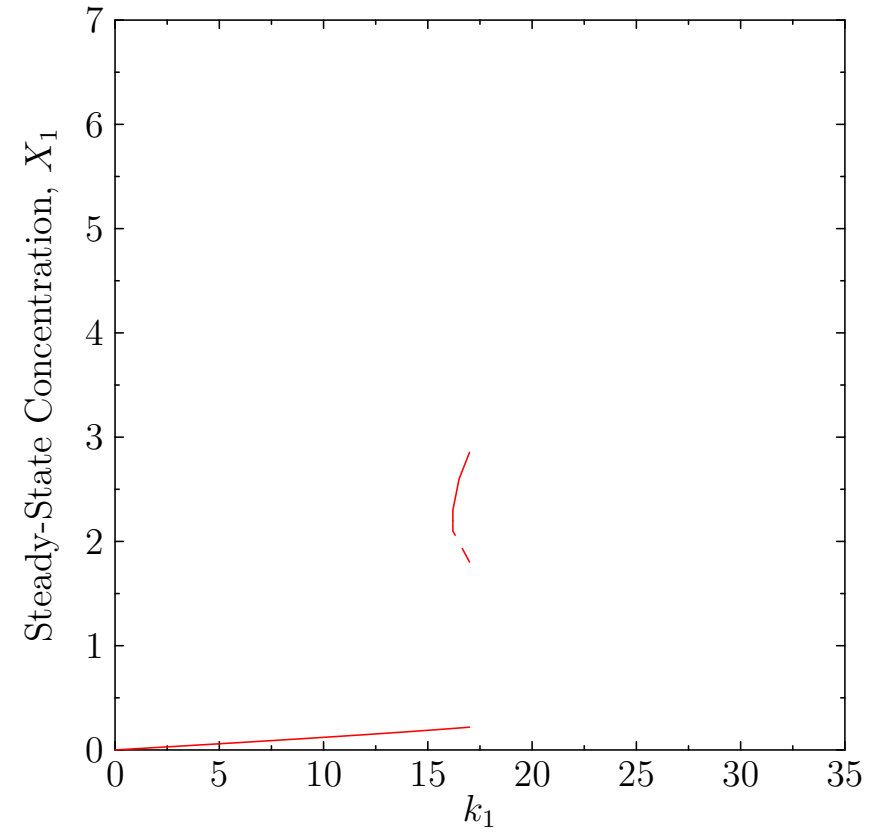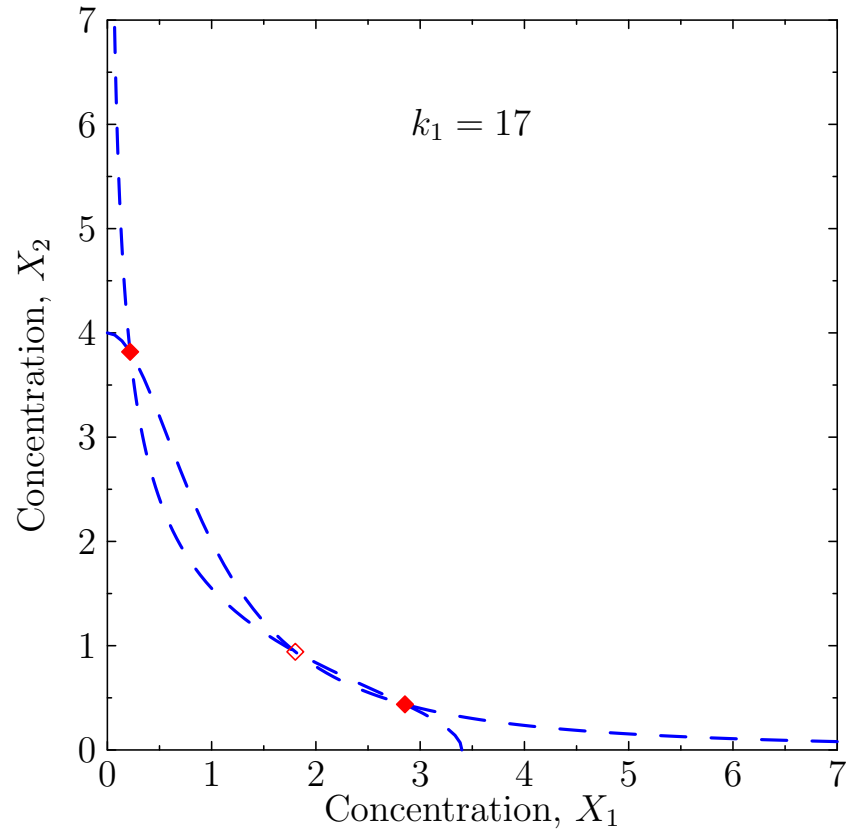



Varying k_1

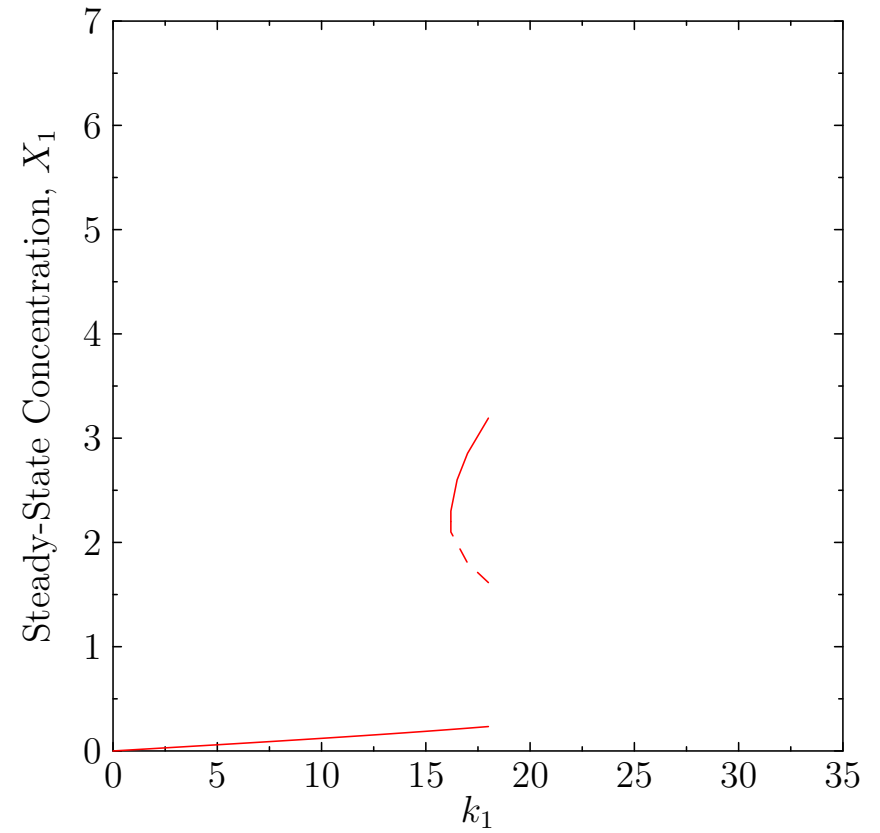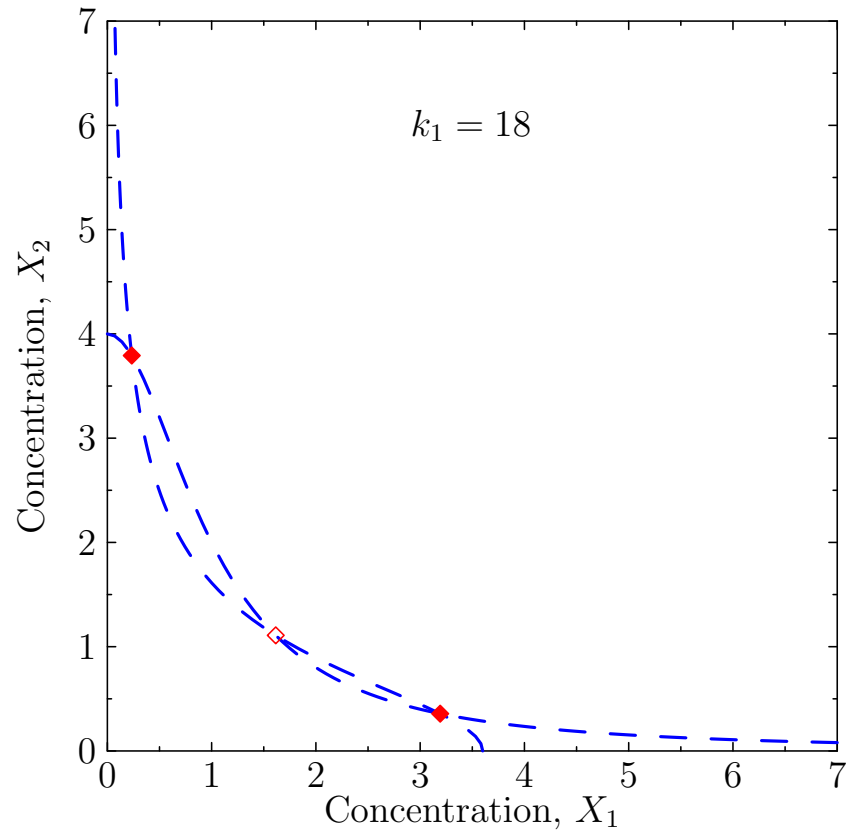



Varying k_1

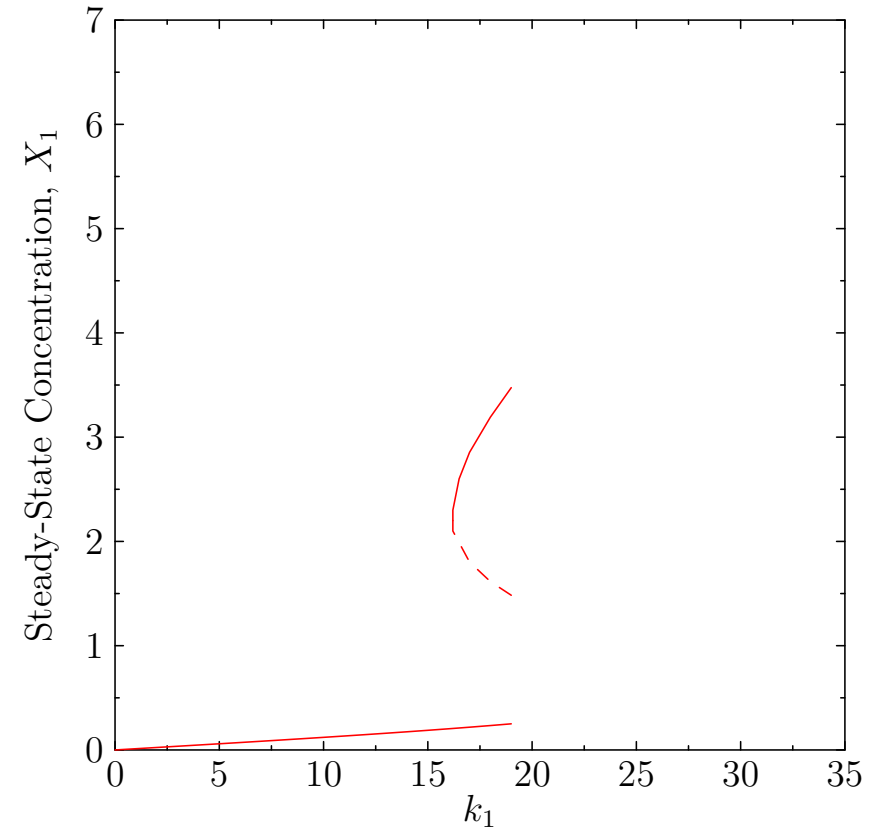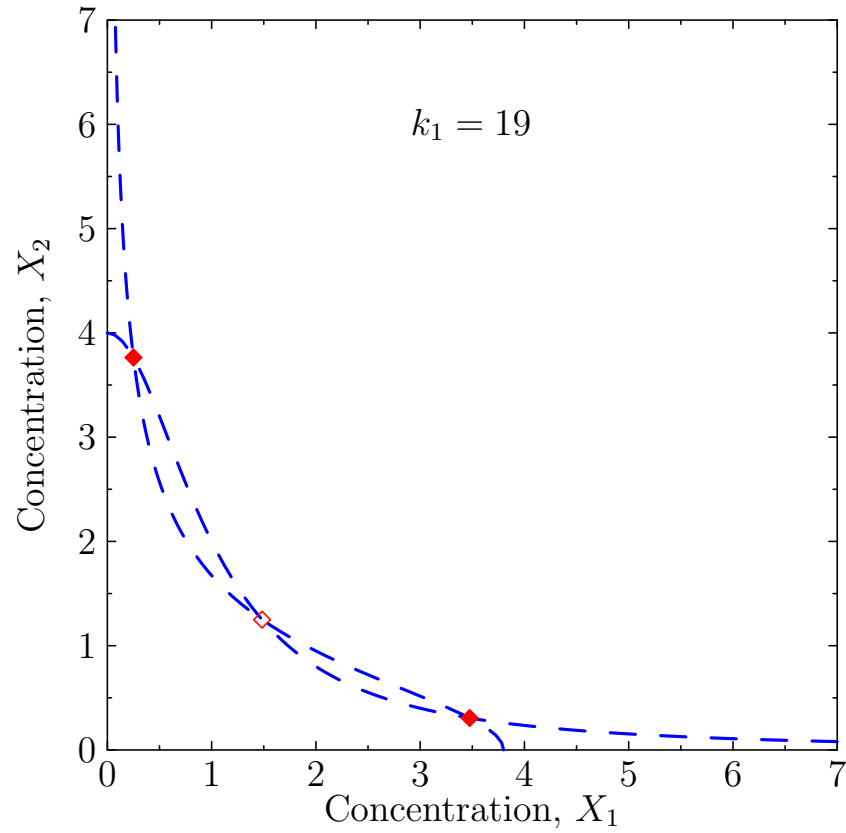



Varying k_1

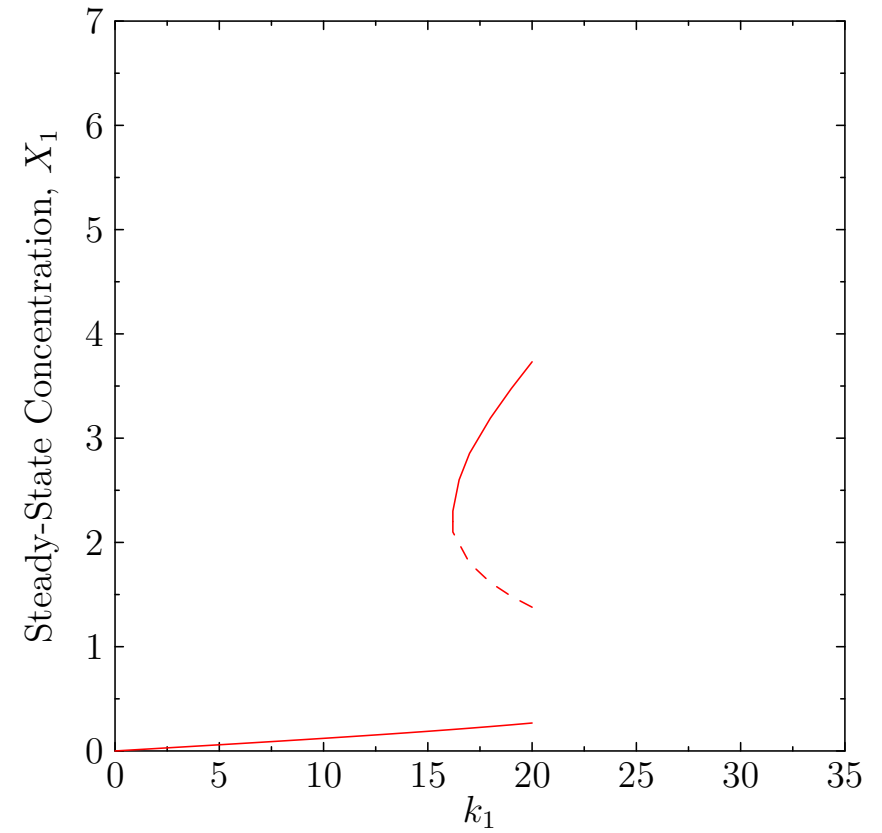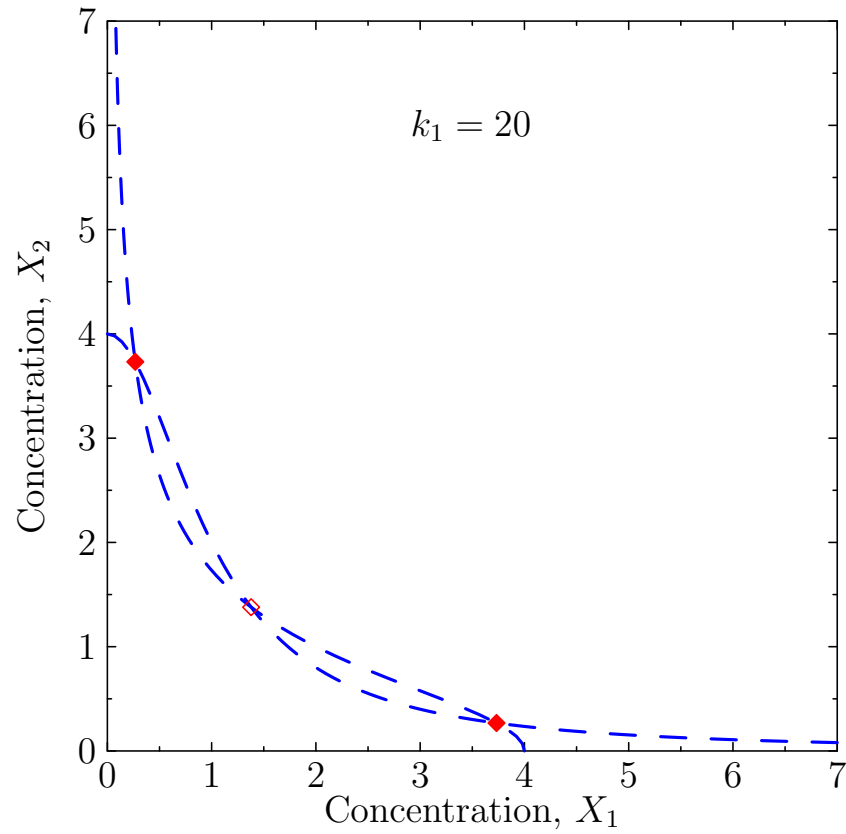



Varying k_1

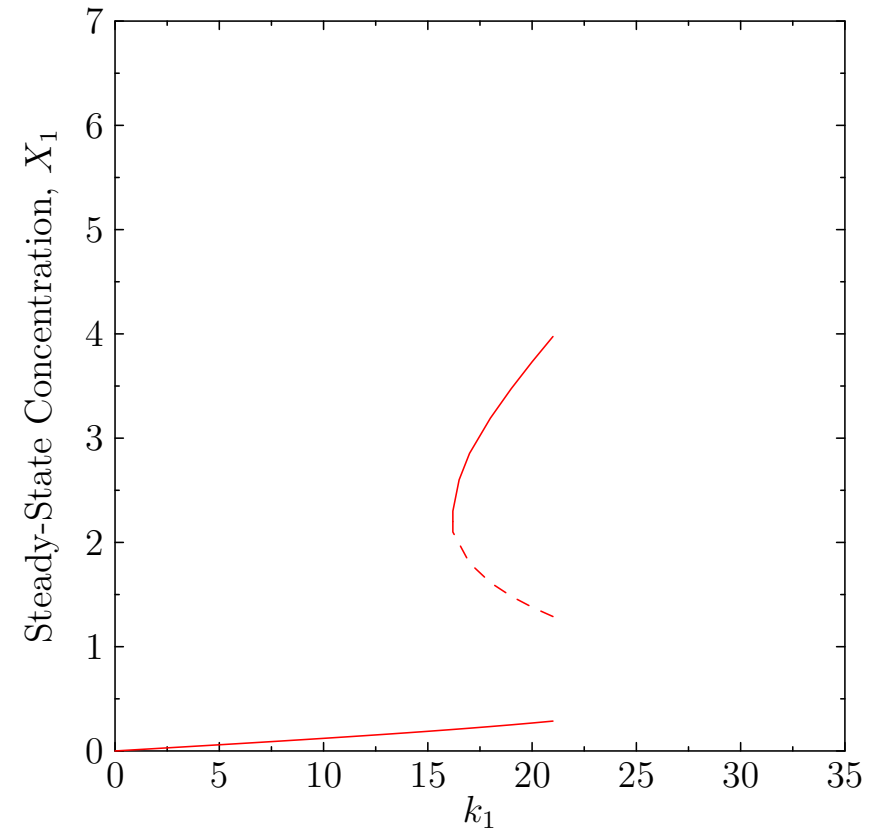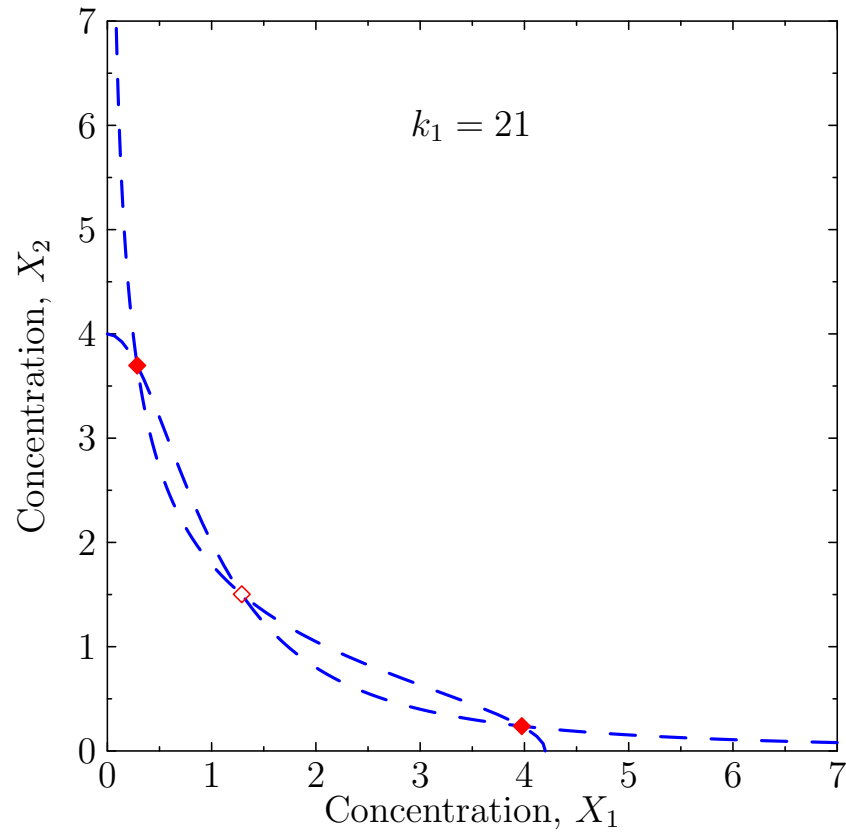



Varying k_1

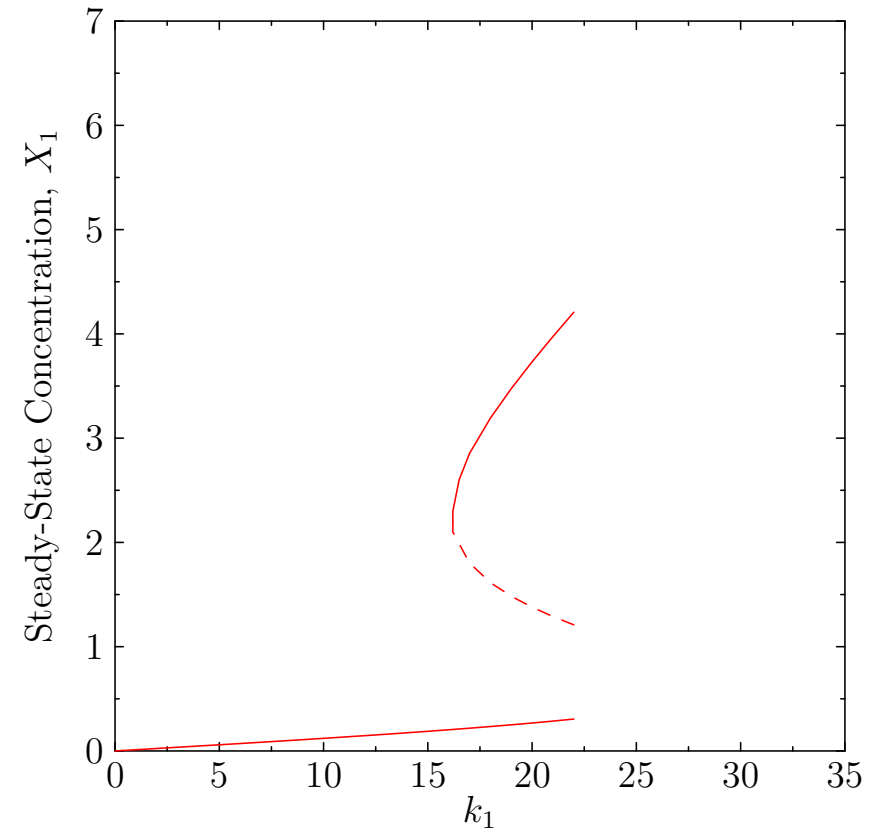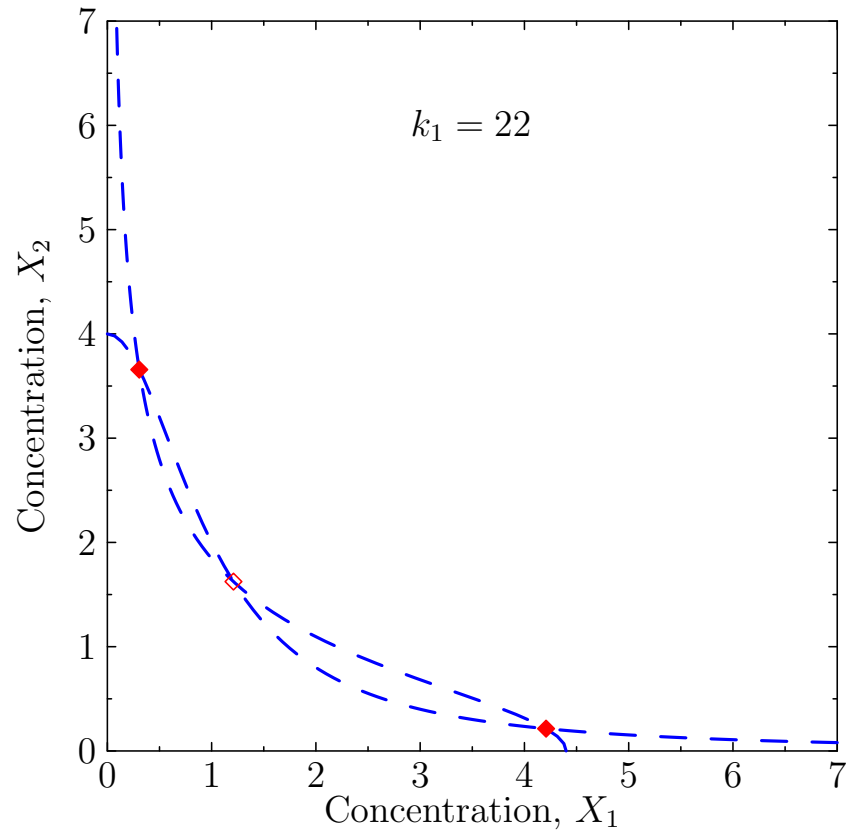



Varying k_1

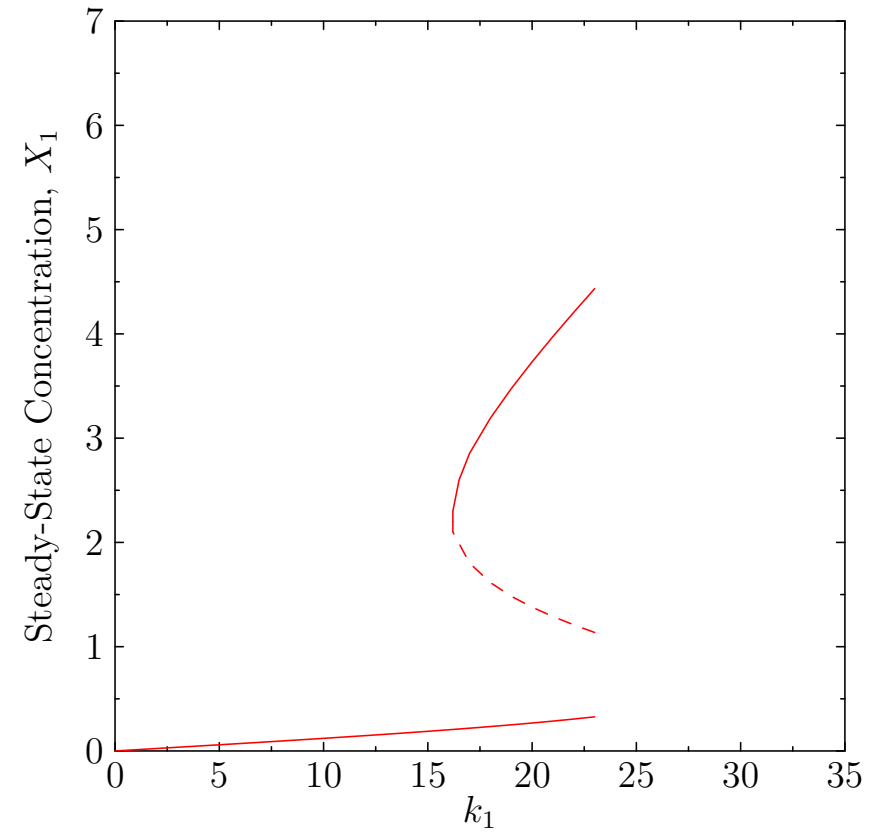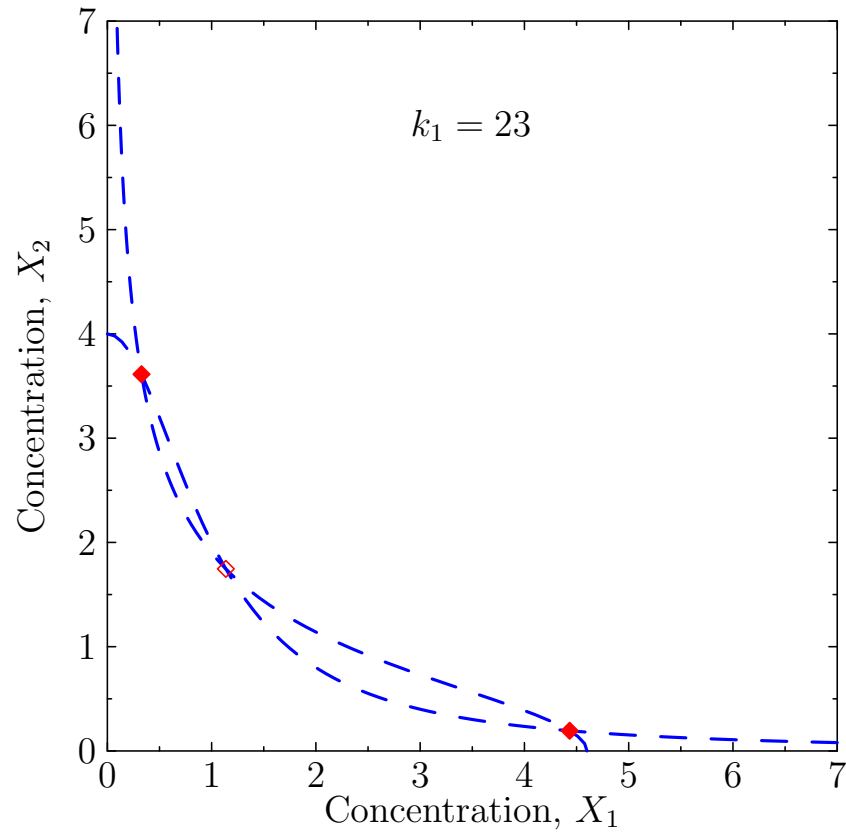



Varying k_1

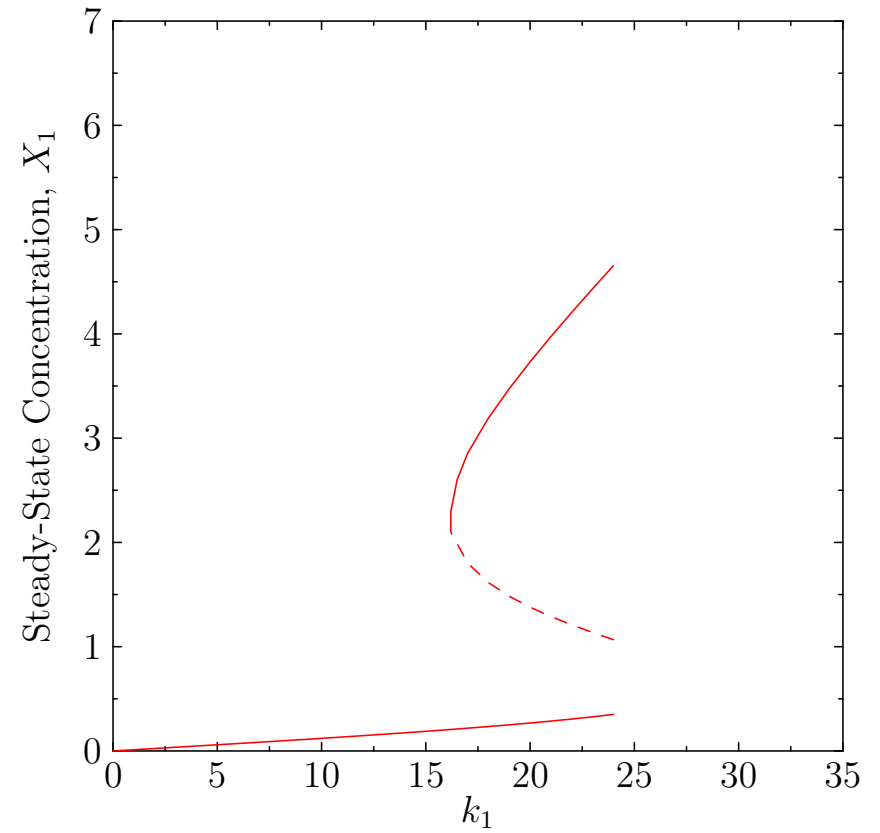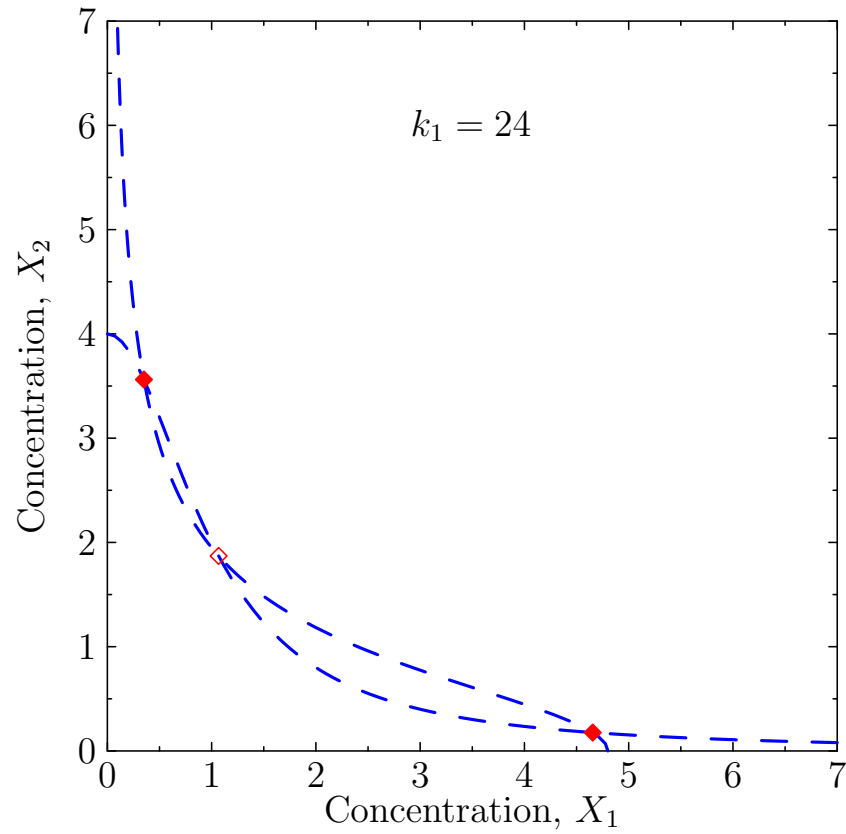



Varying k_1

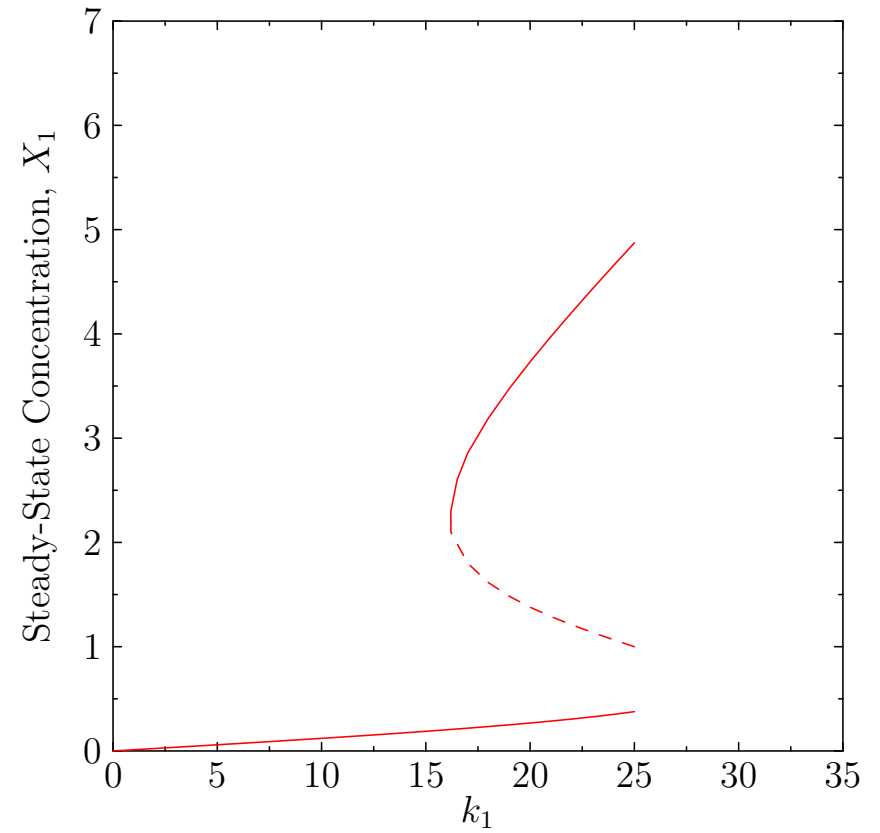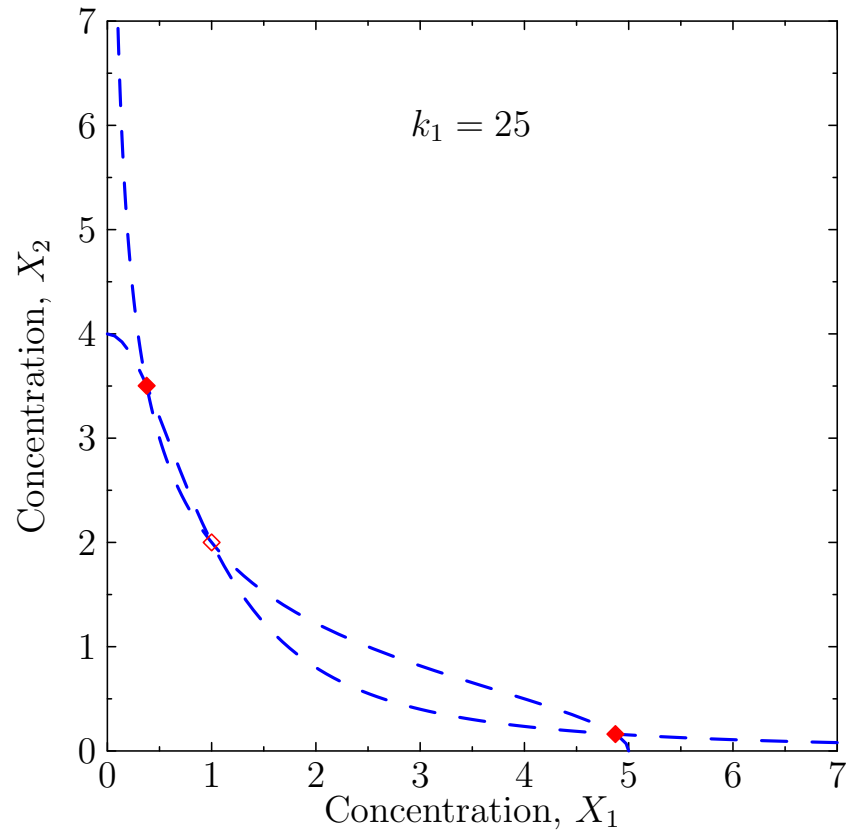



Varying k_1

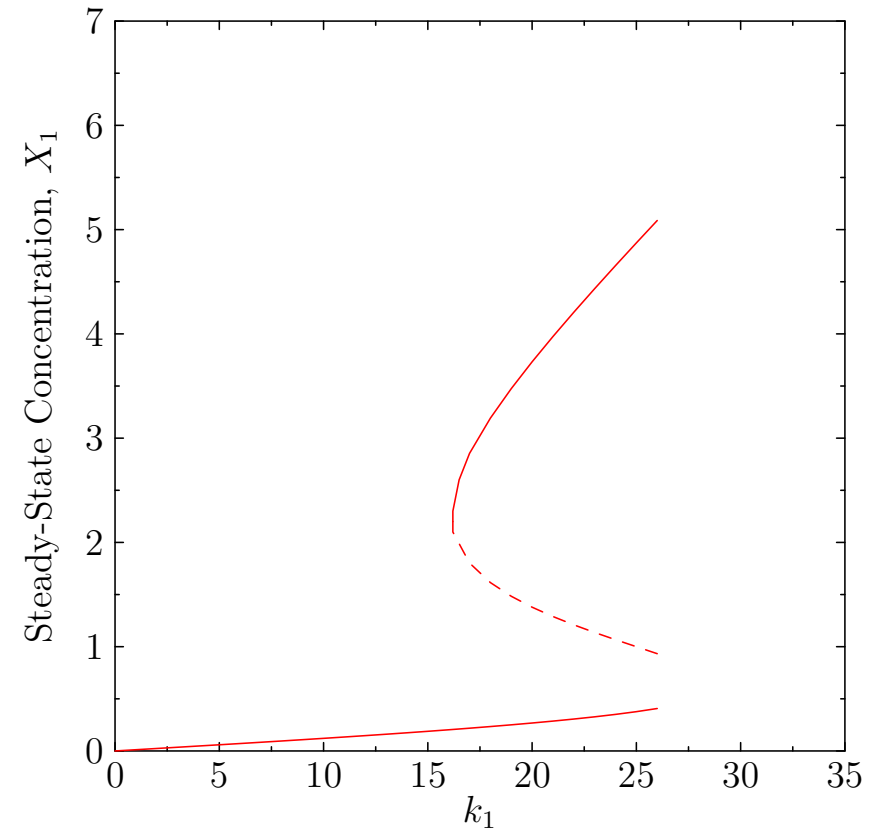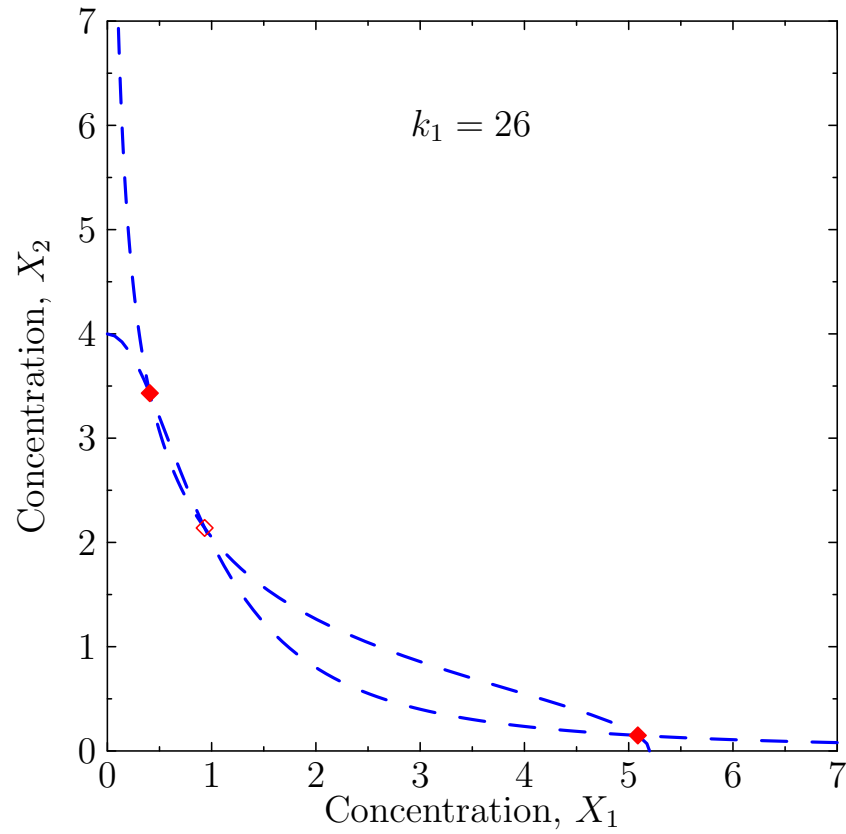



Varying k_1

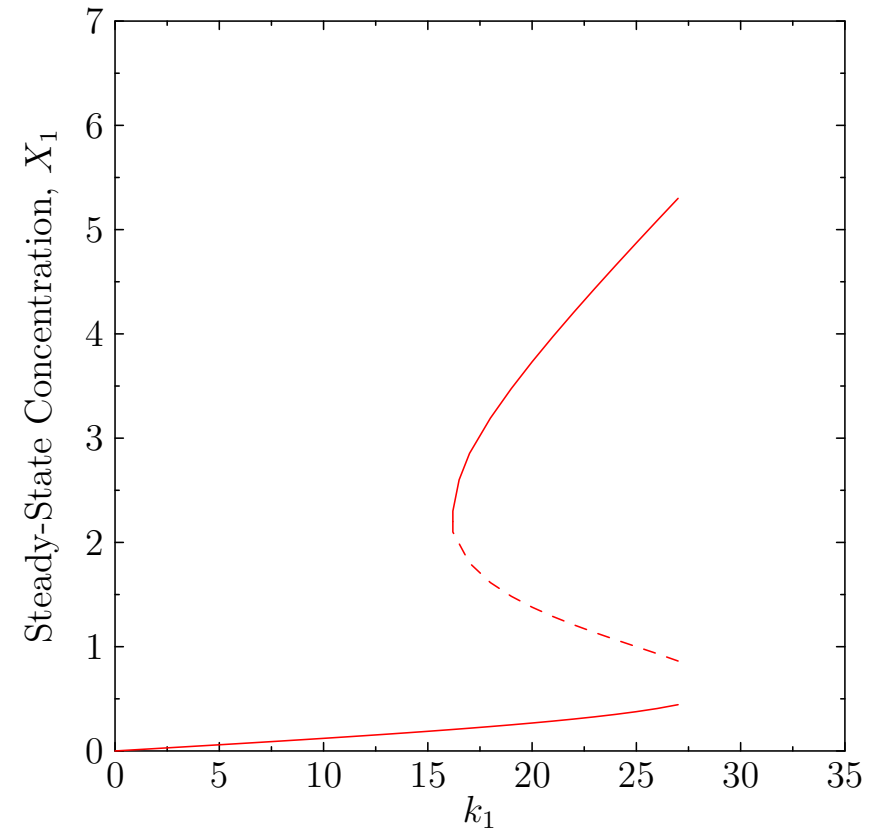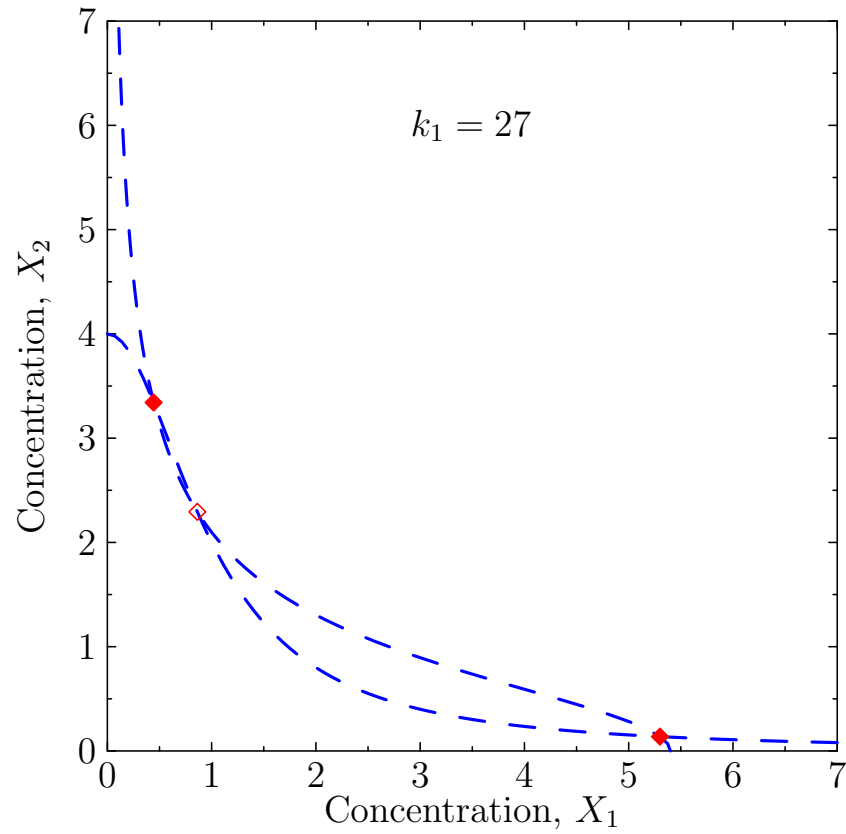



Varying k_1

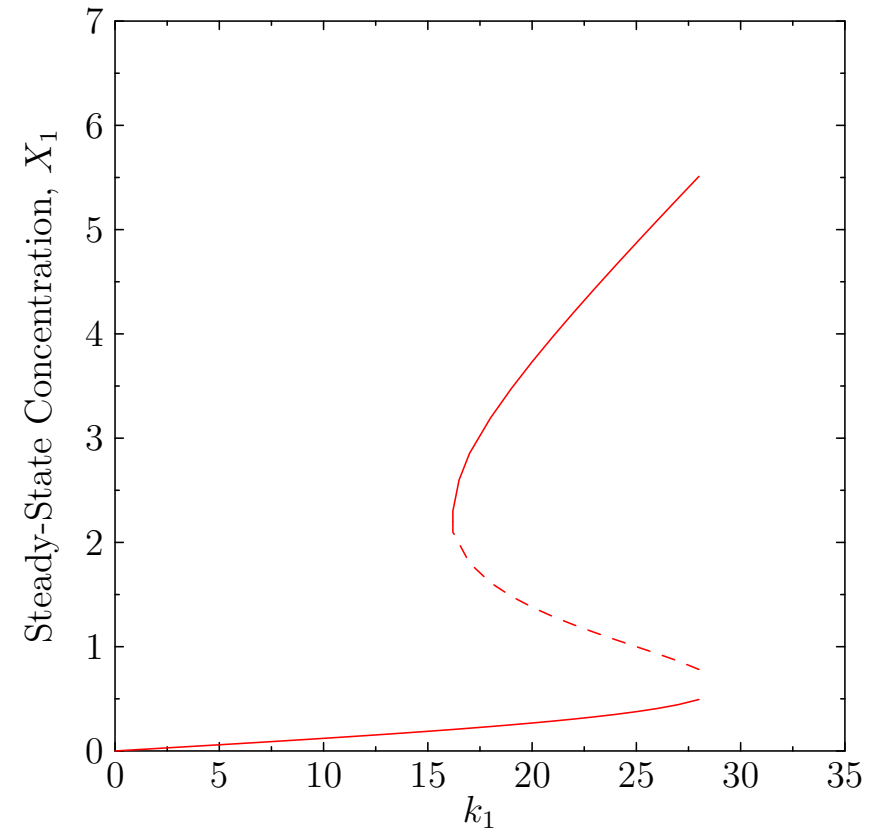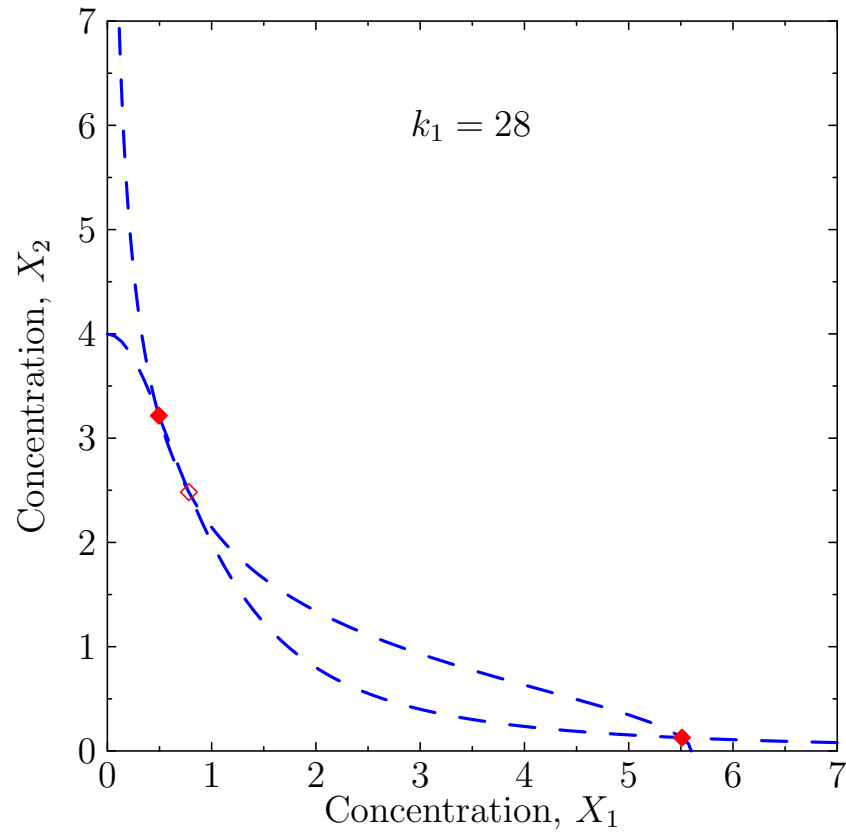



Varying k_1

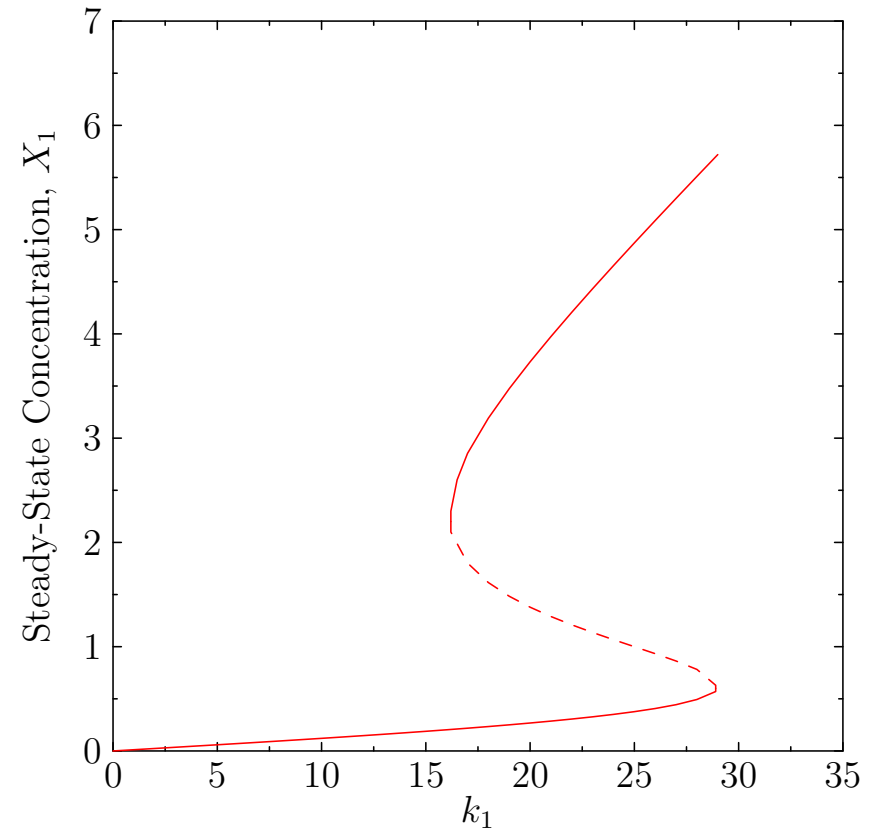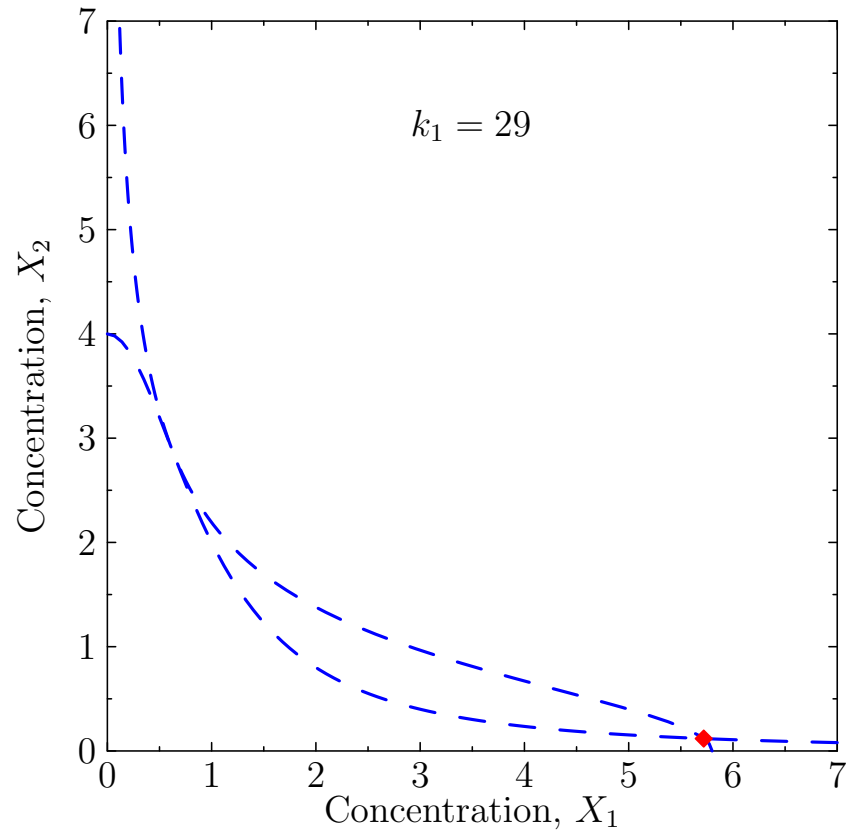



Varying k_1

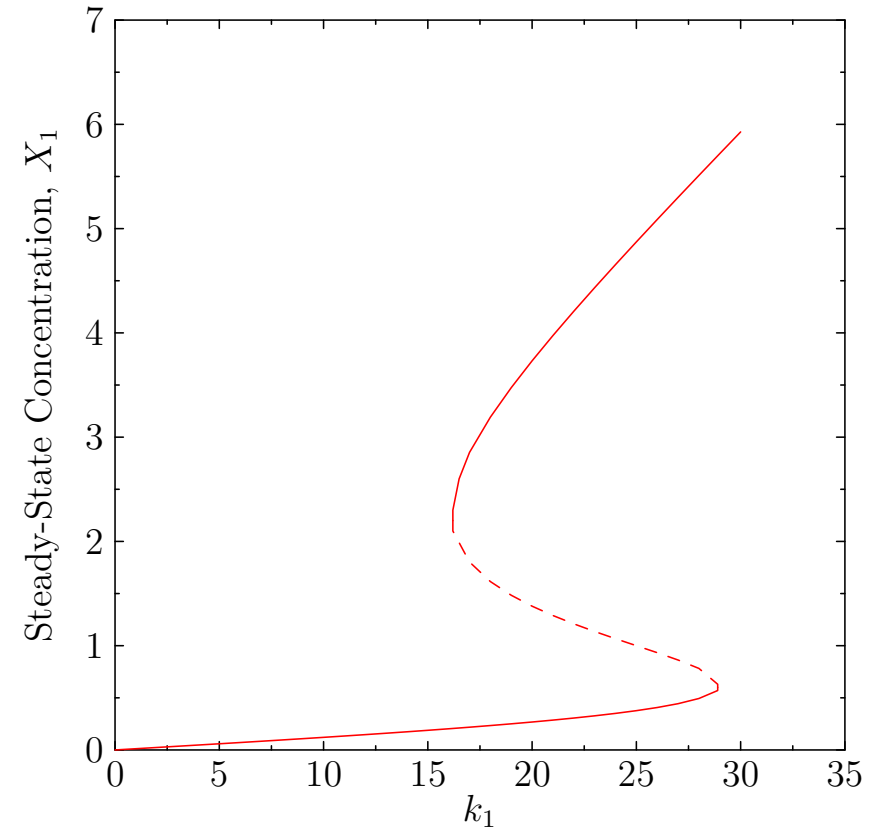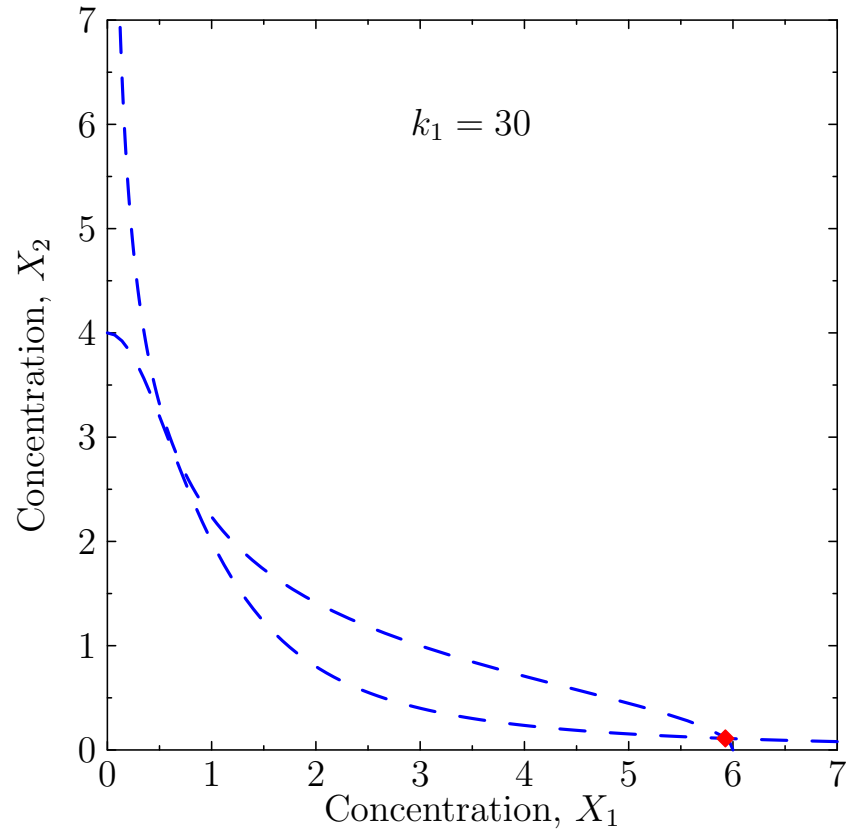



Varying k_1

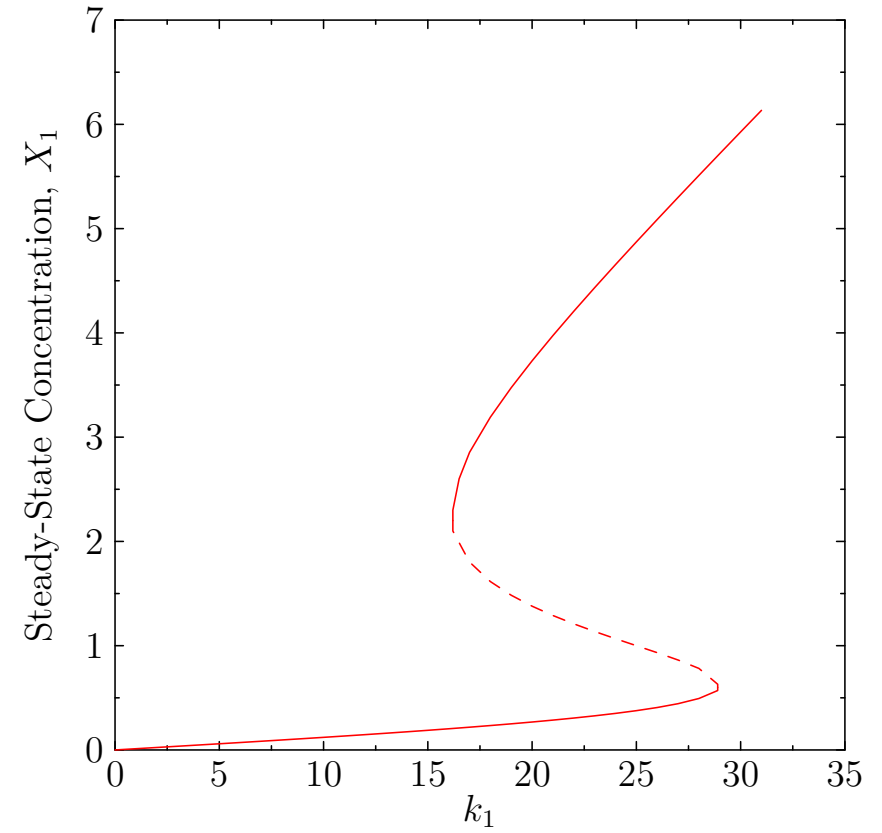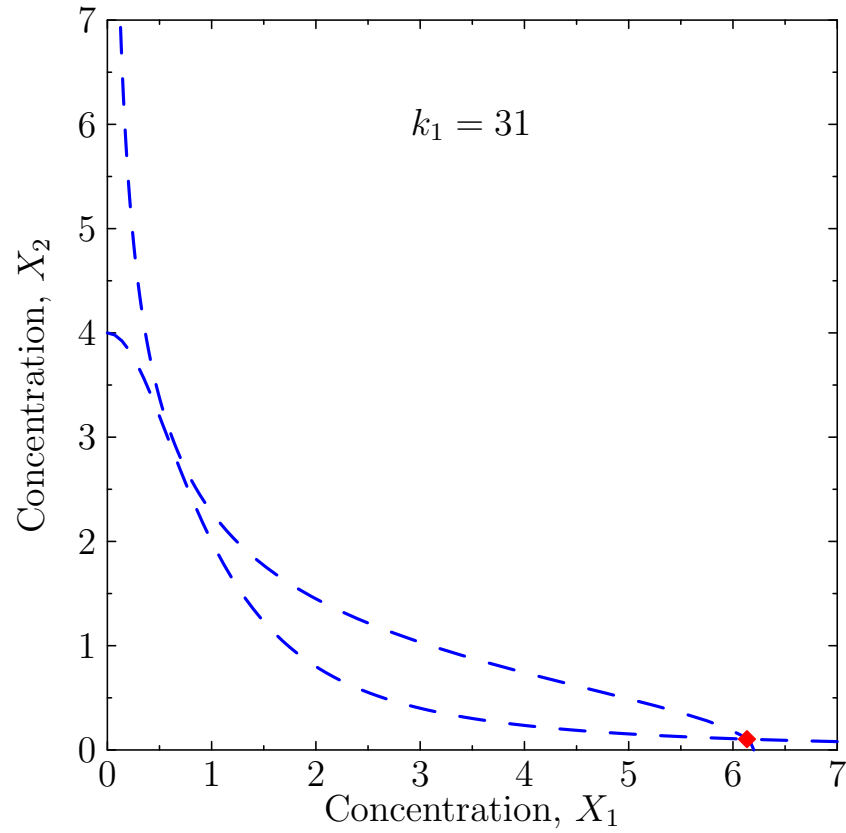



Varying k_1

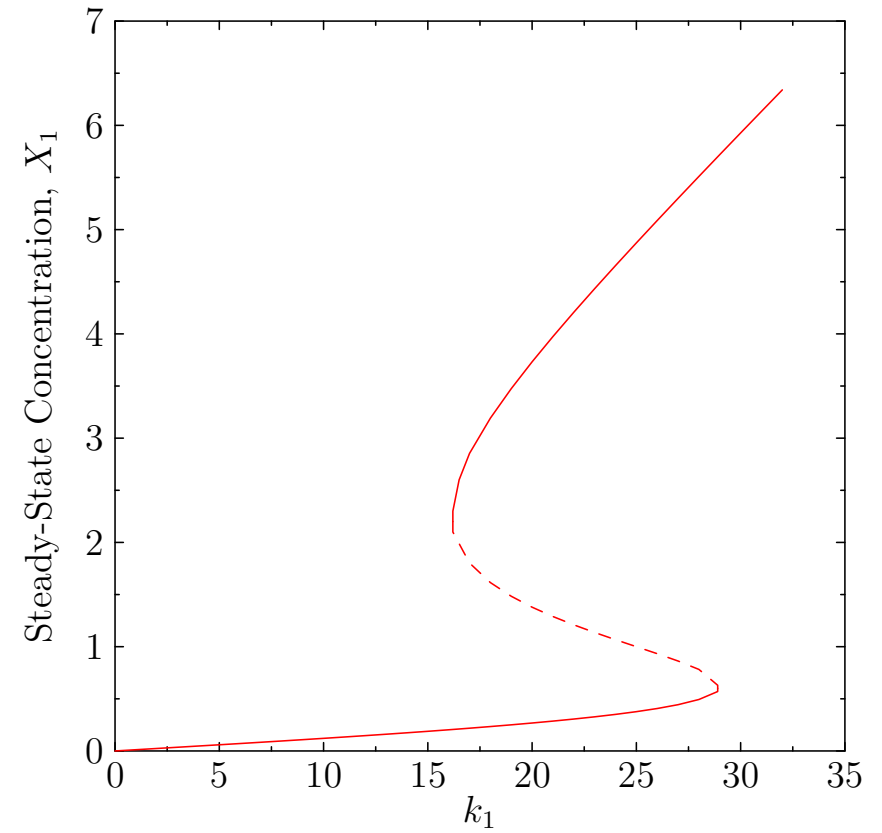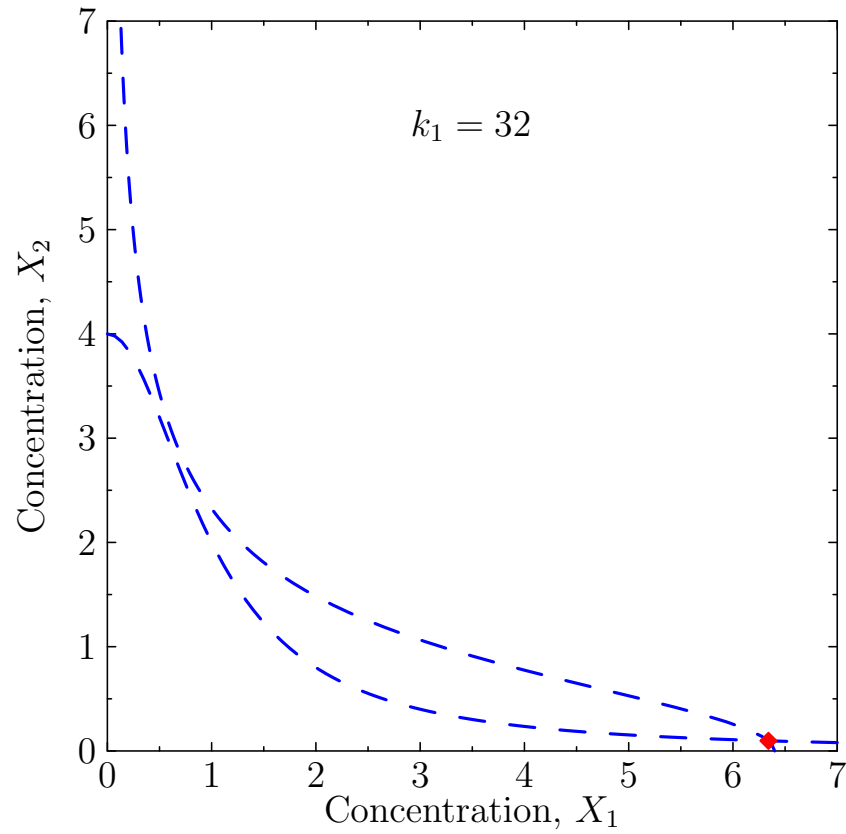



Varying k_1

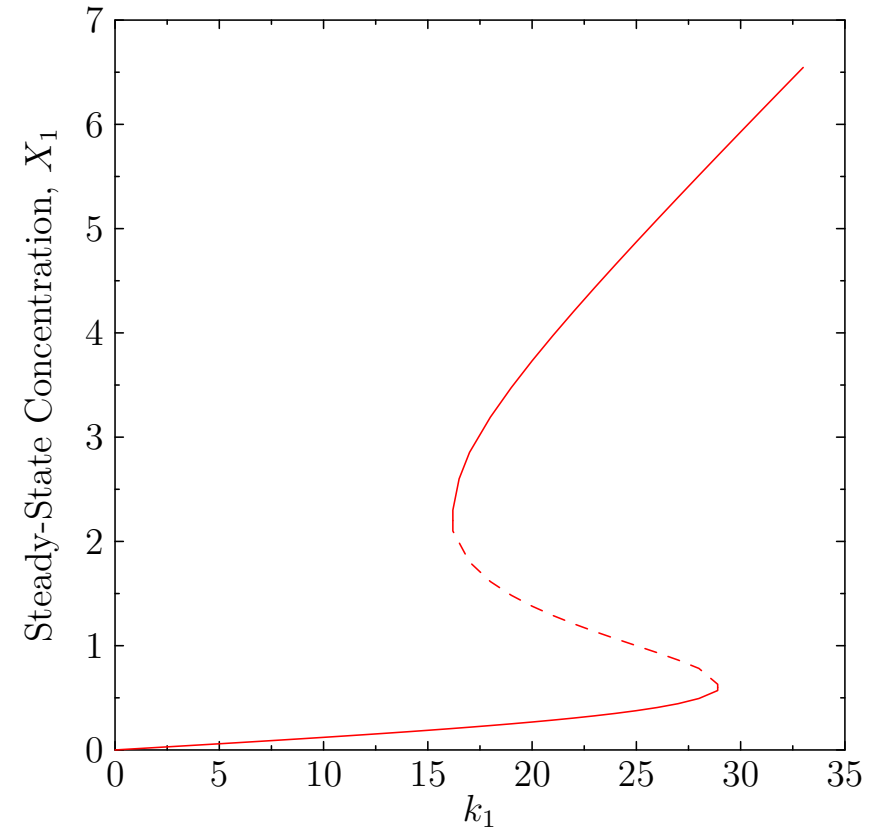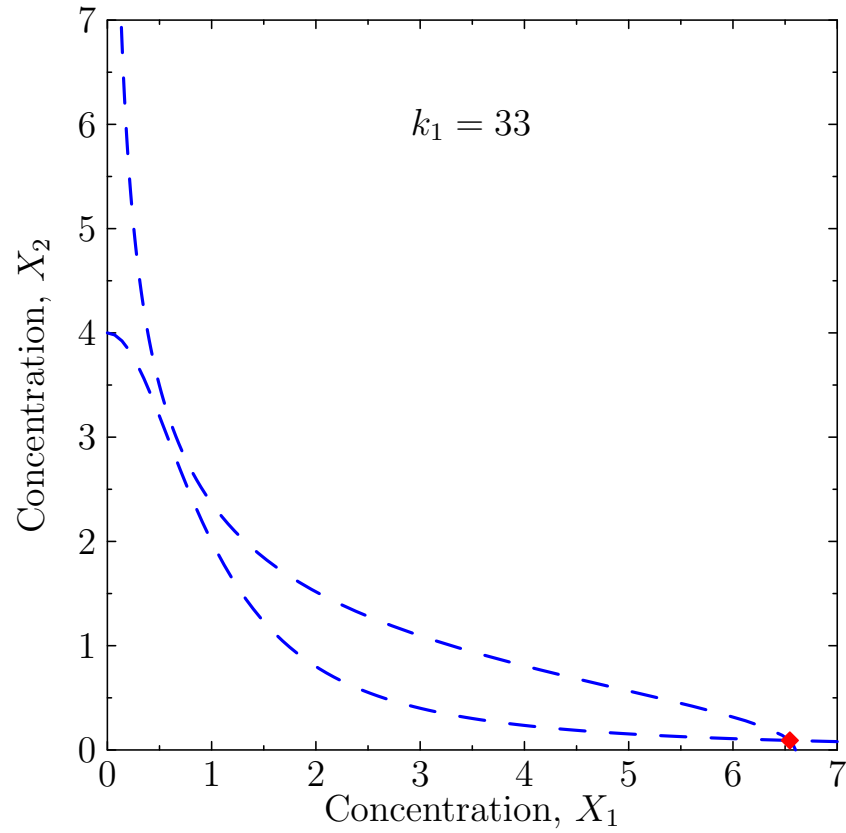


Varying k_1

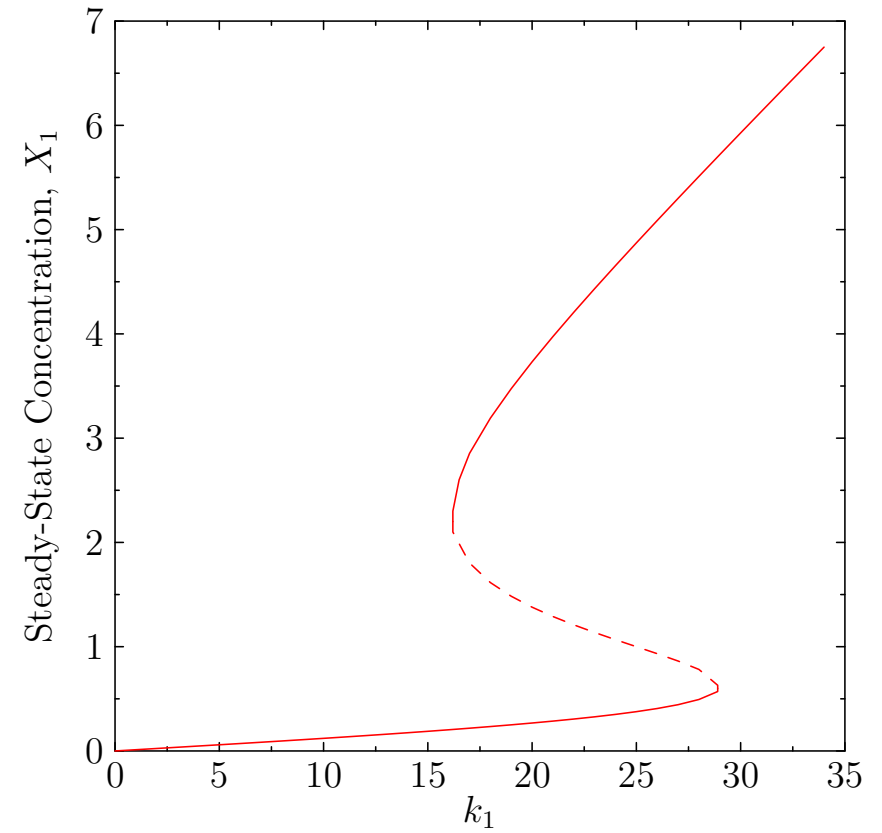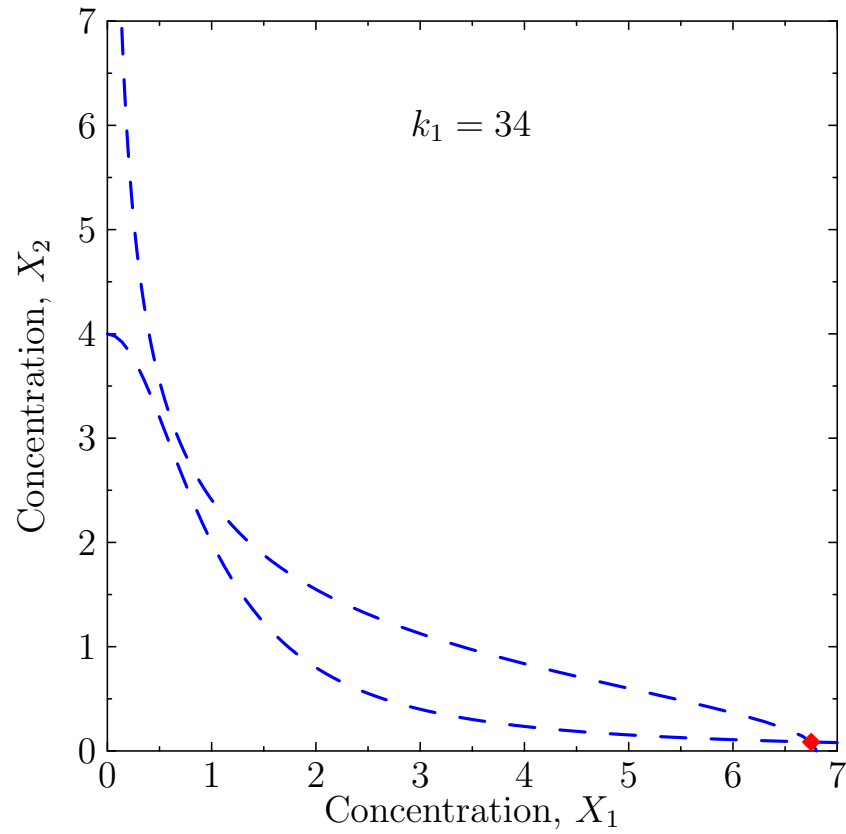


Varying k_1

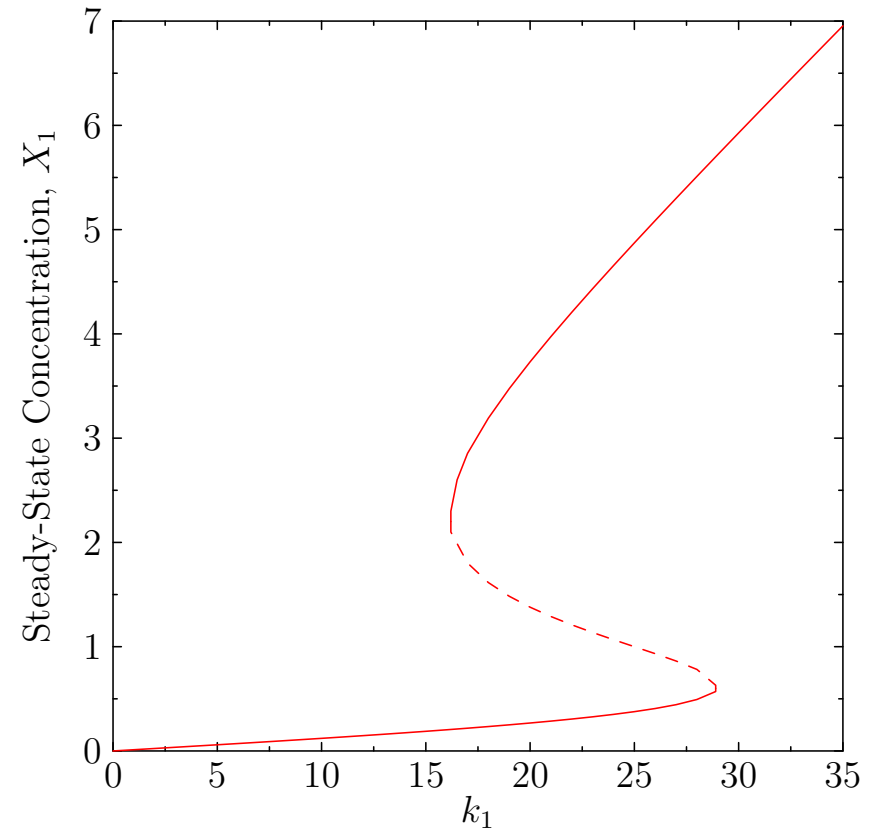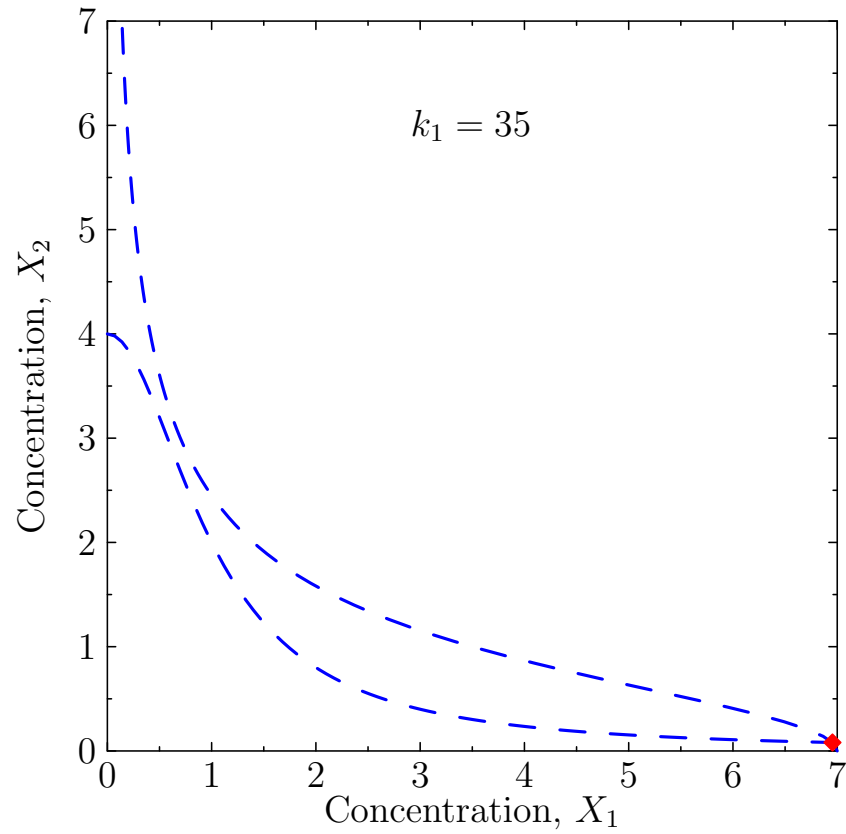


Hysteresis

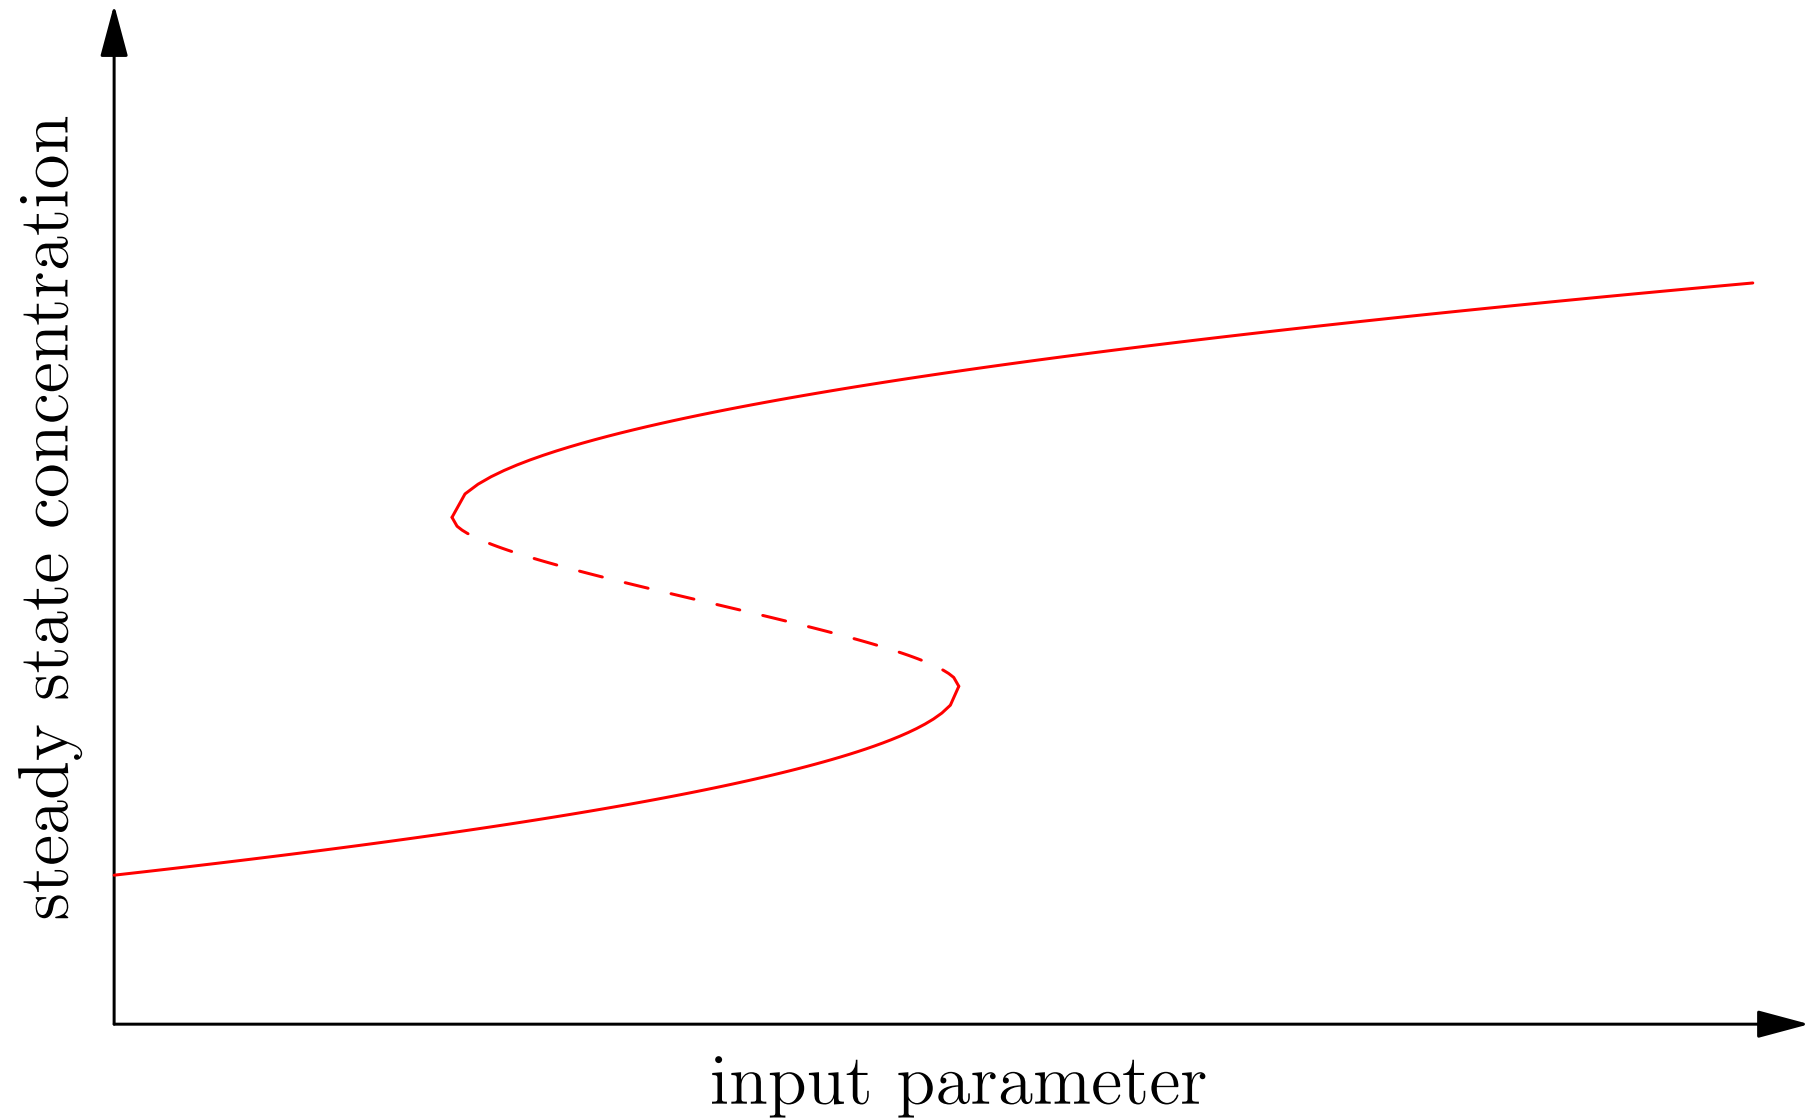


Hysteresis

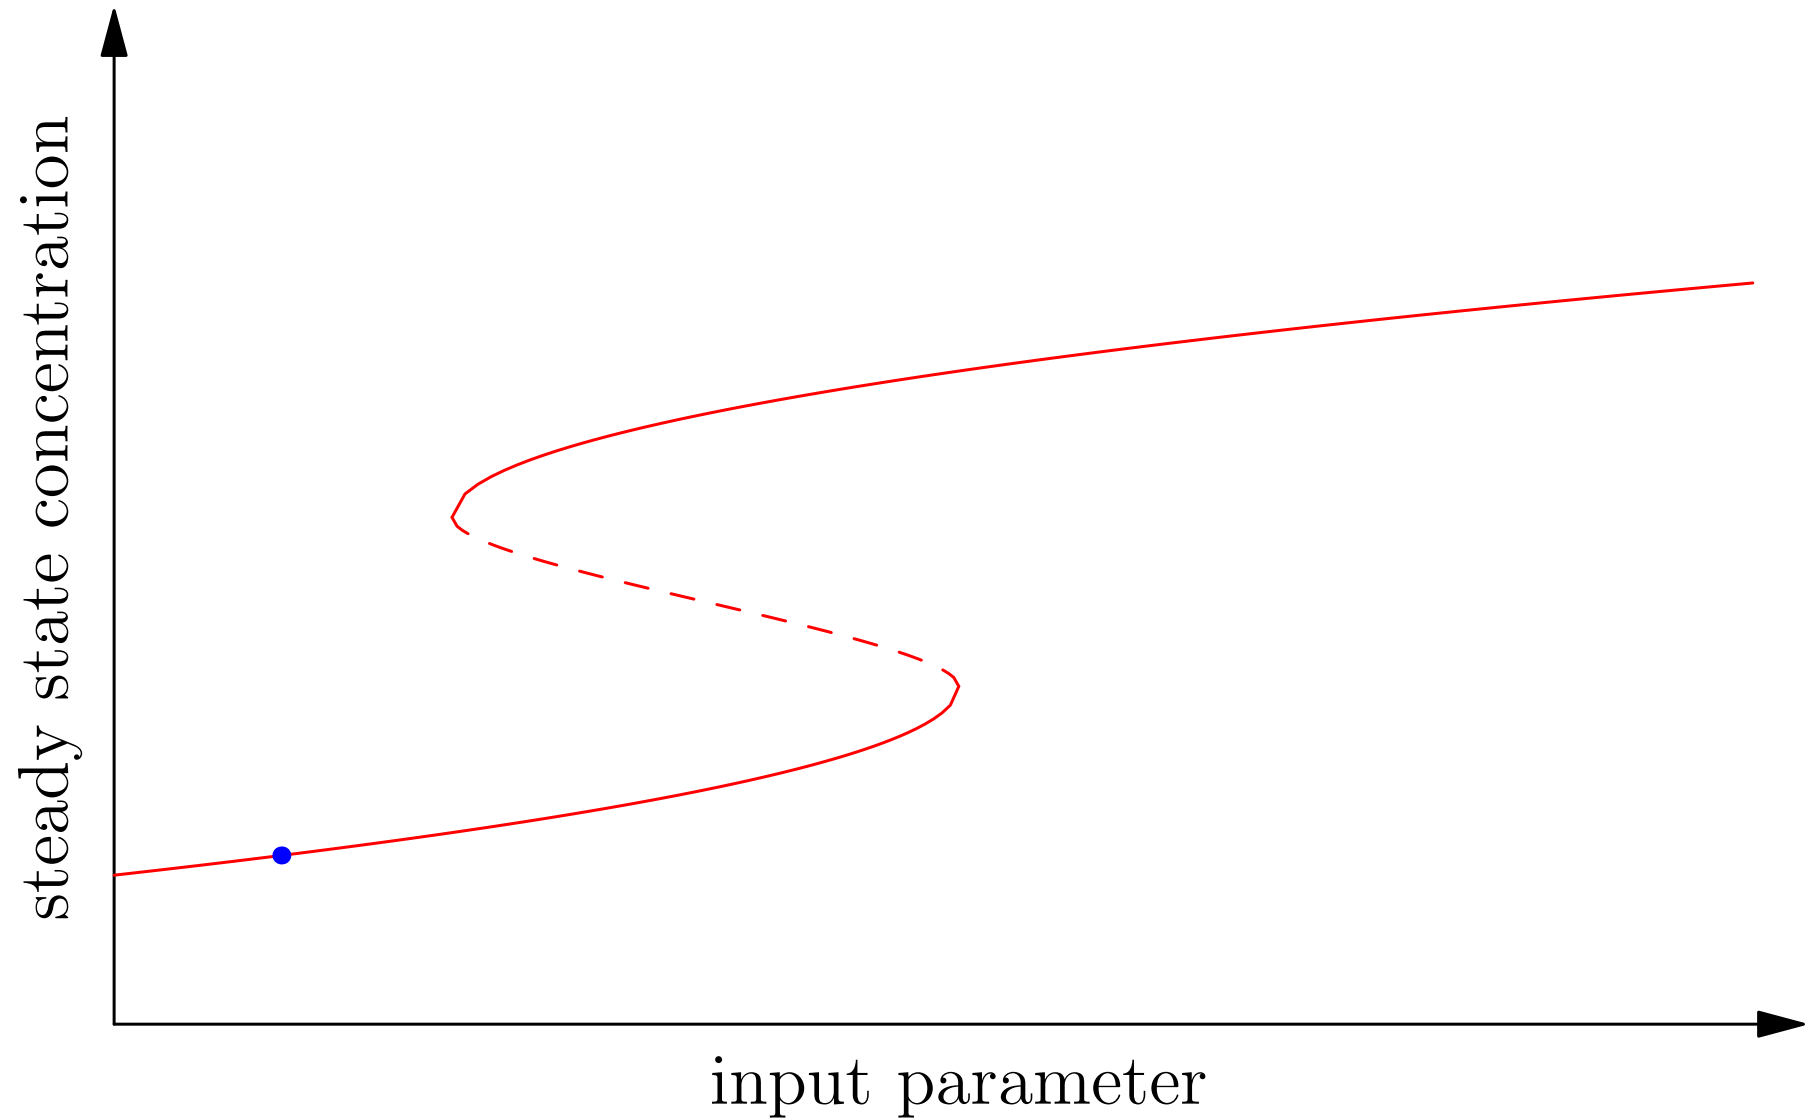


Hysteresis

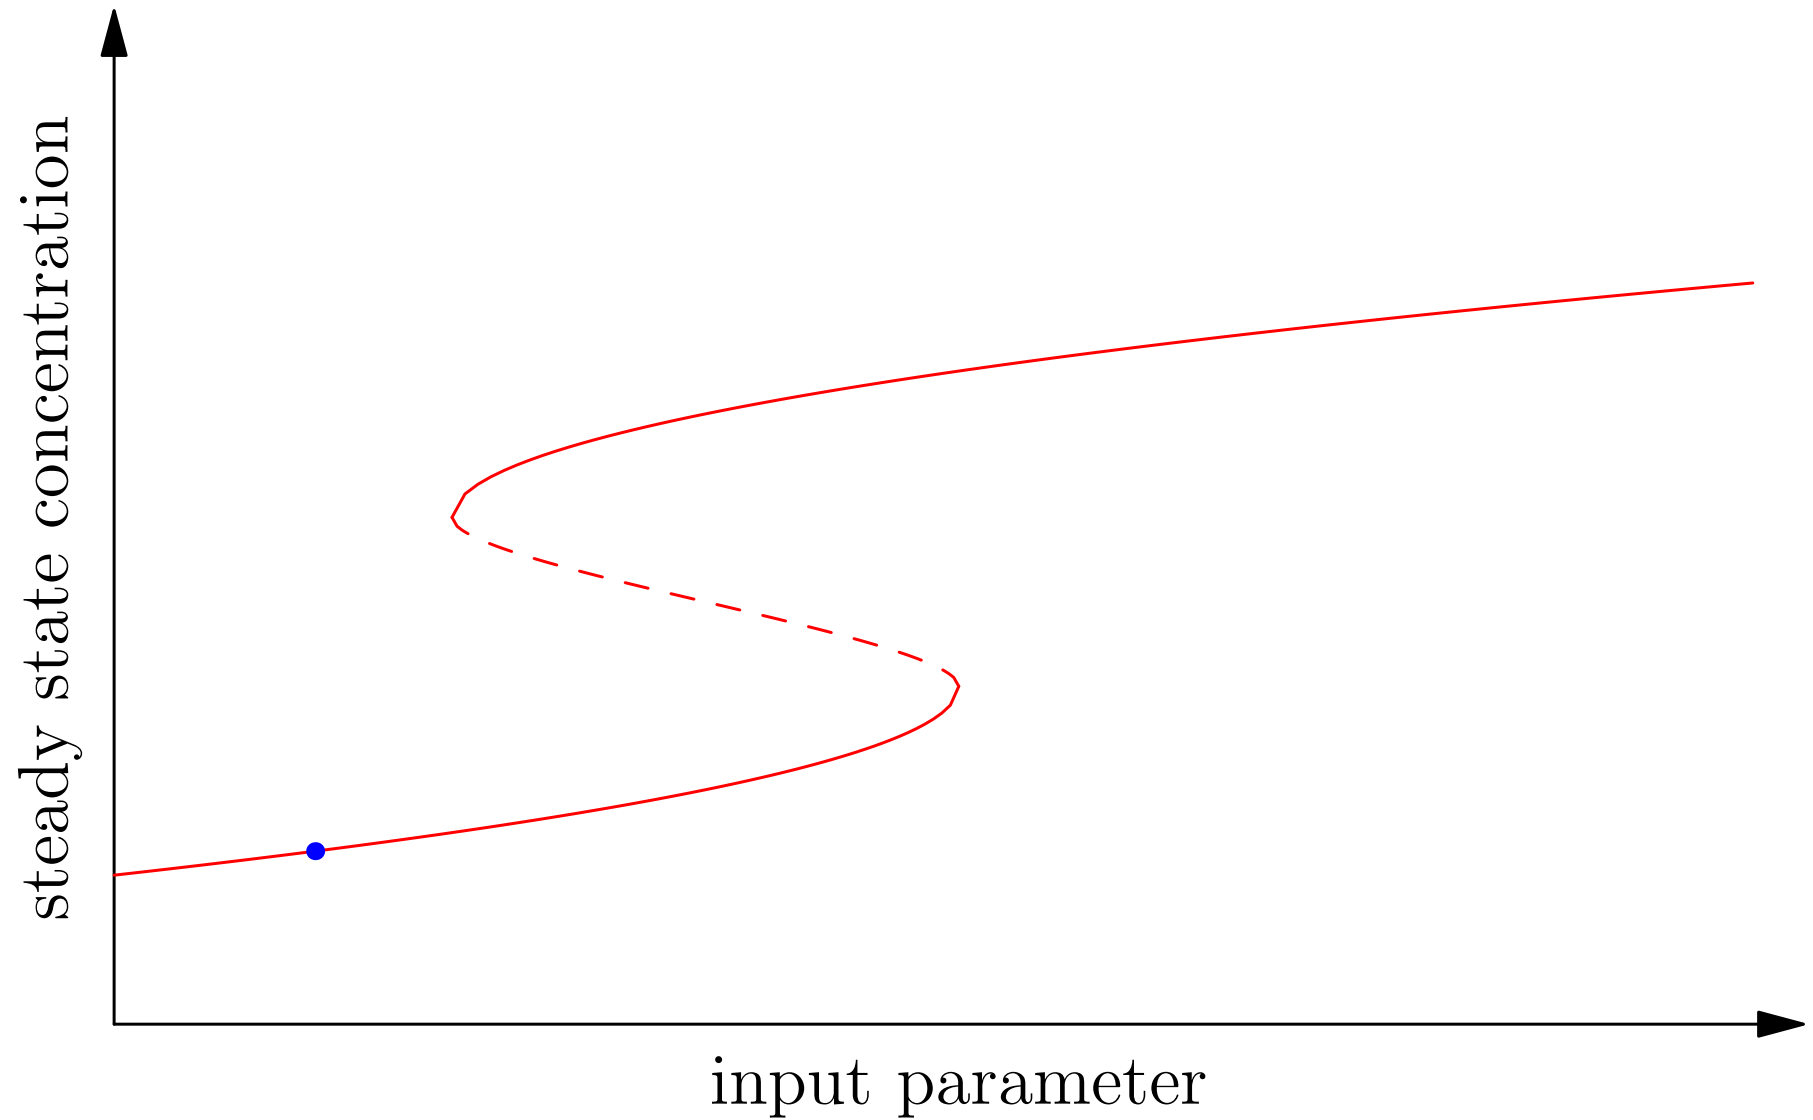


Hysteresis

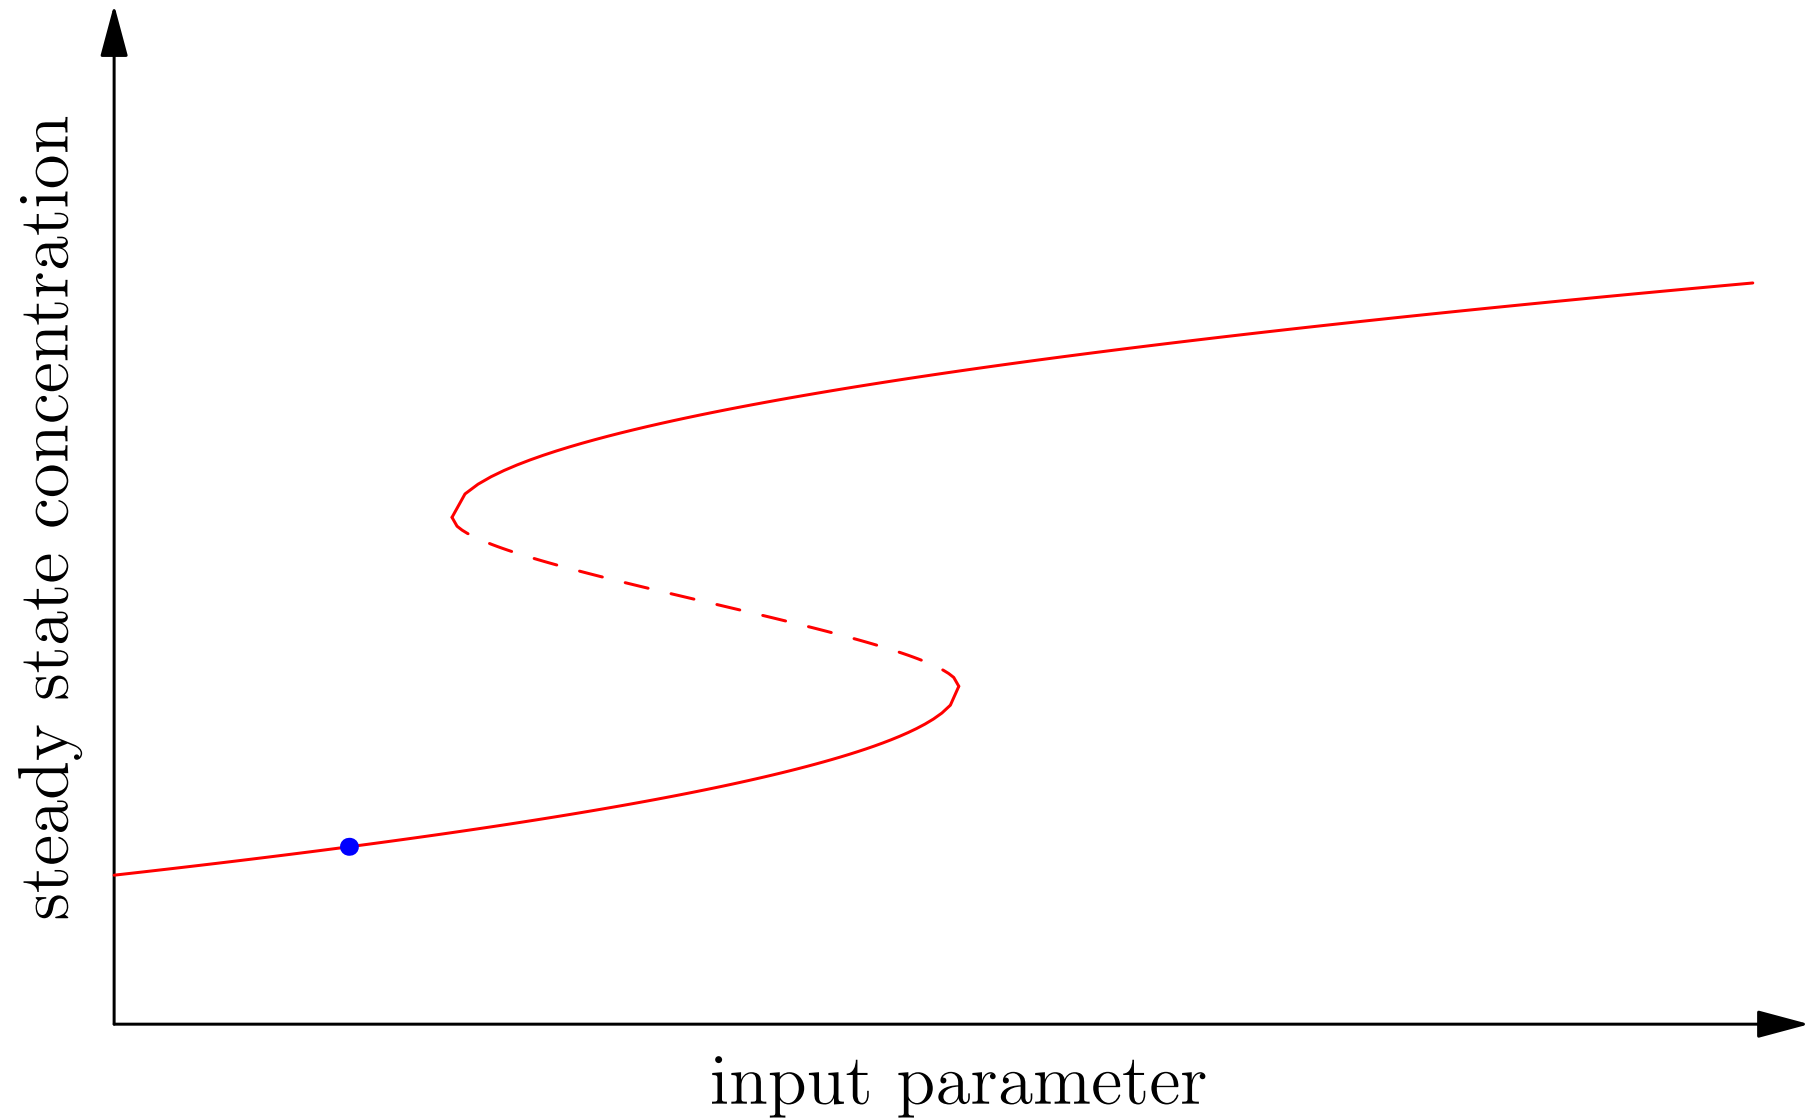


Hysteresis

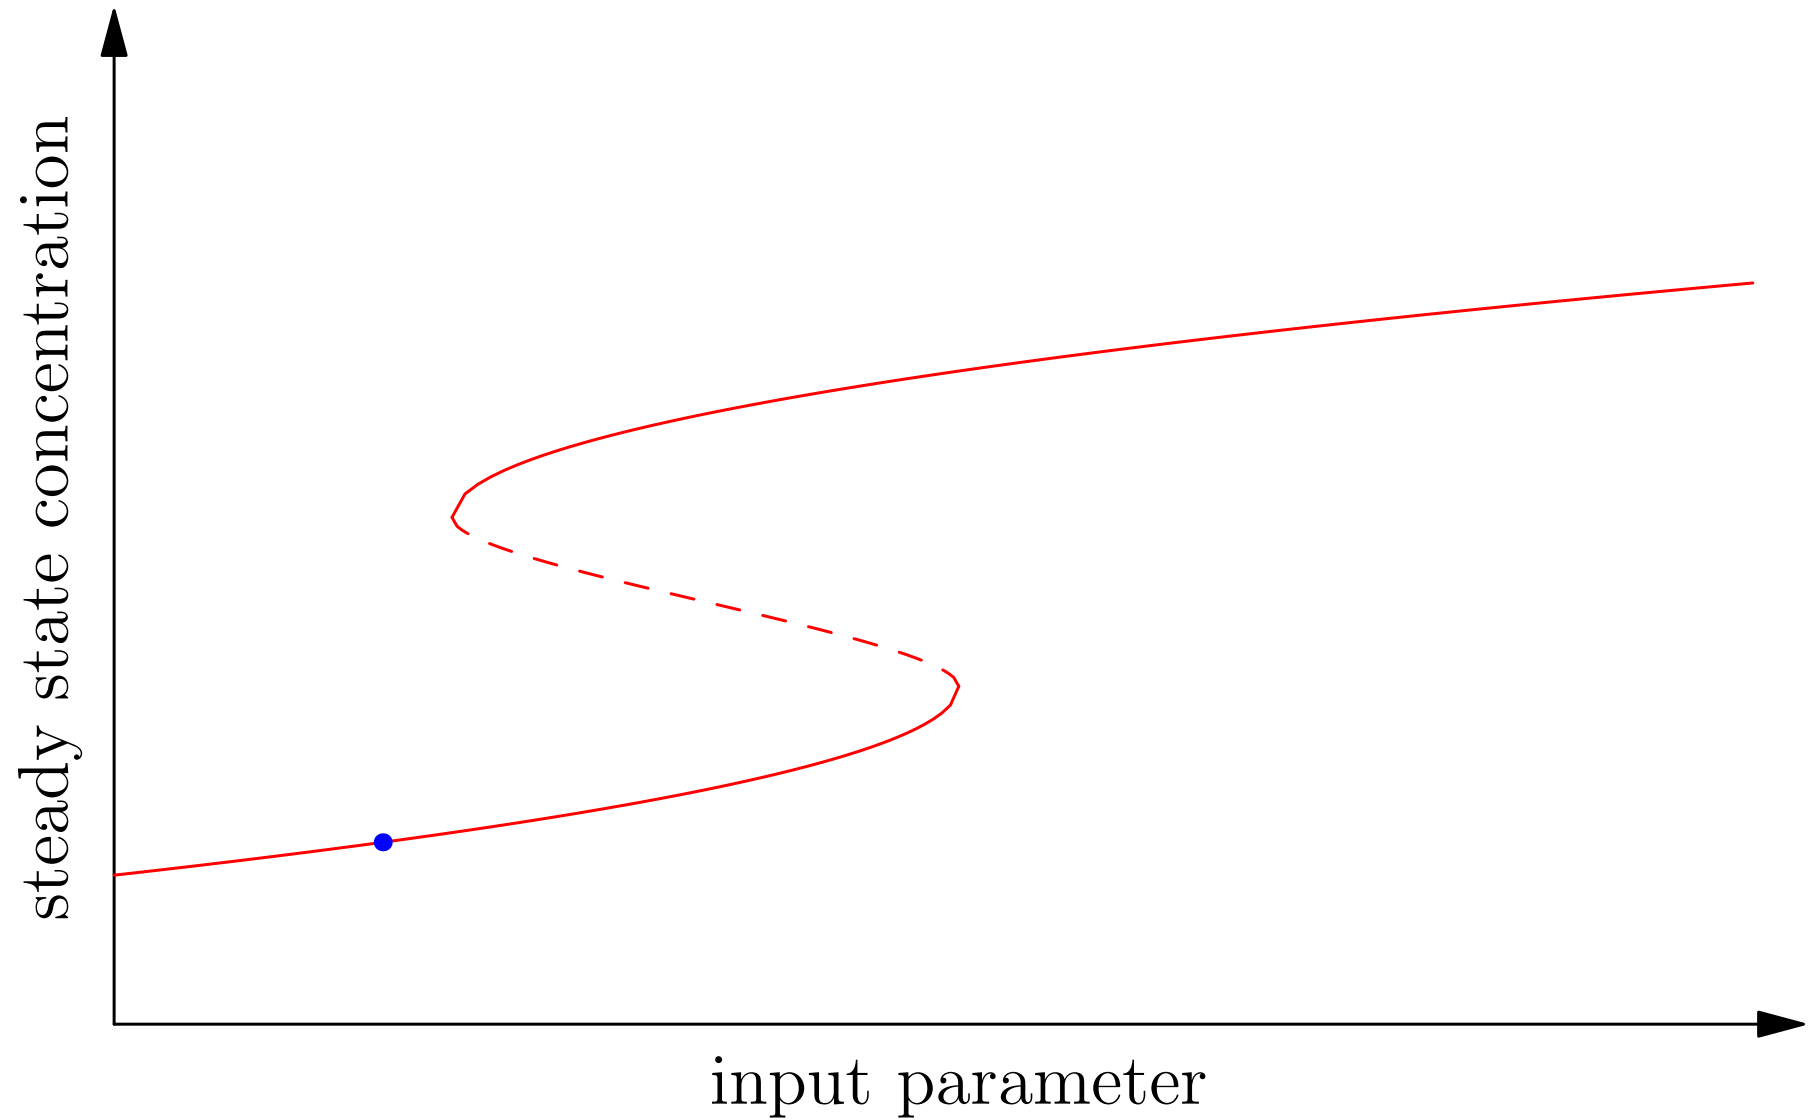


Hysteresis

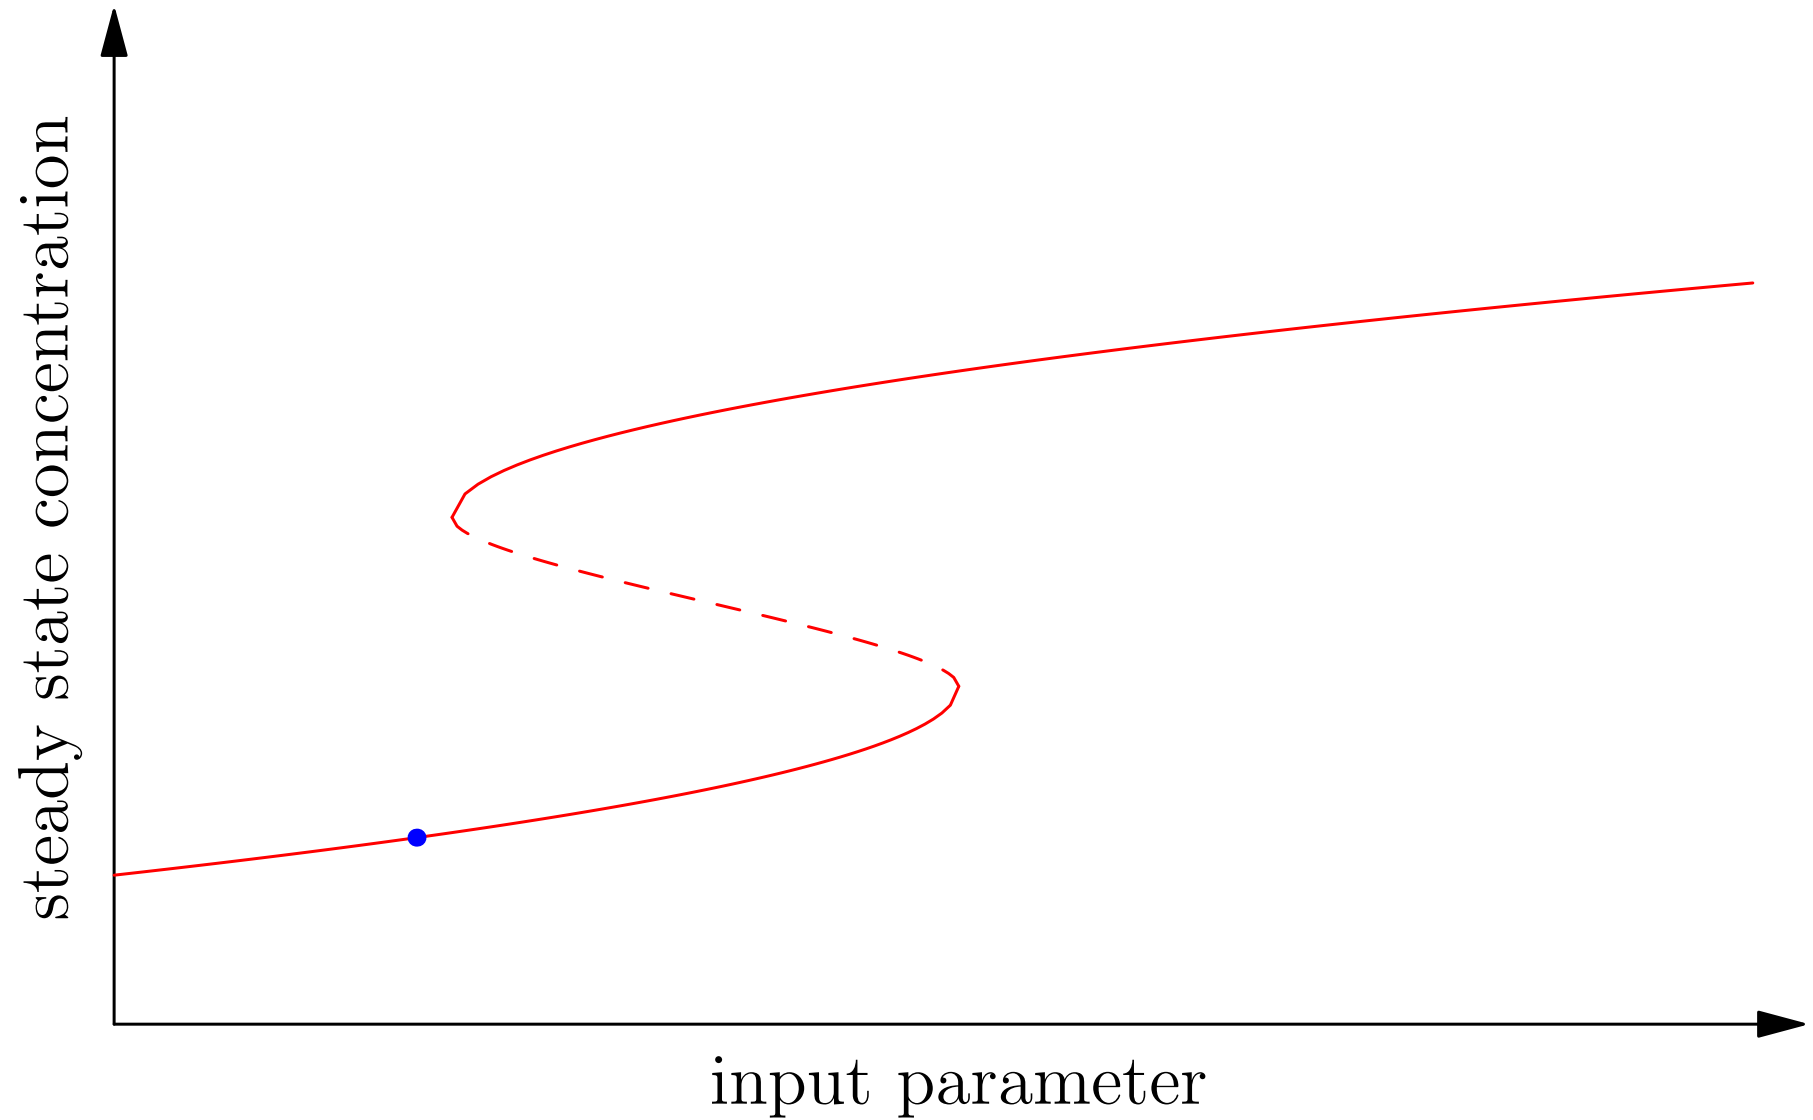


Hysteresis

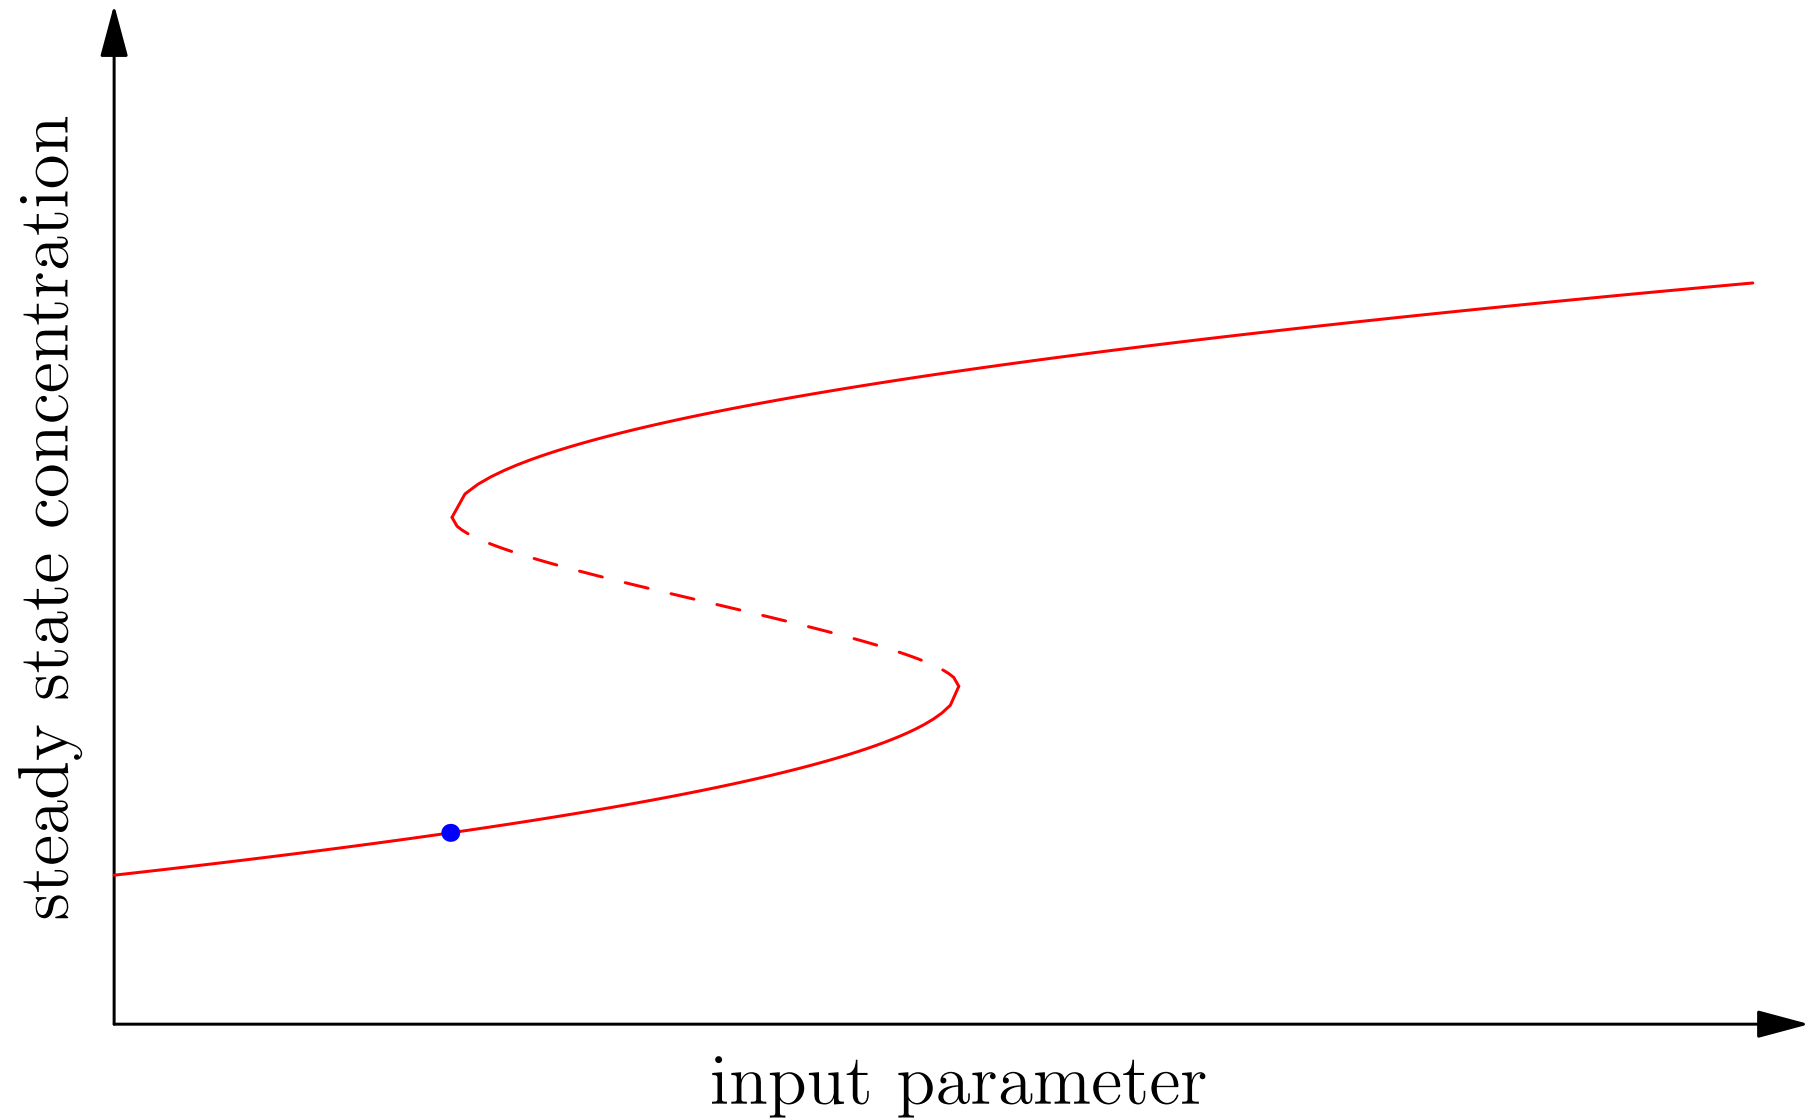


Hysteresis

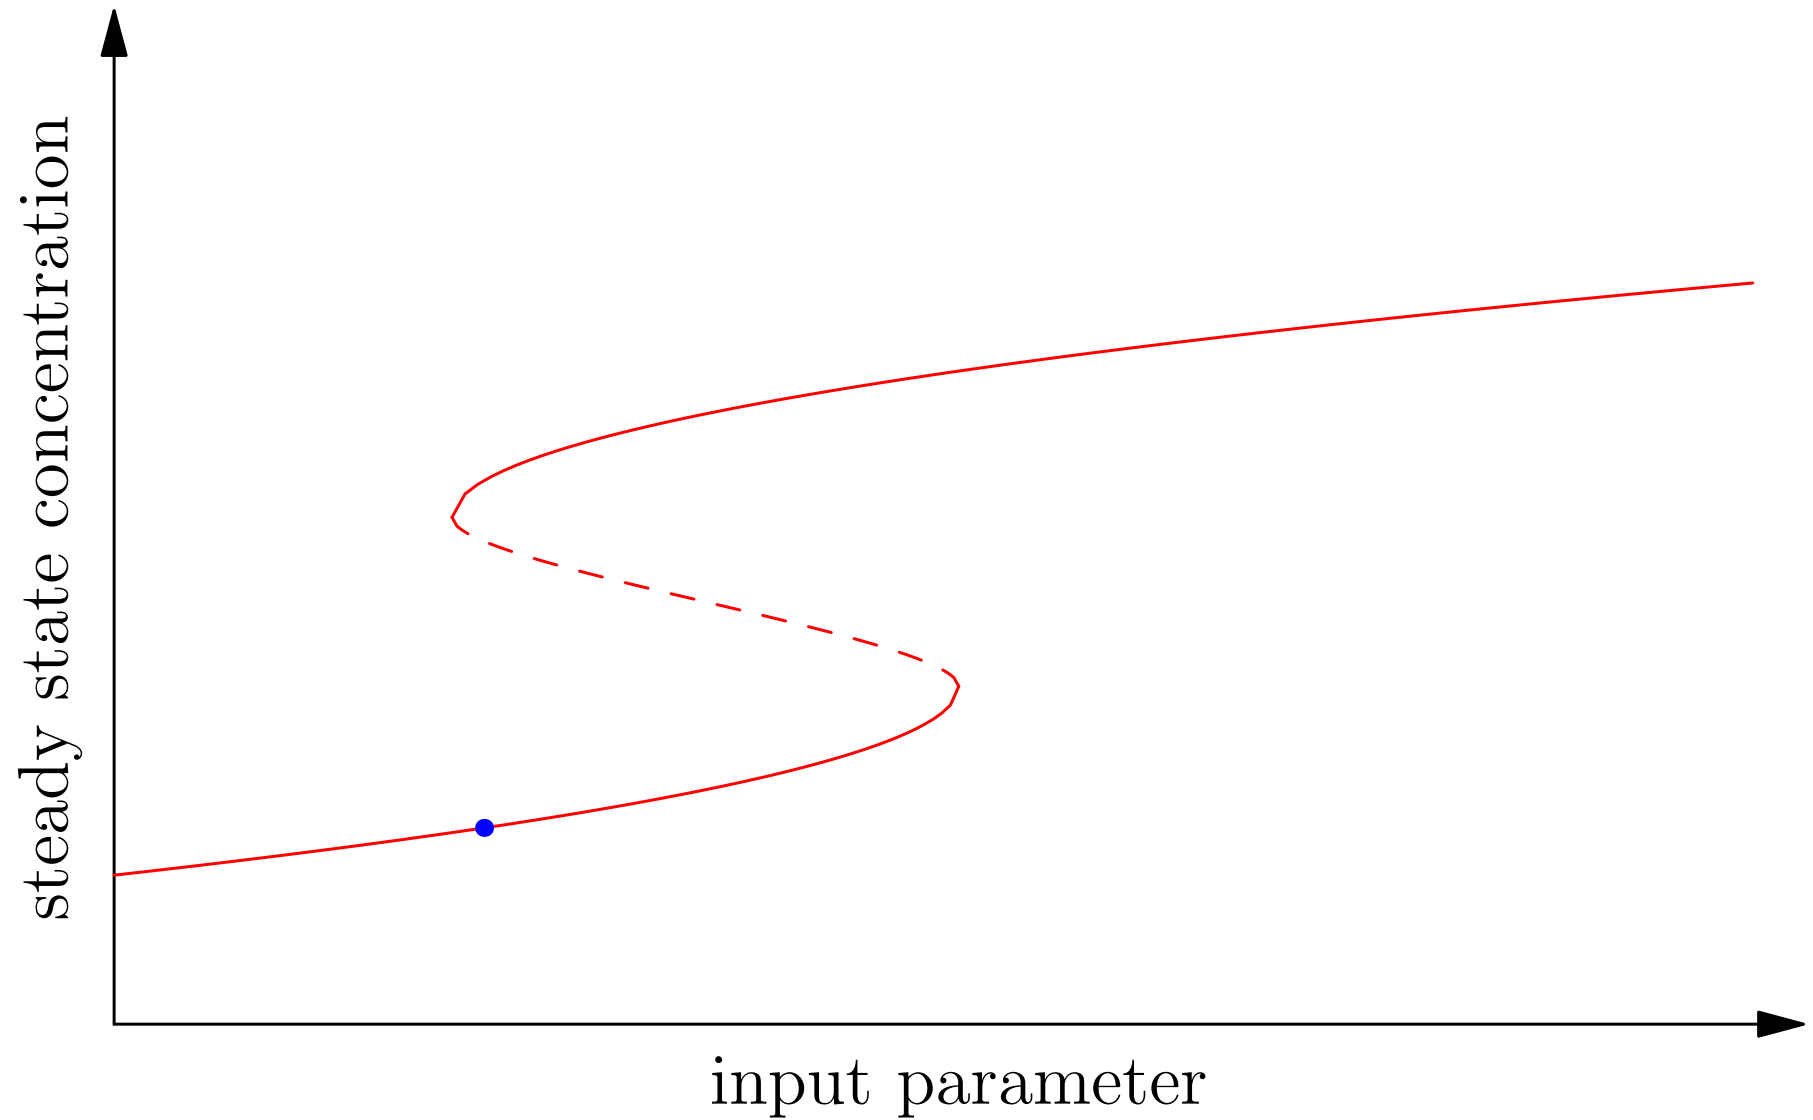


Hysteresis

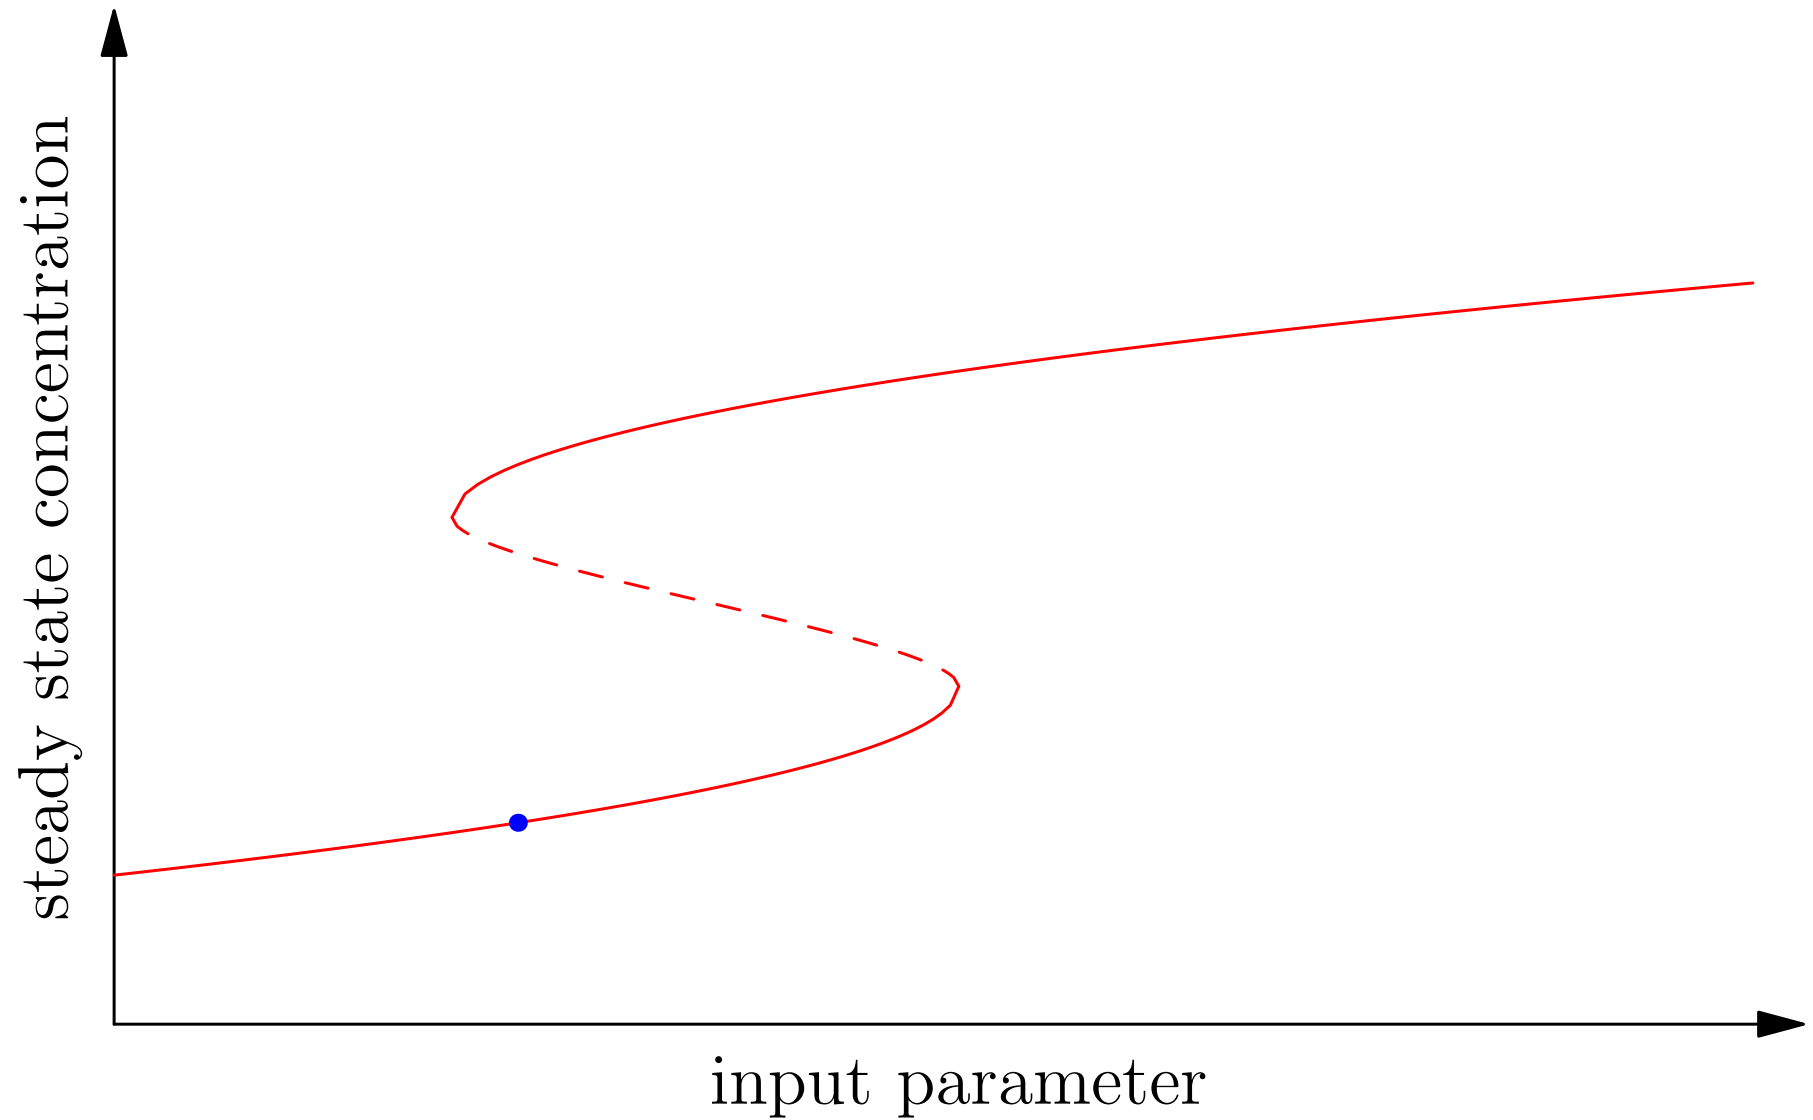


Hysteresis

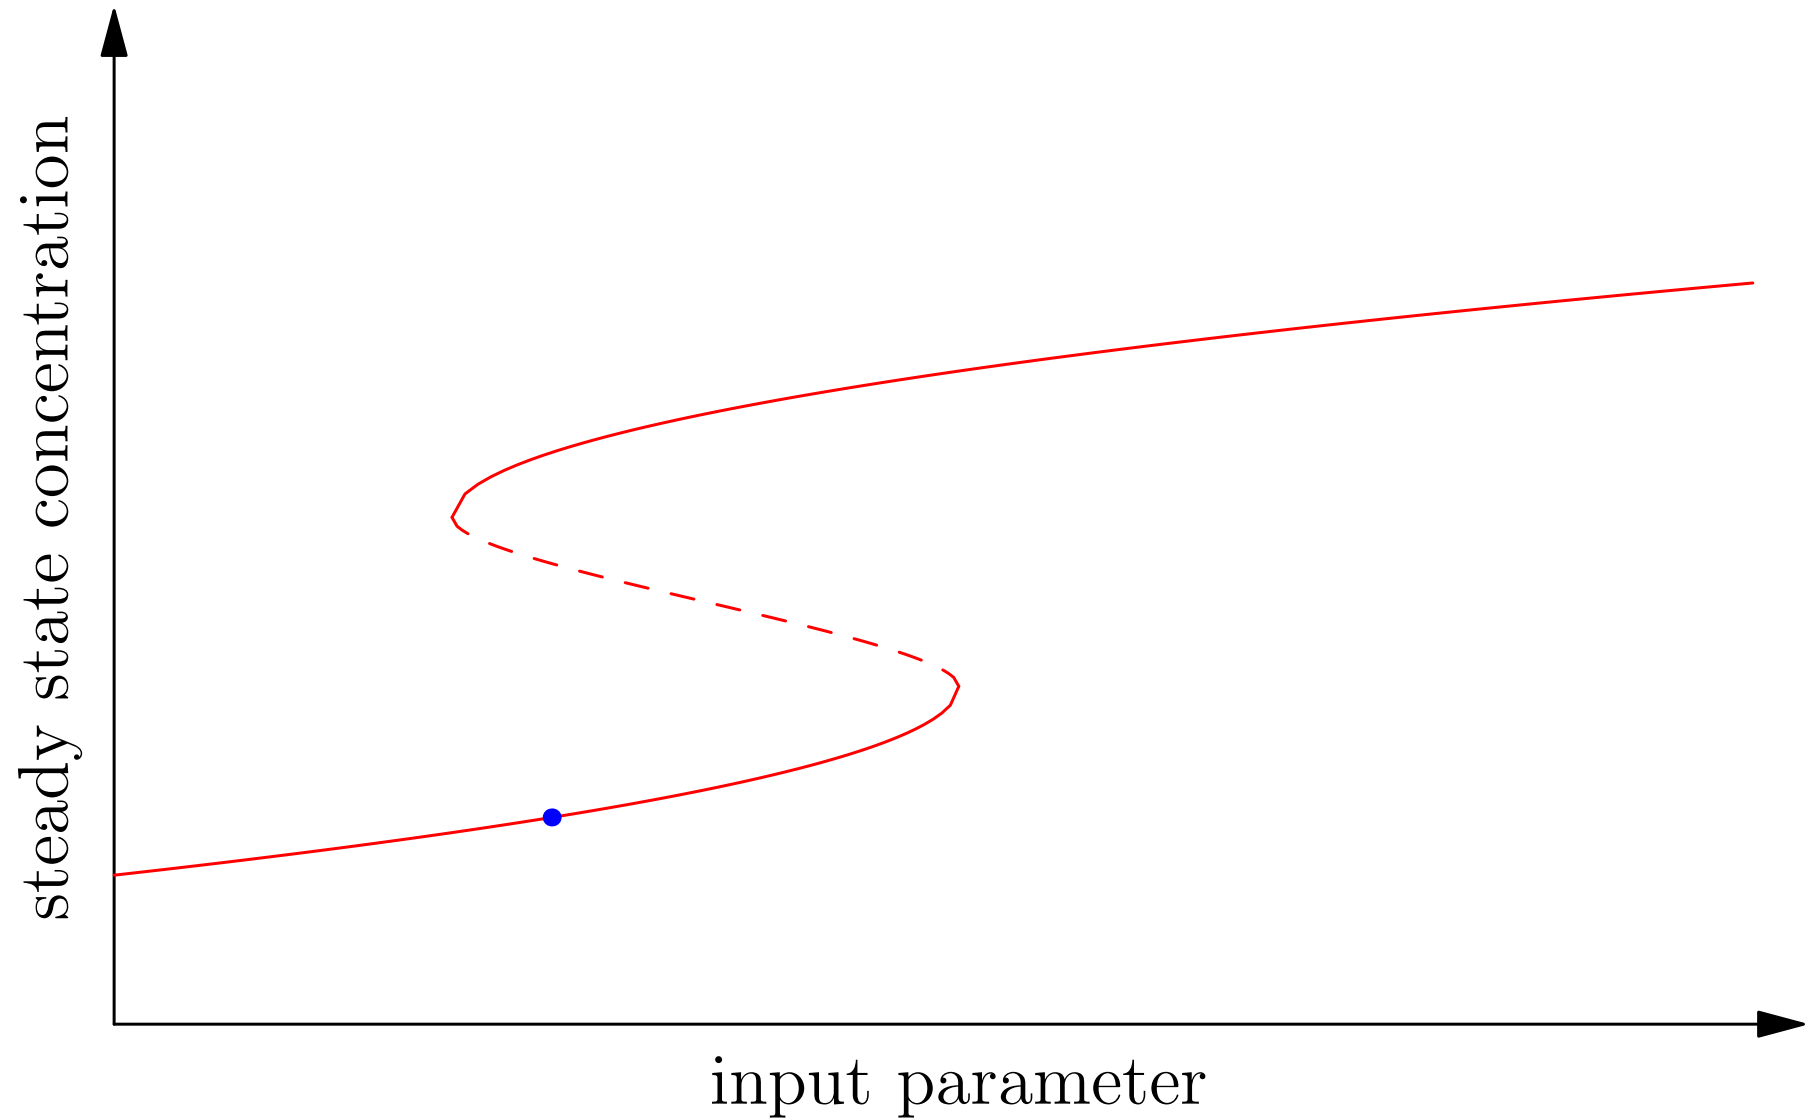


Hysteresis

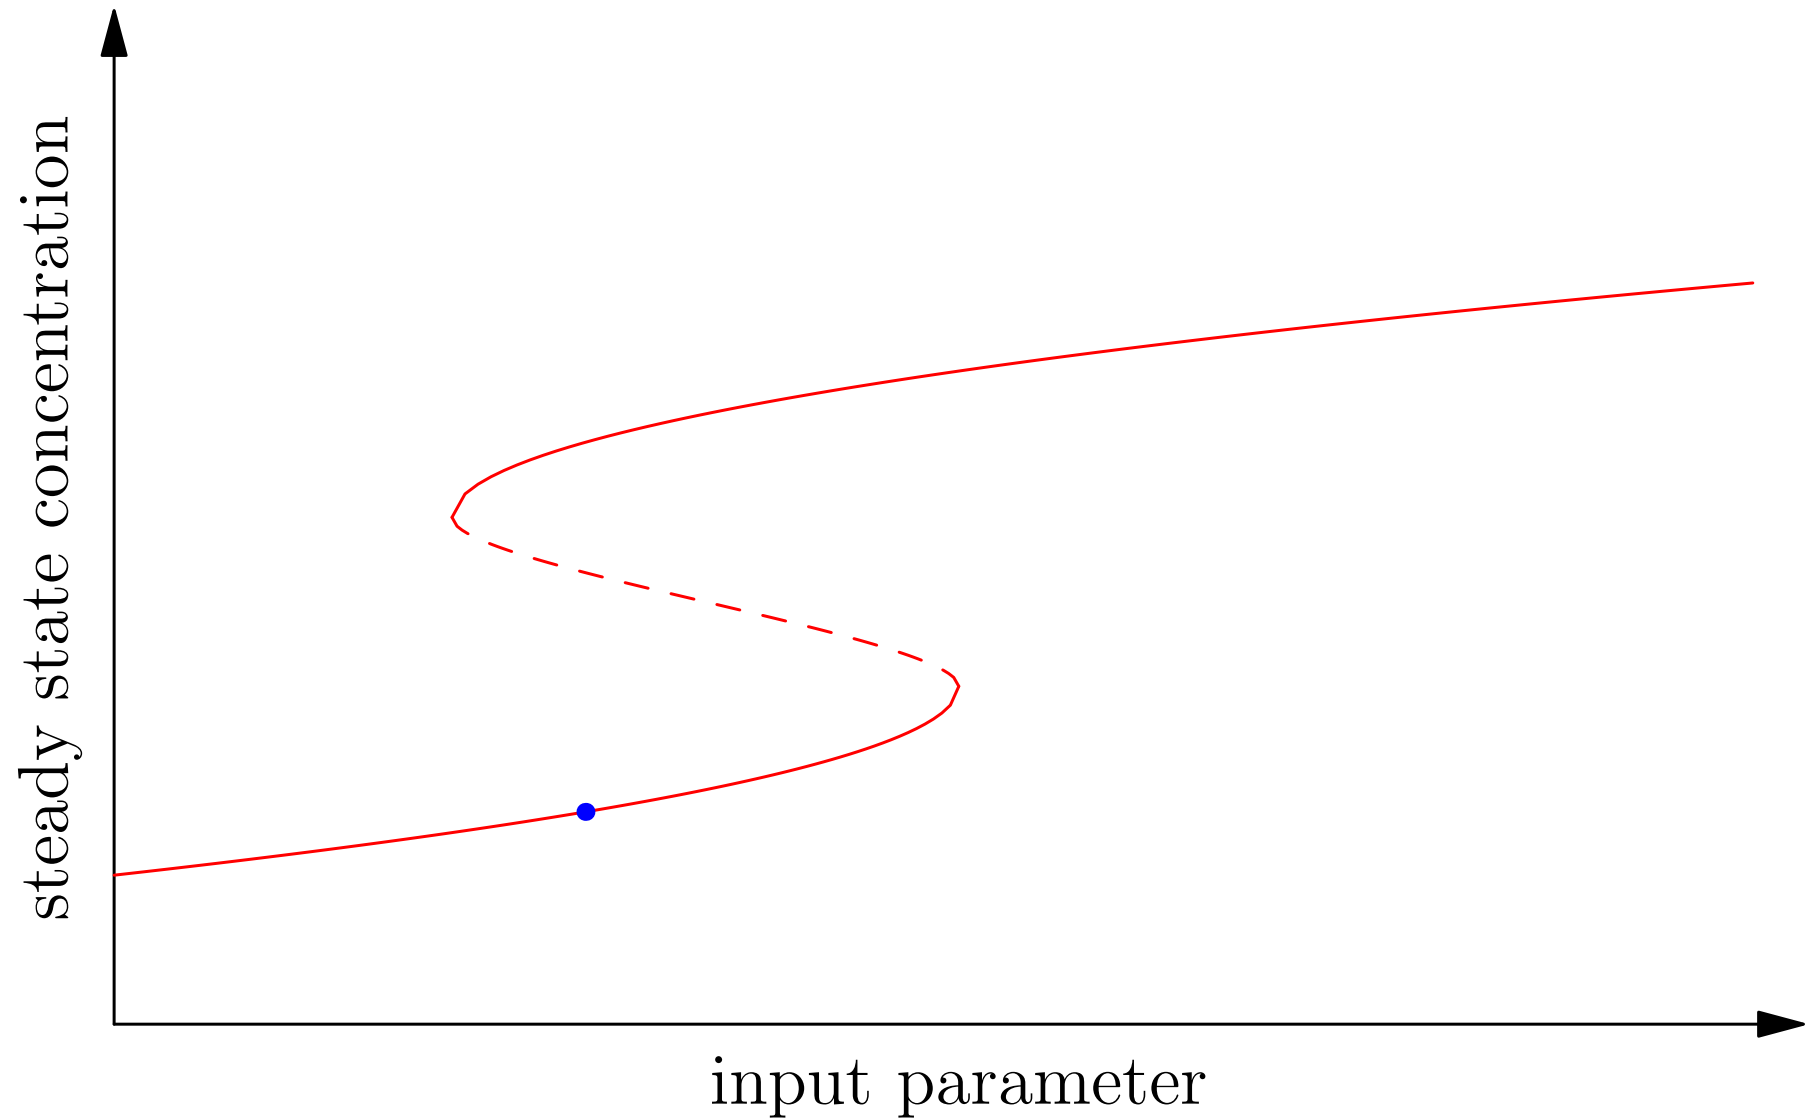


Hysteresis

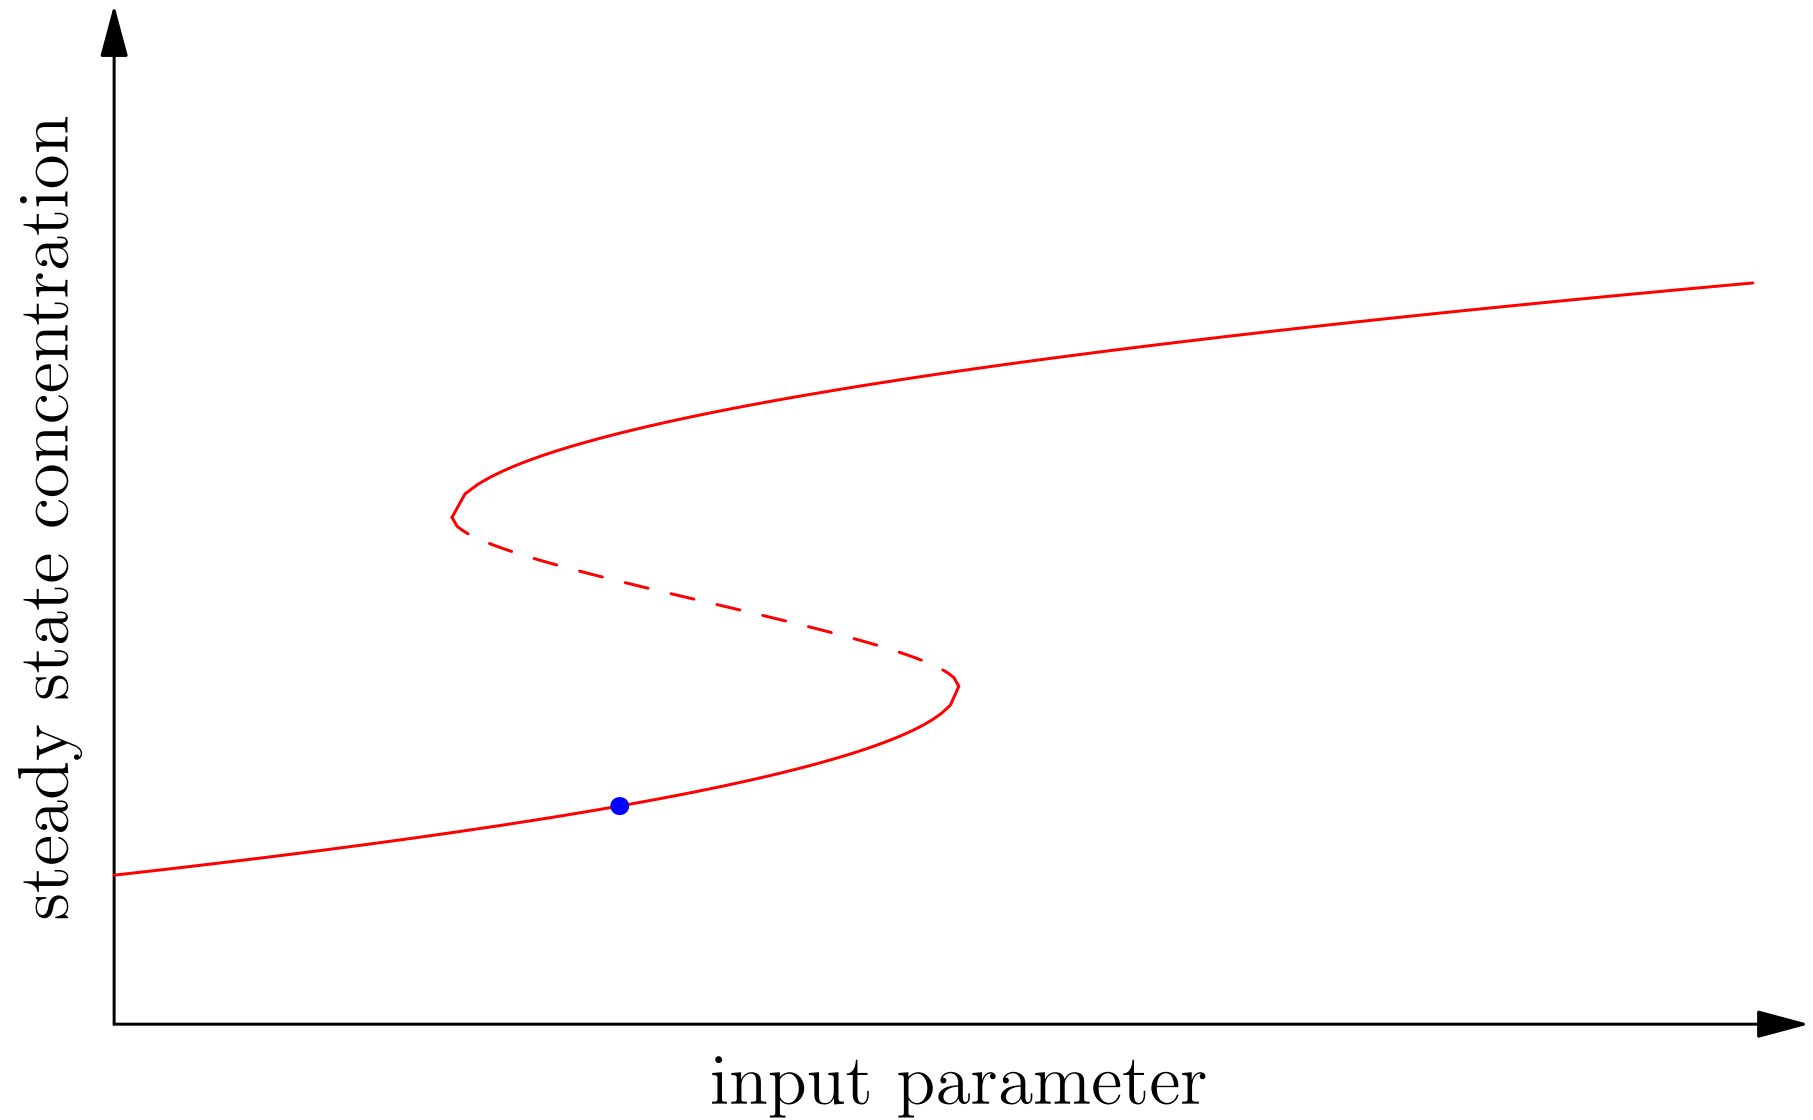


Hysteresis

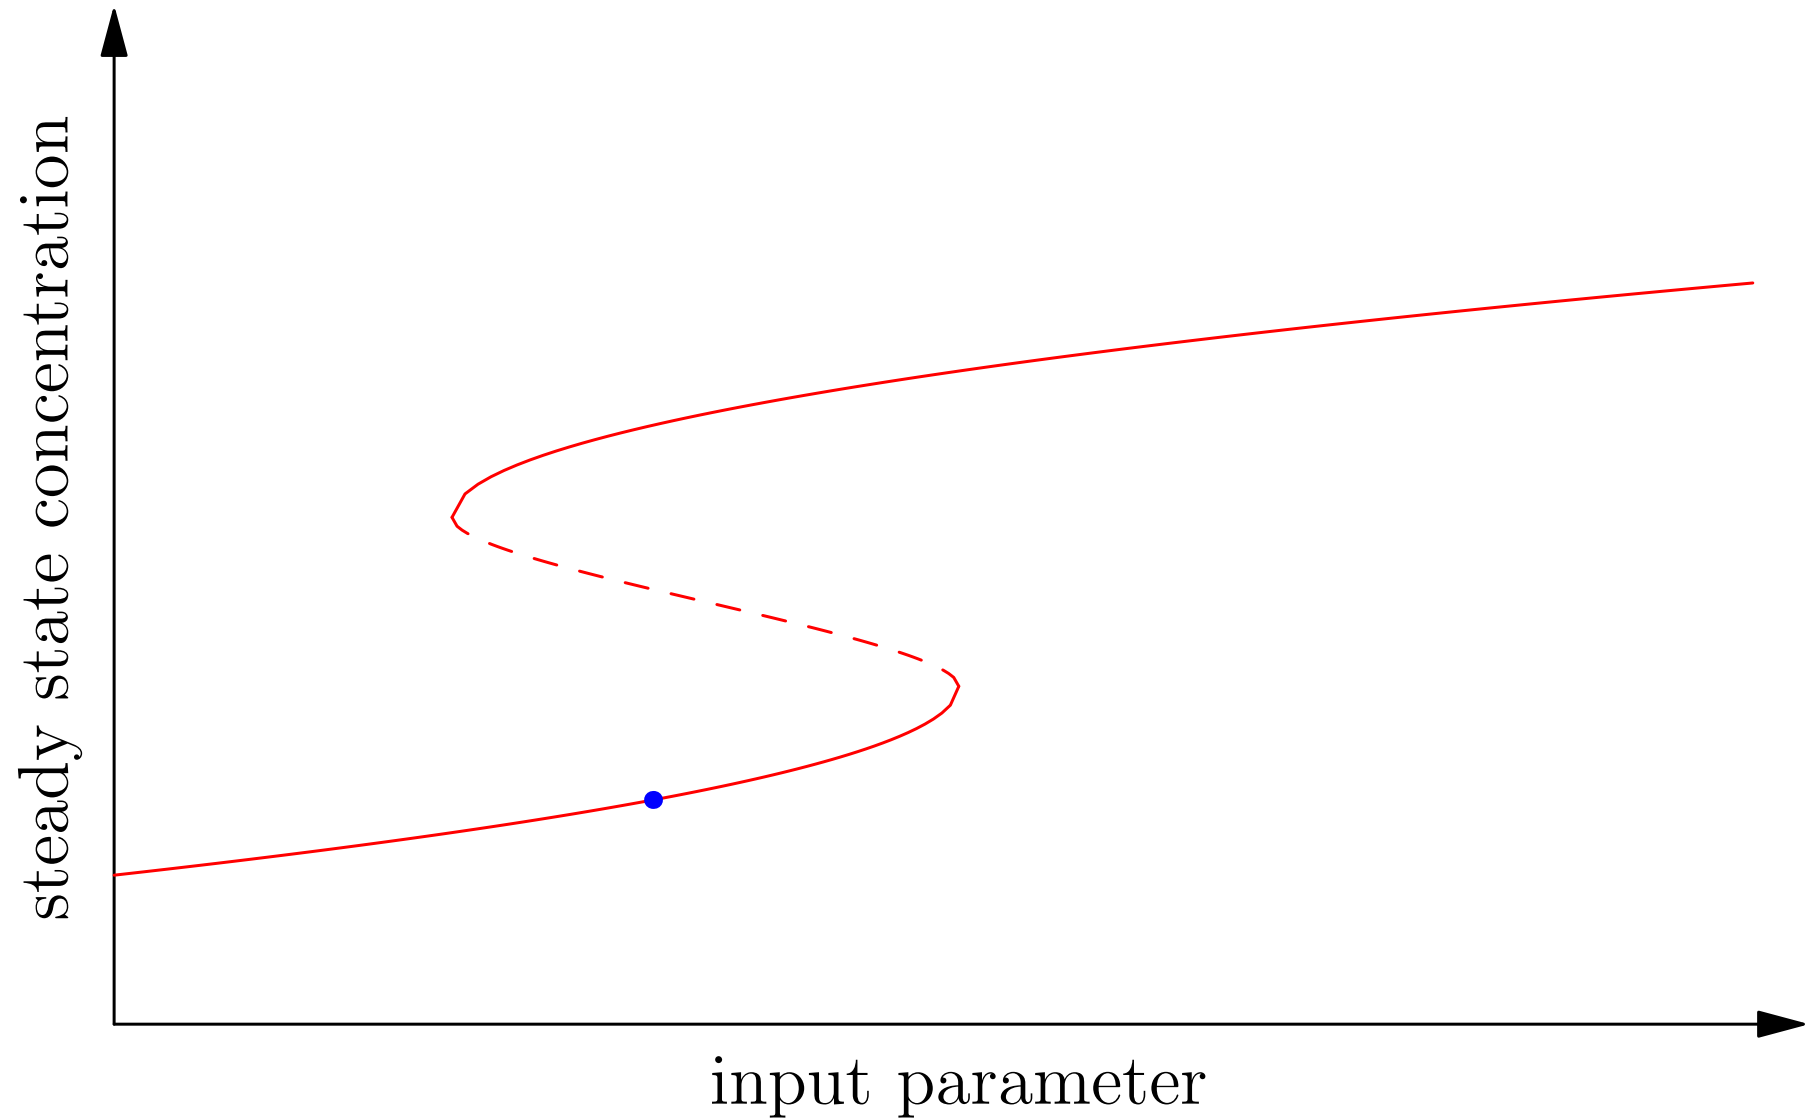


Hysteresis

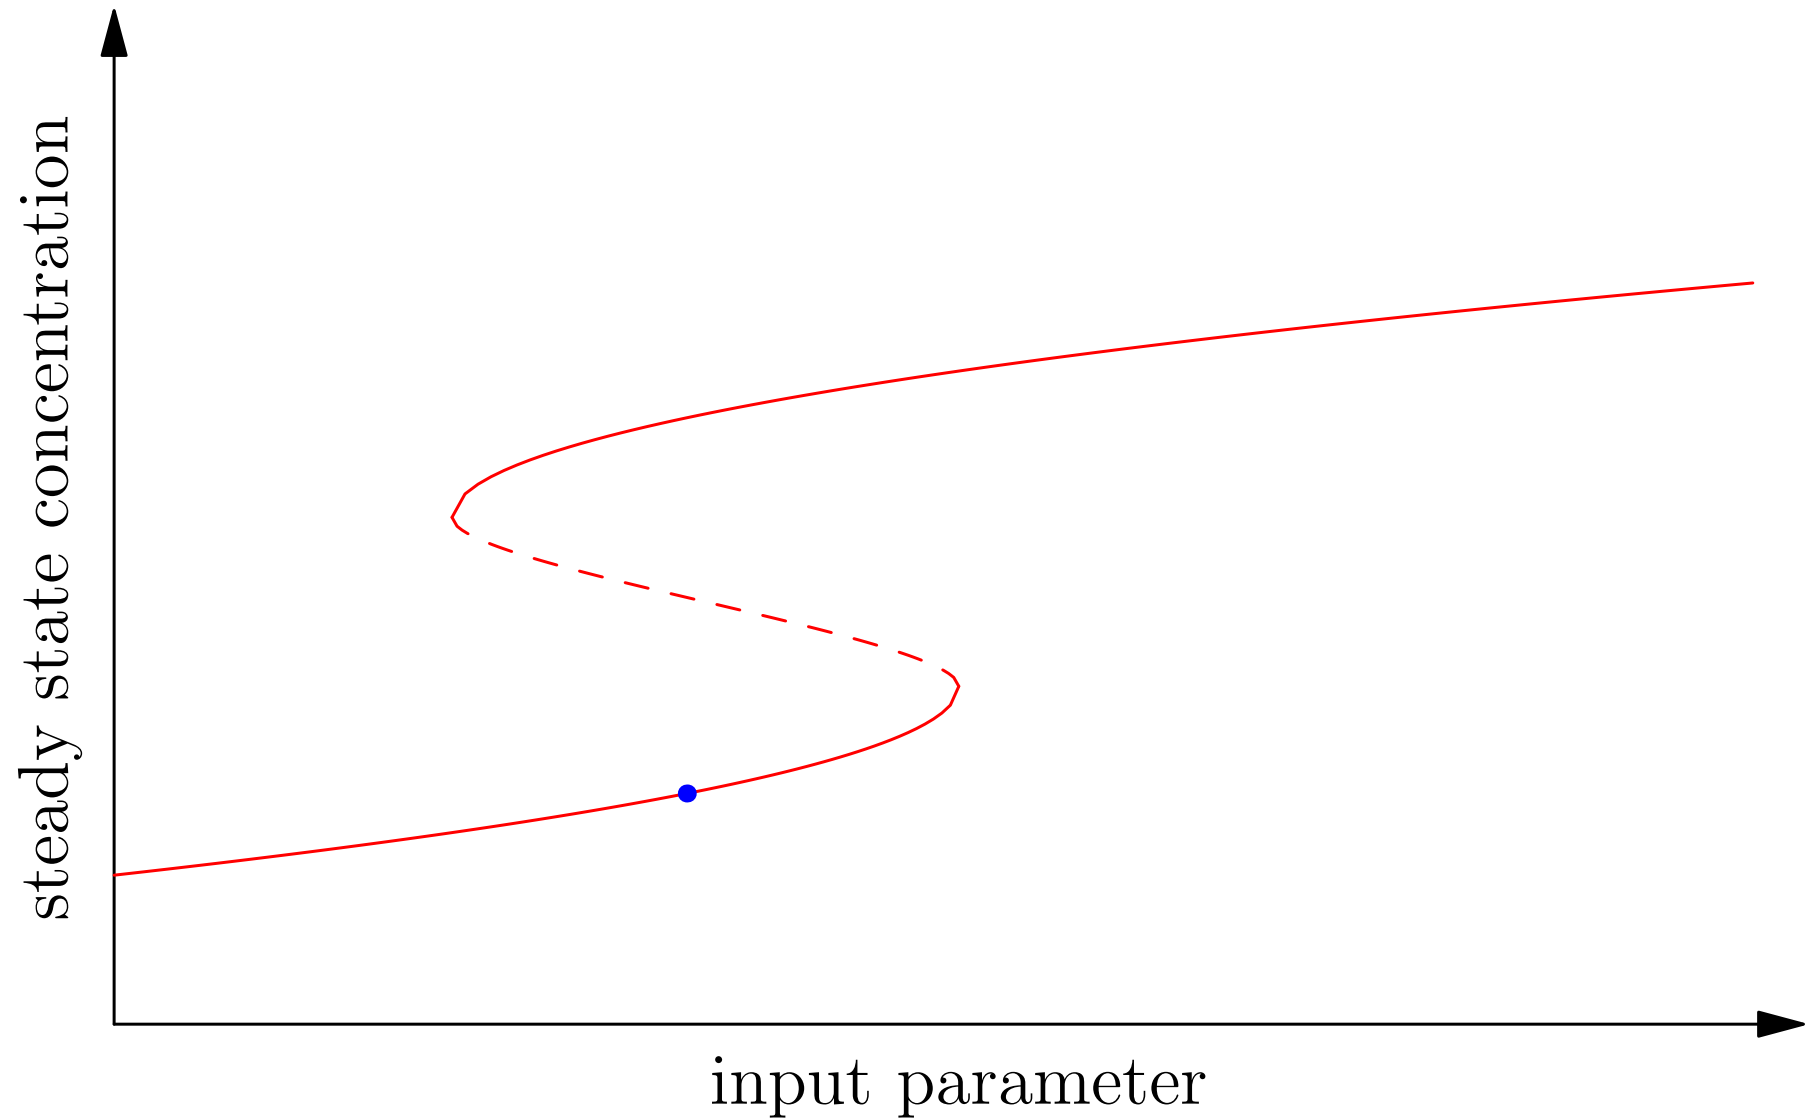


Hysteresis

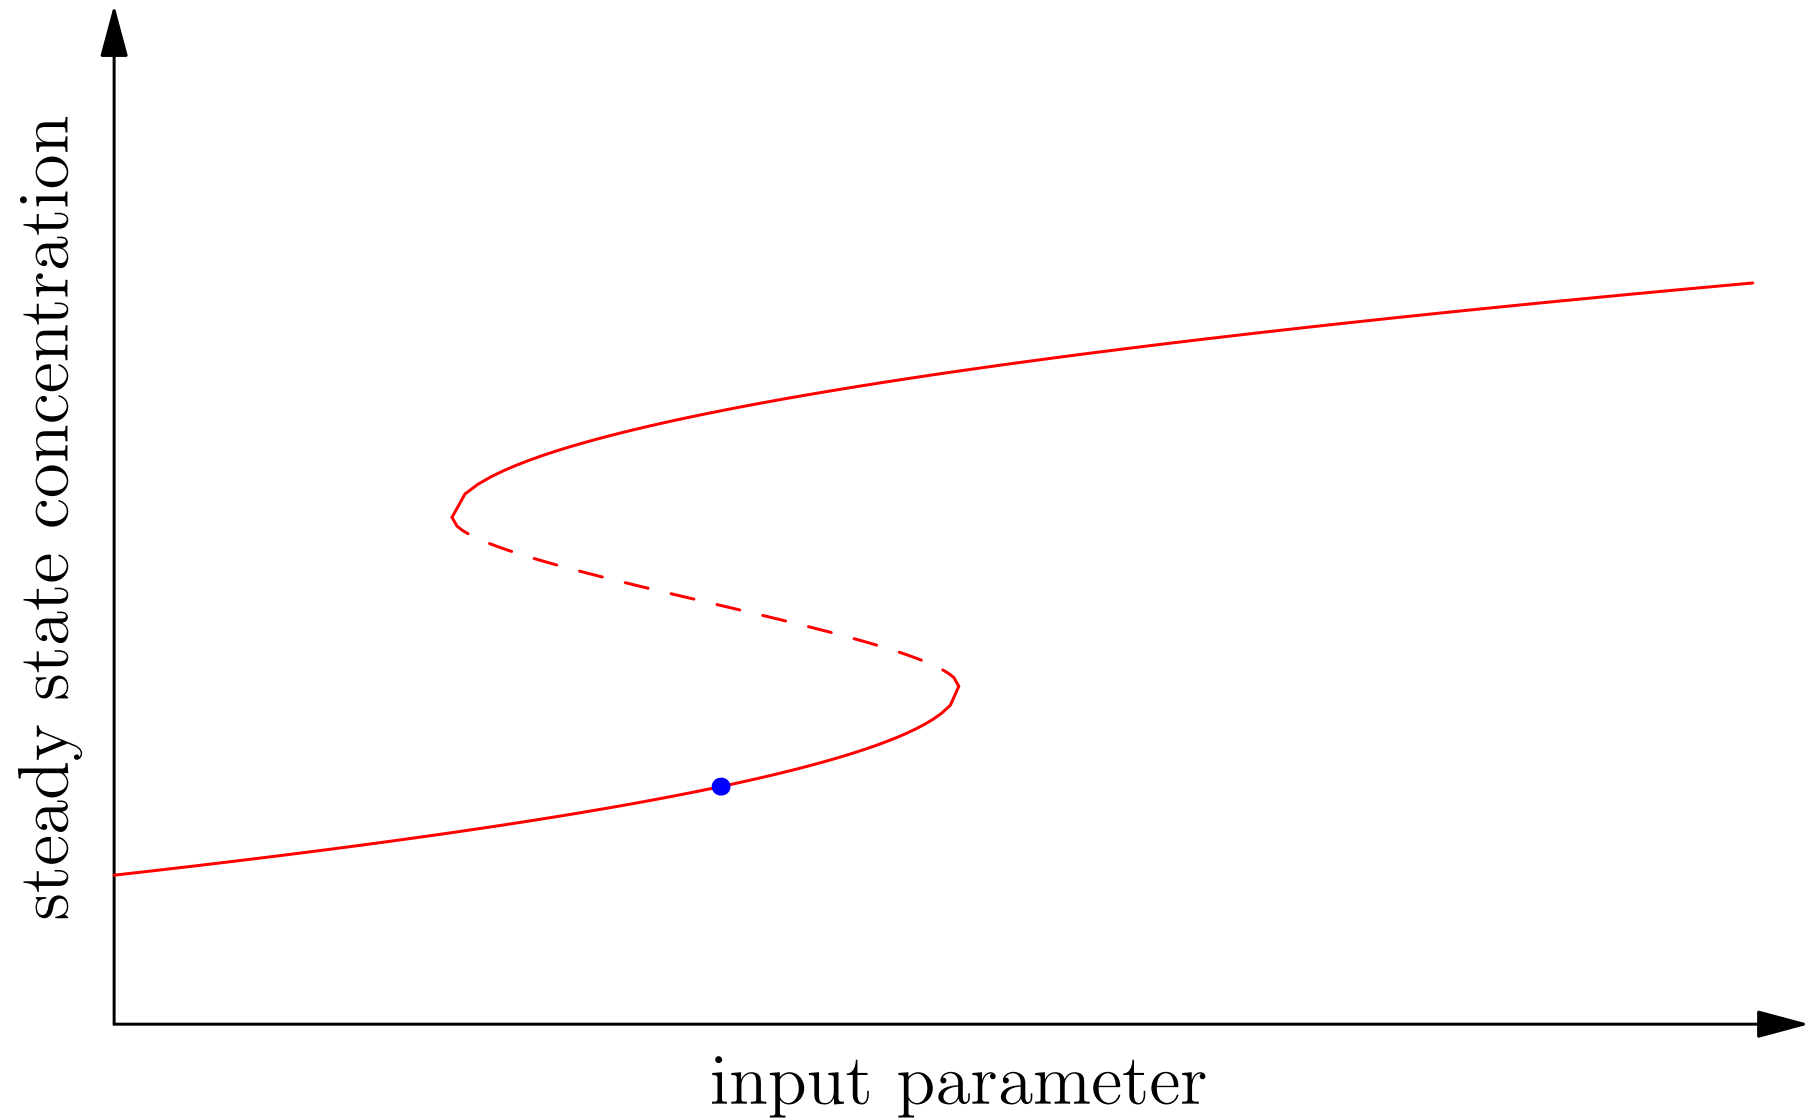


Hysteresis

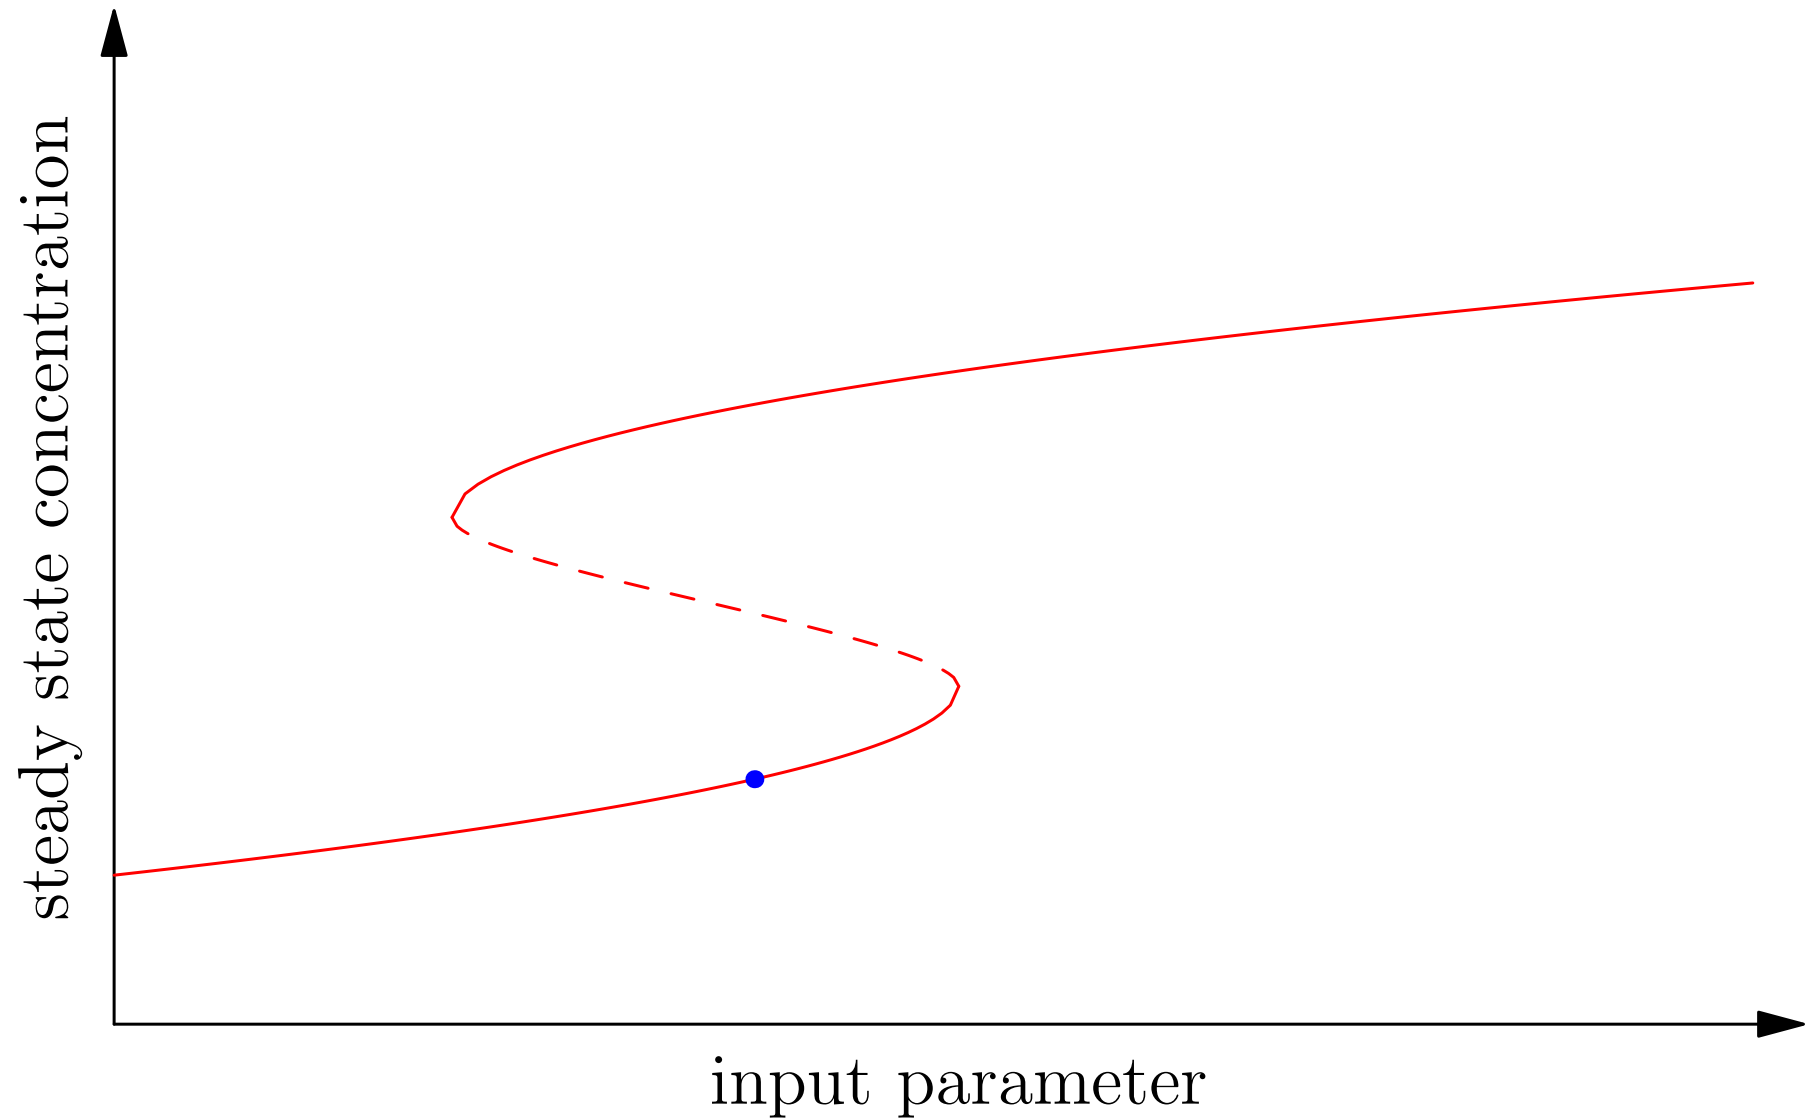


Hysteresis

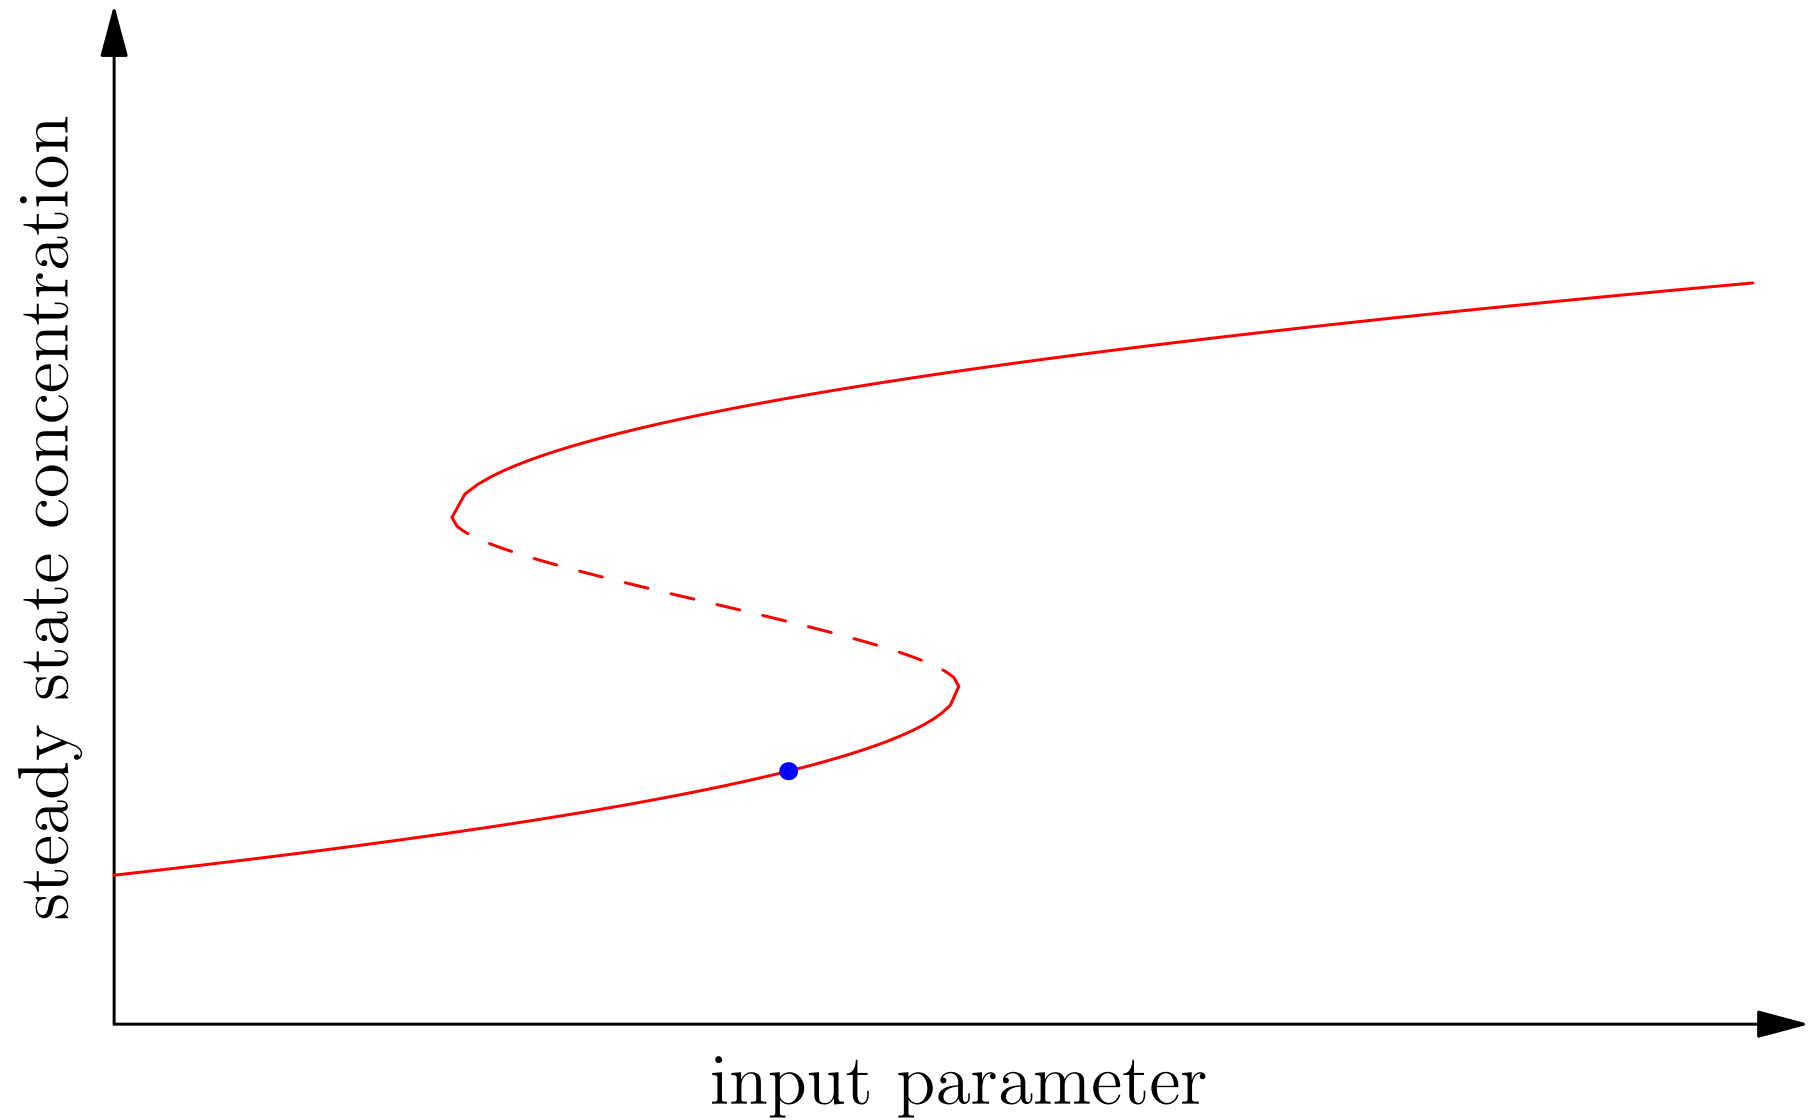


Hysteresis

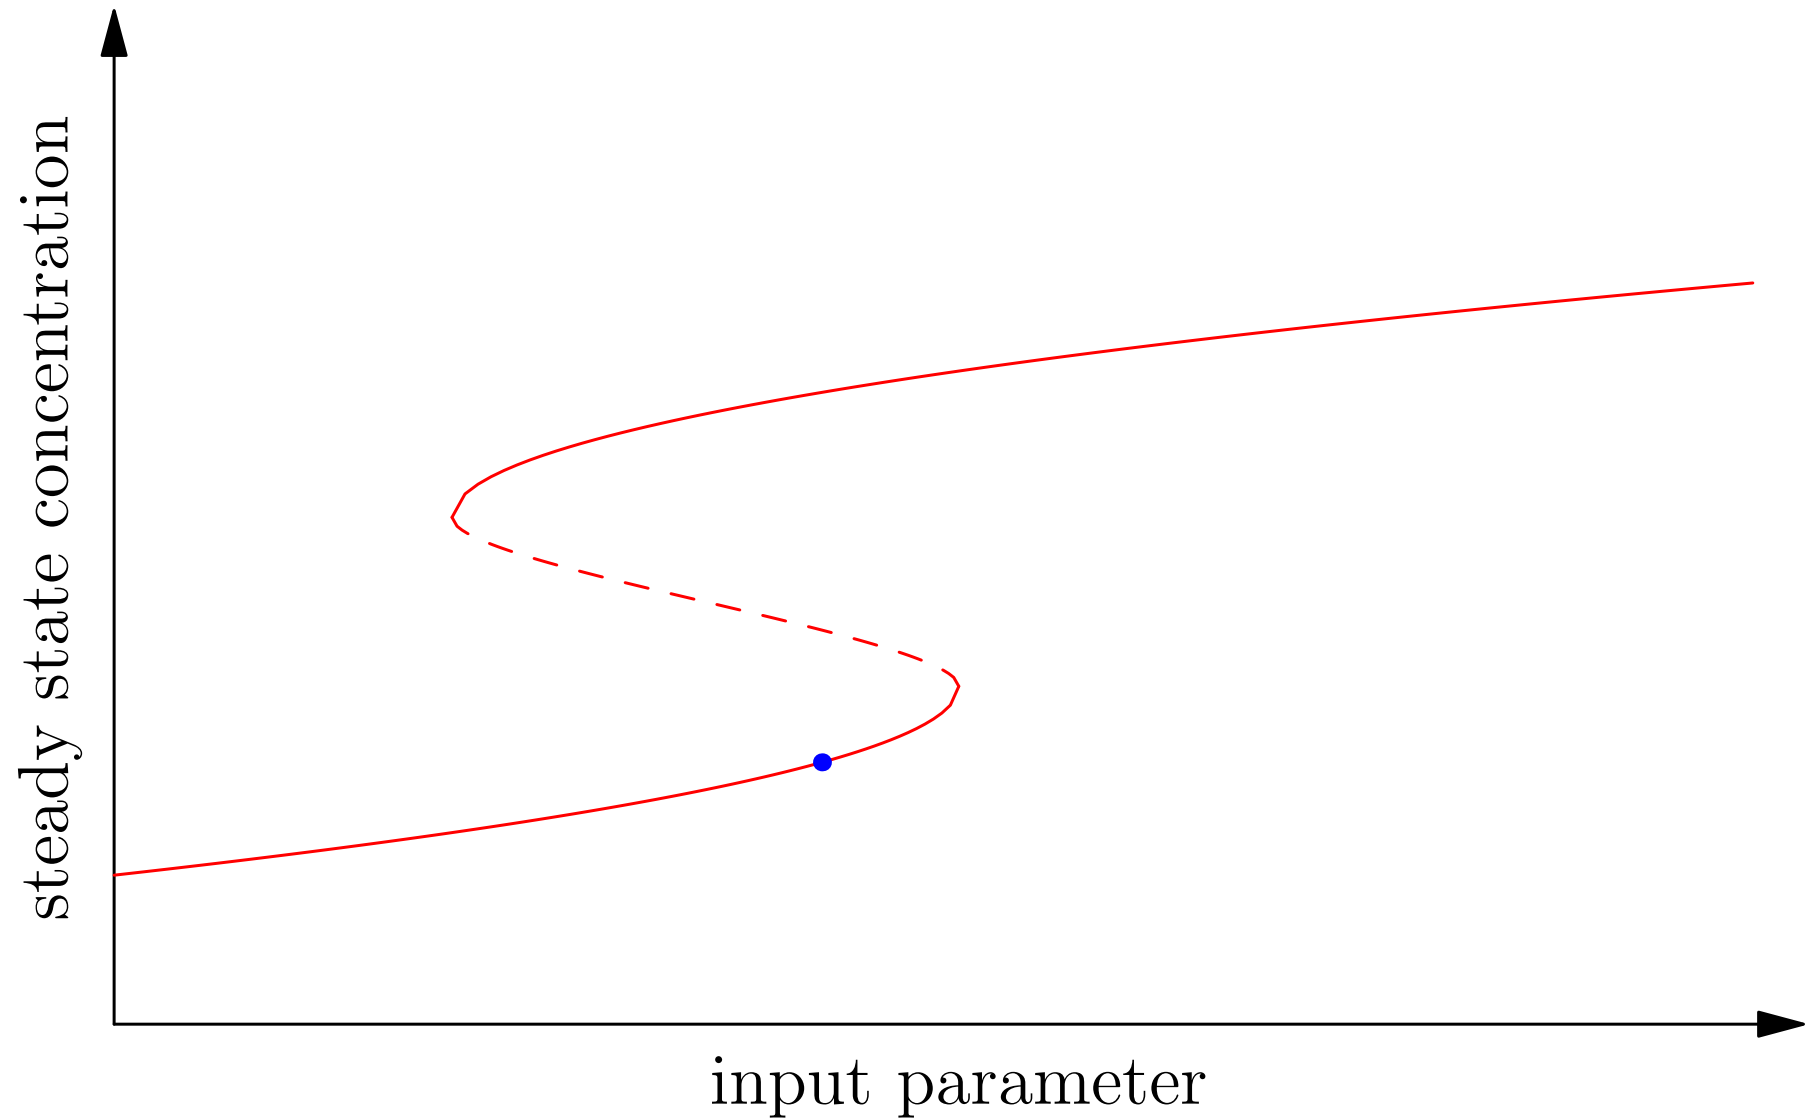


Hysteresis

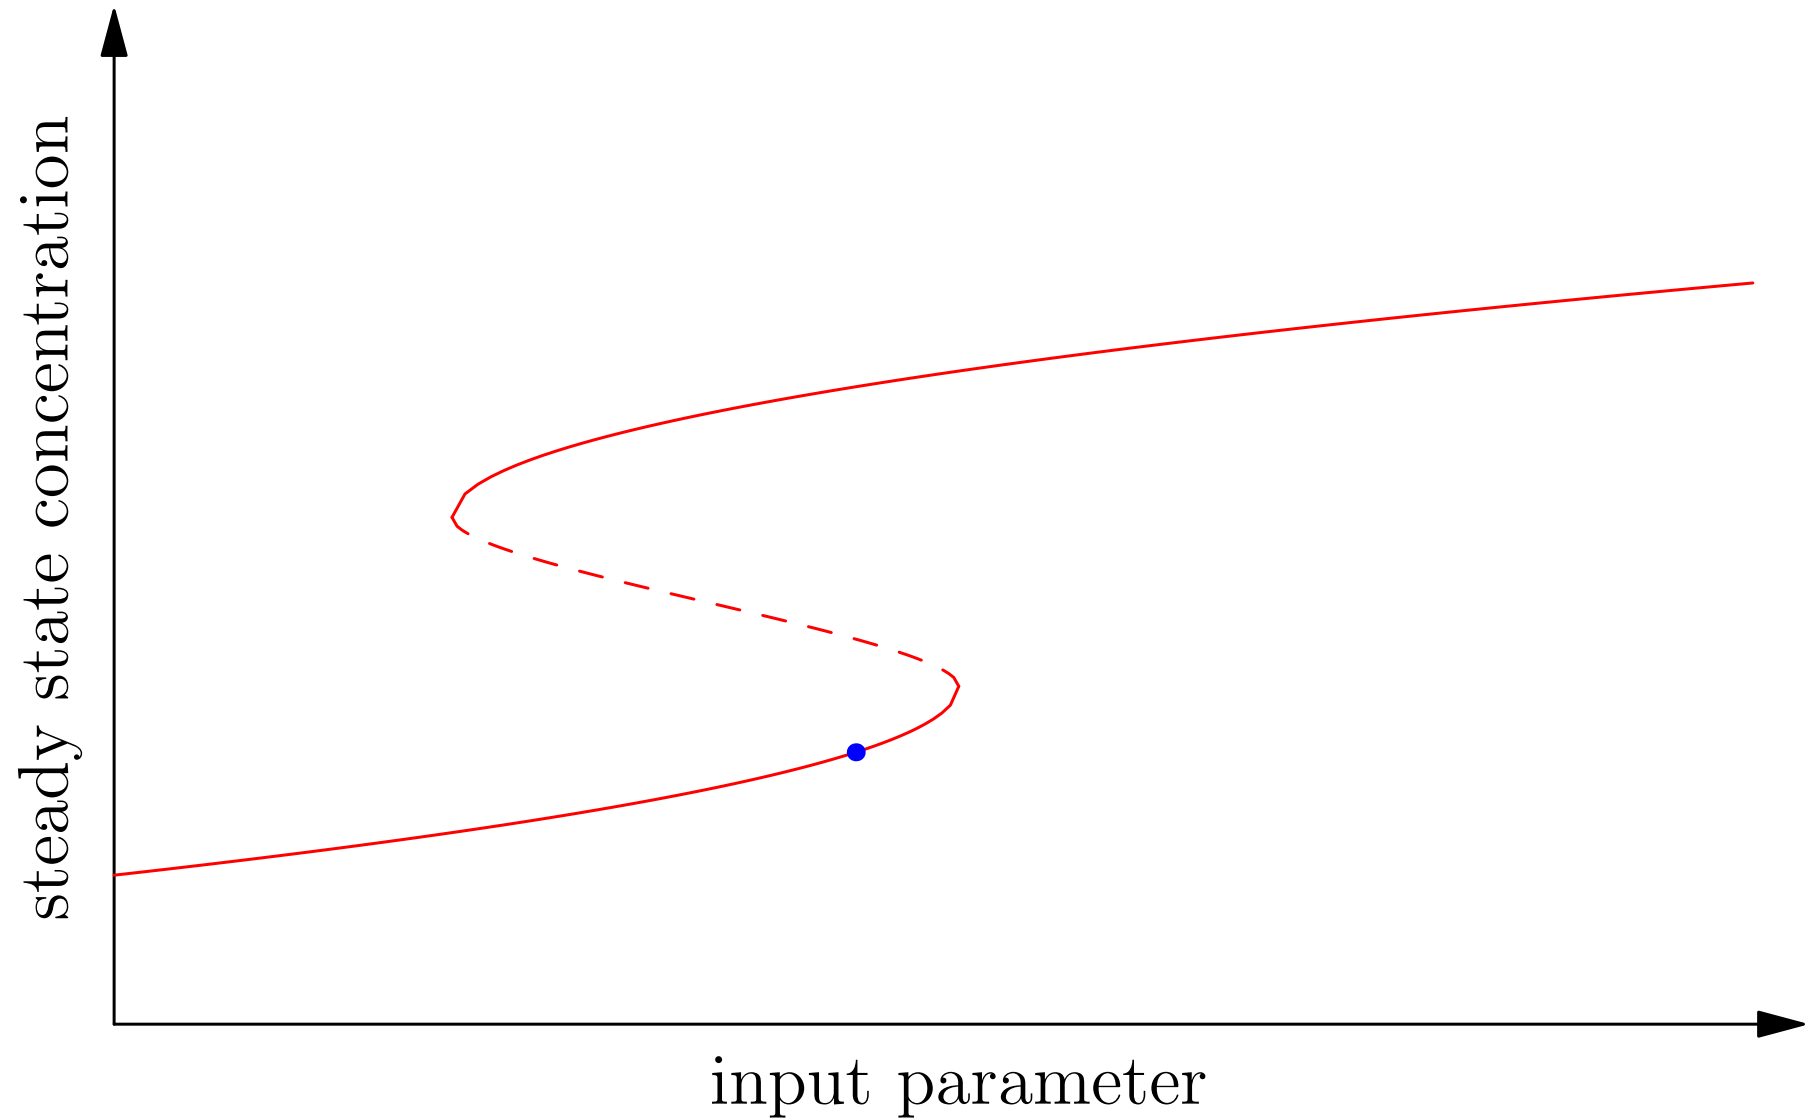


Hysteresis

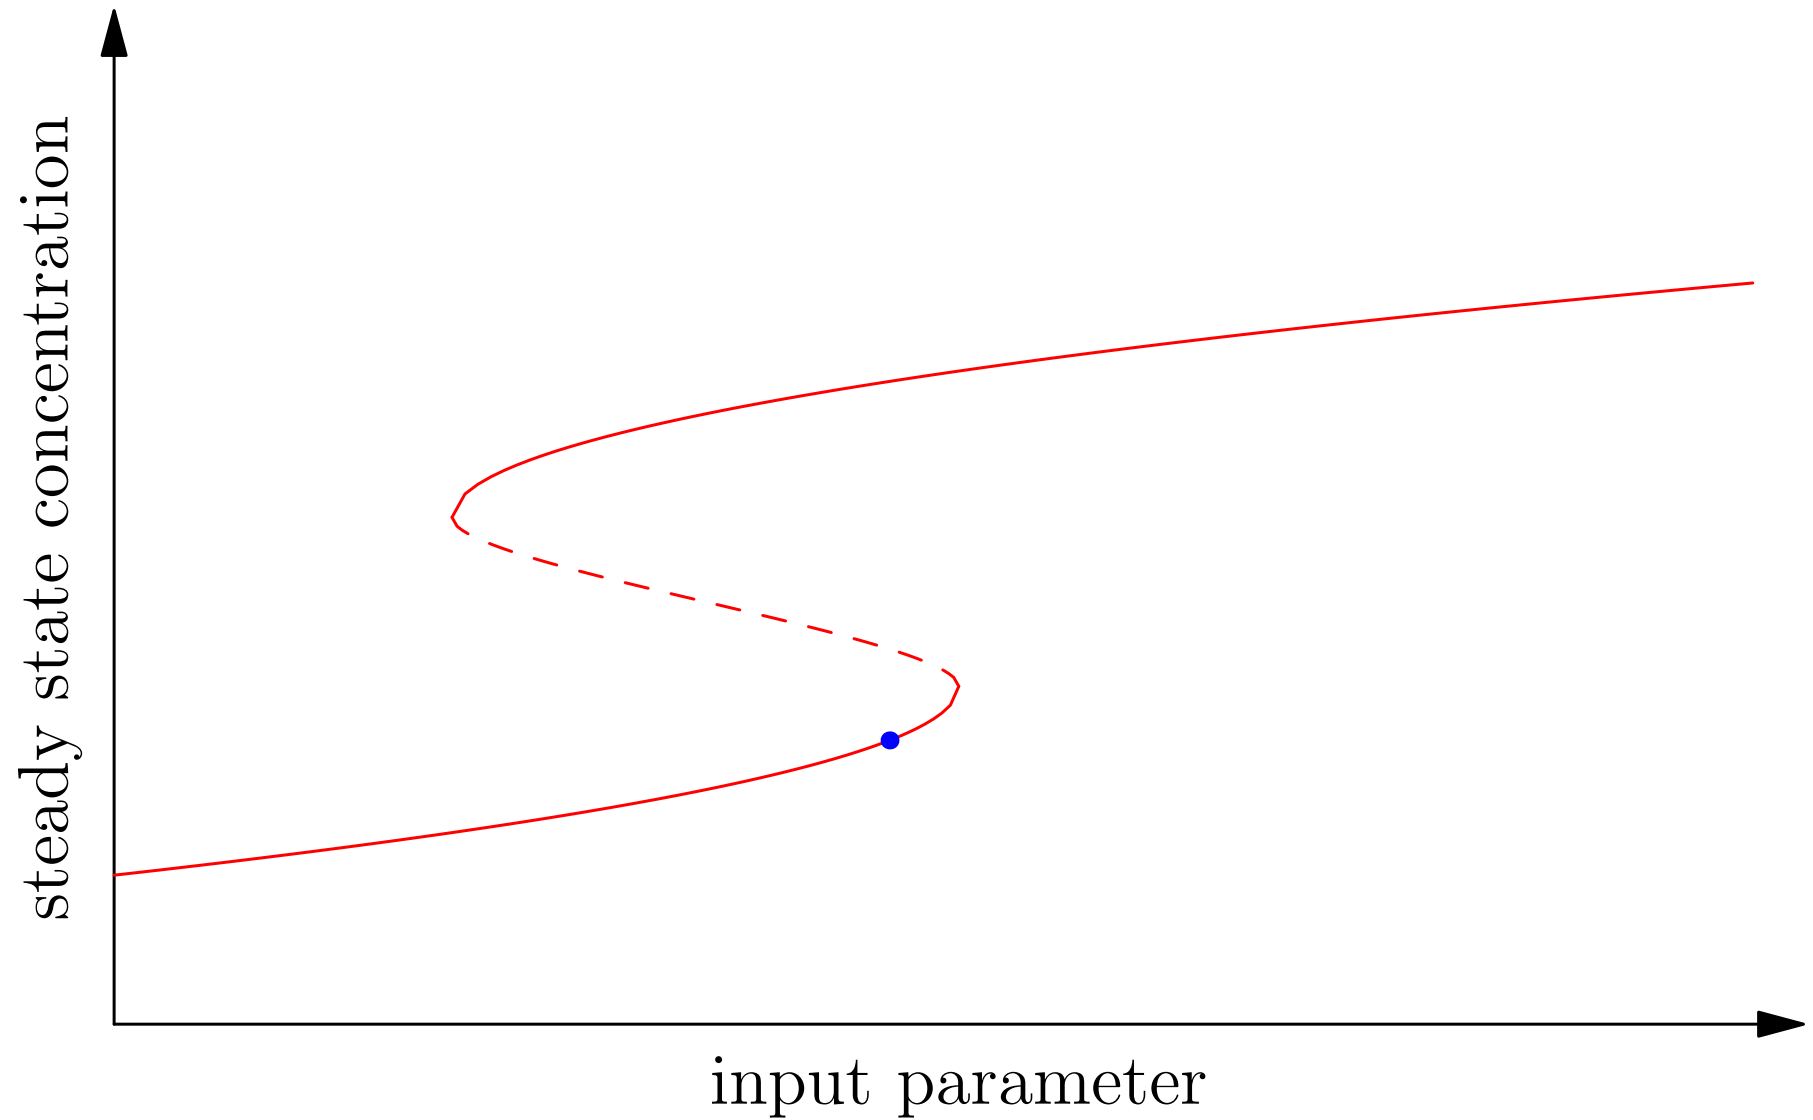


Hysteresis

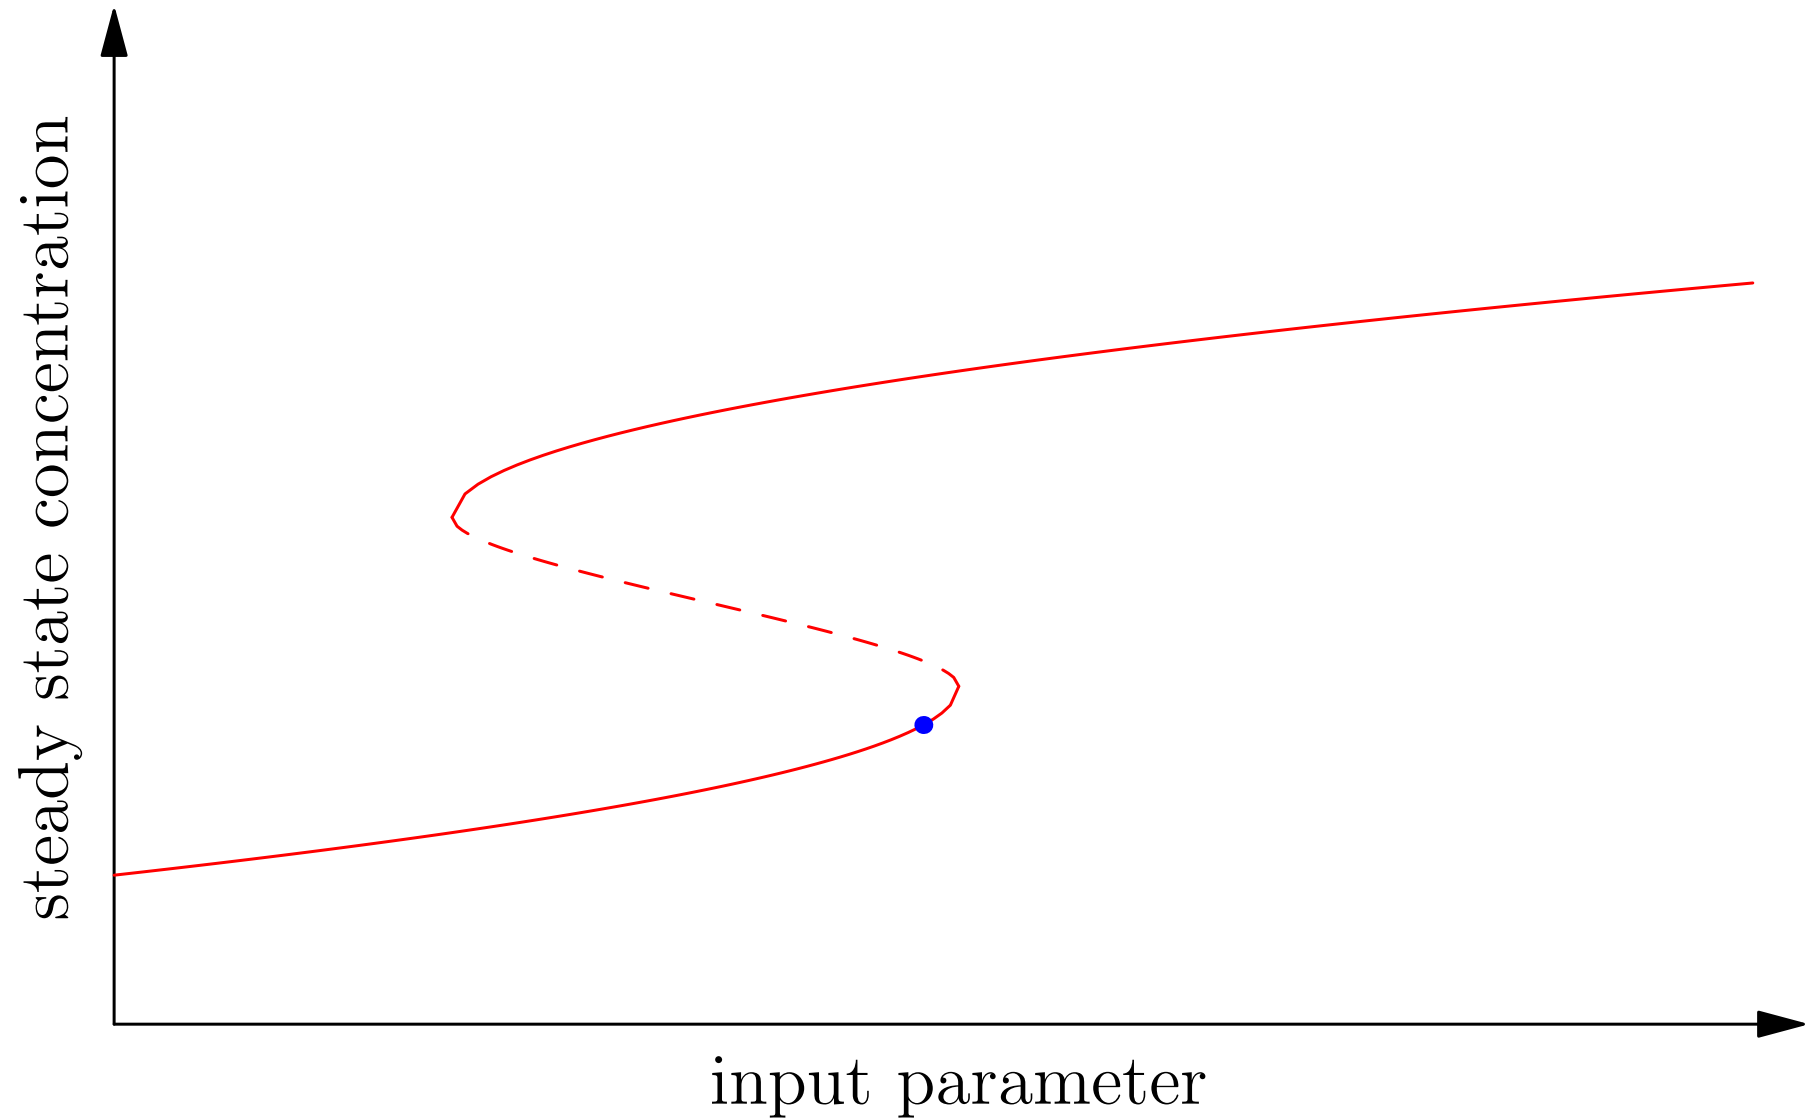


Hysteresis

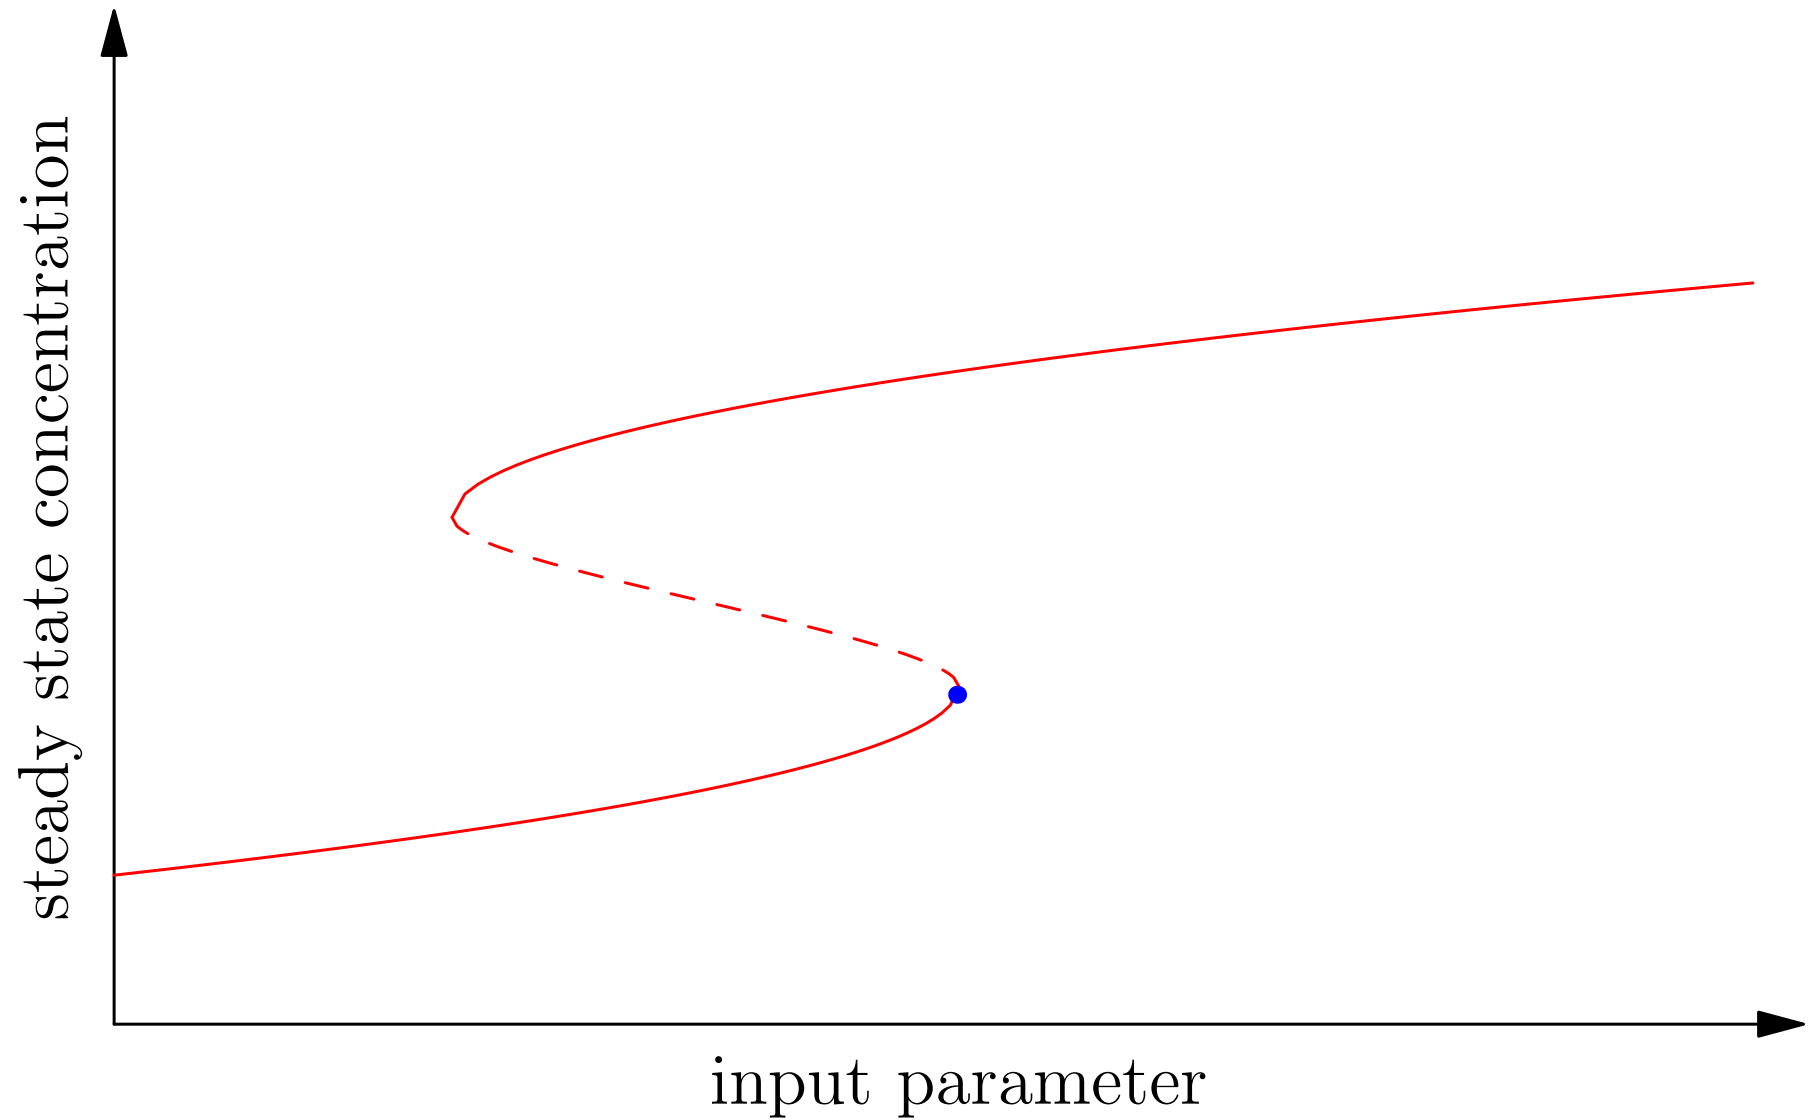


Hysteresis

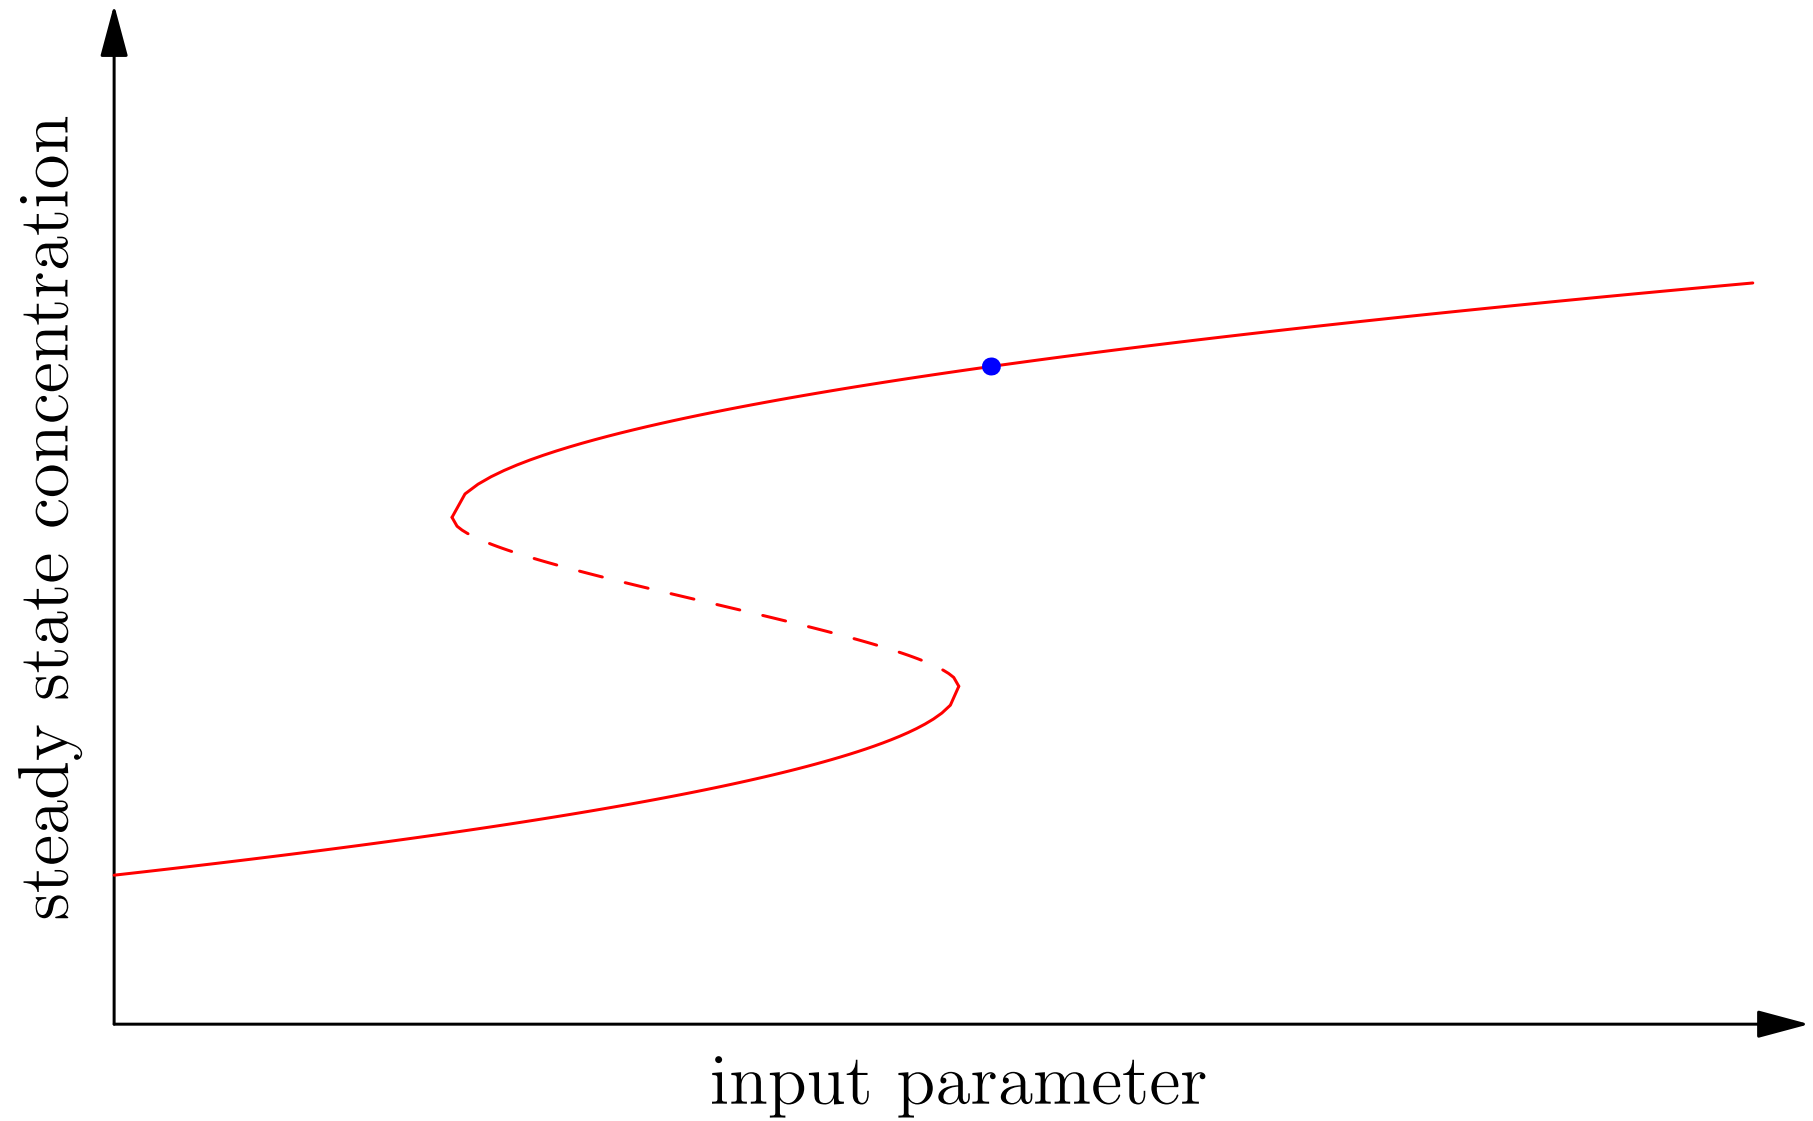


Hysteresis

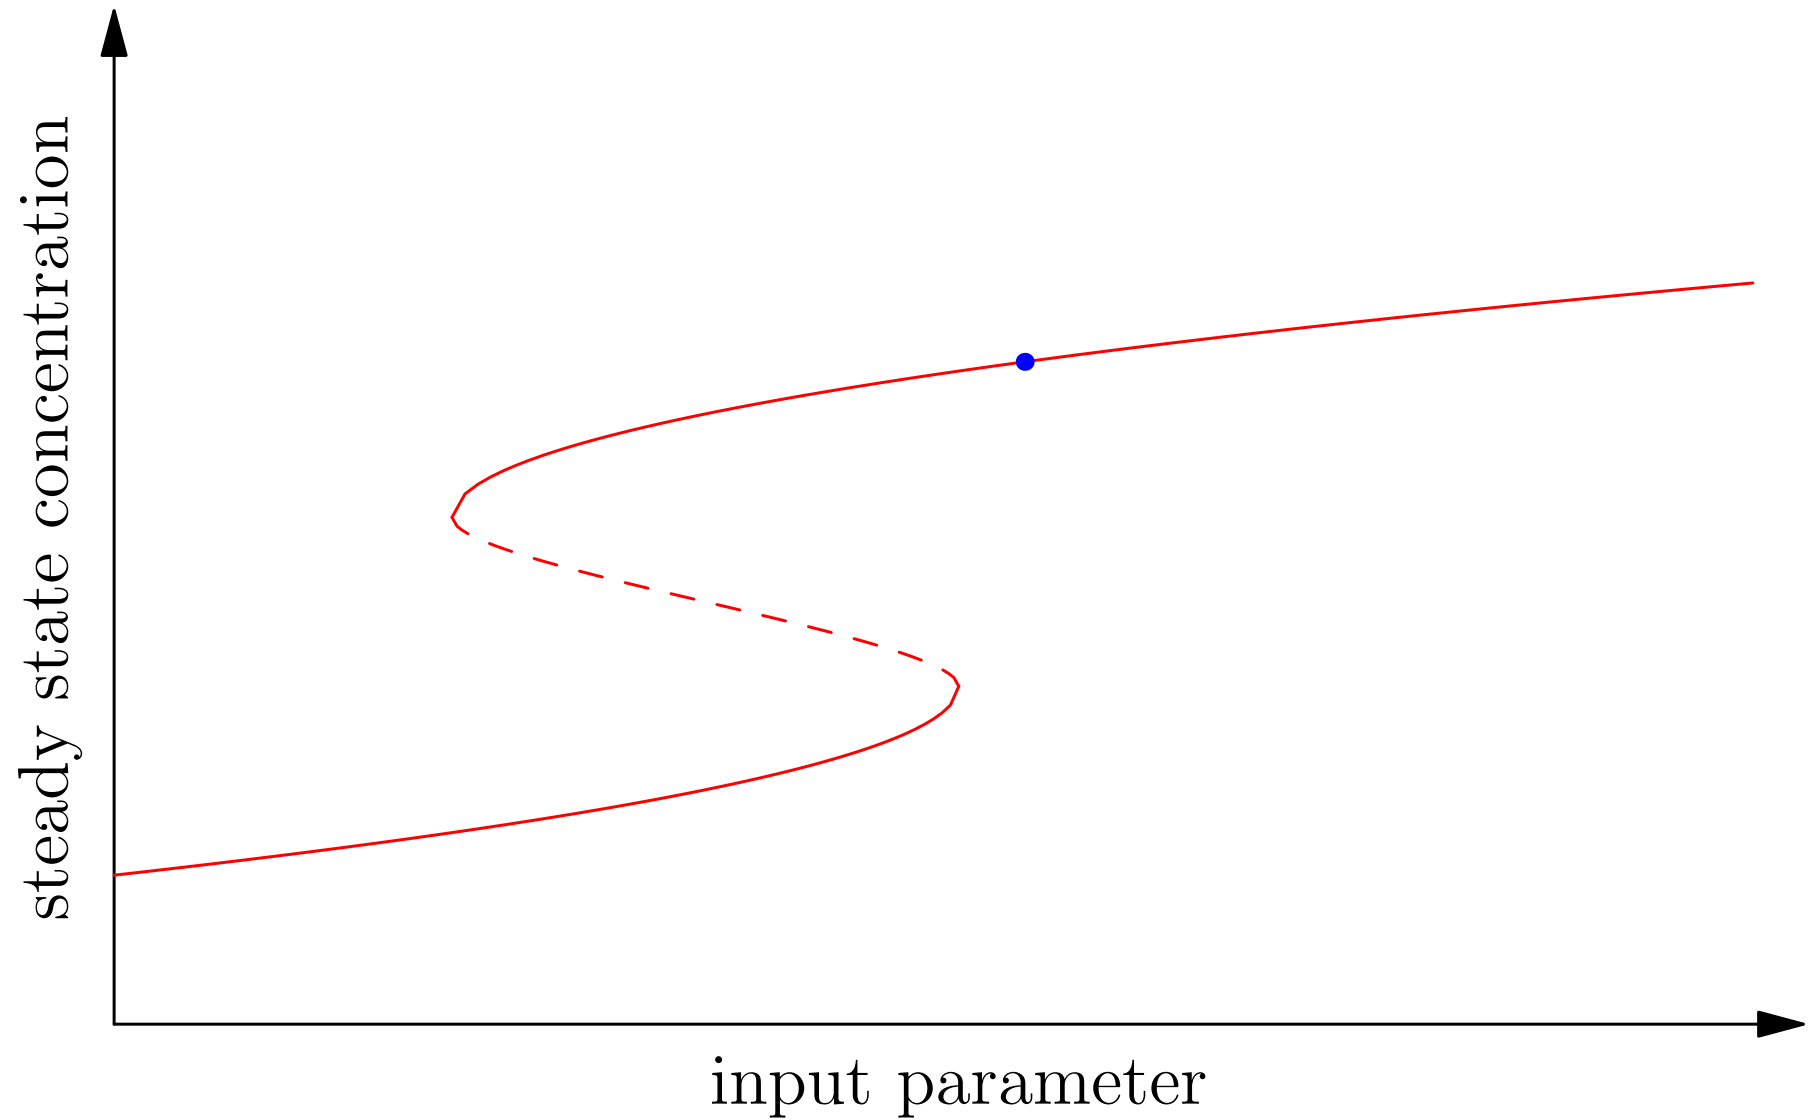


Hysteresis

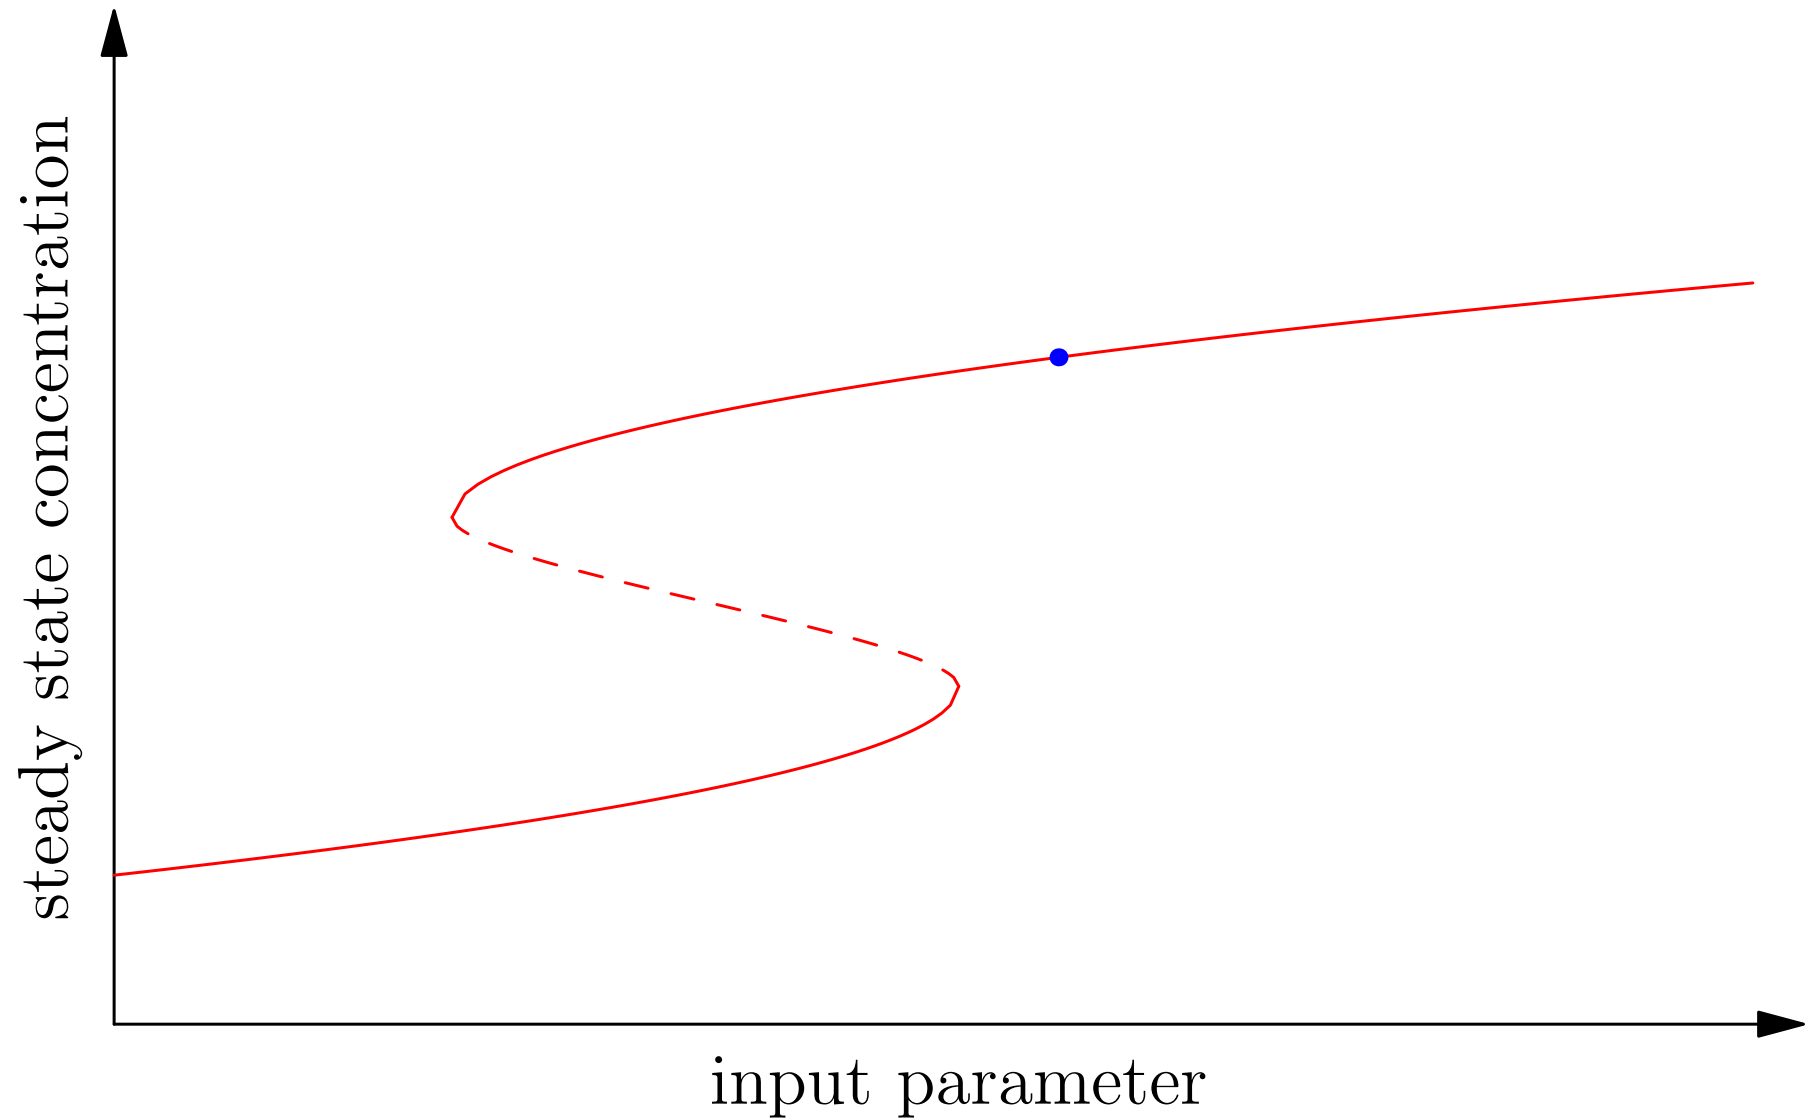


Hysteresis

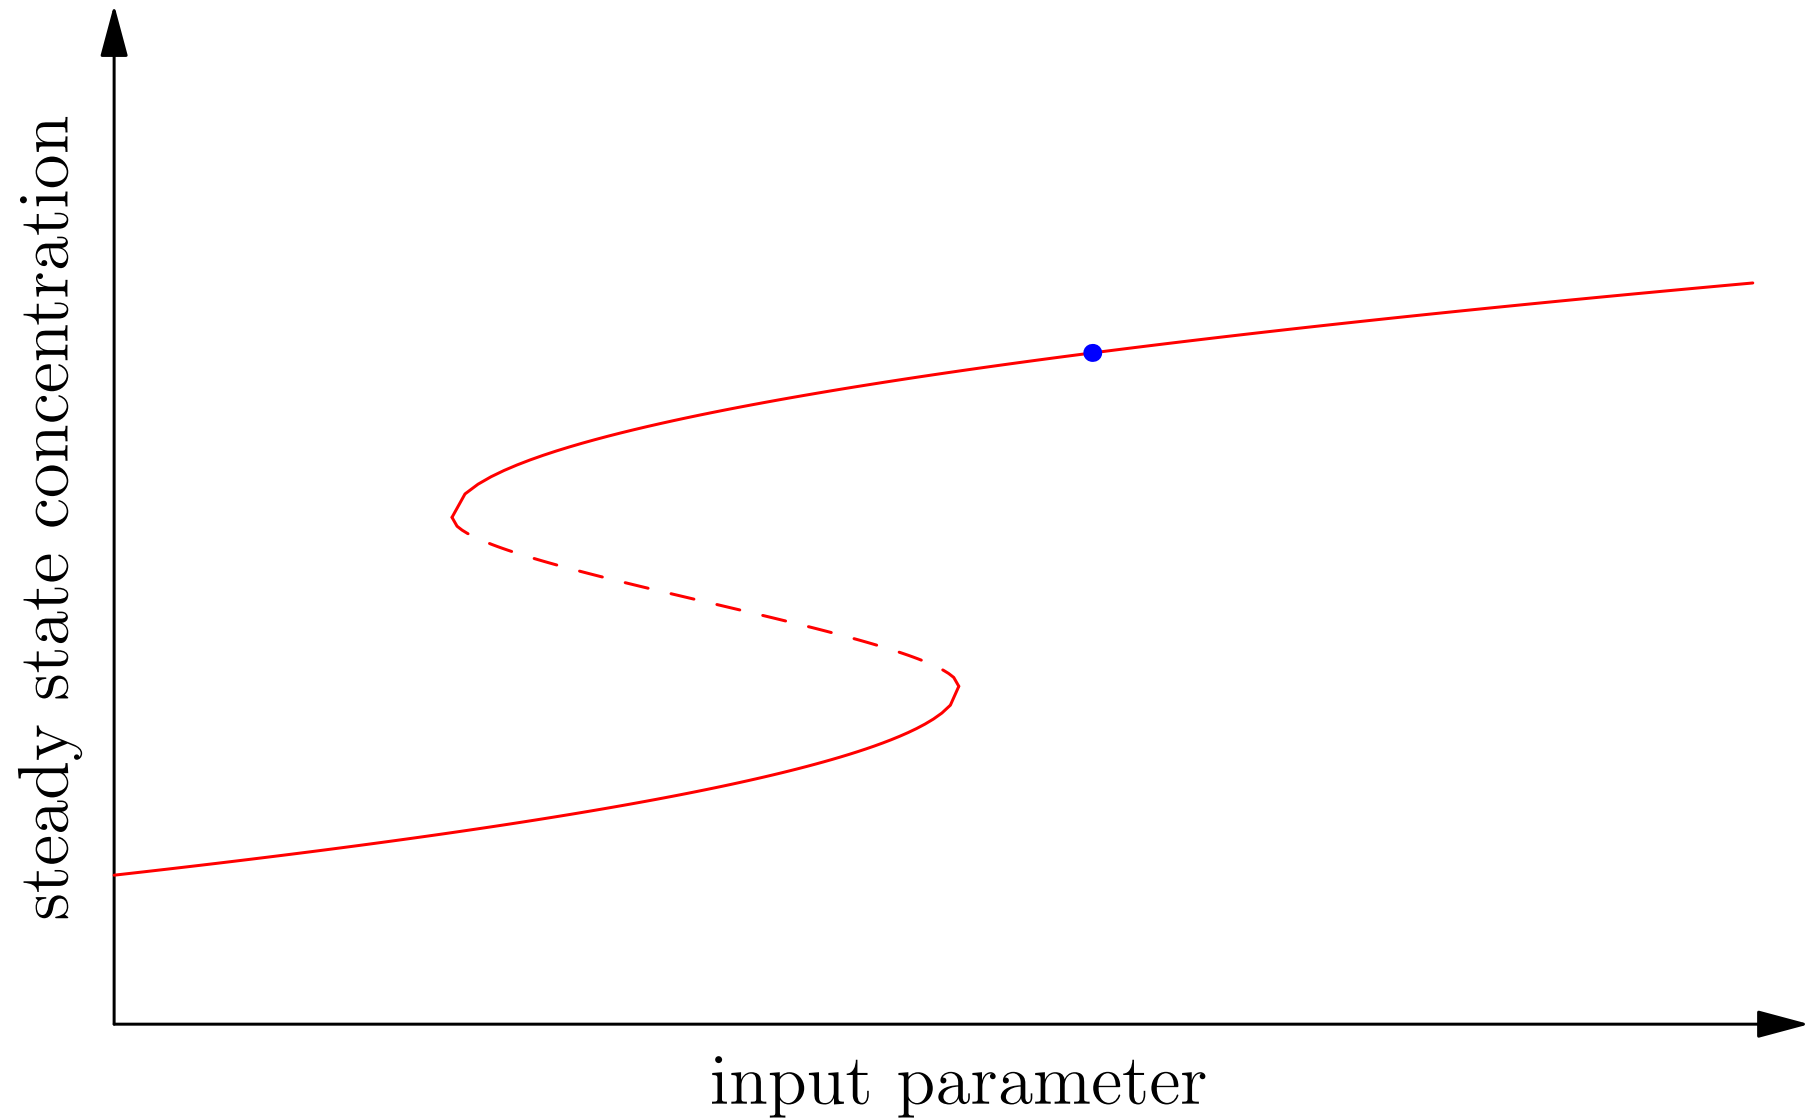


Hysteresis

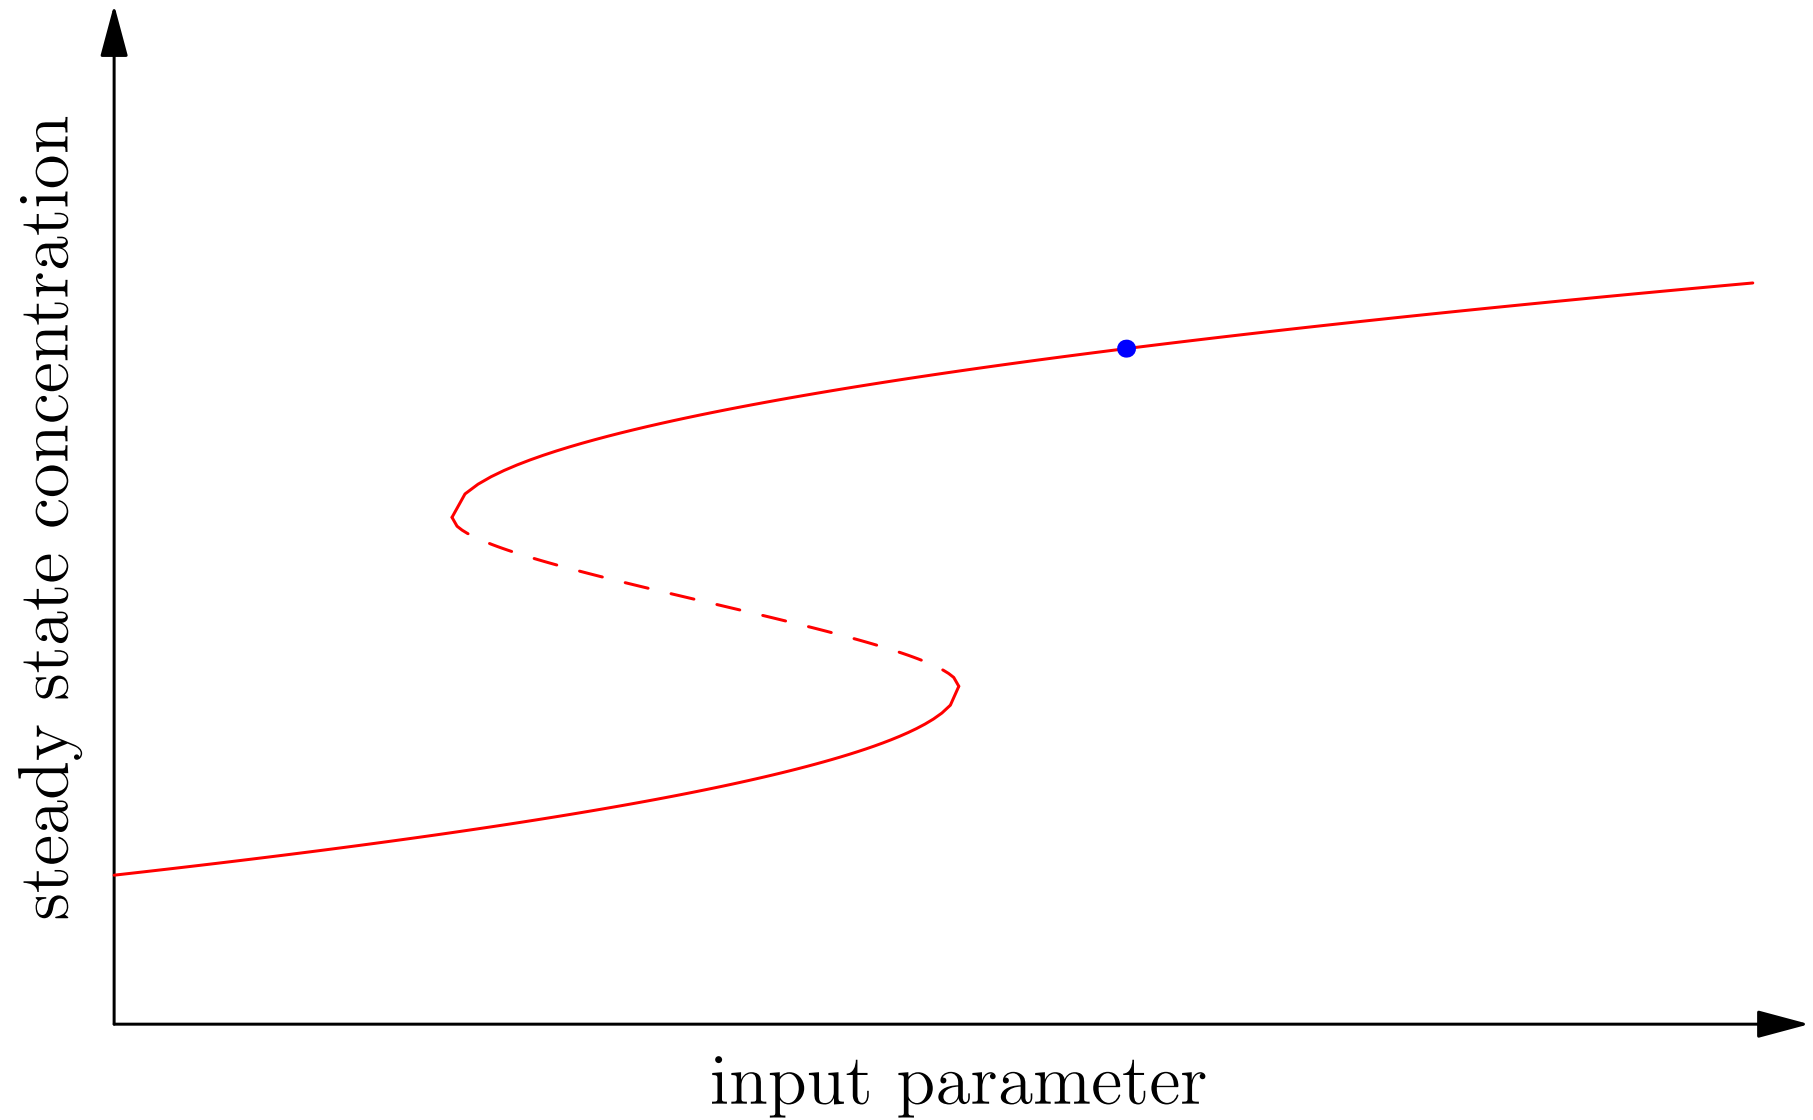


Hysteresis

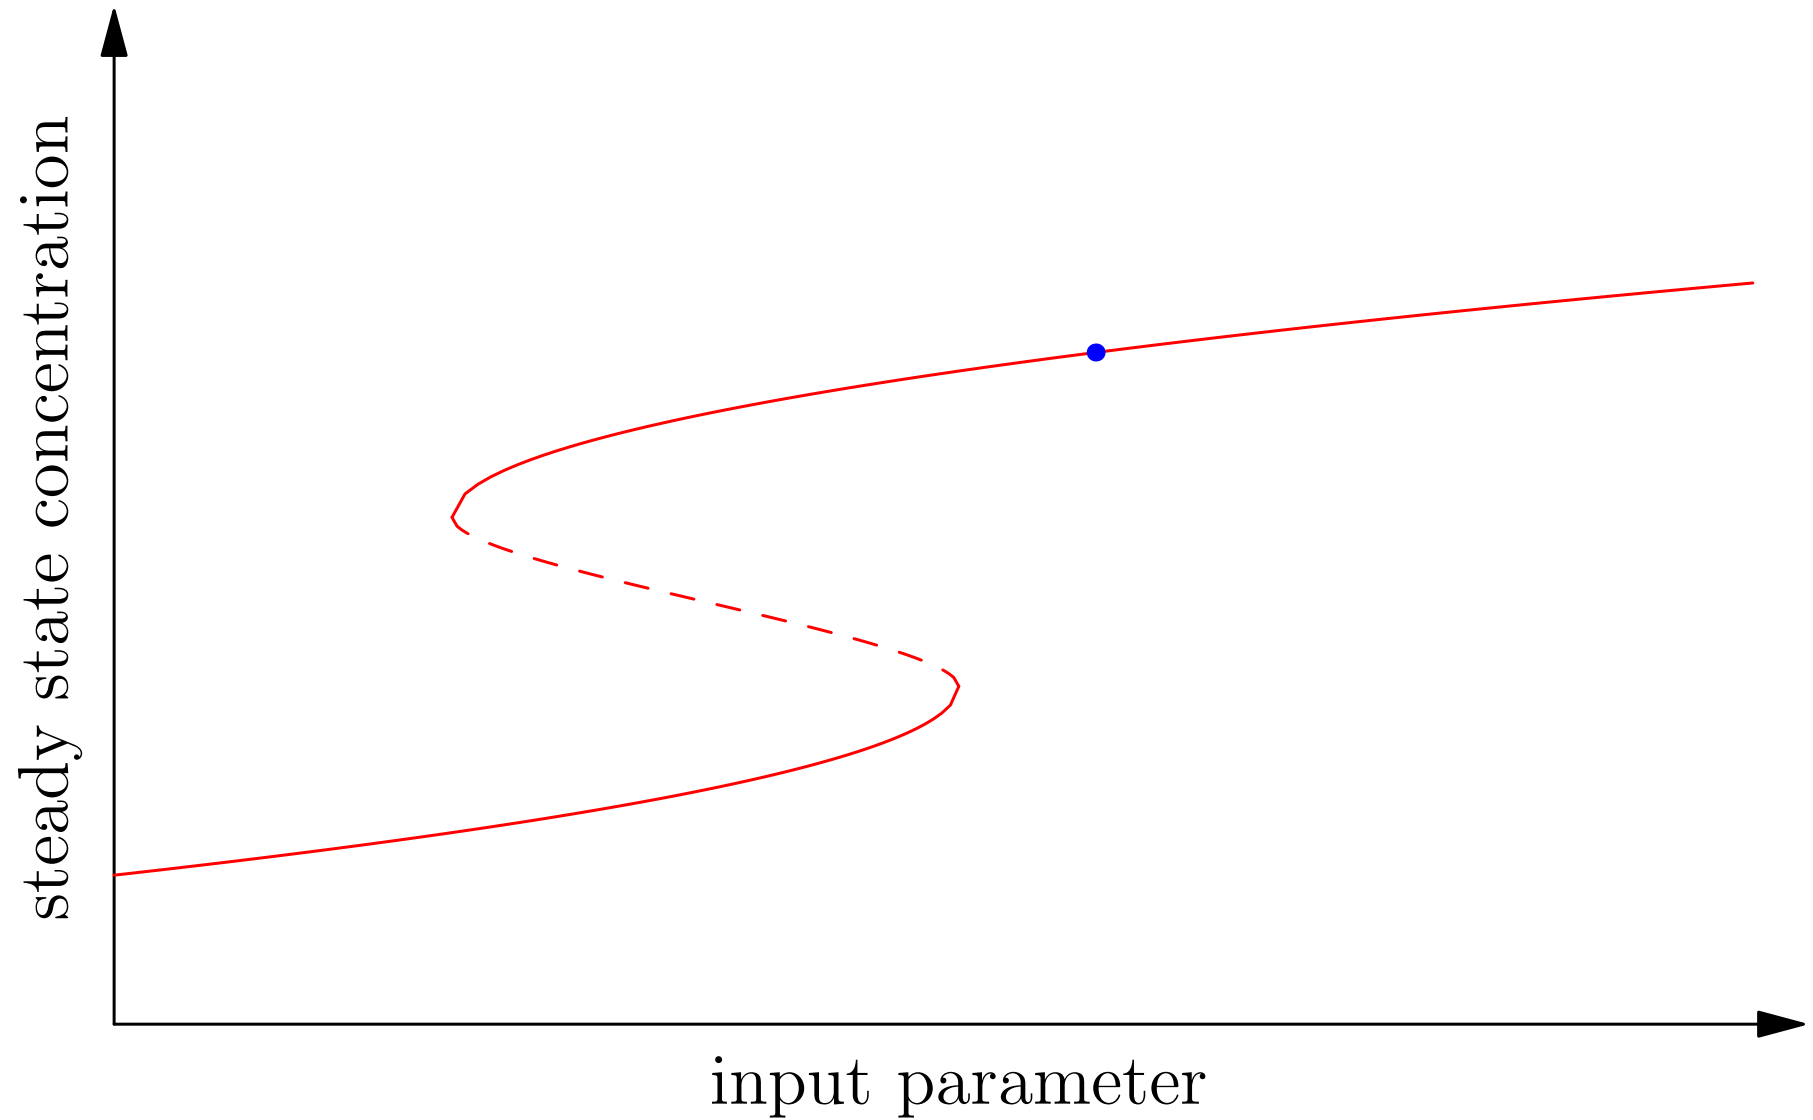


Hysteresis

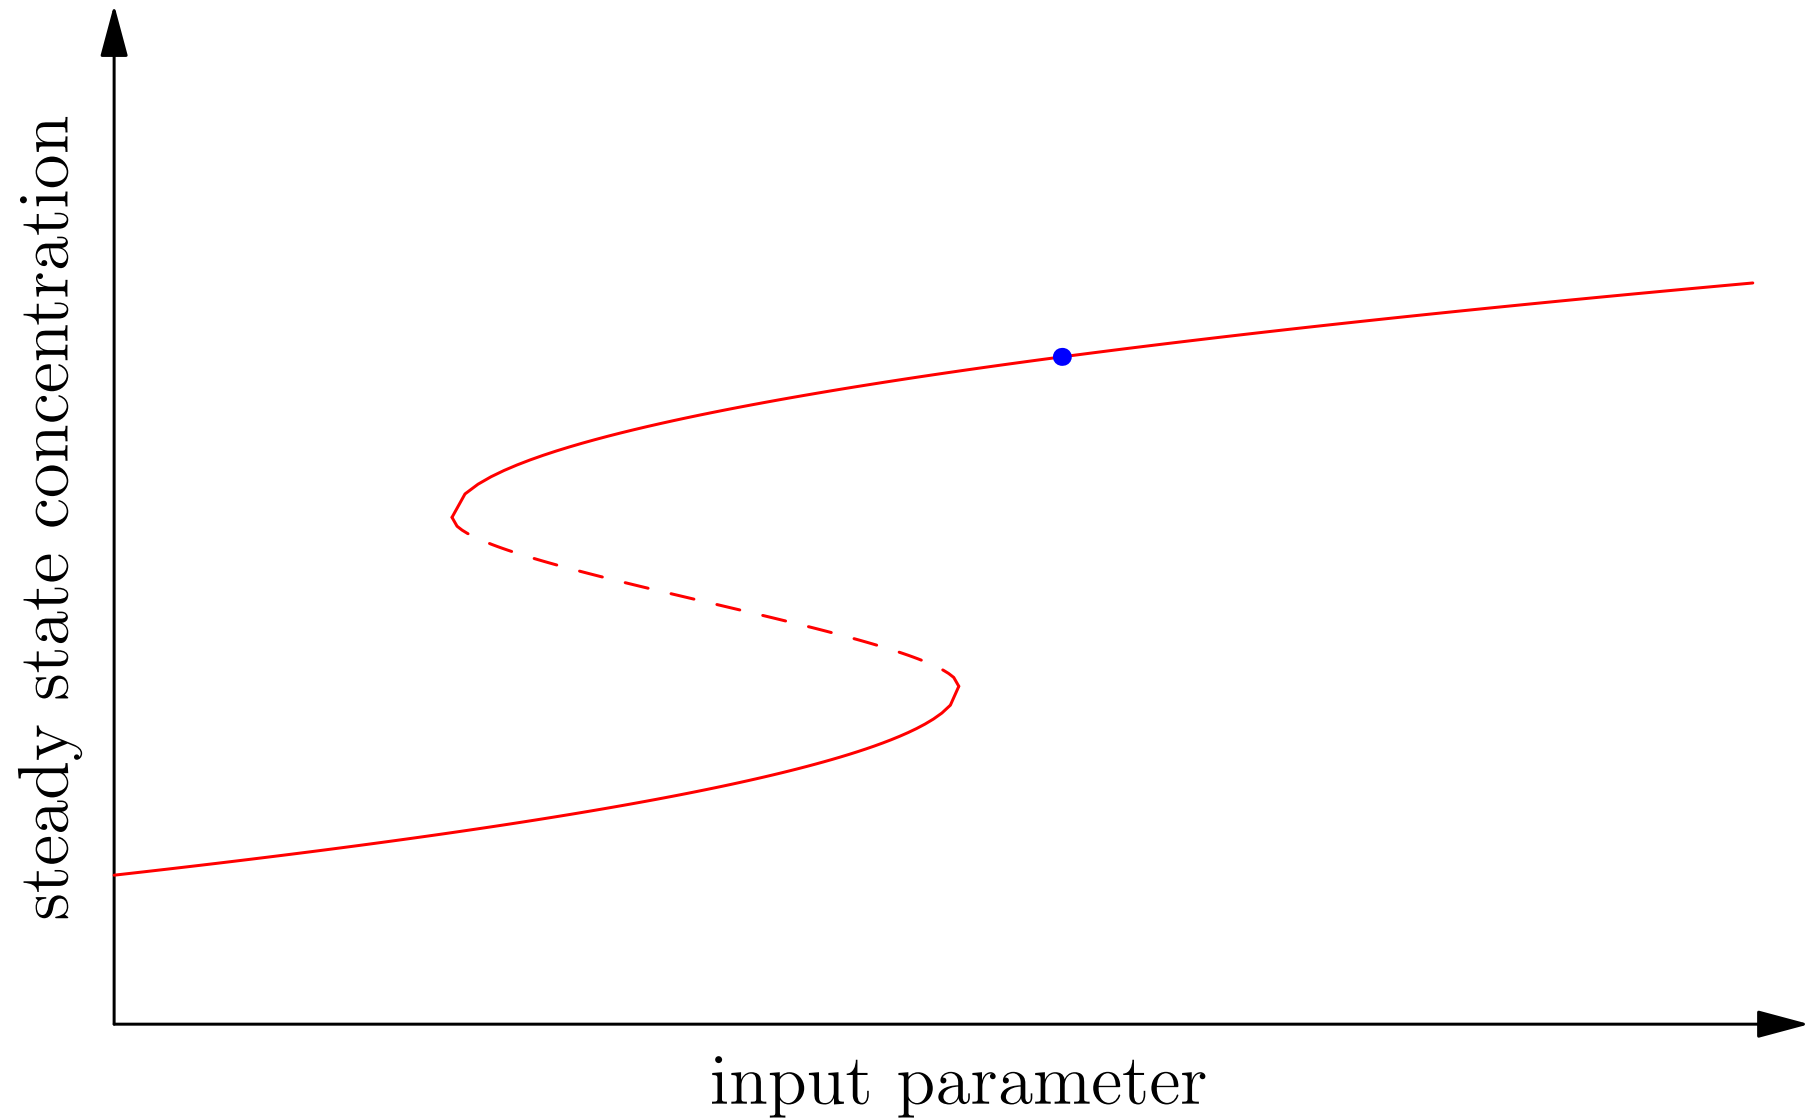


Hysteresis

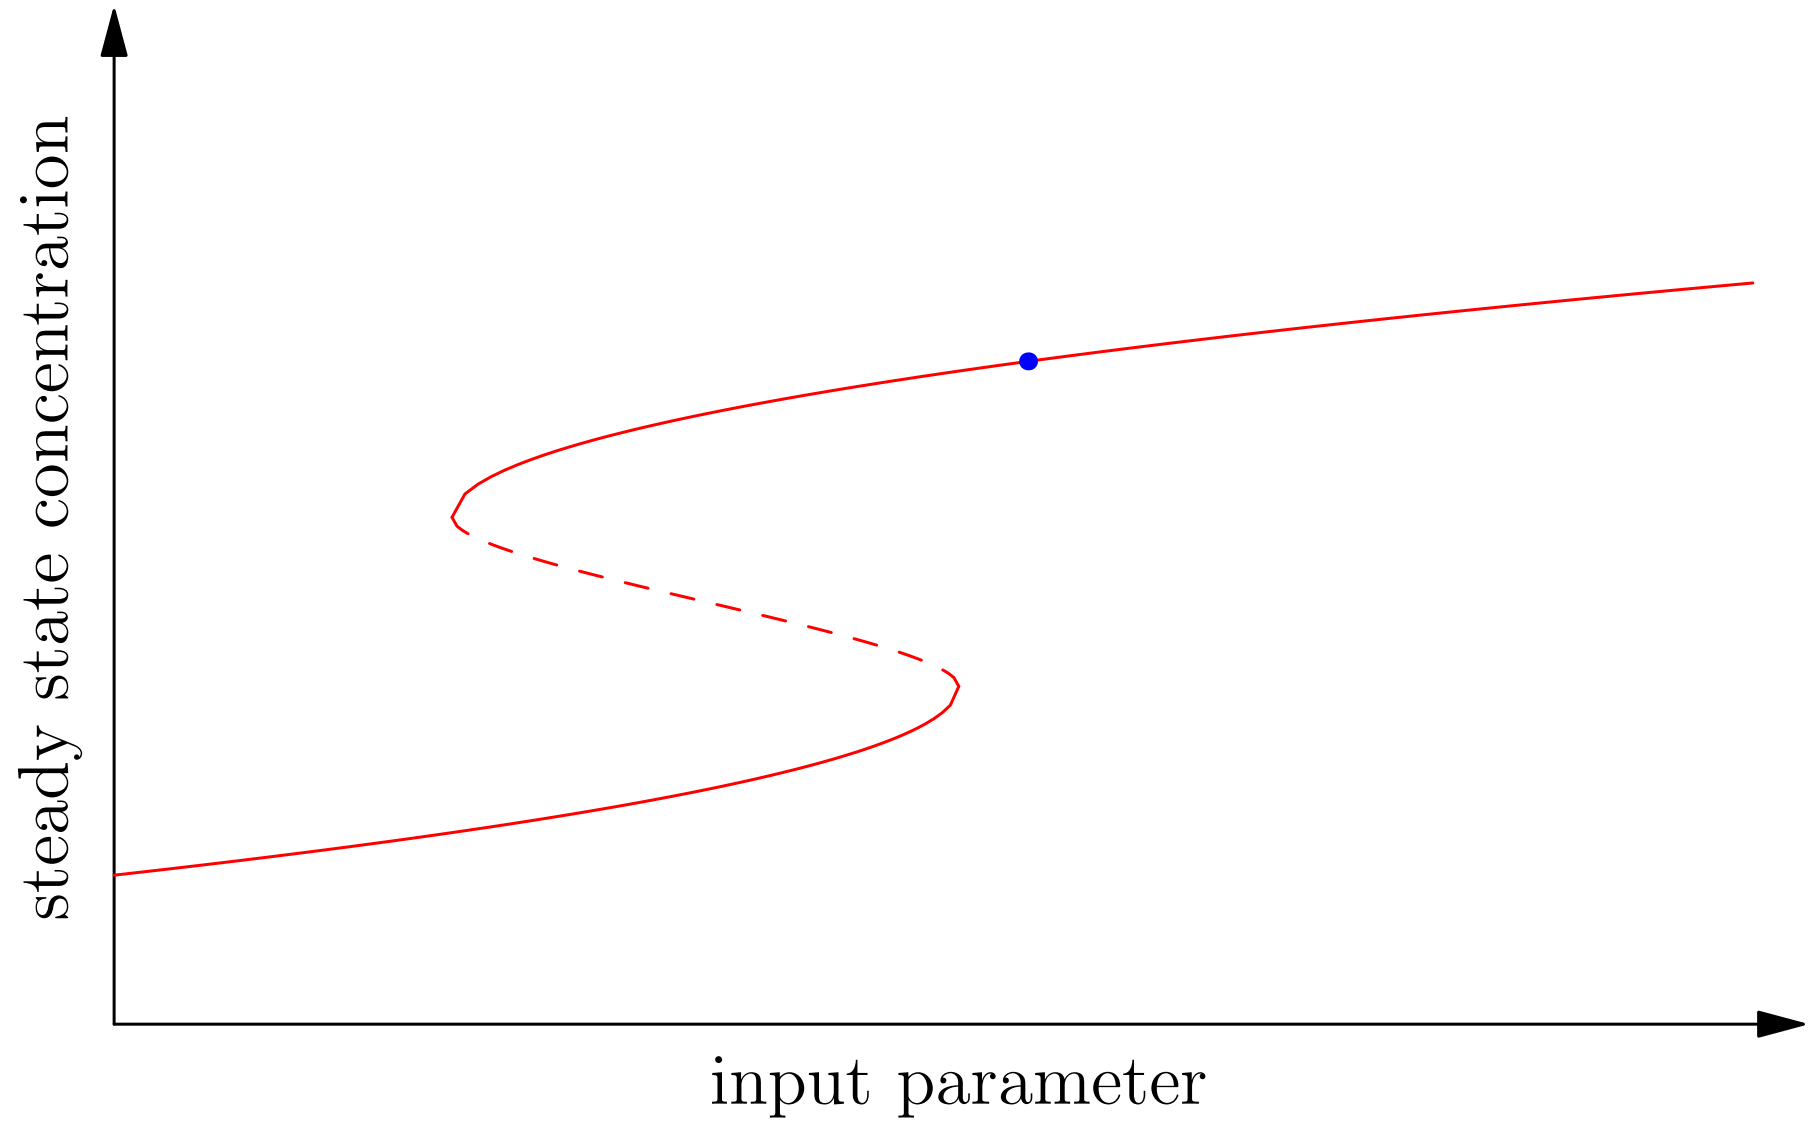


Hysteresis

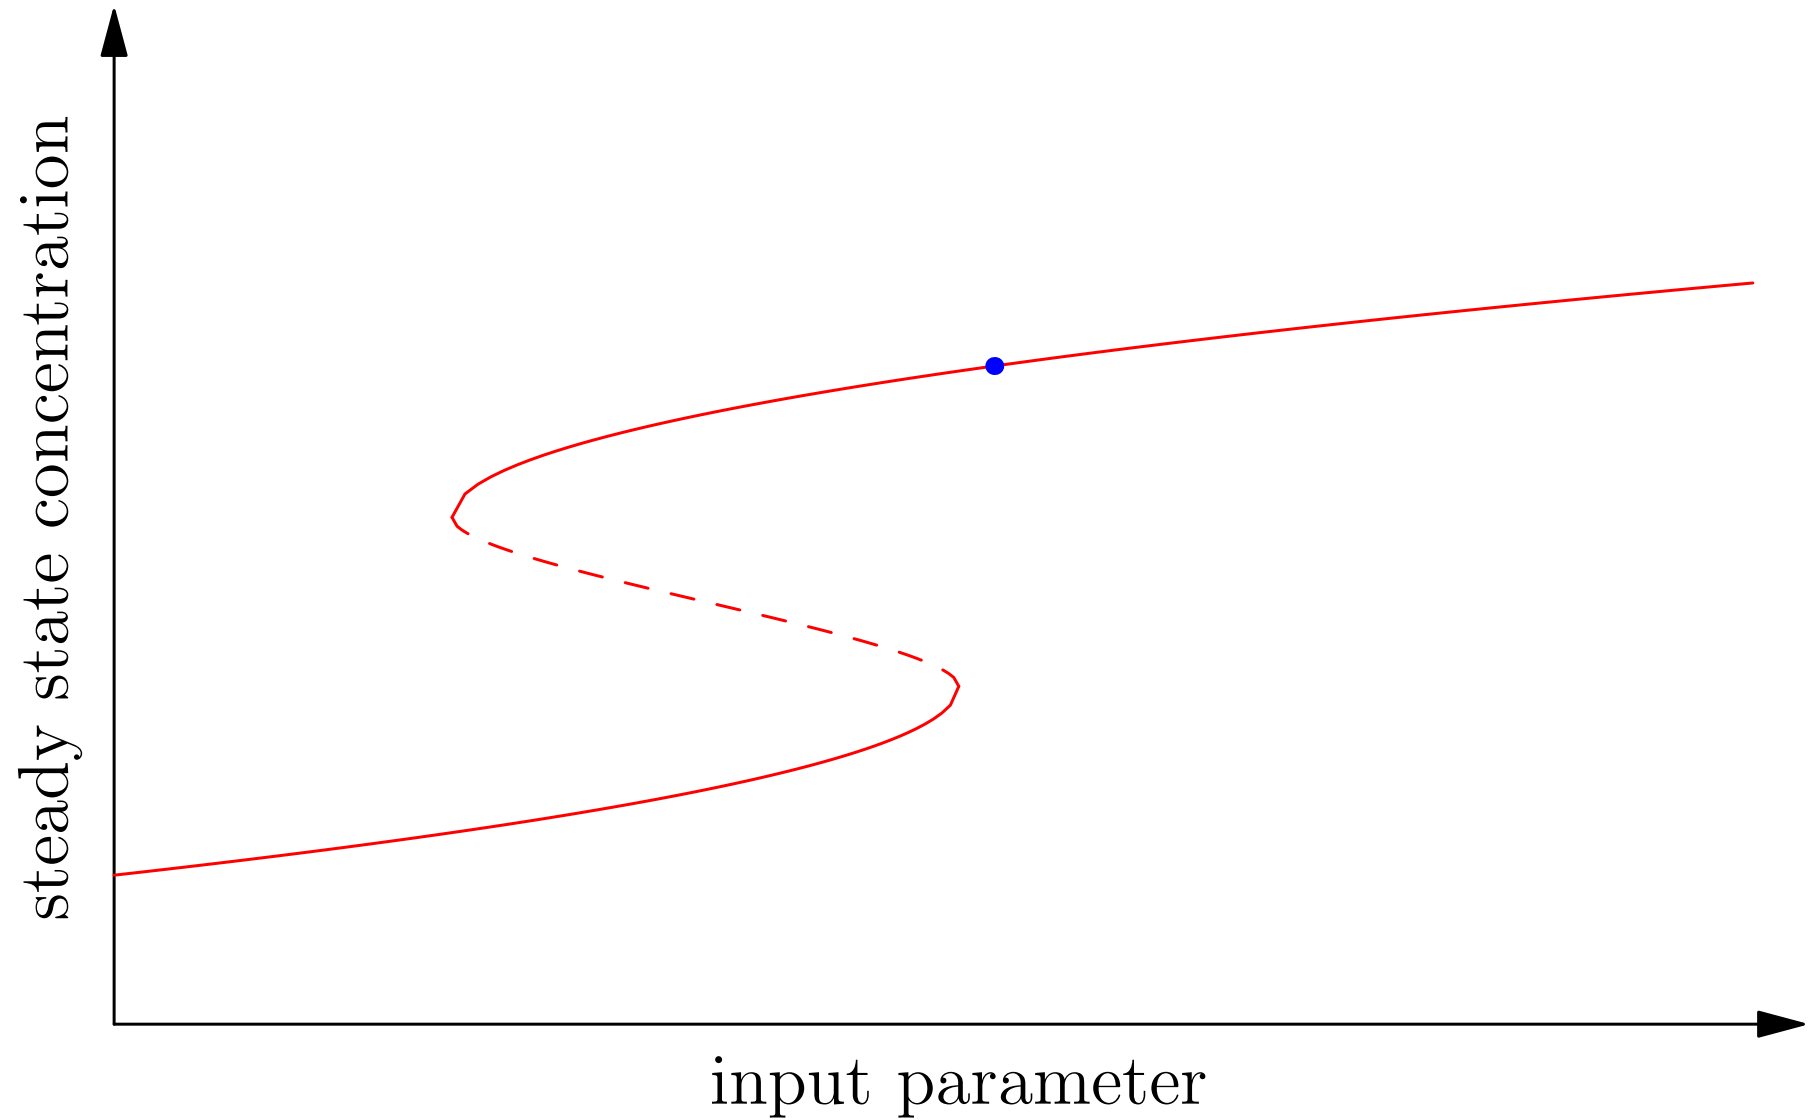


Hysteresis

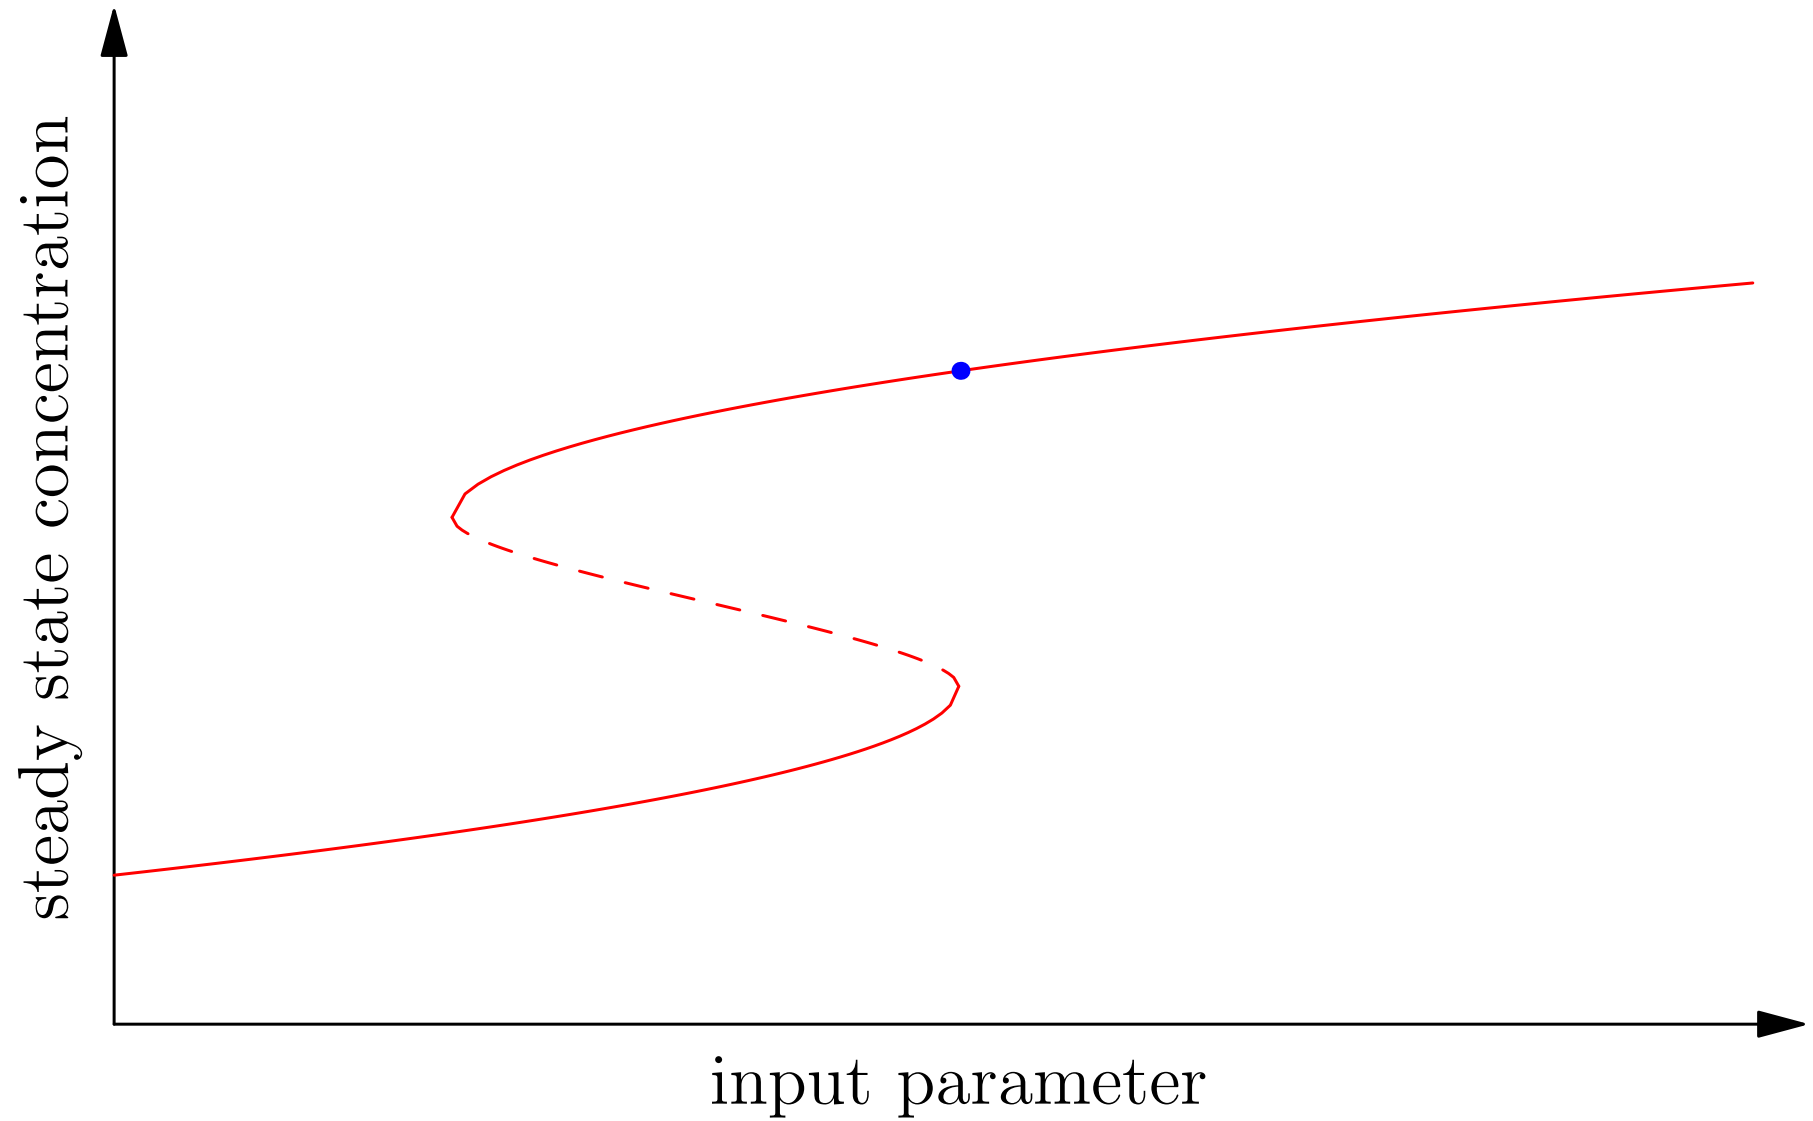


Hysteresis

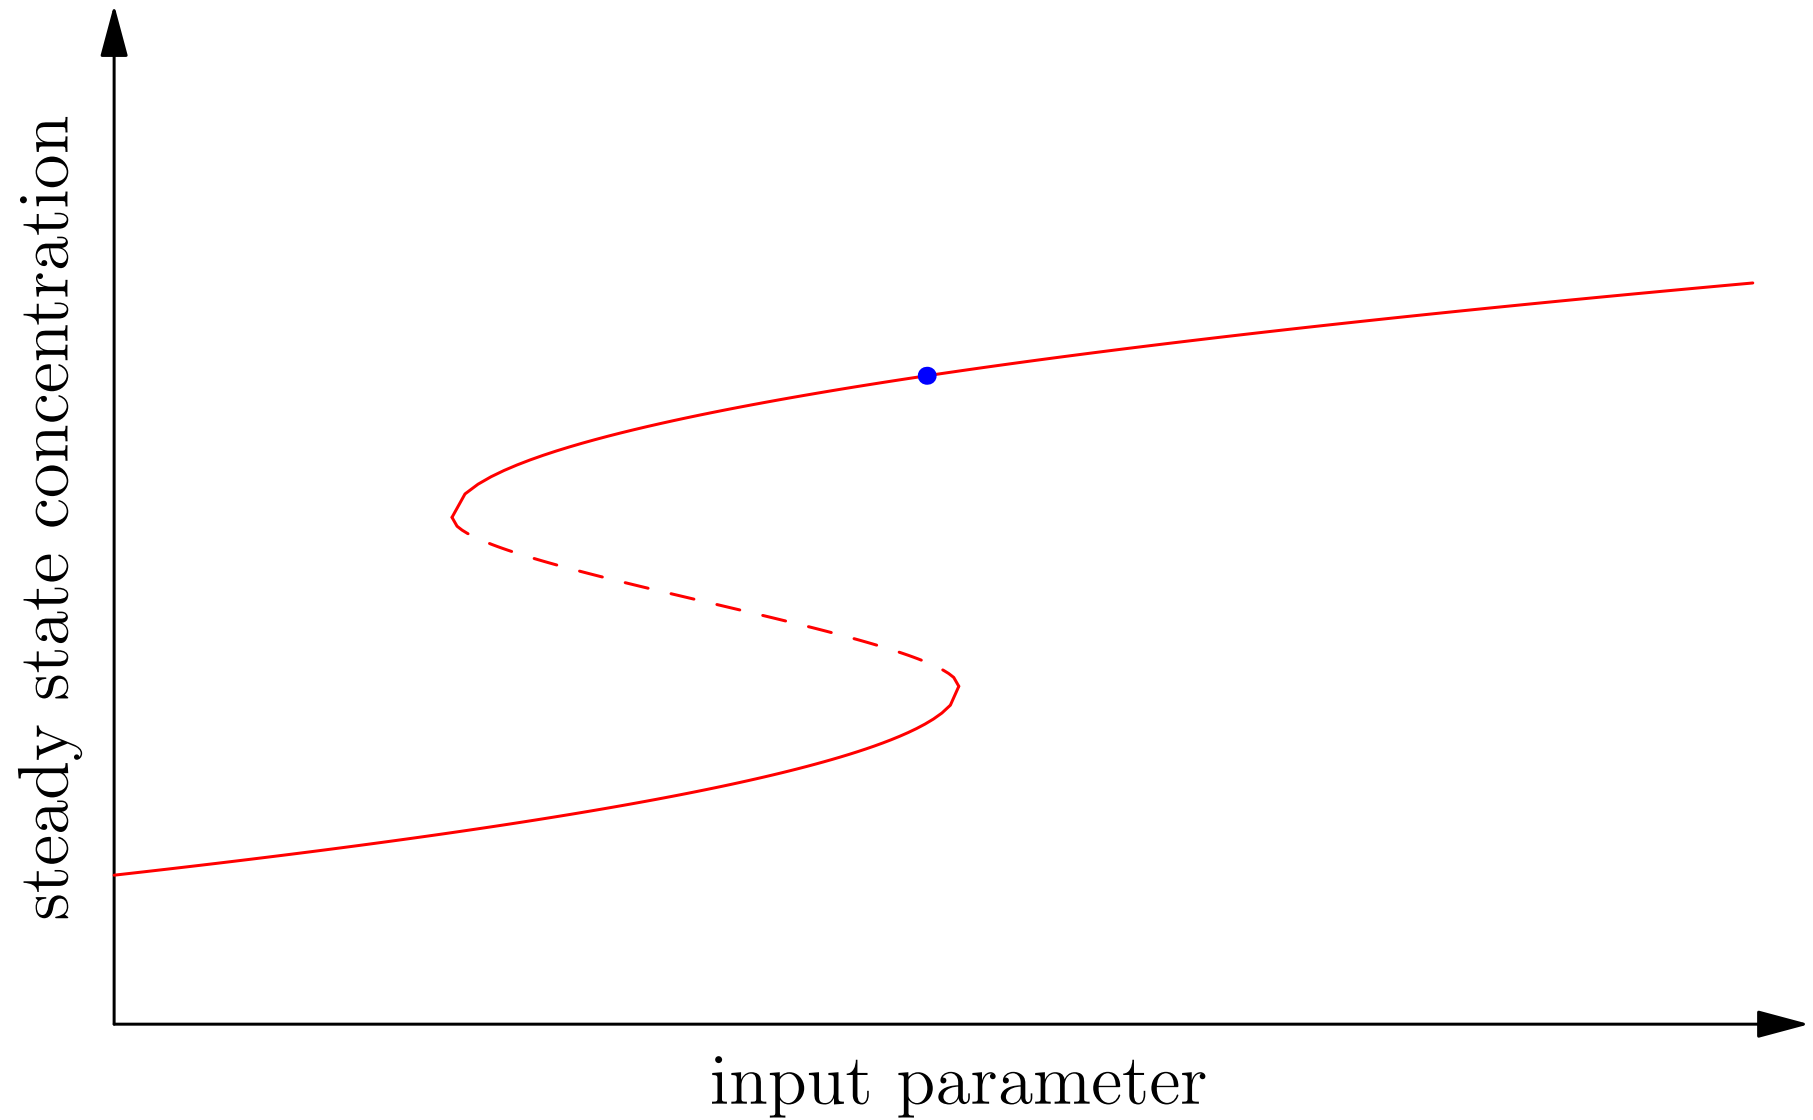


Hysteresis

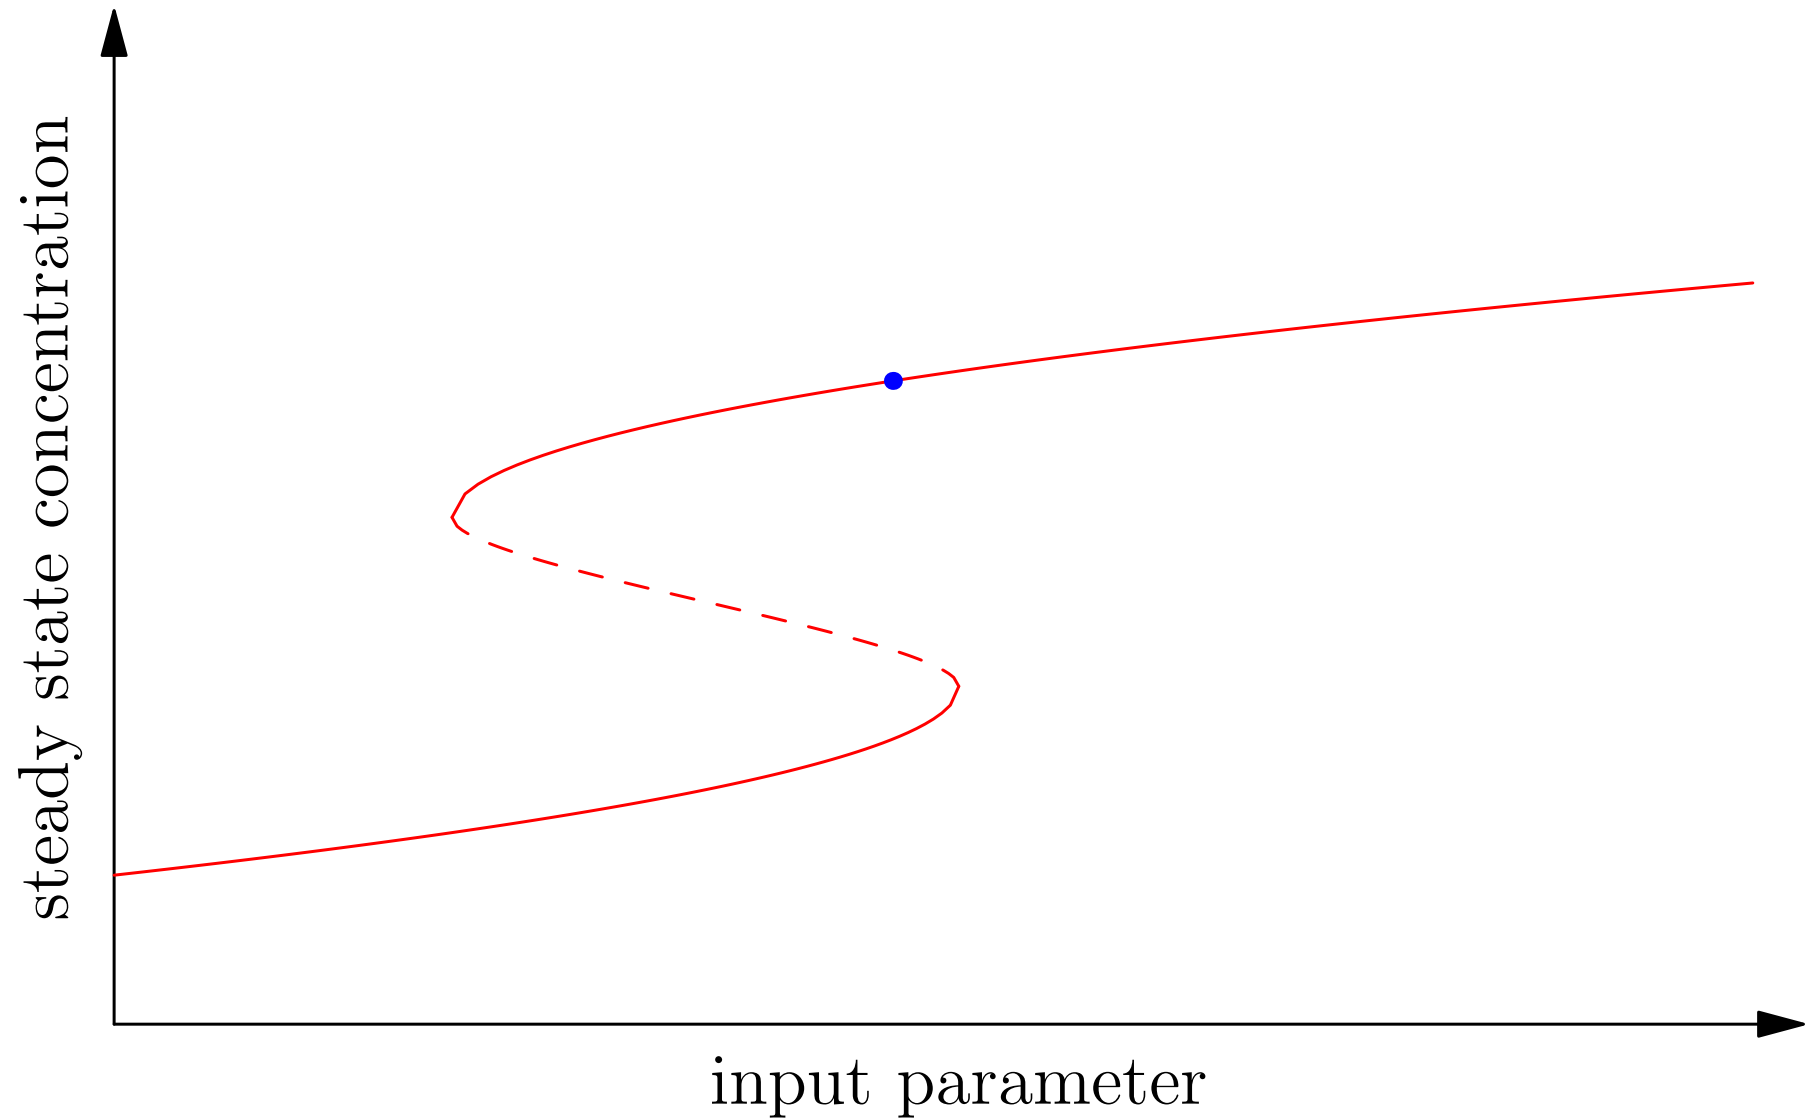


Hysteresis

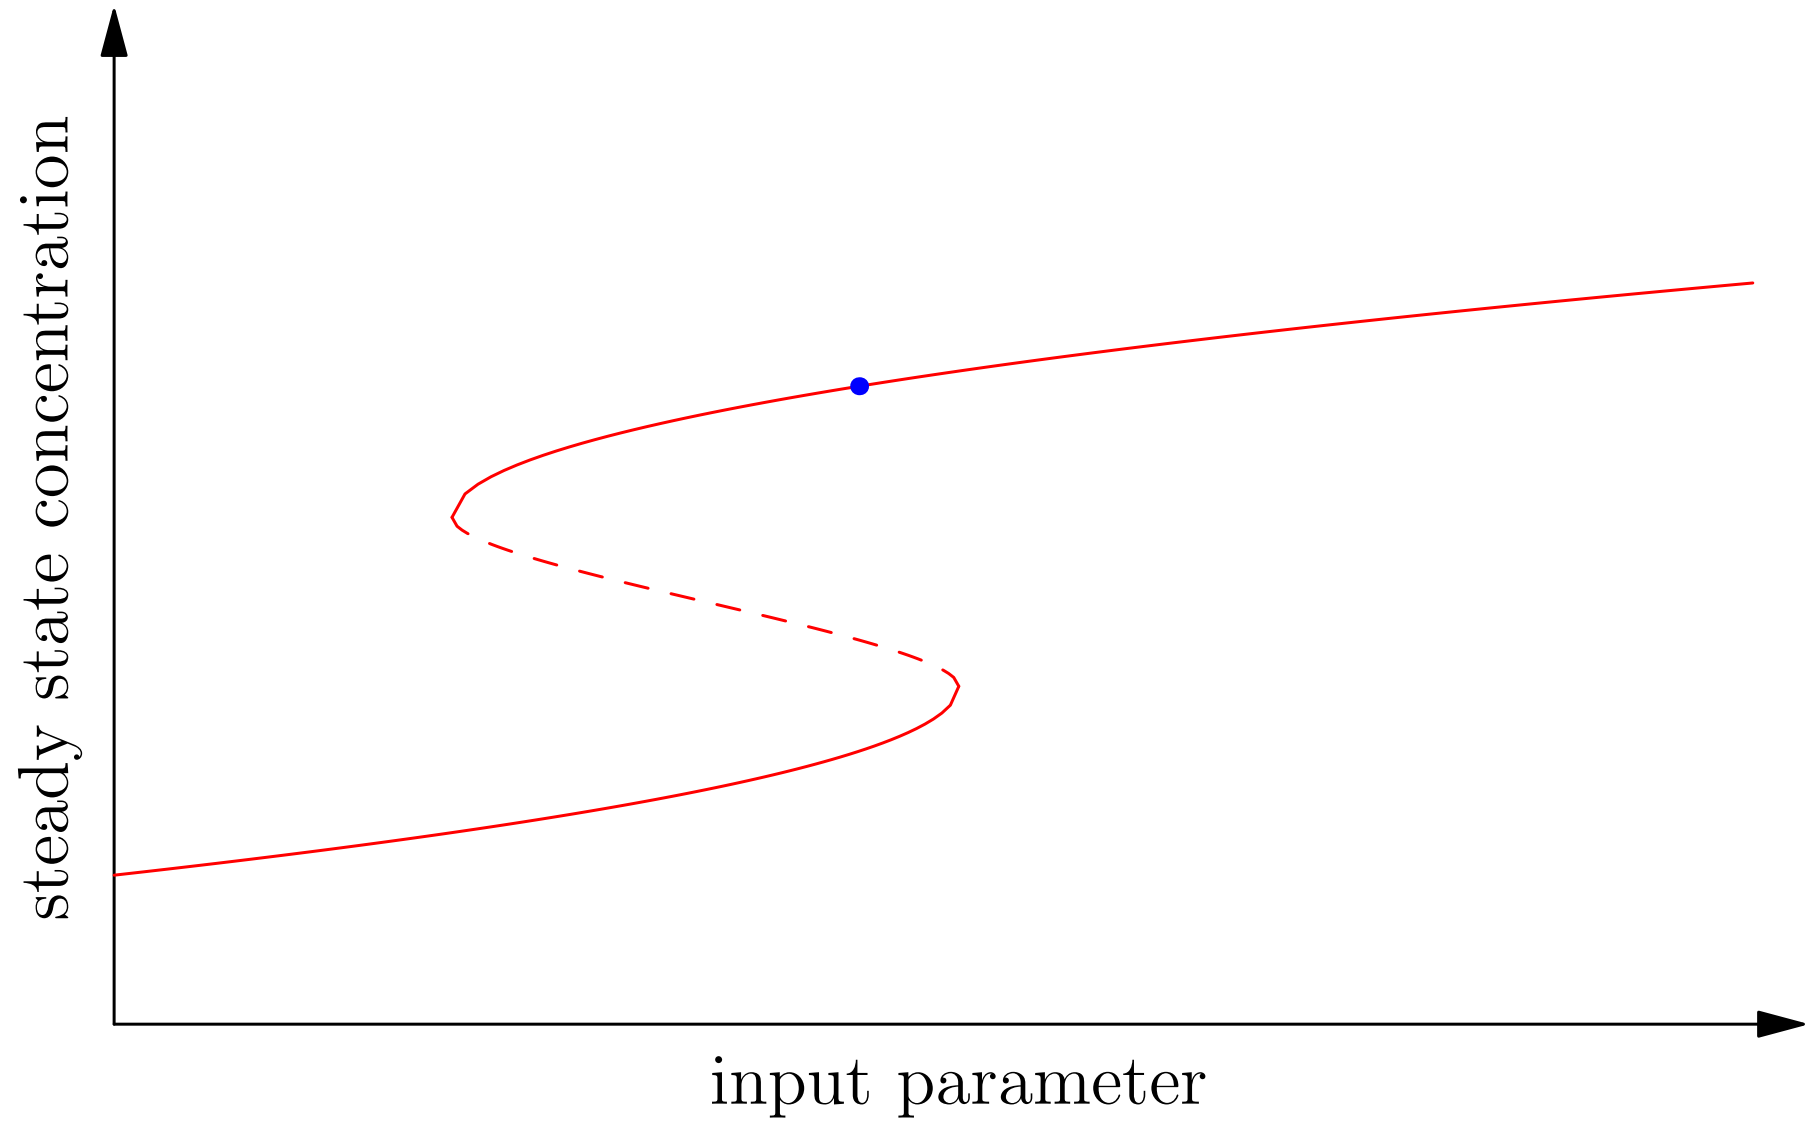


Hysteresis

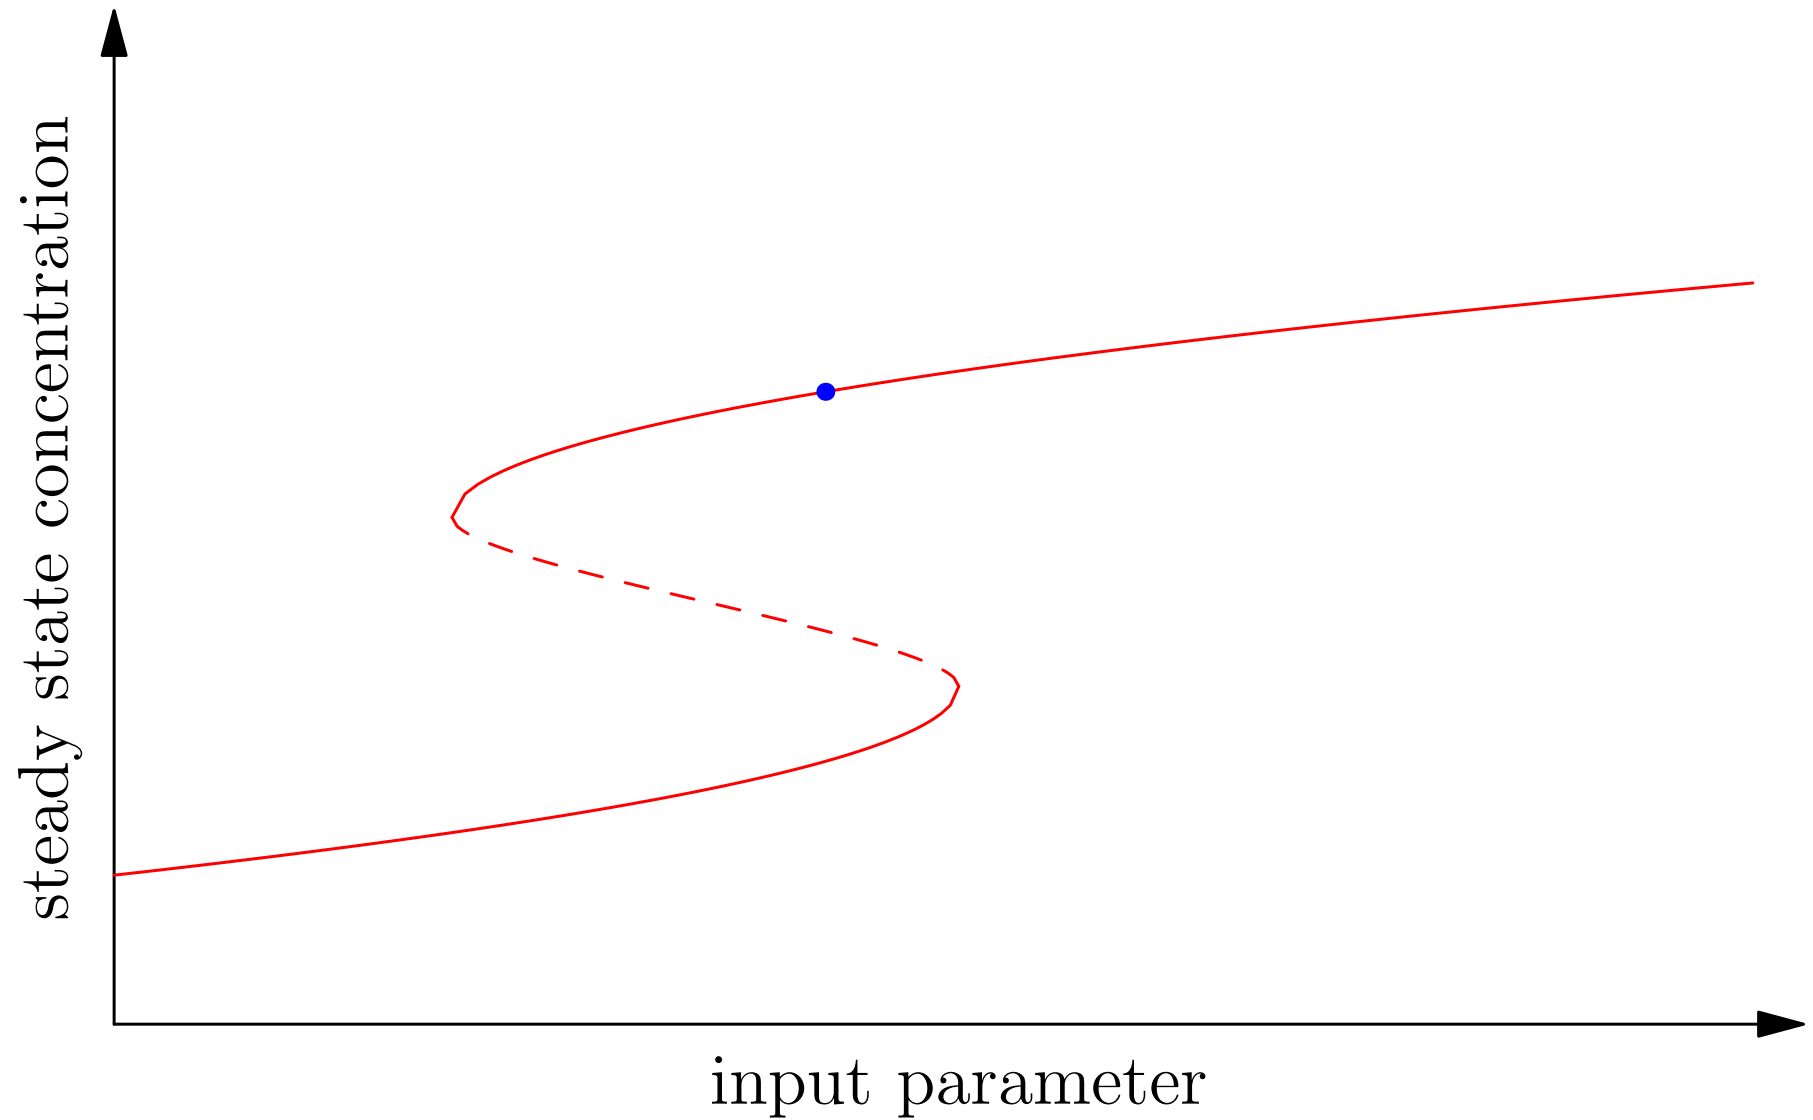


Hysteresis

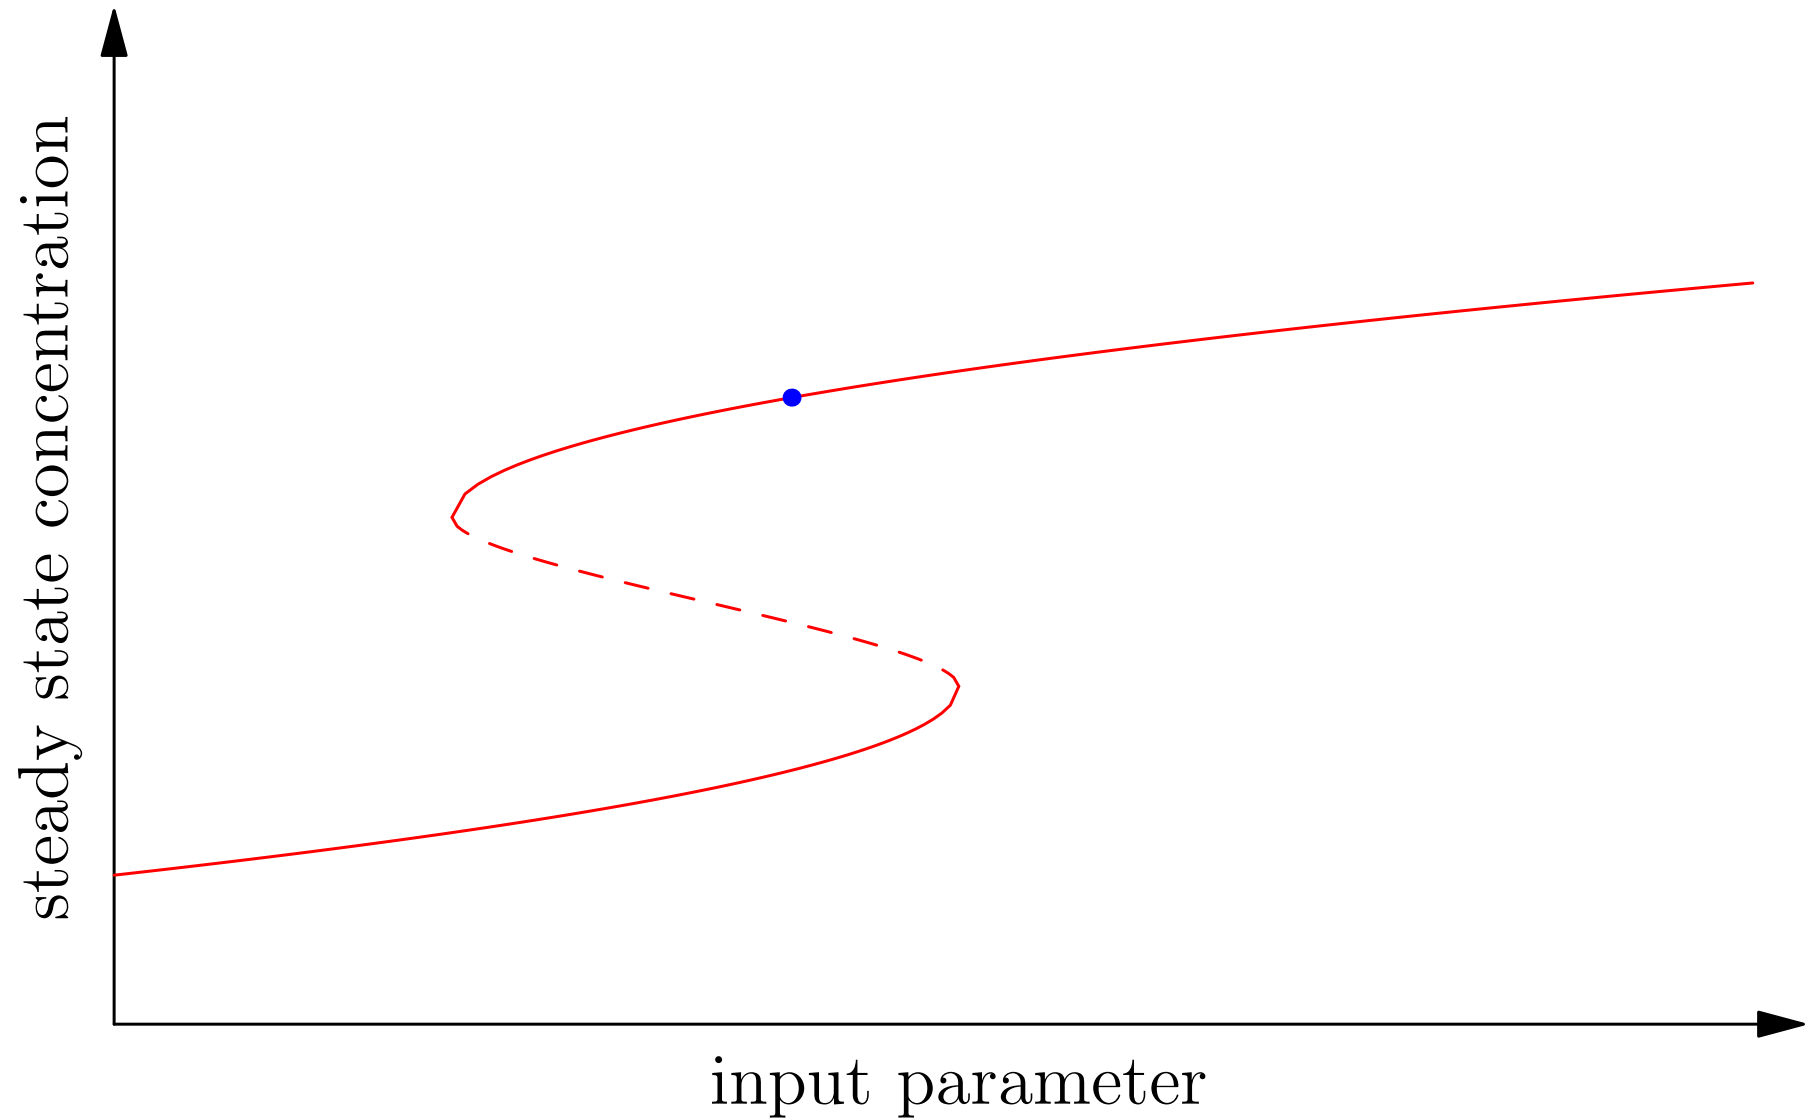


Hysteresis

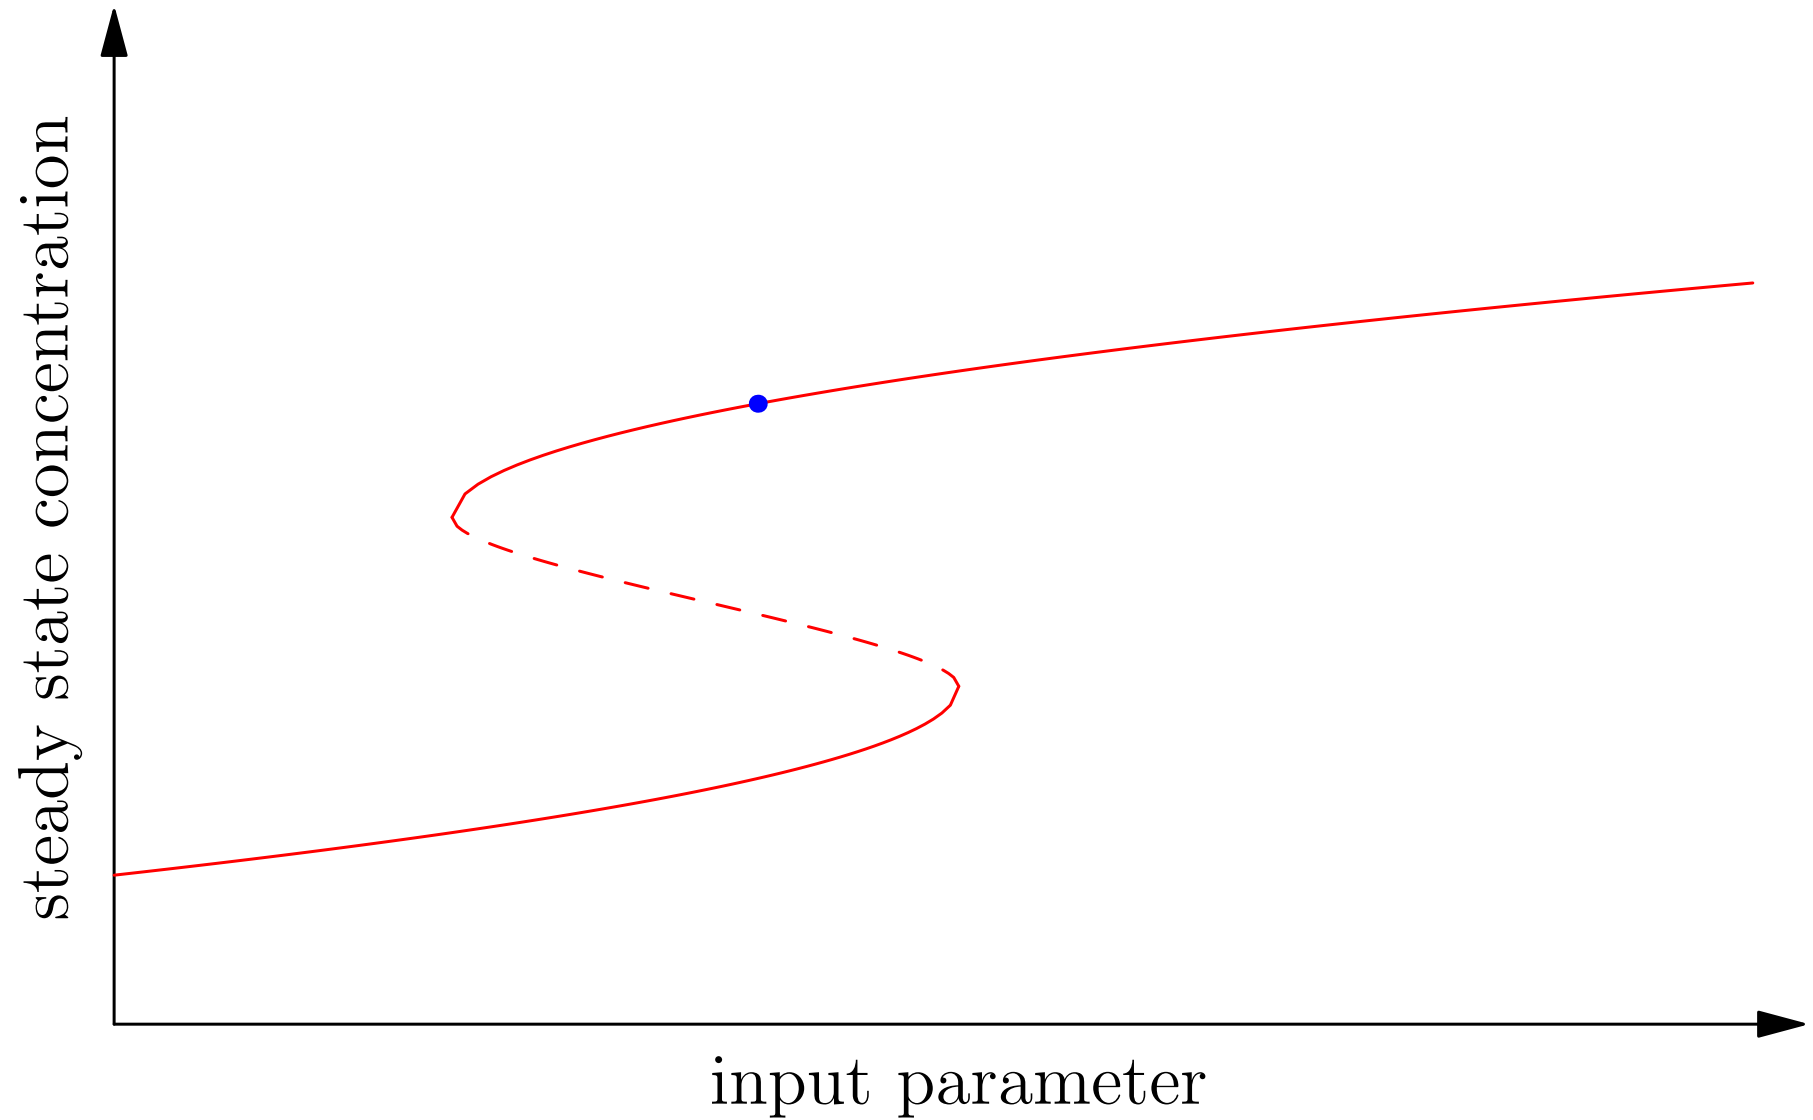


Hysteresis

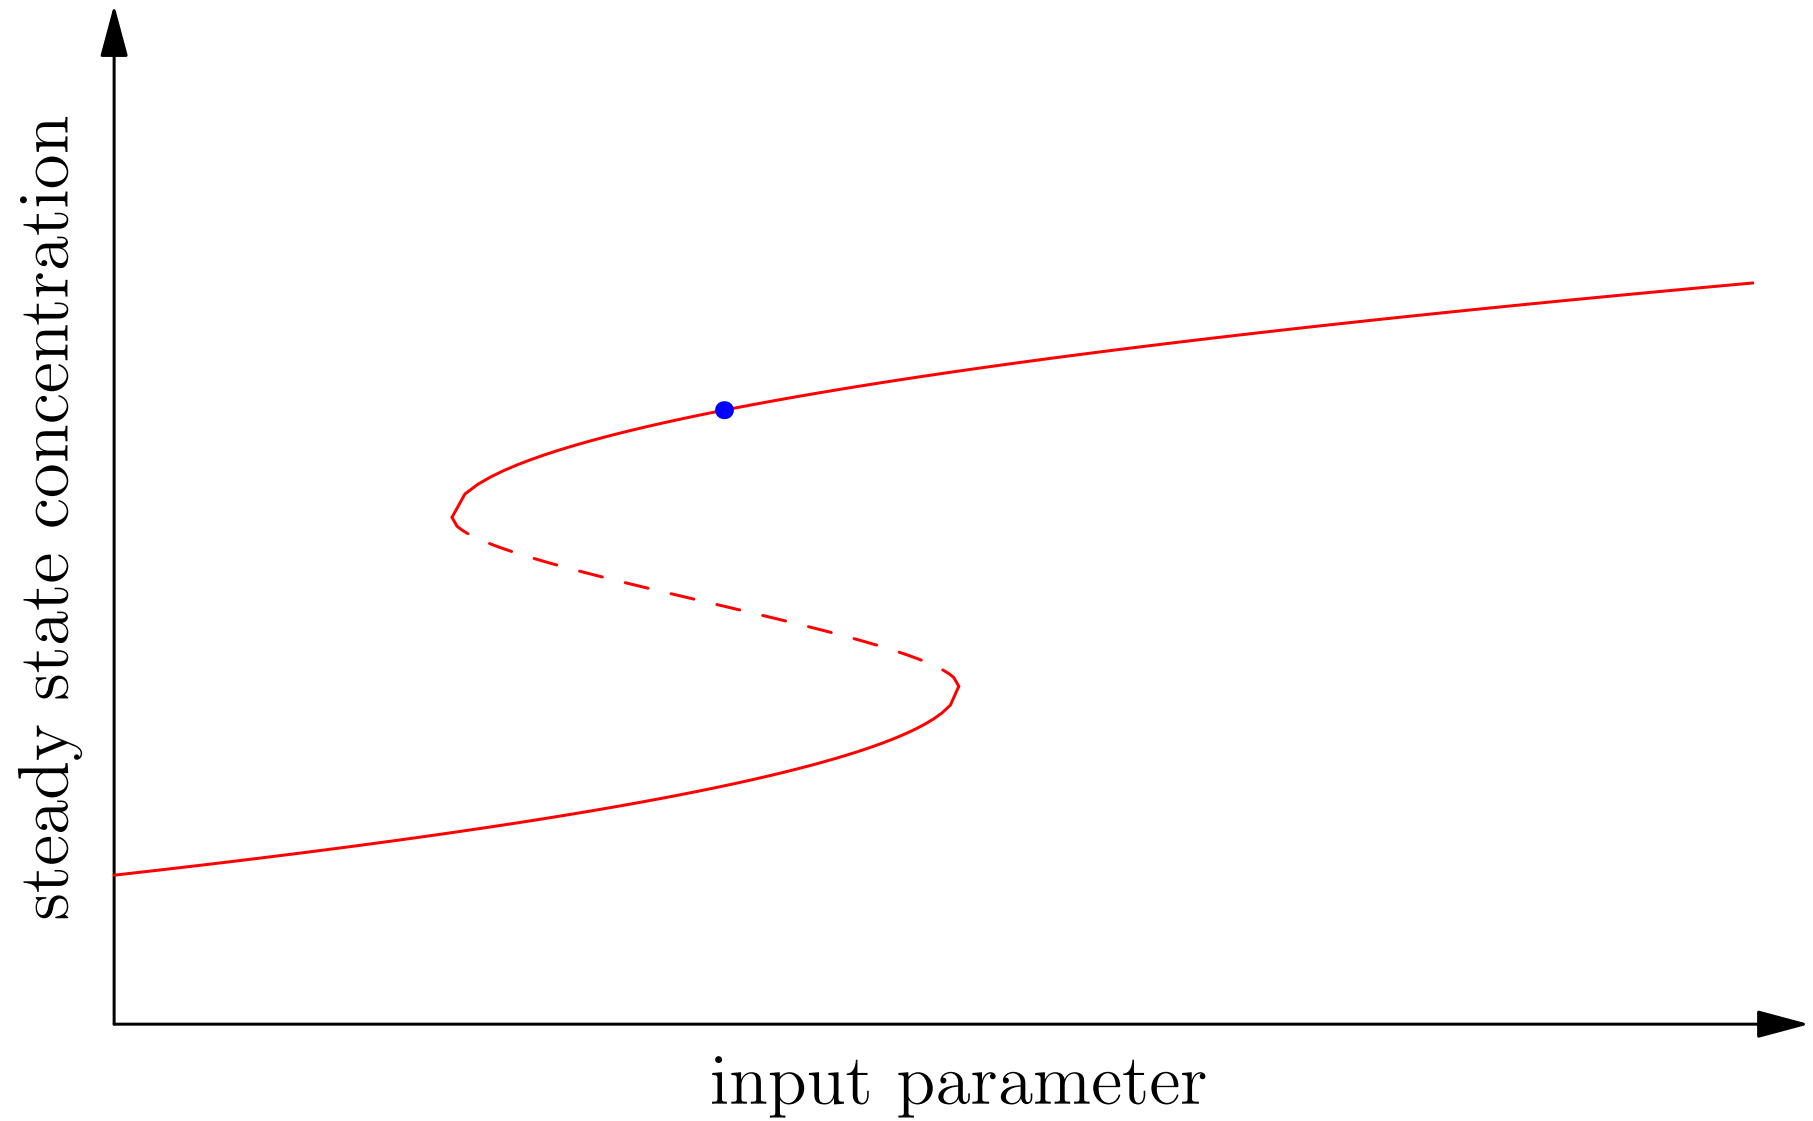


Hysteresis

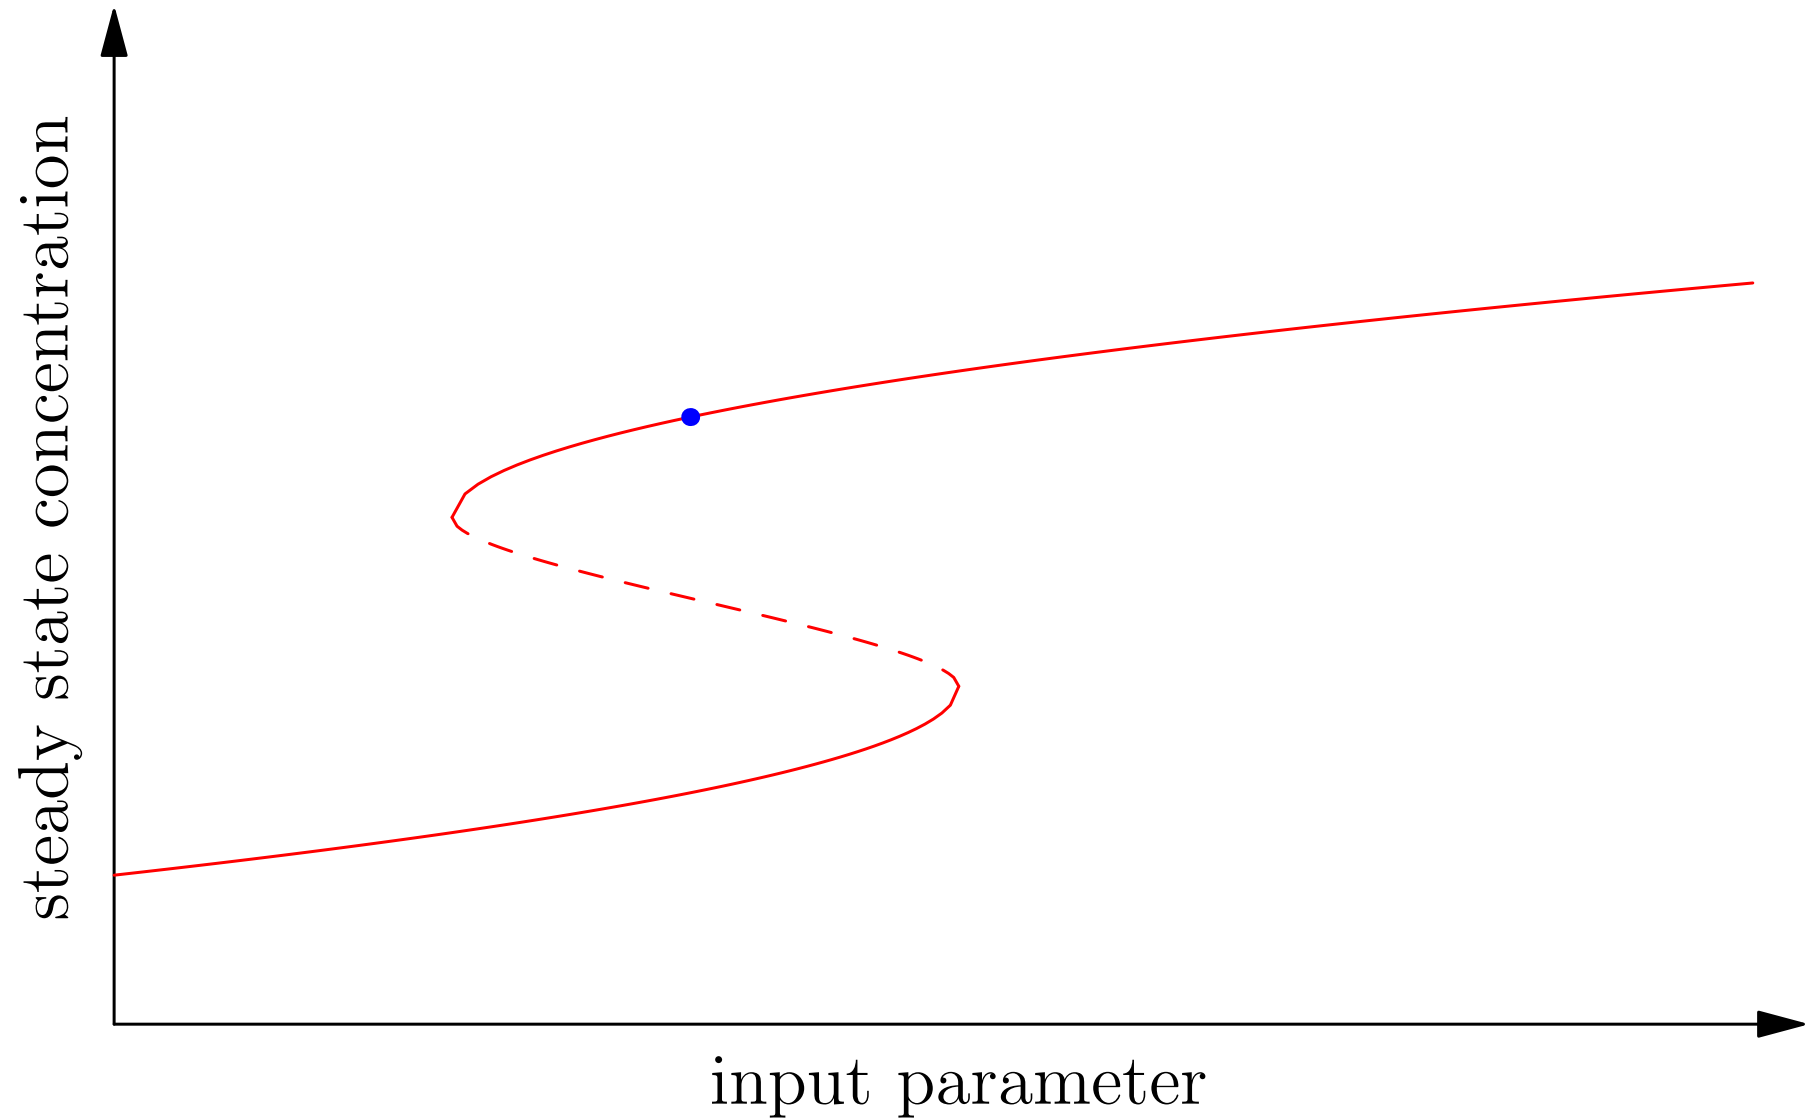


Hysteresis

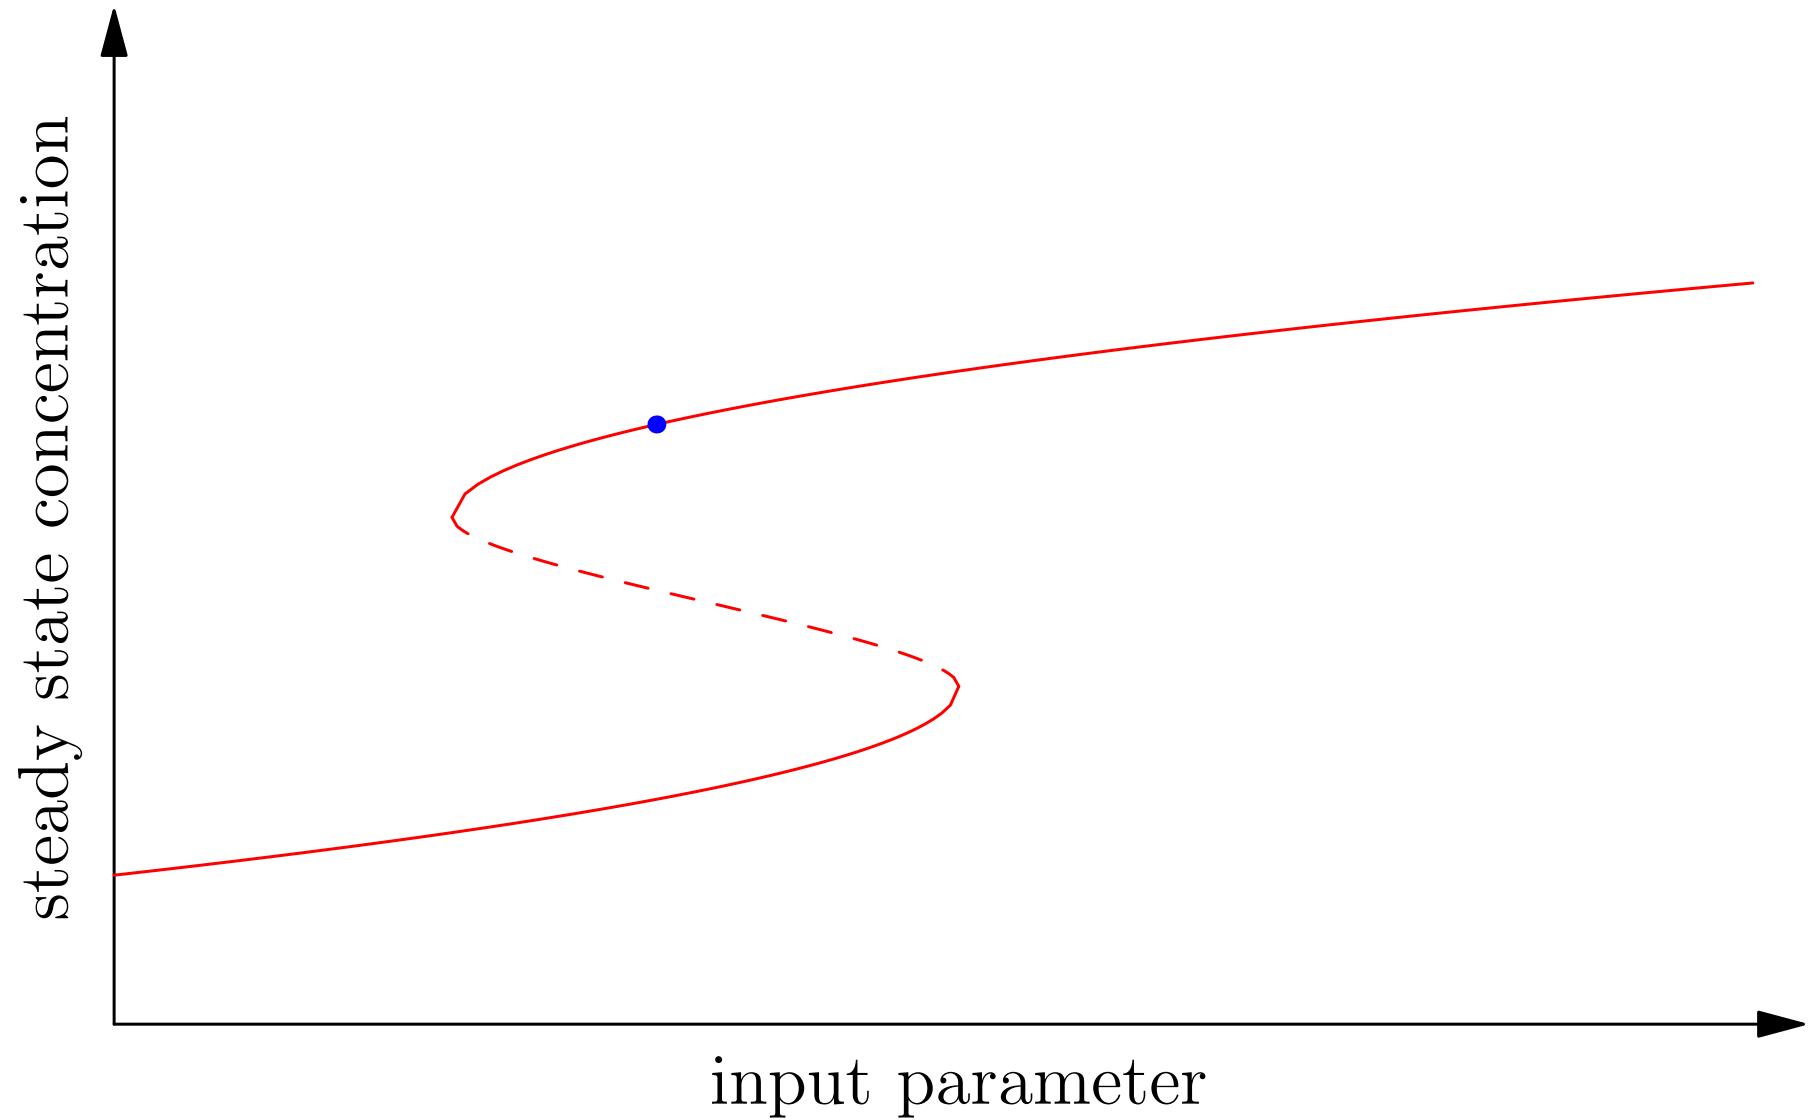


Hysteresis

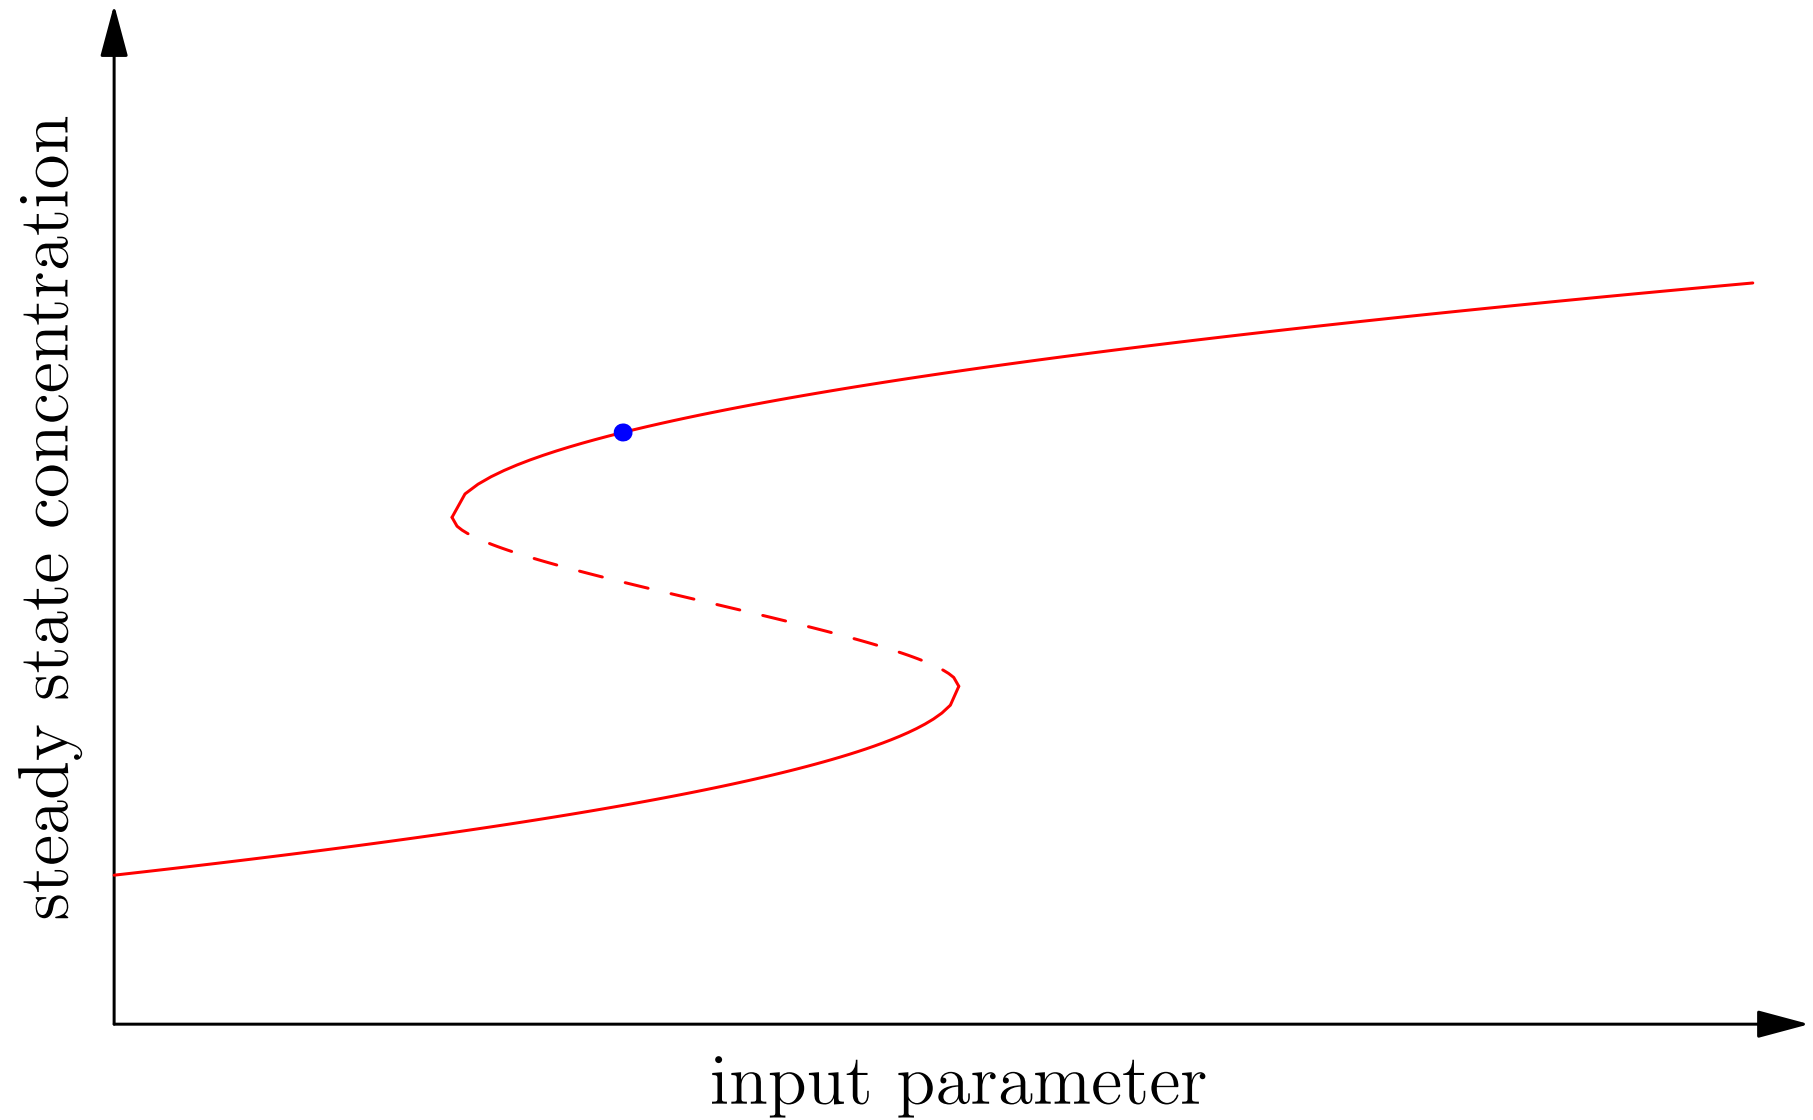


Hysteresis

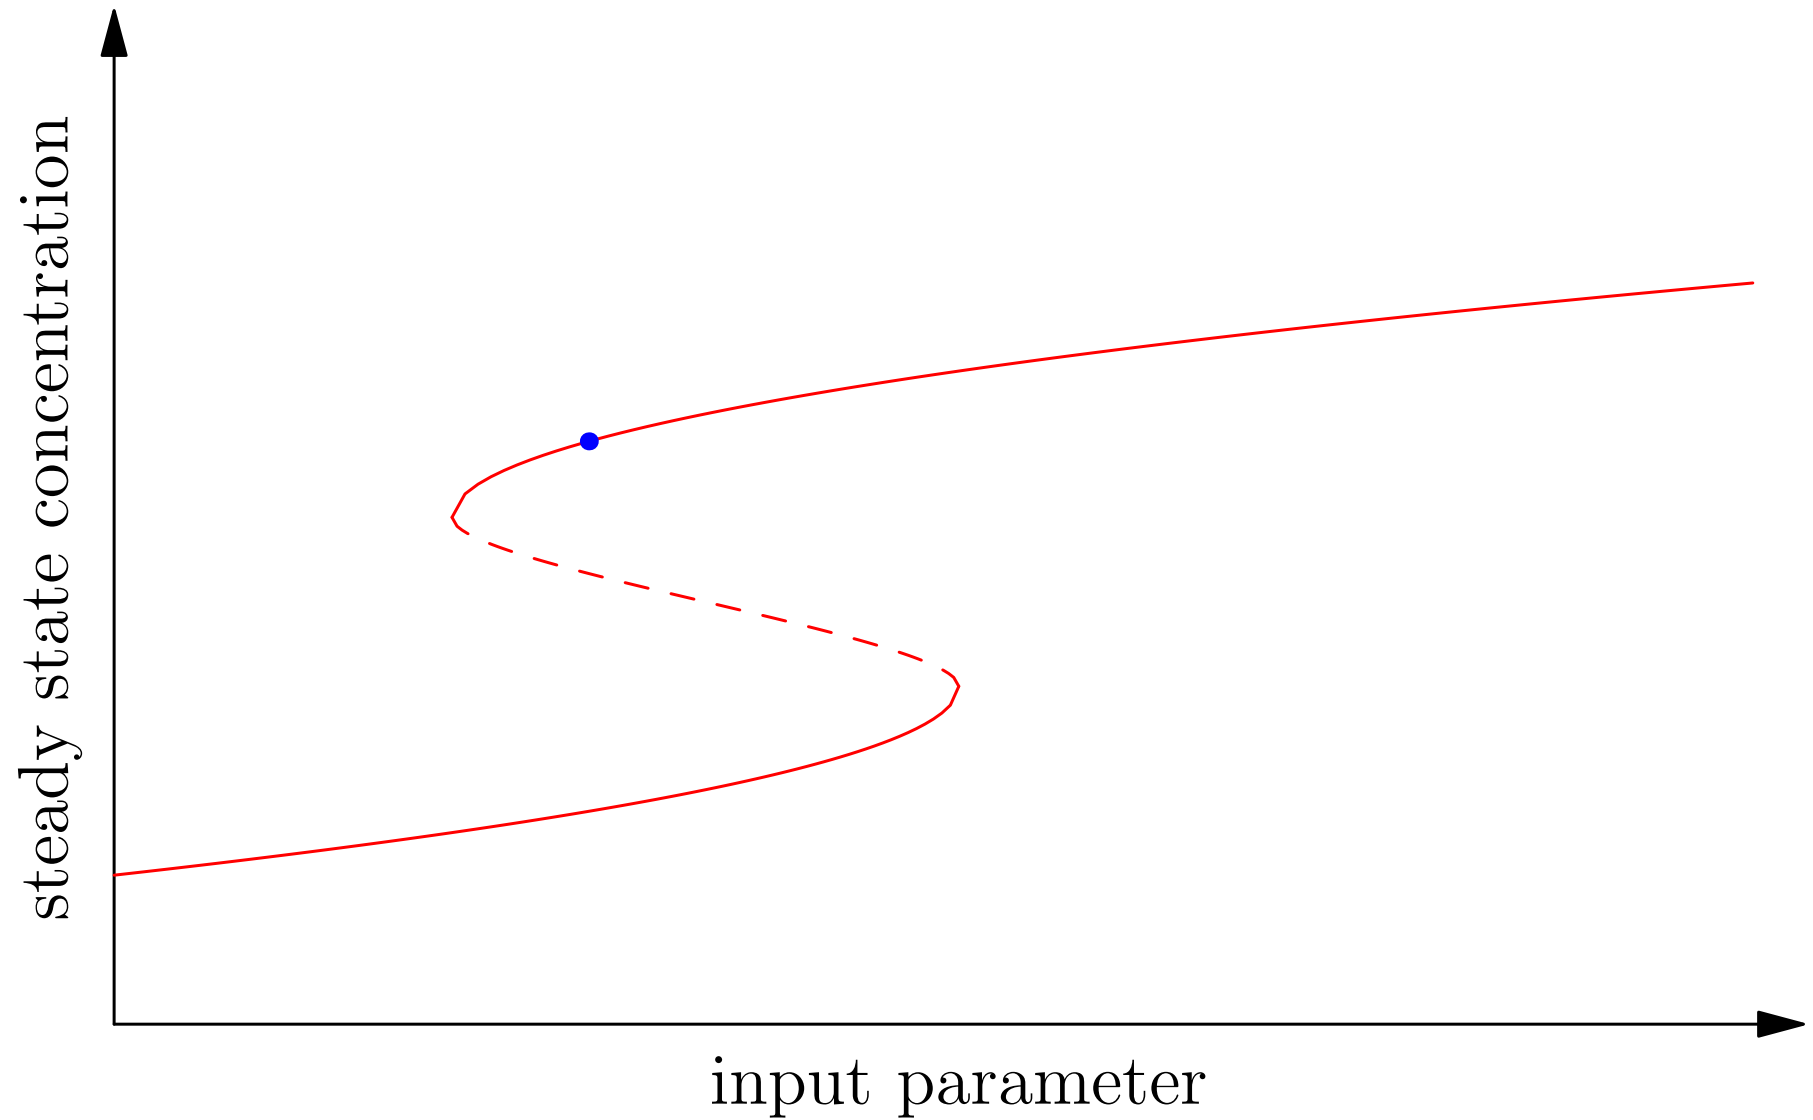


Hysteresis

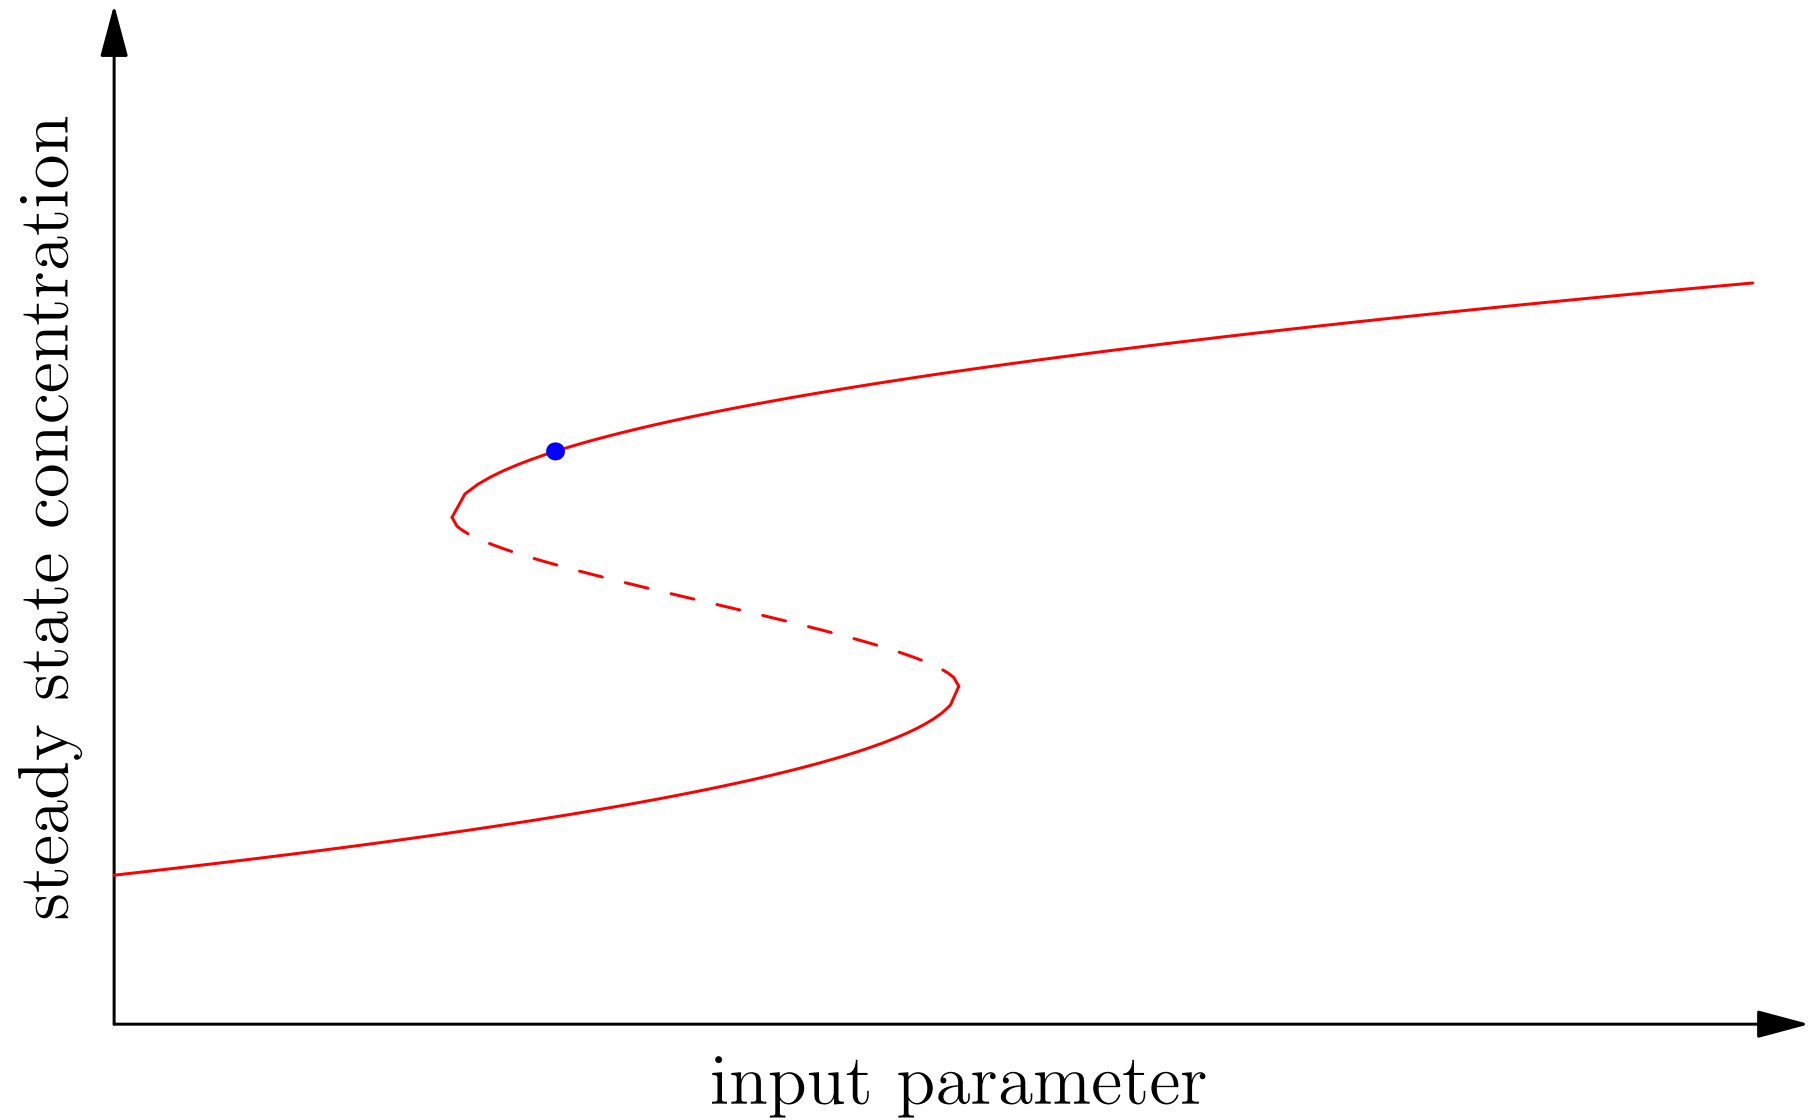


Hysteresis

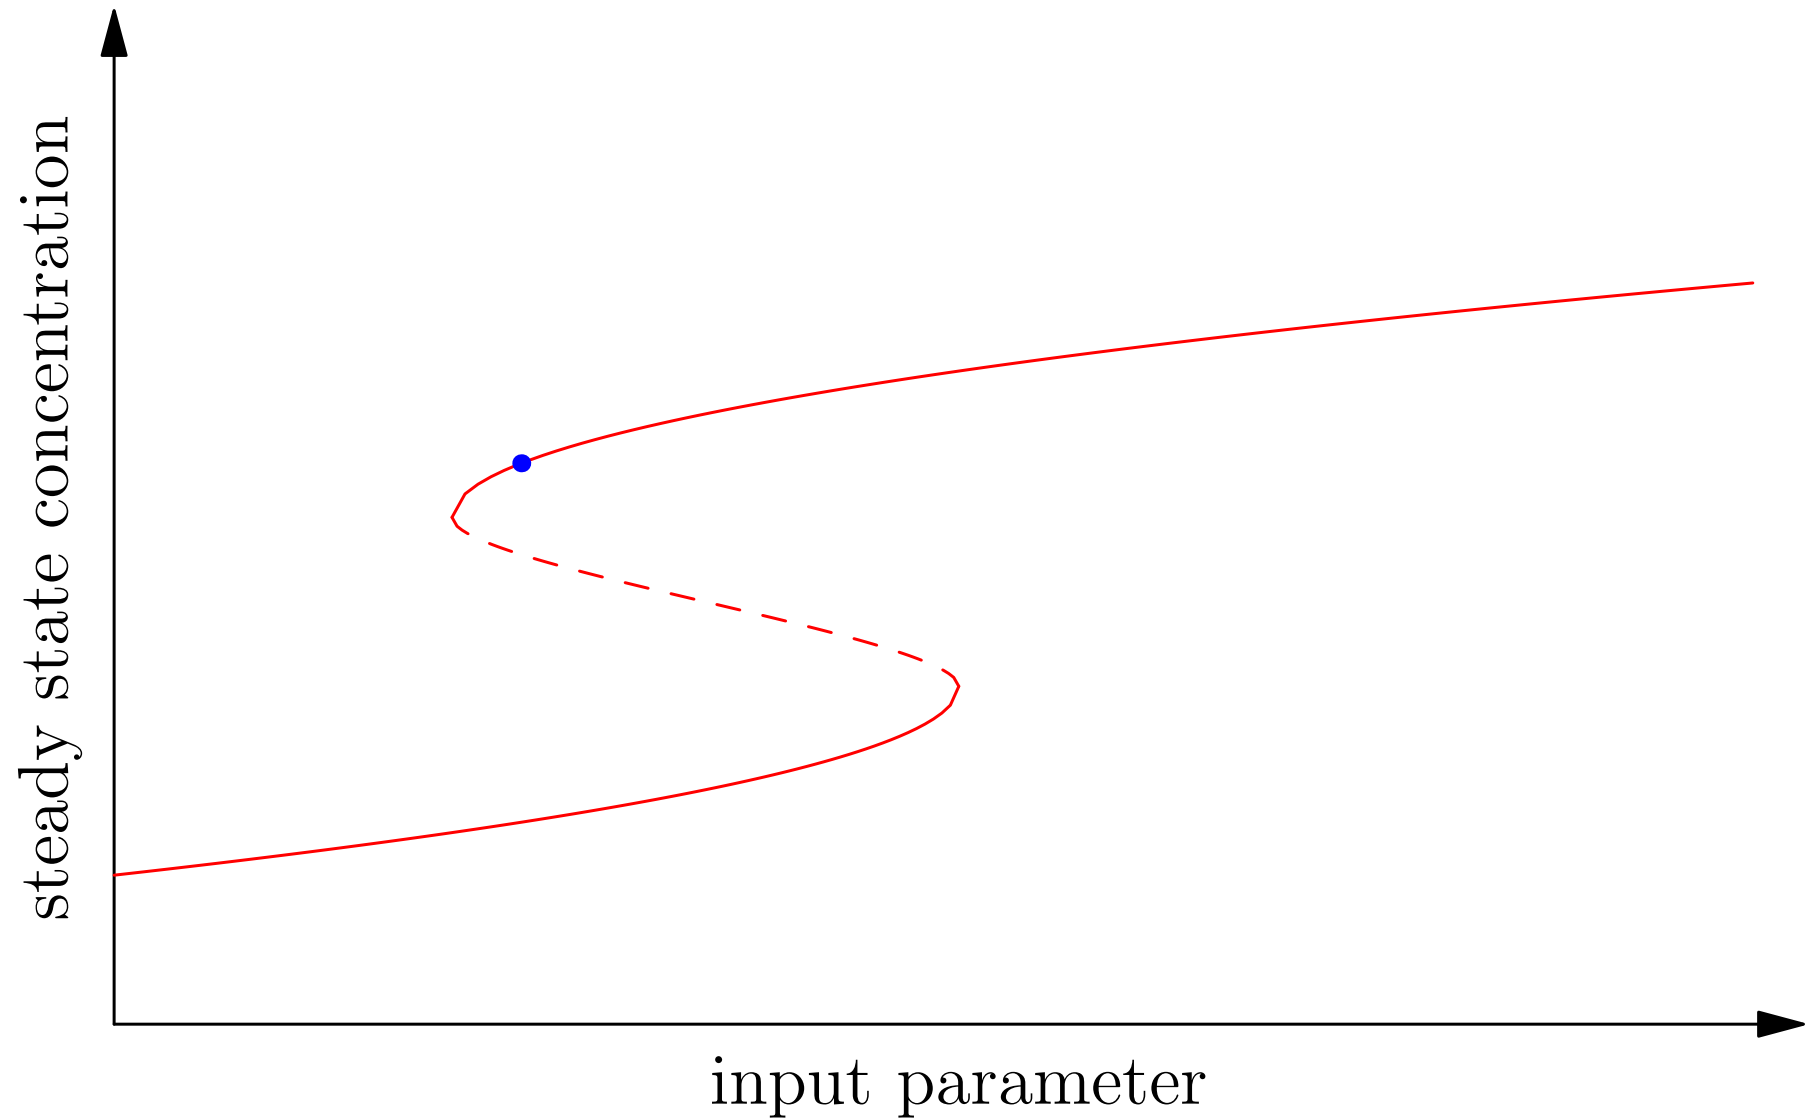


Hysteresis

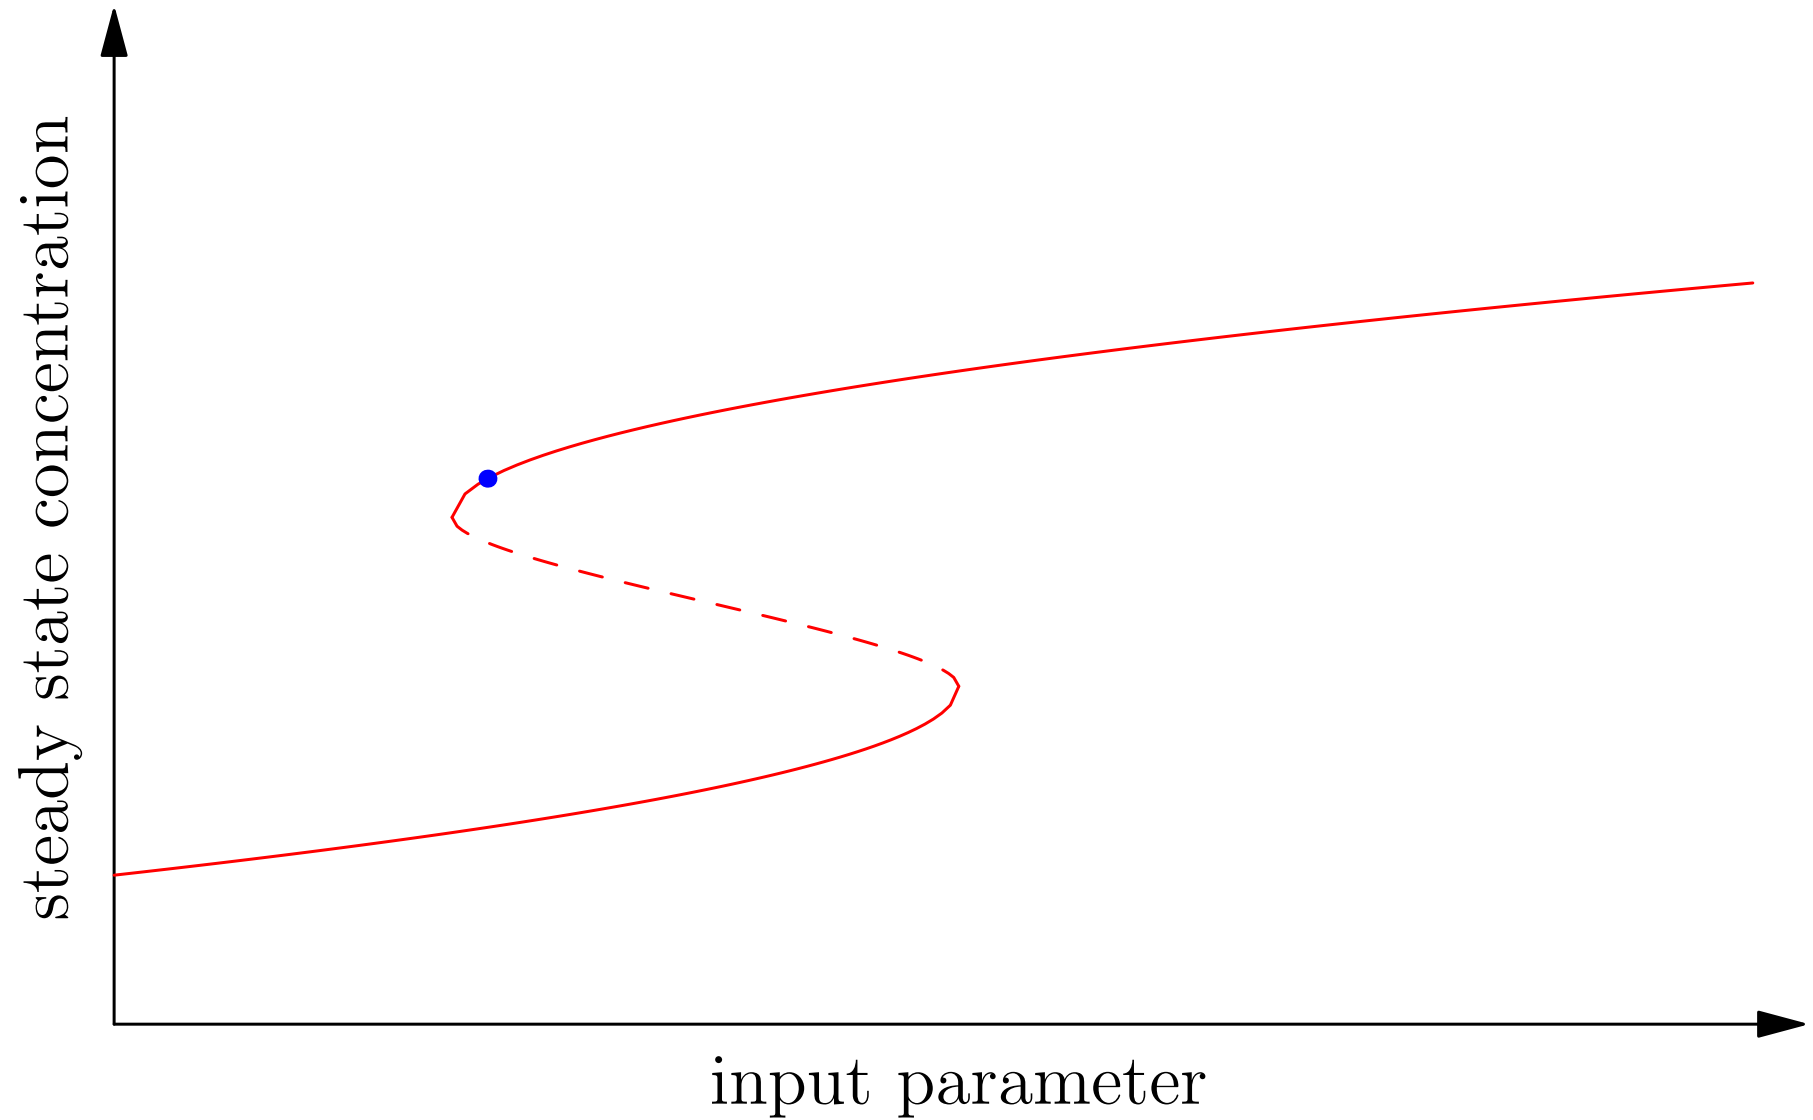


Hysteresis

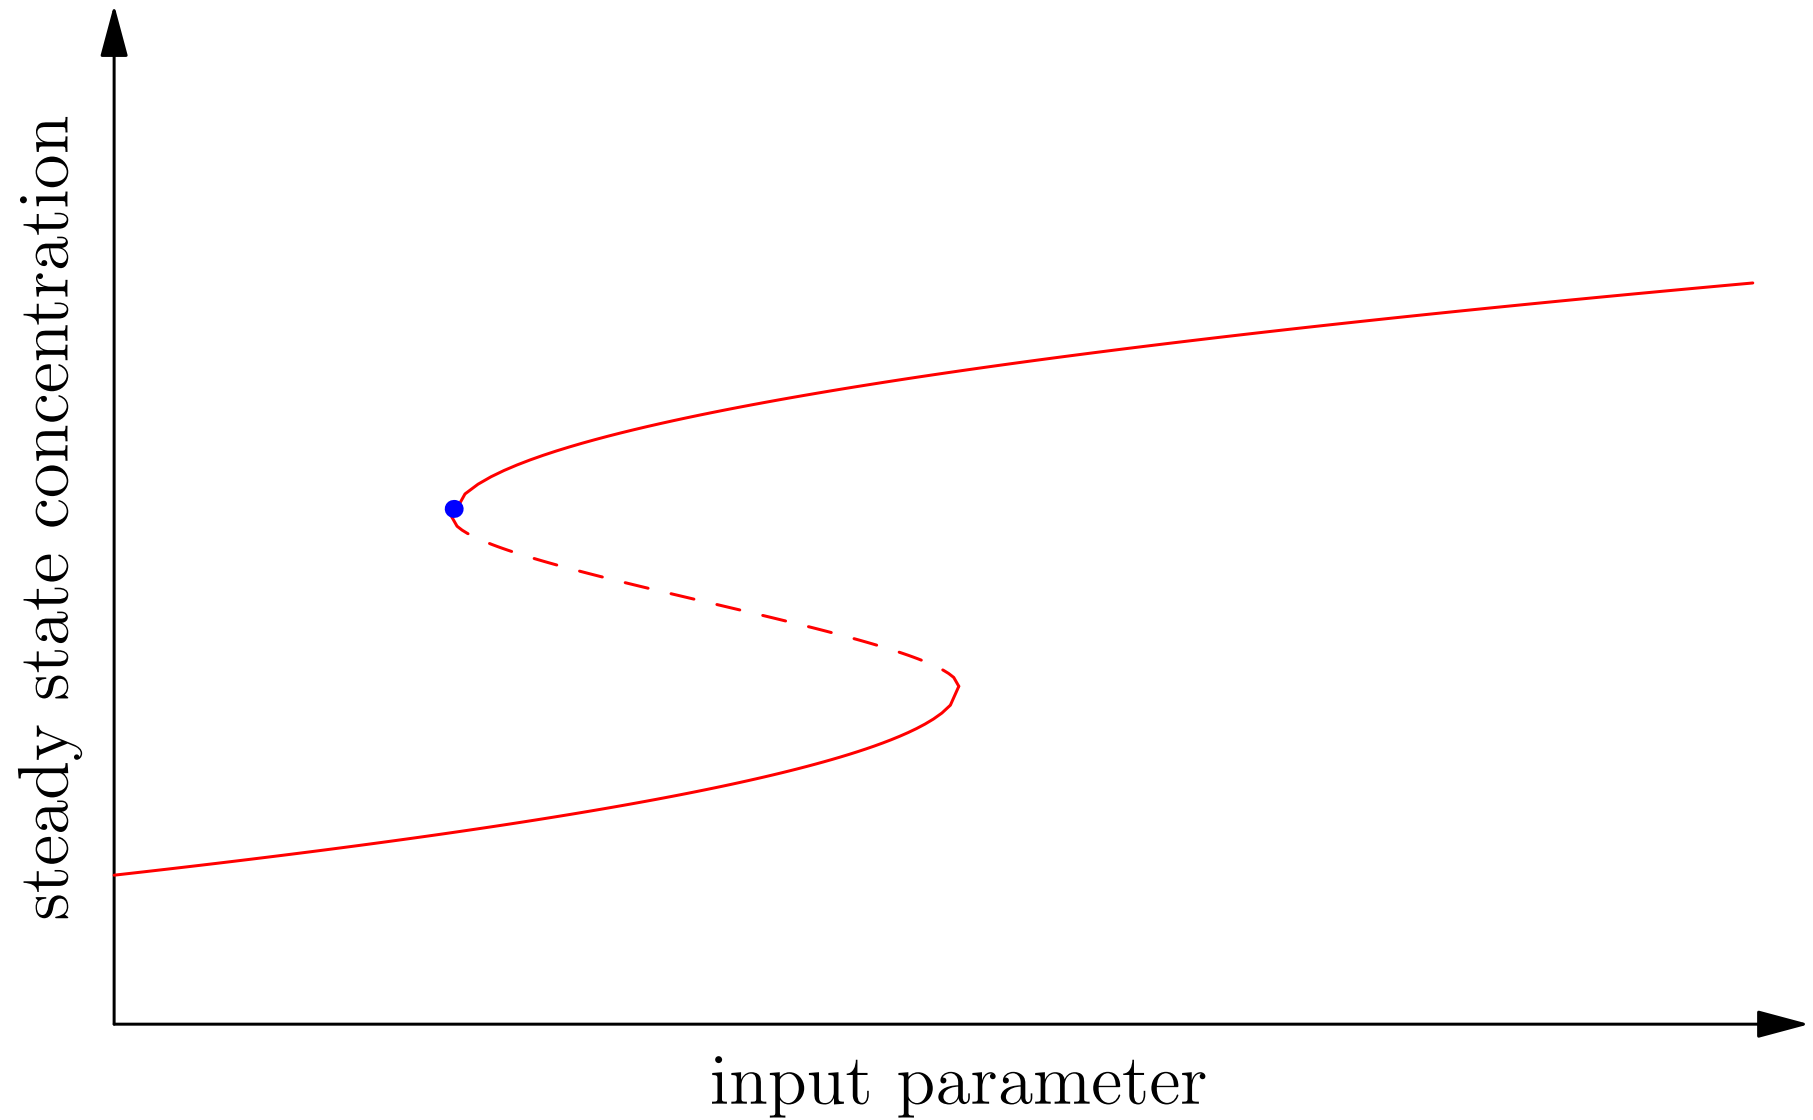


Hysteresis

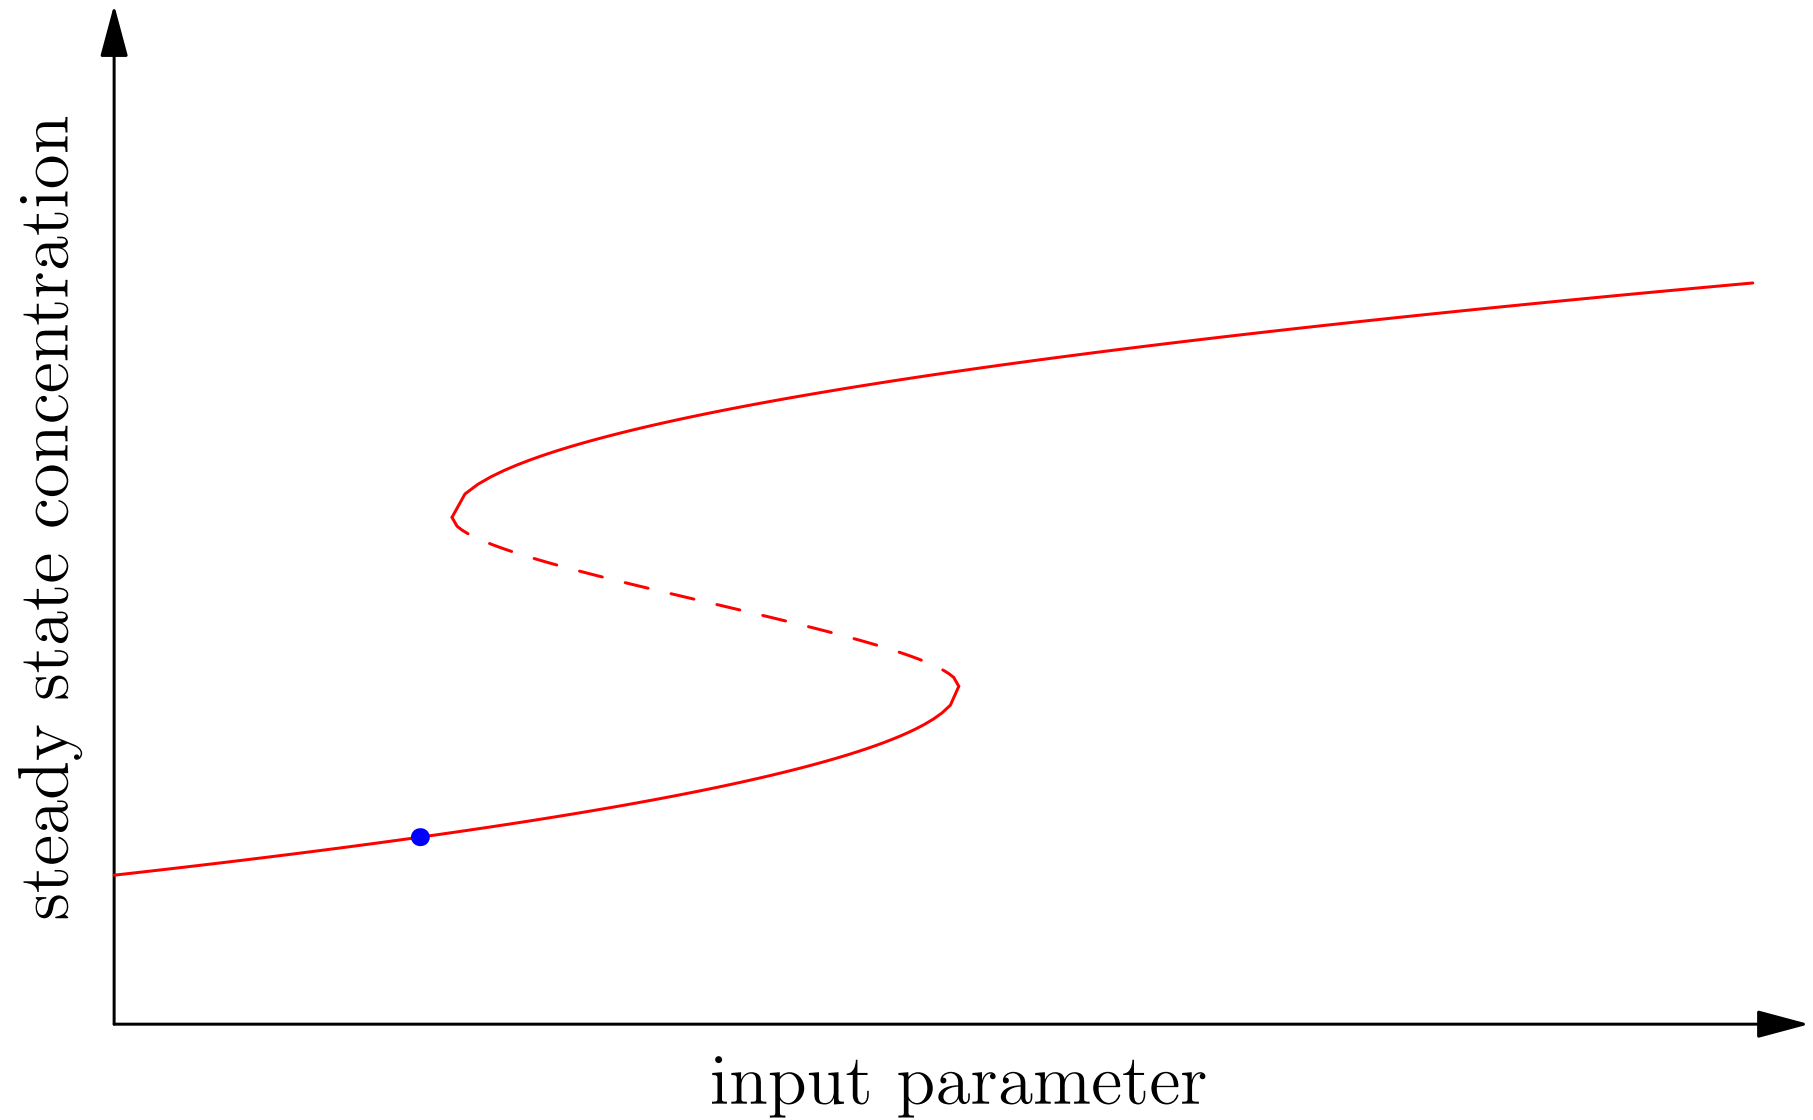


Hysteresis

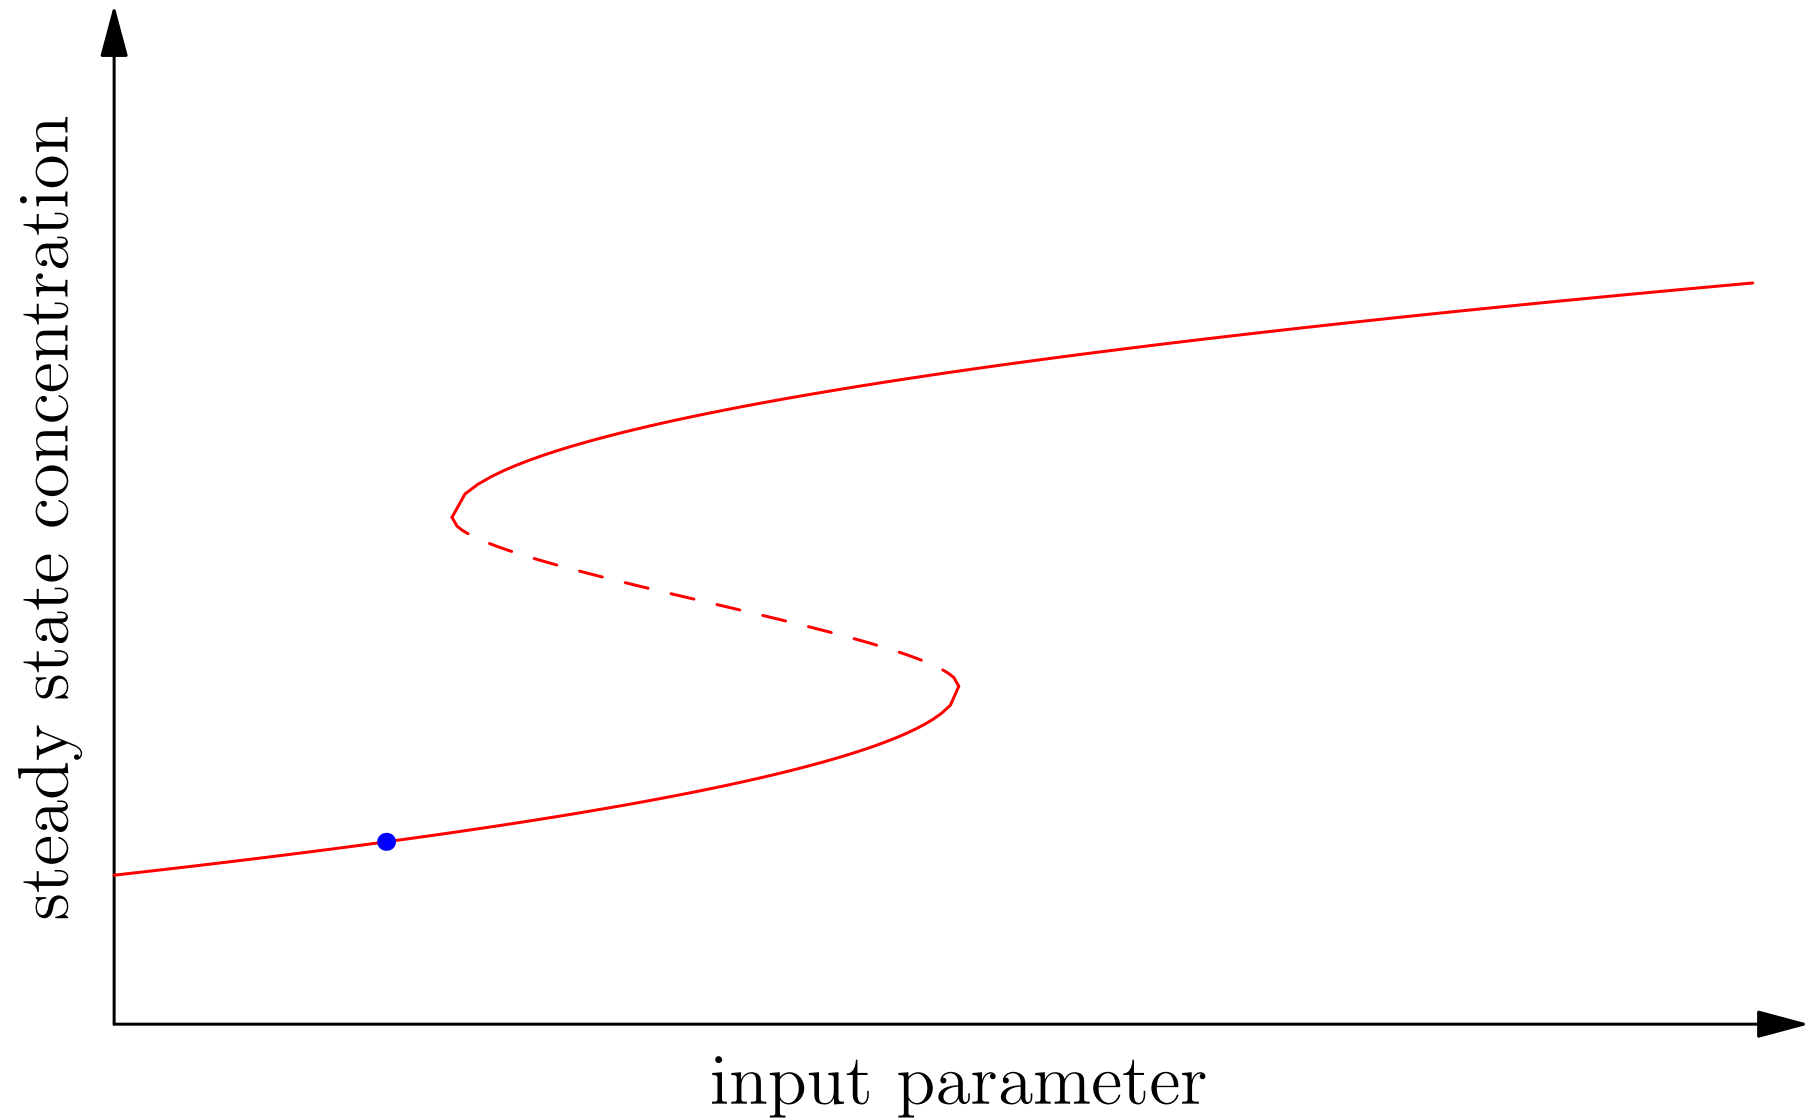


Hysteresis

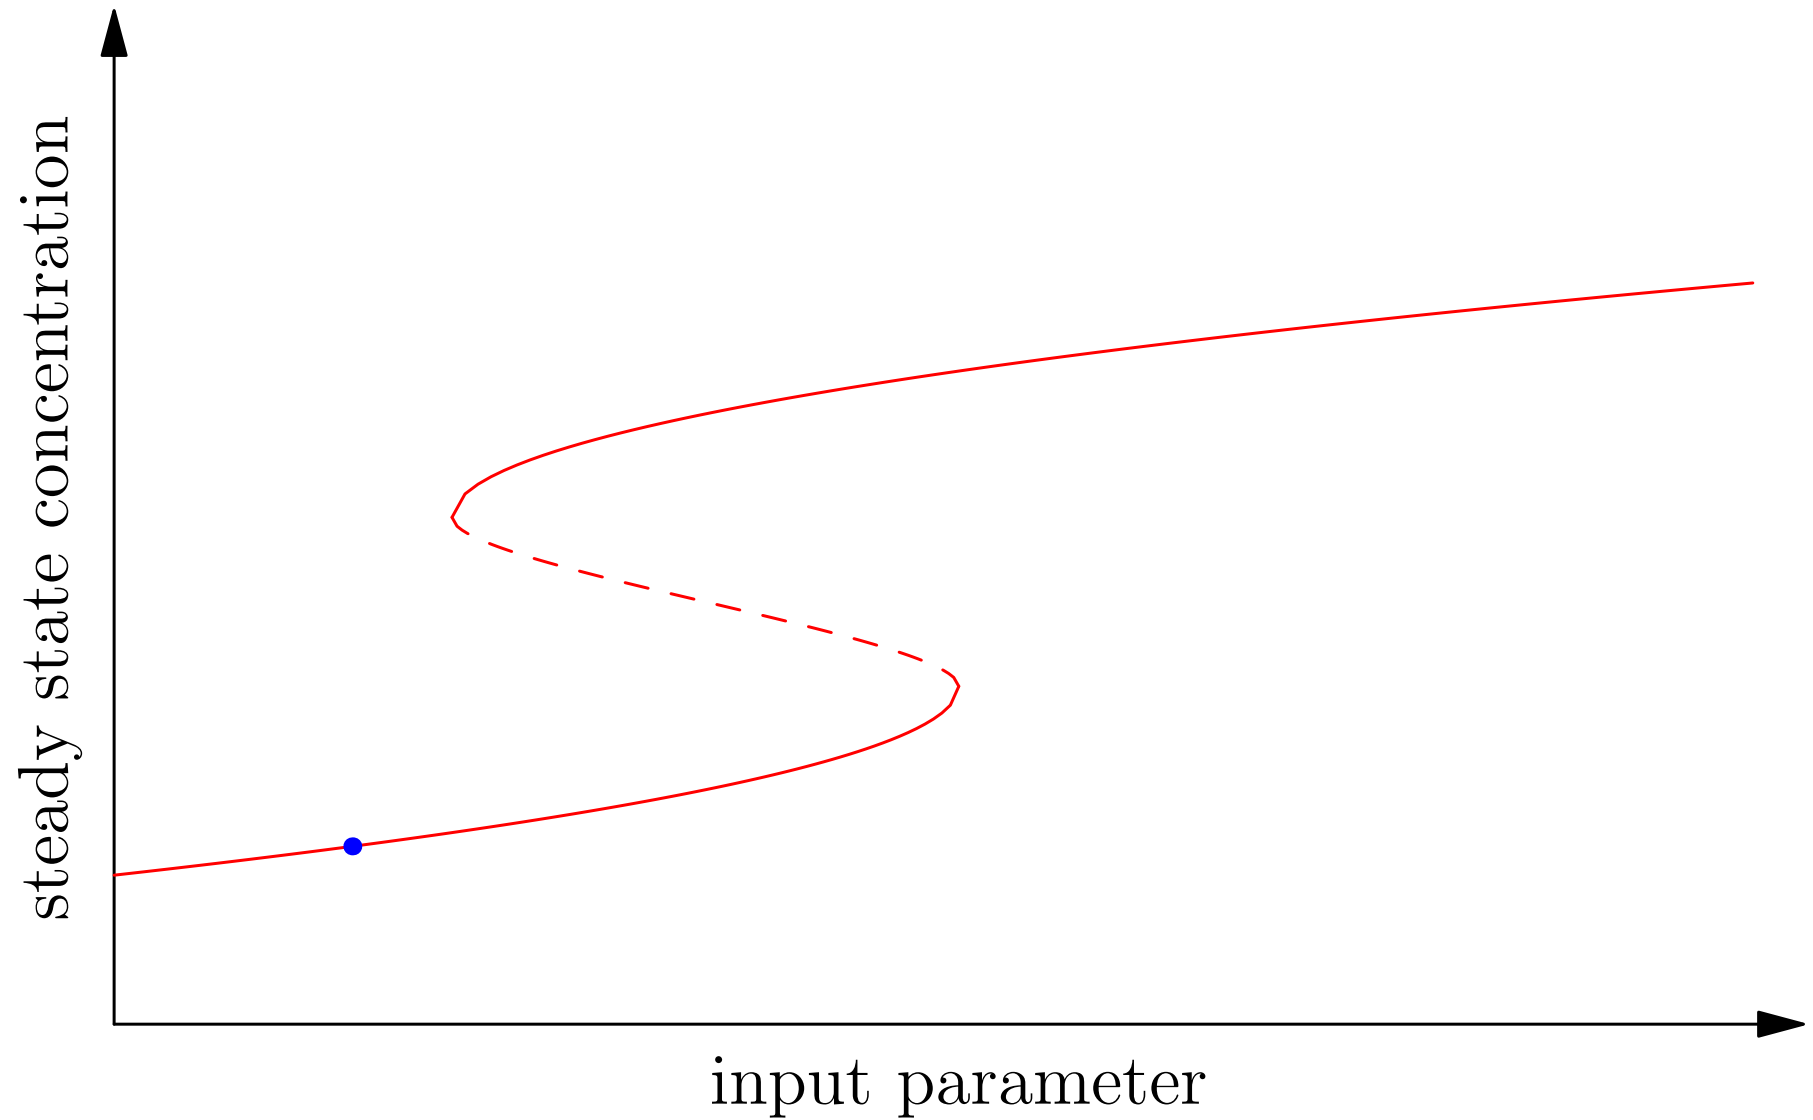


Hysteresis

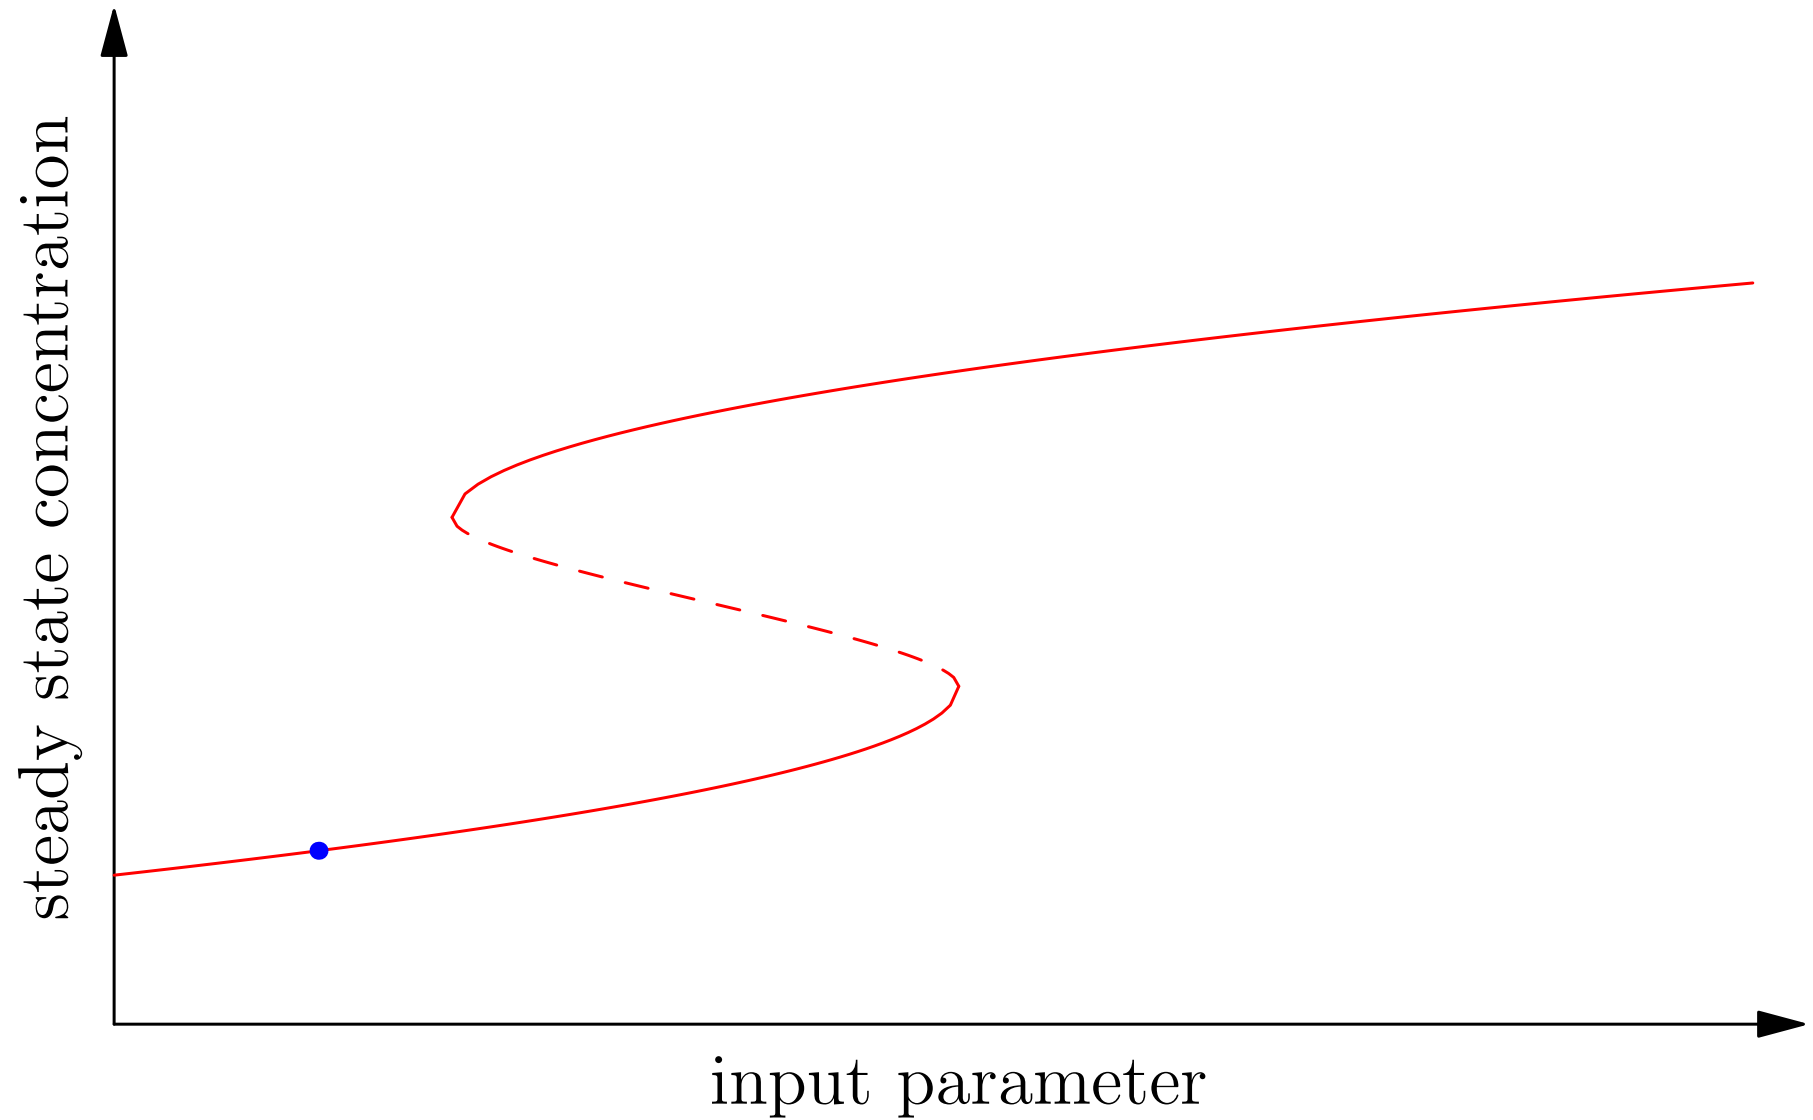

Hysteresis

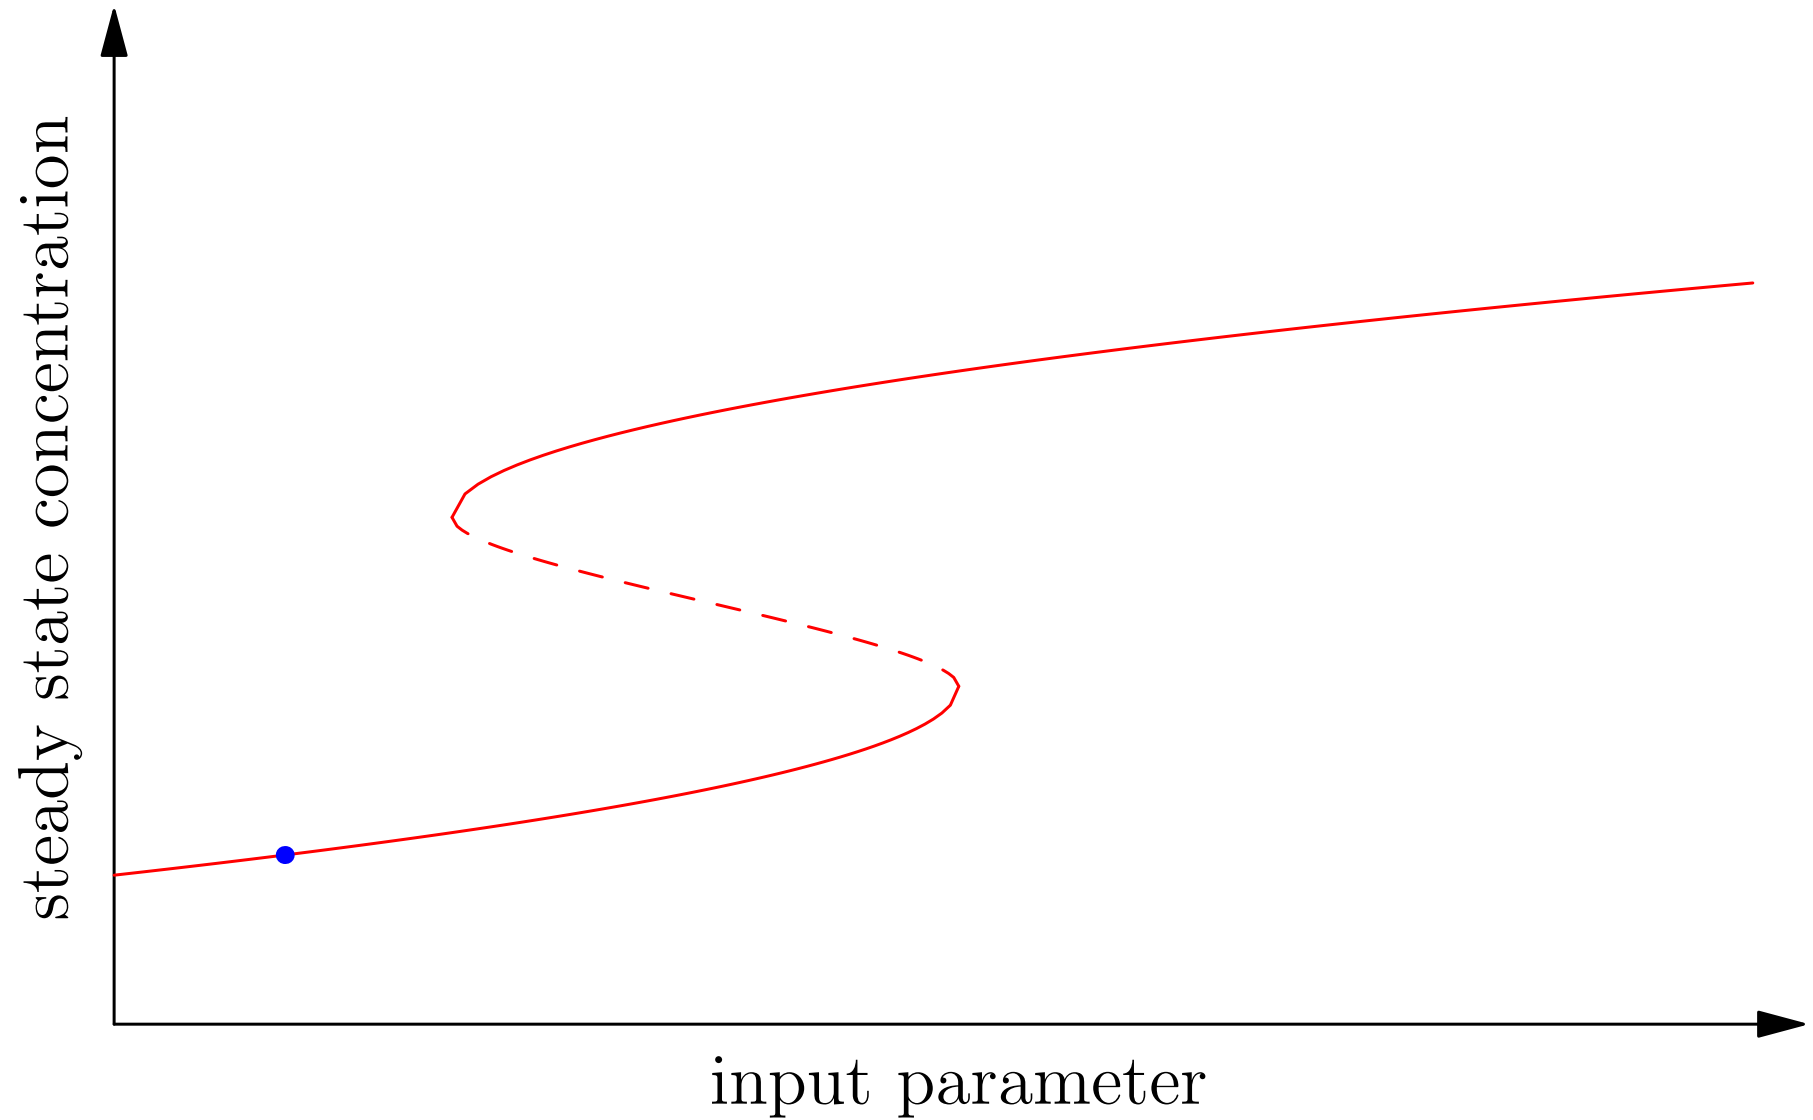

Hysteresis

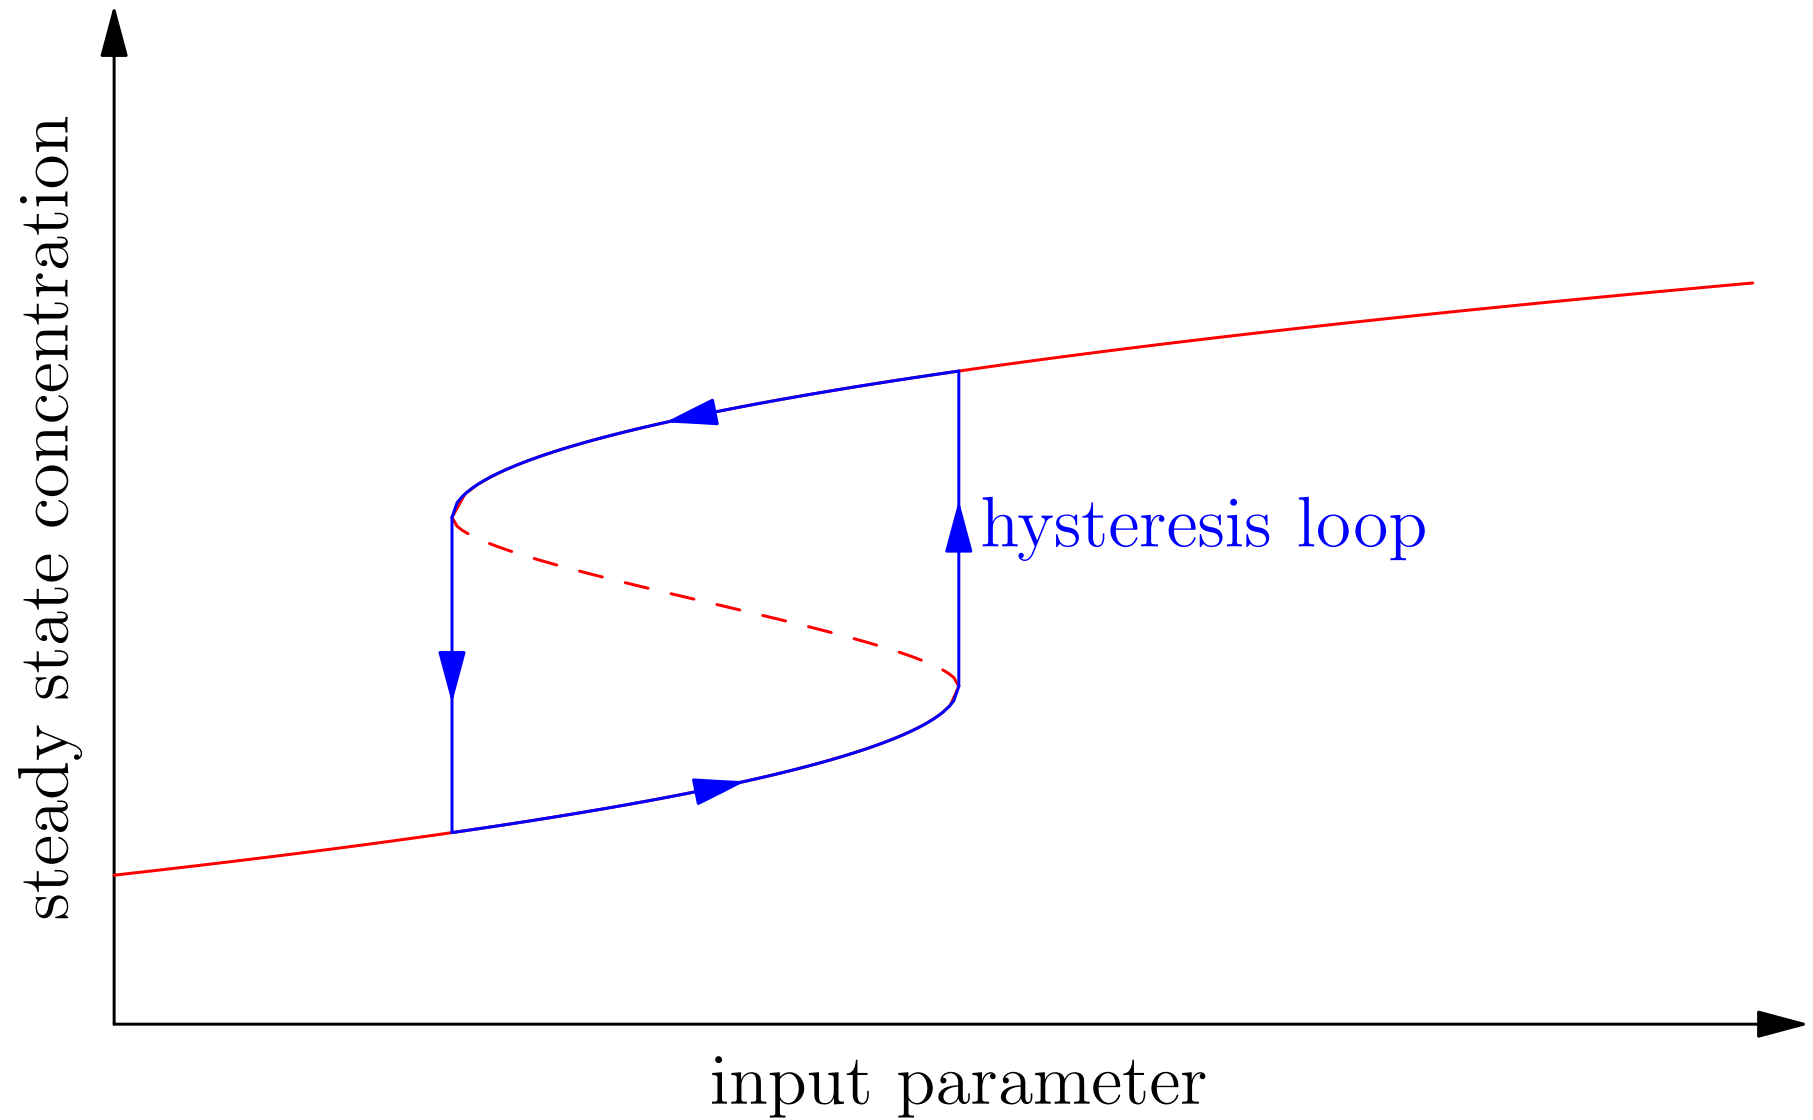

Autocatalysis

- Recall the autocatalytic system

$$\begin{aligned}\frac{dX_1(t)}{dt} &= k_0 - k_1 \left(1 + \left(\frac{X_2(t)}{K} \right)^n \right) X_1(t) \\ \frac{dX_2(t)}{dt} &= k_1 \left(1 + \left(\frac{X_2(t)}{K} \right)^n \right) X_1(t) - k_2 X_2(t)\end{aligned}$$

- With $k_0 = 8$, $k_1 = 1$, $K = 1$, $k_2 = 5$
- We consider what happens when we vary n

Autocatalysis

- Recall the autocatalytic system

$$\begin{aligned}\frac{dX_1(t)}{dt} &= k_0 - k_1 \left(1 + \left(\frac{X_2(t)}{K} \right)^n \right) X_1(t) \\ \frac{dX_2(t)}{dt} &= k_1 \left(1 + \left(\frac{X_2(t)}{K} \right)^n \right) X_1(t) - k_2 X_2(t)\end{aligned}$$

- With $k_0 = 8$, $k_1 = 1$, $K = 1$, $k_2 = 5$
- We consider what happens when we vary n



Autocatalysis

- Recall the autocatalytic system



$$\begin{aligned}\frac{dX_1(t)}{dt} &= k_0 - k_1 \left(1 + \left(\frac{X_2(t)}{K} \right)^n \right) X_1(t) \\ \frac{dX_2(t)}{dt} &= k_1 \left(1 + \left(\frac{X_2(t)}{K} \right)^n \right) X_1(t) - k_2 X_2(t)\end{aligned}$$

- With $k_0 = 8$, $k_1 = 1$, $K = 1$, $k_2 = 5$
- We consider what happens when we vary n



Hopf Bifurcation

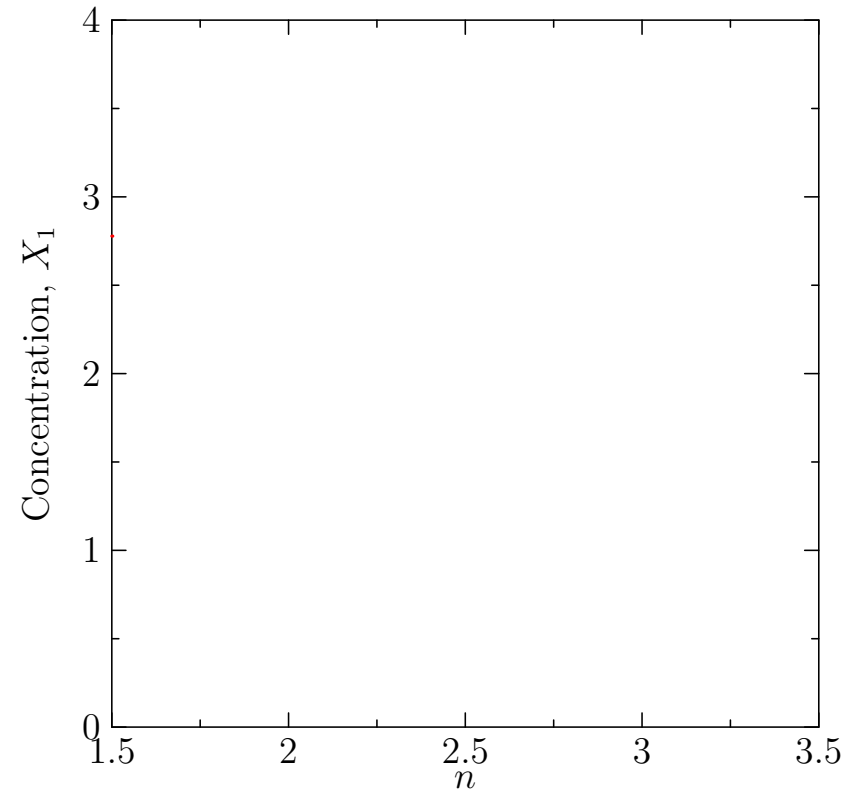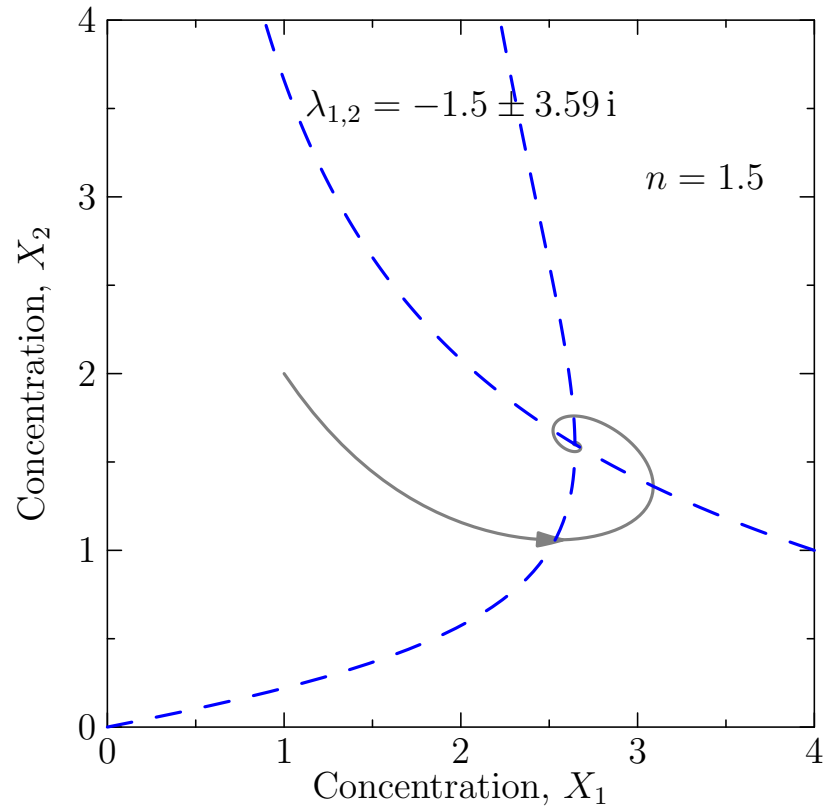



Hopf Bifurcation

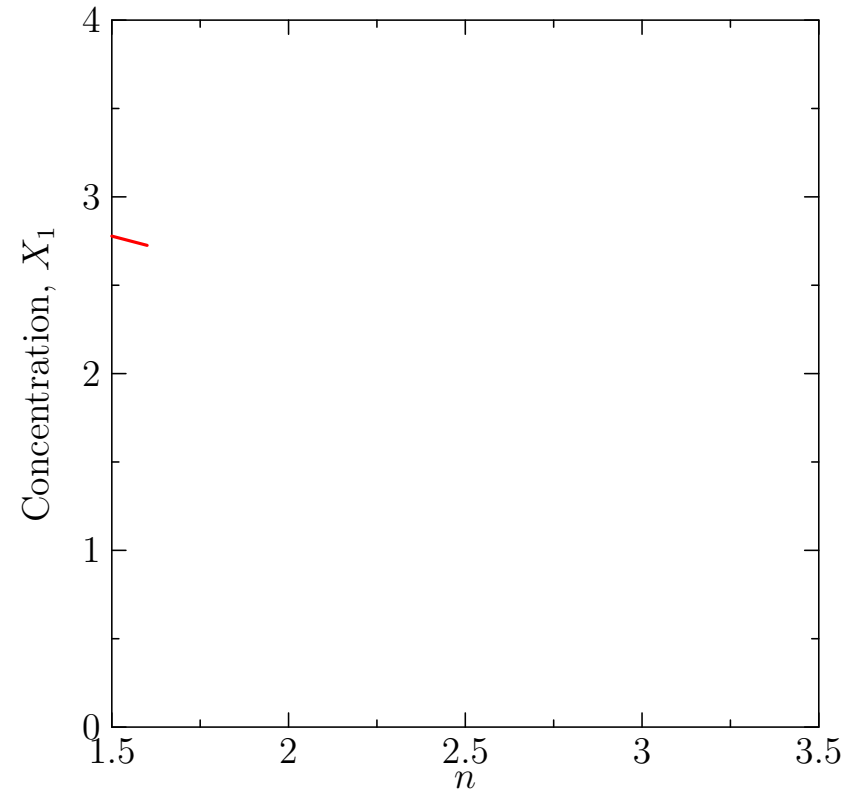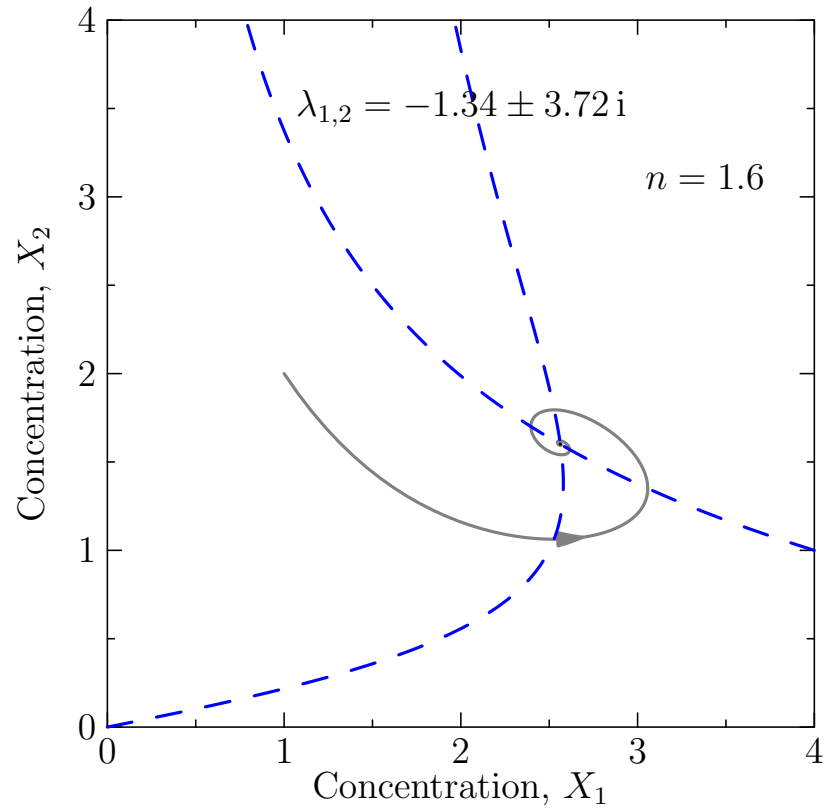



Hopf Bifurcation

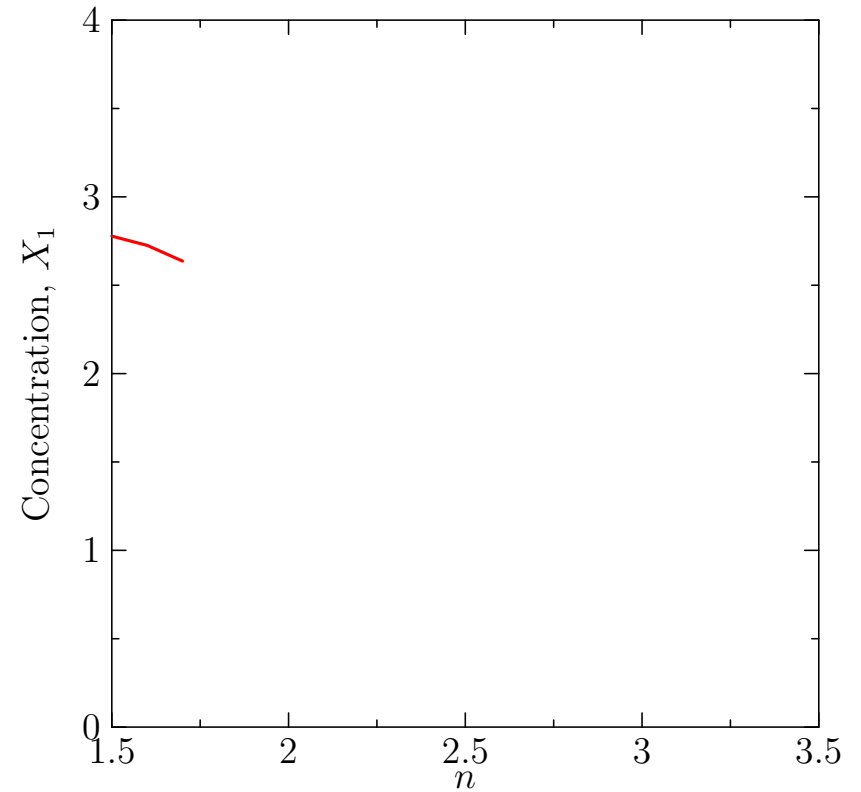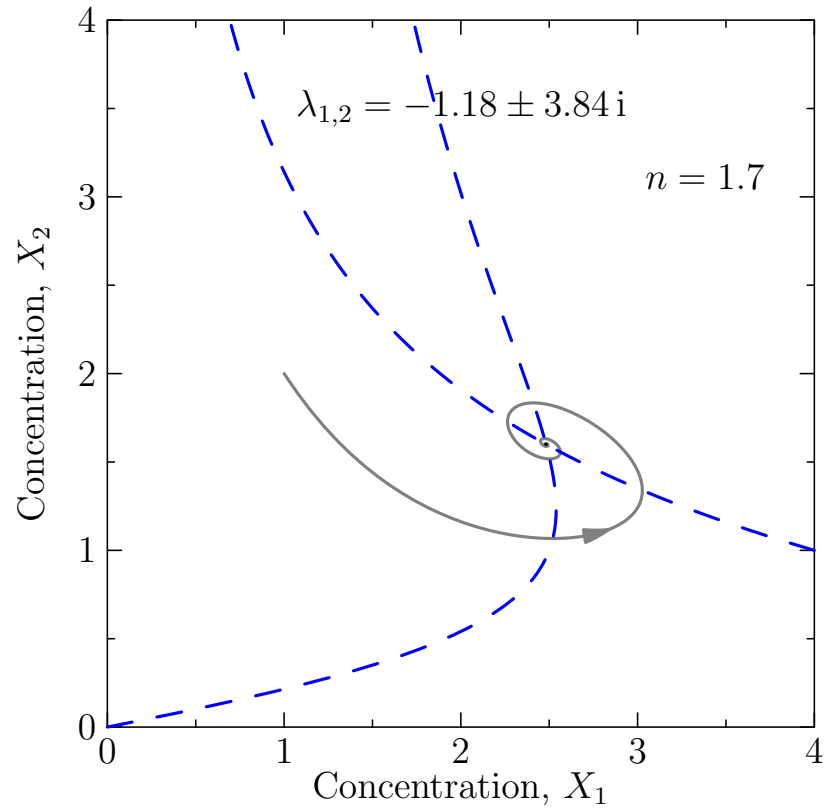



Hopf Bifurcation

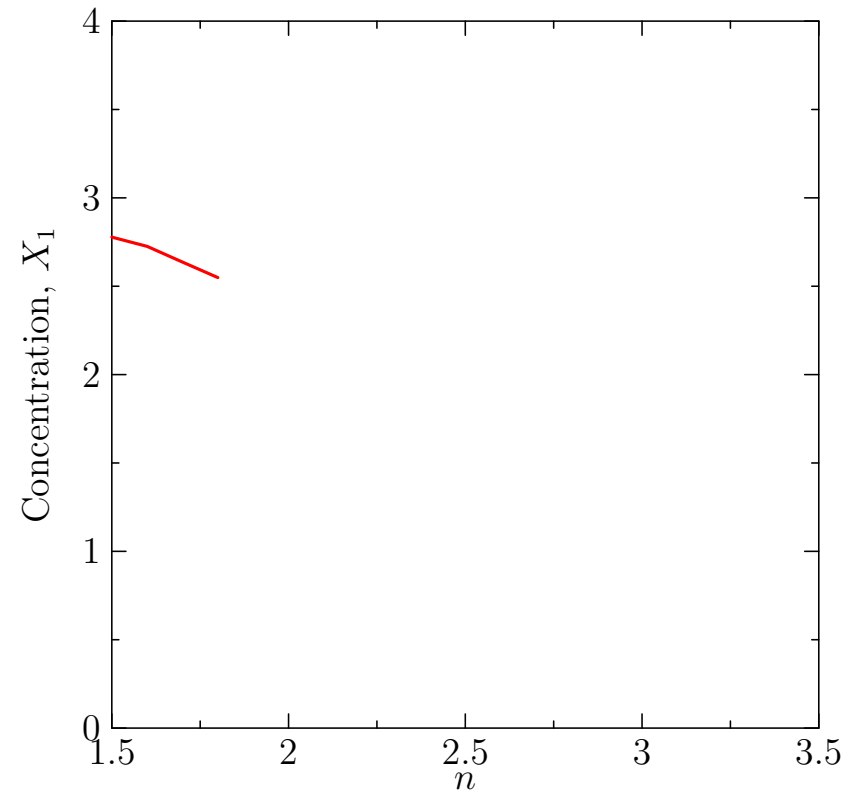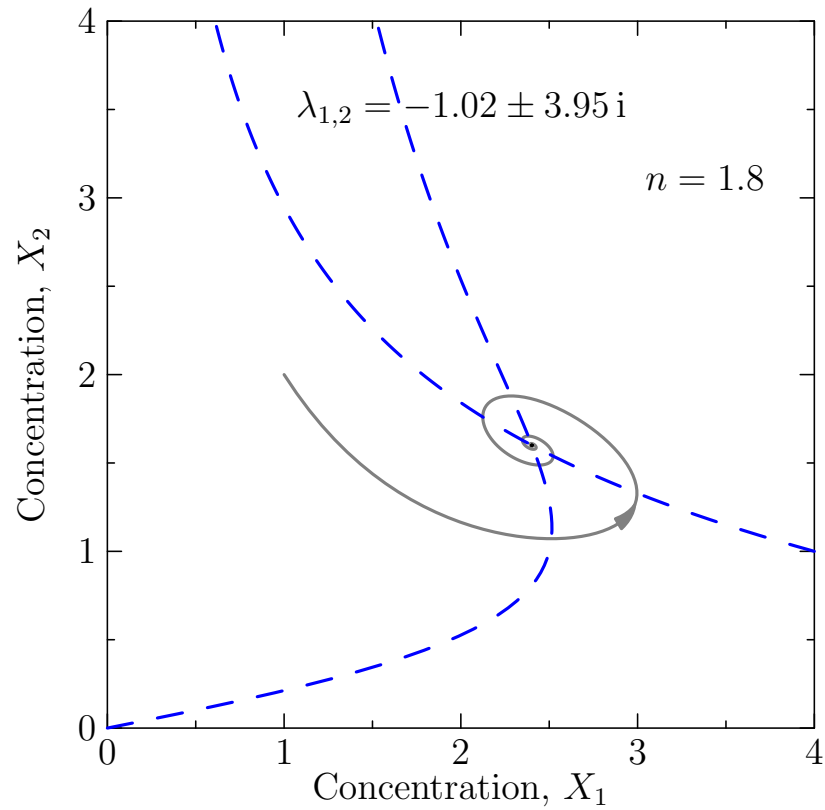



Hopf Bifurcation

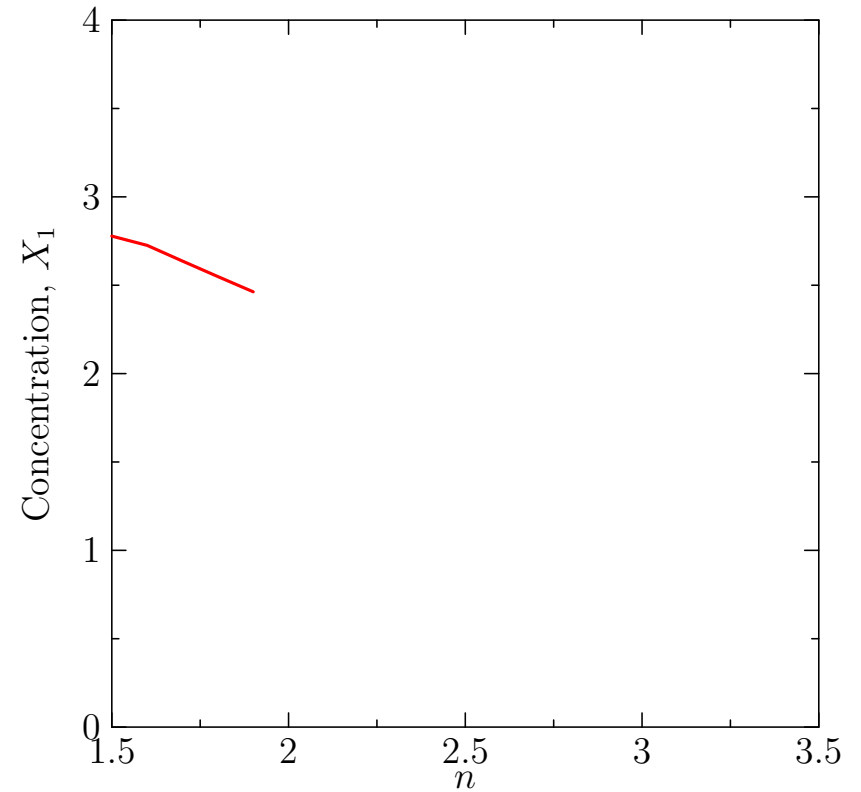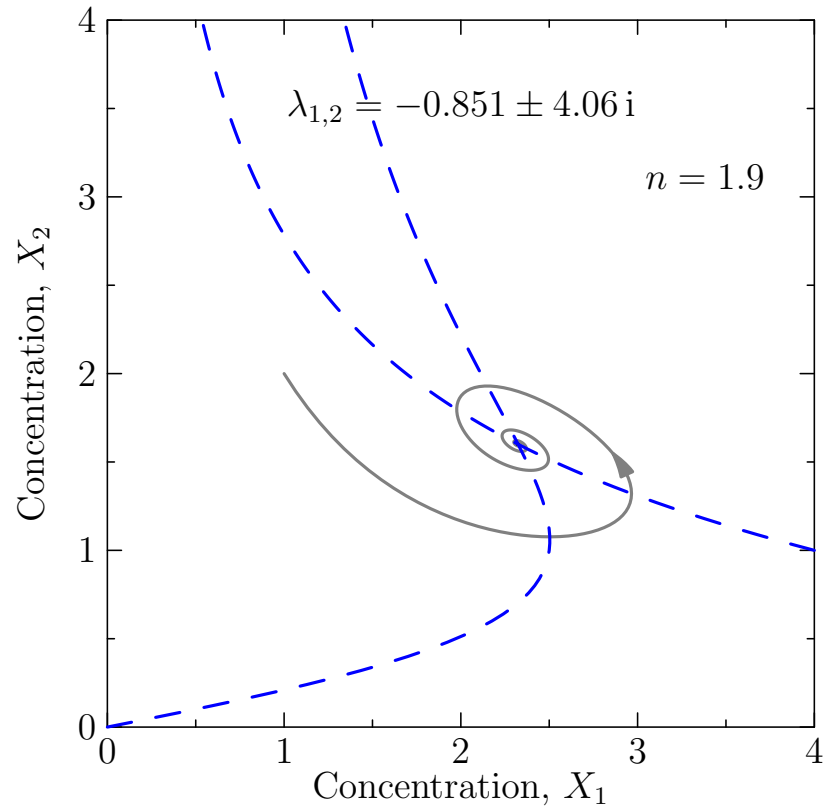



Hopf Bifurcation

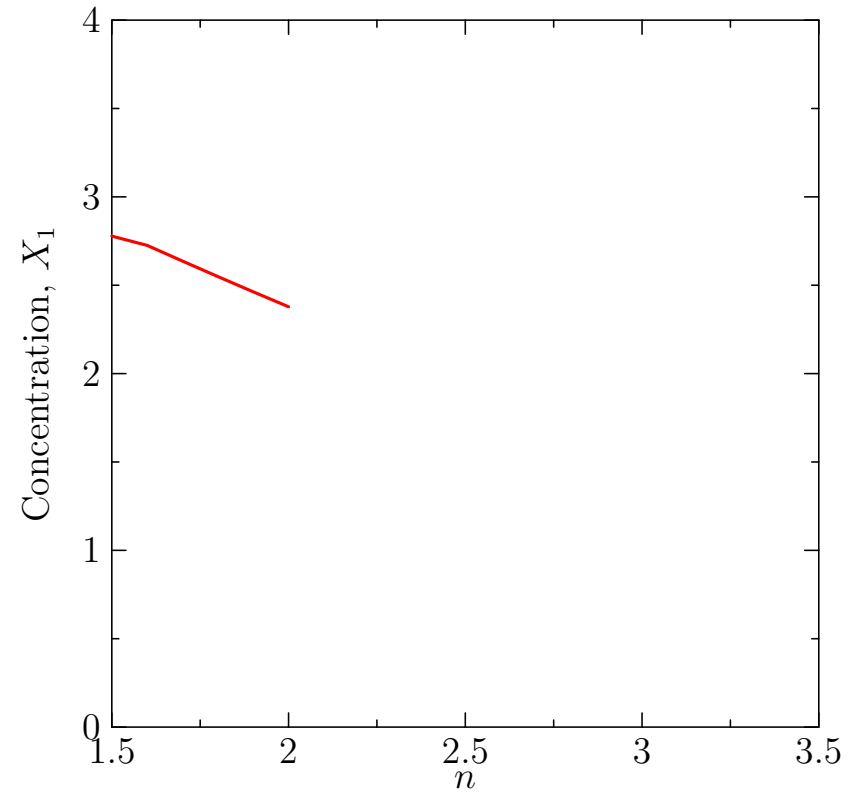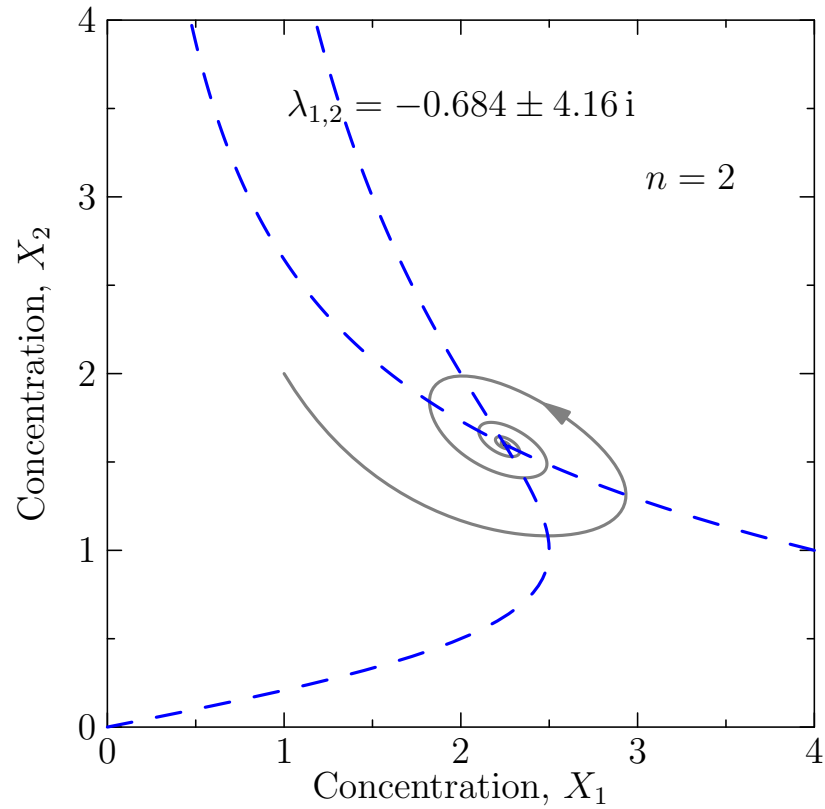



Hopf Bifurcation

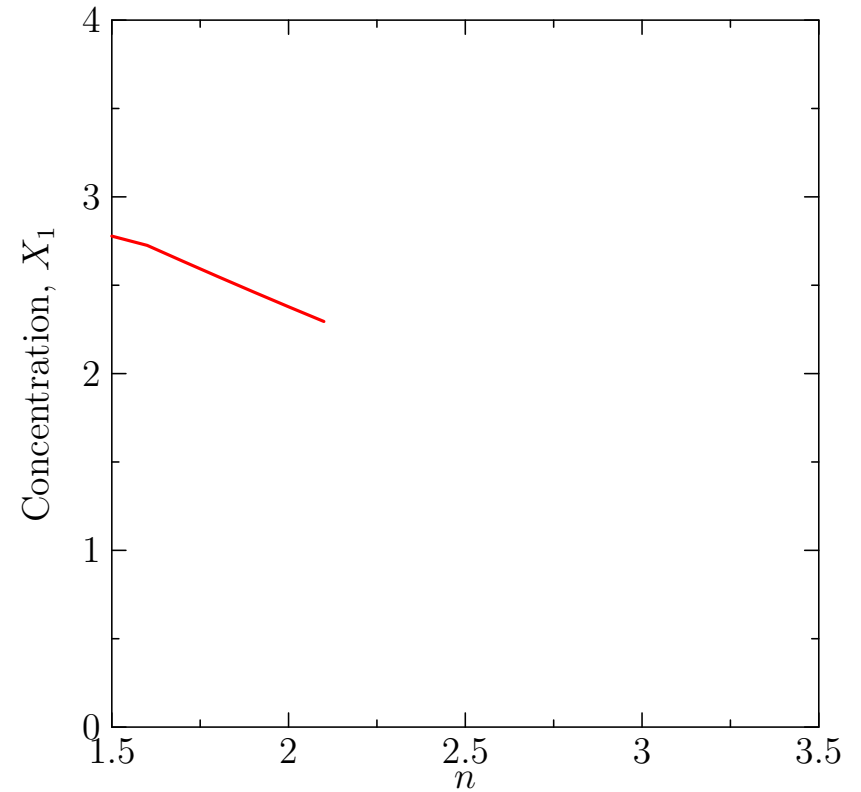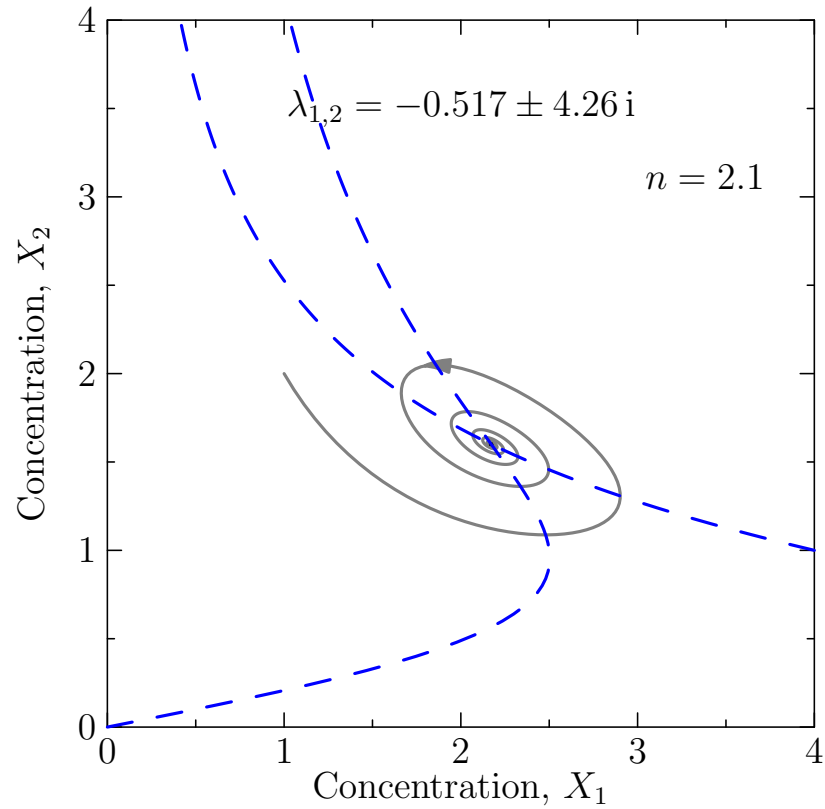



Hopf Bifurcation

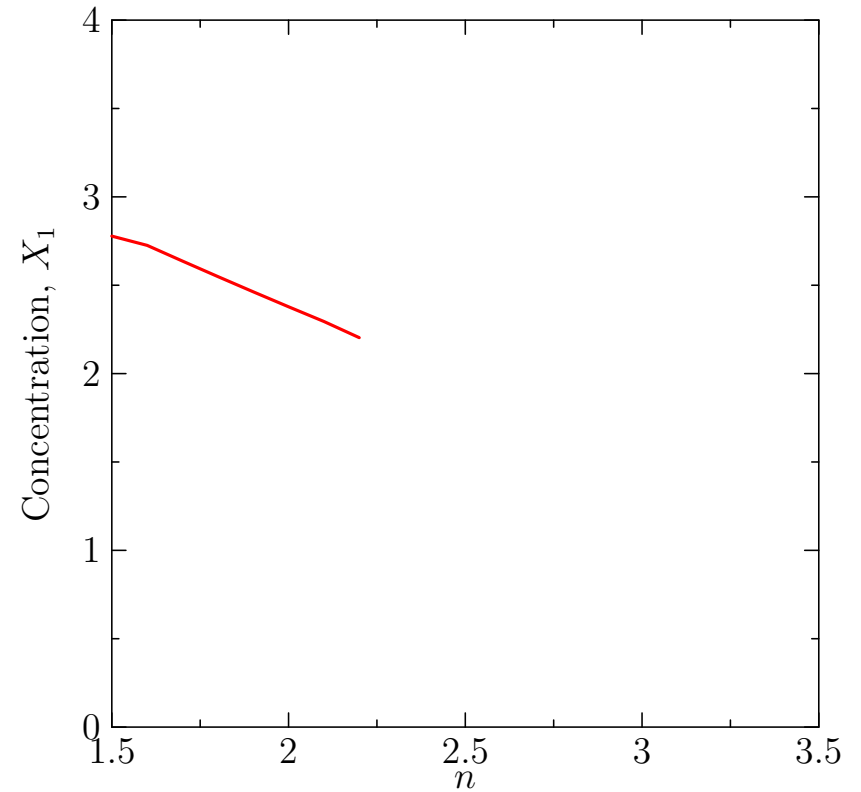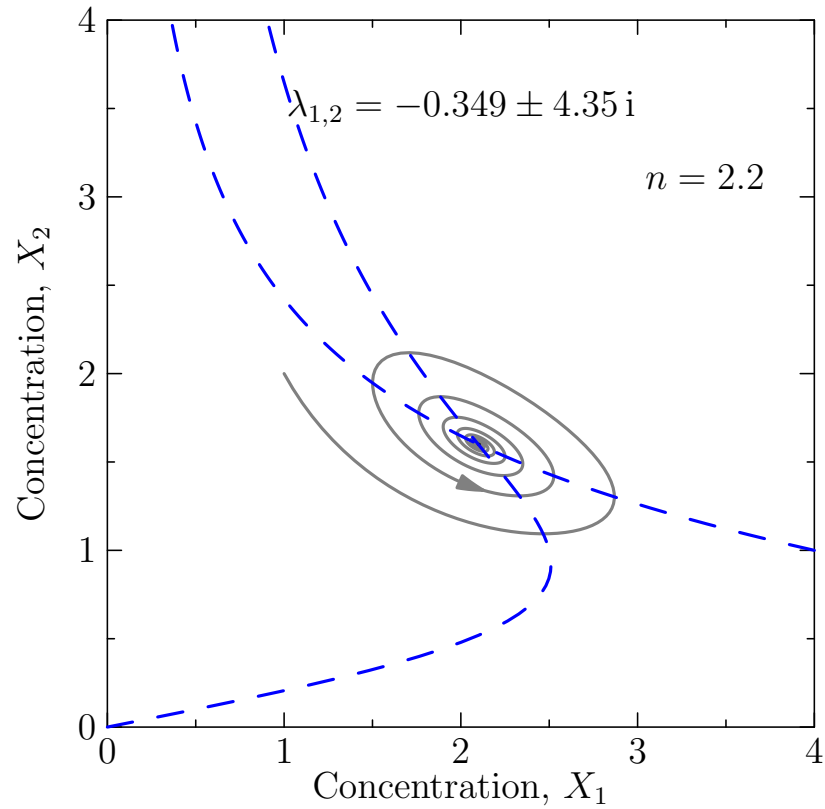



Hopf Bifurcation

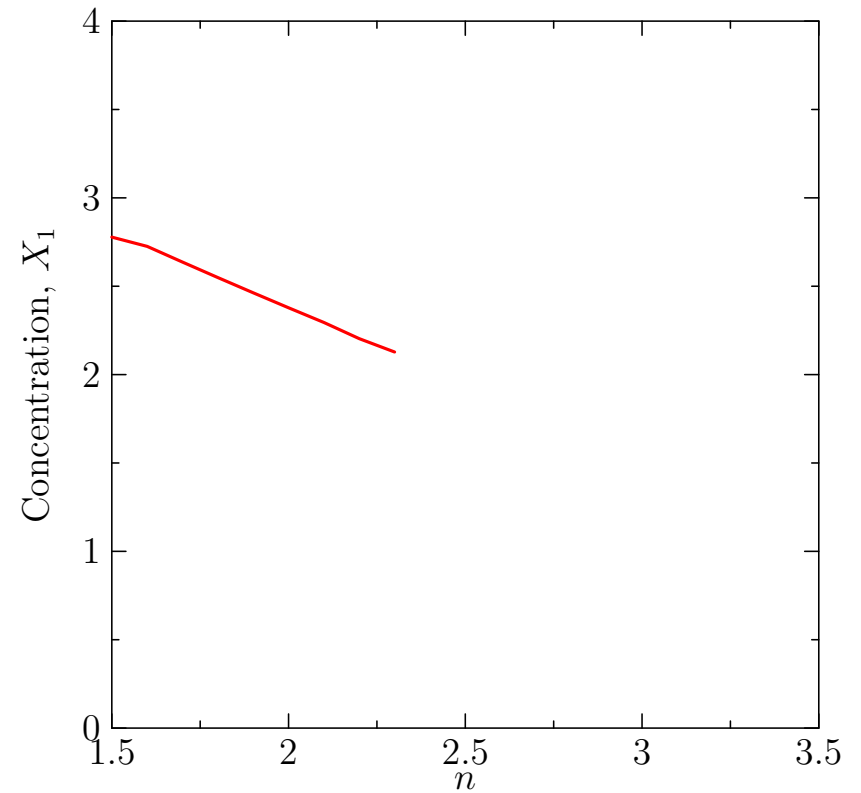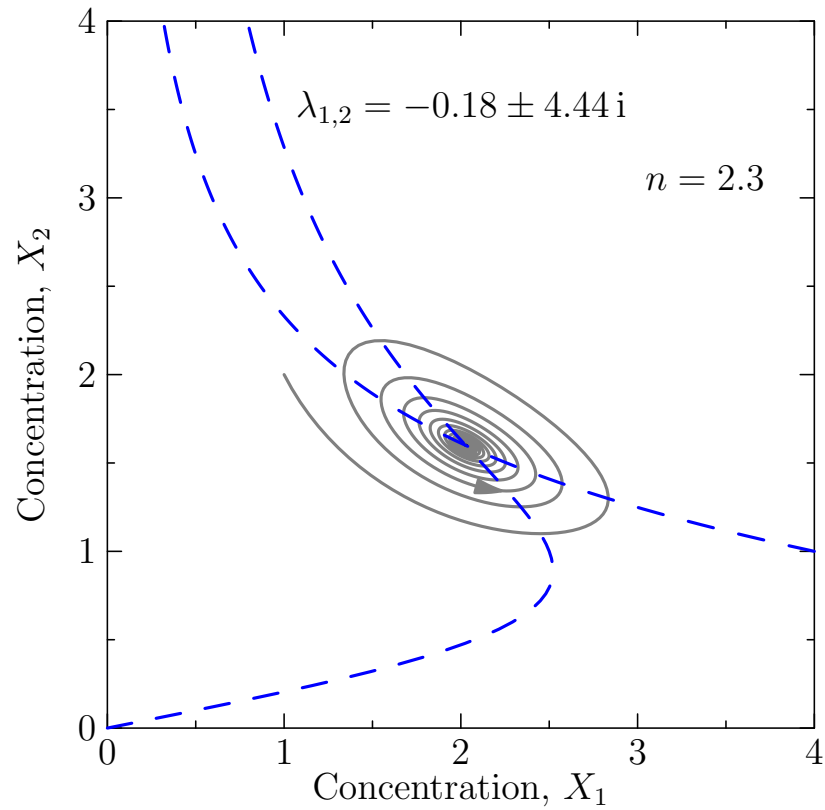



Hopf Bifurcation

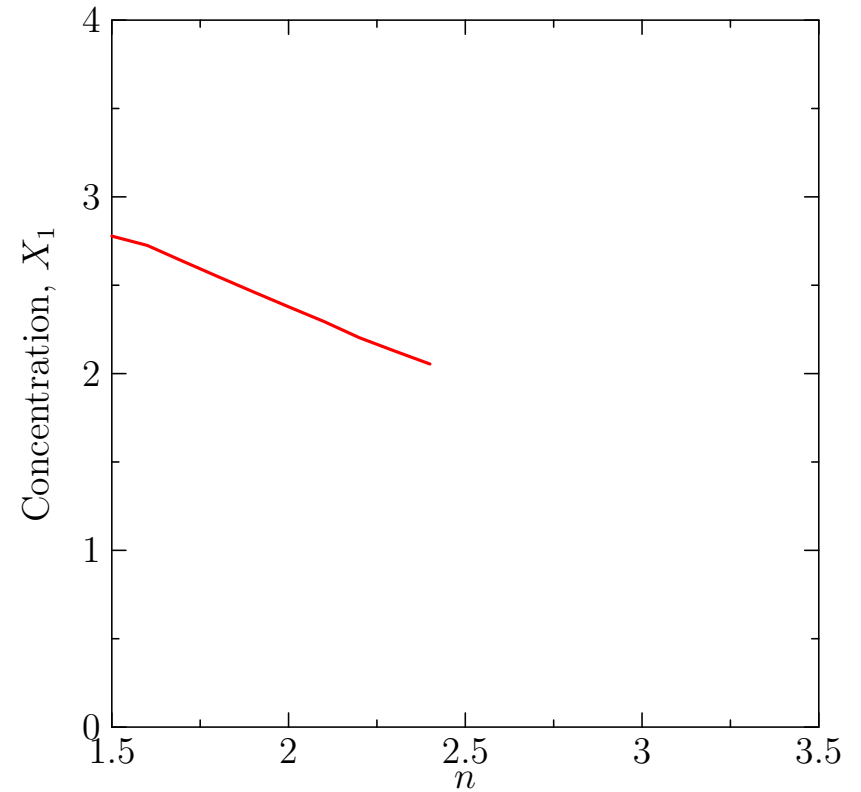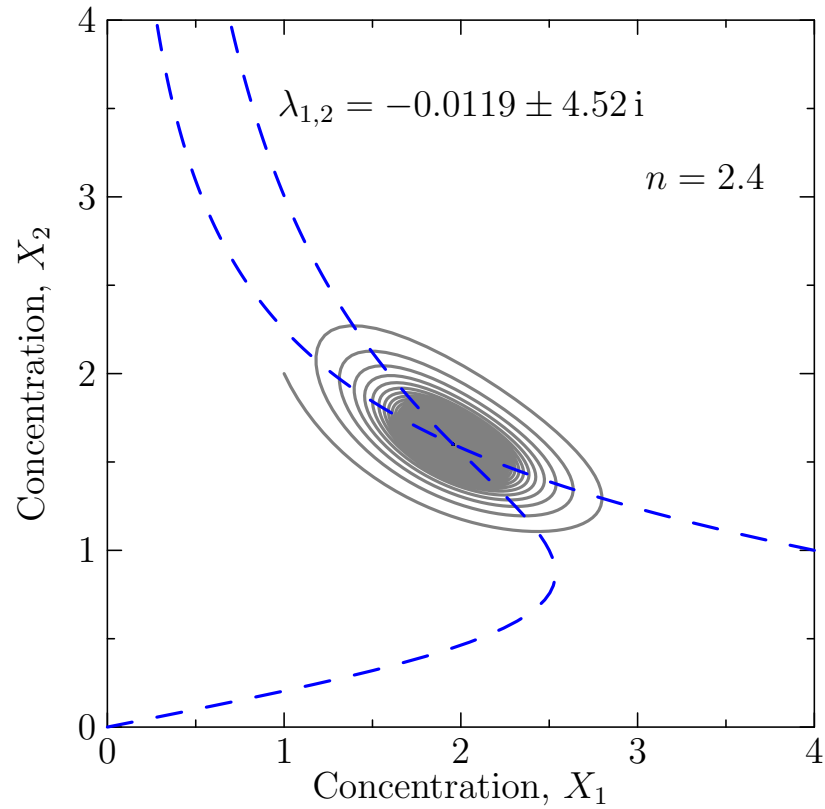



Hopf Bifurcation

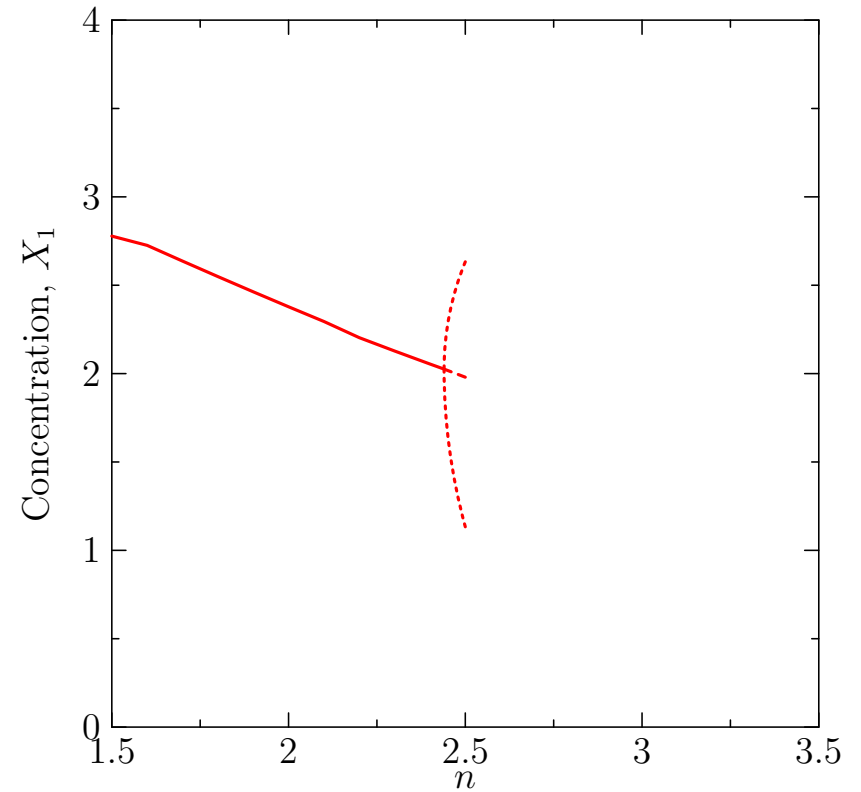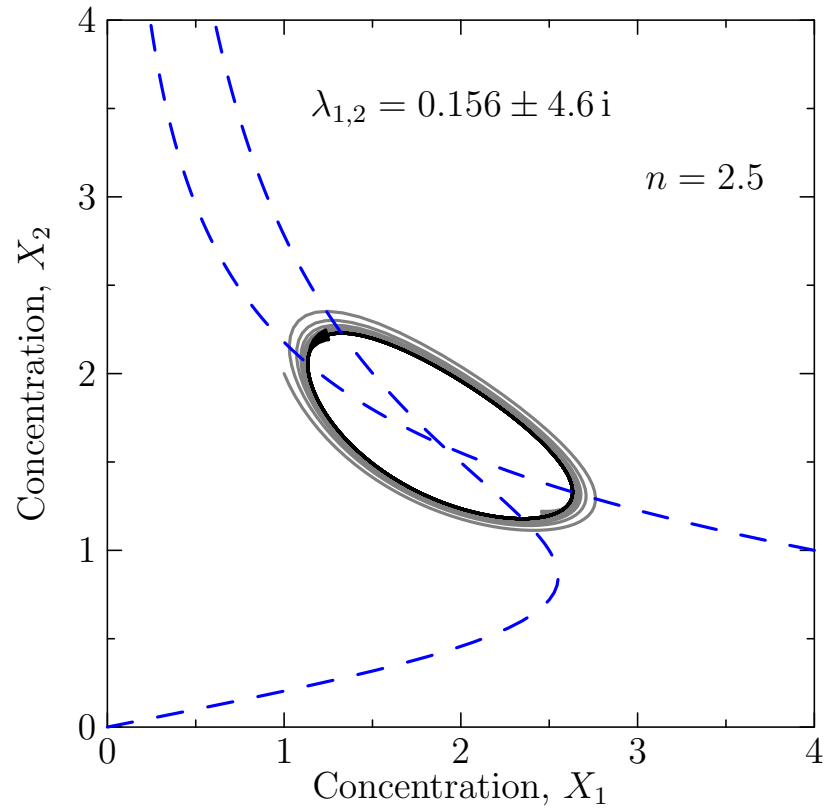



Hopf Bifurcation

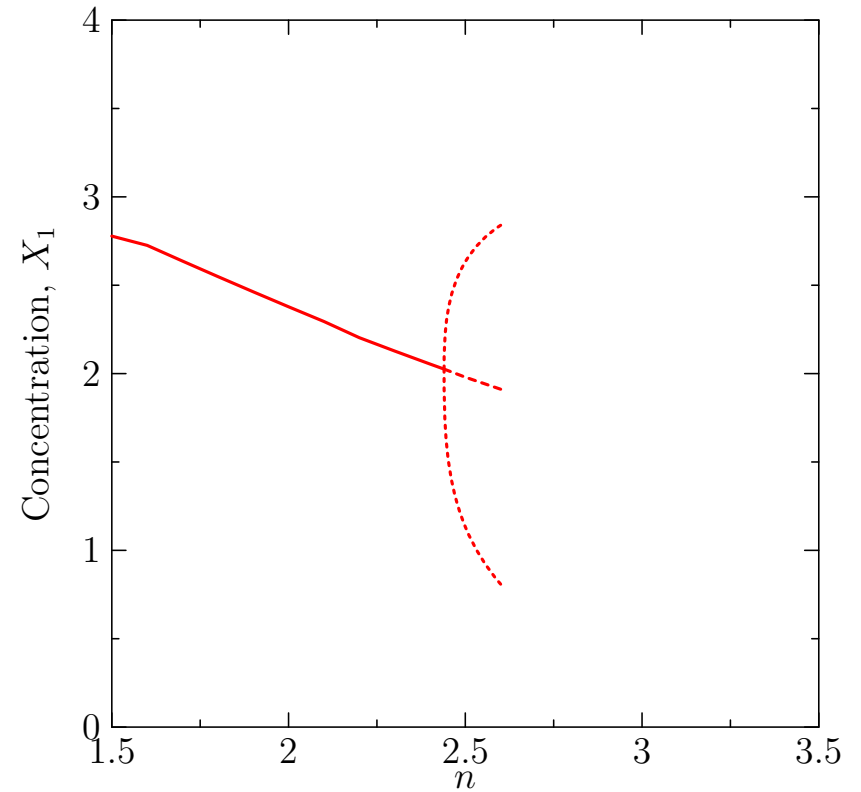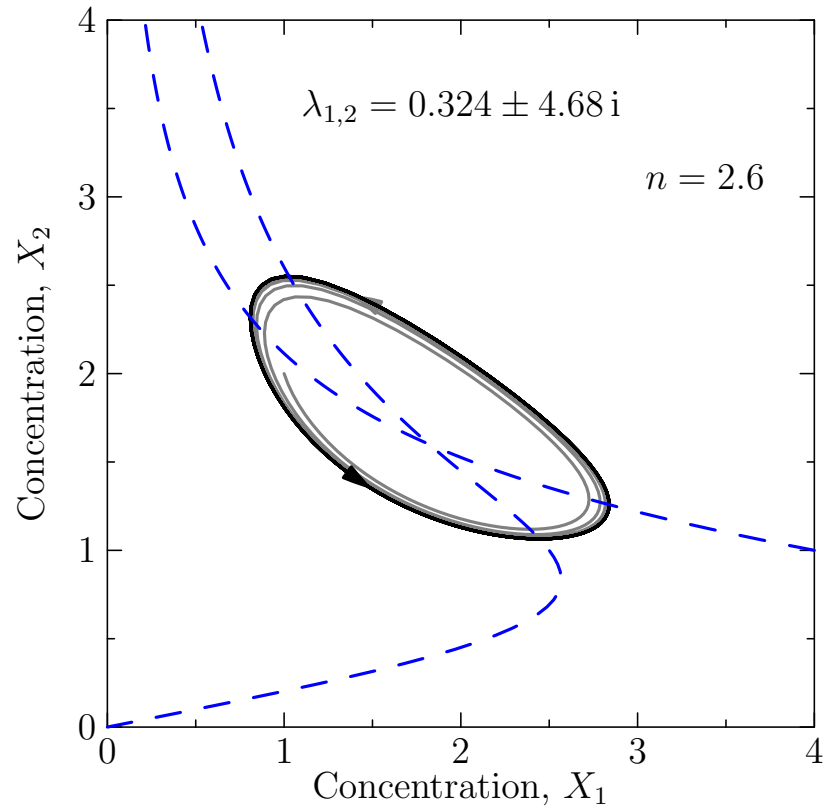



Hopf Bifurcation

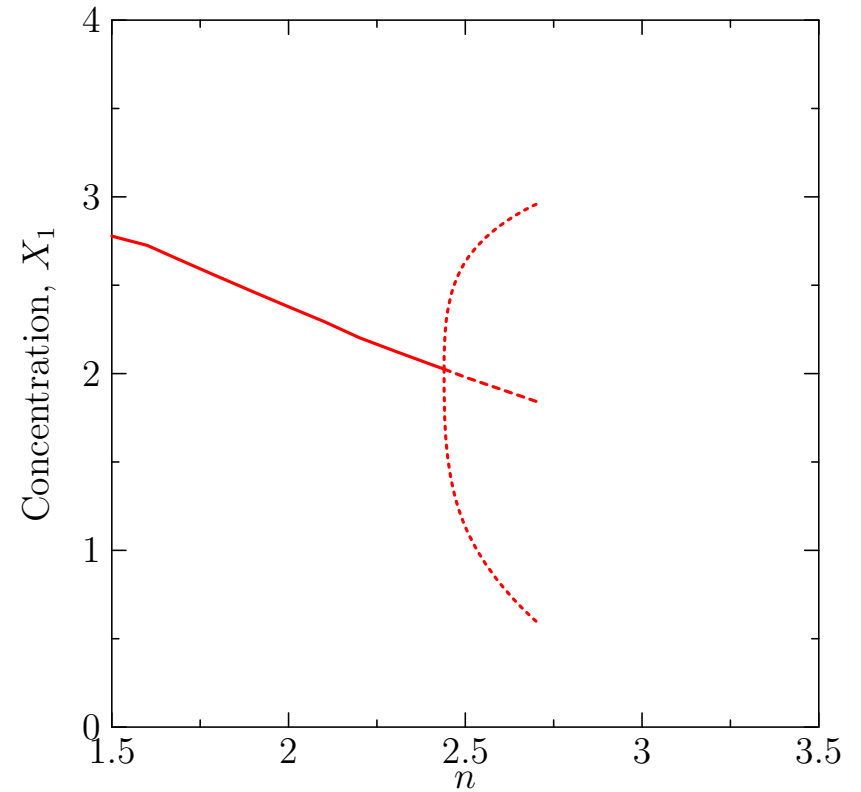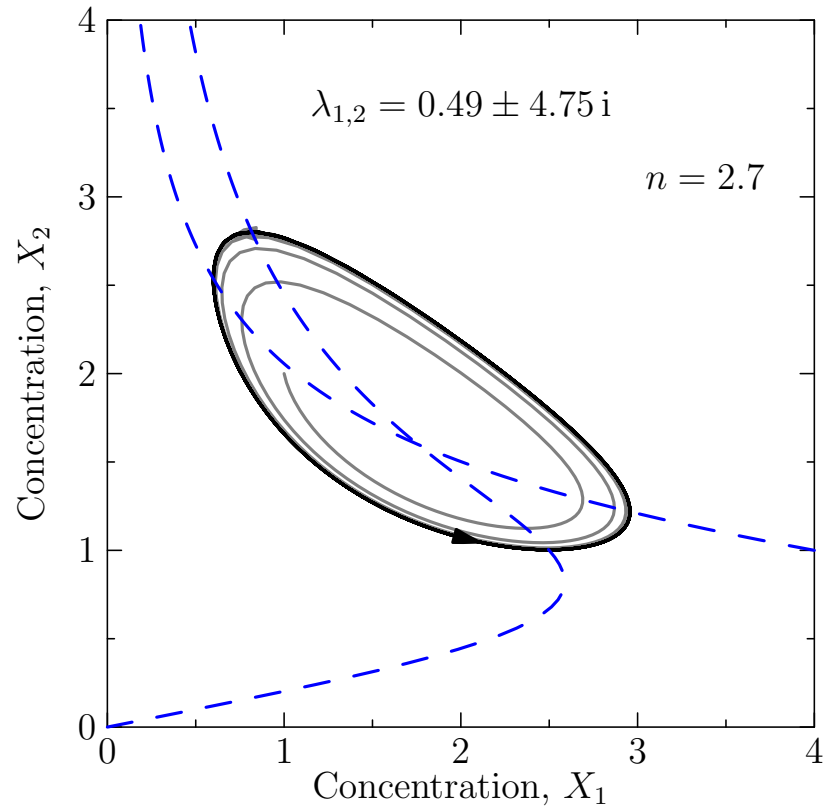



Hopf Bifurcation

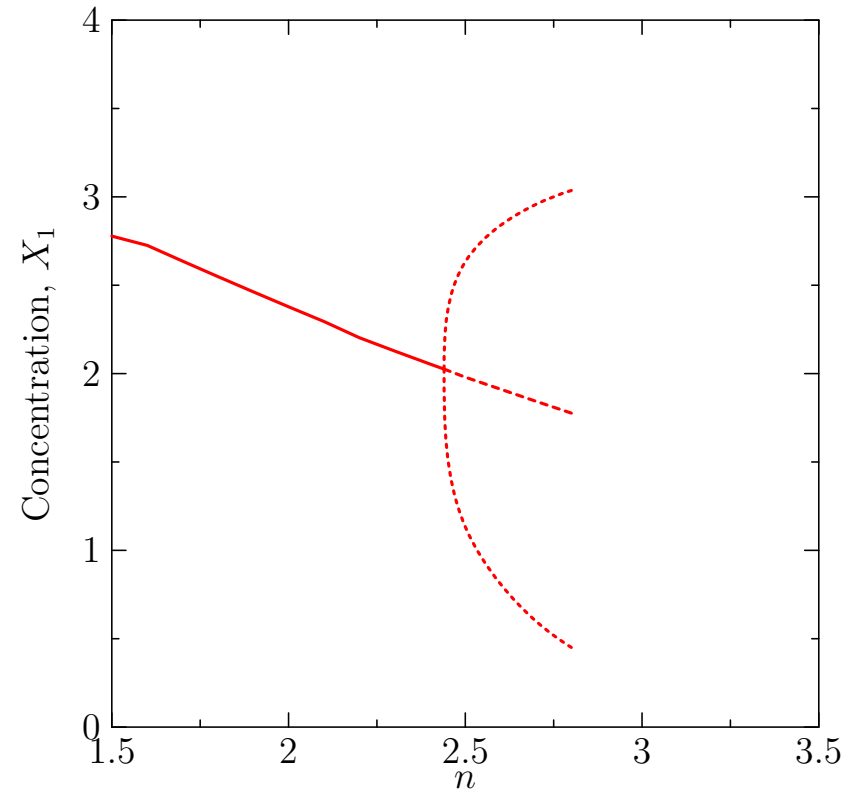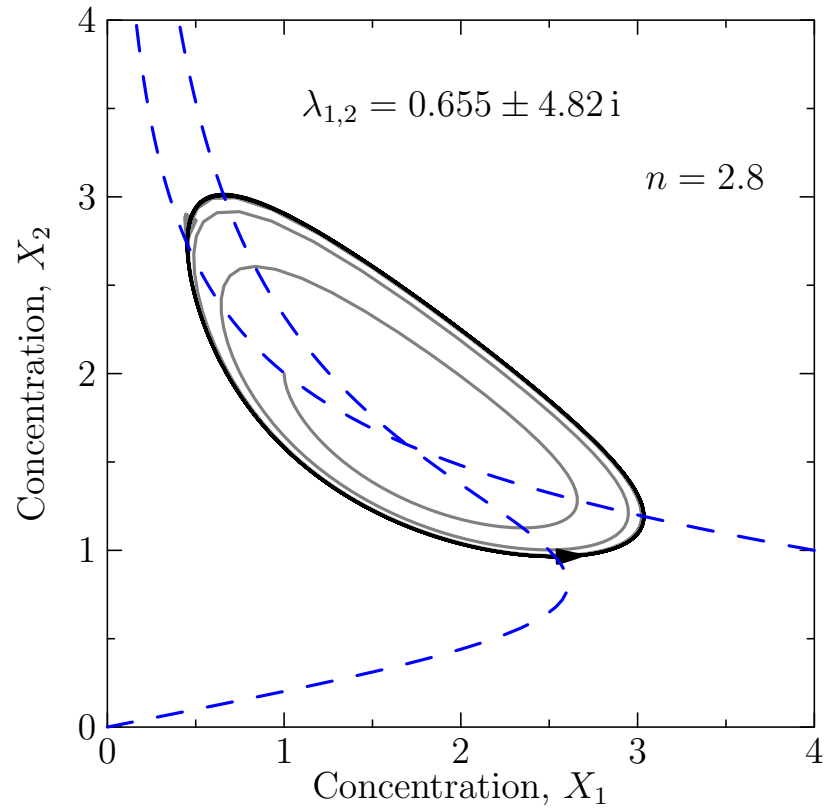



Hopf Bifurcation

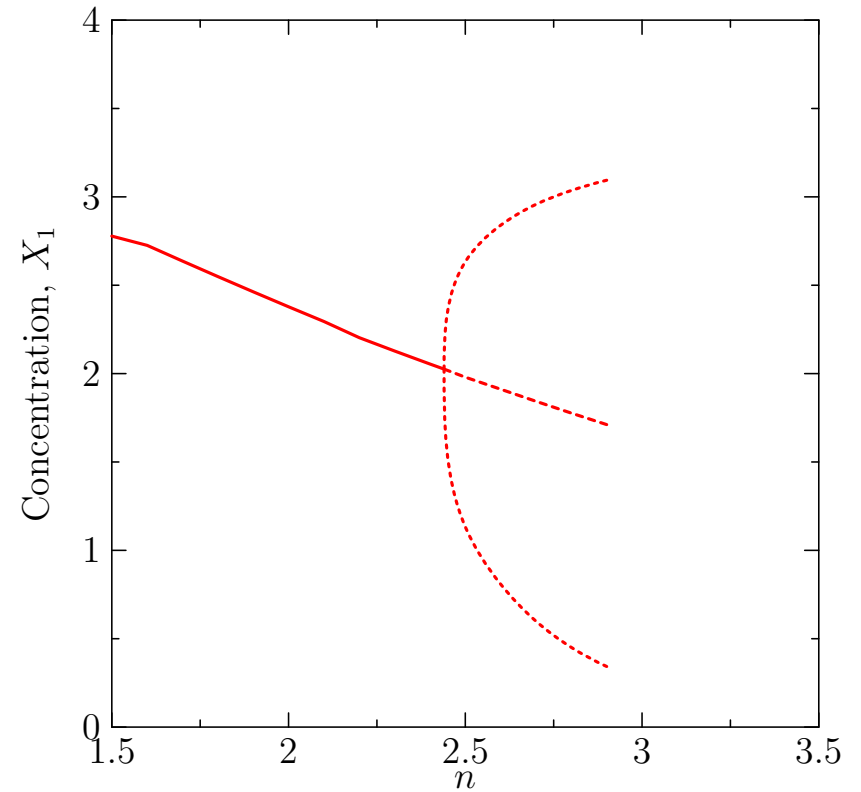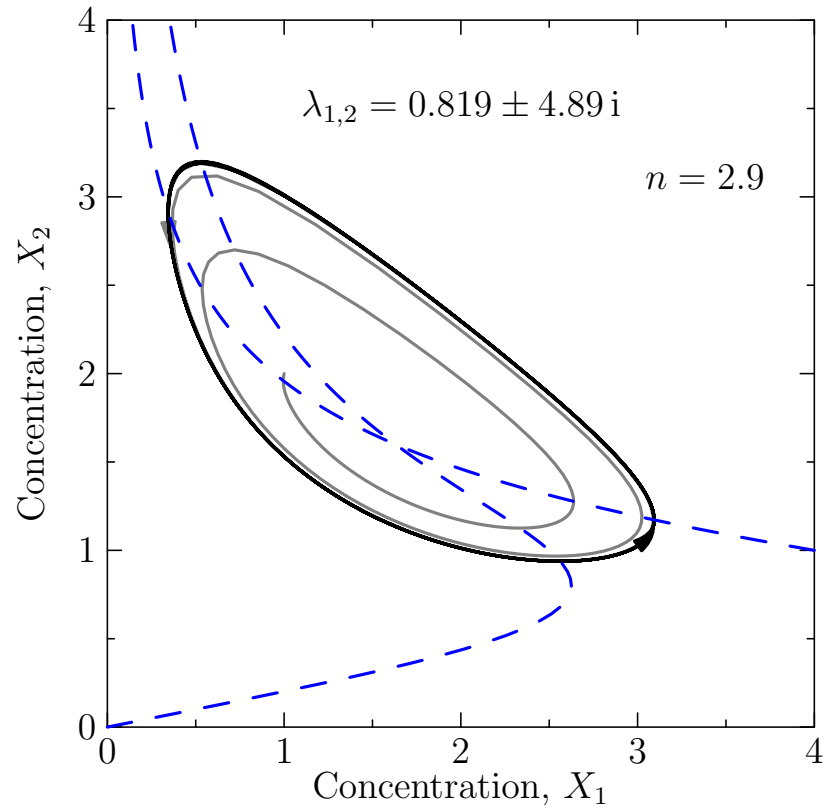



Hopf Bifurcation

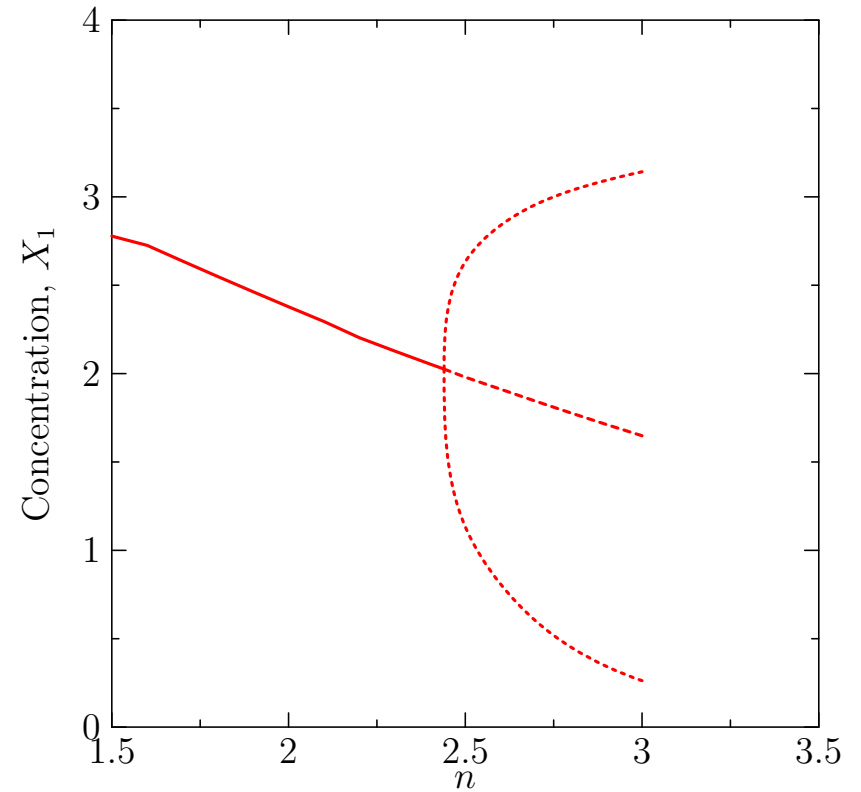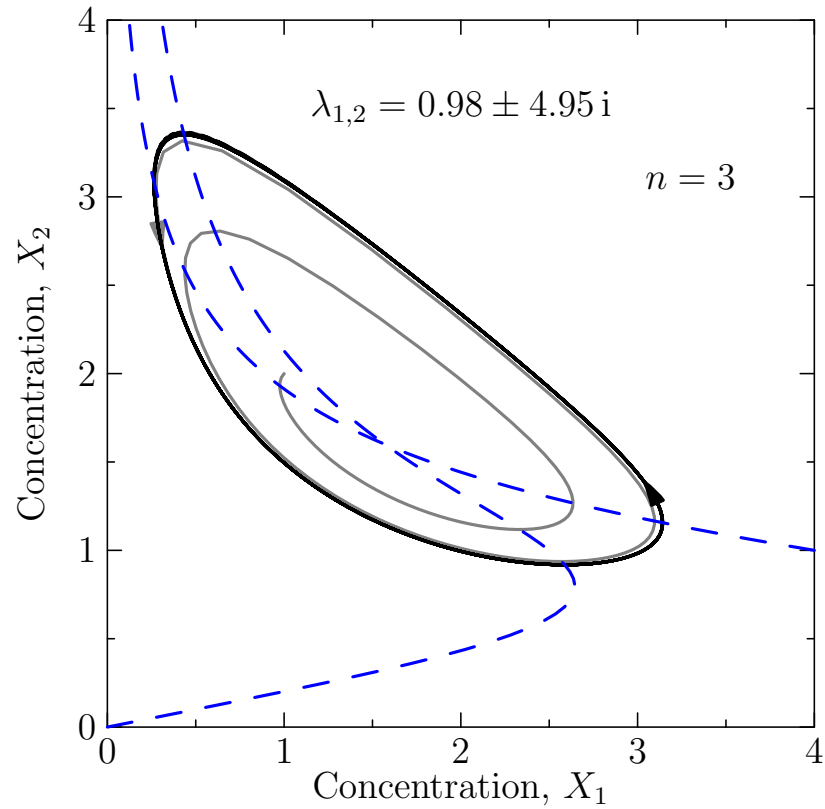



Hopf Bifurcation

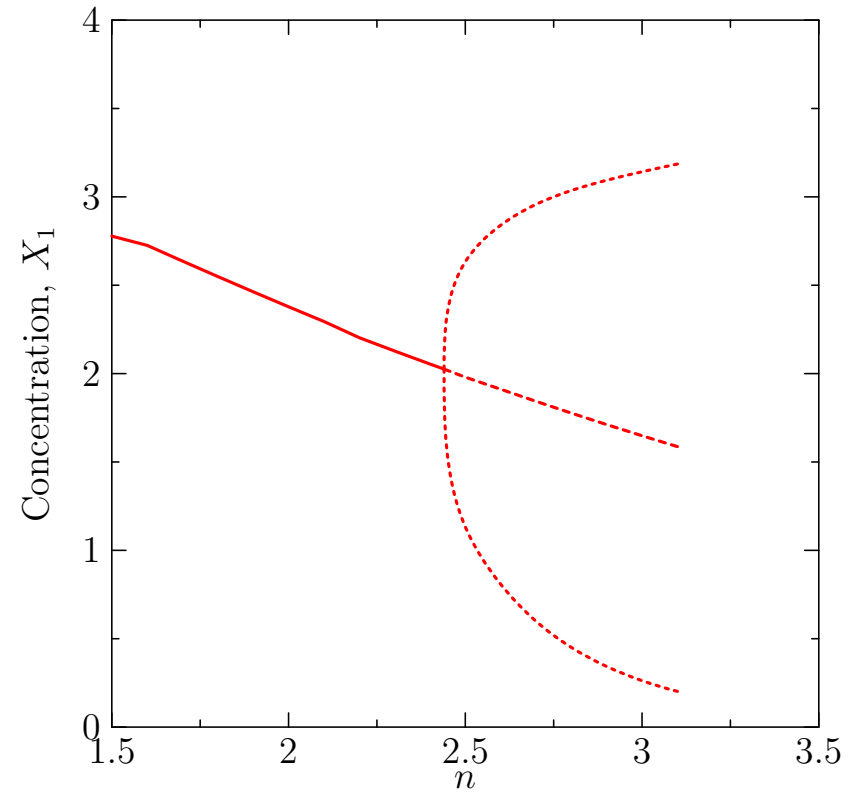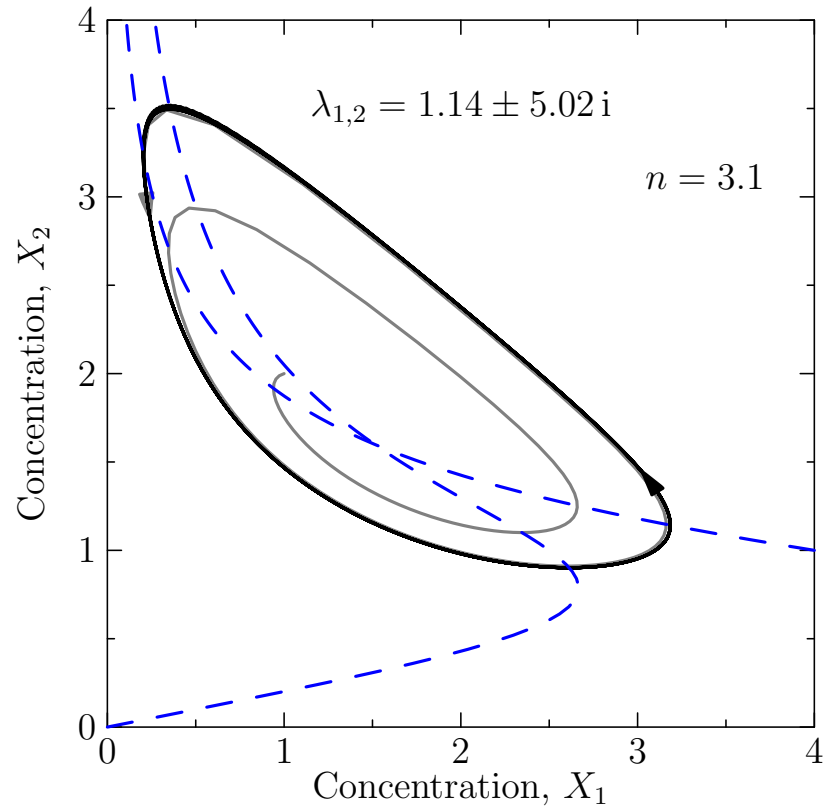



Hopf Bifurcation

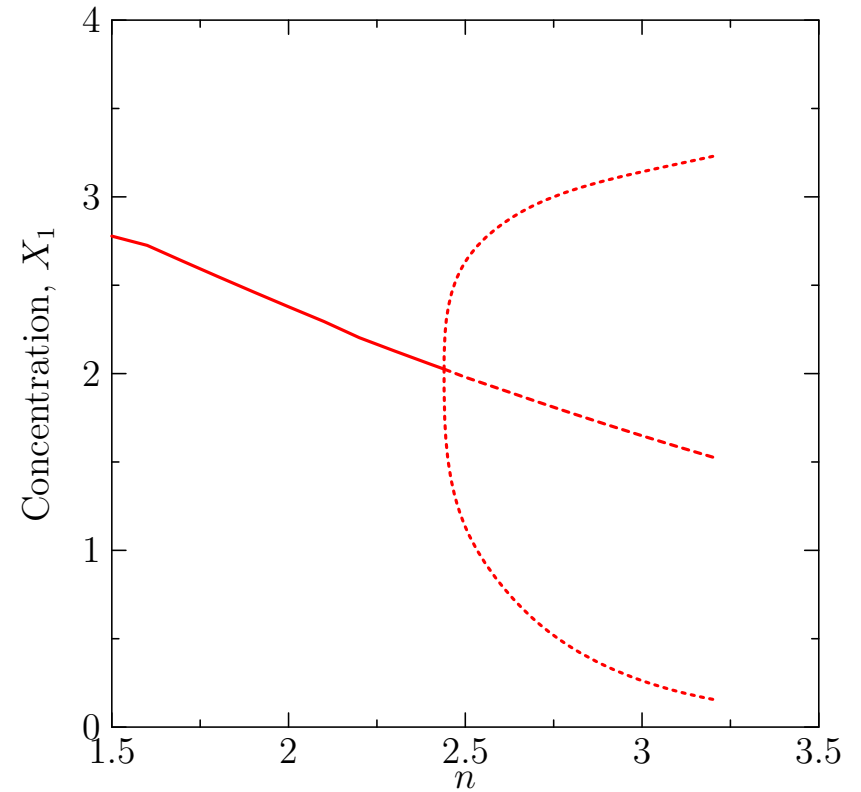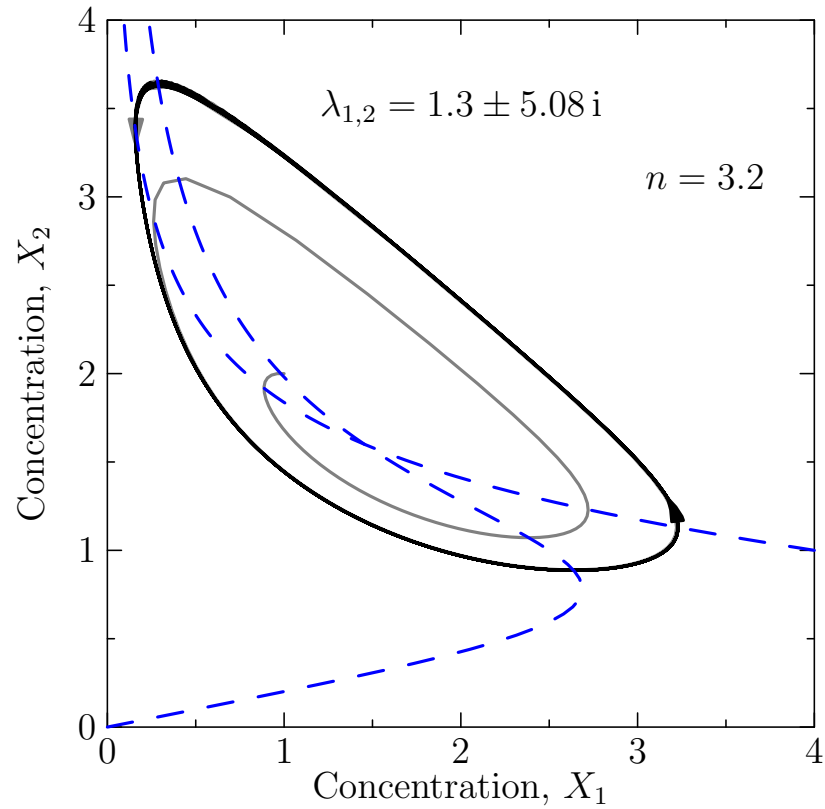



Hopf Bifurcation

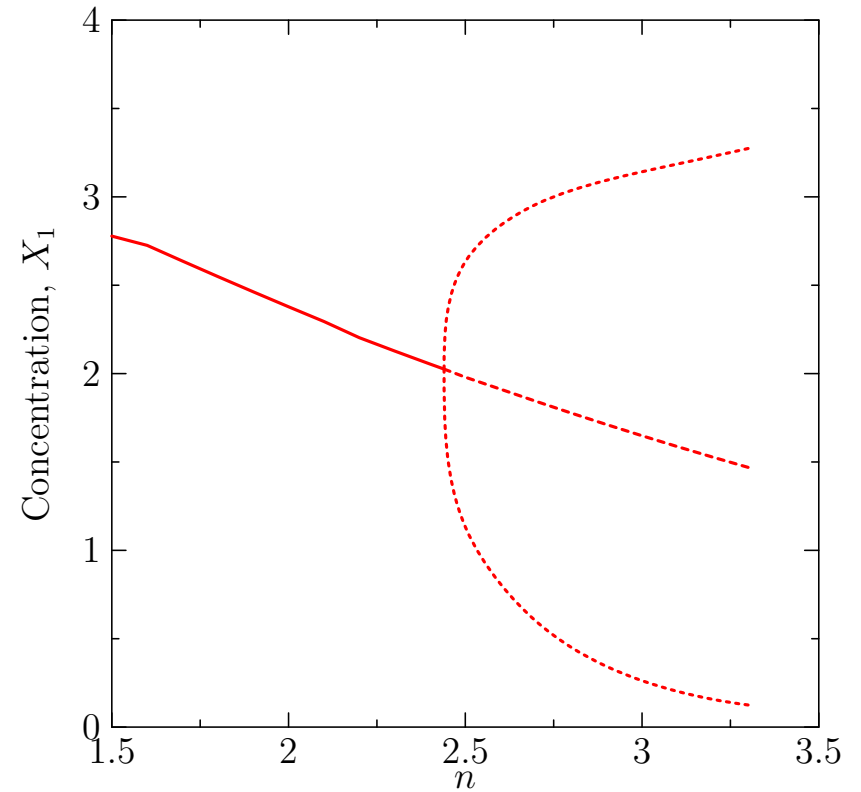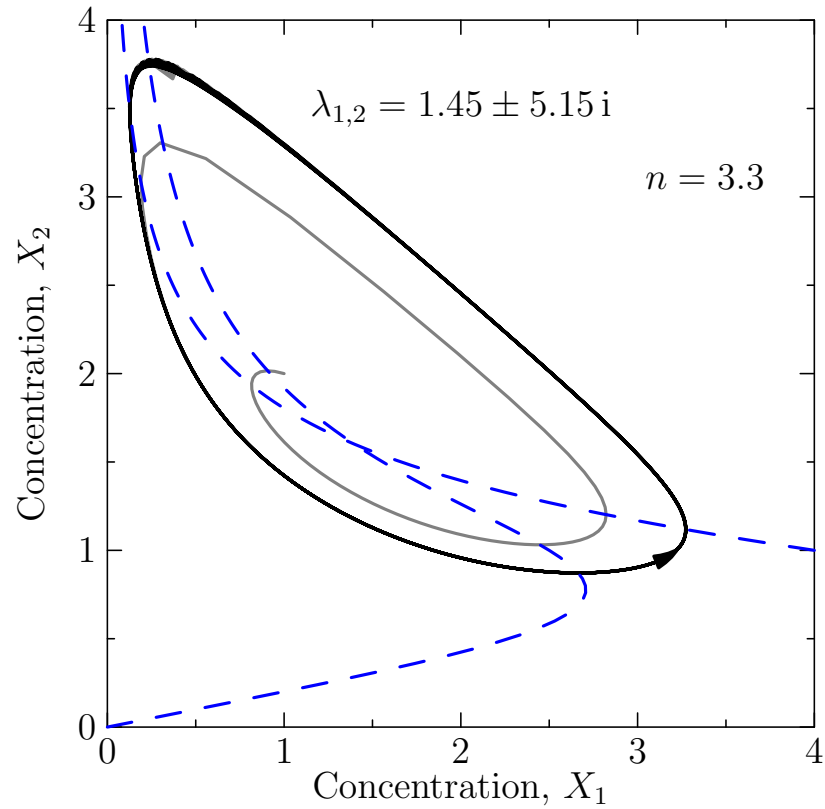



Hopf Bifurcation

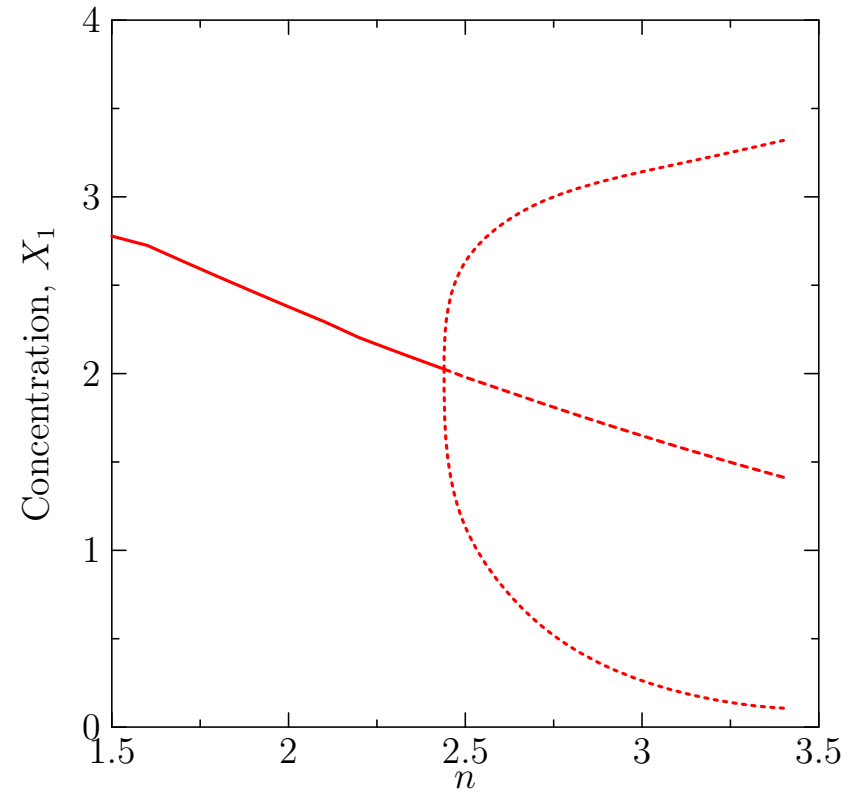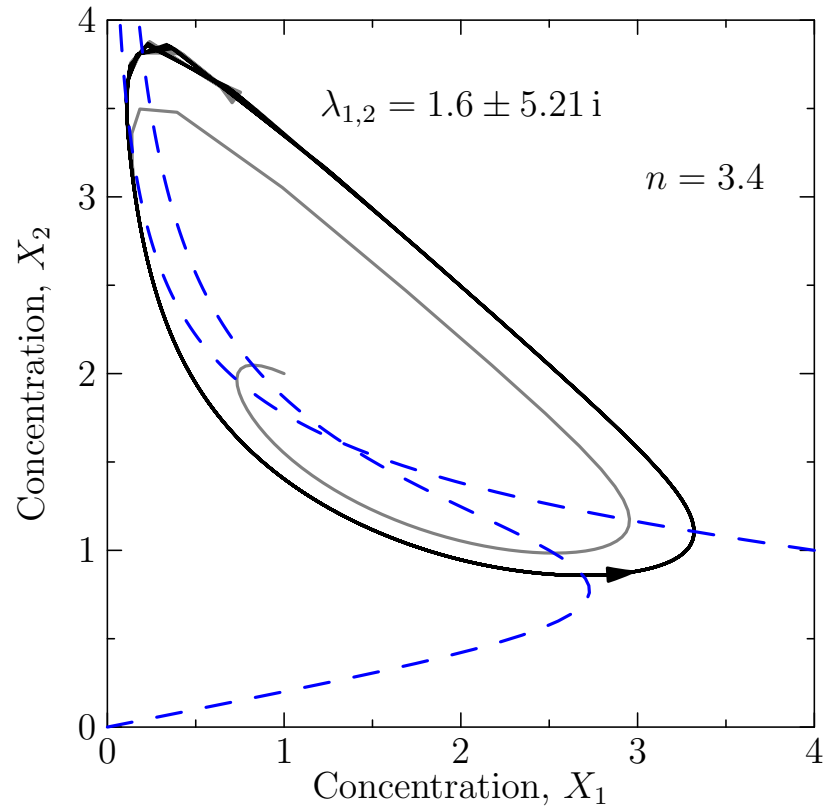

Hopf Bifurcation

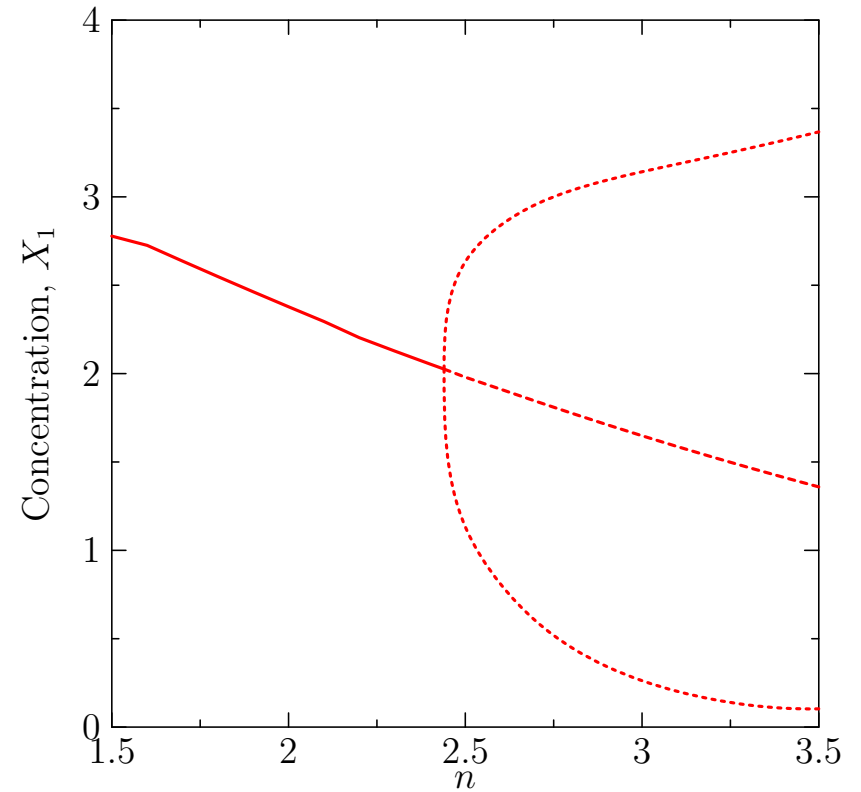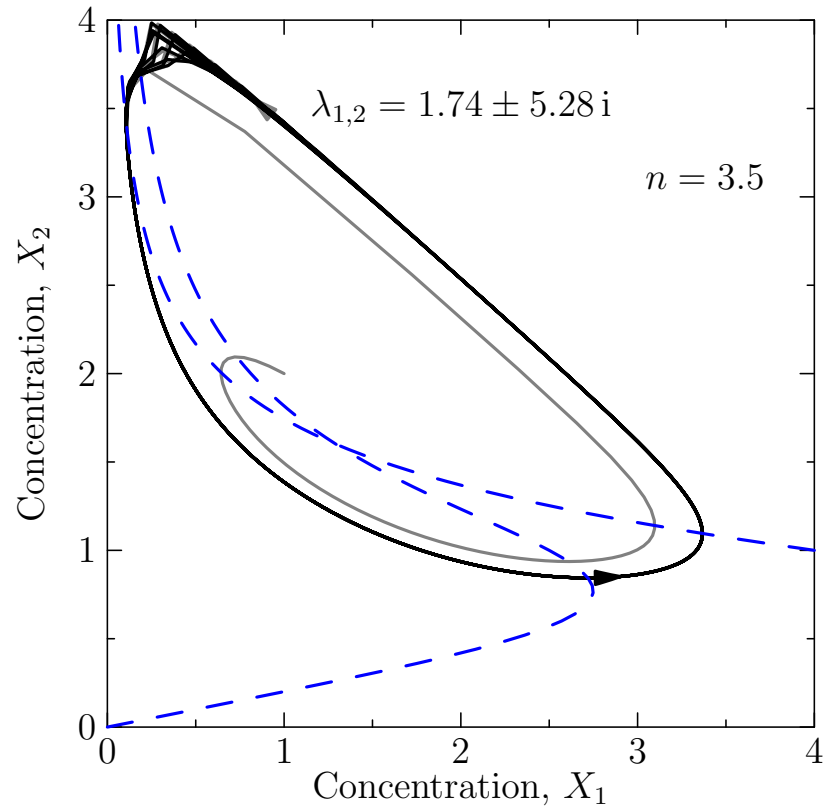

Hopf Bifurcation

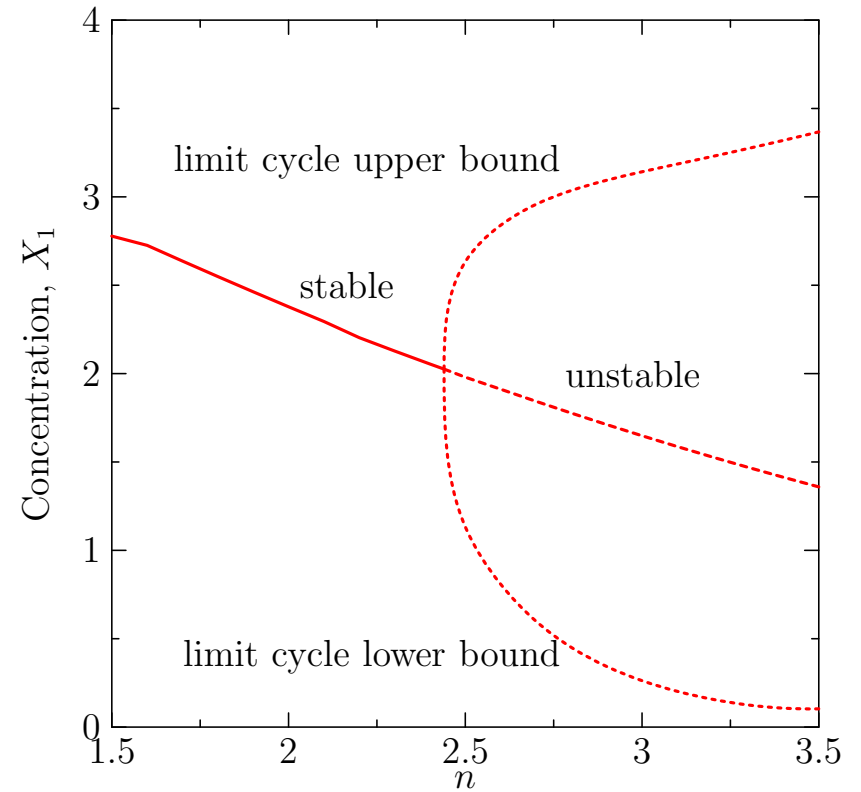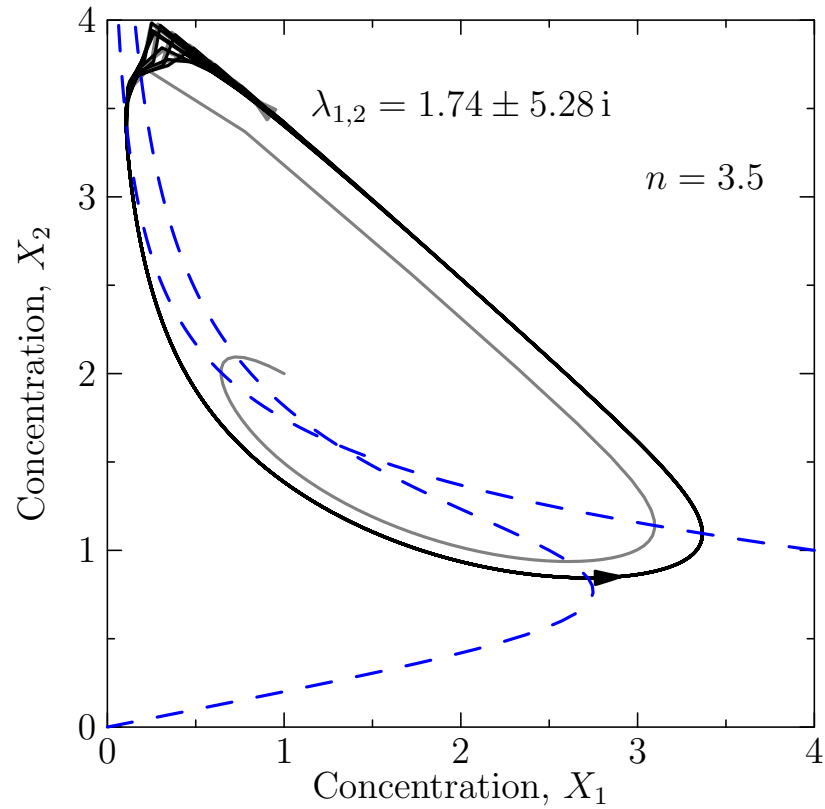

Summary

- We can understand a lot of behaviours by understanding first order ODEs
- Systems can exhibit fixed points, limit cycles (and even chaotic behaviour in enough dimensions)
- We can study the stability of fixed points
- The behaviour of systems can change radically as new fixed points emerge or fixed points become unstable

Summary

- We can understand a lot of behaviours by understanding first order ODEs
- Systems can exhibit fixed points, limit cycles (and even chaotic behaviour in enough dimensions)
- We can study the stability of fixed points
- The behaviour of systems can change radically as new fixed points emerge or fixed points become unstable

Summary

- We can understand a lot of behaviours by understanding first order ODEs
- Systems can exhibit fixed points, limit cycles (and even chaotic behaviour in enough dimensions)
- We can study the stability of fixed points
- The behaviour of systems can change radically as new fixed points emerge or fixed points become unstable

Summary

- We can understand a lot of behaviours by understanding first order ODEs
- Systems can exhibit fixed points, limit cycles (and even chaotic behaviour in enough dimensions)
- We can study the stability of fixed points
- The behaviour of systems can change radically as new fixed points emerge or fixed points become unstable