

Project Design Specification

Project Number 1000013

Project manager Philip DiSarro

Date Started February 24, 2024

Date Completed ...



Contents

1. Overview		1
2.	Architecture	1
3.	Specification	2
	3.1. System Actors	2
	3.2. Tokens	2
	3.3. Smart Contracts	2
	3.3.1. Payment Multi-validator	2
	3.3.2. Service Multi-validator	4
	3.3.3. Account Multi-validator	6
4.	Transactions	7
	4.1. Service Multi-validator	7
	4.1.1. Mint :: CreateService	7
	4.1.2. Mint :: DeleteService	9
	4.1.3. Spend :: UpdateMetaData	. 10
	4.1.4. Spend :: RemoveService	11
	4.2. Account Multi-validator	. 13
	4.2.1. Mint :: CreateAccount	. 13
	4.2.2. Mint :: DeleteAccount	. 14
	4.2.3. Spend :: UpdateMetaData	. 16
	4.2.4. Spend :: RemoveAccount	17
	4.3. Payment Multi-validator	. 19
	4.3.1. Mint :: InitiateSubscription	. 19
	4.3.2. Spend :: Extend	. 20
	4.3.3. Spend :: Unsubscribe	. 21
	4.3.4. Spend :: Withdraw	. 23
	4.3.5. Spend :: Penalty Withdraw	. 24



Payment Subscription Smart Contract

1. Overview

This Payment Subscription Smart Contract is developed using Aiken to facilitate automated recurring payments between Subscribers and Merchants on the Cardano blockchain. This smart contract enables users to set up, manage, and cancel subscriptions directly from their wallets.

2. Architecture

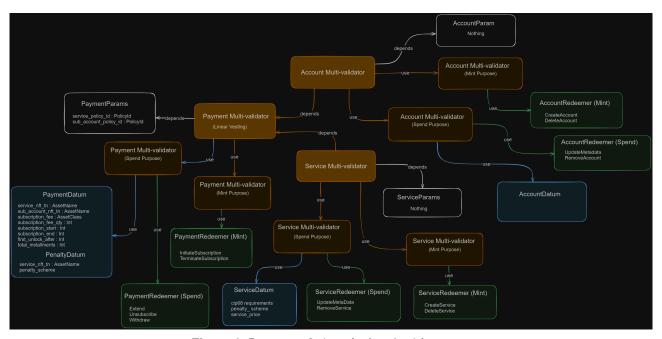


Figure 1: Payment Subscription Architecture

There are three contracts in this subscription system.

- **Service Contract:** A multi-validator responsible for creating an initial service by minting a single CIP-68 compliant Service NFT Asset and sending it to the user while sending the reference NFT to the spending end point. It also updates the metadata for the user and deletes the service by burning the MerchantNFT.
- Account Contract: A multi-validator responsible for creating an account for the user by minting a CIP-68 compliant Account NFT Asset and sending it to the user, while sending the reference NFT to the spending endpoint. It also updates the metadata for the Account and deletes the user account by burning a AccountNFT.



• **Payment Contract:** This is the core validator. A multi-validator responsible for holding the prepaid subscription fees for a service, renewing a subscription to a service, unsubscribing from a service and withdrawing subscription fees. The contract incorporates a linear vesting mechanism to gradually release subscription fees to the merchant over the subscription period.

3. Specification

3.1. System Actors

- **Merchant:** An entity who interacts with the Service Contract in order to create a service and receives subscription payments for the respective service or services. A user becomes a merchant when they mint a Service NFT.
- **Subscriber:** An entity who interacts with the Subscriber Contract in order to create an account and deposit prepaid subscription fees to the Payments Contract. A user becomes a subscriber when they mint an Account NFT and add lock funds to the Payment Contract.

3.2. Tokens

- **Service NFT:** Can only be minted by a user when creating a service and burned when the user spends the deletes their service/services from the system.
 - ► TokenName: Defined in Service Multi-validator parameters with the hash of the Service Policy Id
- Account NFT: Can only be minted when subscription fee is paid to Payment Contract and burned when subscriber exits the system. Datum is updated when fees are deposited and withdrawn from Payments Contract.
 - ► TokenName: Defined in Subscriber Multi-validator parameters with hash of the Subscriber Policy Id

3.3. Smart Contracts

3.3.1. Payment Multi-validator

The Payments Contract is responsible for managing the prepaid subscription fees, validating subscriptions, and ensuring the proper distribution of these fees over the subscription period given the total_installments. It facilitates the creation, extension, and cancellation of subscriptions, allowing both subscribers and merchants to interact with the contract in a secure and automated manner. This contract ensures that subscription payments are correctly handled and that any penalties for early cancellation are appropriately enforced.

3.3.1.1. Parameters



service_policy_id : Hash of the PolicyIdaccount_policy_id : Hash of the PolicyId

3.3.1.2. Minting Purpose

3.3.1.2.1. Redeemer

- InitiateSubscription
- TerminateSubscription

3.3.1.2.2. Validation

- **InitiateSubscription:** The redeemer allows creating of a new subscription by minting only one unique Payment Token.
 - validate that out_ref must be present in the Transaction Inputs
 - validate that the redeemer only mints a single Payment Token

• TerminateSubscription:

• validate that the redeemer only burns a single Payment Token Token.

3.3.1.3. Spend Purpose

3.3.1.4. Datum

This is a Sum type datum where one represents the main datum and the other one represents a penalty datum.

3.3.1.4.1. Main datum

- service_nft_tn: Service token name encoding UTx0 to be consumed when minting the NFT.
- account_nft_tn: Account token name encoding UTxO to be consumed when minting the NFT.
- **subscription fee:** AssetClass type for the subscription fee.
- subscription_fee_qty: Amount of the subscription fee.
- subscription start: Start of the subscription.
- subscription end: Expiry time of the subscription.
- total installments: The number of periodic intervals over which to release subscription fees.

3.3.1.4.2. Penalty datum

• service_nft_tn: Service token name encoding UTx0 to be consumed when minting the NFT.



- penalty_fee: AssetClass type for the amount of fees to be deducted when subscriber cancels the subscription.
- penalty_fee_qty: Amount of the penalty fees.

3.3.1.5. Redeemer

- Extend
- Unsubscribe
- Withdraw

3.3.1.6. Validation

- **Extend:** The redeemer will allow anyone to increase the subscription funds by locking the funds in the Payment Contract.
 - validate that the value of the UTxO is increased as long as the Datum is updated with the Service NFT Token Name.
- **Unsubscribe:** The redeemer will allow anyone with an Account NFT to spend an Account UTxO to unlock funds back to their address.
 - ▶ validate the user with an Account NFT asset spends a Payment UTxO.
 - validate that the penalty UTxO is being produced with the merchants Token Name.
- **Withdraw:** The redeemer will allow anyone with a Service NFT to withdraw funds from the Payment UTxO or Penalty UTxO.
 - validate whether the transaction contains a penalty datum or a normal datum.
 - ▶ Payment UTx0
 - validate that user with Service NFT spends a Payment UTx0
 - ► Penalty UTx0
 - validate that user with Service NFT spends a Penalty UTx0

3.3.2. Service Multi-validator

The Service Multi-validator is responsible for, creating, updating and removing a service.

3.3.2.1. Parameter

Nothing

3.3.2.2. Minting Purpose



3.3.2.2.1. Redeemer

- CreateService
- RemoveAccount

3.3.2.2.2. Validation

- **CreateService:** The redeemer allows creating of a new subscription sevice by minting only one unique Service Token.
 - validate that out_ref must be present in the Transaction Inputs
 - ▶ validate that the redeemer only mints a single CIP68 compliant Service Token

RemoveAccount:

validate that the redeemer only burns a single CIP68 compliant Service NFT Token.

3.3.2.3. Spend Purpose

3.3.2.3.1. Datum

- service_fee: AssetClass type for the amount to pay for a subscription service
- service_fee_qty: Amount of the funds to pay for a service.
- penalty_fee: AssetClass type for the amount of fees to be deducted when subscriber cancels the subscription.
- penalty_fee_qty: Amount of the penalty fees.
- cip-68 requirements : Any other requirements

3.3.2.3.2. Redeemer

- UpdateMetaData
- RemoveService

3.3.2.3.2.1. Validation

- **UpdateMetaData:** The redeemer allows for updating the metadata attached to the UTxO sitting at the script address.
 - validate that Service UTxO with a Service NFT is being spent.
 - updates the metadata of the Reference NFT token and sends the token to the spending end point
- **RemoveService:** The redeemer allows the removal of a service by a merchant from the subscription system.



- validate ServiceNFT is being spent.
- Removes all the Reference NFT tokens to another external address.

3.3.3. Account Multi-validator

3.3.3.1. Parameter

Nothing

3.3.3.2. Minting Purpose

3.3.3.2.1. Redeemer

- CreateAccount
- DeleteAccount

3.3.3.2.1.1. Validation

- **CreateAccount:** The redeemer allows creating of a new subscription service account by minting only one unique Account Token.
 - validate that out_ref must be present in the Transaction Inputs
 - validate that the redeemer only mints a single CIP68 compliant Account Token
- **DeleteAccount:** this redeemer allows burning of an Account NFT to remove the subscriber from the system. A Check That there's no payment for the delete account should be done off-chain.
 - validate that the redeemer only burns a single CIP68 compliant Account Token

3.3.3. Spend Purpose

3.3.3.3.1. Datum

- · account details
- cip-68 requirements

3.3.3.3. Redeemer

- UpdateMetaData
- RemoveAccount

3.3.3.3.2.1. Validation



- **UpdateMetaData:** The redeemer allows for updating the metadata attached to the UTxO sitting at the script address.
 - ▶ validate that the Account UTxO with the Account NFT is being spent.
 - updates the metadata of the Reference NFT and sends the token to the spending end point.
- **RemoveAccount:** The redeemer allows the removal of an account by a subscriber from the subscription system. Must Check That there's no ADA in the payment UTx0 in the off-chain code.
 - validate that Account NFT is being spent.

4. Transactions

This section outlines the various transactions involved in the Payment Subscription Smart Contract on the Cardano blockchain.

4.1. Service Multi-validator

4.1.1. Mint :: CreateService

This transaction creates a new service by minting a Merchant NFT. This transaction is performed by the merchant to indicate that a new service is available.

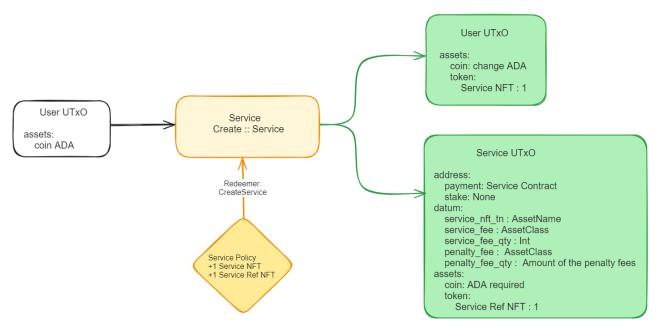


Figure 2: Create Service UTxO diagram



4.1.1.1. Inputs

1. Merchant Wallet UTx0.

- · Address: Merchant's wallet address
- Value:
 - Minimum ADA
 - ► Any ADA required for the transaction.

4.1.1.2. Outputs

1. Merchant Wallet UTx0:

- · Address: Merchant wallet address
- Datum:
 - service_nft_tn: Merchant's token name encoding UTx0 to be consumed when minting the NFT.
 - ► subscription_fee: AssetClass type for the subscription fee.
 - subscription fee qty: Amount of the subscription fee.
 - penalty_fee: AssetClass type for the amount of funds to be deducted when subscriber cancels the subscription.
 - penalty_fee_qty: Amount of the penalty fees.
- Value:
 - minimum ADA
 - ▶ 1 Service NFT Asset

2. Service Validator UTx0:

- Address: Service Multi-validator Address (Mint)
- Datum:
 - service_nft_tn: Service NFT token name encoding UTx0 to be consumed when minting the NFT.
 - subscription_fee: AssetClass type for the subscription fee.
 - ► subscription_fee_qty: Amount of the subscription fee.
 - penalty_fee: AssetClass type for the amount of funds to be deducted when subscriber cancels the subscription.
 - penalty_fee_qty: Amount of the penalty fees.
- Value:
 - ▶ 1 Service Reference NFT Asset



4.1.2. Mint :: DeleteService

This transaction deletes an existing service by burning the associated Merchant NFT by the merchant.

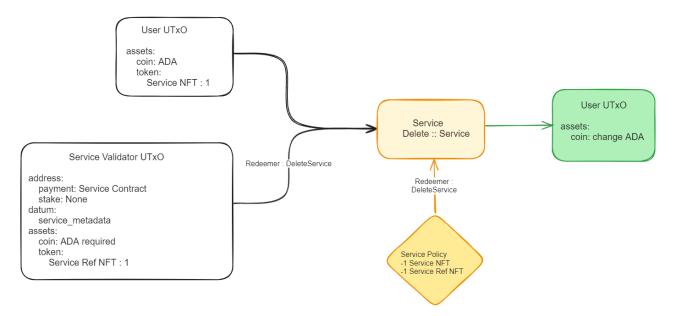


Figure 3: Delete Service UTxO diagram

4.1.2.1. Inputs

1. Merchant Wallet UTx0

· Address: Merchant's wallet address

- Value:
 - Minimum ADA
 - ▶ 1 Service NFT Asset

2. Service Validator UTx0

· Address: Service validator script address

- Value:
 - Minimum ADA
 - ▶ 1 Reference NFT Asset

4.1.2.2. Mints

1. Service Multi-validator



• Redeemer: DeleteService

· Value:

► -1 Service NFT Asset

▶ -1 Reference NFT Asset

4.1.2.3. Outputs

1. Merchant Wallet UTx0

· Address: Merchant wallet address

Value:

Minimum ADA (remaining after burning the NFT)

4.1.3. Spend :: UpdateMetaData

This transaction updates the metadata attached to the UTxO at the script address in accordance with CIP-68 standards. It consumes both the Service NFT and the Service Reference NFT, then sends the updated Service NFT to the user's wallet and the updated Reference NFT to the spending endpoint.

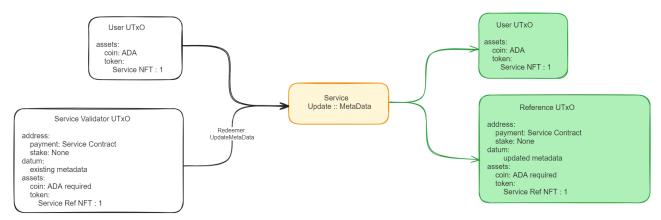


Figure 4: Update Service MetaData UTxO diagram

4.1.3.1. Inputs

1. Merchant Wallet UTx0

· Address: Merchant's wallet address

• Value:

Minimum ADA



▶ 1 Service NFT Asset

2. Service Validator UTx0

- Address: Service validator script address
- Datum:
 - existing_metadata: Current metadata for the service.
- Value:
 - Minimum ADA
 - ▶ 1 Reference NFT Asset

4.1.3.2. Outputs

1. Merchant Wallet UTx0

- Address: Merchant wallet address
- Datum
 - updated_metadata: New metadata for the subscription.
- Value:
 - Minimum ADA
 - ▶ 1 Service NFT Asset

2. Service Validator UTx0:

- Address: Service validator script address
- Datum:
 - ▶ updated_metadata: New metadata for the subscription.
- Value:
 - Minimum ADA
 - ▶ 1 Reference NFT Asset

4.1.4. Spend :: RemoveService

This transaction spends the Reference UTxO and the Service NFT to remove a service from the system.



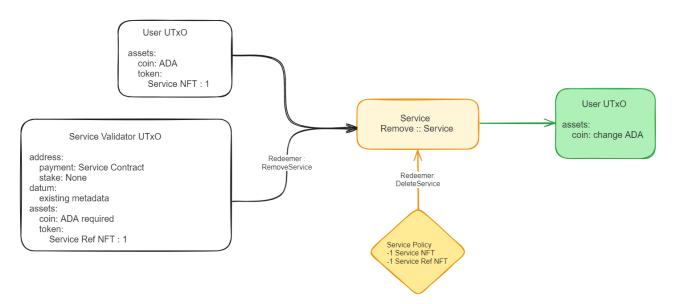


Figure 5: Remove Service UTx0 diagram

4.1.4.1. Inputs

1. Merchant Wallet UTx0

· Address: Merchant's wallet address

- Value:
 - Minimum ADA
 - ▶ 1 Service NFT Asset

2. Service Validator UTx0

- · Address: Service validator script address
- Datum:
 - service_metadata: Current metadata for the service.
- Value:
 - Minimum ADA
 - ▶ 1 Reference NFT Asset

4.1.4.2. Mints

1. Merchant Multi-validator

· Redeemer: DeleteService

• Value:



- ▶ -1 Service NFT Asset
- ► -1 Reference NFT Asset

4.1.4.3. Outputs

1. Merchant Wallet UTx0

- · Address: Merchant wallet address
- Value:
 - Minimum ADA (remaining after burning the NFT)

4.2. Account Multi-validator

4.2.1. Mint :: CreateAccount

This endpoint mints a new subscription NFT for a subscriber, establishing a new subscription account. It transfers the subscription fee to the Payments Contract and provides the subscriber with a unique Account Token.

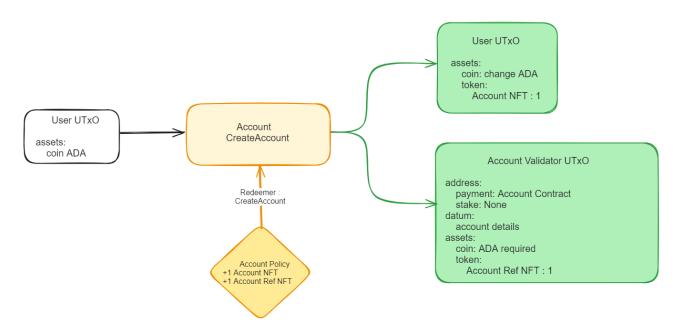


Figure 6: Create Account UTxO diagram

4.2.1.1. Inputs

1. Subscriber Wallet UTx0.



- · Address: Subscriber's wallet address
- Value:
 - Minimum ADA
 - Any additional ADA required for the transaction

4.2.1.2. Mints

1. Account Multi-validator

- · Redeemer: CreateAccount
- Value:
 - ► +1 Account NFT Asset
 - ► +1 Reference NFT Asset

4.2.1.3. Outputs

1. Subscriber Wallet UTx0:

- · Address: Subscriber wallet address
- Value:
 - minimum ADA
 - ▶ 1 Account NFT Asset

2. Account Validator UTx0:

- · Address: Account validator script address
- Datum:
 - account_token_name: Account token name encoding UTx0 to be consumed when minting the NFT.
- Value:
 - ▶ 1 Reference NFT Asset

4.2.2. Mint :: DeleteAccount

This transaction allows a subscriber to burn an Account NFT, effectively removing the user from the subscription system. An off-chain check is required to ensure that there are no pending subscription fees in the Payment UTx0.



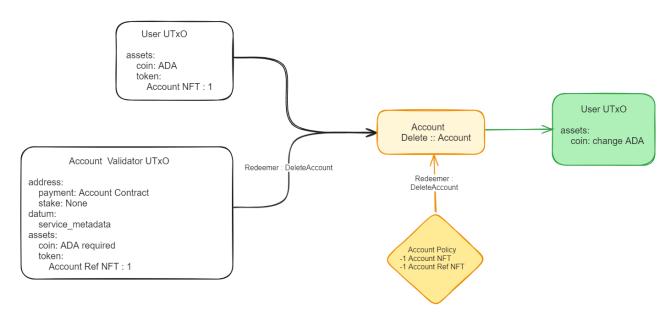


Figure 7: Delete Account UTxO diagram

4.2.2.1. Inputs

1. Subscriber UTx0

- · Address: Subscriber's wallet address
- Value:
 - Minimum ADA
 - ▶ 1 Account NFT Asset

2. Account Validator UTx0

- · Address: Account Multi-validator script address
- Datum:
 - ► account_nft_tn: Account NFT token name
- Value:
 - ▶ 1 Reference NFT Asset

4.2.2.2. Mints

1. Account Multi-validator

- Redeemer: DeleteAccount
- Value:
 - ► -1 Account NFT Asset



▶ -1 Reference NFT Asset

4.2.2.3. Outputs

1. Subscriber Wallet UTx0

Address: Subscriber's wallet address

- Value:
 - Remaining ADA and other tokens, if any

4.2.3. Spend :: UpdateMetaData

This transaction updates the metadata attached to the Account UTxO at the script address. It consumes both the Account NFT and the Reference NFT, then sends the updated Subscriber NFT to the user's wallet and the updated Reference NFT to the spending endpoint.

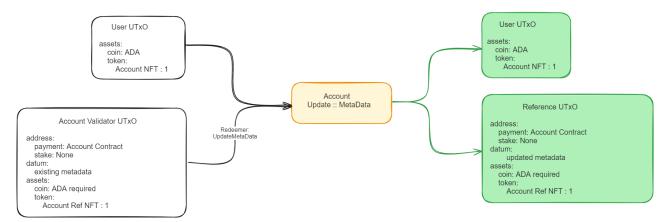


Figure 8: Update Account Metadata UTxO diagram

4.2.3.1. Inputs

1. Subscriber UTx0

· Address: Subscriber's wallet address

- Value:
 - ► Minimum ADA
 - ► Account NFT Asset

2. Account Validator UTx0



- · Address: Account validator script addres
- Datum:
 - existing_metadata: Current metadata for the account.
- Value:
 - Minimum ADA
 - ▶ 1 Reference NFT Asset

4.2.3.2. Outputs

1. Subscriber UTx0

- · Address: Subscriber's wallet address
- Datum:
 - updated_metadata: New metadata for the account
- Value:
 - Minimum ADA
 - ▶ 1 Account NFT Asset

2. Account Validator UTx0

- · Address: Account validator script address
- Datum:
 - updated_metadata: New metadata for the account
- Value:
 - Minimum ADA
 - ▶ 1 Reference NFT Asset

4.2.4. Spend :: RemoveAccount

This transaction effectively terminates the subscription and removes the subscriber's account from the system by consuming the Account NFT and the Reference NFT.



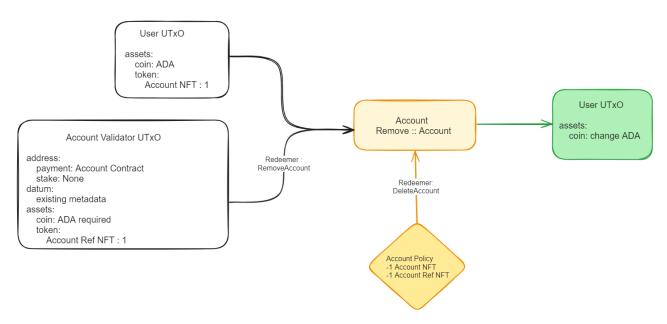


Figure 9: Remove Account Metadata UTxO diagram

4.2.4.1. Inputs

1. Subscriber Wallet UTx0

- · Address: Subscriber's wallet address
- Value:
 - Minimum ADA
 - ► Account NFT Asset

2. Account Policy UTx0

- Address: Merchant Multi-validator Address (Spend)
- Datum:
 - service_nft_tn: Service NFT token name
- Value:
 - Minimum ADA
 - ▶ 1 Reference NFT Asset

4.2.4.2. Mints

1. Account Multi-validator

• Redeemer: RemoveAccount

· Value:



- ► -1 Account NFT Asset
- ► -1 Reference NFT Asset

4.2.4.3. Outputs

1. Subscriber UTx0

- · Address: Subscriber wallet address
- · Value:
 - Minimum ADA (remaining after burning the NFT)

4.3. Payment Multi-validator

4.3.1. Mint :: InitiateSubscription

This transaction occurs when a Subscriber locks funds in the Payment validator script address.

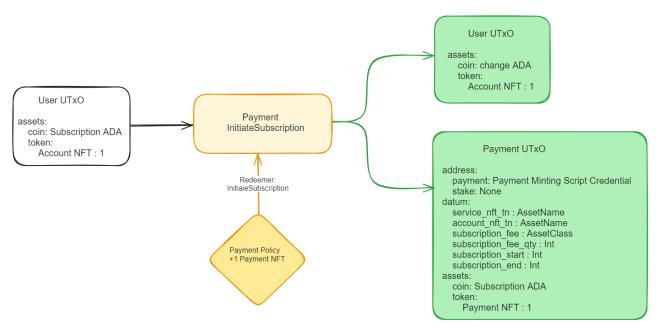


Figure 10: Initiate Subscription UTxO diagram

4.3.1.1. Inputs

1. Subscriber Wallet UTx0

- · Address: Subscriber's wallet address
- Value:
 - ▶ 100 ADA: Amount of ADA to Add to the Payment Contract.



► 1 Account NFT Asset

4.3.1.2. Outputs

1. Subscriber Wallet UTx0

· Address: Subscriber's wallet address

• Value:

► Change ADA

▶ 1 Account NFT Asset

2. Payment Validator UTx0

· Address: Payment validator script address

• Datum:

▶ payment datum as listed in Section 3.3.1.4.1

Value:

▶ 100 ADA: Subscription funds to be withdrawn by merchant

▶ 1 Payment NFT Asset

4.3.2. Spend :: Extend

This transaction allows anyone to extend their subscription period by adding more funds to the Payment contract to cover additional time.

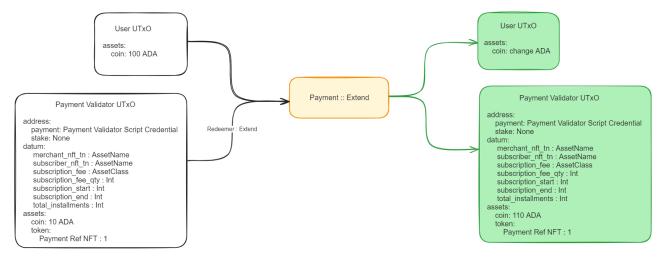


Figure 11: Extend Plan UTxO diagram

4.3.2.1. Inputs



1. Subscriber Wallet UTx0

- · Address: Subscriber's wallet address
- Value:
 - ▶ 100 ADA: Amount of ADA to Add to the Contract to extend the payment plan

2. Payment Validator UTx0

- · Address: Payment validator script address
- Datum:
 - ▶ datum listed in Section 3.3.1.4.1
- Value:
 - ► 10 ADA: Original amount of ADA before Extending
 - ▶ 1 Payment NFT Asset

4.3.2.2. Outputs

1. Subscriber Wallet UTx0

- · Address: Subscriber's wallet address
- Value:
 - ► -100 ADA

2. Payment Validator UTx0

- · Address: Payment validator script address
- Datum:
 - datum listed in Section 3.3.1.4.1
- Value:
 - ▶ 110 ADA: Increased ADA to cover the extended subscription period
 - ▶ 1 Payment NFT Asset

4.3.3. Spend :: Unsubscribe

This transaction allows the owner of an Account NFT to unsubscribe from a particular service by spending a Payment UTxO, unlocking the remaining pre-paid subscription fee to their own wallet address and creating a Penalty UTxO.



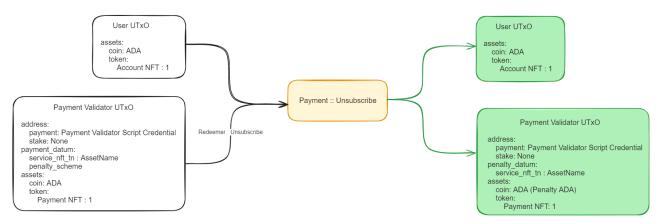


Figure 12: Unsubscribe UTxO diagram

4.3.3.1. Inputs

1. Subscriber Wallet UTx0

- · Address: Subscriber's wallet address
- Value:
 - Minimum ADA
 - ▶ 1 Account NFT Asset

2. Payment Validator UTx0

- · Address: Payment validator script address
- Datum:
 - current_datum: Current metadata for the service
- Value:
 - Minimum ADA
 - ► Reference NFT Asset

4.3.3.2. Outputs

1. Subscriber Wallet UTx0

- · Address: Subscriber's wallet address
- Value:
 - ► Minimum ADA
 - Unspent portion of the subscription fee (minus any penalties)
 - ▶ 1 Account Token Asset



2. Payment Validator UTx0

- Address: Payment validator script address
- Datum:
 - penalty_datum: Metadata indicating the penalty for early unsubscription
- Value:
 - Penalty ADA
 - ▶ Reference NFT Asset

4.3.4. Spend :: Withdraw

This transaction allows anyone with a Merchant NFT to unlock subscription funds from the Payment UTxO in repect to the specified subscription start and end dates.

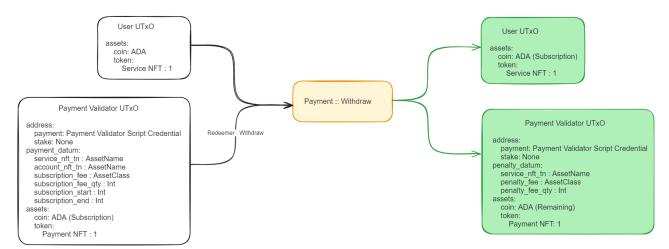


Figure 13: Merchant Withdraw UTxO diagram

4.3.4.1. Inputs:

1. Merchant Wallet UTx0

- Address: Merchant's wallet address
- Value:
 - Minimum ADA
 - ▶ 1 Service NFT Asset

2. Payment Validator UTx0

• Address: Payment validator script address



- Datum:
 - ► service-nft-tn: Service AssetName
- Value:
 - Minimum ADA
 - ▶ 1 Payment NFT Asset

4.3.4.2. Outputs:

+ Merchant Wallet UTx0

- · Address: Merchant's wallet address
- Value:
 - Minimum ADA
 - Withdrawn subscription fee for the installment
 - ▶ 1 Service NFT Asset

1. Payment Validator UTx0

- Address: Payment validator script address
- Datum:
 - updated_datum: Metadata reflecting the withdrawal
- Value:
 - Remaining ADA after withdrawal
 - ▶ 1 Payment NFT Asset

4.3.5. Spend :: Penalty Withdraw

This transaction allows anyone with a Service NFT to unlock penalty funds associated to the service from the Penalty UTxO, in turn burning the Payment NFT attached to the UTxO.



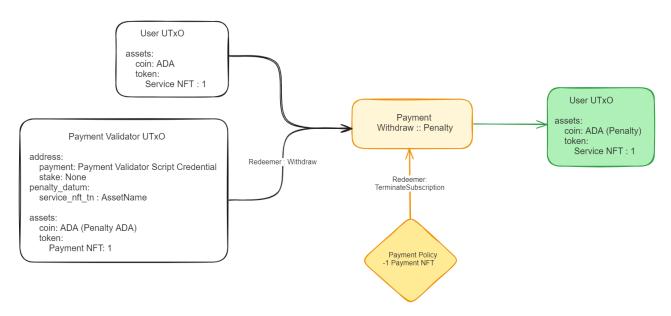


Figure 14: Penalty Withdraw UTx0 diagram

4.3.5.1. Inputs:

1. Merchant Wallet UTx0

- · Address: Merchant's wallet address
- Value:
 - Minimum ADA
 - Service NFT Asset

2. Payment Validator UTx0

- · Address: Payment validator script address
- Penalty Datum:
 - ► service-nft-tn: Service AssetName
- Value:
 - Minimum ADA
 - Payment NFT Asset

4.3.5.2. Outputs:

1. Merchant Wallet UTx0

- · Address: Merchant's wallet address
- Value:



- Minimum ADA
- Withdrawn subscription fee for the installment
- Service NFT Asset

2. Payment Validator UTx0

- Address: Payment validator script address
- Datum:
 - updated_datum: Metadata reflecting the withdrawal
- Value:
 - Remaining ADA after withdrawal
 - ► Payment NFT Asset