



BERKELEY INITIATIVE FOR TRANSPARENCY  
IN THE SOCIAL SCIENCES

Reproducible  
Coding  
Strategies

Christensen

Principles

General  
Coding  
Suggestions

Stata  
Suggestions

# Reproducible Coding Strategies

Garret Christensen<sup>1</sup>

<sup>1</sup>UC Berkeley:

Berkeley Initiative for Transparency in the Social Sciences  
Berkeley Institute for Data Science

IDB, March 2018

Slides available online at

<http://www.github.com/BITSS/IDBMarch2018>



# Outline

BERKELEY INITIATIVE FOR TRANSPARENCY  
IN THE SOCIAL SCIENCES

Reproducible  
Coding  
Strategies

Christensen

Principles

General  
Coding  
Suggestions

Stata  
Suggestions

## 1 Principles

## 2 General Coding Suggestions

## 3 Stata Suggestions



BERKELEY INITIATIVE FOR TRANSPARENCY  
IN THE SOCIAL SCIENCES

## The Claerbout Principle:

*“An article about computational science in a scientific publication is not the scholarship itself, it is merely advertising of the scholarship. The actual scholarship is the complete software development environment and the complete set of instructions which generated the figures.”*

*(Buckheit & Donoho, 1995)*



# Organizing Principles

Reproducible  
Coding  
Strategies

Christensen


Principles

General  
Coding  
Suggestions

Stata  
Suggestions

- 1 Use code (scripts), don't work by hand (Excel/spreadsheet, GUIs).
- 2 Consider not saving statistical output, and just saving the code and raw data that generates it.
- 3 Reproducibility—on your own machine across multiple runs, across machines, across researchers.

## Begin with a logical file structure

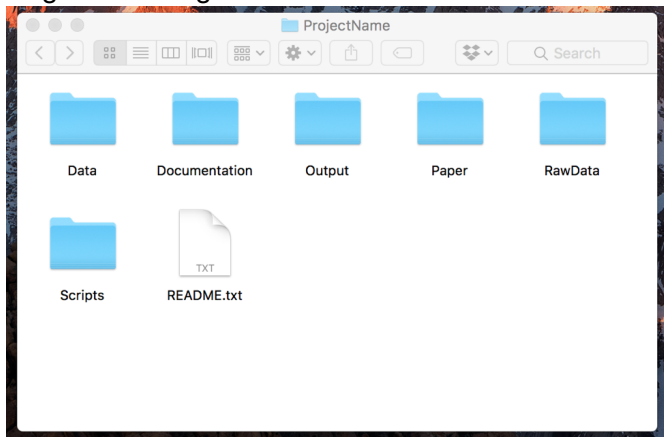



# General Coding Suggestions

Reproducible  
Coding  
Strategies

Christensen

Principles

General  
Coding  
Suggestions

Stata  
Suggestions

- Make sure script files are self-contained: don't write code that only works if you run a group of other files previously in a specific order and then leave things hanging precariously.
- Include tests in your code. This can alert you if output changes.
- You can never comment your code too much. Truly explain rather than transliterating: `x=1` as "initialize the population count to 1" or "set x equal to 1."
- Indent your code.



BITSS

BERKELEY INITIATIVE FOR TRANSPARENCY  
IN THE SOCIAL SCIENCES

# General Coding Suggestions II

Reproducible  
Coding  
Strategies

Christensen

Principles

General  
Coding  
Suggestions

Stata  
Suggestions

- Once posted, any changes at all require a new file name. Better: use version control.
- Separate your data cleaning and analysis files. Don't make any new variables that need saving (or will be used by multiple analysis files) in an analysis file. It is far better to only create a variable once so you know that it is identical when used in different analysis files.



- Name variables informatively: pick a side for indicator variables “dead” (or “living”) instead of “status”. (gender, race, etc.)
- Don’t leave clutter around-delete temporary or unnecessary intermediate objects.
- You can use a prefix such as `x_` or `temp_` so you know which files or variables can easily be deleted later. Stata also has the `tempfile` and `tempvar` functionality.
- Every variable should have a label. (If allowed for by the program.)
- Use relative directory paths (such as “./Data” not “C:/Users/garret/Documents/Project/Data”)



BERKELEY INITIATIVE FOR TRANSPARENCY  
IN THE SOCIAL SCIENCES

# Stata Suggestions

Reproducible  
Coding  
Strategies

Christensen

Principles

General  
Coding  
Suggestions

Stata  
Suggestions

- Accurately and concisely capture missing values. (‘.’ and ‘.a-.z’)
- Make sure code always produces the same result, and that merging and sorting is reproducible. ‘duplicates report; isid; sort, stable’
- Run tests to alert yourself when results change.



BITSS

BERKELEY INITIATIVE FOR TRANSPARENCY  
IN THE SOCIAL SCIENCES

# Example Test

Reproducible  
Coding  
Strategies

Christensen

Principles

General  
Coding  
Suggestions

Stata  
Suggestions

```
count if _merge!=3
if r(N)!=74 {
display "Unmatched observations changed!"
there is an error here
}
```

- Don't use abbreviations for variables, or commands beyond reason
- Use global macros to define directory paths so collaborators can readily work across different computers.
- Use local macros for varlists.



BITSS

BERKELEY INITIATIVE FOR TRANSPARENCY  
IN THE SOCIAL SCIENCES

# Stata Suggestions

Reproducible  
Coding  
Strategies

Christensen

Principles

General  
Coding  
Suggestions

Stata  
Suggestions

- Use computer-stored versions of numerical output (eg 'r(mean)'). Use 'return list' and 'ereturn list'
- If you have a master .do file that calls other .do files, which each have their own .log file capturing output, you can run multiple log files at the same time (so you end up with a master .log file)
- Use the 'label data' and 'notes'.
- Use the 'notes' command for variables as well for identifying information that is too long for the variable label.

# Stata Suggestions

Reproducible  
Coding  
Strategies

Christensen

Principles

General  
Coding  
Suggestions

Stata  
Suggestions

- Validate data sources to ensure consistency. Use ‘datasignature’ on auto data set (‘sysuse auto.dta’, then ‘datasignature set’ should give you this number: ‘74:12(71728):3831085005:1395876116’)
- Use value labels for all categorical variables. ‘numlabel [lblname-list], add command.’
- Don’t use capital letters in variable names.
- Make your files as non-proprietary as possible (use the ‘saveold’ command)



BERKELEY INITIATIVE FOR TRANSPARENCY  
IN THE SOCIAL SCIENCES

Reproducible  
Coding  
Strategies

Christensen

Principles

General  
Coding  
Suggestions

Stata  
Suggestions

Questions?

Thank you!