

04_The-Current-Ethernet-Specifications

EUAD04_Ethernet-Specs

Training Clarusway

Pear Deck - August 20, 2020 at 5:11PM

Part 1 - Summary

Use this space to summarize your thoughts on the lesson

Part 2 - Responses

Slide 1

 The Ethernet Specifications

CLARUSWAY®
WE'VE GOT YOU COVERED



Use this space to take notes:

Slide 2

Table of Contents



- ▶ Ethernet Basics
- ▶ Ethernet as the Data Link Layer

CLARUSWAY®
WAY TO PERFORM YOURSELF



Use this space to take notes:

Slide 3



Ethernet Basics

Ethernet
Collision Domain
Broadcast Domain
CSMA/CD
Broadband/Baseband

CLARUSWAY®
WAY TO PERFORM YOURSELF

Use this space to take notes:

Slide 4

► Ethernet Basics



Ethernet

- The technology for connecting devices in a network
- Describes how network devices can format and transmit data
- Uses both Data Link and Physical layer specifications
- Electrical and Electronics Engineers (IEEE) defines Ethernet as protocol 802.3

CLARUSWAY®
WAY TO REINVENT YOURSELF



Use this space to take notes:

Slide 5

► Ethernet Basics



Ethernet

Bandwidth	Common Name	Informal name	IEEE name	Cable Type
10 Mbps	Ethernet	10Base-T	802.3	UTP 100m
100 Mbps	Fast Ethernet	100Base-T	802.3u	UTP 100m
1000 Mbps	Gigabit Ethernet	1000Base-LX	802.3z	Fiber 5000m
1000 Mbps	Gigabit Ethernet	1000Base-T	802.3ab	UTP 100m
10 Gbps	10 Gigabit Ethernet	10GBase-T	802.3an	UTP 100m

CLARUSWAY®
WAY TO REINVENT YOURSELF



Use this space to take notes:

Slide 6

► Ethernet Basics



Collision Domain

The term collision domain is used to describe a part of a network where packet collisions can occur

Collisions occur when two devices on a shared network segment send packets simultaneously

The colliding packets must be discarded and sent again, which reduces network efficiency

CLARUSWAY®
DON'T TRY TO REINVENT YOURSELF



Use this space to take notes:


Slide 7

► Ethernet Basics



Collision Domain

Occurs often in a hub environment

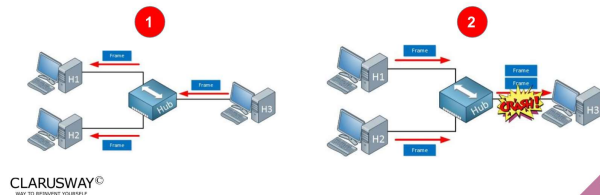

CLARUSWAY®
DON'T TRY TO REINVENT YOURSELF




Use this space to take notes:

Slide 8

► Ethernet Basics

Broadcast Domain

A broadcast domain is a collection of network devices that receive broadcast traffic from each other

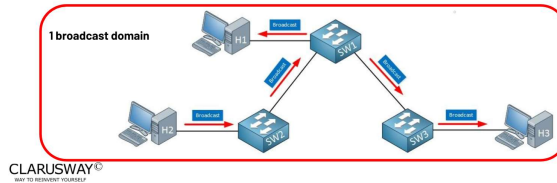


Use this space to take notes:

Slide 9

► Ethernet Basics

Broadcast Domain

The more broadcast domains the more efficient network

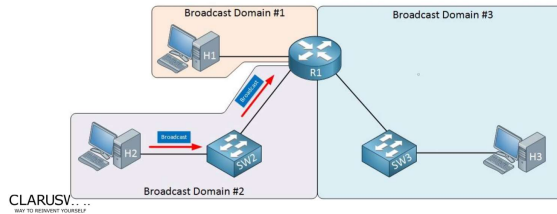

Use this space to take notes:

Slide 10

► Ethernet Basics

CSMA/CD

- Carrier Sense Multiple Access/Collision Detection is the protocol that is used to detect collisions and to re-transmit frames
- Only **bridges**, **switches**, and **routers**, but not **hubs**, can effectively prevent a transmission from propagating throughout the entire network

CLARUSWAY®
WAY TO PROGRESS YOURSELF



Use this space to take notes:


Slide 11

► Ethernet Basics

Broadband/Baseband

- Baseband
 - Uses digital signals and single channel
 - Communication is bidirectional
 - Short distance
- Broadband
 - Uses analog signals
 - Multiple transmissions are possible
 - Communication is unidirectional
 - Long distance

CLARUSWAY®
WAY TO PROGRESS YOURSELF




Use this space to take notes:

Slide 12

► Ethernet Basics

Broadband/Baseband

If you are using a broadband internet connection for your home internet, the signals from your ISP up to your broadband router are broadband signals. But, the signals used inside your Ethernet LAN are baseband signals.

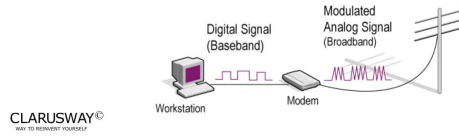

Use this space to take notes:

Slide 13

2

Ethernet at the Data Link Layer

Binary to Decimal and Hexadecimal Conversion
Ethernet Addressing
Ethernet Frames
Ethernet II Frames

CLARUSWAY®
WAY TO REINVENT YOURSELF

Use this space to take notes:

Slide 14

► Ethernet at the Data Link Layer »

Binary to Decimal and Hexadecimal Conversion

- Ethernet at the Data Link layer is responsible for:
 - **Ethernet addressing** (hardware or MAC addressing)
 - **framing packets** received from the Network layer
- Ethernet MAC addresses are made up of hexadecimal addresses

CLARUSWAY®
WAY TO REMEMBER YOURSELF



Use this space to take notes:

Slide 15

► Ethernet at the Data Link Layer »

Binary to Decimal and Hexadecimal Conversion



CLARUSWAY®
WAY TO REMEMBER YOURSELF



Use this space to take notes:

Slide 16

► Ethernet at the Data Link Layer



Binary to Decimal Conversion

Binary Value	Decimal Value
10000000	128
11000000	192
11100000	224
11110000	240
11111000	248
11111100	252
11111110	254
11111111	255

CLARUSWAY®
WAY TO PROGRESS YOURSELF



Use this space to take notes:

Slide 17

► Ethernet at the Data Link Layer



Binary to Decimal and Hexadecimal Conversion

Binary Value	Hexadecimal Value	Decimal Value
0000	0	0
0001	1	1
0010	2	2
0011	3	3
0100	4	4
0101	5	5
0110	6	6
0111	7	7

CLARUSWAY®
WAY TO PROGRESS YOURSELF

Binary Value	Hexadecimal Value	Decimal Value
1000	8	8
1001	9	9
1010	A	10
1011	B	11
1100	C	12
1101	D	13
1110	E	14
1111	F	15



Use this space to take notes:

Slide 18

► Ethernet at the Data Link Layer ►

Binary to Decimal and Hexadecimal Conversion

Example:

What is the binary value of **0x4E** (or **4Eh**)?


(*0x* and *h* means that the value is hexadecimal or hex)

binary: **4 = 0100**
E = 1110 → **01001110**

CLARUSWAY®
WAY TO REINVENT YOURSELF



Use this space to take notes:

Slide 19	Your Response
<div><h3>Ethernet at the Data Link Layer</h3><h4>Binary to Decimal and Hexadecimal Conversion</h4><p>What is the binary value of 27h? <input type="text"/></p><p> Students, write your response!</p><p><small>Peer Deck Interactive Slide You can interact with this slide</small></p></div>	<p>Answer 1: 00100111</p>

Use this space to take notes:

Slide 20	Your Response
	<p>Answer 1: 1111 1001</p>

Ethernet at the Data Link Layer

Binary to Decimal and Hexadecimal Conversion

What is the binary value of **0xF9**?



Students, write your response!

Peer Deck Interactive Slide
Do not remove this bar

Use this space to take notes:

Slide 21

► Ethernet at the Data Link Layer ►

Ethernet Addressing

- MAC (Media Access Control) Address
 - 48-bit (6 bytes or 12-digit hex) hardware number
 - unique
 - embedded into the network card, not changeable
 - represented as **00:1A:3F:D3:2C:11** or **00-1A-3F-D3-2C-11**



CLARUSWAY®
HELP TO REINVENT YOURSELF

Organizational Unique Identifier (OUI) Network Interface Controller Specific




Use this space to take notes:

Slide 22

► Ethernet at the Data Link Layer

Types of MAC Address

1. Unicast:
 - A specific NIC on the network
 - Only one sender and only one receiver



CLARUSWAY®
WAY TO PROGRESS YOURSELF

22


Use this space to take notes:

Slide 23

► Ethernet at the Data Link Layer

Types of MAC Address

2. Multicast:
 - A group of receivers
 - OUI is **01:00:5E**



CLARUSWAY®
WAY TO PROGRESS YOURSELF

23

Use this space to take notes:


Slide 24

► Ethernet at the Data Link Layer »

Types of MAC Address

3. Broadcast:

- All devices on the network are recipients
- MAC Address is:
FF:FF:FF:FF:FF:FF

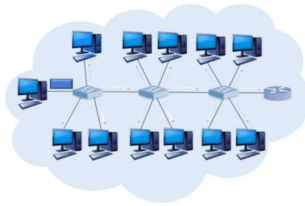

CLARUSWAY®
WAY TO REMEMBER YOURSELF

24


Use this space to take notes:

Slide 25

► Ethernet at the Data Link Layer »

Ethernet Frames

- Encapsulated data defined by the Network Access layer is called an Ethernet frame
- The Ethernet frame structure is defined in the IEEE 802.3 standard

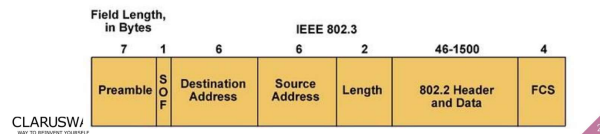

CLARUSWAY®
WAY TO REMEMBER YOURSELF

25

Use this space to take notes:

Slide 26

THANKS!

Any questions?

You can find me at:

- ▶ @David - Instructor
- ▶ david@clarusway.com

CLARUSWAY®
WAY TO KNOWLEDGE™ YOURSELF



Use this space to take notes:

