

Assignment # 1(Theory Of Automata)

Zaeem Yousaf (19L-1196 5C)

Teacher: Sobia Tariq

Contents


1	Problem 1	1
1.1	L1	1
1.1.1	L1 solution	2
1.2	L4	2
1.2.1	L4 solution	3
2	Problem 2	3
2.1	2b/L1	3
2.1.1	2b/L1 Solution	4
2.2	2b/L2	4
2.2.1	2b/L2 Solution	5
2.3	2b/L4	5
2.4	Run DFA	6
2.4.1	Rules of Extended transitions	7

1 Problem 1

1.1 L1

L1: The language of all strings containing even number of a's and each a is followed by at least one b.


1.1.1 L1 solution

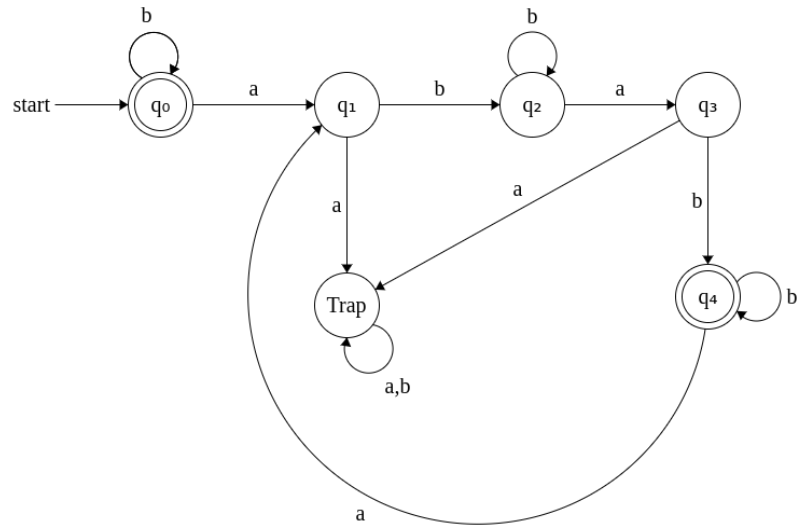

1.2 L4

The language of all strings containing no more than one occurrence of the string aa. (the string aaa should be viewed as containing 2 occurrences of aa)

1.2.1 L4 solution

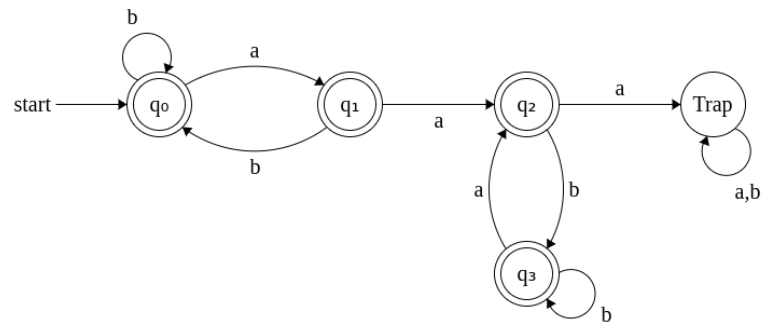


2 Problem 2

2.1 2b/L1

strings over $\{0,1\}$ such that their decimal equivalent is multiple of 5 Eg: $\{0, 101, 1010, \dots\}$


2.1.1 2b/L1 Solution

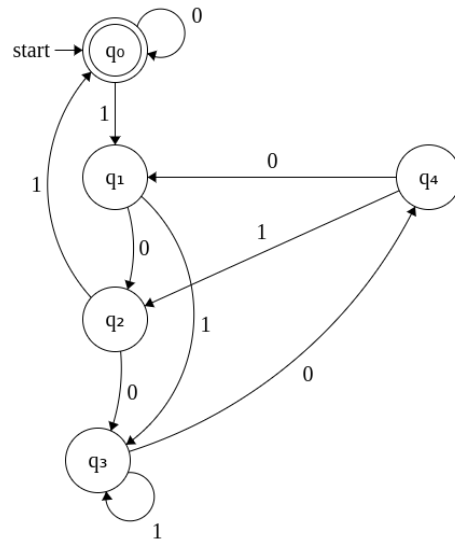

2.2 2b/L2


all strings over $\{0,1\}$ that start with 0 and end with 010 and do not have 000 as part of a string.

2.2.1 2b/L2 Solution

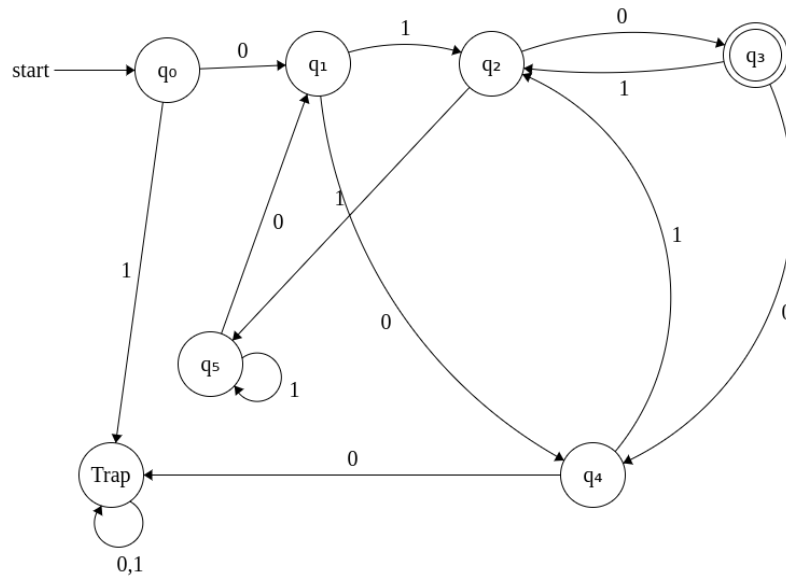


2.3 2b/L4

all the string x in which $n_0(x) \% 3 = 0$ and $n_1(x) \% 3 = 0$

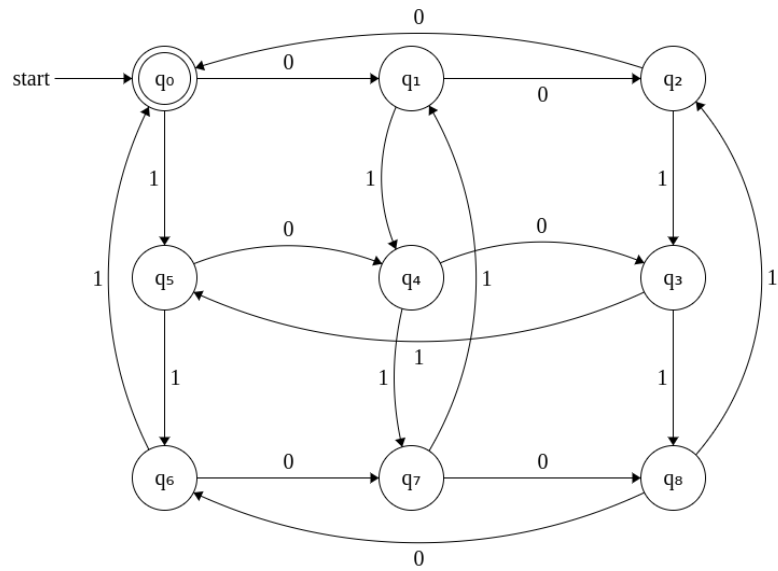

2.4 Run DFA

Run DFA of L1 of problem 2 for following strings, and answer which ones are accepted and which are rejected {000111, 101000, 10110100,0000100000}

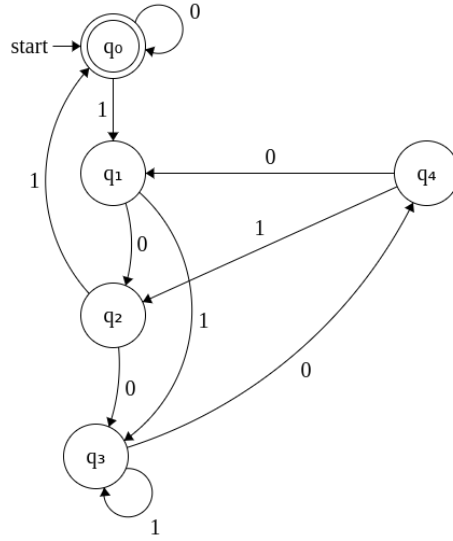

2.4.1 Rules of Extended transitions

- 1: $\delta^*(q, \wedge) \rightarrow q$
- 2: $\delta^*(q, xa) \rightarrow \delta(\delta^*(q, x), a)$
- 3: $\delta^*(q, xy) \rightarrow \delta^*(\delta^*(q, x), y)$

1. $\delta^*(q_0, 000111)$
 using rule 1
 $\delta(\delta^*(q_0, 00011), 1)$
 $\delta(\delta(\delta^*(q_0, 0001), 1), 1)$
 $\delta(\delta(\delta(\delta^*(q_0, 000), 1), 1), 1)$
 $\delta(\delta(\delta(\delta(\delta^*(q_0, 00), 0), 1), 1), 1)$
 $\delta(\delta(\delta(\delta(\delta(\delta^*(q_0, 0), 0), 0), 1), 1), 1)$
 $\delta(\delta(\delta(\delta(\delta(q_0, 0), 0), 1), 1), 1)$
 $\delta(\delta(\delta(\delta(q_0, 0), 1), 1), 1)$
 $\delta(\delta(\delta(q_0, 1), 1), 1)$
 $\delta(\delta(q_1, 1), 1)$
 $\delta(q_3, 1)$

q_3 is not final state (hence rejected)

2. $\delta^*(q_0, 101000)$

using rule 1

$\delta(\delta^*(q_0, 10100), 0)$

$\delta(\delta(\delta^*(q_0, 1010), 0), 0)$

$\delta(\delta(\delta(\delta^*(q_0, 101), 0), 0), 0)$

$\delta(\delta(\delta(\delta(\delta^*(q_0, 10), 1), 0), 0), 0), 0)$

$\delta(\delta(\delta(\delta(\delta(\delta^*(q_0, 1), 0), 1), 0), 0), 0), 0)$

$\delta(\delta(\delta(\delta(\delta(q_1, 0), 1), 0), 0), 0), 0)$

$\delta(\delta(\delta(\delta(q_2, 1), 0), 0), 0), 0)$

$\delta(\delta(\delta(q_0, 0), 0), 0), 0)$

$\delta(\delta(q_0, 0), 0)$

$\delta(q_0, 0)$

q_0 is final state (hence accepted)

3. $\delta^*(q_0, 10110100)$

using rule 1

$\delta(\delta^*(q_0, 1011010), 0)$

$\delta(\delta(\delta^*(q_0, 101101), 0), 0)$

$\delta(\delta(\delta(\delta^*(q_0, 10110), 1), 0), 0)$

$\delta(\delta(\delta(\delta(\delta^*(q_0, 1011), 0), 1), 0), 0), 0)$

$\delta(\delta(\delta(\delta(\delta(\delta^*(q_0, 101), 1), 0), 1), 0), 0), 0)$

$\delta(\delta(\delta(\delta(\delta(\delta(\delta^*(q_0, 10), 1), 1), 0), 1), 0), 0), 0)$

$\delta(\delta(\delta(\delta(\delta(\delta(\delta(\delta^*(q_0, 1), 0), 1), 1), 0), 1), 0), 0), 0)$

$\delta(\delta(\delta(\delta(\delta(\delta(\delta(q_1, 0), 1), 1), 0), 1), 0), 0), 0)$

$\delta(\delta(\delta(\delta(\delta(\delta(q_2, 1), 1), 0), 1), 0), 0), 0)$

$\delta(\delta(\delta(\delta(\delta(q_0, 1), 0), 1), 0), 0), 0)$

$\delta(\delta(\delta(\delta(q_1, 0), 1), 0), 0), 0)$

$\delta(\delta(\delta(q_2, 1), 0), 0), 0)$

$\delta(\delta(q_2, 0), 0), 0)$

$\delta(q_0, 0)$

q_0 is final state (hence accepted)

4. $\delta^*(q_0, 0000100000)$
 using rule 1
 $\delta(\delta^*(q_0, 000010000), 0)$
 $\delta(\delta(\delta^*(q_0, 00001000), 0), 0)$
 $\delta(\delta(\delta(\delta^*(q_0, 0000100), 0), 0), 0)$
 $\delta(\delta(\delta(\delta(\delta^*(q_0, 000010), 0), 0), 0), 0)$
 $\delta(\delta(\delta(\delta(\delta(\delta^*(q_0, 00001), 0), 0), 0), 0), 0)$
 $\delta(\delta(\delta(\delta(\delta(\delta(\delta^*(q_0, 0000), 1), 0), 0), 0), 0), 0)$
 $\delta(\delta(\delta(\delta(\delta(\delta(\delta(\delta^*(q_0, 000), 0), 1), 0), 0), 0), 0), 0)$
 $\delta(\delta(\delta(\delta(\delta(\delta(\delta(\delta(\delta^*(q_0, 00), 0), 0), 1), 0), 0), 0), 0), 0)$
 $\delta(\delta(\delta(\delta(\delta(\delta(\delta(\delta(\delta(\delta^*(q_0, 0), 0), 0), 0), 1), 0), 0), 0), 0), 0)$
 $\delta(\delta(\delta(\delta(\delta(\delta(\delta(\delta(\delta(\delta(\delta^*(q_0, 0), 0), 0), 0), 1), 0), 0), 0), 0), 0)$
 $\delta(\delta(\delta(\delta(\delta(\delta(\delta(\delta(\delta(\delta(\delta(\delta^*(q_0, 0), 0), 0), 0), 1), 0), 0), 0), 0), 0)$
 $\delta(\delta(\delta(\delta(\delta(\delta(\delta(\delta(\delta(\delta(\delta(\delta(\delta^*(q_0, 0), 0), 0), 0), 1), 0), 0), 0), 0), 0)$
 $\delta(\delta(\delta(\delta(\delta(\delta(\delta(\delta(\delta(\delta(\delta(\delta(\delta(\delta^*(q_0, 1), 0), 0), 0), 0), 0), 0), 0)$
 $\delta(\delta(\delta(\delta(\delta(q_1, 0), 0), 0), 0), 0)$
 $\delta(\delta(\delta(q_2, 0), 0), 0), 0)$
 $\delta(\delta(\delta(q_3, 0), 0), 0)$
 $\delta(\delta(q_4, 0), 0)$
 $\delta(q_1, 0)$
 q_2 is not final state, (hence rejected)

Table 1: Summary of Dry Run;		
strings	status	Reason
000111	Rejected	q_3 is not final state
101000	Accepted	q_0 is final state
10110100	Accepted	q_0 is final state
0000100000	Rejected	q_2 is not final state