

# Assignment # 1( Theory Of Automata)

Zaeem Yousaf (19L-1196 5C)

Teacher: Sobia Tariq

## Contents


<b>1</b>	<b>Problem 1</b>	<b>1</b>
1.1	L1 . . . . .	1
	1.1.1 L1 solution . . . . .	2
1.2	L4 . . . . .	2
	1.2.1 L4 solution . . . . .	3
<b>2</b>	<b>Problem 2</b>	<b>4</b>
2.1	2b/L1 . . . . .	4
	2.1.1 2b/L1 Solution . . . . .	4
2.2	2b/L2 . . . . .	4
	2.2.1 2b/L2 Solution . . . . .	5
2.3	2b/L4 . . . . .	5
2.4	Run DFA . . . . .	6

## 1 Problem 1

### 1.1 L1

L1: The language of all strings containing even number of a's and each a is followed by at least one b.


### 1.1.1 L1 solution

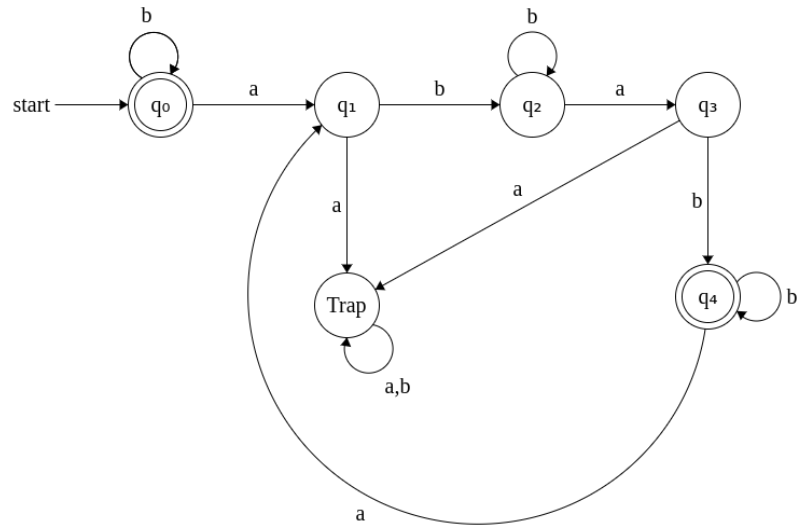

## 1.2 L4


The language of all strings containing no more than one occurrence of the string aa. (the string aaa should be viewed as containing 2 occurrences of aa)

Let L is the string which contains occurrence of aa more than once

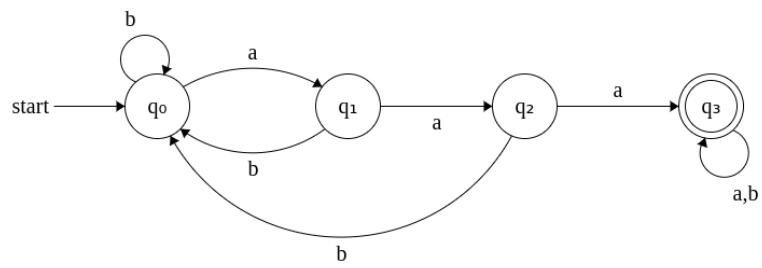

Now  $L4 = L - L'$

### 1.2.1 L4 solution

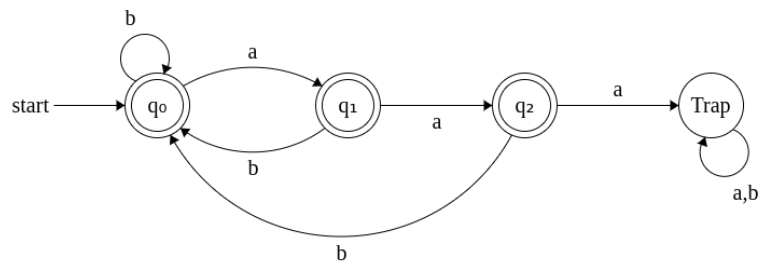


## 2 Problem 2

### 2.1 2b/L1

strings over  $\{0,1\}$  such that their decimal equivalent is multiple of 5 Eg:  $\{0, 101, 1010, \dots\}$


#### 2.1.1 2b/L1 Solution

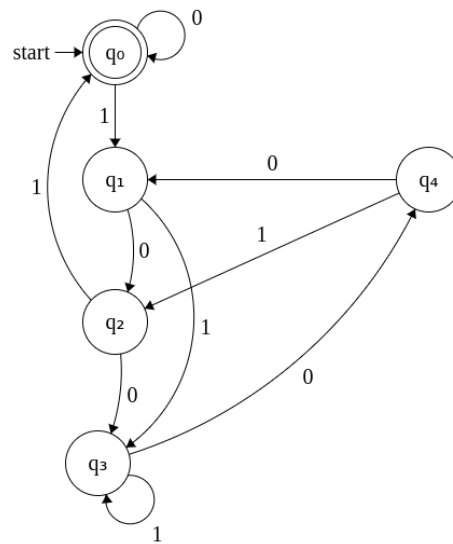

### 2.2 2b/L2


all strings over  $\{0,1\}$  that start with 0 and end with 010 and do not have 000 as part of a string.

### 2.2.1 2b/L2 Solution

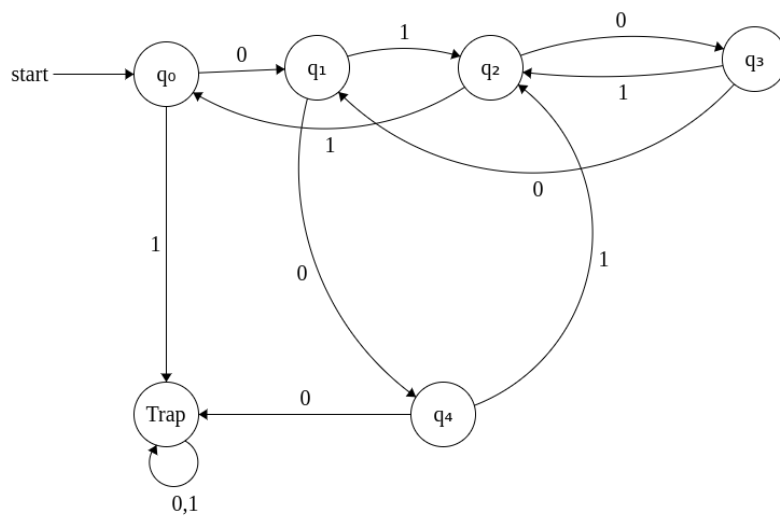

### 2.3 2b/L4

all the string  $x$  in which  $n_0(x) \% 3 = 0$  and  $n_1(x) \% 3 = 0$

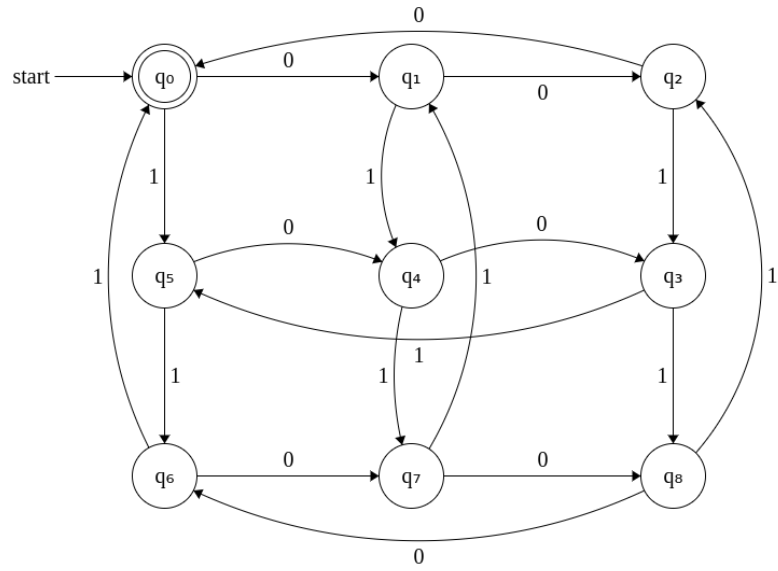

## 2.4 Run DFA

Run DFA of L1 of problem 2 for following strings, and answer which ones are accepted and which are rejected {000111, 101000, 10110100, 0000100000}

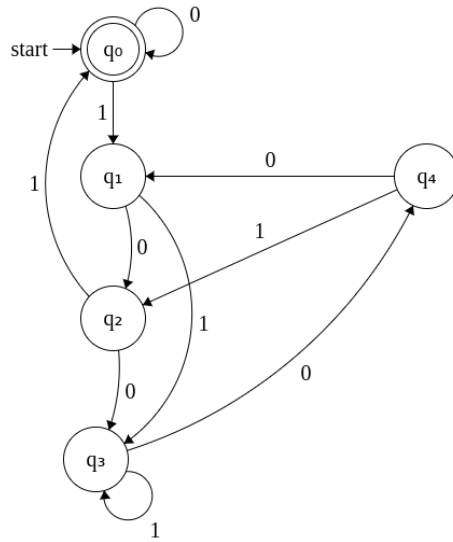


Table 1: Dry Run

strings	status	Reason
000111	Rejected	$q_3$ is not final state
101000	Accepted	$q_0$ is final state
10110100	Accepted	$q_0$ is final state
0000100000	Rejected	$q_2$ is not final state