

HDC-RWKV (nb12c) — Full Architecture Expansion

V=256, d=256, L=1, block size 16 • 16,434 deployment bytes • every learnable parameter bipolar at inference

Block 1. Token lookup — bipolar embedding table

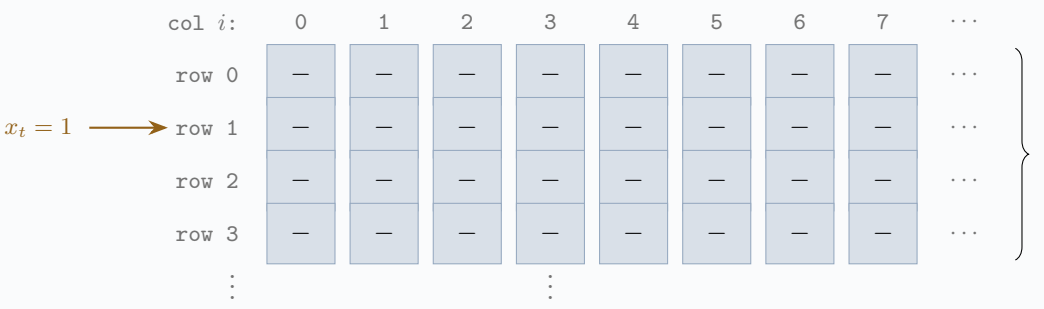


Block 2. Position binding ρ^t (cyclic right-rotation)

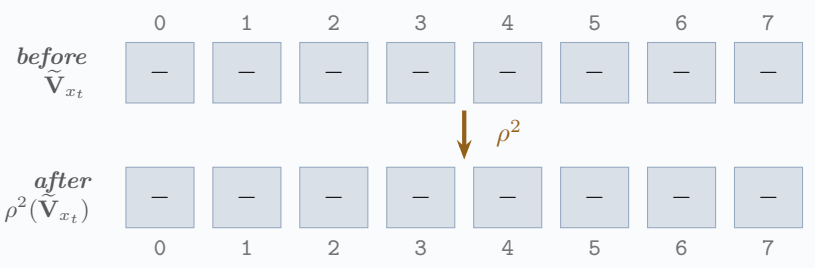

Cell at index j takes value from index $(j - t) \bmod d$.
Different positions produce orthogonal versions of the same token.

$\rho^t(\mathbf{h})_j = \mathbf{h}_{(j-t) \bmod d}$
(parameter-free, preserves $\{-1,+1\}^d$)


Block 3a. Recurrence — per-channel detail at one timestep t

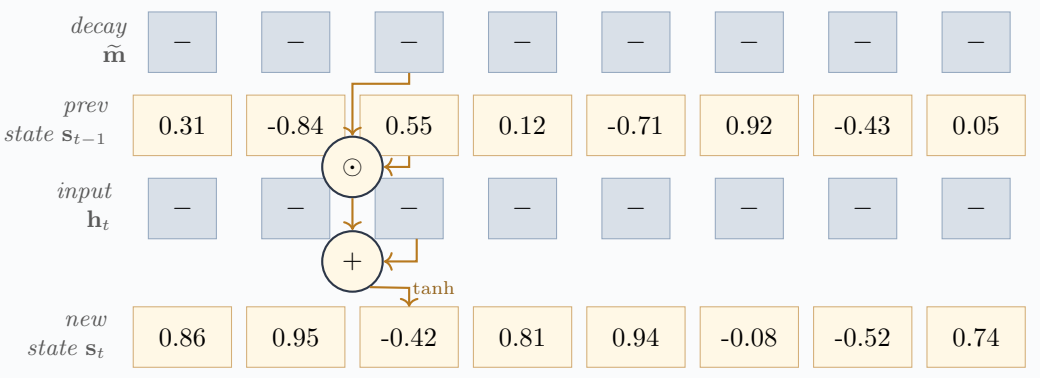

channel i=2:
$\widetilde{m}_2 s_{t-1,2} + h_{t,2}$
$= (+1)(0.55) + (-1)$
$= -0.45$
$\tanh(-0.45) \approx -0.42$


$$\mathbf{s}_t = \tanh(\widetilde{\mathbf{m}} \odot \mathbf{s}_{t-1} + \mathbf{h}_t) \quad \textit{(one channel at a time)}$$

Block 3b. Recurrence — unrolled across time

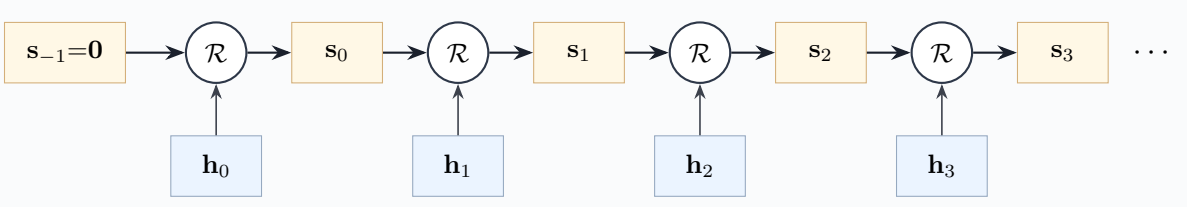


$$\mathcal{R}(\mathbf{s}_{t-1}, \mathbf{h}_t) = \tanh(\widetilde{\mathbf{m}} \odot \mathbf{s}_{t-1} + \mathbf{h}_t) \qquad O(d) \textit{ per step. No attention. No key–value cache.}$$

Block 4a. Prototype-similarity output — one dot product per vocabulary item

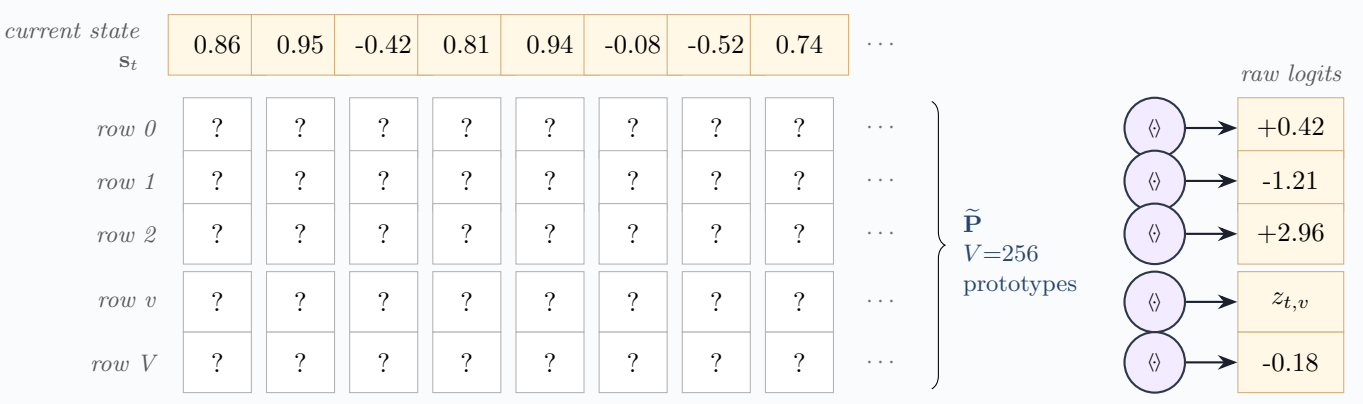


Block 4b. Temperature scaling, softmax, top-k sampling, autoregressive feedback

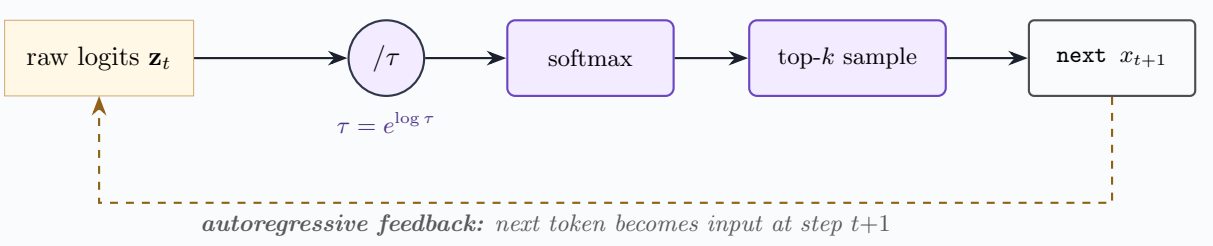


Aux A. Straight-Through Estimator ($\widetilde{\text{sign}}$)

Forward: $y = \text{sign}(x)$

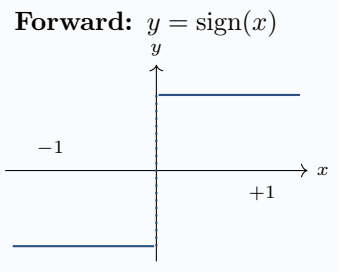

Backward: $\partial y/\partial x = \mathbf{1}[|x| \le 1]$

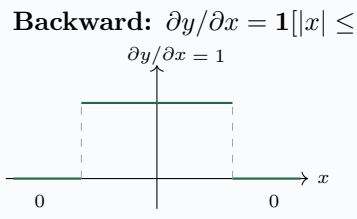

Forward is hard binarisation; backward is identity on the active strip $[-1, 1]$ and zero outside. The continuous shadow $\mathbf{V}$ is updated by backpropagation; the recurrence always sees $\widetilde{\mathbf{V}} \in \{-1,+1\}^{V\times d}$.

Aux B. Deployment equivalent — XOR + popcount

Encode $-1 \mapsto 0$, $+1 \mapsto 1$. Then for $a, b \in \{-1,+1\}^d$:

$$\langle a, b \rangle \;=\; d - 2 \cdot \text{popcount}(\bar{a} \oplus \bar{b}).$$

$\bar{a}$:	1	0	1	1	0	1	0	1
$\bar{b}$:	1	1	1	0	0	1	1	0
$\bar{a} \oplus \bar{b}$:	0	1	0	1	0	0	1	1

popcount = 4
$d - 2 \cdot 4 = 0$
(orthogonal)

The 6502 inner loop: XOR two $d/8$-byte rows, popcount the result, subtract 2·popcount from d. No multiplications, no floating point, no NaN reachable. For d=256: 32 bytes XORed and one popcount lookup per byte.