

Lpu237MSR JPOS MSR Service Object Application Development Guide

November. 2017

Elpusk CO., LTD.

www.elpusk.co.kr

This document explains how to use the Lpu237MSR device in JavaPOS. Lpu237MSR JPOS MSR Service Object is based on Service Version 1.11

For more information on JavaPOS, see <http://www.javapos.com/docs.html> and <http://www.javapos.com/samplecode.html>.

Supported OS :

This device was tested with Windows7, Windows 10

Supported JDK(JVM) version :

Tested at 1.6, 1.7, 1.8

Available Properties, Methods, and Events

An application accesses a JavaPOS Device via the JavaPOS APIs.

The three elements of JavaPOS APIs are:

- **Properties.** Properties are device characteristics or settings. A type is associated with each property, such as **Boolean** or **String**. An application may retrieve a property's value, and it may set a writable property's value.

To read a property value, use the method:

Type **getSampleProperty()** throws **JposException**;

where *Type* is the data type of the property and *SampleProperty* is the property name.

To write a property value (assuming that the property is writable), use the method:

`void setSampleProperty(Type value) throws JposException;`

where *Type* is the data type of the property and *SampleProperty* is the property name.

- **Methods.** An application calls a method to perform or initiate some activity at a device. Some methods require parameters of specified types for sending and/or returning additional information.

A JavaPOS method has the form:

`void sampleMethod(parameters) throws JposException;`

where *sampleMethod* is the method name and *parameters* is a list of zero or more parameters.

- **Events.** A JavaPOS Device may call back into the application via events. The

application must specifically register for each event type that it needs to receive. JavaPOS events conform to the JavaBean event design pattern.

Properties

AutoDisable: boolean { read-write }

CapCompareFirmwareVersion: boolean { read-only } // false

CapPowerReporting: int32 { read-only } // None

CapStatisticsReporting: boolean { read-only } // false

CapUpdateFirmware: boolean { read-only } // false

CapUpdateStatistics: boolean { read-only } //false

CheckHealthText: string { read-only } //None

Claimed: boolean { read-only }

DataCount: int32 { read-only }

DataEventEnabled: boolean { read-write }

DeviceEnabled: boolean { read-write }

FreezeEvents: boolean { read-write }

OutputID: int32 { read-only } // Device is not support

PowerNotify: int32 { read-write } //Disabled

PowerState: int32 { read-only } //Unknown

State: int32 { read-only }

DeviceServiceDescription: string { read-only }

DeviceServiceVersion: int32 { read-only }

PhysicalDeviceDescription: string { read-only }

PhysicalDeviceName: string { read-only }

CapISO: boolean { read-only }

CapJISOne: boolean { read-only } // false

CapJISTwo: boolean { read-only } // false

CapTransmitSentinels: boolean { read-only }

CapWritableTracks: int32 { read-only } //None

AccountNumber: string { read-only }

DecodeData: boolean { read-write }

EncodingMaxLength: int32 { read-only } // 0

ErrorReportingType: int32 { read-write } //

ExpirationDate: string { read-only }

FirstName: string { read-only }

MiddleInitial: string { read-only }

ParseDecodeData: boolean { read-write }

ServiceCode: string { read-only }

Suffix: string { read-only }

Surname: string { read-only }

Title: string { read-only }

Track1Data: binary { read-only }

Track1DiscretionaryData: binary { read-only }

Track2Data: binary { read-only }

Track2DiscretionaryData: binary { read-only }

Track3Data: binary { read-only }

Track4Data: binary { read-only } // Null

TracksToRead: int32 { read-write }

TracksToWrite: int32 { read-write } // Device is not support

TransmitSentinels: boolean { read-write }

Methods

open (logicalDeviceName: string):

close ():

claim(timeout: int32):

release():

checkHealth (level: int32):

clearInput ():

clearInputProperties ():

clearOutput ():

directIO (command: int32, inout data: int32, inout obj: object):

compareFirmwareVersion (firmwareFileName:string, out result: int32): // Device is not support

resetStatistics (statisticsBuffer: string): //// Device is not support

retrieveStatistics (inout statisticsBuffer: string): // Device is not support

updateFirmware (firmwareFileName:string): // Device is not support

updateStatistics (statisticsBuffer: string): // Device is not support

writeTracks (data: array of binary,timeout: int32): // Device is not support


Events

DataEvent(evt,evt_status)


How to install

When you install using Install Program, MSR Service Object for JavaPOS and the Lpu237 device related files are installed.


./javapos :



./javapos /jpolib : Files related to JavaPOS used in Test Sample

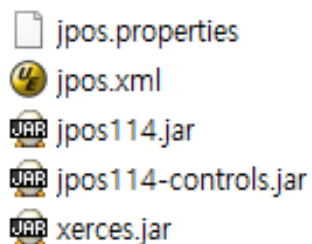

./javapos /lpu237lib : This folder contains the **jposLpu237MsrSO.jar**

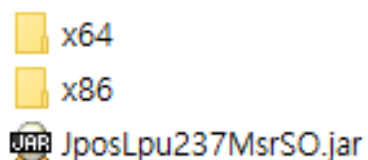

JavaPOS MSR Service Object file and


tg_lpu237_jni.dll or tg_lpu237_dll.dll files

for the x86/x64 computer. The

JposLpu237MsrSO.jar file should be added to the **classpath**. An x86 or x64 folder with tg_lpu237_jni.dll must be registered in

java.library.path. The x86 or x64 folder with **tg_lpu237_dll.dll** is added to the System path by the Install Program.

./javapos /TestSample : This is Msr Sample test program.

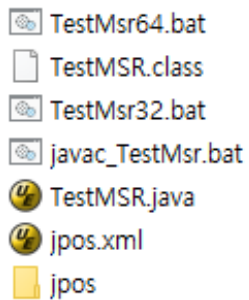

You can run it as TestMsr32.bat or TestMSR64.bat depending on the installed JVM.

How to register Lpu237MSR

We do not support JCL editor in these release , Add the lpu237MSR using the existing JCL editor, or use the xml editor to add the bold section below to the installed javapos **jpos.xml**.

```
<?xml version="1.0" encoding="UTF-8"?>
```

```
<!DOCTYPE JposEntries PUBLIC "-//JavaPOS//DTD//EN"
```

```
"jpos/res/jcl.dtd">
```

```
<JposEntries>
```

```
<JposEntry logicalName="lpu237MSR">
```

```
<creation factoryClass="kr.co.elpusk.javapos.msr.Lpu237ServiceInstanceFactory"
serviceClass="kr.co.elpusk.javapos.msr.Lpu237MSRService"/>
```

```
<vendor name="Elpusk.Co,Ltd." url="http://www.elpusk.co.kr"/>
```

```
<jpos category="MSR" version="1.11"/>
```

```
<product description="LPU237 MSR" name="LPU237 MSR Service for JavaPOS(TM)
Standard" url="http://www.elpusk.co.kr"/>
```

</JposEntry>

</JposEntries>