

NosLog 2.0

Authoritative Design Guide

VERSION 0.1	DATE 2026-08-11	LANGUAGE English
----------------	--------------------	---------------------

This PDF packages the current approved product, page-family, Foundation, reusable UI, and downstream handoff sources. The editable Markdown remains authoritative. The complete existing chart viewer and editor are locked preservation exceptions and are not redesign targets.

Contents

Document titles and major sections are linked. PDF bookmarks provide the same hierarchy.

Approved visual system plates	16
Typography	16
Neutral roles - Light	17
Neutral roles - Dark	18
Material geometry	19
Semantic color	20
Domain color	21
Iconography	22
Foundation guardrails	23
Motion	24
Reduced motion	25
Data-visualization anatomy	26
Equivalent data access	27
Responsive grid	28
Responsive adaptation	29
Reusable UI responsibilities	30
Reusable UI anatomy	31
Discovery fragment	32
Music-detail fragment	33
Dense-ranking fragment	34
Data-sync fragment	35
NosLog 2.0 Design-Guide Remaining-Work Audit	36
Document control	36
Why this document exists	36
Absolute exclusions	36
Fixed six-block baseline	37
Completed scope that must not be reopened by stale text	37
Completed Block 5 package	37
Block 6 result	37
Current active design-document set	38
Decision log	38
NosLog 2.0 Current Product Audit	39
Document Control	39
Purpose	39
Evidence Reviewed	39
Current Product Architecture	40

User Page and Feature Inventory	40
Shared User Navigation and Global Functions	42
Administrator Page and Feature Inventory	42
Current Visual and Component Baseline	43
Primary Data Domains	44
Existing Product Verification Baseline	44
Confirmed Audit Decisions	46
Resolved Audit Follow-up Inputs	47
Ongoing Inventory Rules	47

NosLog 2.0 User Information Architecture and Navigation 48

Document Control	48
Decision Labels	48
Purpose	49
Confirmed Inputs	49
Reference Basis	51
Current Navigation Model	52
Approved User Page Families	52
Approved Structural Map	53
Approved Hierarchy	54
Confirmed Music and Chart Search Model	56
Home Information Architecture	56
Important User Flows	58
Cross-Link Requirements	58
Confirmed Responsive Navigation Direction	59
Desktop Adaptation Principles	60
Localization and Accessibility Requirements	60
URL and Routing Position	60
Decision Register	61
Phase Approval	62
Acceptance Criteria for This Artifact	62
Downstream Application Rules	62

NosLog 2.0 Home Page Brief 64

Document Control	64
Decision Labels	64
Page Purpose and User Context	64
Primary Task and Success Conditions	65
Confirmed Product Inputs	65
Current Product Baseline	66
Content Inventory and Disposition	67
Reference Comparison	68
Approved Information Priority	75

Search Requirements	75
Destination Requirements	77
Notice and News Alternatives	78
Required Data and Content Constraints	79
Required States	80
Responsive Behavior	80
Accessibility Requirements	82
Localization Requirements	83
Browser Verification Targets	83
Acceptance Criteria for This Brief	84
Decision Register	85
Phase Approval	85
Ongoing Handoff	86

NosLog 2.0 Shared Music and Published-Chart Discovery Page Brief 87

Document Control	87
Decision Labels	87
Purpose	88
Primary Context	88
Primary Tasks and Success Conditions	88
Current-Product Evidence	88
Approved Discovery Model	90
Search Interaction	92
Filter and Sort Application Model	92
Explicit Progressive Loading	95
Content and Functional Requirements	96
State Requirements	100
Responsive Requirements	102
Accessibility Requirements	103
Localization Requirements	105
Reference Comparison	106
Rejected or Superseded Alternatives	118
No Open Product Questions	121
Browser Verification Targets	121
Acceptance Criteria for This Brief	124
Decision Register	126
Phase Approval	127
Ongoing Handoff	127

NosLog 2.0 Music Detail Page Brief 128

Document Control	128
Decision Labels	128
Purpose	129

Primary Context	129
Current-Product Evidence	129
Approved Entity and Action Model	131
Approved Content Architecture	132
Approved Responsive Context and Area-Switching Contract	134
Approved Entry Priority and Restoration Contract	135
Approved Asynchronous State and Recovery Contract	137
Approved Chart Info and Personal Record Contract	140
Approved Ranking Contract	142
Approved Tier and Evaluation Contract	145
Approved Representative Data and Page Acceptance Contract	156
Reference Comparison	158
Rejected Alternatives	168
Deferred Measurements after Page-Brief Approval	171
Decision Register	172
Current Milestone	175

NosLog 2.0 Tier-List Page Brief 177

Document Control	177
Decision Labels	177
Purpose	178
Primary Context and Success	178
Current-Product Evidence	178
Approved Page Hierarchy	179
Mode, Goal, and Guide	179
Personal Metric Context	180
Tier-Band Navigation	180
Filters and Result Summary	181
Chart Result Views	182
Card Navigation and Restoration	183
Relationship to Goal-Specific Community Voting	183
Responsive Contract	184
Loading, Empty, Error, and Authentication States	184
Accessibility	185
Localization and Content	185
Implementation Mapping	185
Representative Fixtures	186
Browser Acceptance Contract	187
Reference Matrix	187
Rejected and Superseded Alternatives	189
Decision Log	190
Handoff Boundary	190

NosLog 2.0 Chart Viewer and Editor Preservation Contract	191
Document control	191
Purpose	191
Locked experiences	191
Foundation exclusion	191
Allowed surrounding work	192
Downstream handoff	192
Decision log	192
 NosLog 2.0 Global-Rankings Page Brief	 193
Document Control	193
Decision Labels	193
Purpose	194
Primary Context and Success	194
Current-Product Evidence	194
Approved Scope and Invariants	195
Approved Information Hierarchy	196
Mode, Metric, and Region Contract	196
URL, History, and Restoration Contract	197
Personal Position Contract	197
Shared-Rank Semantics	198
Player-Row Anatomy	198
Pagination Contract	199
Loading, Empty, Error, and Unavailable States	199
Responsive Contract	200
Accessibility Contract	201
Localization and Content	201
Runtime State Contract	202
Implementation Mapping	203
Representative Fixtures	203
Browser Acceptance Contract	204
Reference Matrix	205
Rejected and Superseded Alternatives	206
Decision Log	207
Handoff Boundary	207
 NosLog 2.0 Profile Page Brief	 208
Document Control	208
Decision Labels	208
Purpose	209
Primary Context and Success	209
Current-Product Evidence	209
Approved Scope and Invariants	211

Approved Information Hierarchy	211
Identity and Header Contract	211
Privacy and Public-Data Contract	212
Basic and Recital Performance Contract	213
Progress-over-Time Contract	213
Best Plays Contract	214
Record Overview Contract	215
Recent Plays Contract	215
Complete-List Destination Contract	216
URL, History, and Restoration Contract	216
Profile Share Card Contract	216
Loading, Empty, Error, Privacy, and Unavailable States	217
Responsive Contract	218
Accessibility Contract	219
Localization and Content	220
Runtime State Contract	221
Implementation Mapping	222
Representative Fixtures	222
Browser Acceptance Contract	223
Reference Matrix	225
Rejected and Superseded Alternatives	226
Decision Log	228
Handoff Boundary	228

NosLog 2.0 Bingo Page Brief 230

Document Control	230
Decision Labels	230
Purpose	231
Primary Context and Success	231
Current-Product and Domain Evidence	231
Approved Scope and Invariants	232
Approved Information Hierarchy	233
Progress and Reward Semantics	233
Bingo List Contract	234
Bingo Detail Contract	235
Manual Completion and Save Contract	236
Reset Contract	236
Authentication and Permission Contract	237
URL, History, and Restoration Contract	237
Loading, Empty, Error, Disabled, and Destructive States	238
Responsive Contract	238
Accessibility Contract	239

Localization and Content Contract	239
Runtime State Contract	240
Implementation Mapping	241
Representative Fixtures	241
Browser Acceptance Contract	242
Reference Matrix	244
Rejected and Superseded Alternatives	245
Decision Log	246
Handoff Boundary	247

NosLog 2.0 Exam Page Brief 248

Document Control	248
Decision Labels	248
Purpose	249
Primary Context and Success	249
Current-Product and Domain Evidence	249
Approved Scope and Invariants	251
Approved Information Hierarchy	251
Navigation, Selection, and URL Contract	252
Official Exam Information Contract	252
Mode-Specific Scoring Contract	253
Practice Analysis Contract	254
Certification and Achievement Contract	254
Proof Evidence Standard	255
Proof Submission and Review Contract	255
Authentication and Permission Contract	256
Loading, Empty, Error, Disabled, and Destructive States	258
Responsive Contract	258
Accessibility Contract	259
Localization and Content Contract	260
Runtime State Contract	260
Implementation Mapping	261
Representative Fixtures	261
Browser Acceptance Contract	262
Reference Matrix	264
Rejected and Superseded Alternatives	265
Decision Log	267
Handoff Boundary	267

NosLog 2.0 Arcade Discovery and Detail Page Brief 268

Document Control	268
Decision Labels	268
Purpose	269

Primary Context and Success	269
Current-Product and Domain Evidence	269
Approved Scope and Invariants	271
Approved Information Hierarchy	272
Discovery, Search, Filter, and Sort Contract	272
Map and List Coordination Contract	274
Arcade Detail Route and Action Contract	275
Cabinet Availability and Condition Contract	275
Operating Information and Verification Contract	276
Preferred Arcade and Community Context	277
Curated Photo Contract	277
Correction and Cabinet-Issue Reporting Contract	277
Authentication and Permission Contract	278
Loading, Empty, Error, Disabled, and Destructive States	279
Responsive Contract	279
Accessibility Contract	280
Localization and International Location Contract	281
Runtime State Contract	282
Implementation Mapping	283
Representative Fixtures	283
Browser Acceptance Contract	284
Reference Matrix	286
Rejected and Superseded Alternatives	287
Decision Log	289
Handoff Boundary	289

NosLog 2.0 Data Sync Page Brief	291
Document Control	291
Decision Labels	291
Purpose	292
Primary Context and Success	292
Current-Product and Domain Evidence	292
Approved Scope and Invariants	294
Terminology and Data Meaning	296
Approved Information Hierarchy	296
Action Priority	297
Setup and Repeated-Sync Flow	298
Status, Timing, and Recovery Contract	299
Result and History Contract	300
Installation Guidance and Media Contract	301
Security and Privacy Contract	301
Authentication and Permission Contract	302

Responsive Contract	303
Accessibility Contract	304
Localization Contract	304
Runtime State Contract	305
Implementation Mapping	306
Representative Fixtures	306
Browser Acceptance Contract	307
Reference Matrix	309
Rejected and Superseded Alternatives	310
Decision Log	312
Handoff Boundary	312

NosLog 2.0 Announcements Archive and Detail Page Brief 313

Document Control	313
Decision Labels	313
Purpose	314
Primary Context and Success	314
Current-Product and Domain Evidence	314
Approved Scope and Invariants	316
Terminology and Data Meaning	317
Approved Information Hierarchy	318
Action Priority	319
Archive Contract	319
Detail Content Contract	320
Publication and Lifecycle Contract	321
Date and Revision Contract	322
URL, Metadata, and Indexing Contract	322
Authentication and Permission Contract	323
Responsive Contract	323
Accessibility Contract	324
Localization Contract	325
Runtime State Contract	326
Implementation Mapping	326
Representative Fixtures	327
Browser Acceptance Contract	328
Reference Matrix	330
Rejected and Superseded Alternatives	331
Decision Log	333
Handoff Boundary	333

NosLog 2.0 Shared Shell and Navigation Brief 334

Document Control	334
Decision Labels	334

Purpose	335
Primary Context and Success	335
Current-Product Evidence	335
Approved Shell Variants	336
Ordinary Public Shell Contract	337
Global Destination Panel	338
Responsive Panel Behavior	339
Scroll-Aware Header Contract	340
Footer Contract	340
Minimal Authentication Shell	340
Focused Chart-Viewer Shell Boundary	341
System-Recovery Shell	341
Accessibility Contract	341
Localization Contract	342
Runtime State Contract	342
Rejected and Superseded Alternatives	343
Implementation Mapping	343
Browser Acceptance Contract	344
Reference Matrix	345
Decision Log	346
Handoff Boundary	346

NosLog 2.0 Settings and Account Management Page Brief 348

Document Control	348
Decision Labels	348
Purpose	349
Primary Context and Success	349
Current-Product Evidence	349
Research Synthesis	350
Approved Information Architecture	351
Experience Category Contract	352
Profile Category Contract	353
Privacy Category Contract	354
Connections Category Contract	355
Account Category Contract	355
Persistence and Save Ownership	357
State Contract	358
Responsive Layout Contract	358
Accessibility Contract	359
Localization and Content Contract	360
Data and Representative Content Requirements	360
Implementation Mapping	360

Browser Acceptance Contract	361
Reference Matrix	363
Rejected and Superseded Alternatives	364
Decision Log	367
Handoff Boundary	368

NosLog 2.0 Authentication and Onboarding Page Brief 369

Document Control	369
Decision Labels	369
Purpose	370
Primary Context and Success	370
Current-Product Evidence	371
Research Synthesis	372
Approved Authentication Model	373
Login Contract	373
Onboarding Contract	374
Incomplete-Profile Gate	376
Form Submission and Persistence	376
Error and Recovery Contract	377
Responsive Layout Contract	377
Accessibility Contract	378
Localization and Content Contract	379
Data and Representative Content Requirements	379
Implementation Mapping	380
Browser Acceptance Contract	380
Reference Matrix	382
Rejected and Superseded Alternatives	383
Decision Log	384
Handoff Boundary	385

NosLog 2.0 Privacy and Data-Practices Page Brief 386

Document Control	386
Decision Labels	387
Purpose	387
Primary Context and Success	387
Current-Product Evidence	388
Research Synthesis	391
Approved Scope and Invariants	392
Information Hierarchy	393
At-a-Glance Contract	394
Full Policy Content Contract	394
Interaction and Navigation Contract	398
Responsive Layout Contract	399

State Contract	400
Accessibility Contract	400
Localization and Legal-Copy Contract	400
Data and Content Requirements for Design Specimens	401
Implementation Mapping	402
Pre-Release Privacy Blockers	402
Browser and QA Acceptance	403
Reference Matrix	405
Rejected and Superseded Alternatives	406
Decision Log	408
Handoff Boundary	409

NosLog 2.0 System-Recovery States Page Brief 410

Document Control	410
Decision Labels	410
Purpose	411
State Taxonomy and Success	411
Current-Product Evidence	411
Research Synthesis	412
Approved Shared Content Contract	413
Approved Not-Found Contract	414
Approved Recoverable Page-Error Contract	414
Approved Fatal Global-Error Contract	415
Approved Planned-Maintenance Contract	416
Responsive and Layout Contract	417
Accessibility Contract	417
Localization and Content Contract	417
Metadata, Search, and Protocol Contract	418
Privacy, Diagnostics, and Support Boundary	418
State and Edge-Case Matrix	419
Implementation Mapping	419
Browser and Automated Acceptance Contract	420
Reference Matrix	421
Rejected and Superseded Alternatives	422
Decision Log	423
Handoff Boundary	423

NosLog 2.0 Cross-Cutting Principles and Exception Governance 424

Document control	424
Evidence method	424
Approved cross-cutting principles	425
Accessibility and internationalization floor	425
Responsive and content rules	426

Specialized-pattern classification	426
Current specialized and bounded records	426
Focused source pool	427
Downstream handoff	427
Decision log	427
NosLog 2.0 Foundation v0.1	428
Document control	428
Scope and source rules	428
Typography	428
Spacing, grid, and containers	430
Neutral color - Adobe Spectrum S2	430
Identity and primary action	432
Material geometry - MG-A, Adobe Spectrum S2	432
Feedback and status - FS-BN	433
Difficulty markers - DU-01, Adobe Spectrum S2	433
Local data color - LD-03, SAP Fiori Horizon	433
Judgement markers - JD-02, Radix Colors 3.0.0	434
Iconography - IC-06, Lucide	434
Motion - MO-02, Atlassian	434
Ordinary data visualization - DV-05, GitHub Primer	435
Foundation acceptance	435
NosLog 2.0 Foundation v0.1 Provenance and Decision Record	436
Document control	436
Research and decision method	436
Consolidated approval register	437
Typography, spacing, and layout provenance	437
Neutral and focus provenance	437
Signature, identity, and action provenance	438
Material provenance	438
Feedback and domain-color provenance	439
Iconography provenance	440
Motion provenance	440
Data-visualization provenance	440
Rejected and superseded evidence	441
Evidence retention policy	441
NosLog 2.0 Foundation v0.1 Promotion and Reusable Ordinary UI	442
Document control	442
Block 5 purpose	442
Regression contract	442
Completed browser verification	443

Corrected Foundation summary	444
Pretendard JP delivery and fallback decision	444
Approved reusable component aliases - FPR-04	445
Approved reusable patterns - FPR-04	446
Promotion prohibitions	446
Block 5 decision log	446
Block 5 completion	447

NosLog 2.0 Downstream Design and Implementation Handoff 448

Document control	448
Purpose	448
Authority and conflict handling	448
Three-stage delivery boundary	449
Active source index	449
Screen and page-family requirements	449
Foundation application contract	450
Reusable responsibility mapping	451
Implementation mapping contract	451
Responsive and content acceptance matrix	452
State and interaction acceptance matrix	453
Accessibility and localization release floor	453
Browser and verification coverage	454
Privacy release blockers	454
Claude Design handoff	455
Future Codex implementation handoff	455
Milestone PDF assembly manifest	456
Milestone PDF editorial system	456
Block 6 decision log	457

FOUNDATION / TYPOGRAPHY

One family, explicit roles

The visual hierarchy comes from approved size, line-height, weight, and role boundaries - not decorative tracking or page-local invention.

DISPLAY	Archive without noise	40 / 48 · 700
PAGE TITLE	Music detail	24 / 32 · 700
SECTION TITLE	Recent records	20 / 28 · 600
COMPONENT TITLE	Judgement breakdown	16 / 24 · 600
BODY	Compare exact values and keep the current context visible.	16 / 24 · 400
METADATA	UPDATED 12 MIN AGO	12 / 16 · 400

KO 그랜드마스터 달성 기록

JA グランドマスター達成記録

EN Grandmaster achievement record

Official Pretendard JP 1.3.9 static TTFs · 400/500/600/700 embedded

KO ss05 remains a browser-shaping check

FOUNDATION / NEUTRAL / LIGHT

Spectrum S2 Light roles

These are semantic assignments, not a decorative gray ramp. Quiet boundaries may never become the only necessary cue.

Music archive

Search records, compare scores, and preserve context.

Recent record

12,987,654

Updated

12 min ago

SURFACES

canvas

#FFFFFF

surface

#F8F8F8

sunken

#E9E9E9

raised

#FFFFFF

overlay

#FFFFFF

FOREGROUNDS

content-default

#292929

content-subdued

#505050

content-interactive

#131313

content-disabled

#C6C6C6

BOUNDARIES

divider

#E1E1E1

border-subtle

#DADADA

border-default

#C6C6C6


border-strong

#717171

FOUNDATION / NEUTRAL / DARK

Spectrum S2 Dark roles

These are semantic assignments, not a decorative gray ramp. Quiet boundaries may never become the only necessary cue.

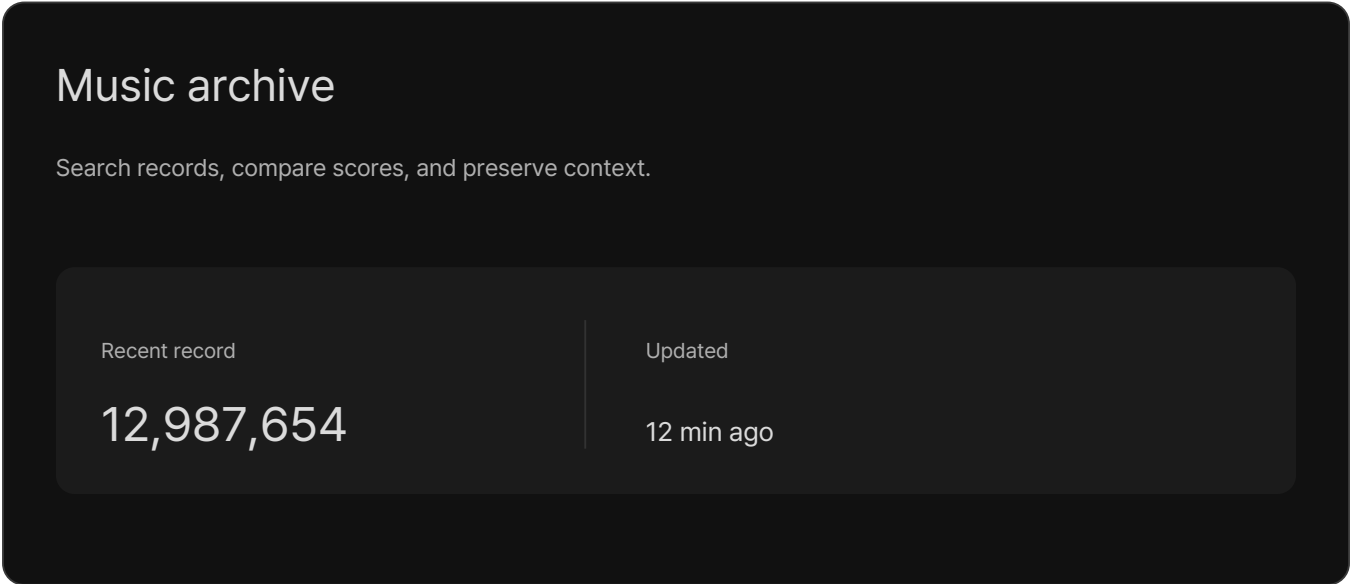

SURFACES

				
canvas	surface	sunken	raised	overlay
#111111	#1B1B1B	#111111	#222222	#222222

FOREGROUNDS

			
content-default	content-subdued	content-interactive	content-disabled
#DBDBDB	#AFAFAF	#F2F2F2	#444444

BOUNDARIES


			
divider	border-subtle	border-default	border-strong
#323232	#393939	#444444	#8A8A8A

FOUNDATION / MATERIAL

Flat by default, lifted by purpose


Radius communicates object family. Elevation appears only for real lift, movement, overlap, or justified emphasis.

APPROVED GEOMETRY




Control

4px




Container

8px



Overlay

10px



Full

50%


ELEVATION IS A STATE, NOT DECORATION

Raised / emphasized				
Ambient	0 2 8	.08 / .24		
Transition	0 1 4	.04 / .12		
Key	0 0 1	.08 / .24		

Overlay / elevated				
Ambient	0 4 12	.08 / .24		
Transition	0 2 6	.04 / .12		
Key	0 0 2	.12 / .36		

Dragged				
Ambient	0 12 16	.08 / .24		
Transition	0 6 8	.04 / .12		
Key	0 0 6	.16 / .48		

Exact Spectrum layer anatomy - geometry is x y blur - opacity is Light / Dark.

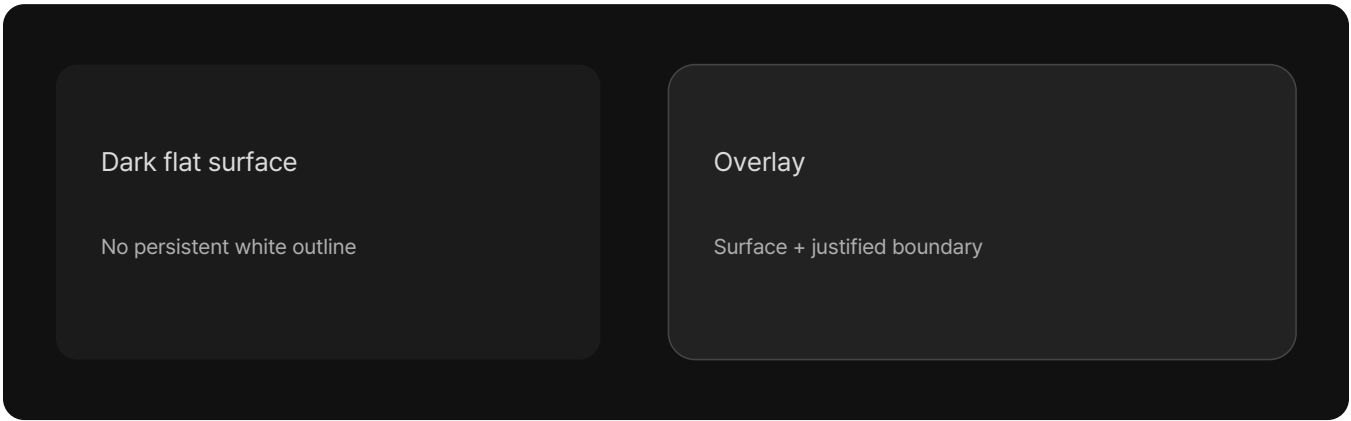

FOUNDATION / SEMANTIC COLOR

Color names a state; typography stays neutral

Atlassian owns feedback chroma. Spectrum owns message title and body typography. Every state keeps text, symbol, and programmatic meaning.

LIGHT

DARK

Information

Explicit message and recovery

Success

Explicit message and recovery

Warning

Explicit message and recovery

Danger

Explicit message and recovery

Information

Explicit message and recovery

Success

Explicit message and recovery

Warning

Explicit message and recovery

Danger

Explicit message and recovery

DIFFICULTY · COMPACT PERSISTENT MARKERS ONLY

Normal

#0BA45D / #068850

Hard

#E86A00 / #E06400

Expert

#F03823 / #CD2E1D

Real

#A65CE7 / #AD69E9


Do not color difficulty text, backgrounds, containers, selection, focus, feedback, or actions.

FOUNDATION / DOMAIN COLOR

Local data and judgement remain narrow

SAP Fiori Horizon owns local data series. Radix Colors owns only the five judgement markers. Labels, values, order, and patterns carry meaning with color.

SCORE BUCKETS · LOW → HIGH

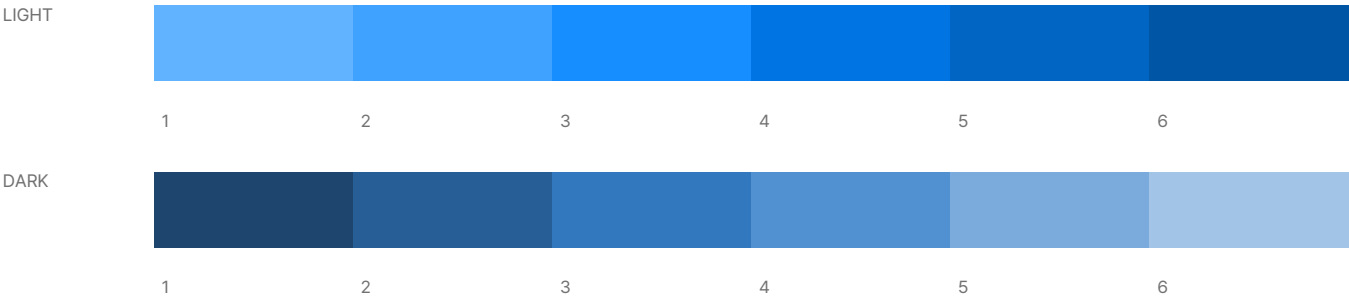

FAST / SLOW · DIRECT LABEL + SHAPE + LINE PATTERN



JUDGEMENT · LOCAL MARKERS / BARS ONLY



FOUNDATION / ICONOGRAPHY

Lucide stays quiet and legible

One outline family, inherited foreground, and a target larger than the glyph. Unfamiliar, destructive, and low-frequency actions keep visible text.

PUBLISHED CONSTRUCTION



Supporting beside label
24x24 viewBox · 2px stroke





Routine action / wayfinding
24x24 viewBox · 2px stroke




Prominent proven affordance
24x24 viewBox · 2px stroke


GLYPH ≠ TARGET



LABEL CONTRACT



Primary / unfamiliar
Visible label remains




Wayfinding
Icon supports - not replaces - the label

FOUNDATION / GUARDRAILS


Restraint is visible in the composition

These diagrams illustrate approved prohibitions. They are not reused historical candidates or final component designs.

DO

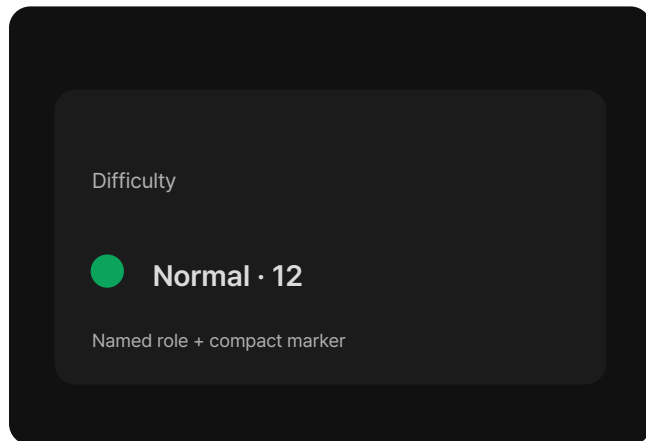

DON'T

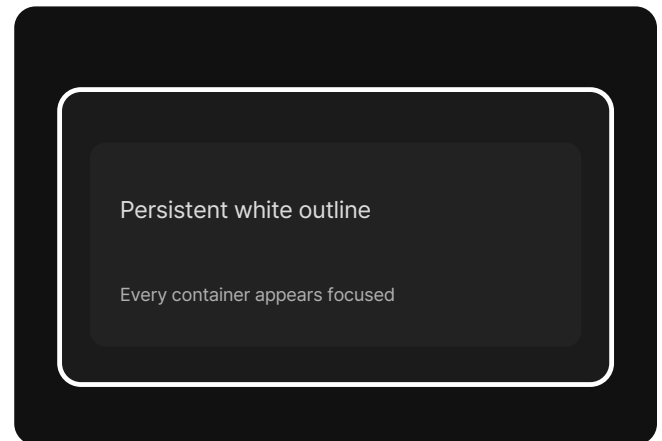

Neutral surfaces first

Chroma only for approved semantic or domain roles.

Persistent non-color cue

Name, label, order, symbol, shape, or pattern remains.

Keyboard focus only

2px black Light / white Dark perimeter; pointer focus does not persist.

No universal hover fill


Use the approved component-family interaction recipe.

FOUNDATION / MOTION


Time communicates role, not spectacle

MO-02 uses the published Atlassian duration ladder and cubic-bezier curves. Immediate semantics are never delayed by animation.

DURATION ROLES - EXACT TOKENS

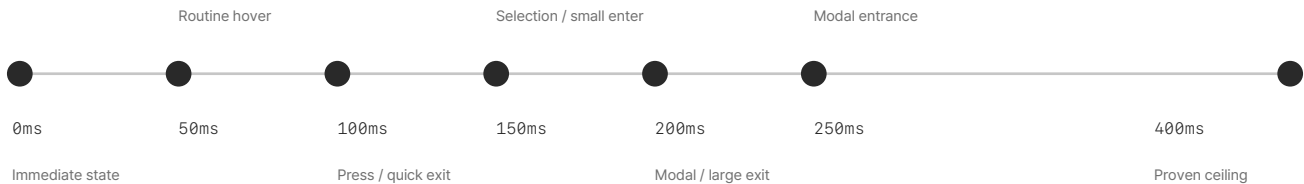

EASING CURVES - EXACT NORMALIZED CONTROL POINTS

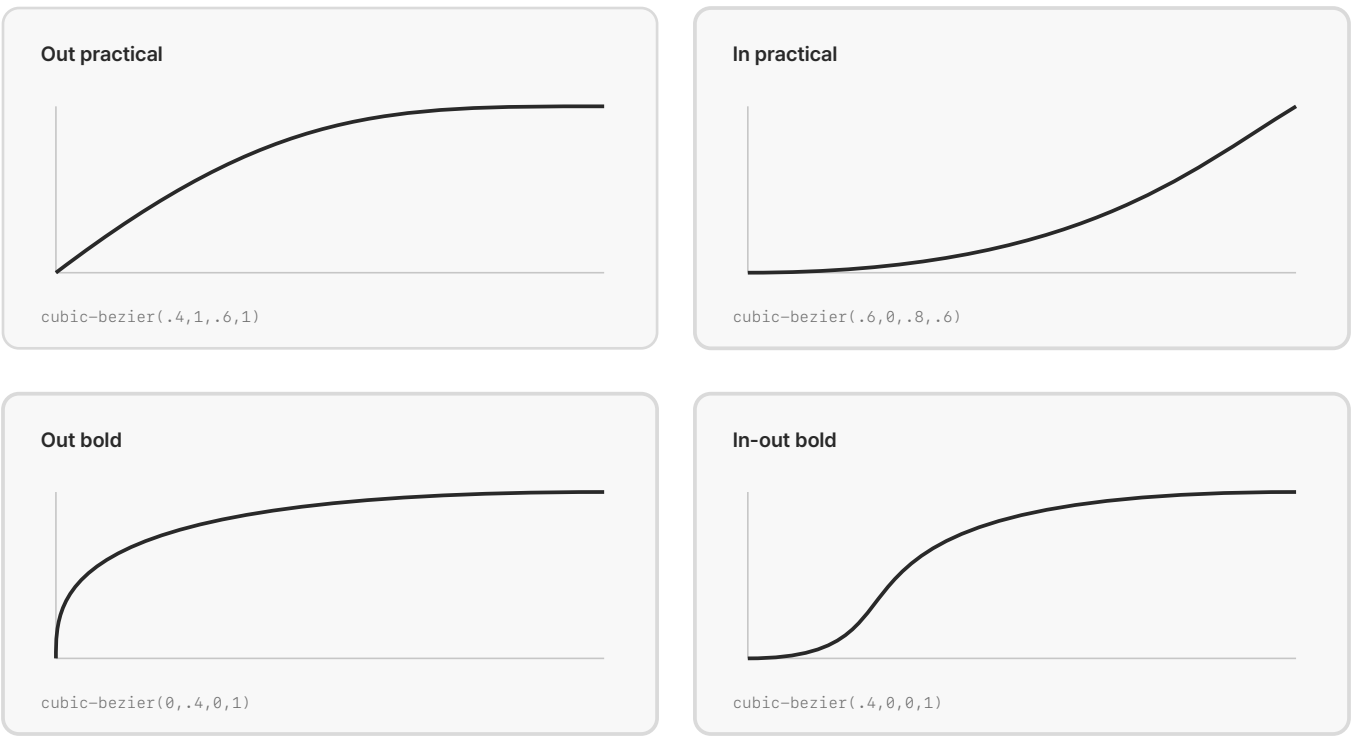

Unassigned: 600ms, bounce, stagger, celebration, parallax, and page choreography.

FOUNDATION / REDUCED MOTION

Remove movement; preserve meaning

Reduced mode is an immediate semantic replacement, not a slower animation. Spatial and continuous motion disappear while state, focus, and recovery remain explicit.

STANDARD MOTION

PREFERS-REDUCED-MOTION: REDUCE

Popup

Options

150ms enter from trigger

Popup

Options

0ms placement at destination

Translate / scale removed

Selection and error

Selected

Error shown

150ms highlight; error is 0ms

Selection and error

Selected

Error shown

Immediate state and message

No delayed semantics

Busy

Syncing records...

Spinner plus persistent busy text

Busy

Syncing records...

Static cue + persistent busy text


aria-busy remains true

IMMEDIATE STATE

Focus, error, critical status, completion, and availability never wait for motion.

Primer anatomy, NosLog meaning

DV-05 adopts Primer chart anatomy and interaction responsibilities while LD-03, JD-02, and DU-01 retain ownership of product colors.

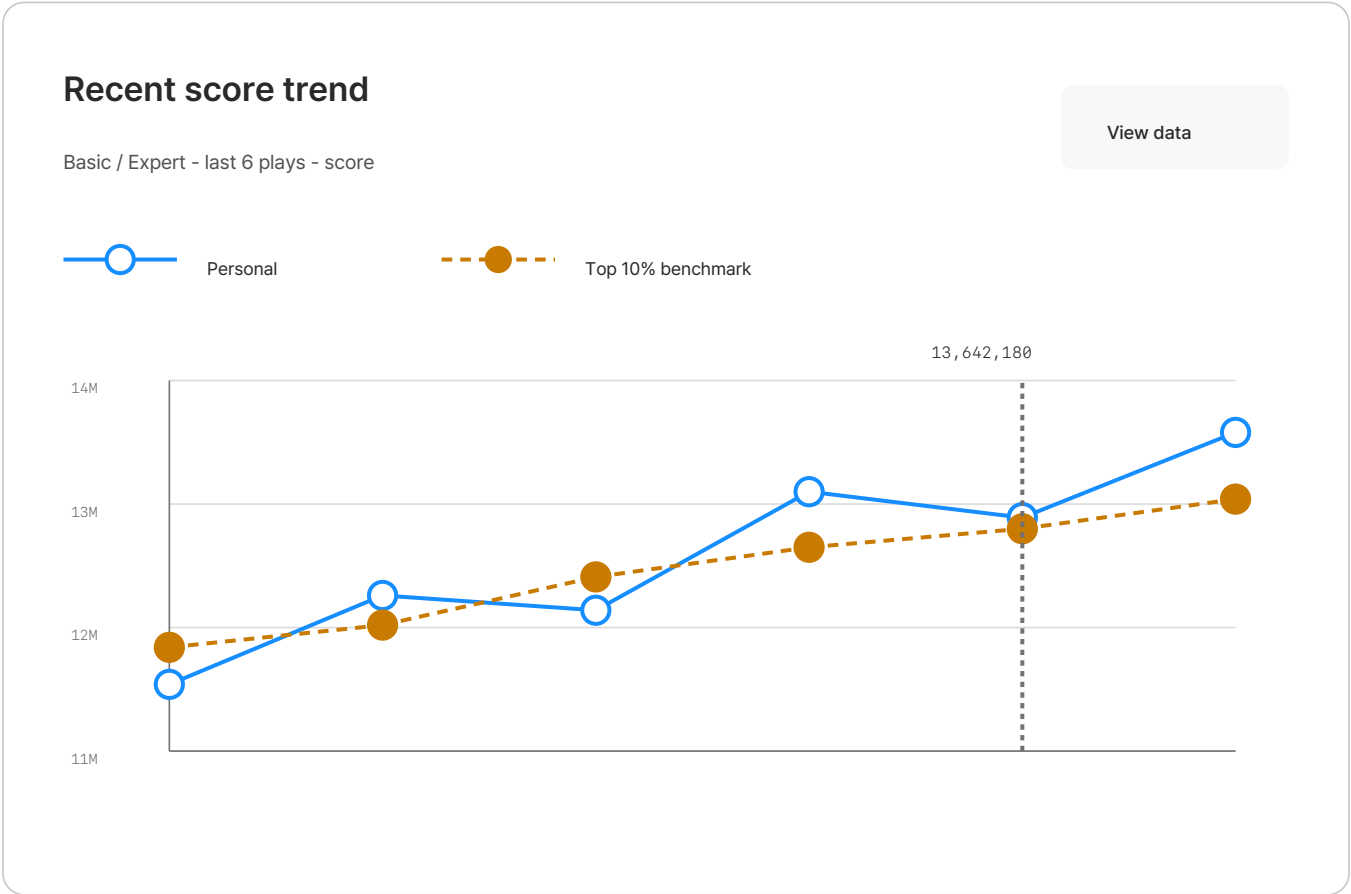

01 **Visible title**
Measure is identifiable without interaction.

02 **Subtitle context**
Dimension, range, and unit remain visible.


03 **Persistent legend**
Plot order, stroke, and marker differ.

04 **Exact value**
Pointer, keyboard, and touch expose the same value.

FOUNDATION / DATA ACCESS

One dataset, equivalent paths

The chart is never the only source of meaning. Visible conclusions, exact-value interaction, and the active same-data semantic table remain connected.

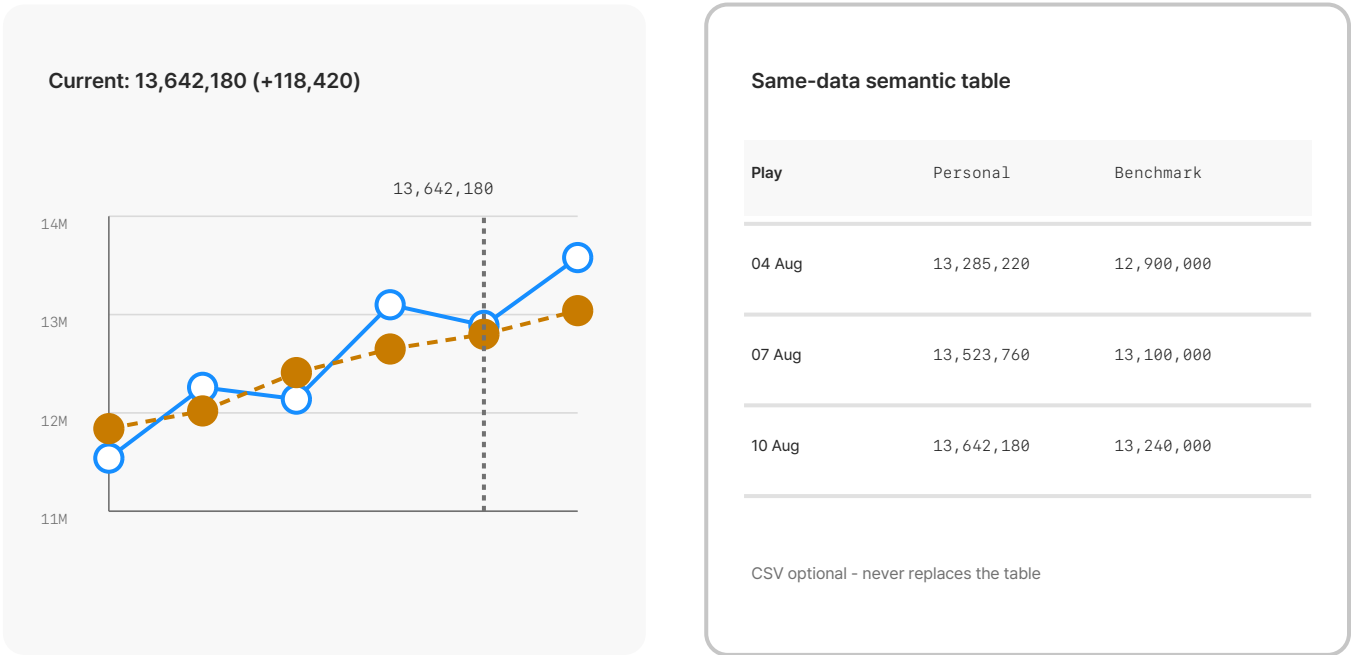


INPUT EQUIVALENCE

Pointer / touch	Dimension + series + Exact value + unit
Keyboard	Arrow keys move points; Home / End reach series ends
Narrow	Legend and actions recompose; no page overflow
Contained table	Labeled focusable scroller only when inherently wide

FOUNDATION / RESPONSIVE GRID

Container width chooses the tier

These are scaled diagrams. The numeric labels are normative; the miniature physical widths are editorial notation only.

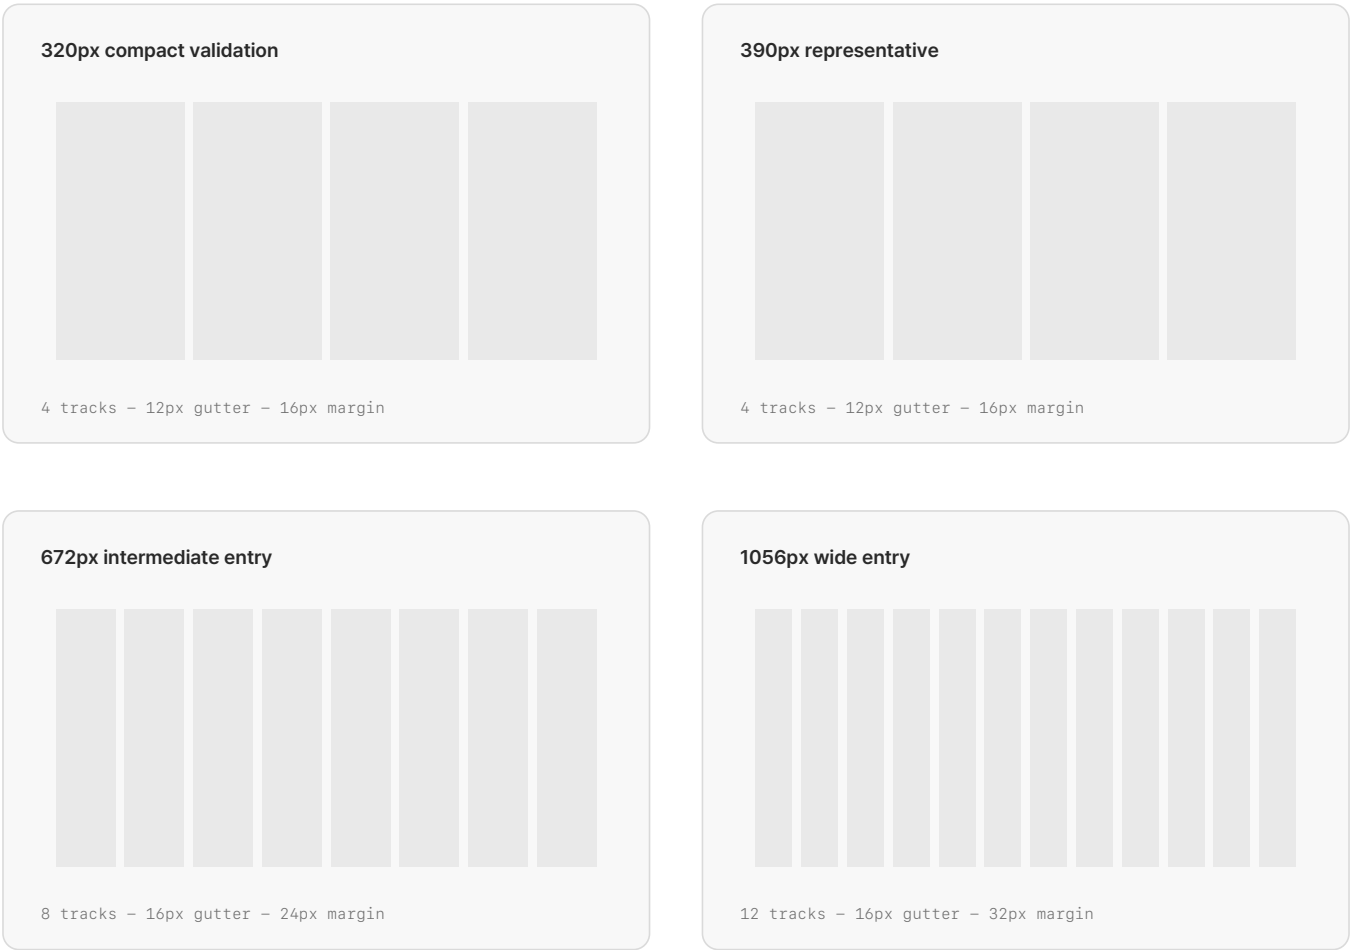

Compact Below 672px - reflow at 320px without page-level horizontal scrolling.

Intermediate 672-1055px - use measured content pressure, not a device label.


Wide 1056px+ - use space for comparison, analysis, or parallel reading.

Nested Component recomposition uses its own measured failure point and container query.

FOUNDATION / RESPONSIVE ADAPTATION

Recompose after content fails

One logical source and focus order survives every composition. A layout transition needs a measured content-fit reason, not a framework breakpoint.

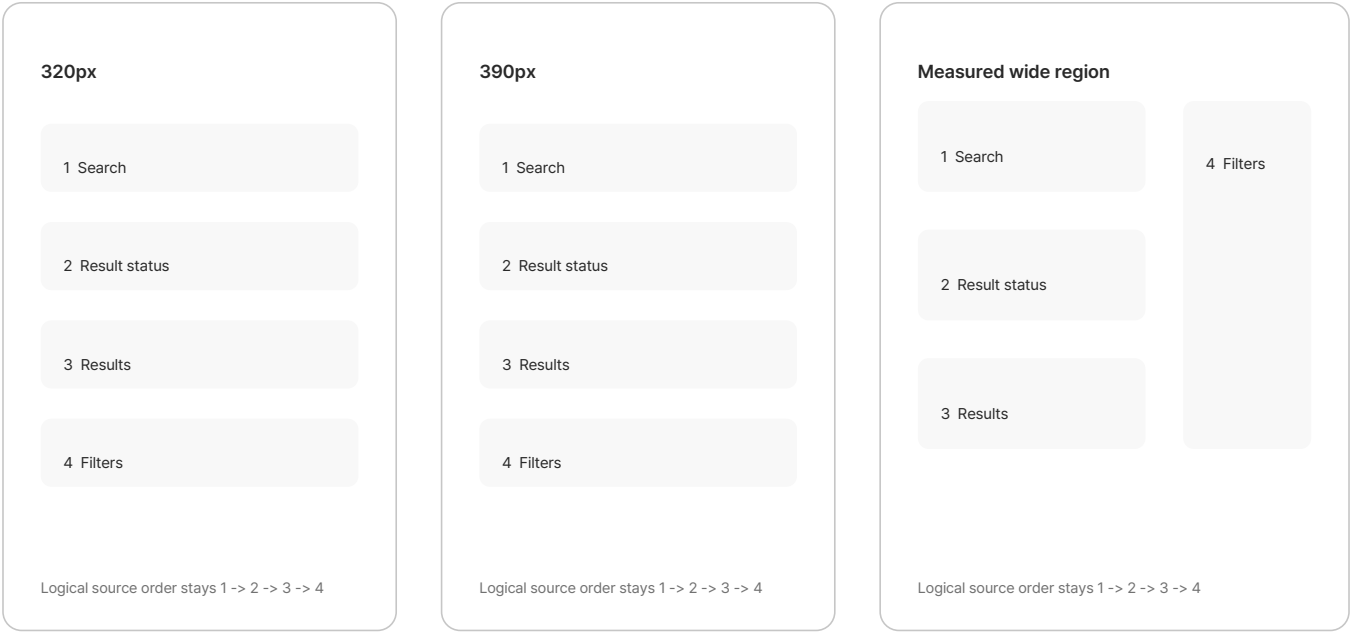

Content-fit trigger	Longest KO/JA/EN labels, controls, tables, and cards determine transition.
Text growth	200% text and 400% zoom keep required content and focus visible.
Two-dimensional data	Only inherently wide data receives a labeled contained scroller.
Extra wide space	Use for comparison or parallel reading; do not enlarge a phone column.

REUSABLE ORDINARY UI

Aliases name responsibility, not appearance

FPR-04 stays lean. Each alias reuses behavior only where responsibility is genuinely shared and may not invent color, radius, shadow, or motion.

Shell and navigation

AppHeader

Overlay

Disclosure

Search and refinement

SearchField

ContentScopeSwitch

FilterSortControl

ViewModeSwitch

Entity and result

ResultCollection

MusicEntityHeader

DifficultySelector

MetricSummary

Exact dense data

DataTable

Pagination

OrdinaryDataChart

Forms and feedback

FormField

StatusMessage

REUSABLE ORDINARY UI

Anatomy protects the contract

These diagrams identify required parts and semantics. They do not approve one final visual component or a universal polymorphic overlay.

FormField

Public name

A very long public name


Public name must be 20 characters or fewer.

Label - value - constraint - error association - preserved input

Overlay family

Popover	anchored context
Menu	action choice
Dialog	modal task
Navigation	new destination
Choose semantics, focus, dismissal, geometry, and MO-02 by role.	

OrdinaryDataChart + DataTable

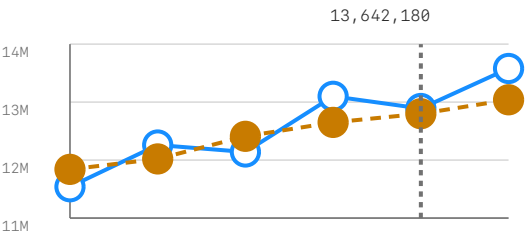

DataTable

- 1. Headers and row identity
- 2. Exact values and units
- 3. Current-user context
- 4. Responsive priority
- 5. Same data as chart

REPRESENTATIVE FRAGMENT / DISCOVERY

Search, commit status, then scan

A controlled ordinary-UI fragment validates hierarchy and responsibilities. It is not a final Music page composition or a downstream visual target.

SCHEMATIC - NOT FINAL PAGE

NosLog390 CSS px

Find music

Search title or artist

128 results for 'NOSTALGIA'

Filters

Noah's song

●

Expert 12

ネコノテ・カリタガリ

●

Hard 9

그랜드마스터 연습곡

●

Normal 6

NosLogscaled 320 CSS px / 200% text

Find music

Search title or artist

128 results for 'NOSTALGIA'

Filters

Noah's song

●

Expert 12

ネコノテ・カリタガリ

●

Hard 9

그랜드마스터 연습곡

●

Normal 6

Approved visual communication - Normative values: documents 24 and 63

Viewer/editor excluded

REPRESENTATIVE FRAGMENT / MUSIC DETAIL

Identity first; analysis follows

The fragment exercises MusicEntityHeader, difficulty, neutral metrics, approved judgement markers, and ordinary data-chart anatomy only.

SCHEMATIC - NOT FINAL PAGE

Noah's song

Canon in the nostalgic rain

● Normal

● Hard

● Expert

● Real

Best score


13,642,180

Grade

S

Rank

128 / 8,402

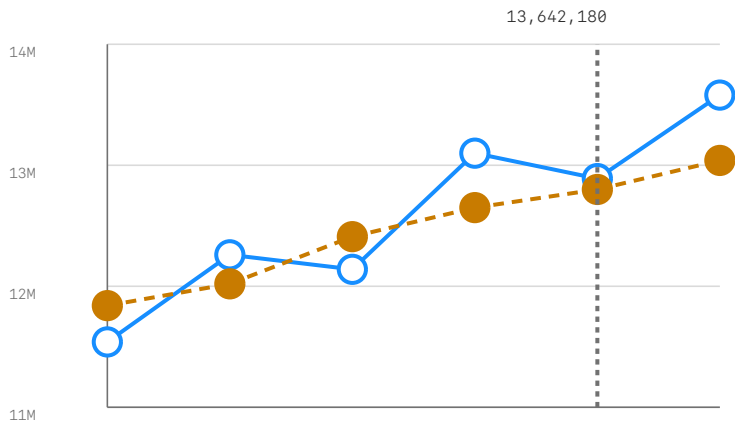

Judgement breakdown

S-Just

Just

Good

Near

Miss

REPRESENTATIVE FRAGMENT / DENSE RANKING

Priority changes; relationships remain

The narrow view preserves row identity and exact values. The wide view adds comparison columns without duplicating the current user or flattening table semantics.

SCHEMATIC - NOT FINAL PAGE

320px priority		
Rank	Player	Rating
126	pianist_a	1,742
127	鍵盤奏者	1,739
128	You	1,736
129	very_long_name	1,730
130	연주자	1,728
Exact values - semantic headers - current context		

Wide comparison				
Rank	Player	Rating	Best 70	Region
126	pianist_a	1,742	1,704	KR
127	鍵盤奏者	1,739	1,704	KR
128	You	1,736	1,704	KR
129	very_long_name	1,730	1,704	KR
130	연주자	1,728	1,704	KR
Exact values - semantic headers - current context				

REPRESENTATIVE FRAGMENT / DATA SYNC

State and recovery stay explicit

This ordinary data-sync fragment tests loading, success, and recoverable failure with neutral message typography and approved Atlassian semantic chroma.

SCHEMATIC - NOT FINAL PAGE



Syncing

Connecting local records...

REDUCED: static cue + aria-busy

Named state - persistent copy - programmatic semantics - one recovery path



128 records connected

Last updated just now

Review imported records

Named state - persistent copy - programmatic semantics - one recovery path



Connection interrupted

Your existing records are unchanged.

Try again

Named state - persistent copy - programmatic semantics - one recovery path

NosLog 2.0 Design-Guide Remaining-Work Audit

docs/design/57-design-guide-remaining-work-audit.md

Document control

- Status: Approved current scope authority
- Language: English
- Last updated: 2026-08-11
- Mirrors: the six-block table in the root README.md
- Foundation authority: [document 24](#)
- Foundation provenance: [document 25](#)
- Completed Block 5 package:

[document 63](#)

- Completed Block 6 package:

[document 64](#)

Why this document exists

Earlier design-guide files accumulated chronological research plans, candidates, specimens, unchecked future items, and superseded status language. Those internal steps were repeatedly misreported as new top-level work. This audit is the only design-document authority for what remains.

A later explicit user decision overrides an older plan. Deleted documents and Git history preserve evidence; they do not restore work to the roadmap. No completion percentage is permitted until the user approves both a denominator and method.

Absolute exclusions

- The complete existing chart viewer/editor is preserved under [document 07](#).
- There is no pending viewer/editor redesign, Foundation migration, component, specimen, responsive pass, accessibility reinterpretation, or contribution flow.
- Final high-fidelity pages and production application implementation belong to the later Claude Design and Codex stages, respectively.
- Final logo drawing is downstream visual design, not a missing Foundation decision.

Fixed six-block baseline

#	User-facing block	Status	Completed or remaining result
1	C5 color closeout	Complete	Spectrum neutrals and difficulty, Fluent focus, Radix reserved signature/judgement, achromatic identity/action, Atlassian feedback, SAP local data; viewer/editor excluded
2	Iconography	Complete	Lucide ordinary-UI source, geometry, sizes, labels, targets, and accessibility grammar approved
3	Motion / Reduced motion	Complete	Atlassian exact duration/easing ownership and instant meaningful reduced mode approved
4	Data-visualization anatomy	Complete	GitHub Primer ordinary-UI anatomy, exact-value access, non-color cues, and semantic-table floor approved
5	Foundation promotion and reusable UI	Complete	Foundation v0.1, Pretendard JP delivery, and the lean reusable ordinary-UI aliases and patterns in document 63 are approved
6	Downstream handoff and milestone export	Complete	Document 64 consolidates screen requirements, mapping, QA, Claude Design boundaries, and the approved English ED-03 milestone export

No top-level design-guide block remains. Research, candidates, specimens, browser checks, documentation, and approval gates inside a block are not additional blocks or “next tasks.” Privacy/legal/production-evidence blockers and the later Claude Design and implementation stages are not missing design-guide blocks.

Completed scope that must not be reopened by stale text

- product and route audit;
- information architecture, navigation, user flows, and current page-family briefs;
- cross-cutting principles, evidence method, accessibility floor, and exception

governance;

- typography, spacing, grid, layout, containers, neutral color, focus, identity,

primary action, material, feedback, domain/data colors, iconography, motion, and ordinary data-visualization source decisions;

- the entire chart viewer/editor scope correction and preservation boundary.

A failed current acceptance requirement or a new explicit user decision may reopen a precisely named item. Preference, an old unchecked box, or a deleted specimen may not.

Completed Block 5 package

Block 5 does not re-run old source comparisons. It packages and checks the already approved contracts in document 24.

FPR-02 is approved: use the version-pinned official Pretendard JP 1.3.9 variable dynamic subsets, first-party self-hosted with the official fallback order. FPR-03 is approved: document 24 is the Foundation v0.1 normative authority for eligible ordinary UI.

FPR-04 is approved: use the implementation-neutral reusable aliases and patterns recorded in document 63, including `FormField`, the Music-scoped `MusicEntityHeader`, and `Overlay` as an interaction-family contract rather than one universal component.

The regression HTML remains supporting evidence, not a final NosLog page or a source of component appearance. It contains no viewer/editor fragment. Block 5 is complete and has no remaining approval gate.

Block 6 result

Block 6 produced one coherent downstream package:

- current screen and page-family requirements linked to the approved briefs;

- Foundation and reusable-pattern implementation mapping;
- accessibility, localization, state, responsive, and browser acceptance matrix;
- explicit chart viewer/editor preservation instruction;
- Claude Design prompt/handoff boundaries and conflict escalation rule;
- editable guide index and one English versioned PDF using the approved

ED-03 · GitHub Primer editorial system.

Block 6 does not create the final high-fidelity page suite or implement the app. The approved editable package is [document 64](#).

Current active design-document set

The active tree contains only:

- documents 01–19 for product evidence, IA, and current page-family requirements, with document 07 converted to preservation-only authority;
- document 22 for cross-cutting principles and exception governance;
- document 24 for normative Foundation v0.1;
- document 25 for consolidated provenance and decision history;
- this document 57 for remaining scope;
- document 63 for the approved Block 5 package; and
- document 64 for the active Block 6 downstream package.

All active design documents are English-only. Serial comparison documents, Korean companions, obsolete viewer/editor briefs, and historical specimens remain available only through Git history.

Decision log

ID	Decision	Status
RWA-01	Use exactly six top-level blocks and never convert internal steps into more blocks.	Approved correction
RWA-02	Treat Blocks 1-5 as complete and locked unless a precise failure or user decision reopens one.	Approved
RWA-03	Keep the complete viewer/editor outside all remaining work.	Approved absolute boundary
RWA-04	Report no completion percentage without an approved denominator and method.	Approved correction
RWA-05	Consolidate active design authority to English-only current documents and rely on Git for superseded evidence.	Approved – 2026-08-10
RWA-06	Use official Pretendard JP 1.3.9 variable dynamic subsets as version-pinned, first-party self-hosted assets.	Approved – 2026-08-11
RWA-07	Promote the approved document 24 contracts together as the Foundation v0.1 normative authority.	Approved – 2026-08-11
RWA-08	Approve the lean reusable ordinary-UI aliases and patterns in document 63 and complete Block 5.	Approved – 2026-08-11
RWA-09	Approve document 64, one English ED-03 milestone PDF, and complete Block 6 and the six-block guide.	Approved – 2026-08-11

NosLog 2.0 Current Product Audit

docs/design/01-current-product-audit.md

Document Control

- Status: Approved current-product evidence – audit phase complete
- Evidence status: Observed from repository and representative browser pass
- Browser verification: Representative pass complete; unreproduced rare states remain code-evidence limits, not a pending design block
- Date started: 2026-07-29
- Scope decisions confirmed: 2026-07-29
- Language: English
- Scope: NosLog v1.6.0 user application, shared system states, and administrator application
- Decision authority: This document records the current product. It does not approve a NosLog 2.0 information architecture, visual direction, page contents, or feature removal.

Purpose

This audit captures the product functions and states that must be understood before NosLog 2.0 page briefs or design decisions are made. Repository observations are recorded as facts. Evidence limits below identify confidence boundaries; they do not reopen the completed audit phase or add work outside the six-block baseline.

Evidence Reviewed

- Next.js App Router page, layout, route-handler, and proxy structure
- Shared layout, navigation, localization, theme, and UI components
- Page-level server data loading and client interaction components
- Prisma data model
- Existing Vitest and Playwright coverage
- Project README for the v1.6.0 feature and operating baseline
- Signed-in browser inspection using representative development data at 390 × 844 and 1440 × 900

The first browser pass covers representative signed-in user pages, administrator pages, all three locales, and the chart-preview exception. Rare, destructive, permission-denied, loading, and unpublished states still require targeted evidence where they can be reproduced safely.

Current Product Architecture

Application Shells

Shell	Source	Observed behavior
User shell	<code>app/(navigation)/layout.tsx</code>	Shared skip link, header, main area, and footer. The current shell is capped at 390px (max-w-97.5) even on wider viewports.
Authentication shell	<code>app/(auth)/layout.tsx</code>	Standalone authentication and onboarding pages with a skip link and no standard header/footer. Search indexing is disabled.
Administrator shell	<code>app/admin/layout.tsx</code>	Requires the administrator role, then renders the shared header/footer and an administrator navigation control. The current shell is also capped at 390px.
System states	<code>app/error.tsx</code> , <code>app/global-error.tsx</code> , <code>app/not-found.tsx</code> , <code>app/maintenance/page.tsx</code>	Localized route error, global error, not-found, retry, and maintenance experiences.

`navigation` is the current source route-group name. It is not exposed in the public URL.

Localization and URL Rules

- Supported user locales are Korean (`ko`), Japanese (`ja`), and English (`en`).
- User-facing pages use locale-prefixed paths such as `/ko/music`, `/ja/music`, and `/en/music`.
- A non-localized user request is redirected using, in order, path locale, signed-in preference, locale cookie, and browser `Accept-Language`.
- Administrator, API, Discord OAuth, and framework paths are not locale-prefixed.
- Signed-in users store a locale preference. Signed-out users can change language from the header menu.
- The music-title preference can show an approved Korean or English translation, or the stored Japanese reading title, while preserving the original title.
- User pages and global system states are localized. Administrator pages remain Korean.

Authentication and Permission Rules

- Discord OAuth is the login method.
- A signed-in account with an incomplete profile is redirected to onboarding.
- `/profile/settings` and `/onboarding` require authentication.
- A completed account cannot return to onboarding.
- Public content remains available without login, but personal records, editable bingo progress, exam submissions, preferred arcade selection, and private analytics depend on authentication.
- Administrator pages require an authenticated user whose role is `admin`; other users receive the not-found response.
- The user session lasts up to 14 days and uses an HTTP-only `SameSite=Lax` cookie.

User Page and Feature Inventory

Routes below are shown with `[locale]` standing for `ko`, `ja`, or `en`.

Family	Route	Access	Observed content and functions
Home	/[[locale]]	Public	Published announcements; NosLog identity and tagline; global music search; quick links to music, rankings, bingo, tiers, exams, and arcades; data-sync guide link; feedback dialog; official NOSTALGIA X timeline.
Music discovery	/[[locale]]/music	Public with personal enhancements	Title/artist/index search; category filters; Normal, Hard, Expert, and Real filters with level ranges; signed-in record filters; name, level, recent-play, and weakness sorting; ascending/descending order; list/grid view; cursor-based progressive loading; empty result state.
Music detail	/[[locale]]/music/[[index]]/[difficulty]	Public with personal enhancements	Difficulty switching and record, information, ranking, tier, and community/evaluation tabs; original and localized titles; jacket and metadata; personal record analytics; global music ranking; tier placement; user evaluation and voting features; canonical difficulty redirect and not-found states.
Public chart viewer	/[[locale]]/music/[[index]]/[difficulty]/pattern	Public when a valid chart revision is published	Music header and back navigation; falling and full-sheet tabs; left/right-hand legend; falling playback with play, restart, seek, local audio, note speed, metronome, metronome volume, and optional strict performance; full sheet grouped by four musical measures with timing labels; invalid or unpublished chart returns not-found. Local audio remains in the browser.
User rankings	/[[locale]]/rankings	Public with current-user enhancement	Basic/Recital mode; grade/rating metric where supported; all/Korea/Japan/global region filter; seven-row pagination; current user ranking; cached client transitions; loading and request-error states.
Tier lists	/[[locale]]/tiers	Public with personal record enhancement	Basic/Recital mode; S, Full Combo, and Pianist goal selection; difficulty and official-level filters; explanatory guide and rating-weight chart; tier bands loaded progressively; per-chart record details for signed-in users; loading, retry, empty, and no-published-list states.
Legacy tier redirect	/[[locale]]/tiers/[slug]	Public	Resolves the legacy list to the integrated mode/goal tier page and redirects.
Bingo list	/[[locale]]/bingo	Public with personal progress	Published and currently available bingos; resume card; all/in-progress/chance/completed filters; progress sorting; mini board, progress, completion, reward, availability, and empty state.
Bingo detail	/[[locale]]/bingo/[id]	Public; progress editing requires login	Cover music and translated title; description; line/cell progress; reward; 5-by-5 mission board; mission filters and list; selected mission details; authenticated completion editing; unavailable or invalid bingo returns not-found.
Exams	/[[locale]]/exams	Public; proof submission requires login	Basic/Recital modes; exam selection; requirements, rewards, stages and allowed charts; stored personal best values; simulation/advice; achievement and submission state; private proof upload; no-published-exam state.
Arcade discovery	/[[locale]]/gamecenter	Public; preferred arcade requires login	Region scope; arcade distribution map; text search; region-grouped list; expandable arcade details; location map, address copy, external Kakao Map link, machine count, price, operating status, business hours, notes, preferred-user count, and preferred arcade selection.
Data sync	/[[locale]]/bookmarklet	Public guide; token and history require login	Current sync status; latest result and analytics; bookmarklet installation and execution guide; GIF guidance; login prompt; signed token generation; token-regeneration warning and confirmation; processing, completed, failed, and no-sync states.
Public profile	/[[locale]]/profile/[id]	Public with owner-only analytics/actions	Profile identity, Basic/Recital switching, grade and global/country rank, summary, grade trend, rank distribution, best plays, recent plays, privacy-controlled fields, owner judgement analytics, share function, settings entry, and owner logout. Invalid/private-missing profile returns not-found.
Profile settings	/[[locale]]/profile/settings	Authenticated	Avatar upload; dark/light theme; display language; localized music-title toggle; preferred arcade; nickname; country/region; linked Discord display fields; profile privacy controls; validation and submission feedback; destructive account deletion confirmation.
Privacy policy	/[[locale]]/privacy	Public	Fully localized policy covering collected information, collection, retention, third parties, international transfer, deletion, user rights, cookies, security, contact, and changes.
Login	/[[locale]]/login	Signed-out	Discord OAuth entry, localized OAuth error messages, privacy notice, home navigation, and browse-without-login action. Signed-in users are redirected home.
Onboarding	/[[locale]]/onboarding	Signed-in incomplete profiles	Initial profile completion for the newly authenticated user. Completed profiles are redirected home.
Maintenance	/[[locale]]/maintenance through proxy handling	Public system state	Localized service-maintenance message. API requests receive a 503 response while the maintenance mode is active.

Shared User Navigation and Global Functions

Header

- Sticky 56px header.
- NosLog home link.
- Primary navigation: music, rankings, and tiers.
- Signed-out login action or signed-in profile avatar.
- Secondary menu: bingo, exams, arcades, and data sync.
- Administrator entry appears for an administrator.
- Signed-out secondary menu includes the locale switcher.
- On viewports below 1024px, the header hides after downward scrolling and reappears

near the top, on upward scrolling, or while keyboard focus is inside it.

- The menu locks body scrolling while open and closes with Escape.

Footer

- Copyright.
- Privacy policy.
- GitHub repository.

Global Preferences and Feedback

- Dark theme is the default; light theme is stored locally in the browser.
- Locale is stored in session/user data or a locale cookie.
- Localized music-title visibility is stored in the user profile.
- Global success/error notifications use a bottom-centered toast region.
- A skip link targets the single main content area.

Administrator Page and Feature Inventory

Administrator routes are Korean-only and use `/admin`.

Family	Routes	Observed content and functions
Operations dashboard	<code>/admin</code>	Service summaries; recent seven-day activity; processing-required tasks; content-management shortcuts.
Announcements	<code>/admin/announcements</code>	Create, edit, publish/unpublish, order by recency, and delete home announcements; empty state.
Arcades	<code>/admin/arcades</code>	Create and edit arcade name, region, coordinates, address, machine count, play price, coin count, operating status and note, business hours, general notes, and active state; empty state.
Users	<code>/admin/users</code>	Search by NosLog/NOSTALGIA/Discord identity; all/attention filtering; identity, country, role, play count, last play, sync health and data-count summaries; profile link; administrator role update; sync-token reset; empty state.
Music list and translations	<code>/admin/music</code>	Search music; filter translation locale and status; translation coverage summary; CSV validation/import/export flow; approve a draft translation; empty state.
Music detail	<code>/admin/music/[index]</code>	Edit shared music metadata and per-difficulty chart metadata; edit Korean and English translation title/status; display Japanese reading data; enter chart-pattern editor.

Family	Routes	Observed content and functions
Chart editor and preview	/admin/music/[index]/[difficulty]/pattern, /preview	Timing, BPM, meter and offset editing; note and path editing; local audio; history, save, revision, restore, publish and conflict handling; preview of the current draft in the public viewer UI.
Catalog update review	/admin/catalog	Pending/applied/rejected filters; inspect music catalog change candidates; apply or reject pending candidates; empty state.
Tier-list management	/admin/tiers, /new, /[id]	List active and legacy tier lists; create/update/delete list; status, mode, goal and description; create/update/delete bands; search/filter/paginate charts; place, move, reorder, and remove entries; board and placement editor.
Bingo management	/admin/bingos, /new, /[id]	List bingo status; create/update/delete bingo metadata, availability, cover music, reward and required lines; edit all 25 missions.
Exam management	/admin/exams, /new, /[id]	Search and filter by mode/status; show pending proof count; create/update/delete exam metadata, scoring, requirements, publication, rewards, stages, music and chart choices.
Exam proof review	/admin/submissions	Pending/approved/rejected filters; view private proof image; review note; approve/reject; remove rejected or approved proof data according to the available action; empty state.
Community evaluations	/admin/community	Review chart constants, note-pattern evaluations, comments, reactions and author; delete evaluation; empty state.
Feedback	/admin/feedback	Open/resolved filters; private attachment inspection; user profile link; message review; resolve or reopen report; empty state.
Sync operations	/admin/syncs	All/processing/completed/failed filters; recent completion/failure/processing/stale summaries; per-sync received/inserted/changed counts; snapshot/history completeness and health classification; error details; empty state.

The administrator menu currently exposes 13 top-level destinations through a compact dropdown grid.

Current Visual and Component Baseline

This section records implementation facts only. NosLog 2.0 is not constrained to retain these values.

Current Foundations

- Local variable Pretendard is the global font.
- The app supports dark and light semantic color tokens.
- Existing semantic token groups cover backgrounds, surfaces, text, interaction, status, chart/score, ranks, difficulties, exam modes, genres, Discord, and card radius.
- The current named type utilities are display, score display, title, wordmark, section, body, muted body, label, caption, micro, badge, and input.
- The shared user and administrator shells currently use a 390px maximum width.

Current Shared UI Components

- Button: primary, secondary, ghost, danger; small, medium, large, and icon sizes.
- Badge: neutral, outline, state, difficulty, mode, score, and rank variants.
- Card: card, header, title, and content primitives.
- Switch.
- Global toaster.
- Radix Dialog, Popover, Select, Slider, Switch, and Tabs are also used directly by feature components.

Many feature pages still contain locally styled controls and cards instead of using the small shared component set. This is an implementation observation, not yet an approved consolidation plan.

Primary Data Domains

The Prisma schema currently contains 34 models covering these product domains:

- user identity, profile, privacy, role, and brooches;
- announcements and feedback;
- arcades and preferred arcade;
- music catalog, translated titles, charts, and catalog candidates;
- chart patterns, revisions, timing documents, and evaluations;
- data sync attempts, play history, snapshots, and level-constant history;
- tier lists, bands, entries, and placement history;
- personal best grades and play data;
- bingos, cells, and user progress;
- exams, stages, allowed charts, rewards, submissions, and achievements.

Existing Product Verification Baseline

Automated Checks

- ESLint, TypeScript, Vitest, production build, Prisma migration, seeded E2E, and

Playwright are part of the documented CI flow.

- Public E2E coverage verifies:
- Korean, Japanese, and English paths;
- one main landmark, one level-one heading, a skip link, and named controls;
- no horizontal overflow on core 390px pages;
- header navigation;
- signed-out login and browsing;
- music list sorting and view mode;
- music-detail signed-out state;
- ranking mode changes;
- bingo filter/sort interaction;
- exam accordion interaction;
- tier mode/goal controls;
- absence of unhandled browser errors;
- relaxed desktop performance boundaries.

Browser Observation Pass 1

The browser evidence below was collected on 2026-07-29 from the running local development server. It used the signed-in representative profile with ID 8, which also has administrator access. The viewports were 390 × 844 and 1440 × 900.

These are current-product observations. They do not approve a NosLog 2.0 width, layout, hierarchy, or component decision.

Representative User Pages at 390px

Page family	Example path	Document height	Observed behavior
Home	/ko	985px	Announcement, identity, search, quick links, feedback, and official-news content render in one column.
Music discovery	/ko/music	1,747px	Search, filters, sorting, view controls, and music results fit without horizontal document overflow.
Music discovery	/ja/music	2,132px	Japanese UI and original titles fit without horizontal overflow; the page is taller than the ko/en pass.
Music discovery	/en/music	1,747px	English controls and labels fit without horizontal document overflow.
Music detail	/ko/music/59d7.../real	1,060px	Difficulty controls and four content tabs render inside the 390px shell.
Rankings	/ko/rankings	844px	Mode, metric, and region controls fit within the viewport width.
Tier lists	/ko/tiers	3,953px	Multiple tier bands form a long single-column reading flow.
Bingo list	/ko/bingo	6,010px	Filters and many bingo cards produce the longest inspected user-page scroll.
Exams	/ko/exams	913px	Mode, advice, grade selection, and stage content fit without horizontal overflow.
Arcade discovery	/ko/gamecenter	844px	Region and search controls plus the available arcade result fit in one column.
Data sync	/ko/bookmarklet	1,346px	Status, token, bookmarklet, sync result, and illustrated instructions form a sequential flow.
Public profile	/ko/profile/8	1,758px	Owner controls and record analytics render in the same single-column shell.
Profile settings	/ko/profile/settings, /en/profile/settings	2,128–2,200px	Eight settings groups and destructive account controls form a long settings flow in both locales.

No horizontal document overflow was measured on these representative mobile pages. The different Japanese music-list height is a localization stress signal to investigate with representative translated content; this pass does not assign a cause or prescribe a layout response.

Header Interaction at 390px

- The header begins at $y = 0$ with a measured height of 56px.
- After scrolling down to 700px, the header moves to $y = -56$ px.
- After scrolling back up to 350px, it returns to $y = 0$.
- This confirms the implemented hide-on-downward-scroll and reveal-on-upward-scroll

behavior in the rendered UI.

Desktop Shell at 1440px

- Home, music discovery, music detail, rankings, the administrator dashboard, and

inspected administrator list/management pages retained a centered 390px main column. Its measured horizontal position was $x = 525$ px.

- Dense administrator tasks such as music, user, exam, bingo, arcade, and sync

management therefore remain vertically stacked rather than using the available desktop width.

- Representative resulting page heights included approximately 7,335px for

administrator music, 3,246px for administrator bingo, 2,990px for administrator exams, 2,365px for administrator arcades, and 2,289px for administrator users.

- This confirms the existing shell constraint. It does not make 390px the NosLog 2.0

desktop baseline.

Chart Viewer Exception

- The administrator chart preview intentionally escapes the normal shell width.
- Its falling view measured 364×574 px inside the 390px viewport and

1,022 × 612px at the desktop width.

- The full-sheet view uses horizontally scrollable four-measure columns. At 390px, the scroll region measured 364px wide with 1,164px of horizontal content, and each inspected chart canvas measured 274 × 718px.
- The preview exposes play, restart, seek, local audio, note-speed, metronome, metronome-volume, and strict-performance controls.
- The inspected chart had an administrator preview but no published public revision: its public pattern URL correctly rendered the localized not-found state.
- The administrator preview currently renders two nested main landmarks. This is an observed issue only; the NosLog 2.0 initiative does not change it under the complete viewer/editor preservation boundary.

Observed Usability Symptoms

- Wide desktop viewports leave substantial unused horizontal space on ordinary user and administrator pages.
- Dense lists and management tools become very long single-column pages.
- Information-rich user pages such as bingo, tier lists, profile, and settings also rely heavily on vertical sequencing.
- The chart viewer already requires a different responsive model from ordinary content pages because its visualization has an intrinsic minimum useful width.
- Japanese and English must be tested with real long content rather than assumed to behave identically to Korean.

These symptoms identify investigation targets only. They do not yet authorize a specific grid, breakpoint, maximum width, navigation model, or content removal.

Browser Evidence Limits Recorded for Later Implementation QA

- signed-out login, browsing, and localized first-entry behavior in a clean session;
- a published public chart revision, because the inspected chart was preview-only;
- representative empty, loading, request-error, disabled, permission, and destructive states where they can be reproduced safely;
- long translated music titles and extreme real record values in all three locales;
- keyboard traversal, visible focus, menu focus management, and reduced-motion behavior;
- representative screenshots may be added during the later implementation QA only when a current acceptance test needs them.

Confirmed Audit Decisions

Priority User Page Families

1. Home is the primary entry experience. It must help a newly landed user understand where to go and obtain important information immediately.
2. Music discovery and music detail are primary product tasks. Music lookup is

expected to be one of the most frequent behaviors for a rhythm-game service, so discovery and detail must be treated as a connected high-priority journey.

3. Tier lists are a primary play-planning task. Many users choose what to play by

following tier-list progression, so the tier experience is also a high-priority page family.

These priorities determine research and pilot-screen order. They do not imply that other verified features may be removed silently.

Feature Disposition

- No existing feature is currently scheduled for removal or deferral.
- All verified user-facing functions remain in scope unless later evidence supports a change and the user explicitly approves it.
- Information architecture may consolidate, regroup, or progressively disclose functions, but this must not remove their capability or discoverability without a separate approved decision.
- Potential removal or deferral candidates discovered during page briefs or reference research must be presented with evidence and tradeoffs for discussion.

Administrator Scope

- Administrator functionality remains documented as part of the current product.
- The administrator interface is excluded from the NosLog 2.0 user-interface redesign.
- During the NosLog 2.0 user-facing work, administrator pages receive functional maintenance only unless separately authorized.
- A production-level administrator redesign may begin as a distinct post-2.0 phase.

Resolved Audit Follow-up Inputs

The later approved page briefs now identify representative real-data, long-content, private-state, and failure-state fixtures. Private or destructive states that cannot be reproduced safely remain code/schema evidence or use an isolated test environment; they are not missing design decisions. The downstream coverage index is document 64.

Ongoing Inventory Rules

1. Keep this inventory synchronized when approved 2.0 contracts add capabilities without misrepresenting them as current code.
2. Keep broad administrator redesign and the complete chart viewer/editor outside the current 2.0 design-guide scope.
3. Do not report the former audit follow-up questions as pending work.

NosLog 2.0 User Information Architecture and Navigation

docs/design/02-information-architecture.md

Document Control

- Status: Approved
- Evidence status: Current-product audit, repository inspection, browser evidence, and cited navigation guidance
- Date started: 2026-07-29
- Date approved: 2026-07-30
- Last decision update: 2026-08-08 (IA-21 refined by Home HOME-20)
- Language: English
- Input audit: [01-current-product-audit.md](#)
- Approved shared-shell contract:

[15-shared-shell-navigation-brief.md](#)

- Approved authentication and onboarding contract:

[17-authentication-onboarding-page-brief.md](#)

- Approved privacy and data-practices contract:

[18-privacy-data-practices-page-brief.md](#)

- Approved system-recovery states contract:

[19-system-recovery-states-page-brief.md](#)

- Chart viewer/editor preservation contract:

[07-chart-viewer-editor-preservation.md](#)

- Scope: User-facing NosLog 2.0 page families, information architecture, navigation, and important cross-page flows
- Excluded: Administrator-interface redesign, page-level visual composition, component styling, and final route migration

Decision Labels

Preservation override: Every chart-viewer/editor reference in this document is limited to product reachability and historical evidence. Document 07 supersedes any shell, layout, responsive, component, or behavior direction inside either locked experience.

- Confirmed: Explicitly agreed with the user and usable as a downstream requirement.
- Observed: Verified from the current product, repository, or browser.
- Proposed: Recommended for discussion; not approved for implementation.
- Open: Requires research, testing, or a user decision.

- Superseded: Replaced by a later approved decision and retained for history.

No proposed navigation or grouping in this document is approved merely because it is written here.

Purpose

This document turns the v1.6.0 feature inventory into a user-centered structure before page briefs or visual design begin. It must:

1. give every retained user-facing function a clear home;
2. distinguish page families from global-navigation destinations;
3. prioritize the most important tasks without deleting secondary functions;
4. define how users move between related pages;
5. expose unresolved navigation decisions before Figma or implementation work.

Confirmed Inputs

- Confirmed: Home is the most important first-entry experience. It must help users understand where to go and obtain important information immediately.

- Confirmed: Music discovery and music detail form a primary, high-frequency journey.

- Confirmed: Tier lists are a primary play-planning journey.

- Confirmed: No existing user-facing function is currently scheduled for removal or deferral.

- Confirmed: Secondary functions may be regrouped or progressively disclosed, but their capability and discoverability must be preserved.

- Confirmed: Administrator-interface redesign is outside the NosLog 2.0 user-facing scope and may be addressed after 2.0.

- Confirmed: Korean, Japanese, and English user routes retain locale-prefixed URLs.

- Confirmed: Mobile is the primary use context, while desktop remains a required responsive target.

- Confirmed: Ordinary pages use a responsive top header, not a persistent bottom navigation. The header contains the NosLog identity on the left and only the profile/account control plus the More control on the right.

- Confirmed: The More control opens distinct navigation blocks. Tier lists, bingo, and exams must remain separate NOSTALGIA contents and must not be placed under a combined label or landing page.

- Confirmed: Signed-out users see a visible Login text button in the header's account position.

- Confirmed: Home retains a grid-like set of direct navigation blocks so users can quickly move to each service function.

- Confirmed: Chart Viewer remains a directly discoverable home and More-panel destination, but it opens the shared music-search surface in chart-search scope rather than creating a duplicate search page.

- Confirmed: Music search and public-chart search share one search surface. A

compact leading scope selector inside the search field switches between them.

- Confirmed: Avoid persistent rows of mode and filter buttons when a compact,

understandable contextual selector or progressive disclosure can preserve the same capability and discoverability.

- Confirmed: Home does not add a signed-in personalization card for stale sync,

recent plays, or unfinished content.

- Confirmed: Feedback and error reporting move out of Home and remain available

from a consistent support area in the More panel. The current dialog-based submission flow is retained; focused-chart-viewer access is a later viewer-brief decision.

- Confirmed: Routine NosLog announcements and official NOSTALGIA news remain

lower-priority editorial content on Home after the core search, navigation, and Data Sync tasks. Home shows the newest three routine announcements as title-and-date links before one latest official X post.

- Confirmed: Privacy and GitHub remain footer destinations and are not duplicated

in the More panel.

- Confirmed: Settings becomes one public destination for signed-out and signed-in

users. Signed-out users can configure device-level experience preferences, while authenticated users see additional profile and account settings.

- Observed: The chart viewer needs a different width and control model from normal

content pages.

- Confirmed: The chart viewer uses a focused shell, and the falling/curved-path

viewer includes a fullscreen entry and exit.

Reference Basis

Source	Transferable principle	NosLog application	Limitation
W3C WCAG 2.2: Multiple Ways	Users should have more than one way to locate content within a set of pages.	Important music, tier, ranking, bingo, exam, and profile destinations should be reachable through the home grid, the More panel, search, or contextual links.	It does not prescribe a specific navigation component.
W3C WCAG 2.2: Consistent Navigation	Repeated navigation should remain in the same relative order.	Mobile and desktop may use different layouts, but destination meaning and relative order should remain predictable.	Different focused contexts may use a deliberately reduced shell when documented and tested.
W3C WCAG 2.2: Consistent Identification	Repeated functions should use consistent labels and identification.	Search, sync, profile, chart-viewer, and navigation labels must remain semantically consistent across ko, ja, and en.	Translation length may require different visual space without changing meaning.
W3C WCAG 2.2: Bypass Blocks	Repeated navigation must be bypassable for sequential navigation.	Preserve a skip link and semantic landmarks even if the navigation becomes richer.	This is an accessibility requirement, not a visual layout recommendation.
GOV.UK: Navigate a service	Navigation should link to the most useful top-level sections and should not become a site map.	The global NosLog navigation should expose a compact set of frequent destinations; all retained features do not need equal global prominence.	GOV.UK is a public-service context, so its visual pattern is not a NosLog art-direction reference.
GOV.UK: Service navigation	A service identity and navigation menu can remain in one top system, with multi-item navigation collapsing behind a menu at narrow widths.	Keep the NosLog identity and More control in a stable top header while allowing the navigation-block panel to adapt to available width.	The component's branding and exact visual treatment are not applicable to NosLog.
USWDS: Header	A header identifies the site and provides organized access to major sections; simple and expanded variants respond to available width.	Use a restrained header shell and let the More panel carry navigation blocks instead of forcing labels into the narrow header.	USWDS is an implementation reference, not a visual style source.
Carbon: Global header	A simple product can use a header-only shell, while the exact shell configuration should match information depth.	NosLog can preserve one semantic top-header model across mobile and desktop and adapt the opened panel rather than adding a mobile-only bottom model.	Carbon targets enterprise products and should inform structure only.
Carbon: Disclosures	Profile and More menus should expose concise global navigation and settings without becoming overcrowded.	Keep Settings and Feedback as compact utility entries after the product destinations; do not duplicate footer links or full setting controls inside the panel.	Carbon's enterprise examples do not determine NosLog's visual styling or exact labels.
Figma: UI design principles	Hierarchy and progressive disclosure should align visible priority with user need.	Home modules and secondary utilities should be ordered by task importance instead of rendered at equal weight.	The article provides principles rather than NosLog-specific evidence.
W3C: Guiding users to translated pages	Automatic language negotiation should be supplemented by a manual control, and an explicit choice should be remembered.	Keep language selection available to signed-out users through public Settings and preserve the explicit browser-level choice.	It addresses language selection, not the full settings information architecture.
Google Search settings	A public settings surface can expose language, theme, and browser-scoped experience preferences before sign-in.	NosLog's language and theme are valid signed-out settings rather than account-gated controls.	Google Search has a broader preference set and different personalization model.
YouTube: Change language or location settings	A service can store an explicit signed-out language choice in the browser and apply it across the site.	Use browser persistence for signed-out display preferences while reserving account-specific controls for authentication.	YouTube exposes some preferences directly in its profile menu rather than one public page.
GNU: Select language	A guest choice can override browser defaults through a narrowly scoped cookie without requiring an account.	Treat automatic locale detection as an initial default, not as a replacement for public manual settings.	This is a single-purpose language control, not a full application settings model.
GOV.UK: Footer	The footer is an appropriate persistent home for secondary service and policy links.	Keep Privacy in the footer instead of duplicating it in the task-oriented More panel.	Exact government footer content and visual treatment do not transfer.
USWDS: Footer	Footer content should support trust and secondary information without competing with primary navigation.	Keep Privacy and the external GitHub project link in the footer and outside the core destination hierarchy.	USWDS does not prescribe whether every product should expose GitHub.
Apple: Search fields	Clearly defined search categories may use a scope control, and the field or result area should communicate what can be searched.	One music-search surface can switch between Music and Chart scope while changing the field cue and result behavior.	Apple platform components are not copied as NosLog visual styling.
Baymard: Search scope	A manual scope selector should be self-evident, secondary to the search field, and placed close to it.	Place a compact leading selector inside the field instead of adding a permanent row of search-mode buttons.	The research is e-commerce-oriented; only the scope-clarity principle transfers.
W3C APG: Accessible names	Interactive controls require accessible names, and visible text is preferred when it can clarify purpose.	The compact icon selector needs an accessible name, expanded state, and text labels in its opened menu; the field cue and results reinforce the active scope.	An accessible name alone does not prove that an unfamiliar icon is visually understood.

Current Navigation Model

Observed Global Surfaces

Surface	Current destinations or role	Current priority signal
Brand link	Home	Home is available through the NosLog wordmark but is not named as a primary navigation item.
Primary header navigation	Music, rankings, tiers	Three destinations receive persistent direct access.
Secondary menu	Bingo, exams, arcades, data sync; administrator entry when authorized	These functions require opening the menu.
User control	Public profile through the signed-in avatar, or login while signed out	Identity and account access are visually separate from content navigation.
Home search	Music discovery with the query carried to the music page	The fastest current music-entry path.
Home shortcut grid	Music, rankings, bingo, tiers, exams, arcades	Six functions receive nearly equal visual weight.
Home utility row	Data sync	Sync is separated from the shortcut grid but is always present.
Home lower content	Feedback and official NOSTALGIA news	Supporting content follows product shortcuts.
Footer	Privacy and GitHub	Trust and external project information.

Observed Structural Symptoms

- The six home shortcut tiles currently have similar visual weight. Their exact hierarchy remains a page-brief decision, but the grid itself remains an approved navigation mechanism.
- Home is globally available through the NosLog identity and does not require a second labeled header destination.
- Music, rankings, and tiers currently occupy the header. In NosLog 2.0 they move into the More navigation blocks and the home grid, leaving the header visually restrained.
- Feedback and official news compete with core first-entry tasks when promoted as independent primary Home blocks. Data Sync remains a required peer destination and More-panel entry under the later approved Home contract.
- The current secondary menu already keeps bingo, exams, arcades, and data sync as distinct links. The redesigned More panel must retain that separation while improving the responsive block layout.
- Music detail, tier entries, exam stages, profile records, and ranking entries already create contextual routes to music. These relationships are valuable and should not be replaced by global navigation alone.

Approved User Page Families

Page families group related user goals and screen templates. They are not automatically global-navigation labels.

Page family	User question or goal	Included routes and functions	Confirmed or proposed relationship
Entry and orientation	"Where can I go, and what information is immediately useful?"	Home, routine-announcement summary, localized announcement archive and detail, global music search, direct navigation blocks, official news, feedback entry	Primary entry and routing hub
Music discovery and understanding	"Which music am I looking for, and what do its chart and records mean?"	Music search/list, music detail, difficulty switching, chart information, personal record, chart ranking, evaluation, published chart viewer	Primary product family
Tier-list planning	"Which chart should I play next for this goal?"	Tier lists, mode/goal selection, filters, tier bands, personal record context	Independent NOSTALGIA-related planning content
Bingo unlock and rewards	"What bingo progress unlocks music or earns NOS?"	Bingo list/detail, 5 × 5 missions, line/cell progress, music unlock and NOS reward context	Independent NOSTALGIA content; not a generic challenge branch

Page family	User question or goal	Included routes and functions	Confirmed or proposed relationship
Exam and certification	"What is my assessed skill level and which title can I earn?"	Exam selection, requirements, stages, allowed charts, simulation/ advice, NOS use, title/reward and proof submission	Independent NOSTALGIA skill-assessment content
Records and comparison	"How am I progressing, and how do I compare?"	Global rankings, public profile, grade/rating trends, best and recent plays, judgement analytics, public profile links	Cross-cuts music and separate NOSTALGIA content
Play support	"Where can I play, and how do I bring my records into NosLog?"	Arcade discovery, preferred arcade, data-sync guide, token and sync state	Secondary but essential operational support
Identity, preferences, and trust	"How do I enter, configure, and trust the service?"	Login, onboarding, public settings, authenticated profile/account settings, locale, theme, privacy, account deletion, maintenance, error and not-found states	Utility and lifecycle family
Focused chart experience	"How does this chart play over time?"	Chart-scoped discovery entry, falling chart view, fullscreen falling view, full-sheet view, local audio, playback controls, metronome, strict performance	Specialized child context of music with a direct discovery entry

Family Rules

- Every current user-facing route must belong to one primary family even if it has contextual links into several other families.
- A page family may contain multiple templates and states; it is not a promise that all pages share one layout.
- Music detail is the primary cross-link hub for a single chart.
- Tier, bingo, exam, profile, and ranking entries should preserve direct routes to the corresponding music detail where the data identifies a chart.
- Tier lists, bingo, and exams remain independent page families, navigation blocks, and product concepts. Do not create a shared umbrella label or combined landing page.
- The chart viewer remains reachable as the current child destination of Music; its complete existing shell and behavior are preserved under document 07.
- The Home and More Chart Viewer entries open the shared music-search surface with Chart search already selected. They do not bypass chart selection or create a separate duplicate catalog.
- Preserve the current falling/full-sheet and fullscreen behavior exactly; this information architecture does not redefine it.
- The chart editor remains the current administrator experience and is not a new user-facing page family. Document 07 preserves it in full.
- Legacy tier URLs remain compatibility redirects and are not navigation destinations.

Approved Structural Map

This map shows page-family relationships, not the final global-navigation component.

```

flowchart TD
    ROOT["NosLog user product"]
    HOME["Entry and orientation<br/>Home"]
    MUSIC["Music discovery and understanding<br/>Music list · detail"]
    TIERS["Tier-list planning<br/>Tiers"]
    BINGO["Bingo unlock and rewards<br/>Bingo"]
    EXAMS["Exam and certification<br/>Exams"]
    RECORDS["Records and comparison<br/>Rankings · profile"]
    SUPPORT["Play support<br/>Arcades · data sync"]
    TRUST["Identity, preferences, and trust<br/>Login · onboarding · settings · privacy"]
    VIEWER["Focused chart experience<br/>Falling · full sheet"]

    ROOT --> HOME
    ROOT --> MUSIC
    ROOT --> TIERS
    ROOT --> BINGO
    ROOT --> EXAMS
    ROOT --> RECORDS
    ROOT --> SUPPORT
    ROOT --> TRUST
    MUSIC --> VIEWER
    TIERS -. "chart context" .-> MUSIC
    BINGO -. "mission music" .-> MUSIC
    EXAMS -. "exam charts" .-> MUSIC
    RECORDS -. "play context" .-> MUSIC
    SUPPORT -. "record state" .-> RECORDS

```

Approved Hierarchy

Level 0: Service Shell

The repeated shell should provide:

- NosLog identity and a reliable route to home;
- a profile/account control;
- a More control that opens distinct destination blocks;
- a skip route to main content;
- stable navigation naming and order across localized pages.

Level 1: Confirmed Ordinary-Page Header

- Left: the NosLog identity, linked to home.
- Right: the profile/account control followed by the More icon control.
- Do not place Music, Rankings, Tiers, or other labeled destination links directly in

the header.

- Do not add persistent bottom navigation.
- Preserve the same semantic header structure across mobile and desktop. Responsive adaptation changes spacing and the opened panel layout, not the product taxonomy.

Signed-out pages use a visible Login text button in the same account position.

Level 2: Confirmed More Navigation

- Activating More opens a set of navigation blocks rather than exposing a mobile-only bottom bar.
- Music, Chart Viewer, Rankings, Tiers, Bingo, Exams, Arcades, and Data Sync remain distinct entry blocks. Chart Viewer routes into the shared music search with Chart scope selected.

- Tier lists, Bingo, and Exams must not be combined under a shared label.
- After the product destinations, a visually separate utility area provides Settings and Feedback/Error reporting. Use a visual divider without a visible utility-group label.
- Settings is the only settings-related More entry for both authentication states.

Do not add separate Language, Privacy, or GitHub entries.

- An authorized administrator entry may remain a separate block, even though administrator redesign is outside the NosLog 2.0 user-interface scope.
- The exact two-column destination order, compact modal behavior, wide popover behavior, scroll visibility, and shell variants are approved in [15-shared-shell-navigation-brief.md](#).

Public Settings Destination

- Use one locale-prefixed Settings destination, `/[[locale]]/settings`, for signed-out and signed-in users. Do not create a second guest-only settings route.
- Always expose service display language and theme. These preferences directly affect use of the public service.
- A signed-out user sees only these usable experience preferences plus a compact note that additional profile and account settings become available after login. Do not fill the page with disabled account controls.
- An authenticated user sees the shared experience preferences plus profile image, nickname, country/region, preferred arcade, profile-visibility controls, Discord connection, and account deletion.
- One global Settings entry does not require every control to live in one long form.

The Settings page brief may divide the family into responsive sections or child pages while preserving one predictable global entry.

- Theme remains device-local. For language, an existing account preference takes precedence after login; a newly created account is seeded from the explicit guest preference. Signing out restores the saved browser-level guest preference.
- Route migration must preserve existing localized links and evaluate a compatibility redirect from `/[[locale]]/profile/settings` before implementation.
- The complete approved category structure, persistence boundaries, profile editing, privacy, Discord identity, and account-lifecycle contract is defined in [16-settings-account-page-brief.md](#).

Footer Trust and Project Links

- Keep Privacy and GitHub in the ordinary-page footer.
- Do not duplicate either link in the More panel.
- Privacy must remain reachable while signed out and from the account-deletion context.
- GitHub is an external project-information link and must be identified and handled as external in the eventual component specification.

Home Navigation Blocks

- Home retains direct grid-like navigation blocks for the separate service contents.
- These blocks are page content, not a second global header and not a bottom navigation.
- The approved Home brief fixes eight equal peer destinations in the order Music →

Chart Viewer → Tiers → Rankings → Bingo → Exams → Arcades → Data Sync.

- Keep Data Sync as the eighth Home block and as a stable More-panel entry. The former separate Home row is superseded.

- Use the Home HOME-20 adaptive geometry: 3×3 while the destination region is compact and 4×2 when sufficient width is available. Keep the final compact row source ordered and unstretched. Block dimensions, gaps, padding, and label wrapping adapt without changing destinations or semantic order.

Confirmed Music and Chart Search Model

- Use one music-discovery search surface for both ordinary music lookup and public chart lookup.

- Put a compact scope selector at the leading edge of the search field. Its collapsed state uses the active scope icon and a disclosure indicator.

- Opening the selector presents visible, localized options for Music search and Chart search. Do not place a persistent segmented-button row above the field.

- Change the field cue with the active scope: ordinary music search communicates title/artist lookup, while chart search communicates public-chart lookup.

- Preserve the current query when switching scope unless later usability testing finds that doing so creates misleading results.

- Music entry points open the Music scope. Home and More Chart Viewer entry points open the same surface with Chart scope already selected.

- Chart scope returns only music/difficulties with published charts. Selecting a published difficulty goes directly to its focused viewer.

- The exact result-card composition, chart grouping, contextual filters, and desktop arrangement remain page-brief and prototype decisions.

- The selector must expose an accessible name, selected value, expanded state, keyboard behavior, focus return, and text labels in the opened menu. Scope must not depend on icon recognition alone.

Home Information Architecture

Confirmed Role

Home is an orientation and routing surface, not a miniature copy of every page.

Approved Content Role and Ordering

1. Service-critical notice: show only when an announcement or service state materially affects use.

2. Primary music search: remain immediately available because music lookup is a high-frequency task. It includes the approved compact Music/Chart scope selector.

3. Navigation blocks: retain separate direct blocks for Music, Chart Viewer, Rankings, Tiers, Bingo, Exams, Arcades, and Data Sync in the approved 4×2 collection. Do not introduce an umbrella content label.

4. Editorial content: show the newest three routine NosLog announcement links, followed by one latest official NOSTALGIA X post, after core product tasks.

Explicitly Excluded Home Content

- Do not add a signed-in personalization card for stale sync, recent plays, unfinished bingo, exams, or other next actions.
- Do not turn home into a personal-record dashboard.
- Authentication may change the profile/account control and access-dependent content, but it does not add the proposed personalization module.

Retained Secondary Content

- Data sync: do not remove it. Keep it as the eighth peer in the Home destination collection and retain a stable More-panel route.
- Feedback: do not remove it. Move its existing dialog-based entry from Home to the consistent support area in the More panel. Do not duplicate it in the footer.
- Routine NosLog announcements: show only the newest three title-and-publication-date links on Home, newest first. Each link opens a localized public detail page, and an “All announcements” link opens the localized archive. Do not expand full bodies on Home, do not add older items on wider layouts, and omit the entire section when no published item exists.
- Official news: retain one latest NOSTALGIA_573 source post through X’s official

Embedded Timeline in a distinct area immediately after routine announcements. Keep the localized official-channel link as the empty and load-failure fallback.

The exact block proportions remain open until representative layout work is approved.

Important User Flows

Flow	Entry	Required sequence	Success condition	Important recovery or branch
Find music quickly	Home search, Music block, or More	Open Music scope → search/filter → music result → music detail	User reaches the correct music information with the original and selected localized title understood	No results, ambiguous title, unavailable difficulty
Open a public chart	Chart Viewer block or More	Open Chart scope → search/filter → published difficulty → focused viewer	User reaches and can play or inspect the intended published chart	No published chart, filter empty state, unavailable difficulty, playback or local-audio issue
Choose what to play by tier	Home block or More → Tiers	Select mode/goal → inspect band → select chart → music detail	User identifies an appropriate next chart and can inspect their record	No published list, missing personal record, filter empty state
Progress through Bingo	Home block or More → Bingo	Select Bingo → inspect 5 × 5 missions → update progress → understand unlock/NOS	User understands progress toward music unlocks or NOS rewards	Login required, invalid Bingo or mission, save failure
Take an Exam	Home block or More → Exams	Select Exam → inspect requirements/stages → assess or submit → title/reward state	User understands the skill assessment, NOS use, and title/reward outcome	Login required, no published Exam, incomplete proof, validation or upload error
Review progress	Profile avatar, home block, or More	Profile/ranking → summary or entry → music detail	User understands current standing or record and can inspect supporting plays	Private field, signed-out state, no plays, ranking request error
Establish or recover sync	Home entry or More → Data Sync	Understand state → install/run bookmarklet → inspect result → profile	User knows whether records are current and what changed	Token regeneration, processing, stale, partial, failed, or no-history state
Read a NosLog announcement	Home update or announcement archive	Open summary/archive → select announcement → read localized detail	User can read the complete current or historical NosLog notice in the selected locale	No published items, missing translation, removed or unavailable announcement
Inspect chart playback	Music detail → Chart viewer	Enter focused viewer → configure/play → optionally enter fullscreen → exit/return	User can understand chart timing and hand/path behavior without losing music context	Unpublished chart, fullscreen unavailable, local audio absent, narrow viewport, playback error
Authenticate and complete an account	Header Login or account-only action	Contextual Login → Discord OAuth → minimal Onboarding when new → safe return	User reaches the original validated destination with a complete NosLog identity	OAuth cancellation/expiry, provider failure, nickname conflict, logout and public browsing

Cross-Link Requirements

- Music must be reachable through the home grid, More panel, home search, and contextual chart links from tiers, bingo, exams, profile plays, and rankings where data permits.
- Chart Viewer must have distinct Home and More entry blocks that open the shared music search in Chart scope.
- Tiers, Bingo, Exams, and Rankings must each remain independently reachable through the home grid and More panel.
- Profile must be reachable through the signed-in identity control and public user links.
- Data Sync must be reachable from the Home destination collection and the More panel.
- Settings must be reachable through one More-panel entry while signed out or signed in; authentication changes the available settings, not the destination identity.
- Login must preserve one validated internal destination through Discord OAuth and any required Onboarding. An incomplete account is redirected to Onboarding with a concise destination reason and can explicitly log out to public Home.
- Feedback and error reporting must be reachable through the More panel on ordinary pages. Its focused-chart-viewer entry remains a viewer-brief decision.
- Each Home routine-announcement row must open its localized public detail page. The Home “All announcements” link must open the localized chronological archive, and archive entries must link to the same detail destinations.

- Privacy must be reachable from the footer without authentication and from account-destructive decisions. GitHub remains a footer-only external project link.
- No retained page may become an orphan that depends on a remembered URL.

Confirmed Responsive Navigation Direction

Ordinary Pages: Top Header

- Use one responsive top-header model across mobile and desktop.
- Keep the NosLog identity at the left.
- Keep only the profile/account control and More icon at the right.
- Activating More opens the navigation-block panel.
- Do not add a persistent bottom navigation.
- On compact layouts, hide the header on downward scroll and reveal it on upward scroll. On wider desktop layouts, keep it persistently visible and sticky.
- The panel uses the same approved two-column semantic order across widths. It is a full-width modal below the header in compact layouts and a right-anchored non-modal popover in wide layouts.

This direction is consistent with production header systems that keep service identity and a responsive menu in a top shell. The exact NosLog layout must still be designed from its content rather than copied from GOV.UK, USWDS, or Carbon.

Home: Page-Level Navigation Grid

- Keep the home navigation blocks as page content.
- Allow the grid to adapt its columns, gaps, and block proportions to available space.
- Do not treat the home grid as duplicated global navigation; it is the home page's routing function.
- Preserve separate blocks for Tier lists, Bingo, and Exams.

Chart Viewer: Focused Shell

- Preserve the existing chart-viewer route, shell, navigation, identity, tabs, fullscreen behavior, controls, state, and return behavior exactly.
- This information architecture may retain entry into the existing destination but may not add, remove, reorganize, or reinterpret anything inside it.
- Document 07 supersedes every earlier viewer-shell proposal.

Rejected or Superseded Alternatives

- Persistent mobile bottom navigation - Rejected: It does not match the approved responsive shell direction and would introduce a mobile-only navigation component.
- Signed-in home personalization card - Rejected: Home remains focused on rapid information access and navigation rather than personal next-action modules.
- Shared challenge grouping for Tier lists, Bingo, and Exams - Rejected: It distorts three separate NOSTALGIA content models and their different purposes.
- Separate duplicate chart-search page - Superseded: Chart Viewer keeps direct Home

and More entry points, but both enter the shared music-search surface in Chart scope.

- Persistent Music/Chart button row above search - Rejected: It adds permanent

control density for a two-mode contextual choice. Use the approved compact leading scope selector with visible text in its opened menu and scope-specific field cues.

Desktop Adaptation Principles

- Do not retain the current centered 390px shell as the general desktop architecture.
- Preserve the same left-identity/right-profile-and-More header model used on mobile.
- Adapt the More panel and home grid to available width rather than switching to a bottom or desktop-only taxonomy.
- Use additional width for comparison, filtering, record analysis, and related context, not merely larger cards or larger empty margins.
- Keep a clear primary content column even when secondary panels are introduced.
- Do not create a separate desktop-only feature taxonomy.
- The focused chart viewer may use substantially more width than ordinary reading pages.

Localization and Accessibility Requirements

- Validate every global and secondary navigation label in Korean, Japanese, and English.
- Do not change a destination's meaning only to make a translation shorter.
- Repeated navigation keeps the same relative order across the pages of each locale.
- Current-page state uses semantic `aria-current` or the appropriate equivalent.
- Menus expose name, role, expanded state, controlled content, Escape behavior, and predictable focus return.
- The Music/Chart search selector exposes its selected value and expanded state, keeps visible text labels in the opened menu, and reinforces the active scope through the field cue and results.
- A skip link and a single page-level main landmark remain required in ordinary pages.
- The chart viewer's currently observed landmark structure is recorded as audit evidence only; NosLog 2.0 does not change it under document 07.
- Interactive targets must meet WCAG 2.2 minimum target-size or spacing requirements; frequent mobile destinations should aim larger than the minimum.
- Visual reordering at wider widths must not create an illogical reading or focus order.

URL and Routing Position

- Confirmed: Continue locale prefixes: `/ko`, `/ja`, and `/en`.
- Approved: Preserve current user route slugs during the first design milestone unless a route prevents the agreed hierarchy or creates a clear usability problem.
- Approved: Treat `/tiers/[slug]` as compatibility behavior, not an exposed IA node.
- Confirmed: Tier lists, Bingo, and Exams do not receive a shared landing page or



navigation grouping. Any unrelated future grouping requires separate evidence and explicit user approval.

- Confirmed: Music and Chart search share the Music discovery route family. The

active scope must be restorable through history and shareable URL state; the exact path-versus-query representation remains an implementation decision.

- Confirmed: Routine announcement archive and detail pages are public,

locale-prefixed destinations in the Entry and orientation family. Exact slugs remain an implementation decision and require localized canonical and shared-link handling.

- Any route change must include redirect, canonical, shared-link, localization, and

analytics consequences before approval.

Decision Register

ID	Decision	Resolved direction or remaining question	Status
IA-01	Ordinary responsive navigation	Top header: NosLog left; profile/account and More right; no bottom navigation	Approved
IA-02	Chart-viewer destination	Preserve the complete existing viewer and its current entry/return behavior under document 07	Approved correction
IA-03	Rankings navigation	Access through its independent home block and More block, not a direct labeled header link	Approved
IA-04	Home signed-in personalization	Do not add a stale-sync, recent-play, or unfinished-content card	Rejected
IA-05	Data Sync placement	Superseded by IA-21 and Home HOME-18; the earlier decision used a separate Home row while retaining a stable More entry	Superseded
IA-06	Feedback placement	More-panel support utility on ordinary pages; retain the dialog flow and omit it from Home/footer; do not alter viewer feedback access	Approved correction
IA-07	Official-news placement	Show one latest NOSTALGIA_573 source post through X's official widget after routine NosLog announcements; retain a localized official-channel fallback	Approved
IA-08	Tier/Bingo/Exam relationship	Keep all three as independent page families and navigation blocks; no umbrella label	Approved
IA-09	General desktop navigation	Preserve the same top-header semantics; adapt More panel and content grid to available width	Approved
IA-10	Signed-out account control	Show a visible Login text button in the account position	Approved
IA-11	More-panel contents and order	Use the approved two-column order for eight product destinations, a divider, Settings and Feedback utilities, then conditional Admin; no group heading	Approved
IA-12	Header scroll behavior	Compact layouts hide downward and reveal upward; wider desktop layouts remain persistently visible and sticky	Approved
IA-13	Music/Chart search architecture	One shared search surface with a compact leading scope selector; Chart entry preselects Chart scope	Approved
IA-14	Persistent control density	Avoid permanent button rows when a clear contextual selector or progressive disclosure preserves the task	Approved
IA-15	Public Settings destination	One <code>/[locale]/settings</code> entry for all users; guest experience preferences remain usable and account controls appear only after login	Approved
IA-16	Preference ownership	Theme stays device-local; existing account language/title settings win after login, new accounts inherit explicit guest choices	Approved
IA-17	Footer destinations	Keep Privacy and GitHub in the footer and do not duplicate them in More	Approved
IA-18	Routine announcement structure	Home shows the newest three title-and-date links on every viewport; localized detail and archive retain complete history; omit the section when empty	Approved
IA-19	Authentication and onboarding	One Discord action, public-browse alternative, two-field completion, incomplete-profile gate, logout escape, and validated destination return	Approved
IA-20	User-facing chart contribution	Former proposal cancelled; preserve the existing administrator editor and create no new user editor/contribution flow	Superseded by document 07
IA-21	Home destination collection	Use eight equal peer blocks including Data Sync; Home HOME-20 governs adaptive 3×3 compact and 4×2 sufficient-width geometry; retain the separate Data Sync More entry	Approved – refined by HOME-20

Phase Approval

The user approved this information-architecture phase as a whole on 2026-07-30 after reviewing the resolved decision register. At that approval, visual composition, exact responsive ordering, and page-specific states remained page-brief decisions; the approval did not silently resolve them. The user-approved Home brief later refined the editorial destinations recorded in IA-07 and IA-18 without changing the approved page-family hierarchy. On 2026-08-08, Home HOME-18 and IA-21 superseded IA-05's separate Data Sync Home row. The later HOME-20 refined the collection geometry to adaptive compact 3×3 and sufficient-width 4×2 . The subsequently approved shared-discovery brief refined signed-out personal-control behavior and the Music/Chart scope contracts without changing that hierarchy. The subsequently approved shared-shell brief resolved the global destination order, compact modal, wide popover, header visibility, shell variants, and footer ownership while preserving the same information architecture. The subsequently approved authentication and onboarding brief resolved the Discord entry, public-browse alternative, minimal completion gate, safe return, and recovery without changing the public page hierarchy. The subsequently approved privacy and data-practices brief resolved the layered public-policy structure, fourteen-and-older account eligibility, public-data consequences, retention and provider disclosure, cookies and device storage, policy versioning, and rights paths. Legally sufficient operator identity, final legal copy, provider and deletion facts, and human-reviewed translation remain explicit release blockers rather than inferred information-architecture decisions. The subsequently approved system-recovery brief resolved the distinct ordinary-shell Not-found and recoverable-error states and the minimal-shell fatal-error and planned-Maintenance states without adding a navigation destination. Page-specific composition and states remain governed by their page briefs. The former user-facing chart-contribution child flow was later cancelled by the complete chart viewer/editor preservation boundary in document 07.

Acceptance Criteria for This Artifact

- Every retained user route is assigned to one primary page family.
- No verified feature disappears from the page-family map or cross-link requirements.
- Home, music, and tiers receive explicit first-class treatment.
- Administrator redesign is not mixed into the user-facing navigation model.
- Approved decisions, observed evidence, and unresolved release blockers are visibly distinguished.
- Important flows include success and recovery branches.
- Mobile and desktop use the same semantic hierarchy even if their navigation components differ.
- Korean, Japanese, and English constraints are included before labels are finalized.
- The user approved the resolved decision register before page-brief work began.

Downstream Application Rules

1. Apply the approved shared-shell contract consistently to later page briefs, Foundation specimens, downstream design, and implementation mapping.
2. Keep page-specific content, actions, and states in their own briefs rather than expanding the global shell.
3. Preserve the approved Home and shared-discovery contracts while defining downstream destinations and return states.
4. Preserve this approved information architecture unless a later explicitly approved decision supersedes a recorded item.
5. Apply the approved authentication and onboarding contract to every account-only



action without duplicating provider or completion logic inside destination pages.

6. Apply the approved privacy and data-practices contract at every collection, public disclosure, upload, synchronization, external-service, and account-lifecycle context without representing its release blockers as resolved.

7. Apply the approved system-recovery contract to Not found, page error, fatal error, and planned Maintenance without turning recovery states into navigation destinations.

NosLog 2.0 Home Page Brief

docs/design/03-home-page-brief.md

Document Control

- Status: Approved
- Evidence status: Repository and browser audit complete; reference comparison complete
- Date started: 2026-07-30
- Date approved: 2026-07-31
- Last amended: 2026-08-08 (HOME-20)
- Language: English
- Parent information architecture:

[02-information-architecture.md](#)

- Input audit: [01-current-product-audit.md](#)
- Scope: The localized user Home routes /ko, /ja, and /en
- Excluded: Final high-fidelity layout, foundation tokens, component styling, administrator redesign, and application implementation

Decision Labels

Preservation override: Home may retain the current viewer destination, but this brief authorizes no change inside the chart viewer/editor. Document 07 governs the complete locked experiences.

- Observed: Verified in the repository, current UI, or browser.
- Approved: Explicitly agreed by the user or inherited from an approved artifact.
- Proposed: Recommended for discussion and not approved yet.
- Open: Requires a user decision or later validation.
- Rejected: Explicitly excluded from the direction.
- Superseded: Replaced by a later approved decision and retained for history.

This brief defines required content, behavior, states, and responsive intent. It does not authorize Claude Design or a later Codex implementation session to invent missing product decisions.

Page Purpose and User Context

Approved Purpose

Home is the primary orientation and routing surface for NosLog. It must let a user:

1. understand that NosLog is a NOSTALGIA record, ranking, tier, and chart archive;
2. search for a music entry or published chart immediately;
3. recognize and reach the important product destinations without learning the entire site structure;

4. notice a service condition that materially affects the current visit; and
5. reach the remaining approved destinations and official news after the core tasks.

Home is not a personal-record dashboard, a miniature copy of every feature, or a long marketing explanation of NOSTALGIA.

Primary Contexts

Context	User need	Home implication
Around arcade play on mobile	Find a music entry, chart, tier position, requirement, or arcade quickly.	Search and direct destinations must be available before editorial content and without long scanning.
Returning mobile user	Re-enter a known product area with minimal friction.	Stable labels, relative order, and large reliable targets matter more than introductory copy.
First-time or signed-out visitor	Understand the service and find public content without an account.	Identity and public capabilities must be clear; login cannot block browsing.
Desktop research or comparison	Use more space to scan destinations, updates, and dense downstream data.	The Home shell must expand beyond the current 390px column without changing its semantic hierarchy.
Korean, Japanese, or English	Read controls and service information in the selected language.	UI and editorial content need an explicit localization policy, not translated labels alone.

Authentication changes the account control and access-dependent actions. It does not create a personalized Home dashboard or reorder the core Home hierarchy.

Primary Task and Success Conditions

Approved Primary Task

The primary Home task is to find the intended music entry or published chart and continue to the relevant detail or viewer flow.

Secondary Tasks

- Open Music, Chart Viewer, Rankings, Tiers, Bingo, Exams, Arcades, or Data Sync directly.
- Read a service-critical notice when one applies.
- Reach lower-priority official NOSTALGIA news.

Success Conditions

A Home visit succeeds when the user can do one of the following without ambiguity:

- select Music or Chart search scope, submit a title or artist query, and arrive at the matching shared search surface;
- browse the selected search scope without first entering a query;
- open one of the eight approved product destinations, including Data Sync; or
- understand a service condition that changes whether or how NosLog can be used.

Confirmed Product Inputs

- Approved: Mobile is the primary context, centered on a 390px baseline; desktop remains required.
- Approved: Ordinary pages use the responsive top header. Home does not introduce

fixed bottom navigation.

- Approved: Home keeps a page-level direct-navigation block collection.
- Approved: Preserve the compact N logo mark in the Home identity region. The mark supports, but never replaces, the visible NosLog heading and localized service description.
- Approved: Music and Chart search share one surface with a compact leading scope selector. The Chart Viewer entry opens the shared search with Chart scope selected.
- Approved: Music, Chart Viewer, Rankings, Tiers, Bingo, Exams, Arcades, and Data Sync remain separate destinations. Do not introduce an umbrella content label.
- Approved: Data Sync joins the Home destination collection as its eighth peer block and remains a stable More-panel entry. The former separate Home row is superseded.
- Approved: Feedback moves out of Home into the More panel and is not duplicated in the footer.
- Approved: Privacy and GitHub remain footer destinations.
- Rejected: A signed-in personalization card for stale sync, recent play, or incomplete Bingo or Exams.
- Approved: Official news uses X's official Embedded Timeline for the NOSTALGIA_573 account and presents its latest post as one item in a distinct official-news grid or region immediately after routine NosLog announcements.
- Approved: Do not add a paid X API, scraping, or another unofficial retrieval service for this Home requirement.
- Observed: The current official-widget integration does not render the post in the verified browser, so its implementation must be corrected and browser-verified rather than copied unchanged into NosLog 2.0.
- Approved: NosLog-authored notices require Korean, Japanese, and English content. The external official X post remains in its source language; NosLog localizes the surrounding heading, link, and fallback text.
- Approved: Home shows the three newest routine NosLog announcements as compact title-and-date links. It does not expand full announcement bodies in place.
- Approved: Each routine announcement opens a localized public detail page, and an "All announcements" link opens the localized announcement archive. Home omits the entire routine-announcement section when no published item exists.
- Approved: The three-item Home limit remains the same on mobile and desktop.

Current Product Baseline

Current Route and Dependencies

The current server-rendered Home route is `app/(navigation)/(home)/page.tsx`. It loads:

- the current user;
- up to three published NosLog announcements, newest first;
- the selected locale and message catalog;
- the ordinary Header and Footer;

- a Music-only search form;
- six equal quick links: Music, Rankings, Bingo, Tiers, Exams, and Arcades;
- a separate Data Sync link;
- the current Feedback dialog trigger; and
- a lazily loaded official X timeline.

The current Announcement model stores one title and one body with no locale, severity, expiry, or target-audience fields. The administrator input limits are 80 characters for a title and 2,000 characters for a body.

Browser Evidence: 2026-07-30

Check	Observed result
390 × 844 Korean Home	985px document height; no document-level horizontal overflow; one-column content.
390px Japanese and English	No document-level horizontal overflow in either locale; UI labels translate, but the stored announcement remains Korean.
1440 × 1000 Home	Header and Main remain a centered 390px column at x = 525px; available desktop width is unused.
Current content order	Announcement → identity and Music search → six quick links → Data Sync → Feedback → official news.
Official X before scroll	A localized fallback link is present and no X iframe or script has loaded.
Official X after scroll	Scripts and three X/Twitter iframes load, but the Timeline iframe remains hidden at 0 × 0 and only the fallback link is usable.
Empty announcements	The entire announcement section is omitted.
Empty Music query	Both /ko/music and /ko/music?q= open the filterable default catalog; the first loaded batch contains 20 Music links and no validation error.
Whitespace Music query	/ko/music?q=%20%20%20 is normalized to the same default catalog and leaves the visible search field empty.
Specific Music query	/ko/music?q=Altale preserves the visible query and narrows the first result set to the matching Music entry.

These observations identify functionality and risk. They do not approve the current 390px desktop constraint, equal card proportions, content order, or styling.

Content Inventory and Disposition

Content or function	Required disposition	Status
Ordinary Header	Use the approved responsive shell; Home does not add a second global navigation system.	Approved
Service identity	Keep a concise NosLog identity and NOSTALGIA context near the primary search.	Approved
Home N logo mark	Preserve the compact mark beside or above the identity; do not use it as the only accessible Home name.	Approved
Service-critical notice	Show at most the highest-impact active service notice before search; reserve no gap when none exists.	Approved
Routine NosLog announcements	Show the newest three as compact title-and-date links in a lower updates area; link to localized detail and archive pages.	Approved
Music and Chart search	Make the shared scope-aware search the strongest Home task.	Approved
Eight destination blocks	Keep Music, Chart Viewer, Rankings, Tiers, Bingo, Exams, Arcades, and Data Sync separately discoverable in one collection.	Approved
Feedback	Remove the Home trigger and provide it in the More panel.	Approved
Official NOSTALGIA news	Use the official X Embedded Timeline to show the latest source post once in a distinct grid immediately after NosLog announcements.	Approved
Personalized next-action module	Do not add.	Rejected
Footer	Keep Privacy and GitHub as stable secondary destinations.	Approved

Reference Comparison

References were reviewed on 2026-07-30. They contribute different roles and are not visual templates to copy.

Source	Transferable principle	NosLog application	Limitation
W3C WCAG 2.2: Multiple Ways	Search and direct navigation can provide different valid ways to locate the same content.	Keep both the strong shared search and direct Home destinations; neither replaces the other.	It does not specify visual prominence or card layout.
W3C WCAG 2.2: Headings and Labels	Headings and labels should describe purpose so users can orient and predict content.	Search scope, destination names, notices, and news need descriptive visible text in every locale.	It does not choose NosLog terminology.
Figma: UI Design Principles	Hierarchy, progressive disclosure, consistency, proximity, and alignment reduce cognitive load.	Search, destinations, support, and editorial content should not receive equal visual weight merely because all are retained.	It provides general principles rather than domain evidence.
GOV.UK: Navigate a Service	Repeated, multi-task services benefit from concise navigation to the most useful top-level sections, not a site map.	Keep the global Header restrained while Home provides task-oriented entry points to the approved product destinations.	Government-service styling and exact header composition are not applicable.
USWDS: Card	Cards are actionable summaries in related collections; simple actions may be better represented without a card.	Treat the eight direct destinations as an enumerable link collection; their final component need not copy a content-heavy card.	It does not require cards or determine NosLog priority or grid geometry.
Tailwind CSS: Responsive Design	Start mobile-first and adapt components at wider breakpoints; container queries respond to actual available space.	Preserve one semantic order while allowing Home blocks and updates to recompose when their containers gain usable width.	Framework capability is not evidence for a particular breakpoint or number of columns.
Taiko.wiki Home	A rhythm-game reference can combine direct domain destinations, new charts, and separate service and official notices.	Keep domain tasks and updates discoverable but distinguish them by purpose and priority.	Its labels, density, and administration model are specific to Taiko.wiki and must not be copied.
Taiko.wiki Song Search	Search, new charts, genres, and difficulty filters support chart-oriented discovery.	Home should hand off to a capable shared search rather than reproducing its complete filter set.	The search-results page is not a Home layout model.
MusicBrainz Home	A music database keeps typed search persistent while placing explanation, news, and community content below it.	Make search a stable product control and keep explanatory or editorial content secondary.	MusicBrainz has contribution and encyclopedia goals that NosLog does not share.
Songsterr Home	A chart/tab service places search first, adds a compact scope choice, and then exposes browsable popular content.	Confirm the value of an immediate chart-oriented search with a compact scope control.	Its instrument scope and popularity list do not map to NOSTALGIA modes or NosLog priorities.
osu! Home	A rhythm-game service preserves direct Beatmaps and Rankings destinations with a strong service identity.	Keep domain terminology and direct routes recognizable rather than hiding everything behind a generic menu.	The public Home prioritizes downloading the playable game, while NosLog is an archive and viewer.
Official NOSTALGIA Op.3	Official material establishes NOSTALGIA terminology, piano interaction, hand colors, and arcade context.	NosLog identity and viewer descriptions must remain faithful to the covered game and clearly unofficial.	It is a marketing and instruction page, not a records-service Home pattern.
USWDS: Site Alert	Sitewide alerts are for urgent, time-sensitive service information; place them prominently and avoid stacking them.	Reserve the pre-search position for at most the highest-impact active service notice, not routine project updates.	A government-wide emergency pattern would be excessive for ordinary NosLog announcements.
GOV.UK: Notification Banner	A notification banner communicates important information not directly tied to the current page content.	Treat an active service condition as a distinct message role rather than making every announcement a top banner.	The component does not define an editorial news area or NosLog publishing rules.
Carbon: Notification	Notification disruptiveness should match purpose; contextual callouts belong near the content they affect.	Separate operational conditions from routine updates and keep either message concise and linked to details when necessary.	Carbon does not yet provide finalized banner guidance for every product-level use case.
W3C APG: Alert Pattern	Alerts are brief, important, and time-sensitive; frequent interruptions and automatic disappearance harm usability.	Do not use live alert semantics for static routine updates and do not make important service messages disappear automatically.	ARIA semantics do not decide visual placement or editorial priority.
X Help: Embed a Timeline	An embedded profile timeline displays public posts from the source account on another website.	Retain the original official NOSTALGIA source on Home while keeping an external link fallback.	The embed is a third-party runtime with privacy, performance, and availability costs.
X Help: X for Websites and Privacy	Viewing embedded X content can send page, IP address, browser, operating-system, and cookie information to X.	Treat the approved embed as optional third-party content and disclose or govern it consistently with NosLog privacy policy.	This describes X data handling, not NosLog's final consent or privacy implementation.

HOME- 12 Focused Reference Comparison

The desktop-composition decision compared twenty-seven external sources across authoritative responsive guidance, production discovery products, rhythm-game and music-domain services, and editorial art-direction references. The comparison was continued until the same layout principles recurred without producing a materially different NosLog option.

Source	Observed pattern or role	NosLog application	Limitation
W3C: CSS C32	Responsive regions reflow without two-dimensional scrolling, and visual rearrangement must not break meaningful source or focus order.	Keep one semantic Home order across widths and let CSS recompose regions without moving updates ahead of primary tasks.	It establishes accessibility behavior, not a preferred visual grid.
GOV.UK: Layout	A mobile-first single column can become controlled two-thirds or two-thirds-plus-one-third layouts; content width should match its needs.	Remove the 390px desktop constraint, but use bounded content regions rather than stretching every Home element across the viewport.	Government long-form layouts are quieter and more text-led than NosLog Home.
USWDS: Layout Grid	A centered, flexible, mobile-first twelve-column grid supports responsive column spans.	Align major Home zones to a shared desktop grid while allowing local collections to choose their own appropriate spans.	The utility system does not determine NosLog hierarchy or breakpoints.
Material 3: Canonical Layouts	Feed grids support peer collections; supporting panes are appropriate when secondary content directly supports the primary task.	Use a grid for peer destinations, but do not place unrelated announcements in a permanent supporting rail beside search.	Canonical application layouts are structural references, not NosLog surface styling.
Atlassian: Applying Grid	Fixed and fluid grids serve different content; wide fixed grids control relationships better than unconstrained fluid expansion.	Use a capped responsive container and consistent keylines; do not preserve a phone canvas or use unlimited desktop width.	Atlassian's default maximums are product-specific and must not become NosLog tokens without validation.
Carbon: 2x Grid	Responsive columns create repeatable screen regions and shared keylines across breakpoints.	Let search, the eight-destination collection, updates, and Footer relate to one layout system while retaining different internal component layouts.	Carbon's sixteen-column implementation and spacing values are not adopted directly.
Singapore Government Design System: Responsive Grid	Four-, eight-, and twelve-column layouts recompose at different widths; a sidebar is a contextual pattern rather than a default desktop requirement.	Treat desktop as an intentional grid expansion and use no permanent Home sidebar because no approved content requires one.	Its prescribed container measurements are not final NosLog dimensions.
Adobe Spectrum: Spacing, Headers, and Cards	Page shells align with fixed or fluid grids, component priority changes responsively, and card groups align to the main grid without forcing every internal edge.	Align the destination collection and editorial region to the Home grid while keeping search and individual block internals at readable widths.	Spectrum describes an ecosystem-wide system and not NosLog's dark visual language.
Tailwind CSS: Responsive Design	Mobile-first variants add wider-layout changes, and component adaptations should follow available space rather than device labels alone.	Preserve the mobile base and add only the desktop recompositions required by content relationships; defer exact breakpoint values to foundation testing.	Framework syntax is implementation guidance, not product evidence.
Figma: UI Design Principles	Hierarchy, proximity, alignment, consistency, and progressive disclosure help users distinguish primary and secondary information.	Keep search visually dominant, group the eight peer destinations, and place updates after core tasks rather than giving every retained item equal weight.	The principles do not settle NosLog-specific ordering or proportions.
NSW Design System: Grid	A responsive twelve-column system supports readable, accessible layouts from narrow to wide screens.	Use a common wide-layout structure while testing all three locales and narrower supported widths.	Public-service examples do not model a rhythm-game discovery Home.
NICE Design System: Layout	A mobile-first fluid grid lets content occupy deliberate spans instead of scaling a narrow page uniformly.	Expand collections and update regions selectively while keeping bounded search and readable copy.	Its health-information context is more document-oriented than NosLog.
Dell Design System: Grid	Responsive grids adjust margins, body widths, and column availability across viewport ranges.	Define container and gutter behavior as foundation decisions instead of embedding a 390px assumption in the Home composition.	Dell's breakpoint and margin values are not NosLog defaults.
Denmark Common Design System: Grid	A twelve-column grid creates horizontal alignment and vertical rhythm across responsive layouts.	Use shared keylines for major Home zones and a stable vertical sequence from search through Footer.	Its exact desktop width and government visual conventions are not transferable.
Spotify Search	A wide discovery surface expands peer browse categories into a multi-column grid beside persistent application navigation.	The browse grid supports using desktop width for peer destinations; the persistent library rail is not appropriate for NosLog's approved Header shell.	Spotify is a playback application with a much larger persistent navigation model.
Apple Music Search	Search remains compact while browse categories use the wider content pane as a multi-column collection.	Keep the Home search readable and bounded while allowing the destination collection to occupy more of the desktop container.	Its subscription, media playback, and sidebar model do not map to NosLog.

Source	Observed pattern or role	NosLog application	Limitation
BeatSaver	Chart discovery uses a wide search and filter row followed by a dense two-column result collection.	Confirms that chart-oriented content benefits from desktop width, but full filters and results remain on the shared discovery page rather than Home.	It is a catalog-results surface, not a Home information hierarchy.
osul Titanic: Beatmapsets	Dense chart browsing uses desktop space for filters and tabular comparison.	Reserve wide, comparison-oriented layouts for downstream chart discovery; Home should route to them instead of reproducing their density.	It is a listing page with thousands of results, not an orientation surface.
Taiko.wiki Home	A rhythm-game Home uses a desktop rail, search, direct links, and side-by-side notices, but the combined density competes for attention.	Preserve direct domain access and separate service and official updates while treating the persistent rail and visual density as counterexamples.	Its administration, advertising, and information volume differ from NosLog.
Sonsterr	A chart service gives a centered search task strong prominence before popular content.	Support a centered NosLog identity-and-search zone before the wider destination collection.	Instrument tabs and popular-song lists do not map directly to NosLog scopes or destinations.
MusicBrainz	A music database leads with search and places explanation, news, and community content later in the page.	Keep task entry ahead of editorial content and place routine updates in a lower semantic zone.	It is an encyclopedia and contribution platform with different secondary tasks.
BeastSaber	A rich rhythm-game Home combines featured maps, packs, articles, events, and rankings into many competing modules.	Use it as a density counterexample: NosLog Home remains an orientation surface and does not become a personalized or editorial dashboard.	Its curation and community publishing model is broader than NosLog's approved Home scope.
ArcadeStat	A fan-made arcade records service exposes multiple record, tier, and music functions from one product shell.	Confirms that NosLog's domain destinations deserve direct access while still requiring a clear primary task and restrained grouping.	Publicly observable page structure offers less detailed visual evidence than the other production references.
Steam Search	A wide primary result list uses a secondary rail for controls that directly filter those results.	Reinforces the rejection of an announcement rail: a secondary desktop region should directly support the adjacent primary task, which NosLog news does not.	Commerce filters and result density are not a Home model.
Plus X	Wide editorial compositions use strong typographic hierarchy, shared edges, and deliberate two-column rhythm.	Inform later typography and editorial proportions for the lower updates area without changing the approved task hierarchy.	It is an art-direction reference, not product-navigation evidence.
TURN.STUDIO	Large-scale composition and controlled whitespace can make wide layouts feel intentional rather than merely enlarged.	Inform the visual treatment of desktop space after the structural grid is validated.	A creative-agency showcase does not determine NosLog interaction or accessibility behavior.
MUSINSA Brand	Editorial content uses clear type hierarchy, image and text grouping, and repeated alignment across wide screens.	Inform later editorial hierarchy for announcements and official news while retaining NosLog's content order.	It is a commerce and brand surface, not a functional rhythm-game Home reference.

Desktop Composition Alternatives

Alternative	Benefit	Risk or cost	Decision
Wider single column	Preserves the simplest mobile-to-desktop translation.	Continues to underuse desktop width, lengthens the page, and weakens comparison among peer destinations.	Rejected
Persistent primary pane plus update rail	Makes the page appear fuller and keeps updates continuously visible.	Elevates unrelated news beside the primary search, creates a false task relationship, and risks responsive reading-order drift.	Rejected
Dashboard or unequal Bento composition	Can create immediate visual variation and several prominence levels.	Conflicts with the approved consistent destination family, introduces arbitrary hierarchy, and increases responsive clutter.	Rejected
Semantic zones with local responsive grids	Preserves mobile order while letting peer destinations and lower editorial content use wider space.	Requires later validation of container, gutter, column, and transition values with representative content.	Approved

The approved desktop composition is:

1. retain one semantic sequence across viewport widths;
2. place at most one active service-critical notice before the identity and search, never in a low-priority side rail;
3. keep the concise NosLog identity and scope-aware search centered as the strongest desktop Home zone, with a readable maximum width rather than full-container stretching;
4. align the eight comparable destination blocks, including Data Sync, after search;

use four columns by two rows when the collection has sufficient width and three columns by three rows in the compact-width state while preserving source order;

5. place routine NosLog announcements and official NOSTALGIA news only in the lower editorial zone;

6. at sufficiently wide layouts, show the two editorial sections side by side, give the NosLog announcement collection the larger share, and keep official news the smaller peer region;

7. at narrower layouts, stack the two editorial sections in the same source order: NosLog announcements first and official NOSTALGIA news second; and

8. align the Footer to the responsive page container after the editorial zone.

This approval fixes relationships, hierarchy, and recomposition rules. It does not fix the final maximum width, breakpoint values, gutters, card dimensions, or the exact ratio between the two desktop editorial regions. Those values remain foundation and representative-example decisions that require real Korean, Japanese, and English content.

HOME-18 / HOME-20 Focused Reference Comparison

The destination-grid decision compared authoritative responsive and accessibility guidance, production navigation research, established grid and collection systems, and current NosLog evidence. The sources converge on shortening unnecessary mobile navigation length, keeping peer items on consistent spans and keylines, preserving meaningful reading order, and validating reflow at 320 CSS px. They do not prescribe one fixed column count for NosLog. The approved NosLog-specific resolution uses a 3 × 3 compact collection when four columns no longer give localized labels enough room, then returns to 4 × 2 when the collection is wide enough.

Reference class	Sources	Transferable principle and NosLog application	Limitation
Mobile Home and navigation evidence	Baymard: Mobile Homepage and Category Navigation , Baymard: Main Navigation UX	Mobile users rely on direct Home shortcuts, while long category collections make overview and movement slower. Eight compact NosLog destinations should avoid a four-row mobile list; three rows are accepted when they materially improve label legibility.	Commerce categories are larger and more heterogeneous than NosLog's eight peer destinations.
Hierarchy, reading order, and reflow	Microsoft Fluent 2: Layout , Figma: UI Design Principles , Apple HIG: Layout , W3C: Reflow	Keep priority content early, preserve source and focus order, align repeated controls, and avoid two-dimensional scrolling at 320 CSS px. Compact 3 × 3 reflow protects labels without clipping, ellipsis, or micro-type; the final two peers remain equal and occupy the first two cells of the final row.	These sources establish hierarchy and accessibility constraints, not a NosLog column count.
Peer grid and collection systems	Carbon: 2x Grid , USWDS: Layout Grid , Adobe Spectrum: Cards , Atlassian: Applying Grid, Primer: Grid , Bootstrap: Grid System	Repeated peer items benefit from equal spans, repeatable keylines, and consistent collection rhythm. Use eight equal blocks; do not stretch the last item, vary spans without an approved hierarchy, or turn the collection into a single wide toolbar.	Their tokens, breakpoints, and surface styles are product-specific and are not NosLog values.
Adaptive layout implementation	Android: Adapt Layout , Material 3: Canonical Layouts , GOV.UK: Layout , Tailwind CSS: Responsive Design	Responsive composition follows content constraints. Use 3 × 3 only while the destination region is compact, then change to bounded 4 × 2; do not add columns merely because the viewport is wide.	These references allow several valid adaptive outcomes; the exact transition is a NosLog product decision.
Current NosLog evidence	Current Home implementation and the reviewed 320px/390px destination comparisons	Three columns materially improve the available label measure over four at compact widths. Eight peers require one intentionally incomplete final row, but keeping every block equal and source ordered is preferable to stretching the eighth item or reducing type.	The current visual treatment and dimensions are usability evidence only and are not the NosLog 2.0 final design.

Implementation and downstream design must still validate all Korean, Japanese, and English labels, 200% text enlargement, minimum target sizes, and horizontal reflow at 320px, 390px, and around the measured compact-to-standard transition. The S5 specimen uses a 448px destination-region threshold, equivalent to a 480px frame with its current compact gutters, as a validation value rather than a universal device breakpoint. Production should trigger the same relationship from the destination container's available width. If content pressure remains, adjust gaps, padding, label wrapping, or shared block height; do not use ellipsis or reduce the control label below the approved type role.

HOME- 15 Focused Reference Comparison

The routine-announcement decision additionally compared twenty-one external pages across authoritative guidance, task-oriented production services, rhythm-game sites, and dedicated update archives. The sources reached saturation around a bounded recent collection plus a stable route to complete history.

Source	Observed pattern	NosLog application	Limitation
W3C APG: Alert	Alerts are brief, important, and potentially time-sensitive; frequent interruptions harm usability.	Routine announcements remain ordinary editorial content rather than live alerts.	Accessibility semantics do not define a Home collection size.
GOV.UK: Notification Banner	Use banners sparingly and avoid showing more than one.	Keep at most one service-critical message separate from routine updates.	It does not prescribe an editorial archive.
USWDS: Site Alert	Site alerts communicate urgent sitewide information and should not be stacked.	Do not turn multiple routine releases into top-of-page alerts.	The emergency context is stronger than ordinary NosLog updates.
USWDS: Collection	A compact related-content collection links each selective summary to its source and recommends six or fewer items.	Use a short linked announcement collection rather than expanded article bodies.	Six is an upper guideline, not a reason for NosLog to show six.
Carbon: Notification	Notification copy stays short; longer explanations use a “View more” destination.	Move full announcement bodies to stable detail pages.	Carbon notifications are not themselves an editorial-news template.
Fluent 2: Message Bar	Keep messages to one or two short sentences and link longer documentation; too many interruptions overload a flow.	Keep Home rows scannable and use a detail link for complete content.	Message bars concern application state more than routine news.
Shopify Polaris: Banner	Banners are sparse, single-theme, concise, and not a regular information entry point.	Routine history belongs in a normal collection and archive, not persistent banners.	Merchant workflows differ from an arcade companion service.
VA.gov: Banner	Only one banner appears at a time; short headlines and messages link to fuller pages.	Preserve one urgent slot while routing longer routine content to detail pages.	Its health and emergency content has higher stakes than NosLog releases.
Singapore Government Design System: System Banner	Routine body content should stay in normal flow; too many banner items dilute urgency and stale items should be removed.	Separate service status from the bounded routine-announcement area.	Its optional auto-rotating banner is not adopted for NosLog.
GOV.UK Design System Home	Home features one current “What’s new” item and links to the broader updates page.	A task-oriented Home can keep updates bounded while preserving full-history access.	A design-system site publishes at a different cadence.
Scottish Government Design System Home	Home lists two recent updates and sends release history to another destination.	Supports a small recent subset plus archive rather than an unbounded Home feed.	The content type is documentation updates, not game-service notices.
UAE Design System Home	A selected latest update appears as secondary Home content after primary guidance actions.	Routine announcements remain below core NosLog tasks and use restrained prominence.	It demonstrates hierarchy more than exact quantity.
CHUNITHM Japanese Home and CHUNITHM International Home	Both surfaces expose three recent news items followed by a “more” or “view all” route.	Three items is a domain-relevant bounded default with clear history access.	These are official game marketing sites, while NosLog is a companion archive.
mimai Home	A bounded notices area is paired with a “see more notices” route.	Keep the Home summary finite and make older content deliberately reachable.	Much of its visual news content is image-led and should not be copied.
Taiko.wiki Home	Five Wiki notices and three official notices create a dense but highly visible update block.	Confirms that service and official news need separate labels, while serving as a density counterexample.	Its wiki-heavy operating model prioritizes update scanning more than NosLog Home does.
DanceDanceRevolution WORLD Home	Many long news bodies are placed directly in the Home flow.	Treat this as a counterexample: full bodies would let routine content dominate NosLog’s primary tasks.	The official site intentionally functions partly as a full news destination.
SOUND VOLTEX News	Full game updates live in a dedicated chronological news destination.	A dedicated archive can own complete and older NosLog announcements.	It does not determine the number of preview items on NosLog Home.
Nintendo News	A dedicated filtered news page keeps loading older articles outside the product Home.	Preserve long-term discoverability through an archive rather than a growing Home section.	Nintendo’s publishing volume is far higher than NosLog’s.
GitHub Changelog	A dedicated chronological changelog exposes dates and categories for a large history.	Announcement history needs a stable browse route even when Home shows only three items.	Enterprise product taxonomy is unnecessary for the initial NosLog archive.
Figma Release Notes	Release history is a dedicated destination with chronological updates and subscription access.	Separate ongoing history from the task-oriented Home.	Subscription and release-marketing features are outside the current decision.

Current NosLog already fetches the newest three published announcements, but expands up to 2,000-character bodies in Home accordions and provides no public detail or archive route. The approved direction preserves the useful three-item operational limit while replacing unbounded in-place expansion with stable detail and archive access.

HOME- 11 Focused Reference Comparison

The empty-query decision additionally compared eighteen independent sources across authoritative interaction guidance, search-platform behavior, production catalogs, music and rhythm-game discovery, and a query-only counterexample.

Reference class	Sources	Transferable principle and NosLog application	Limitation
Interaction and accessibility guidance	Apple Search Fields , USWDS Search , MDN @NOSLOGTOKEN0@ , GOV.UK Error Message , and Nielsen Norman Group accessibility guidance	Search and browsing can coexist, while an empty value becomes invalid only when the product deliberately requires it. Do not show a validation error for an intentional browse action, and do not describe a queryless catalog as results for a nonexistent query.	These sources define semantics and failure risks, not NosLog's catalog contents or default ordering.
Search-platform behavior	Algolia empty search , Meilisearch empty-query curation , and Elasticsearch filtered search	A queryless state can return an initial or filtered catalog, but its default content should be intentionally curated instead of inheriting an arbitrary engine order. NosLog may open the selected browse scope without fixing its eventual sort and filter defaults in the Home brief.	Search-engine capability is implementation evidence rather than complete UX validation.
Production browse and discovery	Spotify Search , Steam Search , osul Titanic beatmap listing , Nintendo Games , PlayStation Store Browse , Epic Games Store Browse , BeatSaver , Discogs database search , and Bandcamp Tags	Music, game, and chart catalogs preserve a useful browse state before a text query and pair it with filters, categories, or curated ordering. This closely matches NosLog's shared Music/Chart discovery surface and its direct Music and Chart Viewer entries.	Several services expose a separate Browse route instead of interpreting an empty form submission; their surface styling and merchandising logic are not NosLog models.
Query-only counterexample	GitHub Search	A pure global text-query tool may keep an empty search as instructions rather than a result set. This supports blocking an empty query only when there is no meaningful catalog state.	GitHub searches heterogeneous code and repositories; it is less analogous to NosLog's bounded Music and published-chart catalogs.

The comparison converged after the catalog and counterexample patterns stopped adding new behavior. NosLog fits the browse-and-search model because Music and Chart Viewer already require direct queryless entry points into the same discovery surface. The Nielsen Norman Group warning still applies: the queryless destination must be labeled as a browse catalog, not as results generated by a blank query.

HOME- 16 Focused Reference Comparison

The Home search-preview decision compared twenty independent sources across authoritative interaction and accessibility guidance, production component systems, empirical autocomplete research, and public search products.

Reference class	Sources	Transferable principle and NosLog application	Limitation
Interaction and accessibility guidance	W3C APG Combobox , WAI-ARIA , Apple Search Fields , Apple Machine Learning , USWDS Combo Box , Fluent 2 Combobox , and GOV.UK Search Autocomplete	Suggestions must remain understandable and keyboard-operable. Rank likely matches first and keep a lightweight public-search preview bounded; GOV.UK specifically limits this pattern to five suggestions to reduce cognitive load and unnecessary scrolling.	Long-list selection controls may legitimately scroll, but they solve a more focused task than a multi-purpose Home preview.
Component implementation systems	Primer SelectPanel guidelines , Primer SelectPanel accessibility , Primer Autocomplete , Algolia suggested searches , Algolia Autocomplete , and Algolia query suggestions	Scrollable lists require additional active-option visibility, focus, mobile, and screen-reader behavior. A bounded list with a distinct footer action can hand off to a complete result surface without turning Home into a result browser.	These systems provide implementation patterns; they do not determine NosLog relevance ranking or localized labels.
Empirical autocomplete research	Baymard autocomplete design and Baymard autocomplete examples	Too many simultaneous suggestions increase scanning and choice cost. Mobile should show fewer suggestions than a large desktop surface, and a fixed-height scrollbar is a poor substitute for stronger ranking and a full-results destination.	The research focuses on ecommerce search, so its merchandising rules do not transfer to NosLog.
Public search products and domain comparables	Google Autocomplete , GitHub search , YouTube search predictions , MusicBrainz Search , and BeatSaver	A small ranked preview and a complete searchable destination have different roles. NosLog Home should help users recognize a likely Music or Chart match, then transfer broader inspection and filtering to shared discovery.	Public documentation does not expose every ranking rule or accessibility implementation, and the products differ in scope.

The comparison converged on a bounded preview rather than a five-row viewport over an internally scrolling result list. Internal scrolling is valid for a dedicated selection dialog or panel, but on Home it adds nested scrolling, hides the existence of later matches, competes with the mobile keyboard, and duplicates the shared discovery page. The approved alternative shows the highest-relevance matches without internal scrolling or in-place expansion and provides a complete-results handoff only when more matches exist than the preview can show.

HOME- 17 Focused Reference Comparison

The asynchronous preview-state decision compared twenty independent sources spanning accessibility status semantics, loading and error guidance, production component systems, and search-state implementations.

Reference class	Sources	Transferable principle and NosLog application	Limitation
Accessibility status and focus	W3C APG Combobox , WCAG search-results status example , W3C ARIA22 , W3C F103 , and MDN @@NOSLOGTOKEN0@@	Dynamic loading, result counts, no-match messages, and failures must be programmatically exposed without moving DOM focus away from the search field. Mark an updating region busy until the current response is complete and avoid announcements from obsolete intermediate updates.	The standards define semantics rather than visual timing, popup geometry, or NosLog copy.
Loading and application -error guidance	Apple Loading , Apple Progress Indicators , Material Progress Indicators , Material Errors , and Material UI Progress	Fast completion should feel immediate; slower work needs local, consistent feedback. A component failure should preserve the usable remainder of the page and offer a supported recovery action. Delaying a visual loader prevents a fast response from flashing an unnecessary spinner.	Guidance differs on the exact delay before a visual loader appears, so the approved 400ms request-time threshold is a NosLog-specific rule to validate.
Asynchronous autocomplete systems	CMS Autocomplete , Equinor Autocomplete , React Spectrum ComboBox , Visa Combobox , Singapore Government Combo Box , and Australian Agriculture Autocomplete	Loading, no-result, invalid-input, and service-failure states are different. For NosLog, the query is not invalid when retrieval fails, so failure belongs inside the popup with concise recovery rather than on the input as validation styling.	Most examples select a value from a controlled list, while NosLog also supports explicit submission to complete discovery.
Search state and update implementations	Scottish Government Autocomplete , Elastic Search UI State , Algolia multiple search states , and Telerik AutoComplete accessibility	Current input, the query represented by rendered results, request identity, loading, and error are separate state. Invalidate prior matches when input changes, ignore stale responses, and announce only the state belonging to the latest normalized query and scope.	These sources expose implementation state but do not choose NosLog's navigation hierarchy or final visual styling.

The comparison converged on an anchored, non-modal popup rather than an in-flow block. The popup attaches directly below the search field, appears above later Home content without moving it, and adds no backdrop or page-level interaction lock. Selection, complete-results handoff, Escape, clearing the query, or interaction outside the search region closes it; Escape does not clear the query.

After the approved IME-safe 300ms idle interval, the request begins immediately. The suggestion region becomes programmatically busy at request start, but a visible compact loading row appears only if that same request is still pending after 400ms. Changing the normalized query or scope immediately invalidates and hides prior matches, clears the prior failure, and starts the next debounced cycle. An aborted or older response must never replace the latest state.

Retrieval failure keeps the query, active scope, search control, explicit submission, and every other Home destination usable. It appears inside the popup as a concise localized message with a text retry action for the same query and scope. It is not styled as invalid user input and does not move focus. New input dismisses the failure and begins a new cycle.

Reference Synthesis

The comparison converges on six requirements:

1. search and direct destination links should coexist;
2. the primary task must be visually stronger than retained support and editorial content;
3. Home should hand off to deeper filtering instead of reproducing downstream screens;

4. mobile-first does not justify retaining a fixed mobile-width canvas on desktop; and
5. Home search preview should remain bounded and hand broader inspection to shared discovery instead of adding an internally scrolling mini-results page; and
6. asynchronous search feedback should stay anchored to the search task, preserve the rest of Home, distinguish no matches from retrieval failure, and reject stale results.

References alone do not determine the exact destination order or card proportions. Those remain user-approved decisions. The focused notice comparison informed the approved three-item summary, detail, and archive model. The focused empty-query comparison informed the approved browse-state rules, and the focused autocomplete comparison informed the approved preview states. The asynchronous-state comparison informed the approved popup, loading, invalidation, and recovery rules documented below.

Approved Information Priority

The following hierarchy is approved:

1. Conditional service interruption: only a notice that changes current service use may precede the primary task.
2. Identity and shared search: concise NosLog context plus the approved Music/Chart scope selector and search field.
3. Primary destination collection: all eight approved destinations in one consistent component family. Emphasis is expressed through the shared Music/Chart search and the reading order Music → Chart Viewer → Tiers → Rankings → Bingo → Exams → Arcades → Data Sync, not through loud accent colors, separate group labels, or an unapproved large-versus-small card system.
4. Updates and editorial content: routine NosLog announcements followed by a distinct official NOSTALGIA news grid containing the latest official X post.
5. Trust and project footer: Privacy and GitHub.

The destination collection is approved as three columns by three rows in its compact width state and four columns by two rows when sufficient width is available. Exact card dimensions, container width, gutters, and high-fidelity composition remain foundation and representative-example decisions.

Search Requirements

Approved Behavior

- Music is the default Home search scope.
- The compact leading scope selector switches between Music and Chart.
- The closed selector has a visible icon and accessible name; the open selector shows localized text labels for both scopes.
- The placeholder, results, and submission behavior communicate the active scope.
- The Chart Viewer destination opens the same search surface with Chart scope already selected.
- Search hands off to the shared discovery page. Home does not reproduce full genre, level, difficulty, record, or availability filters.
- Keyboard operation, visible focus, and a programmatic label are required. Placeholder

text alone is not the label.

- Submitting an empty or whitespace-only query explicitly opens the default browse state for the active scope: Music catalog for Music and published-chart catalog for Chart.
- Treat the destination as browsing, not as results matched by an empty query. Use a localized scope-aware catalog heading or state rather than an empty-results or validation message.
- Do not generate an empty `q` parameter for this transition. Preserve the selected scope in restorable and shareable URL state; omit `q` when no normalized query exists.
- Only an explicit submission or direct destination activation navigates to the catalog. Focusing an empty field does not navigate automatically.
- A non-empty normalized query opens a Home preview after composition has ended and 300ms have passed without further input. Do not update results while Korean, Japanese, or another IME composition is active.
- Opening or updating the preview never navigates automatically.
- The preview shows the highest-relevance matches up to a maximum of five and has no internal scrolling.
- When the total is within the current preview capacity, show only the matches. When more matches exist than the preview can show, add a distinct localized `View all N results` handoff after the ranked matches.
- The complete-results handoff navigates to shared discovery with the active scope and normalized query preserved. It does not expand more results inside Home.
- When no preview match exists, keep the user's query and show a concise localized no-match message. Do not show a visible complete-results handoff in this state; explicit Enter or search-control submission may still open shared discovery.
- An empty focused field stays quiet: do not open recent, trending, or placeholder suggestions.
- Render preview states in a non-modal popup anchored directly below the search control. It overlays later Home content without changing document flow, adding a backdrop, or locking interaction with the rest of Home.
- Close the popup after selecting a match or the complete-results handoff, pressing Escape, clearing the query, or interacting outside the search region. Escape preserves the query.
- Begin retrieval after the approved IME-safe 300ms idle interval. Mark the suggestion region busy immediately, but show its compact localized loading row only when the same request remains pending for an additional 400ms.
- This 400ms Home visual-loading threshold is intentionally different from the shared discovery surface's 300ms request-visibility threshold. Home invalidates and hides its lightweight preview immediately and avoids opening a transient popup; discovery preserves a primary result collection as normal and operable until its threshold, then marks and weakens a still-pending replacement sooner. Do not normalize these values without new evidence and user approval.
- A normalized query or scope change immediately hides prior matches and clears the prior failure. Cancel the obsolete request when possible and always ignore a stale response that does not belong to the latest query and scope.
- Retrieval failure appears inside the popup as a concise localized message with a

text retry action for the same query and scope. Keep the query, scope selector, explicit submission, direct destinations, and the remainder of Home usable.

- Do not style retrieval failure as invalid input or move focus to the message. New

input dismisses that failure and starts the next debounced search cycle.

- Do not fix the default Music difficulty, filter, sort, Chart grouping, or Chart

ordering in this Home brief. Define those defaults in the shared Music/Chart discovery brief with representative data.

Downstream Discovery Resolution

- Shared discovery preserves the query when no result is found and never clears it

automatically. The user edits or clears it through the visible search control.

- Home hands off only the normalized query and active scope. Complete filters, sorting,

batching, and result recovery remain owned by shared discovery.

Destination Requirements

- Represent the eight destinations as one semantic list of links.

- Use one consistent destination component family and comparable target sizes. Being

later in the order does not make Bingo, Exams, Arcades, or Data Sync hidden, disabled, or a More-panel-only destination.

- Use three columns and three rows when the destination region is narrower than its

validated 448px content threshold, including representative 320px and 390px frames. Use four columns and two rows at and above that available width. Keep the final two compact items in source order at the leading edge of the third row; do not stretch either item, center them through unequal spans, collapse to two columns, or expand desktop to a single row.

- Keep all eight blocks equal in width and visual weight. A localized label may wrap

without clipping or truncation; let the shared row height accommodate the longest required label rather than shrinking text below the approved type system.

- The entire visible destination block should have one predictable link target.

- Each destination needs visible localized text; an icon cannot be its only label.

- Music, Chart Viewer, Tiers, Bingo, and Exams must preserve their distinct NOSTALGIA

meanings. Do not replace them with a generic grouping label. Concise visible labels may use Music, Charts, Tiers, Rankings, Bingo, Exams, Arcades, and Data Sync in English; Charts remains the entry to the Chart Viewer collection, not a renamed product feature.

- Do not add descriptions to every block by default. Use supporting text only when

research or localization testing shows that the label alone is insufficient.

- Do not add permanent rows of extra mode or filter buttons to Home.

Destination Prominence Alternatives

Alternative	Meaning	Benefit	Risk or cost
Consistent blocks with priority order	Use the shared search as the strongest Music/Chart affordance, then order all eight comparable destination blocks by approved importance.	Preserves a calm, predictable collection while making the primary paths easier to encounter first.	The priority difference is subtler than unequal card sizes.
Unequal card sizes or grid spans	Give selected destinations visibly larger areas than the other peer destinations.	Makes hierarchy immediately visible.	Can create a noisy eight-item grid, complicate responsive consistency, and imply that smaller destinations are less complete.
Separate labeled groups	Divide the destinations into primary and secondary groups.	Makes the distinction explicit in text.	Adds headings and fragmentation and risks inventing an inaccurate domain grouping.

Approved: Use the first alternative as equal peers in an adaptive 3 × 3 compact and 4 × 2 standard/wide collection. Exact block dimensions remain foundation and representative-example decisions, but a future visual design must not create emphasis by assigning unrelated accent colors, arbitrary card sizes, or a stretched final block.

Notice and News Alternatives

Service and NosLog Announcements

Alternative	Placement model	Benefit	Risk or cost
One top notice area for every announcement	Sort all notices within one area before search.	Maximum visibility and minimal publishing-model change.	Routine updates repeatedly displace the primary task and receive false urgency.
Two role-based placements with no duplication	Show at most the highest-impact active service notice before search; show routine NosLog updates once in a lower updates area.	Protects the primary task while preserving urgent and routine communication.	Requires placement or severity metadata, expiry rules, and localized publishing discipline.
One lower notice area for every announcement	Put both critical and routine notices after core tasks.	Keeps the top of Home consistently task-focused.	A user may miss an outage or sync problem before beginning an affected task.

Approved: Use the second alternative. This is not two copies of one notice and not only a sort order inside one announcement list. Each announcement has one role and one placement:

- an outage, maintenance window, sync breakage, important data incident, or another condition that changes the current visit may occupy the pre-search service-alert position;
- a routine NosLog release or project update appears once in a lower updates area after the eight-destination collection; and
- when no active service-critical notice exists, no container or gap is reserved above search.

Routine updates use the following approved presentation:

- show the newest three published announcements, newest first;
- expose the title and localized publication date as a compact link row;
- do not place the full body in a Home accordion or expand it in place;
- open each item on its localized public announcement-detail page;
- provide an “All announcements” link to the localized announcement archive;
- omit the whole routine-announcement section when there is no published item; and
- keep the same three-item limit on mobile and desktop rather than increasing the desktop count.

Do not stack routine updates as equally urgent banners above search. The archive and detail pages preserve access to complete and older content without allowing the Home section to grow indefinitely.

Official NOSTALGIA News

Approved:

- Use X’s official Embedded Timeline for the NOSTALGIA_573 profile. Do not use a paid API, scraping, or an unofficial proxy.
- Present the latest source post as one item in a distinct official-news grid or region immediately after routine NosLog announcements.
- “Grid” identifies an independent content collection; it does not approve a final column count. Mobile starts with one column, while wide-layout composition remains a later guide decision.

- Keep the source post in its original language and provide a localized link to the official account.
- Do not duplicate the same post elsewhere on Home.
- Load the widget after core Home content. Search and all eight destinations remain usable when X is blocked, delayed, or unavailable.
- When the widget fails, do not leave an indefinite skeleton or broken empty frame; retain the localized official-account fallback.

Implementation caveat: The current component already uses X's official widget and requests a one-post limit, but the verified browser produced a hidden 0×0 Timeline iframe. The future implementation must start from the current X Publish-generated Embedded Timeline structure, correct the integration, and verify visible post content in supported browsers. The present component is evidence of required debugging, not a working implementation to copy unchanged.

Required Data and Content Constraints

Known Current Constraints

- Up to three published NosLog announcements are fetched.
- Announcement title: maximum 80 characters.
- Announcement body: maximum 2,000 characters.
- Announcement date: optional ISO timestamp rendered with locale-specific formatting.
- Eight direct product destinations are required, including Data Sync.
- Official news currently relies on the NOSTALGIA_573 X account.
- The current official Timeline integration does not expose a visible Post in the verified browser.

Required Data Model Changes

- Notice severity or placement classification.
- Optional notice start and expiry times.
- Korean, Japanese, and English announcement title and body.
- A stable public announcement identifier or slug for localized detail URLs.
- Published-list queries for the localized announcement archive, ordered newest first.
- A publication-readiness check that prevents publishing when any required

NosLog-authored translation is missing.

No official audio, video, or logo asset is added to the NosLog server by this brief. The embedded official X post remains externally hosted source content.

Required States

State	Required outcome	Status
Normal	Search and all approved destinations are immediately available.	Approved
No service notice	No empty notice container or reserved gap appears above search.	Approved
Service-critical notice	At most the highest-impact active notice precedes search without changing destination availability unless required.	Approved
Multiple routine notices	Show only the newest three title-and-date links in the lower updates area; older items remain available in the archive.	Approved
No routine announcement	Omit the entire routine-announcement section without reserving an empty card, heading, or gap.	Approved
No official news	Core tasks remain unchanged; retain the localized official-channel link without an empty feed shell.	Approved
Official-news load failure	No broken iframe or indefinite skeleton; retain the official-channel link and keep core Home usable.	Approved
Empty or whitespace search submission	Open the active scope's default browse catalog without a validation error or empty-query results label.	Approved
Empty focused search field	Keep the preview closed; do not show recent, trending, or placeholder suggestions.	Approved
One to five preview matches	Show only the ranked matches, up to the current preview capacity, without an internal scrollbar.	Approved
More than preview capacity	Show the highest-relevance matches plus a distinct View all N results handoff to shared discovery; do not expand Home.	Approved
No preview match	Preserve the query, show a concise no-match message, and omit the visible complete-results handoff.	Approved
Preview request under 400ms	Mark the suggestion region busy but show no visual loader; prior matches have already been invalidated.	Approved
Preview request beyond 400ms	Open the anchored popup with one compact localized loading row; keep search and the remainder of Home interactive.	Approved
Search service failure	Preserve query and scope; show an inline message and text retry in the popup without invalid-input styling or focus movement.	Approved
Obsolete preview response	Ignore it completely; only the latest normalized query and scope may update or announce preview state.	Approved
Signed out	Public search and destinations remain available; Header shows Login.	Approved
Signed in	Header shows the profile control; Home does not add personalized cards.	Approved
Unsupported or missing translation	Do not publish a NosLog-authored notice until all three translations exist. The external X post remains in its source language.	Approved
Reduced motion	Header and other Home motion obey reduced-motion preferences; information never depends on animation.	Approved

Home has no destructive action. Authentication prompts, permission errors, feedback submission, and downstream empty results are specified by their respective page or component briefs.

Responsive Behavior

Mobile Requirements

- Use 390px as the representative baseline and test narrower supported widths.
- Keep the semantic reading order aligned with information priority.
- Search is usable without horizontal scrolling and without truncating the active

scope into an ambiguous icon.

- Do not place preview matches in a nested scroll region. Five is the maximum, not a

required minimum: when the on-screen keyboard or available container height cannot accommodate five readable rows, show fewer ranked matches and retain the complete-results handoff when undisplayed matches exist.



- Keep the non-modal popup aligned to the search control and inside the viewport. It

may temporarily cover later Home content but must not push destination blocks, create document overflow, add a backdrop, or block the rest of Home.

- Keep all eight destinations, including Data Sync, in three columns and three rows at

representative 320px and 390px compact frames. Keep the third cell of the final row empty rather than resizing or reordering the final two peers. Wrap long localized labels and adapt gaps, padding, or shared block height without horizontal scroll.

- Destination labels remain readable in Korean, Japanese, and English.
- Editorial content does not push search and destinations below unnecessary

introductory content.

- Routine announcements remain a three-row title-and-date collection; full bodies open

on their detail pages rather than expanding the mobile Home.

Desktop Requirements

- Remove the current global 390px Home canvas constraint.

- Use a capped responsive page container and local grids to improve scanning, grouping, and comparison rather than merely enlarging the mobile column.

- Preserve the same semantic hierarchy, source order, focus order, and destination meanings.

- Keep the identity-and-search zone centered and bounded as the strongest Home region; do not stretch the search control across the full desktop container.

- Do not increase the search-preview maximum beyond five merely because desktop has more space. The shared discovery page owns larger result collections.

- Keep the popup attached to the same centered, bounded search region; wider layouts do not turn it into a page-width result panel.

- Keep the eight-destination collection at four columns and two rows after search, with one consistent block family and the approved reading order. Do not expand it into a single eight-column desktop toolbar.

- Bound the destination collection within the page grid instead of stretching its blocks indefinitely across wide screens.

- Keep routine announcements and official NOSTALGIA news in a lower editorial zone, not in a permanent sidebar beside search.

- At sufficiently wide layouts, place the two editorial sections side by side with routine NosLog announcements receiving the larger share. Stack them in source order when the available width is insufficient.

- Wider layouts keep the same three routine announcements and may recompose their container without adding older items.

- Do not move a service-critical notice into a low-priority rail.

- Exact container width, breakpoint, gutter, block dimensions, and editorial split ratio remain foundation and representative-example decisions. The destination column and row count is already approved.

Container Behavior

Destination blocks and editorial summaries should adapt to the actual width of their containing region. For the Home destination collection, adaptation changes between the approved compact 3×3 and standard 4×2 relationships and may also change bounded width, gap, padding, label wrap, and shared block height. Base the production transition on the collection container, not a device label. Viewport breakpoints define major shell changes; container queries may adapt this and other reusable collections when the same component appears in a narrower region.

Accessibility Requirements

- Provide one page h1 that identifies NosLog and its Home context without repeating decorative wordmarks as headings.
- Use descriptive h2 headings for content sections that remain on Home.
- Associate a visible or programmatically persistent label with search; do not rely on placeholder text alone.
- Expose the destination collection as navigation or a labeled link list with logical focus order.
- Give every icon-only scope or menu control an accessible name, state, and visible text when expanded.
- Expose the suggestion popup, active scope, expanded state, result relationship, and result count with appropriate combobox and listbox semantics. Keyboard and screen-reader users must be able to reach a preview match and the separate complete-results handoff without entering a nested scroll region.
- Mark the suggestion region busy as soon as the latest request starts. Announce the delayed loading state, final result count, no-match state, or retrieval failure without moving focus, and suppress announcements from canceled or stale requests.
- The retry text action must be keyboard operable and retain the latest query and scope. Retrieval failure uses programmatically determinable error semantics but does not mark the user's query as invalid.
- Ensure keyboard users can change scope, submit search, traverse destinations, and reach footer links without a focus trap.
- Retain the skip link and meaningful header, main, nav, section, and footer landmarks.
- Aim for comfortable touch targets and meet at least WCAG 2.2 target-size requirements. Exact component dimensions belong to the foundation.
- Do not make urgency, active scope, or destination type distinguishable by color alone.
- Expose routine announcements as a semantic list. Each row must have one clear localized detail-link target, and the "All announcements" control must identify that it opens the complete announcement collection.
- External official links identify their destination and opening behavior.
- Treat the approved third-party X timeline as supplementary content. Keep a localized official-channel link available without requiring the widget, and never make a core task depend on it.

Localization Requirements

- Support Korean, Japanese, and English routes without changing task priority.
- Keep NosLog and game/product identifiers in their approved original form.
- Test at least these labels and equivalents: Chart Viewer, Data Sync Guide, Official NOSTALGIA News, and Feedback/Error Report.
- Search placeholder and visible label must describe both title and artist behavior in natural wording for the active locale.
- Localize the delayed loading message, result-count status, no-match message, retrieval-failure message, retry action, and complete-results handoff in Korean, Japanese, and English.
- Use locale-aware dates and avoid fixed-width date assumptions.
- Destination blocks must support Japanese and English expansion without reducing labels to unexplained icons.
- Require Korean, Japanese, and English content for NosLog-authored notices before publication.
- Localize the routine-announcement heading, “All announcements” link, detail and archive page metadata, and publication dates. Preserve the same announcement identity across locale routes rather than creating unrelated language-specific records.
- Localize the official-news heading, official-channel link, and fallback text. The embedded official X post remains the publisher’s original Japanese source content and is not represented as a NosLog translation.

Browser Verification Targets

The later design and implementation must verify:

- signed-out and signed-in Home;
- Korean, Japanese, and English routes;
- at least 320px, 390px, 768px, 1024px, and 1440px viewport checks;
- zero horizontal document overflow at supported widths;
- Music and Chart scope selection with keyboard and pointer input;
- query submission, empty-query browse behavior, IME composition, and the 300ms preview delay;
- empty focus, one to five matches, more-than-capacity matches, and no-match preview states, including preserved query and complete-results handoff rules;
- preview use at compact mobile keyboard height and desktop width without an internal result scrollbar or automatic navigation;
- anchored popup placement without layout shift, backdrop, document overflow, or loss of access to other Home controls;
- responses below and above the 400ms visual-loading threshold, including immediate busy semantics and no fast-response spinner flash;
- query and scope changes during an active request, canceled requests, and deliberately

reordered responses to verify that stale data never appears or is announced;

- retrieval failure, retained query and scope, keyboard-operable retry, new-input

recovery, explicit submission, and continued access to every direct destination;

- popup dismissal through selection, complete-results handoff, Escape, query clear,

and outside interaction without clearing the query on Escape;

- all eight destination links in compact 3×3 and standard/wide 4×2

collections, including Data Sync and the leading two-item compact final row;

- no service-critical notice and one service-critical notice;

- zero, one, exactly three, and more than three published routine announcements,

including correct newest-first truncation and complete archive access;

- each Home announcement link, the “All announcements” link, and their Korean,

Japanese, and English detail and archive destinations;

- official-news normal, empty, and unavailable states;

- compact Header scroll hide/reveal, persistent-wide Header, and reduced-motion behavior;

- visible focus order, skip link, landmarks, accessible names, and console errors.

Acceptance Criteria for This Brief

- The primary task and success conditions are explicit.

- Every current Home function has an approved or rejected disposition.

- No approved information-architecture destination disappears.

- Content priority does not equate retention with equal visual weight.

- Mobile and desktop behavior preserve the approved eight-item adaptive destination

grid: compact 3×3 , standard/wide 4×2 , with equal peer sizes and source order.

- Three-language constraints include editorial data, not only UI labels.

- Loading, empty, error, authentication, and reduced-motion states are covered.

- No material Home behavior remains Open or Proposed; scheduled foundation,

content, and specimen details are not unresolved Home behavior.

- The user approved the complete synchronized brief and resolved decision register on

2026-07-31.

Decision Register

ID	Decision	Direction or question	Status
HOME-01	Home role	Orientation and task-routing surface, not a dashboard or miniature copy of every page.	Approved
HOME-02	Primary task	Shared Music/Chart search is the strongest Home task.	Approved
HOME-03	Destination set	Music, Chart Viewer, Rankings, Tiers, Bingo, Exams, Arcades, and Data Sync remain separate peer destinations.	Approved
HOME-04	Data Sync	Superseded by HOME-18: replace the former separate play-support row with Data Sync as the eighth peer in the Home destination collection; retain the stable More-panel entry.	Superseded
HOME-05	Feedback	Move to More; do not show on Home or duplicate in Footer.	Approved
HOME-06	Personalization card	Do not add stale-sync, recent-play, or incomplete-content cards.	Rejected
HOME-07	Destination prominence	Use one consistent block family; express priority through shared search and the order Music → Chart Viewer → Tiers → Rankings → Bingo → Exams → Arcades → Data Sync.	Approved
HOME-08	Notice placement rule	Give each notice one role and one placement: at most one active task-affecting notice before search; routine updates once below core tasks.	Approved
HOME-09	Official-news presentation	Use X's official Embedded Timeline to show the latest NOSTALGIA_573 source post once in a distinct grid after routine NosLog announcements.	Approved
HOME-10	Editorial localization	Require all three languages for NosLog-authored notices; localize the X section UI while preserving the embedded source post's original language.	Approved
HOME-11	Empty search behavior	Treat empty and whitespace-only submission as explicit entry to the active scope's browse catalog; omit empty q, preserve scope, and defer catalog defaults to the shared discovery brief.	Approved
HOME-12	Desktop composition	Use semantic zones beyond 390px: centered bounded search, a bounded four-column by two-row destination collection, then a larger NosLog-updates region beside smaller official news when space permits.	Approved
HOME-13	Routine NosLog announcement destination	Keep once on Home below the eight-destination collection, immediately before official NOSTALGIA news.	Approved
HOME-14	Empty official-news state	Keep the localized official-channel link without an empty feed shell; core tasks remain unchanged.	Approved
HOME-15	Routine announcement presentation	Show the newest three title-and-date links on every viewport; open localized detail pages, provide an archive link, and omit the section when empty.	Approved
HOME-16	Search preview	After IME-safe 300ms idle, show at most five ranked matches without internal scrolling or in-place expansion; use the approved four states and hand excess matches to shared discovery.	Approved
HOME-17	Async preview feedback	Use an anchored non-modal popup, delayed 400ms visual loading, immediate prior-result invalidation, stale-response rejection, and inline retryable failure without blocking Home or marking the query invalid.	Approved
HOME-18	Destination grid geometry	Superseded by HOME-20: formerly fixed eight equal destination blocks to four columns and two rows at every supported width.	Superseded
HOME-19	Home N logo mark	Preserve the compact N mark in the Home identity region while retaining a visible NosLog heading and localized service description.	Approved
HOME-20	Adaptive destination geometry	Use eight equal peers as 3×3 below the validated compact content width and 4×2 when sufficient width is available; keep the final compact row source ordered and unstretched, preserve 14px control labels, and use concise localized labels without ellipsis.	Approved

Phase Approval

The user approved the Home brief as a complete phase deliverable on 2026-07-31 after reviewing the resolved decision register and cross-document audit. This approval fixes the documented Home hierarchy, content, interaction, responsive behavior, states, accessibility, localization, and downstream handoff contracts.

On 2026-08-08, the user approved HOME-18, superseding the former separate Data Sync Home row and the previously open destination column count. The later HOME-20 amendment keeps the same eight equal peers and Data Sync's More-panel entry, but supersedes the fixed cross-width geometry: compact regions use 3×3 , while regions with sufficient label measure use 4×2 .

The same review approved HOME-19: the compact N logo mark remains part of the Home identity. It is not a substitute for the visible service name, semantic page heading, or localized description.

The user approved HOME-20 after reviewing the compact multilingual and 200% text pressure. The visible destination role remains 14/20; English Chart Viewer is shortened to Charts in this navigation context, with corresponding concise Korean and Japanese labels. Labels wrap when needed and are not ellipsized.

Exact foundation tokens, final visual geometry and breakpoints, component styling, localized production copy, and scheduled representative specimens remain downstream design-system or content work. They do not reopen the approved Home product behavior.

Ongoing Handoff

The approved Home contract remains an upstream constraint for Foundation, downstream design, implementation mapping, and localized production copy. Later approved page briefs supersede no Home behavior unless their decision logs say so explicitly.

NosLog 2.0 Shared Music and Published-Chart Discovery Page Brief

docs/design/04-shared-discovery-page-brief.md

Document Control

- Status: Approved
- Decision status: Complete page brief approved
- Evidence status: `Repository inspection, current-product browser audit, approved

information architecture, approved Home handoff, and cited search/filter, no-result-recovery, transient-response, rhythm-game-record, result-card, responsive-interaction, and accessibility guidance`

- Date started: 2026-07-30
- Date approved: 2026-07-31
- Language: English
- Parent information architecture:

[02-information-architecture.md](#)

- Upstream Home brief:

[03-home-page-brief.md](#)

- Scope: The shared user-facing Music and published-chart discovery surface in Music and Chart scopes
- Excluded: Music detail composition, focused chart-viewer composition, administrator chart search, final visual styling, and route implementation details

Decision Labels

Preservation override: Discovery may expose published-chart availability and link to the current viewer route. It may not alter the target viewer/editor; document 07 overrides every historical composition or behavior reference inside them.

- Observed: Verified from the current repository, browser, or approved upstream

artifact.

- Approved: Explicitly agreed with the user and authoritative for downstream

design.

- Proposed: Evidence-based direction awaiting explicit user approval.
- Open: Requires further research, representative data, testing, or a user decision.

- Rejected: Considered and explicitly not selected.
- Superseded: Replaced by a later approved direction.

No material behavior remains Open or Proposed. The synchronized shared-discovery brief is approved as a complete phase deliverable. Scheduled specimen and implementation gates do not reopen that approval.

Purpose

The shared discovery surface must help a user answer one of two questions without forcing them to learn two separate catalogs:

1. Music scope: “Which Music entry am I looking for, and how do I reach its detail and records?”
2. Chart scope: “Which published chart do I want to inspect or play in the focused viewer?”

It must preserve the semantic difference between a Music entry and a difficulty chart while reusing one search location, one query model, and one responsive interaction system.

Primary Context

- Approved: Mobile is the primary context, including short searches around arcade play where unnecessary confirmation and hidden state are costly.
- Approved: Desktop remains a required target and should use extra width for visible filtering and result comparison rather than retaining a centered 390px phone canvas.
- Approved: The surface is public. Authentication adds personal-record filters and record context but must not be required for ordinary Music or published-chart discovery.
- Approved: Home can hand off an empty browse request, a submitted query, or a selected Home preview result to this surface.
- Approved: The Home Music destination opens Music scope. The Home and More Chart Viewer destinations open the same surface with Chart scope selected.

Primary Tasks and Success Conditions

Task	Entry	Successful outcome	Important recovery
Browse all Music	Music destination or empty Music-scope handoff	The user can inspect the complete Music catalog in batches without a hidden difficulty restriction	Change sort/filter, remove active criteria, or retry a failed batch
Find a known Music entry	Search field or Home query handoff	The intended Music result is recognizable and opens its Music detail	Preserve and edit the query, change scope, or recover from no results
Find a published chart	Chart Viewer destination or Chart-scope handoff	Matching published difficulties are visible under the correct Music entry	Change query/filter or understand that no published chart matches
Open a chart viewer	Select a published difficulty in a Chart result	The focused viewer opens for that exact Music and difficulty	Return to the exact discovery state and scroll position
Refine a broad result set	Filter controls	Results reflect understandable active criteria without accidental hidden defaults	Remove one criterion, clear all, cancel staged mobile changes, or retry
Continue a long result set	Explicit Load more control	The next batch is appended deliberately and current context is preserved	Retry incremental failure without losing already loaded results

Current-Product Evidence

Observed Repository Behavior

- `/[locale]/music` is the current public Music discovery route.
- The current query supports title, artist, and Music-index text search.
- It supports category, Normal, Hard, Expert, and Real difficulty selection; per-

difficulty level ranges; name, level, recent-play, and weakness sorting; ascending and descending order; list and grid view; and fourteen signed-in record filters.

- When no difficulty query parameter is explicit, the current normalizer silently enables only Expert with a level range of 8–12.

- Category, difficulty, and record toggles currently replace the route immediately.

Range changes are debounced by 200ms and committed again at interaction end.

- The current result query returns cursor-based batches of 20.
- The current list uses an `IntersectionObserver` sentinel to fetch the next batch automatically when the sentinel enters the viewport.

- The current public discovery result is Music-centered. A dedicated Chart scope and its published-difficulty grouping do not yet exist.

- Public result data already includes the original Music title, optional approved localized title or Japanese reading for search indexing, artist, category, background, and levels for Normal, Hard, Expert, and Real.

- Signed-out requests ignore personal record filters and personal sorts at the data layer.

- The inspected local dataset contains 583 Music entries and 2,180 MusicChart entries. `title_kana` is populated for all 583 Music entries, while only 3 MusicChart entries currently have `released_at`.

- The source import catalog in `prisma/data/nosdata-musics.json` contains 578 entries.

Original-title length has a median of 11 characters, a 90th percentile of 25, and a maximum of 54; 178 titles contain at least 15 characters and 92 contain at least 20. Artist length has a median of 10, a 90th percentile of 34, and a maximum of 67; 218 artists contain at least 15 characters and 172 contain at least 20. This source-file audit is separate from the 583-row local database audit above and demonstrates that long title and artist handling is a normal case rather than an edge case.

- The same dataset contains no published ChartPattern and no MusicTranslation entries.

These are readiness constraints for representative Chart and localization testing, not reasons to weaken the approved product model.

- Music `created_at` and `updated_at` describe import or maintenance activity and must not be presented as an official “new Music” date.

Observed Browser Baseline

The approved current-product audit verified `/ko/music`, `/ja/music`, and `/en/music` at a narrow 390px viewport and a wide desktop viewport.

- Search, filters, sorting, view controls, and results were usable without document-level horizontal overflow.

- The current wide layout remains visually constrained by the general 390px shell.
- Japanese content produced a longer page than Korean and English, reinforcing the need to test real localized labels and title lengths.

- A focused 2026-07-31 progressive-loading audit found that the current first 20 results occupy approximately two 390px List viewports and three-and-a-half Grid viewports. In the current List markup, the page contained 464 DOM elements at 20 results, 764 at 40, and 1,073 at 60.

- These observations confirm available functionality. They do not approve the current

default Expert filter, automatic loading, visual density, card composition, or desktop width. The DOM counts are a performance test baseline for the future component, not a fixed 2.0 markup budget.

- A focused signed-in audit on 2026-07-31 confirmed that current NosLog can keep

Unplayed and recent-play order active together at wide and 390px widths. The query then assigns every unplayed Music entry a recent metric of 0 and resolves ties by title, so the visible recent-order label no longer describes the actual ordering. This is migration evidence, not an approved fallback.

- A focused transient-response audit on 2026-07-31 found no result-region

[role="status"] or aria-busy state during the current search replacement. The current route awaits its first data request before rendering the page, has no route-local loading boundary, and delegates an unhandled retrieval failure to the wider route or global error boundary. These are migration gaps, not approved 2.0 behavior.

Approved Discovery Model

One Shared Surface, Two Scopes

- Use one shared discovery surface for Music and published-chart search.
- Place a compact scope selector in the leading area of the search field.
- The collapsed selector uses the active scope icon and an expansion cue. The opened control provides visible localized text for Music search and Chart search.
- Do not add a permanently visible row of Music/Chart mode buttons above the search field.
- Keep the current query when switching scope unless later usability evidence shows that retained text creates meaningful misunderstanding.
- Represent the active scope in shareable and history-restorable URL state. Exact path-versus-query syntax remains an implementation decision.
- Search cues, result summaries, empty states, and result actions must reinforce the active scope; the icon alone is not sufficient.

Music-Scope Default Browse

- An empty Music-scope query exposes the complete Music catalog over explicit batches.
- Do not silently restrict the initial catalog to Expert or to levels 8-12.
- "Complete catalog" means every eligible Music entry can be reached through the approved 20-result progressive-loading contract. It does not determine visual card density.
- A user-selected difficulty or level range remains a filter and must be shown as active state rather than becoming an invisible default.

Chart-Scope Result Grouping

- Return only Music and difficulty targets that have a published public chart matching the active query and filters.
- Group matching targets as one result card or result unit per Music entry.
- Inside that Music result, expose only the published matching difficulties.
- Selecting a published difficulty opens that exact focused chart viewer directly.
- Do not create one visually independent top-level result card for every difficulty

when the difficulties belong to the same Music entry.

- Do not show an unpublished difficulty as if it were selectable and then explain the failure after selection.

Approved Browse Ordering and Sort Semantics

- With an empty query, Music scope orders the complete eligible catalog by `title_kana` ascending. This Japanese-reading order remains stable even though repeated result cards display only the original title.
- With an empty query, Chart scope orders Music groups by their latest published-chart timestamp descending. Within a group, selectable targets remain in the stable `Normal` → `Hard` → `Expert` → `Real` order.
- Music scope must offer a newest Music sort after a verified official Music-level release-date field is populated. Do not substitute Music `created_at`, `updated_at`, or chart-import timestamps. The data mapping for later-added difficulties must be reviewed before implementation.
- A non-empty text query defaults to Relevance only when the user has not selected another sort in the current discovery state. Relevance ranks closer and exact matches across the stable Music identifier, original title, approved localized or read title, and artist ahead of weaker partial matches; exact weighting and tie tuning remain an implementation concern.
- A user-selected sort persists through text and filter changes. If the query is cleared while Relevance is active, return to the active scope's approved empty-query order. Relevance is not an empty-query browse option.
- Music scope offers Relevance for active text search, Japanese-reading order, newest Music when the verified data gate is satisfied, level order with an explicit target difficulty, and signed-in recent-play order.
- Chart scope offers Relevance for active text search, latest published-chart order, Japanese-reading order, level order with an explicit target difficulty, and signed-in recent-play order.
- Remove the current weakness sort. Its opaque composite score does not map to an approved, understandable discovery goal.
- A level sort is valid only after the user explicitly selects its target difficulty. Never silently use Expert or derive one representative level from several difficulties.
- Outside the sort control, show only the current sort summary. The target difficulty belongs inside progressive disclosure rather than in a permanent `Normal` / `Hard` / `Expert` / `Real` button row.
- Direction controls belong inside the sort surface rather than becoming additional permanent buttons. Contextual requirements such as the level-sort target appear only after the corresponding sort is selected.

Approved Filter Taxonomy

- Public Music and Chart discovery share only domain-relevant filters: official Music category, `Normal`/`Hard`/`Expert`/`Real` difficulty, and level range for the selected difficulty targets.
- Chart scope inherits Music identity and category while restricting results to published matching chart targets. Publication eligibility is intrinsic to the scope, not a redundant visible filter.
- Do not invent chart-author, community-rating, marketplace-status, or generic tag filters while NosLog has no approved public data or user need for them.

- Signed-in personal-record refinement remains a secondary disclosed group as defined below. It does not change the public taxonomy.

Search Interaction

Active Text Search

- Approved: On the complete discovery surface, update results after an IME-safe 300ms period with no additional text input.
- Do not require a separate Search-button press for ordinary text refinement.
- Preserve the user's query when no result is found. Never clear the field as error recovery.
- Pressing Enter may immediately commit the current query and should not create a second, semantically different search behavior.
- Newer query or scope changes invalidate older results. Out-of-order responses must never replace results for the current state.
- The URL may update after the settled query is committed, but keystroke-level history entries must not make Back navigation unusable.

Home Handoff

- A Home preview selection may open the relevant Music detail or focused chart target directly when the target is unambiguous.
- A Home "view all results" action opens this surface with the exact query and scope preserved.
- Empty Home submission opens the selected scope's browse state without an empty q parameter.
- This surface owns complete filters, sorting, batching, and result recovery; Home must not duplicate them.
- Home preview follows its separately approved contract: it invalidates prior suggestions immediately and waits 400ms after request start before showing a visual loading row. Discovery retains its primary result collection as normal and operable until its 300ms request-visibility threshold, then weakens the stale collection and blocks its activation if the replacement is still pending. These are distinct component contracts and must not be normalized without new evidence and user approval.

Filter and Sort Application Model

The approved model is responsive and task-sensitive, not one universal "instant" or "Apply" rule.

Mobile and Other Result-Obscuring Layouts

- Provide one clearly labelled Filter and sort trigger rather than permanent independent Filter and Sort buttons. A badge counts applied filters only; the always-present sort choice is not counted as an applied filter.
- Keep the committed result count and current sort visible outside the layer, for

example as the semantic equivalent of “583 Music · Relevance.” Do not make the trigger the only place where the current order can be understood.

- Treat that result summary as its own stable semantic focus target. This requirement does not force the summary and Filter-and-sort trigger into separate visual rows; their same-row or split-row composition remains a 390px specimen decision based on available width and Korean, Japanese, and English content.
 - Open one full-screen or near-full-screen layer when the result collection cannot remain meaningfully visible beside the controls.
 - Keep Sort, public filters, and the signed-in personal-record group as clearly separated sections inside that layer. Place Sort first so combining the entry point does not make it undiscoverable or imply that sorting is a multi-select filter.
 - Let the user stage the sort and multiple category, difficulty, range, and personal-record changes without replacing the obscured result collection after every selection.
 - Use one sticky primary action labelled as a return to the result task, not as administrative confirmation: View results or, when a valid count is ready, View N results.
 - The primary action simultaneously commits the staged sort and criteria and closes the layer. Do not require a second Close action after applying.
 - After that successful commit, reveal the result-summary position and move programmatic focus to the summary rather than the returning trigger or first result. Do not open or select a result automatically.
 - The generic View results label remains usable while a result count is pending; count calculation must not block completion.
 - Back or Close exits without committing staged changes and restores the previously applied sort and filter state, prior scroll context, and focus to the invoking Filter-and-sort trigger.
 - Applied filters remain visible near the result summary after the layer closes.
 - Music’s list/grid view choice remains a separate compact view control because it changes presentation rather than result membership or order. Chart scope does not show that control.
- This is not treated as an extra task step: a user in a result-obscuring layer must return to the results in either model, and the primary action combines that necessary return with sort/filter commitment.

Desktop and Other Result-Visible Layouts

- Keep Filter and Sort as distinct compact controls. Filter may expose an anchored region or rail according to available content width; Sort uses a directly labelled single-choice control.
- Keep the main result collection visible beside or near exposed filter controls.
- Apply discrete filter choices immediately because the user can see the resulting change.
- Apply a selected sort immediately. Keep its current value visible without adding a permanent row of all sort alternatives.
- Debounce text-like or continuous controls. A range control must not issue a result request for every pointer pixel; update after a short settled interval or when the interaction is committed.
- Keep filter controls stable while only the result region communicates loading.
- Preserve focus and nearby scroll context instead of remounting the entire page.

Applied-State Actions

- Removing an applied filter from the result summary applies immediately on every viewport.

- Clearing all applied filters also applies immediately and restores the approved default browse state for the active scope.

- Applied criteria, result count, and results must describe the same committed state.

Pending mobile selections must not be presented as already applied.

- Filters and sorting that change the result set reset batching to the first batch.
- Request cancellation, stale-response rejection, and cache/query optimization should protect performance rather than adding a universal confirmation step.

Approved Authenticated Personal-Record Refinement

Personal-record refinement is an advanced, signed-in capability. It must remain secondary to public Music and Chart discovery rather than becoming a permanently expanded primary filter group.

- Retain the domain-relevant status and goal criteria: Unplayed, S, FC, and

Pianist.

- Remove played in the last 30 days. Its only distinct benefit is a low-evidence

time-window intersection with other filters, while signed-in recent-play order already supports returning to recently played Music without another persistent criterion.

- Do not provide a Clear filter. NOSTALGIA does not use clear status as a useful discovery distinction here, so the current control does not separate a meaningful user goal.

- Provide one judgement-level numeric refinement: an inclusive MISS count range with optional minimum and maximum bounds. An empty bound means unbounded.

- Evaluate MISS count against the user's best stored record for each eligible difficulty, not the latest play and not a combined MISS+NEAR percentage.

- Criteria from different groups combine with AND; multiple values inside one group combine with OR.

- Unplayed is mutually exclusive with all achieved-record criteria and has no meaningful recent-play order. The controls must not produce an impossible or misleading query.

- If a user selects Unplayed while recent-play order is active, accept the filter

and reset the staged or committed sort to the current context default: Relevance for an active text query, Japanese-reading order for empty Music scope, or latest published-chart order for empty Chart scope.

- While Unplayed remains active, keep recent-play order discoverable but unavailable. Provide one concise localized reason equivalent to Unavailable for unplayed Music rather than hiding the option.

- A sort choice must not silently change result membership. Therefore, recent-play order cannot be selected while Unplayed is active and must never clear the Unplayed filter automatically. The user removes Unplayed first when they intend to return to recent-play order.

- Removing Unplayed does not restore a previously active recent-play order. Keep the currently visible fallback until the user explicitly chooses another sort; do not maintain a hidden sort-history stack.

- On result-visible desktop layouts, this transition applies immediately. In the

result-obscuring mobile layer, it updates only the staged filter and sort together; View results commits both, while Close, Back, or Escape restores both previously committed values.

- Remove discovery filters for ♦JUST rate, MISS+NEAR rate, FAST/SLOW tendency, and

Standard, Tenuto, Glissando, or Trill success rate. These remain analysis data for record-detail contexts where they are interpretable.

- Do not promote MISS count into the default public filter set. It belongs in the

progressively disclosed signed-in record group because it serves focused practice planning rather than ordinary catalog browsing.

Keep this group collapsed after public filters until a signed-in user explicitly opens it. For signed-out users, omit the entire personal-record group rather than showing disabled criteria or an embedded login invitation. Ordinary discovery remains public, and authentication promotion must not add noise to the refinement task.

Explicit Progressive Loading

- Do not automatically load more results from scroll position.
- Return 20 result units initially and append 20 more per activation. A Music

result unit is one Music entry; a Chart result unit is one Music group containing its eligible published difficulty targets.

- Keep the same logical batch size in Music and Chart scopes, List and Grid views, and

narrow and wide layouts. A responsive view change must not silently add or remove result units.

- Provide a clearly labelled Load more control after the current collection when

another batch exists. Its visible localized label is based on the next actual amount: Load 20 more results, or Load 3 more results when only three remain.

- Show exact committed-query progress when the count is available, such as

Showing 20 of 583. While an exact count is still pending, show the visible count without inventing a total.

- Activating it appends the next batch without removing or reordering the already

visible collection.

- Keep the control location stable during loading, change its label to a localized

Loading... state, mark the result region busy, and prevent duplicate activation.

- After a successful append, move focus to the first newly added actionable result and

announce the amount added and new visible progress through a restrained polite status message. This is a user-initiated continuation, not an automatic focus change caused by ordinary search refresh.

- An incremental-load failure leaves existing results intact and offers a retry at the

same location while retaining focus on the failed action.

- When no further result exists, remove the action and communicate a localized

You have viewed all results completion state; do not leave a disabled control without explanation.

- Keep durable discovery criteria-scope, query, applied filters, sort, and view-in the

shareable URL. Keep the loaded result count, selected-result anchor, and meaningful scroll position in that browser history entry rather than adding ephemeral batch state to the public URL.

- Returning from Music detail or the focused chart viewer must rehydrate the previously

loaded 20-result batches before restoring the selected-result anchor and nearby reading position. Opening a copied URL in a fresh history context starts from the first 20 results.

- Validate the future 2.0 result component with 20, 60, and 100 accumulated

results on representative mobile and desktop browsers. Optimize card markup, jacket lazy loading, and rendering before mandating virtualization. Introduce accessible windowing only if measured interaction, memory, or DOM cost still requires it; do not change the approved user-facing 20-result batch contract silently.

Content and Functional Requirements

Always-Available Structure

1. Ordinary responsive header and skip link
2. Page identity and concise active-scope context
3. Scope-aware search field
4. Filter and sort access
5. Result summary with committed filter state
6. Music- or Chart-scope result collection
7. Explicit progressive-loading control when needed
8. Ordinary footer

The final visual order and grouping may adapt with width, but the search, committed state, results, and recovery controls must keep a clear semantic relationship.

Required Result Data

Music Scope

- Stable Music identifier
- Jacket image
- Original title
- Approved Korean or English title, or Japanese reading, as a non-visible search alias

when available

- Artist when available
- Category context
- All available official difficulty and level information
- Enough destination context to predict that selection opens Music detail
- User-controlled list and jacket-forward grid views

Chart Scope

- Stable Music identifier and identity
- Original Music title; approved localized/read titles remain search aliases rather

than repeated visible card captions

- Artist when useful for disambiguation
- Only published matching difficulty targets
- Difficulty and level for every selectable target
- A direct, unambiguous focused-viewer destination per selectable difficulty

Approved Result-View Structure

- Music scope opens in the list view. Users may switch to the jacket-forward grid

view when visual recognition is more useful.

- Chart scope uses one grouped list presentation only. Do not add a Chart grid toggle:

the primary action is selecting a published difficulty target under the correct Music identity, not comparing jackets.

- A Chart result presents Music identity first and then its published matching

difficulty targets in the stable difficulty order.

- Do not add a permanent row of difficulty controls above either result collection.

Filters, level-sort targets, and Chart destination targets have different meanings and must not be collapsed into one visually repetitive control strip.

- Preserve the useful structural model of the current NosLog Music list and grid as

the 2.0 baseline, but specify it through the rules below. A screenshot or an instruction to “reuse the current UI” is not a sufficient downstream specification.

- Exact typography, spacing, color, and motion tokens remain Foundation and component-

specimen work. Those token choices may refine the visual expression but must not silently change the approved content order, density boundaries, or interaction model. Exact Chart-row visual anatomy remains part of the later Chart result specification.

Approved Music Result Anatomy and Density

Shared identity and activation

- Each Music result is one whole-card link to Music detail. Official difficulty values

are compact information, not separate navigation buttons.

- Keep the original title as the largest and strongest card identity, followed by the

artist as secondary identity. Repeated discovery cards do not show translated or Japanese-reading captions.

- Keep category visible as a small text badge over the jacket. Do not depend on badge

color alone, and do not place category inline with the artist.

- Preserve complete original title and artist values in the accessible name and Music

detail even when a discovery card visually truncates them.

List view

- Keep the jacket exactly square and match its edge to the compact List-card height.

The near-64px row therefore uses an approximately 64 × 64px jacket. Keep the compact trailing official-difficulty group at approximately the current 92px total width, using 20px badges as the structural baseline. Difficulty remains in this trailing group rather than moving to a dedicated row.

- Keep the compact row near 64px rather than reserving a larger caption row.

- Limit the original title and artist to one line each with ellipsis. A missing artist

must not leave a blank structural row.

- At the audited 390px baseline, the result card is approximately 343px wide and

the compact trailing difficulty group remains preferable to a vertical difficulty row.

- Use one List column while the result region cannot give each card approximately

440–460px of usable width. Add a second column only when both cards can preserve that minimum. List view stops at two columns; denser artwork browsing belongs to Grid view. This switch follows result-container capacity, not a device-name breakpoint.

Grid view

- Keep every jacket exactly square with aspect-ratio: 1 / 1. The complete card does not need to be square.
- Let the information region below the jacket grow independently, but limit the original title and artist to one line each with ellipsis. Reserve consistent single-line identity slots across cards so difficulty positions and row alignment remain stable without excessive card height.
- Use the same original-title → artist hierarchy as List, with the category text badge over the jacket and official difficulty information below the identity.
- Use two columns at the 390px mobile baseline. Wider result regions may add columns according to a validated minimum readable card width; exact Foundation breakpoints remain open, while the intended range is roughly three to five columns rather than stretching two cards.
- The audited mobile card is approximately 168 × 261px. The structural specimen must preserve the square jacket while validating a compact one-line identity region; it must not add a second title or artist line merely to avoid truncation.

Approved Personal-Record Preview

- Keep the resting Music result focused on Music identity. Do not add a permanent per-record explanation line merely because a personal filter or sort is active; committed criteria remain visible in the result summary.
- On devices that report both hover capability and a fine pointer, hovering a result reveals a concise personal-record preview. Do not infer this capability from viewport width. Keyboard focus exposes equivalent information and interaction.
- The preview is an alternate state of the same result card, not a separate popup, expanding panel, action, or replacement for only the trailing difficulty group. Its appearance must not change card dimensions or shift the result layout.
- In List view, keep the jacket image clear while dimming or obscuring the other resting information, including title text, artist, category badge, and official difficulties. Place the record preview in that non-jacket region.
- In Grid view, dim or soften the complete resting card, including the jacket, and place the record preview over the card.
- With one active difficulty filter, preview the matching difficulty record. With several active difficulty filters, show the records for all difficulties that actually match. With no difficulty filter, preview the user's most recently played difficulty for that Music.
- The compact record line contains the difficulty, ♦JUST rate, absolute MISS count, and achieved state when available; for example: Expert · JUST 92.4% · MISS 3 · FC.
- ♦JUST and JUST remain separate NOSTALGIA judgements. Do not rename ♦JUST as "S-Just" in user-facing copy.
- Touch layouts do not emulate hover, reveal on first tap, use long press, or add a record-preview button. One tap follows the whole-card link directly to Music detail, where the full record context is available.
- Keep the preview present until pointer or focus leaves or the user dismisses it with Escape. Enter continues to activate the Music-detail link. Reduced-motion preferences minimize the transition.
- Near, FAST/SLOW, and note-type success rates remain available in detailed record



analysis but are not part of the compact discovery preview.

The required Music fields, list-default/grid-optional model, Music card anatomy and density boundaries, capability-based preview, and Chart grouped-list model are approved. Foundation tokens and exact Chart-row visual anatomy remain downstream specification work rather than unresolved Music-card structure.

State Requirements

State	Required behavior	Status
Initial Music browse	Show the complete eligible catalog by <code>title_kana</code> ascending with no hidden difficulty limit	Approved
Initial Chart browse	Show published Music groups by latest published-chart timestamp descending	Approved
Music newest sort unavailable	Omit or explain the option until verified official Music-level release dates are populated	Approved
Level sort target missing	Require an explicit difficulty selection; never fall back silently to Expert	Approved
Weakness sort	Do not provide the current opaque composite weakness order	Approved
Active query without user sort	Use Relevance; preserve any explicit user-selected sort through later query/filter changes	Approved
Settled active search	Replace the result set after 300ms idle and synchronize committed URL state	Approved
Fast response	If the request settles within 300ms of starting, replace results atomically without flashing loading UI	Approved
Slow initial response	After 300ms of request time, show a result-shaped skeleton only inside the result region	Approved
Slow replacement response	After 300ms of request time, retain and weaken old results, mark the region busy, and block stale-card activation	Approved
No matching Music	Preserve query and controls; show only <code>No matching songs.</code>	Approved
Filter-constrained Music	Preserve query and controls; show only <code>No songs match these conditions.</code>	Approved
No published Chart	Preserve query, filters, scope control, and show only <code>No published charts.</code>	Approved
Initial or replacement failure	Preserve committed controls and state; replace the result region with scope-specific one-line error copy and retry	Approved
Retry pending	Prevent duplicate retry, retain retry focus, and expose localized busy state	Approved
Retry success	Replace the error with results and move focus to the stable result summary because the retry control disappears	Approved
Retry failure	Keep focus on retry, repeat only the concise error state, and permit another attempt	Approved
Request timeout	Before implementation, set a finite measured production timeout; never wait indefinitely or invent an arbitrary value	Approved
Mobile sort/filter open	Keep Sort and filter sections distinct; stage both separately from committed result state	Approved
Mobile result count pending	Keep a usable generic View results action	Approved
Mobile View-results commit	Commit and close; focus the result summary without auto-opening the first result	Approved
Mobile layer close/back	Discard staged changes; restore committed state, prior context, and trigger focus	Approved
Signed-out personal filter	Omit the personal-record group; do not show disabled criteria or an embedded login invitation	Approved
Signed-in record refinement	Keep approved record criteria in a secondary advanced group	Approved
MISS range active	Match the inclusive bounds against the best eligible difficulty record	Approved
Unplayed conflict	Unplayed resets recent order to the context default; recent remains visible but unavailable until Unplayed is removed	Approved
Hover-capable record preview	Reveal equivalent compact record context on fine-pointer hover and keyboard focus	Approved
Touch result	Keep the resting card stable and expose full record context at the destination	Approved
Load more pending	Keep existing results, expose localized busy status, and prevent duplicate activation	Approved
Load more success	Append the next 20-unit batch, focus its first actionable result, and announce new progress	Approved
Load more failure	Keep existing results and action focus; provide localized retry at the same location	Approved
End of results	Remove the action and communicate completion without automatic additional loading	Approved
Return from destination	Rehydrate loaded batches, then restore the selected-result anchor and nearby reading position	Approved

Approved No-Result Classification and Recovery

The result service must classify a settled zero-result response internally before it selects copy. This classification supports truthful copy, analytics, and browser acceptance tests; it must not produce a diagnostic paragraph in the interface.

1. Treat retrieval, permission, or transport failure as an error state with retry, never as a no-result state.
2. When committed filters are active, test the same committed query and scope without those filters. If published results then exist, classify the state as filter-constrained.
3. In Chart scope, if the committed query and compatible filters identify Music or difficulty candidates but none has an eligible published `ChartPattern`, classify the state as no published Chart. Filter-constrained recovery takes precedence when removing the filters would reveal published Charts.
4. When a non-empty query still identifies no Music after filter removal, classify it as a text mismatch.
5. When query and filters are both empty, distinguish an actually empty Music catalog from search mismatch. Route that service-level absence to a separate no-data state instead of inventing search guidance. This approval does not define new visible copy or actions for that separate state. An empty Chart catalog uses the approved no-published-Chart state.

Approved visible behavior:

- Keep the committed query, scope, sort, view, and applied filters unchanged.
- Keep the search field, scope selector, applied-filter chips, individual removal, and the single clear-all-filters control available in their normal locations.
- Clearing all filters removes filters only. It preserves query, scope, sort, and List/Grid choice.
- Render one short scope-appropriate result statement. Do not add supporting paragraphs, recovery instructions, illustrations, recommendations, or actions inside the empty result region.
- Do not duplicate Clear query, Clear filters, Search Music, ****View Music** information**, or similar actions in the empty state. The visible search, scope, and filter controls already provide those recovery paths.
- Do not silently clear or broaden the query, remove filters, switch scope, or replace the empty result with popular or unrelated Music.
- Announce only the settled one-line result state through a pre-existing polite status region. Do not use an alert or move focus merely because the result count became zero.

Approved Transient Response and Retrieval Recovery

The approved 300ms input-settling interval and the 300ms request-visibility threshold are separate clocks. The first prevents a request during continued text entry. The second starts only after a request begins and prevents short requests from flashing a loading treatment.

1. Fast initial or replacement request: If the newest request settles within 300ms of starting, replace the result collection atomically. Do not show a spinner, skeleton, loading label, dimming treatment, or intermediate live-region message. Preserve control focus and scroll position, then announce only the settled result count or settled no-result state once.
2. Slow initial request: When no committed result collection exists and the newest

request remains pending after 300ms, keep the real search, scope, sort, and filter controls available and replace only the result region with a compact, result-shaped skeleton. Its jacket, title, and metadata blocks approximate the collection structure without simulating every final detail. It must fit within a representative initial viewport and must not become a full-page overlay or central spinner. Exact skeleton quantity and foundation styling remain specimen work.

3. Slow replacement request: When a committed result collection already exists,

retain it after the request crosses 300ms instead of replacing it with a skeleton. Visually weaken the collection, show one concise progress indication in or adjacent to the stable result summary, and expose the result region as busy. Search, scope, sort, and filter controls remain operable so the user can revise the request. Once the slow state is visible, stale result cards must not activate because they no longer match the committed request. Before the threshold, the unchanged collection may remain normally operable because no stale visual state is presented.

4. Request supersession: Cancel or logically invalidate obsolete requests. Only

the newest request may settle the collection, update the URL-backed result state, clear busy state, or announce an outcome. A canceled or obsolete request never becomes a visible error.

5. Initial or replacement failure: Keep the committed query, scope, sort, view,

and filters. Replace only the result region with the approved scope-specific one-line retrieval error and one Retry action. Do not leave a mismatched stale collection visible indefinitely, redirect to a route-wide error screen, use a toast as the only recovery, add a paragraph or illustration, or misclassify the failure as zero results.

6. Retry: An initial error does not receive autofocus. When the user activates

Retry, retain focus on that control, prevent duplicate activation, and expose the request as busy without removing the focused node. Repeated failure keeps focus on Retry and politely announces the concise error once. Success removes the retry control, restores the collection, moves focus to the stable result summary, and announces the settled result once.

7. Finite timeout gate: The guide does not invent a fixed timeout before production

latency is measured. Before implementation is accepted, choose and document a finite request timeout from representative production p95/p99 latency, platform limits, and backend cancellation behavior. The measured value must route to the same retrieval-failure and retry model; an infinite pending state is not permitted.

Responsive Requirements

Narrow Layout

- Preserve one strong vertical task sequence: scope-aware search, compact committed

state, results, then explicit Load more.

- Keep dense controls out of the permanent content column. Open Sort and Filter through

one labelled trigger into the approved result-obscuring layer, with the current sort and applied-filter count still visible in the result summary.

- Do not add a mobile-only bottom navigation or a persistent row of scope/filter

buttons.

- Ensure the software keyboard, Korean/Japanese IME composition, browser chrome, and

compact viewport height do not hide the filter completion action.

- Result cards must tolerate long Japanese original titles without horizontal

overflow. Translated and read-title aliases remain searchable but are not repeated as visible card captions.

- At the 390px baseline, use two Grid columns and one List column. Preserve square

Grid jackets and let only the lower information region grow for long content.

Wide Layout

- Do not stretch a 390px mobile canvas across a desktop.
- Below a 1216px page-layout query-container width, retain the one labelled

Filter and sort trigger and staged temporary layer. At 1216px and wider, place the full-width scope-aware search above a 3/12 visible filter rail, one 16px inter-region gutter, and a 9/12 result region.

- At the 1216px activation threshold, target approximately 292px for the filter

rail and 908px for results. This component-owned transition is independent of the shared 1056px twelve-track page-grid transition.

- Keep Filter and Sort as separate directly labelled controls in the exposed

composition. Discrete filters apply immediately; continuous controls debounce or commit according to their interaction. Sort remains one labelled selector in the result toolbar rather than a permanent row of sort buttons.

- Preserve one search and scope model rather than introducing desktop-only taxonomy.
- Do not place unrelated announcements or navigation in space intended to support

search, filtering, or result comparison.

- Keep List cards at one column below approximately 440–460px of usable width per

card, use two columns only when that width is available for both, and never exceed two List columns. Grid uses result-container capacity: two columns at 288–535px, three at 536–719px, four at 720–903px, and a maximum of five at 904px and wider. 138px is the compact emergency floor; ordinary new columns require the 168px preferred width.

Accessibility Requirements

- Provide an explicit accessible name for the search field that includes or is programmatically associated with the active scope.

- The compact scope selector must expose its selected value, expanded state, controlled popup, keyboard operation, visible text choices, and predictable focus return.

- Search updates must not move focus on every result refresh.

- Result-count updates use restrained live-region semantics and must not announce intermediate stale responses.

- Keep the result region's `aria-busy` state false for requests that settle before the 300ms visibility threshold. If a request crosses that threshold, set it true until only the newest request settles as success, no results, or failure.

- A slow replacement keeps stale content perceivable as prior content but removes its result links from activation and keyboard interaction while the visible busy state persists. Search, scope, sort, filter, and cancel/revision controls remain operable.

- A result-shaped skeleton is presentational and hidden from the accessibility tree.

The stable result region and status semantics communicate loading without making placeholder blocks sound like real Music or Chart results.

- A settled no-result message uses the same pre-existing polite status region and announces only the concise localized statement. It does not receive focus, use alert semantics, or repeat visible recovery controls as prose.

- The mobile Filter-and-sort layer requires an accessible name and contained focus while modal. Escape, Back, or explicit Close discards staged changes, preserves the prior result reading position, and returns focus to the invoking trigger.

- The combined trigger's accessible name must communicate the feature, committed applied-filter count, and current sort without treating the sort as another filter.

- The mobile completion action must remain reachable at browser zoom and compact viewport heights.

- View results commits staged values, closes the layer, reveals the stable result

summary, and moves programmatic focus to that summary. The summary communicates the committed scope, result count or settled result state, and current sort without becoming an action or automatically selecting the first result.

- Use the same DOM focus destination across touch, keyboard, and screen-reader input.

A visible focus treatment is required for keyboard navigation and may use `:focus-visible` so pointer activation does not add a persistent ornamental ring.

- If the settled result is already available when the layer closes, the focused

summary provides the orientation and the same count must not be announced twice. If the result request is still pending, expose the result region as busy and announce one settled count, concise no-result statement, or failure politely when it completes. Submitting unchanged staged values still returns to the summary but does not claim that the results changed.

- This mobile post-commit focus rule does not prescribe whether the visible summary

shares a row with the Filter-and-sort trigger. Exact grouping is validated later with narrow and localized specimens; the summary must remain a distinct semantic element either way.

- Applied-filter removal controls must include the category and value in their

accessible names.

- When Unplayed resets recent-play order, update the visible selected sort in the same

interaction and issue one concise polite announcement that names the newly selected sort. Do not announce an error or move focus solely because the dependent value changed.

- Keep the unavailable recent-play option perceivable in the sort surface. Associate

it programmatically with the concise Unplayed reason, expose its unavailable state semantically, and prevent activation without relying on color or reduced opacity alone.

- The mobile layer's staged announcement must not claim that committed results changed.

If the user cancels, restore the prior committed filter and sort without a second result-update announcement.

- Information revealed by pointer hover in the personal-record preview must also be

available on keyboard focus. The preview must not contain the only accessible name or the only indication of committed filter state.

- A preview that obscures resting content must be dismissible with Escape, remain

available while hover or focus persists, preserve Enter activation of the whole-card link, and avoid layout movement.

- Touch users must not need a synthetic hover step before activating a result.

- Load more must be a keyboard-operable explicit control. Because appended

actionable results precede the relocated control in document order, a successful user-initiated append moves focus to the first new result and announces the added count and visible progress. Failure retains focus on the action.

- The result region exposes `aria-busy` only while its current update is incomplete,

and a polite status region announces one settled loading, success, failure, or completion message without repeating intermediate states.

- Initial retrieval failure does not steal focus. Retry pending preserves the focused

retry control and prevents duplicate activation without removing that node. Repeated failure keeps focus there; successful retry moves focus to the stable result summary because the retry control no longer exists.

- Canceled, superseded, and out-of-order requests never announce a failure or a result.
- Use semantic result headings/lists and one page-level main landmark.
- Meet WCAG 2.2 target-size or target-spacing requirements for scope, filter, clear, result, and progressive-loading controls.

Localization Requirements

- Validate all visible and accessible labels in Korean, Japanese, and English.
- Preserve the original Music title as the primary identity.
- Do not show translated or Japanese-reading captions in repeated List, Grid, or Chart

results. Keep approved localized/read titles in the search index so users can find a Music entry with them while the result preserves the canonical original title.

- In both List and Grid, cap the original title and artist at one line each. Preserve

complete values in the accessible name and detail destination so visual truncation never removes the only complete identifying text.

- Text search and the 300ms idle trigger must be composition-safe for Korean and Japanese IME input.

- Dynamic result counts, visible ranges, and Load-more amounts require locale-aware number and grammar handling; do not construct them through unsafe string concatenation.

- Use the approved visible progressive-loading copy pattern:

- Korean: 20 , 583 20 ,
.

- Japanese: 20 , 583 20 ,

- English: Load 20 more results, Showing 20 of 583,

You have viewed all results. Replace 20 with the actual next amount for a final partial batch. The accessible action name additionally identifies the active Music- or Chart-search context without lengthening the visible label.

- Scope, filter, difficulty, result-state, retry, and end-state copy must be complete

in all three locales before the page family is accepted.

- Use the approved retrieval-failure and retry copy without a subtitle:

- Music scope - Korean: .; Japanese:
; English: Couldn't load songs.

- Chart scope - Korean: .; Japanese:
; English: Couldn't load charts.

- Retry - Korean: ; Japanese: ; English: Try again.

Native-language QA must validate punctuation, tone, and accessible busy extensions before implementation acceptance, but may not expand the visible state into explanatory body copy without reopening the decision.

- Use the approved visible no-result copy without an explanatory subtitle:

- Text mismatch - Korean: .; Japanese:
; English: No matching songs.

- Filter-constrained Music - Korean: .; Japanese:

; English: No songs match these conditions.

- Chart scope with zero published results - Korean:

.; Japanese: ; English: No published charts. These strings are complete visible states, not headings that require body copy.

- Query and filter URL values remain stable technical identifiers where translating them would break sharing or implementation mapping.

- Empty Music browse uses `title_kana` as its technical ordering key in every locale.

Translation display preferences change visible secondary text, not catalog order.

- Sort labels, direction, and an explicit level-sort difficulty target require complete

Korean, Japanese, and English names. Do not expose a difficulty target through color or an abbreviation alone.

Reference Comparison

The references below were compared for interaction principles, not copied as visual templates. Commerce evidence is used only where the filtering task transfers to NosLog; enterprise and government systems are structural and accessibility references, not NosLog art direction.

Source	Transferable principle	NosLog application	Limitation
SAP Fiori: Filter Bar	Live update is more convenient when feasible; manual update is appropriate for multiple required values or excessive traffic.	Use live result-visible desktop filters and staged result-obscuring mobile filters.	Enterprise list reports are denser and more configurable than NosLog.
SAP Fiori Android: Sort and filter	Sort and filter may share one compact-screen full-screen dialog while remaining separate sections.	Supports one explicitly labelled mobile entry and internal separation, without imposing the same anatomy on desktop.	Enterprise application frequency and terminology differ from NosLog.
CXL: Mobile ecommerce guidelines	Separate controls maximize distinction, while a clearly labelled combined Sort and filter control remains feasible.	NosLog chooses the combined narrow trigger because current sort remains visible and internal sections stay distinct.	Commerce conversion evidence does not establish NOSTALGIA feature priority.
Shopify: Storefront filtering UX	Mobile filter interfaces commonly move behind one labelled drawer or modal trigger instead of retaining a desktop sidebar.	Supports removing dense permanent mobile controls and preserving a result-adjacent entry.	The guidance focuses on storefront filters and does not decide NosLog sort semantics.
Carbon: Filtering	Instant update fits one expected choice; batch update fits several categories or slow responses.	NosLog's many categories, ranges, and personal filters require more than one universal rule.	Carbon examples emphasize enterprise data products.
Dell Design System: Filter	Dynamic filtering removes Apply but can distract; batch filtering supports complex multi-select and slow data.	Keep desktop feedback visible and let mobile users finish multiple changes before replacing obscured results.	Its "batch as safe default" is not a substitute for NosLog testing.
NSW Design System: Filters	Instant and batch models depend on expected action count; mobile batch uses a sticky Apply action that also closes the filter view.	The NosLog mobile View results action combines commit and return, avoiding a separate close step.	Government search content differs from a rhythm-game catalog.
Visa Product Design System: Filters	Repeated instant reloads can disorient; applied chips and clear state must remain explicit.	Keep committed filters visible and make chip removal immediate.	Visa generally prefers Apply and may overfit transaction/data workflows.
DWP Design System: Filter research	Batch prevents repeated refresh, but pending and committed state can become unsynchronized; result count and applied tags bridge the gap.	Visually separate staged mobile values from committed result state and show count/applied criteria after return.	The published research favors batch overall and must be balanced against NosLog's faster consumer task.
Scottish Government: Search filters	Mobile results should not update invisibly behind opened filters; desktop may update automatically.	Supports responsive filter application instead of one behavior on every width.	Public-service content and filtering frequency differ.
VA.gov: Search Filter	Multi-facet results need explicit apply/reset behavior and careful focus communication.	Informs mobile commit, reset, error, and accessibility requirements.	It mandates Apply more broadly than the approved NosLog desktop behavior.
Maersk: Filter patterns	Live results are suitable when fast; batch avoids repeated loads when responses are slower or mobile results are obscured.	Performance thresholds must be measured, while the interaction remains predictable.	Logistics applications have different data volume and user expertise.
NICE Design System: Filters	Result summaries, applied state, and retryable filtering belong to one coherent pattern.	Keep count, committed criteria, result collection, and recovery semantically adjacent.	The component does not resolve NosLog card content or update mode.

Source	Transferable principle	NosLog application	Limitation
Australian Agriculture Design System: Search filters	A responsive filter drawer can batch changes and close through one Apply action.	Supports the approved result-obscuring mobile layer.	It is a government implementation pattern, not visual direction.
Department for Education: Filter	Place the completion action where users finish selecting, and test mobile discoverability.	Keep the mobile result action sticky and reachable after long filter groups.	It derives from the Ministry of Justice pattern and is not independent visual evidence.
Siemens Element: Filter	Choose batch for multiple changes and live update when immediate feedback is valuable.	Reinforces the responsive, task-sensitive split.	Industrial applications differ from public music discovery.
Octopus Design System: Filtering	Filter state should remain dismissible and impossible combinations should be communicated.	Applied criteria need individual removal and zero-result recovery.	Exact filter-control choices remain NosLog-specific.
Baymard: Ecommerce filter UI	Desktop benefits from visible real-time feedback, while mobile often benefits from a results-return action and visible applied state.	The responsive interaction pattern transfers even though NosLog does not inherit merchandising behavior.	Ecommerce research cannot determine NosLog's fields, ordering, or visual style.
eBay: Filtering patterns	Users need to adjust and remove criteria without restarting discovery.	Preserve query, expose committed filters, and make recovery reversible.	Marketplace inventory and commercial facets do not transfer.
Algolia: Faceting	Contextual facet values and counts can update with result state.	Supports exact applied-state counts when performance and query design are verified.	Search-engine capability does not prove that live counts are always good UX.
Elastic Search UI	Search-as-you-type, faceting, and conditional facets require explicit state and request handling.	Supports active text search and stale-request protection as implementation capabilities.	It is technical tooling guidance rather than independent user research.
WAI-ARIA APG: Combobox	Editable popup controls require defined keyboard, focus, selection, and popup relationships.	The scope-aware search and suggestions must not rely on pointer interaction or icons alone.	The exact scope selector may use a menu rather than a combobox and must follow its actual semantic pattern.
WCAG 2.2: Status Messages	Dynamic results and status changes should be available to assistive technology without taking focus.	Announce settled counts and failures without moving focus on every refresh.	It does not prescribe debounce timing or visual presentation.

Mobile Post-Commit Focus Comparison

The focused comparison separates ordinary dialog dismissal from completion of a result-oriented filter workflow. General dialog systems converge on returning focus to the invoking trigger, while WAI-ARIA APG explicitly permits a more logical workflow destination when the dialog task leads directly to a subsequent step. Filter-specific systems then converge on an explicit mobile commit, a visible result summary, and orientation to the updated results. Primer's warning against moving focus after each individual filter choice does not conflict with NosLog because selections remain staged; focus moves only after the user activates View results.

Source	Evidence or disagreement	NosLog application and limitation
WAI-ARIA APG: Modal Dialog	Close normally returns to the invoker, but a directly related next workflow step may be a more logical destination.	Supports trigger return for cancel and result-summary focus for successful commit; APG does not choose NosLog's visible layout.
W3C H102: HTML dialog	Native modal close ordinarily restores the invoking element.	Establishes the safe default that cancel paths retain; it does not override the APG workflow exception.
USWDS: Modal accessibility tests	Modal focus must remain contained and return to the expected invoking element after ordinary close.	Informs contained focus and cancellation QA; the component is not a search-filter workflow.
Radix Dialog	Escape closes and returns focus to the trigger, with close autofocus available for controlled exceptions.	Matches the current project primitive and requires an intentional post-commit override; library defaults do not decide product workflow.
Carbon: Dialog pattern	Modal close returns focus to its invoker.	Reinforces predictable cancel behavior; enterprise dialog guidance does not address a mobile result handoff.
Fluent 2: Dialog	Dialog close restores the triggering component.	Supports ordinary dismissal and clear initial/contained focus, not the result-specific exception.
PatternFly: About modal accessibility	Escape dismissal returns focus to the invoking element.	Adds independent modal convergence but its informational modal is less task-oriented than NosLog filtering.

Source	Evidence or disagreement	NosLog application and limitation
VA.gov: Search Filter	After filters are applied, focus moves to the result heading or summary.	Directly supports the approved summary target; VA's government content and wider Apply preference do not determine NosLog styling or desktop behavior.
VA.gov: Sort	Filtering moves to the result description or heading, while sorting that remains visible keeps focus on its control.	Supports the NosLog responsive split: obscured mobile commit moves to results, visible desktop sorting does not.
DWP: Filters	Batch filtering preserves choices until deliberate Apply and requires clear feedback after filtering.	Supports one post-commit handoff rather than movement after each staged choice; public-service frequency differs.
DWP: Filter design notes	Mobile can hide both filter controls and results; count and applied-filter state orient the returned user.	Supports a stable visible summary and applied state; it does not prescribe same-row versus split-row composition.
NSW Design System: Filters	Small-screen batch Apply closes the filter window and displays updated results.	Supports commit-and-return as one action; it does not prescribe the precise focus node.
Scottish Government: Search filters	Mobile waits for an explicit Apply rather than updating obscured results automatically.	Supports the approved staged layer; government copy and control anatomy are not visual direction.
Primer: Focus management	Focus should remain on an individual filter while the user may continue filtering; after removal or workflow changes it needs a logical destination.	Confirms no movement during staging and permits one logical move after completion; it is design-system guidance, not a WCAG mandate.
WCAG 2.2: Status Messages	Settled result counts, no-result states, and failures must be available without unnecessary focus interruption.	Requires restrained polite completion messages and duplicate-announcement suppression; it does not require focus to move after every update.
WCAG 2.2: Focus Order	Programmatic focus order must remain understandable and operable; static elements may receive focus when they provide logical context.	Supports a focusable summary before the result collection, provided it does not become a confusing extra stop during ordinary navigation.
WCAG 2.2: Concurrent Input Mechanisms	Content must not assume that a platform user will remain with one input mechanism.	Supports one logical DOM destination across touch, keyboard, and assistive-technology use; visible focus decoration may still follow input capability.

NosLog therefore uses one input-method-independent DOM rule: successful mobile View results reveals and focuses the stable summary; cancel, Back, and Escape restore the invoking trigger and prior reading context. If settled data is ready, the focused summary is announced once. If it is pending, one polite settled outcome follows the busy state. Desktop and ordinary search refreshes retain control focus. The visual choice between a same-row and split-row summary remains a localized 390px specimen decision, not part of the focus rule.

No-Result Recovery Comparison

The approved treatment follows a nineteen-entry comparison across the current product, filter-heavy systems, empty-state systems, accessibility standards, search platforms, and rhythm-game catalog structure. The references establish the need for truthful state, preserved work, and an available recovery path. They do not require NosLog to add explanatory copy or a new button when the relevant controls are already visible.

Source	Transferable principle	NosLog application	Limitation
Current NosLog code and /ko/music browser audit (2026-07-31)	Query and controls remain, but every cause produces one generic sentence and there is no visible applied-state recovery.	Preserve the useful stable controls while adding internal cause classification, applied chips, and filter-only reset.	Current behavior is evidence, not an approved visual template.
DWP: Designing a filter component	No-filter, filtered-result, and filtered-zero states are distinct; applied filters and clear-all make state explicit.	Keep removable committed chips and one clear-all control even when the result collection is empty.	Government casework is more procedural and often uses more explanatory copy.
Primer: Filter	A filtered zero state should name active state and make reset or revert obvious; dynamic change needs a status announcement.	The applied-state region, not a duplicated empty-state action group, provides removal and reset.	GitHub's dense work-management context differs from fast Music lookup.
Baymard: Applied filters	An applied-filter overview prevents disorientation and makes deselection efficient.	Keep committed filter chips visible above both results and the empty region.	Commerce conversion evidence does not justify product recommendations in NosLog.
Ministry of Justice: Filter	Selected criteria should remain visible and individually removable after application.	Preserve immediate chip removal and filter-only clear-all across mobile and desktop models.	Batch-oriented government forms do not decide NosLog's visible copy length.

Source	Transferable principle	NosLog application	Limitation
Carbon: Empty states	Explain the state and provide a next step when needed, but pick one important path and keep content contextual. Guidance may point to existing UI instead of adding a button.	Existing visible search, scope, and filter controls are the next step, so one concise statement is sufficient.	Enterprise examples often have more space and lower-frequency empty states.
Atlassian: Empty-state content	Copy should be scannable, brief, non-redundant, and cautious about multiple actions.	Use one line and no explanatory subtitle or empty-state action group.	Some Atlassian examples emphasize onboarding or task completion rather than search.
SAP Fiori: Empty states	Search, filter, no-data, and system-error causes require different treatment; message and CTA depth depend on context.	Separate failure, mismatch, filter constraint, publication absence, and catalog absence internally.	Illustrated enterprise states would add unnecessary weight to NosLog discovery.
Shopify: Empty state	A blank area should offer a clear path and should not overload primary actions.	Treat the persistent controls as the path instead of adding another primary button.	Merchant onboarding and conversion goals are not NosLog goals.
PatternFly: No results	No-result states should be compact and tell users that criteria returned nothing.	Supports short state copy, but NosLog omits redundant instructions because controls remain directly adjacent.	PatternFly's prescribed body copy is not mandatory for a high-frequency consumer lookup.
SIS Design System: Empty state	Search no-result is distinct from no data and load failure; dynamic appearance needs live-region communication.	Keep retrieval errors separate and announce only the settled result state.	Intelligence-service workflows are not visual or tonal references for NosLog.
USWDS: Search	Search terms should persist into the results experience.	Never erase the query after zero results; let the user edit it in place.	Site-wide government search is broader than the NosLog catalog.
W3C: @@NOSLOGTOKEN0@@	A settled result count or zero-result update can be announced politely without receiving focus.	Use one pre-existing atomic polite status region and no alert semantics.	The technique does not prescribe visible wording or recovery controls.
Apple HIG: Search fields	Editable search, clear affordance, immediate results, scope, and filters can remain part of one search experience.	Leave correction, clearing, and scope change in their existing controls.	Native-platform placement advice does not determine the web layout.
Algolia: Empty or insufficient results	Search systems can broaden queries or show alternatives to reduce dead ends.	NosLog records the alternative but rejects silent expansion and unrelated fallback content for an exact official catalog.	The guidance is strongly influenced by ecommerce engagement and conversion.
Elastic Search UI: Clear filters	Query state and filter-clearing actions can remain separate.	Clear-all removes filters only while preserving query, scope, sort, and view.	This proves implementation feasibility, not user preference.
Adobe React Spectrum: ListView	A result collection can replace its rows with a dedicated no-result rendering.	Replace the empty list/grid body with the concise state while keeping the surrounding discovery controls stable.	Component documentation does not define NosLog cause semantics.
osu!: Beatmap	A Music identity can contain multiple difficulty beatmaps with separate availability and status.	A matching Music without an eligible published pattern is not the same as text mismatch.	Domain structure is relevant, but osu! does not prescribe NosLog empty-state UI.
Taiko.wiki: Song search	Rhythm-game discovery keeps title, artist, genre, and difficulty within a song-centered search surface.	Supports keeping correction and refinement in the same visible discovery controls.	Its current interface is a comparator, not an accessibility or visual authority.

Evidence convergence:

- Preserve the committed query and controls; do not make the user restart discovery.
- Distinguish text mismatch, filter constraint, publication absence, catalog absence, and retrieval failure even when some visible messages remain intentionally concise.
- Keep applied criteria removable and provide one filter-only clear-all action.
- Use a settled polite status announcement without moving focus or turning zero results into an error.

- A next step may be supplied by the surrounding controls. Explanatory body copy and empty-state buttons are optional, not inherent requirements.

Evidence disagreement and NosLog resolution:

- Commerce search frequently recommends query expansion, related inventory, or popular content. NosLog rejects those fallbacks because they can obscure exact Music and publication meaning.
- Several component systems illustrate a title, body, image, and CTA. NosLog uses

text only because search, scope, and applied-filter recovery remain visible and the user task is a fast, repeated catalog lookup.

- Some systems expose detailed cause explanations. NosLog keeps detailed cause logic

in the result service, analytics, and tests, while the interface uses the approved one-line localized statements.

Progressive-Loading Comparison

The approved 20-result contract follows a twenty-four-entry comparison including measured NosLog evidence. The sources converge on explicit user control, predictable quantity, visible progress, settled status communication, bounded initial work, and recoverable history. They disagree on one universal quantity and on whether focus should remain on the trigger or move to new content. NosLog therefore chooses its amount from its own result density and chooses first-new-result focus because every appended card is actionable and otherwise precedes the relocated control in keyboard order.

Source	Evidence or transferable principle	NosLog application and limitation
Current NosLog query and list implementation (2026-07-31)	Cursor queries already return 20; an <code>IntersectionObserver</code> currently appends automatically.	Retain the proven query unit but replace viewport triggering with the approved explicit action. Current behavior is not approval.
Current NosLog 390px and accumulated-DOM audit (2026-07-31)	20 fills about two List or 3.5 Grid viewports; DOM elements grow from 464 at 20 to 1,073 at 60.	Supports a useful initial scan and a separate 20/60/100 performance gate; current markup is not the final component budget.
Baymard: Number of items loaded by default	Appropriate quantity varies widely; mobile product lists often fall around 15–30, with lower search thresholds.	Places 20 inside a researched mobile range, but commerce card density cannot determine NosLog's value alone.
Baymard: Telco benchmark	Explicit Load more creates a controllable break and return should restore the exact place.	Supports manual continuation and selected-result restoration; telecom shopping goals differ.
U.S. Web Design System: Pagination	Set size, screen length, performance, and user preference should determine chunking; short collections may show all.	NosLog's 583-Music catalog is not a short collection; USWDS does not prescribe Load-more copy.
SAP Fiori: Smart table	A responsive-table example starts with 20 and provides More.	A useful numeric comparator; enterprise tables are denser than NosLog cards.
SAP Fiori: Responsive table	Growing mode loads larger sets and can show loaded and total values beside More.	Supports exact progress and explicit continuation; its high-volume thresholds do not directly transfer.
SAP Fiori: Grid list	Batch amount depends on item complexity and browser; growing controls bound initial rendering.	Supports measuring List and Grid with the same logical result count rather than copying a table limit.
SAP Commerce: Infinite scroll	Product limits and explicit Show More increments are configurable for performance.	Confirms quantity is a tested contract; its 10-item example is not a rhythm-game catalog recommendation.
Carbon: Pagination	Chunking improves control and performance when collections are large.	Supports bounded retrieval as a comparison; numbered pages remain rejected for the approved continuous discovery task.
Material Design 2: Data tables	Users need rows-per-page, total, current range, and loading progress.	Supports visible quantity and progress; dense tabular pagination is not the NosLog card layout.
MusicBrainz API search	Music-entity search defaults to 25 and permits 1–100.	Shows a nearby music-catalog batch range; an API default is not evidence of ideal visible card density.
Apple Music API: Library search	Multi-type library search defaults to 5 and caps at 25.	Confirms search context may require smaller groups; the endpoint mixes entity types unlike one NosLog scope.
YouTube Data API: Search	Search defaults to 5, allows up to 50, and exposes result and page metadata.	Reinforces context-specific amounts and progress metadata; video search cards and quota policy differ.
osul beatmap listing implementation	Grouped beatmap results use cursor continuation and an explicit end condition.	Supports cursor-backed grouped rhythm-game discovery; the client does not establish NosLog's exact amount or control copy.
osulweb API documentation	Beatmap-set search returns a continuation cursor and null when complete.	Supports cursor/end-state mapping while keeping Music/Chart criteria stable across requests.
WCAG 2.2: Status Messages	Loading, result, and failure updates must be available without requiring focus.	Requires one settled polite message; it does not decide where a user-initiated continuation should place focus.

Source	Evidence or transferable principle	NosLog application and limitation
MDN: @@NOSLOGTOKEN0@@	A changing region remains busy until its multi-part update is complete.	Prevents premature announcements and duplicate status; native control semantics remain primary.
GitHub Primer: Focus management	When Load more adds actionable content, focus can move to the first newly added item.	Matches NosLog's actionable cards and forward reading order; it is design-system guidance rather than a WCAG mandate.
University of Arizona: Focus management	An alternative pattern keeps focus on Load more and announces the update.	Records genuine disagreement; rejected because NosLog's new cards precede the moved trigger and would require reverse navigation.
Chrome: Avoid an excessive DOM size	Large DOM trees increase load, rendering, and memory cost; create nodes when needed.	Requires accumulated-result testing and lean markup; audit warning thresholds are diagnostics, not a product batch number.
web.dev: DOM size and interactivity	DOM growth can increase layout work and interaction latency.	Requires measurement at 20/60/100; it does not justify silently changing the visible batch contract.
MDN: @@NOSLOGTOKEN0@@	Browser history can restore scroll position on navigation.	Supports history-entry restoration, supplemented by a selected-result anchor after asynchronous rehydration.
Next.js: Linking and navigating	App Router normally preserves Back/Forward scroll while new routes start at the top.	Supports separating durable URL criteria from ephemeral loaded and reading state; async result reconstruction still needs testing.

Ordering and Result-Composition Comparison

The ordering and result-view decision was compared across current NosLog evidence, official rhythm-game catalogs, community chart browsers, search guidance, and production design systems. No single reference determines the solution; the approved model follows the convergent task pattern while preserving NOSTALGIA-specific difficulty and data semantics.

Source	Observed pattern or evidence	NosLog fit and limitation
Current NosLog Music toolbar	Sort, direction, difficulty, filters, and view choices currently compete in one control area.	Confirms the need to reduce persistent control density; the current arrangement is not a 2.0 layout mandate.
Current NosLog Music query	Level order can depend on selected difficulties or a hidden Expert fallback, while weakness uses a composite score.	Direct migration evidence for removing weakness and requiring an explicit level target; current semantics are not retained.
Current local dataset audit (2026-07-30)	All 583 Music entries have <code>title_kana</code> , but only 3 MusicChart rows have <code>released_at</code> ; no ChartPattern is public.	Supports reading-order browse now and requires a release-data gate plus seeded Chart states before representative validation.
KONAMI NOSTALGIA Op.3 play data	Music identity, named difficulty, level, and record dimensions stay explicitly associated.	Supports preserving NOSTALGIA difficulty identity; the authenticated record page does not prescribe public catalog layout.
maimai DX song list	A jacket-led official catalog keeps title, artist, category, and multiple difficulty levels together.	Supports Music-centered grouping and optional visual browsing; maimai's categories and visual density are not copied.
CHUNITHM song list	Official songs remain grouped as one identity with their difficulty data rather than independent difficulty cards.	Supports one Music result with several difficulties; it does not cover community Chart publication.
osu! beatmap listing	Query, mode, category, explicit sorting, and grouped beatmap sets coexist.	Supports explicit scope and sort state plus grouped variants; osu! terminology and ranking model do not transfer directly.
osu! client interface	Grouping and sorting are separate concepts, and difficulty sorting can separate related variants.	Supports keeping Music grouping stable and avoiding an implicit cross-difficulty representative level.
BeatSaver	Community charts foreground newly uploaded content and expose direct difficulty targets from a song identity.	Supports latest-published Chart browse; Beat Saber metadata and moderation semantics differ.
StepManiaOnline search	Community packs and charts are searchable with explicit recency and difficulty context.	Supports publication-recency browse and difficulty visibility; pack-first structure is not NosLog's Music model.
Tachi	Rhythm-game discovery and analysis separate compact identity browsing from detailed record dimensions.	Supports list-first scan and progressive detail; Tachi is a multi-game tracker, not a public Chart marketplace.

Source	Observed pattern or evidence	NosLog fit and limitation
Algolia: Relevant sorting	Relevance and business/attribute ordering are distinct modes that need explicit configuration.	Supports active-query Relevance while preserving an explicit user order rather than silently overriding it; capability is not UX proof.
Algolia: Faceting	Sort and refinement state can remain explicit and restorable alongside query state.	Supports URL-restorable sort and target difficulty; it does not decide which NOSTALGIA sort is meaningful.
Baymard: Default sort type	Default ordering materially shapes what users perceive as the available catalog.	Supports a predictable neutral empty-browse order and rejects hidden difficulty restriction; ecommerce priorities are different.
Carbon: Data table usage	Secondary actions and view controls should preserve a clear hierarchy around the collection.	Supports one current sort trigger and purposeful list/grid controls; enterprise table density is not the target style.
PatternFly: Toolbar	Filters, sort, view, and bulk actions should be grouped by role and progressively disclosed when space is limited.	Supports placing the level target inside sort disclosure rather than adding a permanent difficulty-button row.
U.S. Web Design System: Search	Search labels, status, and results must remain understandable without depending on icon recognition alone.	Requires localized visible sort/scope meaning and accessible control names; government visual styling does not transfer.

Music Result-Card Anatomy Comparison

The approved Music card anatomy was tested against the seventeen-source ordering and result-composition set above, current narrow and wide NosLog browser evidence, the local source-catalog length distribution, and the focused interaction references below. The sources converge on stable identity, predictable whole-card activation, capability-based hover enhancement, and square media that does not force the entire card to be square. They do not prescribe NosLog's exact dimensions; the 64px square List-jacket edge, 20px difficulty badge, and 440–460px List-column boundary preserve the audited useful compactness and must be validated as component specimens.

Source	Observed principle	NosLog fit and limitation
Current NosLog Music List and Grid browser audit (390px and wide, 2026-07-30)	Compact List identity, trailing difficulties, square Grid jackets, and category badges already support rapid recognition.	Approved as structural evidence, not as final styling; crowded controls and the narrow desktop shell are not retained.
Current source-catalog length audit (prisma/data/nosdata-musics.json, 2026-07-31)	Long artist values are common and title length varies materially across the 578 source entries.	Supports separating category from artist and setting intentional line budgets; source rows differ from the local database row count.
Apple HIG: Lists and tables	Repeated rows should prioritize scannability, consistent alignment, and clear selection behavior.	Supports compact whole-row activation and aligned metadata; native-platform styling and control sizes do not transfer directly.
Apple HIG: Collections	Collections can adapt item count to available space while preserving recognizable item structure.	Supports container-driven Grid columns; Apple platform conventions do not determine NosLog's column tokens.
Material Design 2: Cards	A card groups related identity and actions, with clear hierarchy and predictable activation rather than fragmented targets.	Supports one Music-detail target and informational difficulty values; Material surface styling is not NosLog art direction.
Fluent 2: Card usage	Card layouts need stable hierarchy, state treatment, and intentional interaction affordances across input methods.	Supports same-card preview states without layout shift; Fluent visual tokens are not copied.
W3C Media Queries Level 5	hover and pointer describe input capability independently of viewport size.	Requires preview eligibility based on capability rather than a "desktop" breakpoint; reported capabilities still require browser testing.
MDN: @@NOSLOGTOKEN0@@.media feature	Interfaces can condition enhancement on whether the primary input can conveniently hover.	Supports excluding first-tap and long-press preview behavior; the media query does not itself provide keyboard equivalence.
web.dev: Interaction	Responsive interaction must account for mouse, keyboard, touch, focus, and reduced motion instead of assuming one device.	Supports direct touch navigation and equivalent focus behavior; it does not decide NosLog record content.
Apple HIG: Context menus	Long press is associated with contextual actions and should not replace the primary, discoverable activation path.	Supports rejecting long-press record preview; NosLog does not adopt a context menu from this evidence.
WCAG 2.2: Content on Hover or Focus	Hover/focus content that obscures other content must be dismissible, hoverable, and persistent, with keyboard availability.	Governs the approved same-card preview; it does not require exposing the preview on touch.

Personal-Record Taxonomy Comparison

The personal-record decision was tested against the domain and score-product evidence below together with the broader filtering and accessibility sources above. The combined comparison exceeds fifteen independent relevant sources; duplicate storefronts and derivative summaries were not counted as separate support.

Source	Observed pattern	NosLog fit and limitation
Current NosLog record filter	The current UI exposes 14 controls across status, judgement, timing, and note-type weakness groups.	It is implementation inventory, not evidence that every control deserves equal 2.0 prominence.
Current NosLog record query	Current record choices within several groups are broadly combined as matches and include a Clear criterion.	Confirms migration impact; the existing query model must not define the new domain semantics.
KONAMI NOSTALGIA Op.3 play data	Best Score, Rank, ♦JUST/Just/Good/Miss/Nea r, Max Combo, note-type rates, update time, and recent history coexist.	Confirms available record dimensions, while the authenticated detail page does not prove that all of them are useful discovery filters.
NosLog Op.3 Bingo source data	Official mission records repeatedly use absolute MISS thresholds as completion targets.	Strong NOSTALGIA-specific evidence that MISS count is actionable; mission criteria do not require permanent prominence in search.
KONAMI beatmania IIDX 33 original filters	Players can build goal-oriented filters including level, clear lamp, DJ level, and a 0–300 MISS COUNT range.	Supports an absolute range for practice selection; IIDX clear-lamp semantics must not be copied into NOSTALGIA.
TrackBrowser App Store history	An IIDX catalog tool added Miss Count filtering, custom ranges, filter summaries, and score-data integration.	Supports progressive personal refinement and visible committed state; it remains an unofficial IIDX-specific product.
osu! API score model	Miss count is stored as an individual score statistic beside accuracy, combo, pass, and grade data.	Shows MISS as a portable score fact, not evidence that it should be a primary song-catalog facet.
ScoreSaber Reloaded score tracking	Score lists expose misses as detail and allow miss-count sorting for clean-score review.	Supports practice relevance while demonstrating that sort/detail can be enough in some products.
Tachi	A rhythm-game tracker separates score collection, detailed analysis, goals, sessions, and folders.	Supports keeping rich metrics in analysis while exposing only task-relevant discovery controls; it is multi-game and highly modular.
Ministry of Justice: Filter	Filters should be limited to useful criteria, show applied state, and use clear category logic.	Supports removing redundant Clear and low-value judgement/note-type facets rather than preserving the current count.
Baymard: Product-list filtering	User-entered numeric ranges are useful for continuous values when bounds and active state are clear.	Supports optional MISS bounds at the interaction level; commerce findings do not determine NOSTALGIA taxonomy.
WCAG 2.2: Content on Hover or Focus	Additional content triggered by hover must also work with focus and remain perceivable and dismissible.	Requires the approved capability-gated preview to be keyboard-equivalent; it does not justify creating hover behavior on touch.

Unplayed and Recent-Order Conflict Comparison

The approved transition was checked against eighteen independent repository, domain, accessibility, design-system, search-platform, and collection-product sources. The comparison converges on truthful sort labels, discoverable temporary unavailability, preserved applied-state context, and explicit feedback when one choice changes another. General systems do not decide which of two incompatible NosLog controls has semantic priority; that resolution comes from the approved product rule that a filter determines result membership while a sort only changes the order of that membership.

Source	Evidence or transferable principle	NosLog application and limitation
Current signed-in NosLog browser audit (390px and wide, 2026–07–31)	Unplayed and recent-play order can remain visibly active together without explanation.	Directly reproduces the misleading state to remove; current visual placement is not the 2.0 layout.
Current NosLog record query	Unplayed results receive a recent metric of 0 and are then tie-broken by title.	Proves that a retained recent label is false rather than merely low-value; implementation details do not define the approved fallback.
KONAMI NOSTALGIA Op.3 play data	Recent history and update time are properties of recorded play, while an unplayed target has no play event to order.	Establishes the domain incompatibility; the authenticated official page does not prescribe filter-control interaction.

Source	Evidence or transferable principle	NosLog application and limitation
SAP Fiori: List	Every offered sort must have a meaningful order for its displayed data point.	Rejects treating title tie-breaks as “recent”; SAP list styling and enterprise density do not transfer.
PatternFly: Menu	Keep a temporarily unavailable action disabled with an explanation; hide actions prohibited by a permanent rule.	Supports a visible unavailable recent option because Unplayed is removable; a tooltip alone is insufficient for touch and screen readers.
PatternFly: Filters	Filter limitations need clear validation and explanatory feedback, including responsive filter contexts.	Supports concise dependency feedback inside the filter-and-sort surface; it does not justify treating the transition as an error.
WAI-ARIA APG: Keyboard interface	A disabled option may remain focusable when discoverability matters, with consistent semantic conventions.	Requires an accessible unavailable state and reason; exact composite-widget focus behavior follows the final sort component.
WCAG 2.2: On Input	Changes caused by a control must remain predictable and users need advance or contextual notice for context changes.	Supports visible synchronous sort replacement and a concise announcement; the staged value change alone is not a page-context change.
ONS: Mutually exclusive inputs	Selecting an exclusive option clears incompatible answers and announces what was deselected through a live message.	Supports atomic filter/sort normalization and one announcement; a survey “none” answer differs from a catalog filter and sort.
Scottish Government: Checkboxes	Selecting an exclusive checkbox clears others, while selecting another value clears the exclusive option.	Confirms that automatic mutual exclusion can be understandable; NosLog rejects symmetric clearing because a sort must not remove filters.
Apple HIG: Toggles	Mutually exclusive choices should use state and labels that make the exclusivity clear.	Supports legible current state; Unplayed and sort remain separate semantic groups rather than one radio group.
USWDS: Combo box	Dependent options increase confusion and should be avoided or made explicit when unavoidable.	Supports eliminating a hidden invalid combination; a combo box is not prescribed for NosLog sorting.
NSW Design System: Filters	Preserve the user’s selected state, label controls clearly, and make mobile staged application explicit.	Supports paired staged restoration on cancel and committed-state visibility; it does not decide the fallback sort.
Shopify: Storefront filtering UX	Avoid dead ends, show applied filters, and disable currently zero-result values rather than allowing misleading input.	Supports temporary visible unavailability; commerce facet counts do not map directly to a personal play-history sort.
Algolia: Faceting	Facet values and counts update contextually while committed refinements remain explicit.	Supports coherent filter/result state; search-engine capability does not choose which product state wins a conflict.
Elastic Search UI: Facet	Conjunctive and disjunctive facet behavior must be configured explicitly rather than inferred from visible controls.	Supports an explicit incompatibility rule and tests; it does not cover ordering by missing personal data.
Baymard: Applied filters	Applied-filter visibility prevents disorientation and gives users a direct way to understand and remove constraints.	Supports keeping Unplayed visible after sort normalization; ecommerce conversion findings are not direct NOSTALGIA evidence.
Backloggd changelog	A game collection can expose both an Unplayed state and Last Played order as separate library tools.	Confirms the nearby user need but does not publish its collision transition; it cannot override the NosLog domain rule.

NosLog therefore gives membership-defining Unplayed priority over the incompatible order, keeps the temporary dependency discoverable, and does not make the rule symmetrical. Selecting Unplayed replaces recent order with the context default; selecting a sort never removes Unplayed. This minimizes steps when narrowing results without allowing an ordering control to silently broaden them.

Transient Response and Retrieval-Failure Comparison

The approved response model follows a comparison of current NosLog evidence and at least sixteen independent external source families. Search-specific systems support a short stall threshold; component systems distinguish first-load placeholders from localized in-place progress; accessibility guidance requires a stable busy region and settled announcements. No external source establishes a universal 300ms value or NosLog’s exact stale-card rule. Those are the approved product resolutions for this fast, repeated catalog task.

Source	Evidence or transferable principle	NosLog application and limitation
Current NosLog repository and browser audit (2026–07–31)	Initial data blocks route rendering; replacement has no local busy state; an unhandled retrieval error escapes wider.	Establishes migration gaps and exact acceptance targets; current behavior does not approve a visual treatment.

Source	Evidence or transferable principle	NosLog application and limitation
Nielsen Norman Group: Response-time limits	Immediate responses need no special feedback; longer waits progressively require visible feedback and interruption.	Supports suppressing fast flashes and escalating feedback with duration; its broad 0.1/1/10s limits do not select NosLog's threshold.
Algolia: Loading indicator	Search UI can delay a loading indicator so fast requests do not flash it.	Supports a separate post-request visibility clock; Algolia does not prescribe NosLog's 300ms.
Elastic Search UI: Core state	Search state distinguishes initial loading, later loading, results, and errors.	Supports different initial and replacement treatments and latest-request ownership; it is an implementation-state model, not art direction.
React: Suspense	Deferred values can keep previous content visible and visually indicate that it is stale instead of hiding everything.	Supports retained replacement results; React does not decide whether stale result links remain actionable.
Next.js: Loading UI and streaming	Loading UI should be scoped by route boundaries, remain interruptible, and preserve shared interactive layout.	Supports a result-local boundary and usable search controls; route-level examples are broader than NosLog's collection update.
Carbon: Loading pattern	Skeletons communicate known initial structure, while inline loading communicates smaller or subsequent changes.	Supports initial result-shaped skeleton and localized refresh feedback; enterprise density and visual tokens do not transfer.
Fluent 2: Skeleton	Skeleton geometry should approximate expected content and avoid falsely detailed placeholders.	Supports jacket/title/metadata blocks and presentation-only semantics; Fluent does not set NosLog's quantity or delay.
SAP Fiori: Busy handling	Delay busy feedback for short operations, block only the affected area where possible, and avoid indefinite waiting.	Supports result-region scope and a finite timeout gate; SAP's enterprise timing guidance is not copied as a fixed NosLog timeout.
PatternFly: Spinner design guidelines	Progress belongs near the affected content and needs accessible text when the context is not otherwise clear.	Supports one result-summary progress signal rather than a full-page spinner; the archived component styling is not visual direction.
Primer: Loading	Choose skeleton, spinner, or no indicator according to duration and whether content structure is known.	Supports no flash for fast search and a skeleton only for an empty initial collection; Primer does not define NosLog response budgets.
Adobe Spectrum: Progress circle	Indeterminate progress should be contextual, labelled when needed, and not multiply across one operation.	Supports one concise busy signal and restrained announcements; it does not support replacing every result with a spinner.
Material Design: Progress and activity	Progress feedback should describe the affected operation without unnecessarily blocking unrelated interaction.	Supports operable search/filter controls during a result refresh; older Material styling is not a NosLog visual reference.
Atlassian Design System: Spinner	A spinner indicates an indeterminate wait and should be sized and placed according to the affected container.	Reinforces localized rather than global feedback; it does not establish when a result-shaped skeleton is preferable.
WCAG 2.2: Status Messages	Loading, success, no-result, and error changes can be conveyed without moving focus.	Requires one settled polite outcome and no autofocus for ordinary initial failure; it does not choose visible copy or timing.
MDN: @@NOSLOGTOKEN0@@	A changing region can remain busy until its complete update is ready, suppressing premature announcements.	Supports latest-request-only settlement and one stable result region; native disabled and focus semantics still require separate design.
Baymard: Number of items loaded by default	Perceived wait, initial work, content density, and progressive loading must be evaluated together rather than by habit.	Supports production latency and representative-density measurement; commerce research cannot choose NosLog's timeout or error copy.
Adobe Spectrum: Writing for errors	Error copy should state the problem concisely and offer an actionable recovery rather than blame or diagnostic detail.	Supports scope-specific one-line failure plus Retry; native Japanese and English wording still require localization QA.

Approved synthesis:

- Keep the two 300ms clocks separate: input settling precedes the request; loading visibility begins only after the request starts.
- Use no transient UI for a fast response, a result-shaped skeleton for a slow first collection, and weakened retained results for a slow replacement.
- Scope feedback and failure to the result region. Preserve discovery controls and committed state.

- Once a replacement is visibly stale, prevent result activation while continuing to allow request revision. Only the newest request may settle or announce.
- Treat retrieval failure as an error with one scope-specific line and Retry, never as zero results. Preserve focus through retry and move it only when the focused control disappears after success.
- Choose a finite request timeout from measured production latency and platform constraints before implementation acceptance; do not copy an arbitrary external duration or allow an infinite wait.

Evidence Convergence

- Live update is most useful when the result remains visible, the action is simple, and response performance is reliable.
- Batch commitment is most useful when a user makes several related choices or the result is obscured.
- Mobile Apply is only low-friction when it also performs the necessary return to results; a separate Apply followed by Close would add avoidable work.
- Regardless of update mode, query, committed filters, result count, and visible results must not contradict one another.
- Performance should be protected through settled input, request cancellation, caching, and localized result loading before adding confirmation to every viewport.
- NOSTALGIA exposes many record dimensions, but domain availability alone does not make each metric an effective catalog filter.
- Absolute MISS count has direct practice-goal evidence in NOSTALGIA mission data and comparable rhythm-game catalog tools. It is more interpretable than a combined MISS+NEAR percentage for the approved user need.
- Comparable services disagree on whether misses belong in filtering, sorting, or detail. The convergence is that misses are useful score context, not that they should dominate ordinary public discovery.
- Clear/lamp semantics vary materially by rhythm game. NOSTALGIA's own task meaning must govern instead of importing IIDX's taxonomy.
- Rich judgement and note-type breakdowns remain valuable analysis data, while a lean discovery surface benefits from progressively disclosing only actionable criteria.
- Official catalogs and community-chart browsers converge on keeping related difficulties under one Music identity, but they differ on whether list or artwork scanning dominates. NosLog resolves this with list-default/grid-optional Music results and a grouped-list-only Chart scope.
- The complete `title_kana` field supports a neutral, deterministic empty Music browse. Release-recency sorting requires trustworthy release metadata and must not be simulated with database maintenance timestamps.
- Level ordering is understandable only when its difficulty basis is explicit. Hiding an Expert fallback or blending several difficulties would make equal-looking "level" values semantically inconsistent.
- Combined and separate mobile Filter/Sort entry patterns are both established.

A combined trigger is appropriate only when its label names both functions, its internal sections remain distinct, and committed sort state stays visible.

- A recent-play time-window filter is not justified merely because recent-play order exists. Without a verified intersection task, retaining both adds taxonomy without a distinct high-value outcome.
- Long artist strings are frequent enough that category and artist must not compete in one inline row. Consistent line budgets and alignment improve scanning while detail and accessible names preserve complete values.
- List scanning and jacket scanning have different density needs. NosLog keeps a compact, at-most-two-column List and a square-jacket Grid whose lower information region may grow independently.
- Hover is an optional capability enhancement, not a mobile interaction model. The same-card preview therefore uses hover plus keyboard focus where supported, while touch follows the primary detail link immediately.
- Temporary control dependencies remain discoverable with a concise reason, while permanently irrelevant controls may be omitted. Because Unplayed defines result membership and recent play only orders that membership, Unplayed has semantic priority and the rule is intentionally asymmetric.
- Progressive-loading references converge on a bounded initial request, explicit user control, predictable next quantity, visible progress, clear busy/error/end states, and recoverable return context. They do not provide one universal batch number.
- The current 390px density, existing cursor unit, catalog scale, and cross-view consistency make 20 the approved NosLog result-unit contract. Accumulated DOM cost is validated separately because changing one batch from 20 to 16 does not solve unbounded accumulation.
- Search and component references converge on suppressing progress flashes for short requests, differentiating first-load structure from replacement feedback, and scoping interruption to the affected region.
- Accessibility references converge on one stable busy region, latest-request-only settlement, concise recovery, and status communication without routine autofocus.
- The evidence supports a finite failure boundary but not one universal timeout. Production measurement therefore precedes the numeric implementation decision.

Evidence Disagreement and NosLog Resolution

- Visa and DWP lean toward batch filtering; SAP leans toward live update whenever feasible. Carbon, Dell, NSW, Siemens, Maersk, and Baymard make the choice conditional on filter complexity, result visibility, response time, or viewport.
- NosLog resolves this disagreement through the approved responsive hybrid rather than choosing one source as a universal rule.
- Algolia and Elastic demonstrate technical feasibility but do not by themselves justify an interaction. The downstream implementation must still meet measured latency, cancellation, and accessibility requirements.
- IIDX and TrackBrowser provide explicit MISS filtering, whereas osu!, ScoreSaber, and Tachi evidence more often presents comparable statistics in score, sort, goal, or analysis contexts. NosLog resolves this by retaining an advanced authenticated MISS range without promoting it to a public primary facet.
- Official song catalogs favor stable Music grouping, while community chart services more strongly foreground publication recency. NosLog applies each pattern to the matching scope instead of forcing one universal empty-browse order.
- Search systems support relevance for active queries, but references disagree on when

it should override an explicit user order. NosLog resolves this by using Relevance only as the no-explicit-sort active-query default and preserving a user's selection.

- Some guidance prefers separate mobile Filter and Sort controls for immediate

distinction, while SAP and comparable catalog patterns support a combined entry. NosLog uses the combined narrow trigger to reduce persistent density, keeps the sections separate, and retains separate controls when results remain visible.

- Progressive-loading examples range from small search groups to 20- and

25-item catalog/API defaults, confirming that context should determine quantity. NosLog uses measured card density rather than treating any external default as a universal rule.

- Primer recommends focusing newly added actionable content, while the University of

Arizona documents retaining focus on the Load-more control. NosLog moves focus to the first new card because the appended cards precede the relocated control in document order, and supplements the move with one polite settled announcement.

- Search-specific guidance may show progress after roughly a few hundred milliseconds,

while general application systems often tolerate a longer delay. NosLog uses 300ms after request start because the task is a repeated search interaction, then requires production verification instead of treating the number as universal.

- React supports visibly stale content while SAP-style busy handling may block an

affected region. NosLog combines them: retain old results to prevent layout loss, but block their activation only after the stale state becomes visible.

- Some frameworks make route loading and error boundaries the primary unit. NosLog

keeps the shared shell and discovery controls stable because the failure concerns only the result retrieval.

Rejected or Superseded Alternatives

- Separate duplicate Chart-search page - Superseded: Keep one discovery surface

with explicit Music and Chart scopes.

- Permanent Music/Chart button row - Rejected: Use the compact leading selector and

reinforce scope through text cues and results.

- Hidden Expert 8–12 initial filter - Rejected: Initial Music browse includes the

complete eligible catalog.

- One top-level card per Chart difficulty - Rejected: Group published matching

difficulties under their Music identity.

- Clear the query after no results - Rejected: Preserve the user's work and support

correction.

- Instructional no-result subtitle - Rejected: Search, scope, and filter controls

remain visible. Do not restate obvious recovery steps in prose.

- Duplicate no-result action group - Rejected: Keep query clearing, filter

removal/reset, and scope change in their normal controls rather than adding Clear query, Clear filters, Search Music, or Music-detail actions to the empty region.

- **Popular Music, unrelated recommendations, or silent query expansion after no

results - Rejected:** Preserve exact official-catalog and publication meaning.

- Render retrieval failure as no results - Rejected: Keep unavailable data and a

valid zero-result response as distinct states.

- Show a loading treatment for every request - Rejected: Requests that settle within the post-request 300ms threshold replace results without a progress flash.
- Use one full-page spinner, skeleton, or blocking overlay - Rejected: Search, scope, sort, and filter controls remain usable while only the result region reports progress.
- Replace every refresh with a skeleton - Rejected: A skeleton represents a slow initial collection only. Later changes retain the previous collection to preserve spatial context.
- Keep visibly stale result cards actionable - Rejected: Once slow replacement feedback appears, those cards no longer match the committed request and cannot navigate truthfully.
- Leave mismatched stale results visible after replacement failure - Rejected: The result region becomes the concise retryable error while discovery criteria remain.
- Use a route-wide error screen or toast-only retrieval failure - Rejected: The failure belongs to the result region and needs a persistent adjacent Retry action.
- Add explanatory retrieval-error paragraphs or illustrations - Rejected: Use one scope-specific sentence and Retry; preserve diagnostic detail for logging.
- Autofocus the initial retrieval error - Rejected: Announce it politely without stealing the user's current control or reading position.
- Remove and recreate the focused Retry control while pending - Rejected: Preserve its focusable node, prevent duplicate activation, and move focus only after success removes it.
- **Adopt an arbitrary fixed timeout now - Deferred to a measured implementation gate:** Choose the finite value from production latency and platform limits.
- Allow indefinite pending requests - Rejected: Every accepted implementation requires a measured finite timeout and retryable failure path.
- Universal instant filtering - Rejected: Result-obscuring mobile layers would change unseen content after every selection and create repeated requests.
- Universal Apply filtering - Rejected: A result-visible desktop layout would add confirmation without useful feedback.
- Apply and then Close as two mobile actions - Rejected: One View results action commits and returns.
- Return to the Filter-and-sort trigger after successful mobile commit - Rejected: Keep trigger return for cancellation. A successful View results action completes the layer task and proceeds to the directly related result-summary step.
- Focus or auto-open the first result after mobile commit - Rejected: It skips the committed count, sort, and applied-state context and has no stable target when the result set is empty.
- Choose mobile commit focus by touch versus keyboard input - Rejected: A device may switch input methods and screen readers can operate through touch. Use one logical DOM destination and vary only the visible focus treatment when appropriate.
- Mandate a separate visual row for the result summary now - Deferred: The summary is required as a distinct visible semantic element, but same-row versus split-row composition requires localized 390px specimen validation.
- Automatic infinite scroll - Rejected: Use explicit Load more with recoverable

incremental states and restorable context.

- 16 results per batch - Rejected: It shortens the first mobile scan but creates

unnecessary continuation actions in wider and denser result layouts.

- 24 results or a viewport-dependent batch - Rejected: It lengthens the mobile

Grid and makes responsive view changes alter the logical result set. Keep one predictable 20-unit contract.

- Visible “20 Music” or “20 Charts” continuation copy - Rejected: A Chart result is

a Music group that can contain several difficulty targets. Use localized 20 more results visibly and put the active scope in the accessible name.

- Keep focus on the relocated Load-more action after success - Rejected: Newly

appended actionable cards precede it in document order, forcing reverse keyboard navigation. Move to the first new result and announce settled progress.

- Public loaded=60 or batch query parameter - Rejected: Loaded amount and reading

position are ephemeral history-entry state, while the shared URL keeps durable discovery criteria only.

- Pre-mandated virtualization - Rejected for now: First validate the new component

at 20/60/100, simplify markup and loading, and require accessible windowing only if measured cost remains unacceptable.

- Internally scroll five-row Home preview - Rejected upstream: Home hands complete

discovery to this page instead of embedding a second scroll region.

- NOSTALGIA Clear filter - Rejected: It does not distinguish a meaningful discovery

outcome for this game and duplicates ordinary played-result coverage.

- ♦JUST, MISS+NEAR, timing, and note-type weakness as search filters - Rejected:

Keep rich metrics in record analysis and retain only the actionable absolute MISS range in advanced discovery.

- Remove MISS refinement entirely - Rejected: Absolute MISS thresholds have direct

NOSTALGIA practice-goal evidence and comparable catalog precedent when kept secondary.

- Permanent matched-record line on every resting card - Rejected: Preserve the

approved identity-first card and use applied-state summary plus capability-gated hover/focus preview or destination detail.

- Pointer-only record preview - Rejected: Any hover disclosure must have an

equivalent keyboard-focus path and must not be required on touch.

- Composite weakness sort - Rejected: Its implementation-specific weighting is not

an understandable or approved user goal.

- Hidden Expert fallback or blended representative level - Rejected: Level order

requires an explicitly selected difficulty.

- Permanent difficulty button row for level sort - Rejected: Keep the target inside

progressive sort disclosure so the collection toolbar does not become a repeated control strip.

- Separate permanent Filter and Sort buttons on narrow layouts - Rejected: Use one

explicit Filter-and-sort entry while keeping the current sort and applied-filter count visible outside it. This does not merge their internal semantics.

- Played-in-last-30-days filter - Superseded: Earlier retention inherited a current

implementation control without a verified high-value intersection task. Keep recent play as a signed-in sort instead.

- Chart grid view - Rejected: Published difficulty selection needs a grouped,

scannable list under Music identity rather than an additional artwork mode.

- Database creation or update time as Music release date - Rejected: Import and maintenance timestamps cannot support a truthful newest-Music sort.
- Dedicated difficulty row in Music List - Rejected: It spends scarce vertical space on compact informational values that fit a stable trailing group.
- Universal 96–112px Music List row - Rejected: Use a compact 64px row and square jacket for the approved original-title-and-artist identity.
- One full-width table-like desktop List - Rejected: Add a second compact List column when each card can retain approximately 440–460px; reserve denser multi-column artwork scanning for Grid.
- Replace only trailing difficulties with the record preview - Rejected: It hides official difficulty context yet does not provide enough room for several matching records.
- Separate popup, expanding panel, or layout-shifting record preview - Rejected: Use an alternate state within the same card dimensions.
- First-tap or long-press touch preview - Rejected: One tap opens Music detail, preserving the primary action and avoiding a hidden mobile step.
- Distort or crop the Grid jacket to equalize complete card height - Rejected: Preserve 1 / 1 artwork and let the lower information region absorb long content.
- **Keep recent-play order active with Unplayed and use a title tie-break - Rejected: ** The visible sort label would no longer describe the actual result order.
- Hide recent-play order while Unplayed is active - Rejected: The dependency is temporary and user-removable, so the unavailable choice and its concise reason must remain discoverable.
- Selecting recent-play order automatically removes Unplayed - Rejected: A sort control must not silently broaden result membership.
- **Removing Unplayed automatically restores a previous recent-play order - Rejected: ** Hidden sort history creates an unexpected second transition. The user may select recent order explicitly after removing Unplayed.
- Block Unplayed until the user first changes recent-play order - Rejected: It adds an avoidable step and lets a secondary ordering choice obstruct a primary membership filter.

No Open Product Questions

No material shared-discovery product behavior remains open. Foundation tokens, exact skeleton quantity and styling, result-summary row composition, and exact Chart-row visuals remain scheduled specimen decisions rather than reopenings of approved behavior. The numeric finite request timeout is an implementation-readiness gate that must be resolved from production measurement, not an open invitation to choose an arbitrary product behavior.

Browser Verification Targets

The later implementation must verify at minimum:

- /ko/music, /ja/music, and /en/music in Music and Chart scopes;
- direct Home/More entries, empty browse, query handoff, URL sharing, reload, Back, and Forward restoration;

- Korean and Japanese IME composition with 300ms settled search;
- separate timing verification for the 300ms input-settling clock and the additional

300ms request-visibility clock, including representative responses just below and above the visibility threshold with no loading flash in the fast case;

- query change, scope change, and filter change during active requests, including deliberately reordered responses;

- all-Music initial browse with no hidden difficulty restriction;
- empty Music browse ordered by `title_kana` ascending in all three locales;
- empty Chart browse ordered by each Music group's latest published-chart timestamp,

with targets in Normal → Hard → Expert → Real order;

- newest-Music sorting with verified official release dates, including the unavailable data-gate state and no fallback to database timestamps;

- absence of weakness sorting and explicit difficulty selection before level order;
- active-query Relevance fallback, explicit-sort persistence, and return to the scope default when a Relevance query is cleared;

- Chart grouping with zero, one, and multiple published matching difficulties;
- direct published-difficulty entry to the focused viewer and exact return-state restoration;

- one mobile Filter-and-sort trigger, distinct internal sections, staged sort/filter state, generic and counted result actions, cancel, commit, clear one, and clear all;

- separate desktop Filter and Sort controls, instant discrete filters, immediate sort, and debounced/committed range controls;

- omission of the signed-out personal group and signed-in advanced-group disclosure;
- S, FC, Pianist, and Unplayed criteria; absence of the 30-day-played filter;

signed-in recent-play order; inclusive best-record MISS bounds; within-group OR; cross-group AND; and Unplayed conflict prevention;

- Music list-default/grid switching and stable base identity with zero, one, and several matching difficulty records;

- List title order, category badge placement, a 64 × 64px square jacket whose edge matches the row height, trailing difficulty group, one-line identity limits, one-to-two-column switch, and no horizontal overflow around the 440–460px per-card boundary;

- square Grid jackets, two columns at 390px, independently growing information regions, reserved single-line title/artist slots, and validated wider multi-column behavior;

- grouped-list-only Chart results with no grid toggle;
- capability-gated pointer-hover and equivalent keyboard-focus previews in fixed card

dimensions; Escape dismissal, Enter activation, reduced motion, and direct touch navigation without first-tap, long-press, or another synthetic hover step;

- initial loading, slow response, empty result, retrieval error, incremental loading, incremental error, retry, and end of results;
- slow initial loading with a result-shaped, accessibility-hidden skeleton confined to

the result region while all real discovery controls remain usable;

- slow replacement with old results retained and visibly weakened, one result-region

busy signal, active discovery controls, stale-card activation blocked only after the slow state appears, and no skeleton replacement;

- request supersession and cancellation where only the newest request changes results,

URL-backed state, busy state, or announcements, and obsolete requests never surface failure;

- initial and replacement retrieval failures using exact scope-specific Korean,

Japanese, and English one-line copy plus Retry, preserved committed discovery state, no stale mismatched results, no route-wide error replacement, and clear distinction from settled zero results;

- retry pending with duplicate activation prevented and focus retained; repeated

failure with focus retained and one polite error; success with the retry control removed, result-summary focus, and one settled announcement;

- production p95/p99 and platform-limit evidence for a documented finite timeout,

simulated timeout routing to the same retryable failure, and no indefinite pending state;

- text-mismatch, filter-constrained, no-published-Chart, empty-catalog, and retrieval-

failure classification, including combinations of query, filters, and Chart publication state;

- exact Korean, Japanese, and English one-line no-result copy, preserved committed

query/scope/sort/view/filter state, removable chips, filter-only clear-all, no duplicate empty-state actions, no fallback recommendations, and one polite settled announcement without focus movement;

- initial 20, repeated 20, and final partial batches in Music List, Music Grid, and

grouped Chart results, with no viewport-triggered request;

- localized next-amount action, visible/total progress, busy state, first-new-result

focus, polite settled announcements, failure focus retention, and completion copy;

- accumulated 20, 60, and 100 result performance and DOM behavior on

representative mobile and desktop browsers;

- copied-URL first-batch behavior and Back/Forward rehydration of the loaded count,

selected-result anchor, and nearby reading position without a public batch parameter;

- narrow 390px, compact-height mobile, browser zoom, and representative desktop

widths without horizontal overflow;

- long original Japanese titles, Korean/English translated-title and Japanese-reading

search aliases that still resolve to original-title-only cards, missing artist, and Real-unavailable data;

- keyboard-only scope, search, filters, result selection, Load more, retry, and return;

- mobile Filter-and-sort commit with ready, pending, unchanged, and zero-result states;

summary focus and non-duplicated announcement; Close, Back, and Escape trigger-focus plus reading-context restoration;

- selecting Unplayed from recent-play order with an active query, empty Music scope,

and empty Chart scope, confirming the exact Relevance, Japanese-reading ascending, and latest-published-chart descending fallbacks;

- recent-play order remaining visible but unavailable with a concise localized reason

while Unplayed is committed, including keyboard and assistive-technology access to the dependency;

- an attempted recent-order selection never removing Unplayed, removal of Unplayed

making recent order available again, and no automatic restoration of the former recent sort;

- immediate desktop normalization and atomic mobile staged commit, including Close,

Back, and Escape restoring both the prior filter and prior sort;

- Korean, Japanese, and English reason text plus one polite sort-change announcement,

with no error treatment or focus movement;

- focus order, focus return, status announcements, landmarks, target size, reduced

motion, and browser-console errors.

Acceptance Criteria for This Brief

- Music and Chart scope remain semantically distinct within one shared surface.
- Initial Music browse has no hidden Expert 8–12 restriction.
- Empty Music and Chart browse have explicit scope-appropriate orders, and newest Music

order is gated by verified official release-date data.

- Published Chart results are grouped by Music and never expose unavailable targets.
- Weakness sort is absent, and level sort never has an implicit difficulty basis.
- Active-query Relevance, explicit-sort persistence, mobile combined Filter-and-sort

commitment, desktop separated live controls, and applied-state removal have explicit non-conflicting rules.

- Mobile View results commits and closes into a visible, focused result summary;

cancel paths restore the trigger and prior reading context; pending updates produce one settled polite announcement without duplicate count speech. The summary's exact same-row or split-row visual placement remains a specimen decision rather than an unresolved behavior.

- Authenticated record refinement has an approved lean taxonomy, best-record MISS

semantics, combination rules, Unplayed/recent-order normalization, discoverable unavailable-state explanation, atomic mobile rollback, no hidden sort restoration, and impossible-state handling.

- Music result identity, content order, line budgets, List/Grid density boundaries,

square-jacket behavior, capability-based hover/focus record context, and direct touch-detail behavior are explicit. Foundation styling tokens remain downstream work rather than reopening the approved structure.

- Automatic infinite scroll is absent. Explicit progressive loading uses a stable

20-result contract, localized next-amount and progress copy, loading, focus, announcement, retry, end, history restoration, and 20/60/100 performance requirements.

- No-result handling preserves discovery work, distinguishes cause internally, uses

the approved one-line localized copy, keeps recovery in the existing controls, and never substitutes explanatory paragraphs, duplicate actions, unrelated fallback content, or an error state.

- Transient response handling uses separate approved input and request clocks, avoids

fast-response flashes, distinguishes initial skeleton from stale-preserving replacement, scopes busy and failure to results, prevents stale activation once visible, and lets only the newest request settle.

- Retrieval failure uses approved Music/Chart one-line copy and Retry in all three

locales, preserves committed discovery state, has explicit focus recovery, remains distinct from zero results, and requires a measured finite timeout before implementation acceptance.

- Current implementation facts are not misrepresented as approved 2.0 behavior.
- Mobile and desktop requirements share one product model while adapting to result

visibility and available width.

- Korean, Japanese, English, accessibility, performance, and browser-verification

requirements are documented.

- No material page behavior remains Open or Proposed; scheduled specimen details

and the measured implementation timeout gate are identified without being mistaken for unresolved product behavior.

- The user approved the complete synchronized brief and resolved decision register on

2026-07-31.

Decision Register

ID	Decision	Direction	Status
DISC-01	Discovery architecture	One shared surface with Music and Chart scopes	Approved
DISC-02	Scope control	Compact leading selector with visible text in the opened control; no permanent mode-button row	Approved
DISC-03	Scope entry	Music entries open Music scope; Chart Viewer entries open Chart scope; query and scope are shareable and restorable	Approved
DISC-04	Empty Music browse	Include the complete eligible Music catalog; remove the hidden Expert 8–12 default	Approved
DISC-05	Chart eligibility	Return only published matching Chart targets	Approved
DISC-06	Chart grouping	One result unit per Music with its published matching difficulties	Approved
DISC-07	Chart selection	Selecting a published difficulty opens that exact focused viewer directly	Approved
DISC-08	Text-query application	IME-safe update after 300ms idle; preserve query on no results	Approved
DISC-09	Mobile sort/filter application	Stage both in a result-obscuring layer; one View results action commits and closes; Close/Back cancels	Approved
DISC-10	Desktop filter application	Apply visible discrete filters immediately; debounce or commit continuous controls	Approved
DISC-11	Applied-state removal	Removing one criterion or clearing all applies immediately	Approved
DISC-12	Progressive loading	No automatic infinite scroll; use explicit Load more	Approved
DISC-13	Progressive state	Provide count/range, busy, retry, end, URL/history, loaded-state, and meaningful scroll restoration	Approved
DISC-14	Initial ordering	Empty Music uses title_kana ascending; empty Chart uses latest published-chart group descending	Approved
DISC-15	Filter and sort taxonomy	Public category/difficulty/level filters; approved scope sort sets; personal record criteria remain secondary	Approved
DISC-16	Music result composition	Compact content-driven List with trailing difficulties; square-jacket Grid with flexible information region; capability-based same-card record preview and direct touch detail	Approved
DISC-17	Batch size and copy	Initial and appended batches use 20 result units; localize actual-next-amount and exact progress copy; focus the first new result; keep ephemeral loaded state in browser history	Approved
DISC-18	No-result recovery	Separate failure and service-level catalog absence; classify filter constraint, text mismatch, and publication absence internally; preserve committed state and show only concise scope-appropriate copy with recovery in existing controls	Approved
DISC-19	Mobile post-commit focus	Commit focuses the visible result summary; cancel restores trigger and prior context; announce one settled pending outcome; defer row composition to specimens	Approved
DISC-20	Authenticated record taxonomy	Keep Unplayed, S, FC, Pianist, and one advanced MISS range; remove Clear, 30-day play, and low-value metric filters	Approved
DISC-21	MISS semantics	Inclusive optional bounds against each eligible difficulty's best record; never combine MISS with Near	Approved
DISC-22	Record-filter logic	AND across groups, OR within a group; Unplayed excludes achieved criteria and conflicts with recent-play order	Approved
DISC-23	Music result identity	Earlier direction repeated localized/read captions in List and Grid result identity	Superseded
DISC-24	Personal-record preview	Identity-first resting result; capability-gated hover and focus preview matched records; touch opens detail without hover	Approved
DISC-25	Newest Music sort	Provide it only with verified official Music-level release dates; never substitute database maintenance timestamps	Approved
DISC-26	Weakness sort	Remove the opaque composite weakness order	Approved
DISC-27	Level-sort basis	Require an explicit target difficulty; never use hidden Expert fallback or a blended representative level	Approved
DISC-28	Scope result views	Music opens as list with optional jacket grid; Chart remains one grouped list without a grid toggle	Approved
DISC-29	Active-query sort precedence	Default to Relevance without a user sort; preserve explicit sort; clear-query Relevance returns to the scope default	Approved
DISC-30	Responsive sort/filter access	One labelled combined mobile trigger and staged layer; separate result-visible desktop controls	Approved
DISC-31	Signed-out personal controls	Omit the personal-record group instead of disabled criteria or an embedded login invitation	Approved
DISC-32	30-day play-filter retention	Former retention is replaced by removal; recent play remains a signed-in sort	Superseded
DISC-33	Unplayed/recent-sort transition	Selecting Unplayed resets recent order to the context default; recent remains visible but unavailable, never clears the filter, and is not silently restored	Approved

ID	Decision	Direction	Status
DISC-34	Transient-response threshold	Keep the 300ms input-settling clock separate; expose slow state only after the newest request itself remains pending for an additional 300ms	Approved
DISC-35	Initial and replacement loading	Fast response has no transient UI; slow initial uses a result-shaped local skeleton; slow replacement retains and weakens old results, blocks stale activation once visible, and keeps discovery controls usable	Approved
DISC-36	Retrieval failure and retry	Preserve committed state; show scope-specific one-line result-region error plus Retry; preserve retry focus while pending/failing and focus the result summary after success	Approved
DISC-37	Request timeout	Require a documented finite timeout from production p95/p99, platform limits, and cancellation behavior before implementation acceptance; never invent a value now or wait indefinitely	Approved
DISC-38	Localized-title discovery	Keep approved Korean/English titles and Japanese readings searchable while showing canonical original titles only in repeated Music and Chart result cards	Approved
DISC-39	Exposed filter-rail transition	Below 1216px, retain the combined staged Filter/Sort layer; at 1216px, use a 3/12 visible rail and 9/12 results below full-width search	Approved
DISC-40	Music Grid capacity	Use result-container thresholds 288/536/720/904px, a 138px compact floor, 168px preferred ordinary card width, and a five-column ceiling	Approved

Phase Approval

The user approved the shared-discovery brief as a complete phase deliverable, updated on 2026-08-04 after reviewing the resolved decision register and cross-document audit. No material Music/Chart discovery behavior remains Open or Proposed.

Foundation tokens, exact responsive geometry and breakpoints, skeleton styling, result-summary row composition, exact Chart-row visual anatomy, and a numeric production timeout remain scheduled specimen or implementation gates. They do not reopen the approved product behavior.

Ongoing Handoff

The approved discovery taxonomy, result contracts, and transient-response behavior remain upstream constraints for Foundation, downstream design, and implementation. Later briefs may add contextual entry and return behavior but must not silently reopen the approved shared-discovery contract.

NosLog 2.0 Music Detail Page Brief

docs/design/05-music-detail-page-brief.md

Document Control

- Status: Approved
- Decision status: `Complete page brief approved: entity and action model, content

architecture, entry and restoration, authentication, Chart Info, personal Record, Ranking, goal-qualified Tier voting, evaluation, community opinions, administrator disagreement review, asynchronous recovery, responsive composition, selected-chart action availability, current-tab Play-video navigation, route-entry focus, representative data and state fixtures, and page-level browser acceptance contract`

- Evidence status: `Repository inspection, current-product audit, approved information

architecture, approved shared-discovery handoff, and cited tabs, adaptive-layout, progressive-disclosure, leaderboard, pagination, data-visualization, NOSTALGIA scoring, chart-pattern, chord-input, community-evaluation, robust aggregation, review governance, radar-profile, rhythm-game, disabled-state, media-availability, external-link, focus-management, reflow, localization, browser-support, assistive-technology, and infrastructure guidance`

- Date started: 2026-07-31
- Last decision update: 2026-08-02
- Language: English
- Parent information architecture:

[02-information-architecture.md](#)

- Upstream discovery brief:

[04-shared-discovery-page-brief.md](#)

- Scope: Public Music detail for one Music entry and one selected NOSTALGIA

difficulty, including personal record, chart information, ranking, tier/evaluation, and entry to a published chart viewer

- Excluded: Final visual styling, foundation tokens, complete high-fidelity page

design, focused chart-viewer composition, and administrator Music or chart editing

Decision Labels

Preservation override: Music Detail may retain the current View chart entry and availability state. Document 07 supersedes every historical viewer/editor shell, layout, control, behavior, and Foundation direction in this brief.

- Observed: Verified from the current repository, browser, or approved upstream

artifact.

- Approved: Explicitly agreed with the user and authoritative for downstream

design.

- Proposed: Evidence-based direction awaiting explicit user approval.
- Open: Requires further research, representative data, testing, or a user

decision.

- Rejected: Considered and explicitly not selected.

- Superseded: Replaced by a later approved direction.

This brief is the approved Music-detail page-family deliverable. Decisions marked Approved, Rejected, or Superseded are authoritative within their stated scope; exact foundation tokens and high-fidelity composition remain downstream work.

Purpose

Music detail must let a user keep one Music entry and one selected difficulty in context while moving efficiently among:

1. their own performance and history;
2. factual chart information and statistics;
3. the selected chart's ranking;
4. tier placement, community evaluation, and voting; and
5. the focused published-chart viewer when one is available.

The page is a frequently revisited product workspace, not a linear editorial article and not a cross-product dashboard.

Primary Context

- Approved upstream: The surface is public, with personal enhancements after authentication.
- Approved upstream: Mobile around arcade play is the primary context. Desktop remains required and must use additional width intentionally.
- Approved upstream: Music discovery opens Music detail. Tier, Bingo, Exam, profile, and ranking contexts may also deep-link to the relevant Music and difficulty.
- Approved upstream: The focused chart viewer is a child destination of Music detail and must provide a reliable return path.
- Approved: The Music entry is the stable entity context. The selected difficulty is the active chart context.
- Approved: Current visual styling, fixed-width composition, typography, spacing, tab appearance, and card treatment are migration evidence only. They are not the NosLog 2.0 visual baseline.

Current-Product Evidence

Observed Route and State

- The current route is
`/[[locale]]/music/[[index]]/[[difficulty]]`.
- Normal, Hard, Expert, and optional Real are chart-level selections under one Music entry.
- The selected content area is represented by a `tab` query value. Ranking pagination uses a `page` query value.
- Difficulty, selected content area, and ranking page participate in browser history and can be restored with Back and Forward.
- Without a `tab` query, the current implementation opens Record for both signed-in

and signed-out users. Selecting Information writes `?tab=detail`, and browser Back restores the prior queryless Record entry.

- The current signed-out Record implementation leaves placeholder analytics rendered behind a dimmed Login overlay. Its Login link does not carry the selected Music, difficulty, or Record destination.
- The Discord OAuth start and completion routes already validate, store, and restore a safe relative `returnTo` path. The current Login page always supplies localized Home, so exact task restoration is not connected through the whole flow.
- The current page renders inside a 390px maximum-width shell even on desktop. This is an observed usability limitation, not an approved 2.0 rule.

Observed Information Inventory

The current implementation provides:

- Music identity: jacket, original title, artist, category, stable Music index, and approved localized/read-title data available through an optional detail-only disclosure;
- selected-chart identity: difficulty, official level, and optional level constant;
- chart information: BPM range, note count, duration, release date, unlock condition, video or preview links, pattern statistics, score distribution, player count, and current user's percentile where available;
- personal record: score, rank, Full Combo state, play counts, judgement breakdown, FAST/SLOW, note-type success rates, score and performance trends, recent plays, and peer comparison;
- ranking: chart-specific rows, the current user's rank when available, and explicit pagination;
- tier and evaluation: current tier constant, history, community distribution, personal evaluation, comments, and reactions; and
- published-chart availability and a focused chart-viewer route.

This inventory preserves verified product capability. It does not approve the current information density, order, labels, or presentation.

Observed Data-Loading Boundary

- Shared Music and selected-chart data load for every content area.
- Personal best data load when the user is signed in.
- Detailed record history and trends load only for the current Record area.
- aggregate chart statistics load only for the current Information area.
- ranking rows load only for the current Ranking area.
- tier, evaluation, opinion, and reaction data load only for the current Tier area.
- The browser caches visited combinations of Music, difficulty, content area, and ranking page for the current page session.

This demand-loaded boundary is existing implementation evidence. It is also a strong operational fit for the approved tabbed architecture because users do not incur every cross-domain query before choosing an area.

Observed Ranking Implementation

- The current selected-chart Ranking loads one best-score row per user and exposes a

profile link, avatar, score rank, score, and Full Combo or Pianist state.

- It uses seven rows per page and derives the visible row number from page offset. It

does not currently assign a shared displayed rank to equal scores.

- The current server ordering uses score descending and user ID ascending. The

separate current-user rank also uses user ID to force a unique ordinal position inside an equal-score group.

- A complete current-user card appears above the list even when the same user row is

present on the current page, and it reports a calculated top percentage.

- The current score distribution counts every positive-score player in the overall

player total but draws only 950k, 960k, 970k, 980k, 990k, and Pianist buckets. Records below 950,000 therefore affect the denominator without appearing in a labeled bucket.

- The current score-rank image alternative text appends a hard-coded Korean rank

label in every locale.

These are implementation observations, not approved 2.0 ranking rules. The approved contract below resolves the duplicate current-user presentation, ranking semantics, distribution denominator, page size, and localized accessibility gaps.

Observed Representative Data and Browser Evidence

- The source catalog contains 578 Music entries. 425 provide all four standard

difficulties and 153 omit Real. Real availability must therefore be treated as ordinary data variation rather than an exceptional error.

- The longest current title is 54 characters:

50th Memorial Songs - 二人の時 under the cherry blossoms- (2f733689ec21214d6180888fe0e6b42f). It also carries a long Japanese reading and has no Real chart.

- The longest current artist value is 67 characters on STULTI

(bfaadfb98501907925ecf41a076108d), which provides all four difficulties.

- The longest Japanese reading belongs to **協奏曲第1番ホ長調 RV

269 「春」より第一章** (eaa4047ce17fb873b19b42454b0f6f3b).

- Ten current Music entries omit artist. Happy Birthday to You

(8f655bcd097d033f7c464f96dc20223d) is a four-difficulty representative.

- At 390px, the current Japanese page clips the long reading and title aggressively.

At 1280px, the page still confines the principal content to the current compact shell. These are migration defects, not approved truncation or width behavior.

- In the current client-side area switch, activating Ranking leaves DOM focus on

body. The current Play-video link also uses `target="_blank"` without announcing the new browsing context. The approved contract below replaces both behaviors.

Approved Entity and Action Model

Music Identity and Selected Chart

- Keep Music-level identity stable while the difficulty changes.
- Treat the selected difficulty as chart-level context that governs level, constant,

BPM, note count, personal record, ranking, tier/evaluation, and chart-viewer availability.

- Preserve the selected difficulty in a shareable and history-restorable URL.
- Do not duplicate the Music entry as four unrelated detail pages merely because it has four chart difficulties.
- Exact difficulty-control geometry, position, and visual treatment are deliberately deferred to a later responsive specimen; this is not an open product-behavior decision.

Published Chart Viewer Entry

- Place View chart as a direct contextual action associated with the selected chart, outside the Information content panel, immediately after the selected- difficulty context and before semantic content-area switching.

- When a NosLog published chart exists, the action opens the focused chart viewer for the selected difficulty.

- Keep View chart and Play video as two stable action positions in that order.

Enable each action only when the selected difficulty has the corresponding NosLog published chart or valid play-video URL; otherwise retain the position in a clearly disabled, inoperable state.

- Do not render separate visible copy equivalent to No published chart. The disabled View chart state communicates availability without adding a competing empty-state message.

- NosLog has no external-chart product action. A current `chart_preview_url` field, administrator input, or fallback is implementation inventory to remove during the 2.0 implementation mapping, not a product requirement.

- Use `View chart` / `Play video` for the localized action label.

A valid Play-video URL opens in the current browsing context. NosLog must not force `target="_blank"` or add new-tab copy; users retain browser controls for opening a separate tab. Mobile operating-system handling of an associated YouTube app is a user-agent behavior, not a NosLog-forced browsing-context decision.

- Exact visual tokens and final button geometry remain foundation work.

Approved Content Architecture

On-Demand Localized Title Disclosure

- Keep the original Music title as the persistent primary identity. Do not place a translated title or Japanese reading in a second permanent title row.
- When an approved Korean/English translation or Japanese reading exists, place one visible language/translation icon directly beside the original-title group. Do not underline the title or make the title itself an undisclosed trigger.
- The icon opens a non-modal anchored popover containing a concise locale label and the complete wrapped translated/read title. It is not a modal, sheet, or layout- shifting panel.
- Pointer hover and keyboard focus open the popover. Click and touch toggle it.

Escape, outside click/touch, focus departure according to the final popover component contract, or activating the trigger again closes it.

- The same content and relationship must be available to keyboard and assistive-technology users. Hover is an enhancement, not the only access path.
- Omit the icon and its space when no approved value exists. Never show an empty

popover, placeholder translation, or machine-generated value that has not passed the approved content workflow.

- This disclosure is exclusive to Music Detail. Home, Music discovery List/Grid,

Profile, Tier, Bingo, Exam, Chart Viewer, and other repeated Music references show the original title only, while approved translations/readings remain searchable.

- The temporary interaction example prepared during approval validates only this

disclosure behavior. Its jacket placement, title geometry, difficulty controls, tabs, and surrounding layout are not approved visual or page-layout sources.

Pattern A: One Persistent Context with Adaptive Area Switching

- Keep one persistent Music identity and selected-difficulty context.

- Under that context, provide four semantic areas: chart information, personal record,

ranking, and tier/community evaluation. Use a compact single-select area switcher when the approved localized labels do not fit and a tab list when they do.

- Display only the selected content panel. Do not render the complete contents of all

four areas as one long reading page.

- Do not add a cross-domain Overview panel that repeats compact summaries of all four areas before the user can reach their detail.

- Preserve selected difficulty and selected content area in restorable navigation state.

- A content-area change should request the selected area's detailed data rather than requiring all cross-domain detail on initial entry.

- Reuse already loaded area data when it remains valid. Exact cache lifetime, prefetch-on-intent behavior, and invalidation remain implementation decisions.

- Localized labels for all four semantic areas are approved in their owning contracts.

The responsive selection pattern is approved below. Exact typography, dimensions, transition width, and surface styling remain Foundation/specimen decisions rather than approval of the current tab design.

Why Pattern A Fits

The approved choice follows three converging findings:

1. Tabs are a standard pattern when one object has related but separable views and the user does not need to compare all panels simultaneously.
2. Rhythm-game detail surfaces commonly preserve song or map identity and selected difficulty while changing statistics, leaderboards, or discussion context.
3. The current NosLog data layer already isolates expensive record, ranking, and evaluation reads by active content area.

Pattern A is therefore both a familiar interaction model and a lower-work initial data boundary for NosLog. Its approval does not preserve the current cramped visual execution.

Approved Responsive Context and Area-Switching Contract

Persistent Context Order

Preserve the following order at every supported width:

1. persistent Music identity and selected-chart context;
2. the four-choice difficulty selector;
3. the content-area switcher; and
4. the selected semantic panel.

- The difficulty selector and content-area switcher answer different questions and remain separate controls. Do not combine them into one menu or control surface.

- Keep Normal, Hard, Expert, and Real visible as one four-choice row at narrow

widths. Difficulty names are short, stable domain labels and direct comparison is a higher-value use of permanent width than showing four long content-area labels.

- The selected difficulty and selected content area continue to update the approved restorable URL state immediately.

Compact Area Switcher

- At 320, 360, 390, and 430 px validation widths, use one full-container-width selector that displays the current localized area label and a disclosure chevron.

- Opening the selector displays an anchored overlay list of all four full localized labels in the approved semantic order. It must not push the selected panel downward.

- Mark the current option visually and programmatically. Selecting another option closes the list, updates the URL and current label, and replaces the selected panel with the approved target-specific pending state.

- Preserve the full Korean, Japanese, and English labels. Do not abbreviate, truncate,

convert them to icon-only choices, wrap them into multiple tab rows, or require a horizontally scrolling tab strip at compact widths.

- This is a local context switcher, not global site navigation and not an additional persistent button row.

Wide Tab List and Content-Driven Transition

- Replace the compact selector with four full, auto-width tabs only when every approved localized label, the validated type size, touch/click padding, focus treatment, and required gaps fit on one row without truncation or scrolling.

- Determine this transition from the component's available inline size and the longest approved localized label set, not from a device-name assumption. Prefer a container query when the switcher can appear inside differently sized parents.

- The exact numeric transition width is intentionally deferred until the Foundation typography and grid specimens measure the final labels. It is not permission to choose a conventional breakpoint without measurement.

- Do not render both controls to assistive technology at once. The inactive responsive representation must be absent from the accessibility tree.

Wide Page Composition

- Remove the current permanent 390px visual constraint. Use responsive outer gutters and a validated maximum content width; determine the numeric cap in the Foundation grid specimens with real Music-detail data.
- Keep the Music/selected-chart context at the top. Do not introduce a permanent left sidebar solely to fill desktop width or duplicate the area switcher.
- Preserve the mobile DOM and reading order, then adapt each selected panel according to its content rather than applying one generic stretched column:
- Chart Info: keep compact fact groups and selected-chart actions intrinsically readable; do not stretch short facts across the complete canvas.
- My Record: allow best/cumulative comparisons and a wider progress visualization while retaining the approved mobile sequence.
- Ranking: keep the leaderboard primary and place score distribution as a secondary wide-screen region when available width supports it.
- Tier & Evaluation: use additional width for six-position comparison and the radar/evaluation relationship without changing the approved semantic order.
- Base panel adaptations on available panel width, using container queries when appropriate. Desktop adaptation adds comparison and analytical clarity; it does not create desktop-only product meaning.

Approved Entry Priority and Restoration Contract

General Entry Default

- When a Music-detail URL does not explicitly name a content area, open the Information semantic area for both signed-in and signed-out users.
- Place the Information semantic area first in the content-area order. The approved semantic order is Information, personal Record, Ranking, and Tier/community evaluation.
- This approval establishes semantic order. The localized labels for all four areas are now approved in the Chart Info/Record and Tier & Evaluation contracts below.
- Do not make the same queryless URL resolve to a different default area solely because the user is authenticated.

Information is the general-entry default because it is public, stable, and useful to every visitor. Personal Record remains a primary repeated task, but an entry source that already knows the user's intent must open it directly rather than relying on a hidden authentication-dependent default.

Source-Aware Explicit Entry

Use explicit, restorable content-area state when the source already identifies the user's task:

Entry source or intent	Required destination behavior
General discovery, Music search, or shared URL without an explicit area	Open Information through the queryless canonical entry or an equivalent explicit Information state
Profile, recent play, or personal-record item	Open the selected Music and difficulty with the personal Record area explicitly selected

Entry source or intent	Required destination behavior
Ranking item	Open the selected Music and difficulty with Ranking explicitly selected
Tier, evaluation, or voting item	Open the selected Music and difficulty with Tier/community evaluation explicitly selected
Return from the focused chart viewer	Restore the exact originating Music-detail URL and content area when origin state exists
Direct viewer entry without origin state	Fall back to the selected chart's Information area rather than inventing a personal or previously used default

- The destination URL must preserve locale, Music index, selected difficulty, selected content area, and any approved area-specific state that is valid on return.
- Back and Forward must restore the explicit area instead of recomputing it from the current authentication state.
- Do not globally remember the last-used Music-detail area across unrelated Music entries or sessions. Source-aware explicit intent takes priority over hidden preference state.

Signed-Out Personal Record

- Keep the personal Record area visible and selectable for signed-out users. Do not hide it and do not present it as a disabled tab.
- Selecting Record while signed out must render a compact panel-level authentication state in place of record content. Do not render fabricated, empty, blurred, or dimmed record analytics behind an overlay.
- The authentication state contains one concise explanation and one explicit Login action. Selecting or focusing the Record tab alone must not start authentication.
- The Login action must carry the complete safe intended return destination, including locale, Music index, difficulty, and the explicitly selected Record area.
- After successful authentication, return to that exact Record area. If onboarding is required, preserve the same destination through onboarding and restore it when the required flow is complete.
- Authentication errors must preserve enough destination state to retry or return to the same Music detail without losing context. Exact error copy and presentation remain part of the later state contract.

The current OAuth flow already stores and validates a relative `returnTo` path and can redirect to it after authentication. The current Login-page handoff always supplies localized Home instead, so this is an implementation-mapping gap rather than a need for a new authentication architecture.

Accessibility and Predictability Consequences

- The selected area must be represented in URL and history state and exposed through the approved wide `tablist/tab/tabpanel` or compact select-only `combobox/listbox` semantics in the later implementation.
- Area activation remains an explicit user action. A focused tab or active listbox option must not trigger authentication, fetch another panel, or cause another unexpected context change.
- The signed-out Record panel communicates its unavailable personal content and Login action within the selected panel, so the control remains discoverable without a misleading disabled state.
- The approved asynchronous-state contract below defines ordinary focus retention,

live announcements, loading, failure, and retry behavior. The responsive control composition is defined in the approved contract above.

Approved Asynchronous State and Recovery Contract

Stable Context and Atomic Target Selection

- Keep the shared application shell, persistent Music identity, selected-chart

context, difficulty choices, content-area choices, and approved selected-chart resource actions available while one dynamic area is loading.

- When the user explicitly selects another difficulty or semantic content area,

immediately update the selected target and its restorable URL/history state. Replace the preceding semantic panel with the target panel's loading state; never present Record, Ranking, Chart Info, or Tier/evaluation data from the preceding target as if it belonged to the newly selected target.

- Mark only the updating target panel busy. Do not disable every difficulty and area

control merely because one request is pending.

- Keep navigation interruptible. A later valid selection supersedes an earlier pending

selection, cancels the obsolete request where supported, and is the only result that may commit to the visible target.

- Deduplicate repeated requests for the same Music, difficulty, content area, and

area-specific state.

Loading Presentation by Transition Type

Transition type	Required presentation
Initial Music-detail entry	Preserve the application shell and expose a stable route-level Music-detail placeholder. When sufficient Music identity is already available, keep that context visible and load only its unresolved selected-chart region.
Uncached difficulty or semantic-area selection	Update the target and URL immediately, reserve the target panel's essential geometry, set the panel to <code>aria-busy="true"</code> , and expose a concise pending state on the selected control. Do not leave the preceding semantic panel visible.
Fast target response	Commit the target content without introducing a visually distracting animated loader.
Perceptible request of at least approximately 300 ms	Reveal a simplified, structure-matched skeleton for the dynamic target panel. Do not skeletonize fixed tabs, the application header, or controls whose labels and values are already known.
Fresh visited target	Display the exact cached target immediately with no loading indicator.
Same-list page change, such as Ranking pagination	Retain the preceding rows as explicitly pending placeholder data, preserve row geometry, and mark only the list busy until the target page replaces them. The pending page control must not falsely announce completion.
Append continuation, such as older opinions	Keep every loaded item and place one local loading indicator at the continuation boundary. Never replace the complete list with a skeleton.

- Skeletons communicate only the stable, high-level structure of the expected panel;

they do not reproduce every optional field or action.

- Loading motion must respect the future global reduced-motion contract. Meaning and

accessible loading text cannot depend on animation.

- The approximately 300 ms threshold prevents avoidable flashing while still exposing

unmistakable feedback for a perceptible delay. Final motion curves and skeleton styling remain foundation decisions.

Cache Freshness and Revalidation

- A cache entry is valid only for the exact Music index, difficulty, content area, and

area-specific state, including Ranking page or opinion sort and continuation state where applicable. Never use a cache entry from another target as current data.

- Treat Chart Info as fresh for the lifetime of the current Music-detail page session.

A new route entry may fetch the current server value again.

- Treat My Record, Ranking, and Tier/evaluation data as fresh for 60 seconds. After

that interval, display the exact-target cached data immediately and revalidate it in the background.

- A successful data sync, evaluation submission or edit, opinion mutation, reaction,

or other approved data-changing action must invalidate every affected target immediately rather than waiting for the 60-second interval.

- During background revalidation, keep exact-target content readable and expose one compact Updating status without blocking unrelated interaction.

- If background revalidation fails, preserve the exact cached content and identify it

as saved content with a compact equivalent of Could not load the latest data and one Retry action. Do not silently imply that stale data is current, and do not remove useful cached content solely because refresh failed.

- Do not permanently show a last-updated timestamp unless a future data contract can provide an accurate, user-meaningful timestamp for that domain.

Empty, Authentication, Eligibility, and Permission States

- Empty is a successful request with no applicable data. It is not a loading, permission, or failure state.

- Chart Info omits unavailable optional facts rather than turning the complete panel into an empty state. A missing Music or selected chart is Not Found, not empty.

- My Record uses the approved compact Login state when signed out and a concise no-record state when signed in without a play record. Do not fabricate zero-valued analytics.

- Ranking uses the approved concise no-public-record state. It does not offer Retry unless the request actually failed.

- Tier/evaluation preserves its approved distinctions among Not listed, Not published, no history, no ratings, Aggregating, no opinions, and loading or failure.

- Keep public Tier/evaluation content readable when a user cannot evaluate, react, report, edit, or delete. Replace only the restricted action region with the approved Login, verified-play, ownership, or moderation eligibility explanation.

- Do not render unexplained disabled forms or use a permission message as a generic substitute for absent data.

Failure Scope, Retry, and Not Found

- On initial route failure, preserve the shared application shell and show a concise

route-level state equivalent to Could not load Music information, with Retry and Back to Music search actions. The Retry action repeats the exact locale, Music index, difficulty, content area, and valid area state.

- A confirmed missing Music or chart uses the localized Not Found contract instead of

a transient error and does not offer a misleading Retry action.

- When no usable cache exists and one selected panel request fails, keep the selected

target and URL and replace only that panel with a concise failure and one Retry action. Do not revert silently to the preceding difficulty or area.

- When one independently loadable subregion fails, such as a distribution or opinion

continuation, preserve successful sibling content and place the failure and Retry at the smallest meaningful region. Do not fail the complete page.

- Automatically retry an idempotent GET once, with a short delay, only for a network

failure or server 5xx response. After that attempt, show the visible failure and manual Retry. Do not automatically retry 4xx, authentication, permission, validation, or destructive-action failures.

- Manual Retry must repeat the failed target rather than reset difficulty, area,

pagination, sorting, authentication return state, or scroll context.

- Action-processing failures remain adjacent to the initiating action and follow the

approved evaluation, opinion, reaction, and deletion consequences. A route error boundary does not replace expected action-error handling.

Focus, Semantics, and Status Announcements

- At widths that show the tab representation, implement the content-area choices with

`tablist`, `tab`, `tabpanel`, `aria-selected`, `aria-controls`, and labelled-panel relationships. Use manual activation because a newly selected panel may require a remote request: Left/Right Arrow moves focus cyclically, Home/End moves to the first or last tab, and Enter/Space activates the focused tab. Moving focus alone must not request or select another area.

- At widths that show the compact representation, use a select-only combobox with a

`listbox` popup, full option names, `aria-expanded`, `aria-controls`, `aria-activedescendant`, and `aria-selected`. Enter, Space, or an Arrow key can open the popup; Up/Down explores options; Home/End moves to the first or last option; Enter/Space confirms; and Escape closes without changing the selected area. DOM focus remains on the combobox. Exploring an option must not request its panel.

- After a compact selection, keep focus on the closed combobox and expose the selected

content as a labelled region rather than a `tabpanel` without an associated tab. At wide widths, preserve the complete tab-to-tabpanel relationship. Do not expose a duplicate hidden tab list or listbox.

- The selected difficulty requires an equally explicit current-state mechanism

appropriate to its final control pattern.

- Ordinary difficulty and content-area activation retains keyboard focus on the

control the user activated. Do not force focus into the loading or completed panel.

- Use one page-level polite status region for concise, target-specific messages such

as Loading Real Chart Info, Real Chart Info ready, and Updating Real Ranking. Avoid one competing live region per skeleton or card.

- Apply `aria-busy="true"` to the updating panel or list and clear it only after the

coherent update is ready. Do not announce every intermediate skeleton change.

- A visible request failure is announced once with suitable error semantics, while

focus remains in a predictable place and Retry is reachable in normal focus order.

- A hard load, direct URL entry, or reload follows normal document focus behavior;

do not force focus after the browser has loaded the document.

- A client-side transition from discovery, Ranking, Tier, profile, or another product

route into a different Music-detail destination updates the localized document title and moves focus to the Music-title h1 after stable identity context is ready. The heading may use `tabindex="-1"` for programmatic focus and must not enter ordinary sequential tab order.

- Back and Forward restore the exact URL-addressed content. Returning to an origin

collection restores its initiating result or action and nearby scroll position when that origin still exists; it does not replace that recovery with Music-title focus.

- Difficulty and content-area changes within Music detail keep focus on the activated control as specified above. They never move focus into a loading or completed panel.

- A client-side transition to a confirmed Not Found or full-route error announces and focuses that state heading after it is ready. A hard-loaded error follows ordinary document behavior.

Approved Chart Info and Personal Record Contract

Final Labels for the First Two Areas

Semantic area	Korean	Japanese	English
Chart facts			Chart Info
Personal record			My Record

- Use Chart Info, not Song Info, because the active difficulty determines the facts in this area.
- Keep My Record clearly personal and chart-scoped. Its existence does not make authentication the default entry rule.
- Ranking and Tier/evaluation labels are approved in the Tier & Evaluation contract below.

Chart Info Scope

Chart Info is a concise factual summary of the selected chart. It is not a preview hub for personal Record, Ranking, or Tier/evaluation.

- Always show BPM, note count, and duration.
- Show release date and unlock condition only when a meaningful value exists. Omit an unavailable optional row instead of preserving a row whose value is only –.
- Do not repeat difficulty, official level, level constant, category, title, or artist when the persistent Music and selected-chart context already exposes them.
- Move pattern-profile data and its vote count to Tier/community evaluation.
- Move score distribution, player count, and the current user's relative placement or percentile to Ranking.
- Do not leave compact pattern or score-distribution previews in Chart Info merely to link to their owning areas.

This boundary preserves one source of meaning for each domain and avoids reintroducing the rejected cross-domain Overview pattern inside the default area.

Selected-Chart Resource Actions

- Treat View chart and Play video as selected-chart actions rather than factual

Chart Info rows. Do not add an external-chart action.

- Keep one stable two-position contextual action group directly after the selected-

difficulty context and before semantic content-area switching. The order is View chart, then Play video.

- Enable View chart only for a NosLog chart published from the NosLog editor, and

enable Play video only for a valid play-video URL. Keep either missing resource as a visibly disabled and inoperable action instead of hiding the position or adding separate visible availability copy.

- Preserve the pair across content areas and difficulty changes. It is persistent in

the page hierarchy, not sticky to the viewport while scrolling.

- At compact widths, keep the pair in one row when validated Korean, Japanese, and

English labels fit; otherwise stack without changing order. At wide widths, align the same pair with the selected-chart context rather than leaving it inside a narrow information column.

- Disabled actions have no hover or pressed response and cannot activate. Keep the

label recognizable, expose the disabled state and concise unavailability reason programmatically, and, if a desktop tooltip is used, make the explanation available on keyboard focus as well. Do not rely on a tooltip as the only mobile explanation.

- Foundation specimens own final dimensions, spacing, color, contrast, and surface

treatment.

- Activate a valid Play video link in the current browsing context. Do not force a

new tab and therefore do not append a new-tab warning to the label. Browser-native user choice such as Command/Ctrl-click remains available.

Personal Record Priority

Use the following semantic order:

1. Best performance: best score, rank, Full Combo or Pianist achievement state,

best-record date, and progress to Pianist where relevant.

2. Cumulative summary: Play count, Max Combo, Full Combo count, and Pianist count.

3. Progress over time: a Best score series showing only record improvements.

4. Recent plays: recent chart-specific attempts, with concise row summaries and

optional per-play details.

5. Judgement analysis: detailed judgement counts and rates, note-type success

rates, and recent judgement/timing trends, collapsed by default.

The cumulative summary supports fast checking but must not compete visually with the best performance. Exact geometry is deferred to the representative mobile and desktop specimens.

Approved Record Terminology and Data Meaning

Meaning	Korean	Japanese	English
Progress section			Progress over time
Current progress-series metric			Best score
Per-user, per-chart play count			Play count

- Progress over time is the section label. Because the current series contains

only best-score improvements, the visible series label and accessible chart title must explicitly identify Best score rather than imply that every performance metric is plotted.

- Play count is a meaningful cumulative measure of how often this user played the selected chart. Preserve it independently of clear count.
- Do not expose clear count as a Music-detail performance metric. NOSTALGIA clear status does not meaningfully distinguish the user's selected-chart outcome for this product purpose.
- Profile-level total Play count, privacy behavior, and presentation are deferred to the Profile page brief and are not decided by this chart-scoped contract.

Analysis and Visualization Rules

- Keep peer comparison optional and off by default. When enabled, expose its sample basis and do not present a weak or unavailable sample as authoritative.
- Keep Judgement analysis collapsed by default because it is secondary diagnostic content. Best performance and the cumulative summary must never depend on expanding it.
- Do not visualize the same pattern-profile values simultaneously as both radar and bar charts. Use the approved five-axis community radar as the primary profile and provide exact values, per-axis valid counts, and a structured text equivalent.
- Give each chart one explicit question and metric contract. Provide exact values or a structured text equivalent, and never rely on color alone to convey a series or state.

Approved Ranking Contract

Purpose and Information Hierarchy

Ranking answers two questions for the selected chart: where is the current user? and how do public best scores compare? It is not a second personal-record dashboard and does not repeat Music or difficulty facts that remain visible in the persistent context.

Use this mobile reading order:

1. conditional current-user placement;
2. a heading equivalent to Ranking · N participants;
3. the public leaderboard;
4. explicit pagination when required; and
5. the secondary high-skill score distribution.

On desktop, preserve current-user context above the ranking content. Below it, make the leaderboard the primary region and allow the score distribution to occupy an adjacent secondary region when space and representative content support it. Preserve the mobile DOM and reading order even if desktop presentation places those regions side by side. Do not keep the current 390px fixed canvas on a wide viewport.

Conditional Current-User Placement

- When the signed-in user's row is on the current page, do not render a separate current-user summary. Highlight that row in the leaderboard using more than color alone.
- When the user's row is not on the current page, show one compact summary line above the list, equivalent to My rank 37 / 120 · 976,654 · S · FC. This summary is context, not a second full profile card.

- When the signed-in user has no score for the selected chart, show a concise state equivalent to No rank.
- When signed out, keep the complete public leaderboard available and provide only a small contextual action equivalent to Sign in to see my rank. Do not replace or obscure the public list with an authentication panel.
- Do not show a relative top-percent value. Exact rank and total participant count are more actionable and avoid ambiguous percentile rounding.
- If Ranking initiates Login, preserve locale, Music, selected difficulty, Ranking, and valid page context through the approved safe return path.

This conditional rule avoids presenting the same complete row twice while still making the user's position available from a page that does not contain their row.

Leaderboard Row Contract

- Show one best-score row per player.
- On mobile, group each row semantically as Rank | Player | Result.
- Player contains an avatar and linked display name. Keep the existing profile destination.
- Result makes score the primary value and score grade plus Full Combo or Pianist state secondary.
- On desktop, grade, achievement state, and score may occupy distinct visual columns, but their information relationship must remain the same as mobile.
- Do not add country, best-record date, filters, sort controls, or unrelated profile fields to this selected-chart leaderboard.
- Do not repeat Music title, jacket, difficulty, or level in every row because the persistent selected-chart context already identifies them.
- Provide visible or programmatically meaningful column labels. Right-align comparable numeric values and use tabular numerals.
- The current-user row treatment must remain identifiable without relying only on color, and its name and profile action must remain fully operable.

Shared-Rank and Tie Contract

- Equal best scores receive the same displayed rank.
- Use competition ranking with gaps: 1, 2, 2, 4.
- Inside an equal-score group, order the earlier achievement time first, but do not change the shared rank.
- If achievement time is also equal, use a stable internal ID only as the final deterministic ordering key. Do not expose that ID and do not turn it into a unique rank.
- The later implementation must map achievement time to the most reliable stored record-improvement time available from imported NOSTALGIA data. It must not silently substitute account creation time or arbitrary user ID.
- This contract applies to the selected-chart Ranking. Consistency with the separate

global ranking family must be reviewed in that page brief rather than changed silently here.

NOSTALGIA High-Skill Score Distribution

This visualization is intentionally an S-or-higher high-skill distribution, not a whole-population score-grade histogram. Upper-score differences remain useful to inspect at a consistent 10,000-point resolution, so preserve these equal-width bands:

Bucket	Included result
950k	950,000–959,999
960k	960,000–969,999
970k	970,000–979,999
980k	980,000–989,999
990k	990,000–999,999, excluding a Pianist result
Pianist	Current NosLog domain condition: score at least 1,000,000 or fc_type === 3

- Show the overall participant count independently, for example

Participants 100.

- Label the visualization and its own denominator independently, for example

S-or-higher score distribution · 30 players.

- Bucket counts and visual proportions must sum to the S-or-higher denominator, not the overall participant count.

- Show actual counts with visual proportions and provide the same values in an accessible structured representation.

- Do not add a <950,000 bar merely to make this a whole-population histogram. Those players remain included in the separate overall participant count.

- Do not replace these focused bands with broad score-grade categories such as

Pianist, S, A+, A, B+, B, C, and D. That grouping collapses the meaningful 950k–Pianist separation that this analysis is intended to expose.

- Treat the five 950k through 990k intervals and terminal Pianist category as

analytical categories, not as six official game ranks or six universally named community milestones. The documented game rank is S throughout 950,000–999,999, while community discussion most consistently names S, 990,000, and Pianist and also uses 970,000 or 980,000 in narrower progression contexts.

- Do not merge 950,000–979,999 into one count while leaving the 980k and 990k

bands at 10,000 points in this distribution. That unequal interval would make the first bar structurally more likely to dominate and would weaken direct comparison. A future cumulative milestone-attainment summary would be a different pattern and must not silently replace this distribution.

- Exact chart geometry, color, and compact desktop placement remain Foundation and representative-specimen decisions. The bucket meaning and denominator contract do not.

The user reconfirmed these six categories on 2026-08-01 after review of official rank definitions, community progression language, public player posts, community courses, KAC result spreads, and equal-bin visualization guidance. NosLog’s current rating policy provides additional local support: its score floor is 950,000, its anchors advance in 10,000 steps through 1,000,000, and its active mastery curve weights 990,000 and Pianist performance most strongly. This preserves useful analytical resolution without misrepresenting every band as an official or universally named milestone.

Pagination and Navigation

- Use a fixed page size of 25 players on mobile and desktop.
- Do not provide a rows-per-page selector.
- Hide pagination when the total is 25 or fewer; show explicit pagination from the twenty-sixth result onward.
- Preserve the current page in the localized URL and browser history.
- Use explicit pagination, not infinite scroll.
- After a user changes page, move or restore focus and scroll context to the Ranking heading or list start, and announce the updated result range to assistive technology.
- Normalize a non-numeric, negative, zero, or out-of-range page to the first valid page while preserving Music, difficulty, locale, and Ranking state.
- Page changes must not discard the current-user context or selected-chart context.

Twenty-five balances repeated comparison with mobile scan length and is a common production table increment. The current seven-row page is observed legacy behavior, not a 2.0 constraint.

Loading, Empty, Error, and Accessibility States

- During loading, preserve leaderboard row geometry with a restrained skeleton and mark the updating region with `aria-busy`.
- On request failure, show one concise error and an explicit Retry action. Do not present silently stale rows as if they are current.
- When no public best score exists, show one concise state equivalent to No recorded scores (). Do not simultaneously show a second No rank message for the current user.
- Signed-out users retain the same public empty, loading, and error behavior as signed-in users.
- Preserve table or equivalent collection semantics and header associations in the mobile representation; responsive styling must not turn the rows into unlabeled values.
- Treat an avatar as decorative when the adjacent linked player name already conveys the same identity. Localize meaningful score-grade image alternatives; do not reuse the current hard-coded Korean alternative text across locales.
- Localize displayed numbers while retaining stable numeric meaning, right alignment, and tabular figures.
- Do not communicate current-user row, Full Combo, Pianist, grade, loading, or error state by color alone.

Approved Tier and Evaluation Contract

Purpose, Labels, and Reading Order

Meaning	Korean	Japanese	English
Public score area			Ranking
Tier and evaluation	.		Tier & Evaluation

Tier & Evaluation answers five questions for the selected chart:

1. which public tier placements currently apply;
2. where goal-qualified players place the chart in each applicable tier scope;
3. what performance tendencies characterize its pattern;
4. how an eligible player can contribute or revise a tier vote or chart evaluation;

and

5. what practical opinions verified players have shared.

Use this mobile reading order:

1. the six current tier placements followed by their one integrated history

disclosure;

2. the six goal-specific community tier-vote aggregates;
3. the community pattern-tendency radar;
4. the current user's eligible tier-vote and chart-evaluation actions or forms; and
5. community opinions.

Do not turn this area into another score Ranking or repeat the factual Chart Info contract. The community-opinion contract below defines the list, reaction, reporting, moderation, sorting, and deletion behavior without approving a final visual design.

Six Tier Placements

- Show all six current placements without requiring a preliminary selector:

Basic S, Basic Full Combo, Basic Pianist, Recital S, Recital Full Combo, and Recital Pianist.

- Group the placements by Basic and Recital while retaining the association between

each placement value and its S, Full Combo, or Pianist goal.

- Treat the current placement as the primary fact. Never hide a current placement

behind the history disclosure.

- A wide layout may use a grid or table when it improves comparison, but must preserve

the same information relationships and mobile reading order. Exact geometry is deferred to representative specimens.

Placement-State Semantics and Localized Copy

The six positions remain present in every successful response. Use these distinct states instead of collapsing every absent value into one generic empty state:

State	Korean	Japanese	English	Required meaning
Published list contains the selected chart	Numeric placement value	Numeric placement value	Numeric placement value	Current public placement
Corresponding list is published but the selected chart is absent			Not listed	The chart has no current placement in that published list
Corresponding list itself is not published			Not published	No public list currently exists for that mode and goal
Request or system failure			Couldn't load	Data availability is unknown; provide one section-level Retry action

- A chart that was previously placed and later removed uses Not listed for its

current position. Its history, when opened, explains the removal event.

- Loading preserves the geometry and labels of all six positions with restrained

placeholders and an updating-region busy state.

- Never present a request failure as Not listed or Not published.
- Do not repeat educational copy, illustrations, or actions in each absent position.

These are compact status values inside a comparison group, not six independent page-level empty states.

Unified Placement-History Disclosure

- Place exactly one disclosure labelled Tier placement history after both the

Basic and Recital placement groups. Keep it collapsed by default.

- Do not provide six per-placement disclosures, six mini charts, or a permanent

multi-series chart. The user's primary question is the current six-position state; the secondary question is what changed and when.

- When history exists, the collapsed row may show the latest effective date beside

the disclosure label. The date is supporting text and must not replace the label.

- When opened, show the five newest events first. Group events that share an effective

date under one date heading and order date groups newest first.

- Each event identifies the Basic or Recital mode, S, Full Combo, or Pianist goal, and

the exact transition:

- initial placement: Not listed → value;
- placement change: previous value → current value; and
- removal: previous value → Removed from tier.
- Append older events in explicit batches of ten with Show older changes. Do not
- If no placement-history event exists for the selected chart, replace the disclosure
- The same disclosure order and event semantics apply on mobile and desktop. Wider

layouts may align date and transition columns more efficiently but must not split the history into six unrelated panels.

Use this localized control and event vocabulary:

Meaning	Korean	Japanese	English
History disclosure			Tier placement history
Latest change			Latest change
No history			No placement history
Continue older history			Show older changes
Removal event			Removed from tier

The disclosure control must be a semantic button with an accessible name, aria-expanded, and an association to the controlled region. Enter and Space toggle it. Opening or appending history must not move focus unexpectedly; appended results need a concise accessible update.

Placement Data Contract and Implementation Mapping

- Materialize six semantic positions from the published-list state for every selected
- Preserve removal events. The current `TierPlacementHistory.bandValue = null`

meaning is a real Removed from tier event and must not be filtered out of the public history query.

- Reconstruct the preceding state independently within each mode-and-goal stream so

every displayed transition has an unambiguous source and destination.

- Return list-publication state, current placement state, history events, and request

failure as distinguishable data. The interface must not infer Not published, Not listed, and error from the same empty array.

- A migrated current placement with no recorded history remains a valid current

value and uses No placement history below the six positions.

- The current product's single latest published placement, one-series line graph, and

public query that omits null-valued removal events are observed legacy behavior and must be replaced during the later 2.0 implementation.

Goal-Specific Community Tier Votes

Scope and Public Aggregate

- Replace the ambiguous single perceived-difficulty rating with six independent vote

scopes: Basic S, Basic Full Combo, Basic Pianist, Recital S, Recital Full Combo, and Recital Pianist.

- A vote states where the selected chart belongs on the approved NosLog tier-value

scale for exactly one mode and goal. Accept values from 1.0 through 14.5 in 0.1 increments so the vote vocabulary maps to the existing tier-band domain.

- Keep one vote per user, selected chart, mode, and goal. The user may edit or delete

each scope independently.

- Always show the exact valid-vote count for the scope being read.

- With one or two valid votes, show Aggregating and the count; do not expose a representative result or distribution.

- With three or more valid votes, publish the median, complete value distribution,

and exact count. Do not make the arithmetic mean the public headline because a small number of extreme values can move it disproportionately.

- The threshold of three prevents one person's input from being presented as a

community result. It is not a statistical-confidence claim; the exact sample size must remain visible.

- Signed-out and ineligible users may read every published aggregate. Eligibility

controls contribution, not public visibility.

- Community votes are advisory evidence. They never change an official NosLog tier

placement automatically, even when the median differs from the current placement.

Contribution Eligibility

- Enforce eligibility on the server for both creation and update. A disabled or

omitted client control is not sufficient authorization.

- The user must be signed in and have a verified record for the exact selected chart.

- For Basic, apply the existing goal predicates to that record:

- S: score at least 950,000;

- Full Combo: `fc_type >= 2` or a 1,000,000 score; and

- Pianist: `fc_type === 3` or a 1,000,000 score.

- For Recital, require the same goal predicate plus `grade_recital > 0` on the

exact selected chart. The current data proves Recital participation and the best goal result separately; it does not prove that both occurred in the same play. Treat this as the minimum verifiable 2.0 rule and tighten it only when future mode-specific history can prove the Recital achievement directly.

- Higher outcomes qualify only through the explicit predicate. Pianist qualifies for

Full Combo and S; Full Combo does not qualify for S when its score is below 950,000.

- A user who lacks one scope may still vote in another scope for which they qualify.

Do not convert eligibility into a single all-or-nothing chart permission.

- Do not award NOS, rating, badges, progression, or another incentive for voting.

Contribution must remain voluntary and must not create pressure to submit a value.

Data Separation and Migration

- Store goal votes separately from the general chart evaluation. Use a stable unique

scope equivalent to (chart_id, user_id, mode, goal) so votes survive official-list revisions and cannot overwrite one another.

- Do not attach a vote to a draft or published TierList row. The vote concerns the chart, mode, and goal; official list versions remain administrator-owned output.

- Migrate the existing perceived_constant data only through an explicit reviewed policy. Its single unspecific value cannot be inferred as six goal-specific votes and must not be copied into every scope.

- Keep vote create, edit, and delete audit facts sufficient for eligibility review and aggregate recomputation without exposing private play evidence publicly.

Administrator Review Signal

- Create a persistent administrator review candidate only when a scope has at least

five valid votes and the current numeric official placement lies outside the middle 50% of the vote distribution, the interquartile range (IQR).

- This threshold is an operational triage rule, not proof that the official placement is wrong. A numeric official placement is required for this comparison; an absent or unpublished placement is not silently classified as disagreement.

- Deduplicate the candidate by selected chart, mode, and goal. Later votes update the same candidate instead of creating repeated alerts or transient toasts.

- The administrator review surface must expose the current official placement, vote count, median, arithmetic mean, complete distribution, mode, goal, and chart identity. The mean is diagnostic context, not the public representative value.

- Support persistent states and explicit actions equivalent to In review,

Keep current, Change placement, and Review later.

- Change placement must use the normal administrator tier-placement workflow and preserve TierPlacementHistory. No review action directly mutates public placement outside that workflow.

- Do not remove or down-weight an outlying vote merely because it is far from the majority. Suspected invalid input requires explicit administrator audit; statistical disagreement alone is not misconduct.

- Exact administrator-page visual composition remains outside this public page brief, but the queue, deduplication, evidence, states, and action consequences are required downstream functionality.

Tier-Vote and Review Reference Evidence

Source	Transferable finding	NosLog application	Limitation
Current goal predicate	NosLog already defines exact S, Full Combo, and Pianist achievement predicates.	Reuse the same domain rule for Basic vote eligibility instead of inventing another threshold.	Current logic does not establish Recital proof by itself.
Current Prisma evaluation	One legacy row combines one perceived constant, pattern values, and comment per chart/user.	Requires an explicit split between six scoped votes and one goal-neutral chart evaluation.	The legacy schema is observed implementation, not product authority.
Official NOSTALGIA mode guidance	Basic and Recital are distinct play modes.	Prevents collapsing votes from the two modes into one community value.	It does not define third-party community voting.
ArcadeStat tier example	A rhythm-game community tier product can restrict votes to players who cleared the exact chart.	Supports achievement-backed first-hand voting instead of unrestricted opinion.	Its automatic aggregate and Pump scoring rules are not adopted.
V-ARCHIVE grade manual	A rhythm-game service ties a feature to an exact result criterion rather than generic participation.	Supports separate S, Full Combo, and Pianist eligibility gates.	DJMAX criteria do not map directly to NOSTALGIA.
Steam user reviews	Verified product usage and visible context improve review provenance, while manipulation remains an operational risk.	Supports server-verified chart participation and editable user contributions.	Playtime is broader and weaker than an exact chart achievement.
Google Play ratings policy	Ratings should reflect authentic experience and must not be manipulated through incentives.	Supports no rewards for votes and explicit anti-manipulation enforcement.	The policy governs app-store ratings, not chart tiers.
Google Play ratings behavior	A person can maintain and revise their own rating, while displayed aggregates may use product-specific weighting.	Supports one editable vote per exact scope and a documented NosLog aggregate.	Google does not disclose an algorithm NosLog should copy.
Airbnb review policy	Reviews should be relevant, authentic, and based on first-hand experience.	Reinforces exact-chart experience as the contribution boundary.	Accommodation reviews are not skill-gated game evaluations.
NIST: Measures of location	Median is less sensitive than mean to extreme distribution tails.	Makes median the public representative value while preserving mean for administrator diagnosis.	Median alone does not express sample quality or disagreement.
NIST: Detection of outliers	Outliers require investigation and should not be discarded automatically.	Keeps unusual votes valid until explicit audit rather than deleting them by distance.	The handbook does not define community moderation policy.
IMDb ratings FAQ	A rating product may show raw distribution while using a robust representative calculation.	Supports complete distribution, exact count, and transparent separation of summary from underlying votes.	IMDb's proprietary weighting is neither reproducible nor appropriate here.
BoardGameGeek ratings	Community rankings distinguish raw user ratings from a separately computed ranked result.	Supports keeping community evidence separate from administrator-owned official tiers.	Bayesian ranking across games is a different problem from one chart's placement.
Management Science: The Wisdom of Smaller, Smarter Crowds	Small knowledgeable groups can be useful, but group composition matters.	Supports skill-qualified voters while retaining exact sample counts and a cautious low-count state.	It does not validate three or five as universal statistical thresholds.
Social influence and crowd independence	Visible prior opinions can reduce independence and amplify convergence.	Requires distribution transparency and prevents community consensus from silently becoming official truth.	The research setting is not a rhythm-game tier interface.
Google SRE: On-call	Operational signals should be actionable and maintain a high signal-to-noise ratio.	Supports a persistent thresholded review queue rather than notifying on every difference.	Reliability incidents are more urgent than editorial tier review.
Google SRE: Practical alerting	Alerts should correspond to conditions that require a defined human response.	Supports explicit Keep, Change, and Defer outcomes with evidence attached.	Service-health alert thresholds do not define vote statistics.
PagerDuty alerts	Deduplication groups repeated signals into one evolving operational item.	Supports one candidate per chart, mode, and goal that updates as votes change.	PagerDuty's incident severity and escalation model are not adopted.

The evidence converges on four rules: contributors need relevant first-hand proof; goal and mode scopes must remain explicit; a robust public summary must retain count and distribution; and disagreement should create a high-signal human review task rather than an automatic content change. No reference establishes NosLog's exact three-vote publication or five-vote IQR review thresholds. Those are conservative, user-approved initial operating rules and must remain measurable after release.

Community Pattern-Tendency Radar

- Use one five-axis radar profile as the primary visualization. Do not duplicate the same values in a second bar chart.
- Use this fixed axis order and localization on every chart and viewport:

Axis	Korean	Japanese	English
1			Stairs
2			Repetition
3			Polyrhythm
4			Offset
5			Chords

- Korean explanatory copy may mention the established shorthand , but the visible axis label remains the clearer .
 - Chords measures simultaneous-input burden, including simultaneous-note count, span, changing shapes, repeated chords, and tenuto-chord combinations. It is not a raw count of all simultaneous notes.
 - Keep the concepts distinct: Polyrhythm covers different rhythmic structures between hands; Offset covers closely displaced timing; Chords covers notes required at the same timing.
 - Do not use Glissando as a community radar axis. Preserve Glissando as a chart note type and as part of personal Judgement analysis where its performance meaning is useful.
 - Use one fixed 0–4 scale and fixed axis order so the shape remains comparable across charts and locales.
 - Draw only the community average. Do not overlay the current user’s profile on the same radar.
 - Provide exact averages and valid rating counts for all five axes in compact, structured text near the radar. This is the precise and accessible equivalent, not a second competing visualization.
 - Pattern-axis ratings are individually optional. Store Not rated as missing data, distinct from the valid 0 value None.
 - Require at least three valid ratings per axis before publishing that axis. If any axis remains below the threshold, do not draw a partial or falsely complete polygon; show an Aggregating state with the available per-axis counts instead.
 - Provide one shared Pattern tendency criteria help entry for the five definitions rather than five permanent help buttons.
 - The radar requires a structured text alternative and must not depend on color alone.
- Final size, typography, label collision behavior, and contrast are foundation and specimen decisions. The current component’s small geometry is observed evidence, not the 2.0 baseline.

General Chart Evaluation Input and Eligibility

- Keep the goal-specific tier vote and the general chart evaluation as separate contributions with separate controls and consequences.
- Only a signed-in user with a verified play record for the selected chart may submit the general chart evaluation.
- Each of the five pattern-axis ratings and the written opinion is optional. The general evaluation has no required perceived-difficulty field.
- The form must offer an explicit Not rated state and must never prefill an omitted pattern rating as 0 or None.

- Keep one general evaluation per user and selected chart. The user may edit or delete

it independently from any goal-specific votes.

- Keep public aggregates readable for signed-out users and signed-in users who are not eligible to submit.
- The current input schema and form require all legacy pattern fields and a comment.

The 2.0 implementation must migrate that contract explicitly: separate the current `chord` field that is used for Polyrythm from the new simultaneous-input Chords meaning, remove Glissando from the community profile without removing Glissando performance data, remove the general `perceived_constant` requirement, and make optional ratings genuinely nullable. Do not silently repurpose stored values.

Community Opinions

Information Hierarchy and Row Content

- Treat an opinion as the optional written part of one user's selected-chart evaluation, not as an independent discussion post detached from the evaluation.
- Each visible opinion exposes the author identity, written opinion, written or edited time, Helpful count and state, and a contextual overflow action.
- Do not attach one of the author's six goal-vote values to the opinion row. Goal votes belong to their scoped aggregate, while the opinion remains goal-neutral practical chart commentary.
- Exact typography, weight, color, badge treatment, spacing, surfaces, and row or card geometry are deferred to the approved foundations and representative mobile and desktop specimens. The discussion mock-up used to approve this contract is a behavioral example only and is not a visual source of truth.
- Keep the written opinion concise and readable as the main row body. Show an edited indicator when applicable without exposing a full revision history in the public list.
- Do not repeat the five pattern-axis values in every opinion row. The community radar owns the aggregate, and a user's individual pattern values are not required for scanning written advice.
- Do not add nested replies, author pinning, or a second discussion hierarchy in this contract. Opinions support chart evaluation and practical reading rather than a general-purpose forum.

Helpful Reaction and Eligibility

- Provide one reversible positive reaction labelled equivalently to Helpful. Display its count and the current user's selected state together.
- Do not expose a public Unhelpful, dislike, or negative count. The reaction helps readers surface useful chart advice; it is not a parallel correctness vote or a mechanism for community punishment.
- A user may react only when signed in and holding a verified play record for the selected chart, matching evaluation eligibility. Public readers may still see the count.
- The opinion author cannot react to their own opinion. Explain unavailable self-reaction through the control's disabled or omitted state and accessible context; do not show an error only after an invalid submission.
- Toggling Helpful must not move the row while the user is operating it, even when the list is sorted by Helpful. Apply the changed order on the next deliberate refresh, sort change, or list request so focus and reading context remain stable.

Sorting and Explicit Continuation

- Offer exactly two sorts: Helpful and Newest. Helpful is the default.
- Helpful sorts by Helpful count descending, then written or edited recency descending as the deterministic visible tie rule. Newest sorts by the opinion's current public recency descending.
- Initially render ten opinions. An explicit Load more opinions action appends the next ten in the active sort without replacing the rows already read.
- Hide the continuation action when no more opinions exist, and preserve already loaded rows after a Helpful toggle or report submission.
- Do not use infinite scroll, an Oldest sort, a page-size selector, or nested pagination controls for this supporting list.

Author Editing and Two Deletion Scopes

- Keep opinion editing in the author's contextual overflow menu. Preserve the parent evaluation and show the public edited indicator after a successful update.
- Delete opinion removes only the optional written opinion. It retains the user's optional pattern ratings and every separate goal-specific vote.
- Delete chart evaluation is a separate destructive action that removes any pattern-axis ratings and the written opinion, but does not remove goal-specific tier votes.
- Each goal-specific vote has its own edit and delete action in its exact mode-and-goal scope. Deleting one vote does not delete the general chart evaluation or another vote.
- Never make a comment-labelled delete action silently remove the whole evaluation.
- Every destructive action requires consequence-specific confirmation. Opinion-only, chart-evaluation, and tier-vote confirmations must name exactly which data remains and which data is removed; none may imply that unrelated contributions are deleted.

Reporting and Moderation

- Keep Report in another user's contextual overflow menu instead of adding a permanent action button to every row.
- The report dialog requires one reason: irrelevant or spam; abuse, harassment, or hate; sensitive, private, or dangerous content; or Other. Other may request a short explanation when needed for review.
- A successful report acknowledges receipt without publicly revealing the reporter or instantly claiming that the opinion violated policy.
- One report does not automatically hide an opinion for everyone. Administrators review reports and choose one explicit result: Keep, Hide written opinion, or Exclude entire evaluation.
- Hide written opinion removes the text from public display while retaining valid non-text evaluation values. Exclude entire evaluation removes every value from the general chart evaluation from public aggregation and opinion display, but it does not silently remove separate goal-specific votes. Preserve the moderation record and reason separately from public content.
- Goal-vote validity is a separate administrator audit concern. An outlier alone is not grounds for exclusion, and any excluded vote must retain an audit reason.
- Rate limiting, duplicate-report prevention, audit retention, notification policy,

appeal policy, and exact administrator queue layout remain implementation and operations decisions. They must not weaken the approved distinction between hiding text and excluding an evaluation.

Accessibility Consequences

- Give every overflow trigger an author-specific accessible name and expose its open state. Opening the menu moves keyboard focus into its actions; Escape closes it and returns focus to the trigger.
- Report, edit, and destructive confirmations use labelled modal-dialog semantics, contain focus while open, support Escape or an explicit Cancel action, and return focus to the invoking control.
- Keep Helpful and overflow controls large or sufficiently separated for 390px touch use. Do not communicate reaction, report, edited, hidden, or destructive state by color alone.
- Announce successful reaction, edit, deletion, report, and appended-result changes without replacing the user's current reading position.

Community-Opinion Reference Evidence

Source	Transferable finding	NosLog application	Limitation
YouTube: View, organize, or delete comments	Public comments expose author, time, reactions, edit/delete actions, reporting, and Top/Newest sorting.	Confirms that a compact row can keep primary reading content visible while moving owner and safety actions into context.	YouTube supports replies and broad entertainment discussion that NosLog does not need.
YouTube: Report inappropriate content	A report is opened from a comment's More menu, asks for a reason, and is reviewed rather than automatically proving a violation.	Supports contextual Report, explicit reasons, reporter privacy, and no global single-report auto-hide.	YouTube's moderation scale and automation are not NosLog requirements.
GitHub: Reporting abuse or spam	In-product reports target specific discussions or comments and route them for review.	Supports report attachment to the exact opinion and a separate moderation record.	GitHub limits some report capabilities by repository relationship and permissions.
GitHub Discussions documentation	Discussion content has explicit edit/delete and moderator actions.	Supports separating author actions from administrative moderation.	A software-project forum is broader and more conversational than chart opinions.
Stack Overflow: Vote up comments	One positive comment vote indicates useful and appropriate content.	Direct precedent for one Helpful signal without requiring a public negative count.	Stack Overflow's reputation model and content ranking must not be copied.
Stack Overflow: Flagging	Flags request moderator review, use standard reasons plus a custom option, and are distinct from ordinary voting.	Supports reasoned reports and separation of usefulness from policy violation.	Some Stack Overflow flag thresholds can auto-delete; NosLog explicitly rejects one-report auto-hide.
Google Maps: Local Guides community guidelines	Helpful experiential writing should be specific and relevant, while inappropriate contributions are reported.	Reinforces chart-experience eligibility and a concise advice-oriented opinion body.	Place reviews are not rhythm-game chart evaluations.
WAI-ARIA APG: Menu Button	A contextual action menu needs explicit open state, keyboard entry, and focus behavior.	Governs each opinion's overflow action without adding permanent buttons.	APG defines semantics, not NosLog styling.
WAI-ARIA APG: Dialog Modal	Modal dialogs contain focus, provide a label and closing action, support Escape, and restore context.	Governs report, edit, and destructive confirmations.	Exact initial focus depends on the final content and implementation.
WCAG 2.2: Focus Order	Sequential focus must preserve meaning and operation.	Prevents menus, appended opinions, and dialogs from producing confusing focus jumps.	It does not choose the visible row composition.
WCAG 2.2: Target Size (Minimum)	Pointer targets need sufficient size or spacing.	Applies to Helpful, overflow, sort, dialog, and continuation controls at the 390px baseline.	Meeting the minimum is not enough to define hierarchy or final geometry.
GOV.UK: Pagination	Break up long collections only when it improves usability, and avoid automatic infinite scroll because it harms keyboard access.	Supports an explicit continuation action instead of unbounded automatic loading.	Page navigation is not identical to append-in-place comments.
Carbon: Modal	A danger modal names the consequence of irreversible loss and uses action-specific labels.	Supports separate confirmations for opinion-only and entire-evaluation deletion.	Carbon's visual modal treatment is not a NosLog style source.
Carbon: Remove pattern	Confirmation strength should reflect whether removal is reversible and how much data is lost.	Justifies stronger consequence copy for deleting the entire evaluation than for deleting optional text.	The pattern covers enterprise objects rather than community evaluations.
Adobe Spectrum: Alert dialog	Destructive dialogs use a short outcome title, necessary consequence description, Cancel, and a specific destructive action.	Reinforces clear, non-generic delete confirmations.	Spectrum's color and component anatomy are not automatically adopted.
Atlassian Design: Components	Comment, dropdown menu, modal dialog, and pagination are distinct components with distinct interaction roles.	Supports composing opinions from reusable reading, contextual-action, confirmation, and continuation patterns rather than one overloaded card.	The component catalog does not determine NosLog's final information priority or styling.

The reference set converges on four principles: keep reading content primary; use one positive usefulness signal separately from safety reporting; place secondary and destructive actions in context; and require explicit, accessible moderation and confirmation flows. NosLog narrows these patterns to verified chart participants and keeps evaluation data separable from its optional written opinion. None of the visual surface treatments in these products or the approval mock-up is adopted as NosLog's final design.

Approved Representative Data and Page Acceptance Contract

Representative Data Fixtures

Use a bounded, risk-based fixture set rather than the Cartesian product of every locale, state, viewport, and content variation. The following cases are mandatory for guide specimens and later implementation acceptance where the affected content is present:

Fixture	Required content and variation	What it validates
Long mixed identity	Actual 2f733689ec21214d6180888fe0e6b42f: longest mixed Japanese/Latin title, long Japanese reading, three difficulties, no Real	Original-title hierarchy, wrapping, disclosure trigger placement, missing-difficulty state, and compact/wide identity composition
Long artist	Actual STULTI (bfdaadfb98501907925ecf41a076108d): 67-character artist and all four difficulties	Independent title/artist rows, long metadata wrapping, and complete difficulty controls
Long Japanese reading	Actual eaa4047ce17fb873b19b42454b0f6f3b	Popover wrapping, language declaration, and no clipping at compact widths
Missing artist	Actual Happy Birthday to You (8f655bcd097d033f7c464f96dc20223d) with all four difficulties	Omit the unavailable row without a blank placeholder or invented artist
Typical complete chart	A representative Music entry with all required chart facts, a published NosLog chart, a valid Play-video URL, four difficulties, and signed-in records	Normal hierarchy, both active actions, all semantic areas, and stable switching
Localized title variants	Approved long Korean and English title fixtures, the long Japanese reading, popover open/closed, and missing approved translation	Hover/focus/click/touch parity, omission without blank space, wrapping, dismissal, and full programmatic names

State coverage must include the following bounded seams. Do not create every possible combination; combine them pairwise with the identity fixtures above while preserving the semantic distinction of each state.

- signed in and signed out; played and unplayed selected chart;
- Ranking participant counts 0, 1, 25, and 26+, including ties and the current user both inside and outside the visible page;
- each Basic/Recital × S/Full Combo/Pianist vote scope at counts 0, 1–2, 3–4, and 5+, including eligible, ineligible, edited, deleted, and server-rejected vote attempts;
- an official placement inside and outside the IQR at 5+ votes, repeated updates to one deduplicated administrator candidate, and each approved review outcome;
- the four resource combinations for View chart and Play video: neither, either one, or both available;
- initial loading, delayed response, fresh cache, stale revalidation, empty result, authentication, eligibility or permission restriction, retryable error, and confirmed Not Found; and
- destructive tier-vote, chart-evaluation, and opinion actions only in the precise approved scopes, including confirmation, cancellation, success, and recoverable failure.

Responsive and Browser Verification Targets

- Verify compact widths at exactly 320, 360, 390, and 430 CSS pixels.
- Verify transition and wide layouts at 768, 1024, 1280, and 1440 CSS pixels.
- Continuously resize around the measured content-driven area-switcher and panel-layout

transitions. The width at which tabs replace the compact combobox is a specimen measurement, not a device-name breakpoint.

- Retain Chromium automation for the core 390x844 and 1280x900 paths. During the

later 2.0 implementation, add parameterized overflow/content checks at 320, 360, and 430, plus release smoke coverage in Chromium, WebKit/Safari behavior, and Firefox.

- Manually verify the critical path on current iOS Safari and Android Chrome, plus

desktop Chrome, Safari, and Firefox. Add Edge to release smoke coverage when usage analytics or deployment policy requires it.

- Verify keyboard-only operation, visible focus, VoiceOver on iOS/Safari, TalkBack on

Android/Chrome, 200% text enlargement, and 400% page zoom or its effective 320px reflow condition.

- Browser simulation is useful for repeatable layout checks but does not replace

current real-device and assistive-technology verification before the 2.0 release.

Page-Level Acceptance Criteria

The Music-detail page family is accepted only when all of the following hold:

1. Music identity, selected difficulty, resource actions, area switcher, and selected

panel preserve the approved order and remain understandable without relying on the current 1.x visual styling.

2. The original title remains primary; artist and chart context remain persistent and

distinguishable with the mandatory long and missing fixtures. Optional approved translation/reading is exposed only through the detail disclosure, with equivalent hover, focus, click/touch, dismissal, and assistive-technology access.

3. Difficulty and content-area state are shareable and restored by history. Known

source intent opens the approved area, and authentication returns to the exact Music, difficulty, and Record destination.

4. View chart and Play video retain their stable two-position map. Availability,

disabled semantics, current-tab Play-video navigation, and focused viewer return follow the approved contracts.

5. Loading, cached, empty, authentication, permission, error, retry, and Not Found

states affect only the smallest meaningful region, preserve stable identity, and never expose contradictory stale target content.

6. Keyboard and assistive-technology users can identify the page, selected difficulty,

selected area, updates, errors, and current Ranking position. Focus follows the approved hard-load, soft-entry, internal-switch, history-return, and error rules and is never lost to body.

7. Korean, Japanese, and English content uses correct page and phrase-level language

semantics, approved localized labels, suitable line breaking, full accessible names, and no locale-specific hard-coded suffixes.

8. All required widths reflow without page-level horizontal scrolling. Wide layouts

use available space according to each panel's approved comparison or analysis role instead of retaining the current 390px desktop canvas.

9. The representative state suite passes without uncaught browser errors, broken

history restoration, duplicate live announcements, hidden primary actions, or inaccessible destructive confirmations.

10. Tier votes enforce exact chart, mode, and goal eligibility on the server; public

aggregates use the approved thresholds and median; no vote or administrator review candidate changes an official placement without the normal administrator placement workflow.

11. Exact color, typography, spacing, radius, elevation, and final component geometry

are validated later through approved foundations and specimens; their deferral does not permit changing the content, behavior, state, or acceptance contracts in this brief.

Reference Comparison

Page Acceptance, External Navigation, Focus, and Validation Guidance

Source	Transferable finding	NosLog application	Limitation
W3C: G200	Opening a new browsing context should be limited to cases where it is necessary and warned in advance.	Supports current-context Play-video navigation rather than an unannounced forced tab.	The technique does not decide mobile app-link handling.
GOV.UK: Links	Avoid forced new tabs; when unavoidable, disclose the behavior in link text.	Confirms that no new-tab warning is needed because NosLog does not force one.	GOV.UK content style does not set NosLog's visual treatment.
USWDS: Link	External and new-context destinations need consistent, explicit meaning.	Supports a normal external Play-video link with predictable behavior.	USWDS icon styling is not adopted.
MDN: @@NOSLOGTOKEN0@@	Links that open a new tab or application require accessible warning and safe attributes.	Records the accessibility cost avoided by current-context navigation.	Browser or OS app association remains outside NosLog control.
Primer: Link accessibility	Do not force a new tab by default; users can choose one with browser controls.	Directly supports preserving Command/Ctrl-click choice.	GitHub's copy and iconography are not NosLog requirements.
WCAG 2.2: Focus Order	Sequential focus must preserve meaning and operability across context changes.	Rejects the current focus loss to body and governs restoration.	It does not prescribe a framework implementation.
WAI-ARIA APG: Keyboard Interface	Composite controls keep a predictable active focus and require explicit movement rules.	Supports retaining focus on difficulty, tab, and combobox controls during internal updates.	APG examples still require product testing.
Primer: App-like web experiences	Soft navigation should update the document title and place focus at the new context, while hard navigation can use browser behavior.	Supports h1 focus on cross-route soft entry but not on hard load or internal panel switches.	Exact framework hooks remain implementation work.
Primer: Focus management	Focus should remain logical, visible, and recoverable after updates and dismissed contexts.	Supports origin-result restoration on Back and precise error focus.	The guide does not define NosLog route state.
Next.js: Accessibility	Client transitions need meaningful titles and route announcements.	Requires localized titles and one clear destination heading for Music-detail routes.	Next.js route announcing alone does not restore origin focus.
React Router: Accessibility	Client-side routing requires explicit focus and live-announcement consideration.	Provides independent framework confirmation of the soft-navigation contract.	NosLog uses Next.js rather than React Router.
WCAG 2.1: Reflow	Content must reflow at an effective 320px width without two-dimensional scrolling.	Establishes the smallest required compact acceptance target and zoom check.	It does not select every intermediate test width.
web.dev: Responsive web design basics	Start from flexible content and choose breakpoints when content requires them.	Supports continuous transition testing instead of device-name breakpoints.	The article does not define NosLog's exact content widths.
MDN: Responsive design	Flexible grids, media queries, and intrinsic content behavior work together.	Supports the compact, transition, and wide acceptance matrix.	Examples are educational rather than NosLog-specific.
Tailwind CSS: Responsive design	Mobile-first variants layer adaptations as space increases.	Matches the approved 390px-first hierarchy and additive wide composition.	Default breakpoints are not approved NosLog tokens.
MDN: Container queries	Components can adapt to their actual container rather than only the viewport.	Supports measuring the area switcher and analytical panels from available content width.	Final browser support and implementation choice remain technical work.
Playwright: Test projects	One test suite can run across browsers, viewports, and device configurations.	Supports separating core Chromium checks from release cross-browser smoke coverage.	Automated emulation is not real-device validation.
Playwright: Emulation	Viewport, locale, color scheme, and device properties can be parameterized.	Supports repeatable KO/JA/EN and width fixtures.	Emulation cannot reproduce every mobile browser or assistive-technology behavior.
Chrome DevTools: Device mode	Responsive presets and throttling aid repeatable inspection but only approximate mobile devices.	Supports using simulation for layout while retaining real-device release checks.	Chrome simulation cannot validate iOS Safari.
GOV.UK: Browsers and devices	Production services define supported current mobile and desktop browser families from audience evidence.	Supports explicit iOS Safari, Android Chrome, and desktop browser release coverage.	Final version cutoffs should follow NosLog analytics near release.
GOV.UK: Testing with assistive technologies	Critical journeys require real assistive-technology testing, including mobile screen readers.	Supports VoiceOver and TalkBack acceptance on the primary Music-detail journey.	It does not replace testing with actual NosLog users.
W3C Internationalization: Line breaking	Japanese, Korean, and English have different line-breaking expectations.	Governs the long title, reading, artist, and translated-title fixtures.	Final typography still requires font specimens.



Source	Transferable finding	NosLog application	Limitation
W3C Internationalization: Language declarations	Page and mixed-language content need correct lang declarations.	Requires localized page language and phrase-level language for original and translated Music identity.	Language metadata does not by itself solve visual wrapping.

Authoritative Interaction and Layout Guidance

Source	Transferable finding	NosLog application	Limitation
W3C APG: Tabs Pattern	A tab list presents one associated panel at a time; activation and focus behavior must be explicit.	Supports one selected Music-detail content area and requires complete keyboard semantics.	It defines behavior and semantics, not visual composition.
Carbon: Tabs	Tabs group different but related information in one context; avoid them when simultaneous comparison is necessary. Slow remote content favors deliberate activation.	Record, information, ranking, and evaluation are related views but are not normally compared line by line.	Carbon's component styling is not a NosLog art direction.
GOV.UK: Tabs	Tabs suit clearly separable sections, especially for frequent users who do not need every section at once; selected state can be URL-addressable.	NosLog users repeatedly return to a specific chart task and benefit from restorable state.	Its narrow-screen presentation is service-specific and must not be copied without testing.
Atlassian: Tabs	Tabs organize similar information on the same page.	Supports one entity with four related product areas.	The public page provides limited product-specific responsive detail.
Fluent 2: Tablist	One tab, usually the first, is active on initial render and tab order should communicate the default.	Supports placing public Information first when it is the general-entry default.	Fluent's narrow-layout control substitution is not automatically a NosLog rule.
Adobe Spectrum: Tabs	Related equal-level sections need a clear selected state; manual activation is appropriate when content is not instantaneous.	Supports explicit area selection while detailed data loads on demand.	Spectrum permits some disabled-tab uses that do not fit NosLog's recoverable Login state.
W3C APG: Select-only Combobox	A non-editable single-select control can expose a listbox without committing a value while users explore its options.	Defines the compact area switcher's roles, focus retention, explicit selection, and Escape behavior.	APG examples require browser and assistive-technology testing and are not production code.
SEB Design Library: Tab	When a compact view cannot expose several tabs reliably, one current-tab control can open the complete option list.	Closely supports the approved current-area selector and full-label overlay at narrow widths.	A banking design library does not determine NosLog's visual styling or exact breakpoint.
Nielsen Design System: Tabs	A compact context-switching treatment can replace a tab row when mobile width cannot carry the labels.	Supports preserving all four area names without a permanent crowded button row.	The system's device rules still require validation against NosLog localization.
Queensland Health: Tabs	Cross-system research found horizontal scrolling familiar and lower-cost than an overflow menu in many tab sets.	Records the strongest contrary pattern; NosLog rejects it only because all four areas are peer destinations with long tri-lingual labels beside a separate difficulty row.	The research is not specific to rhythm-game detail pages or NosLog's label set.
Primer: Navigation	Horizontal destination sets need a deliberate small-screen overflow strategy and stable direct destinations.	Reinforces URL-addressable areas while showing that compact replacement is an explicit responsive decision.	GitHub's navigation density and action-menu patterns are not NosLog layout authority.
Primer: Underline Panels Accessibility	Tab panels need complete keyboard relationships and must not create inaccessible horizontal overflow at narrow zoomed widths.	Supports full tab semantics on wide layouts and avoiding compact horizontal scrolling.	It documents one component implementation, not NosLog surface treatment.
SAP Fiori: Object Page	An object page keeps object identity and local navigation persistent while sections use wide space according to their content.	Supports top Music/chart context and panel-specific wide compositions without duplicating a sidebar.	Enterprise object pages are denser and more section-oriented than NosLog's single panel.
Atlassian: Applying Grid	Wide interfaces benefit from intentional gutters, bounded content widths, and content-specific column spans rather than unbounded stretching.	Supports replacing the fixed 390px shell with a measured max-width grid and panel-specific spans.	Atlassian's exact grid values are not transferable NosLog tokens.
Tailwind CSS: Responsive Design	Mobile-first rules layer adaptations as usable space increases rather than starting from a desktop reduction.	Matches NosLog's 390px-first validation and additive wide-screen analytical layout.	Utility breakpoints are implementation defaults, not evidence for the final transition.
Tailwind CSS: Responsive Design - Container Queries	Container queries adapt a component to its actual parent width instead of only the viewport.	Supports switching selector/tabs and panel composition from available component width.	Browser support and code conventions require later implementation verification.
osu! Wiki: Beatmap Information	Rhythm-game detail preserves beatmap identity and selected difficulty while subordinate statistics and ranking context change.	Confirms the domain value of a stable top object context across semantic areas.	osu!'s exact information architecture and game mechanics do not map one-to-one to NOSTALGIA.
Apple: Segmented controls	A small set of related, mutually exclusive choices can alter the current view while keeping context stable.	Reinforces concise difficulty or view selection, subject to localized-width testing.	A segmented control is not automatically the correct visual component for NosLog tabs.
Apple: Tab views	Related mutually exclusive panes require clear selection and concise labels.	Supports limiting persistent content choices and avoiding competing panels.	Platform navigation tabs and in-page tabs are not identical.
Material Design: Canonical layouts	Feed layouts optimize broad scanning; list-detail and supporting panes preserve a selected object's context.	Shows why an overview-card feed better fits dashboards, while Music detail needs stable selected context.	Canonical layouts are starting structures, not a mandate for the final page.

Source	Transferable finding	NosLog application	Limitation
WCAG 2.2: Reflow	Content must adapt without two-dimensional scrolling at required narrow widths.	Future tabs and panels must survive localized labels and 390px validation.	It does not choose the exact tab overflow pattern.
WCAG 2.2: Target Size	Interactive targets require adequate size or spacing.	Difficulty and content-area controls need reliable touch targets without a dense permanent button wall.	Meeting the minimum alone does not establish good hierarchy.
WCAG 2.2: On Focus	Receiving focus must not initiate an unexpected change of context.	Focusing Record cannot automatically open Login; authentication requires an explicit action.	It does not define authentication copy or visual treatment.
WCAG 2.2: Consistent Navigation	Repeated navigation mechanisms should retain a predictable relative order.	Supports a stable semantic area order across authentication states and Music entries.	It does not determine which NosLog area is most important.

Selected-Chart Action Availability Evidence

Source	Transferable finding	NosLog application	Limitation
Adobe Spectrum: States	A disabled state can preserve layout continuity and communicate that an action exists but is unavailable in the current circumstance.	Supports stable View chart and Play video positions while selected-difficulty resources vary.	Spectrum does not decide whether an item-specific resource is temporary or permanently absent.
Carbon: Disabled states	Disable temporary dependency or prerequisite states; hide actions unavailable by role or that cannot be enabled.	Establishes the main caution: the pair is retained because availability varies by difficulty and later publication, not to advertise an impossible action.	A visitor cannot personally publish the missing chart, so NosLog must not claim the user can directly enable it.
Fluent 2: Button	Disabled buttons should explain what is unavailable and why, commonly through a tooltip.	Supports a concise programmatic reason and an optional focusable desktop explanation without persistent visible copy.	Hover-only tooltips do not solve mobile or assistive-technology access.
GOV.UK: Button	Disabled buttons have weak contrast and can confuse users, so use them only when research shows they improve understanding.	Prevents broad disabled-button use; NosLog limits it to two predictable selected-chart resource positions.	GOV.UK service forms are not selected-difficulty media detail pages.
PatternFly: Button accessibility	aria-disabled can keep an unavailable control perceivable and focusable when an explanation must be reachable.	Governs accessible disabled semantics if the final specimen uses a focus-triggered explanation.	The final DOM pattern still requires browser and assistive-technology verification.
SAP Fiori: UI element states	Hide controls that can never apply; disable controls whose availability changes with current context and is understandable.	Supports changing enabled state when the selected difficulty changes while retaining one stable action map.	Enterprise selection workflows are more directly user-enableable than chart publication.
USWDS: Button	Native disabled and perceivable aria-disabled variants are distinct; visible actions need clear labels and states.	Supports explicit View and Play labels with a visually distinct inactive state.	USWDS documents implementation options but not content-specific hide-versus-disable criteria.
Apple: Game controls	Contextually irrelevant controls may be hidden to reduce gameplay clutter.	Records the strongest platform counterpattern and limits disabled controls to the compact detail action pair, never the focused viewer canvas.	A gameplay overlay and an information-detail action group have different continuity needs.
MDN: @@NOSLOGTOKEN0@@	aria-disabled exposes unavailability but does not automatically suppress behavior or apply styling.	Requires implementation to prevent pointer and keyboard activation while styling and announcing the state deliberately.	ARIA semantics alone do not determine whether the action should remain visible.
osu!: Beatmap information	Game-mode choices with no available difficulty are greyed out while the stable beatmap option structure remains visible.	Provides the closest rhythm-game precedent for unavailable chart-related choices remaining in place.	osu! greys a mode choice rather than a separate viewer action.
Spotify: Unavailable content	Known but unavailable media remains visible and greyed out instead of disappearing from its collection context.	Reinforces stable media availability cues rather than shifting the layout when a resource is missing.	A track row carries identity and ordering information beyond an action button.
Smashing Magazine: Disabled-button pitfalls	Disabled controls often fail when their reason, focus behavior, or recovery path is unclear.	Requires recognizable labels, no false interaction feedback, and an accessible reason while avoiding extra permanent empty-state copy.	It is practitioner guidance rather than a normative standard or NOSTALGIA-specific study.

The sources disagree when an unavailable action is permanently irrelevant, permission- restricted, or impossible for the user to enable. They converge more strongly when a small stable action map changes with selected context or known media availability. NosLog therefore retains exactly two selected-chart action positions, uses disabled states only for a missing chart or video resource, and does not generalize this rule to other absent optional actions. Separate visible availability copy was

rejected because the stable labelled control already carries the necessary visual state; the accessible reason remains programmatically available.

Asynchronous State, Recovery, and Cache Guidance

Source	Transferable finding	NosLog application	Limitation
W3C APG: Tabs Pattern	A selected tab and its panel require explicit semantic relationships; automatic activation is appropriate only when panel latency is not noticeable.	Requires correct selected-area semantics and clear pending behavior when remote content is not immediate.	APG does not prescribe visual loading treatment or cache duration.
WCAG 2.1: Status Messages	Waiting, result, progress, and error messages that do not move focus must be programmatically exposed.	Requires concise target-specific loading, ready, update, and failure announcements without forced focus movement.	It does not require creating unnecessary visible status copy or define exact politeness.
MDN: @@NOSLOGTOKEN0@@	A changing region can defer incomplete announcements until its coherent update is ready.	Mark only the selected panel or list busy and clear it after the complete target update.	Browser and assistive-technology behavior still requires implementation testing.
React: @@NOSLOGTOKEN0@@	Non-blocking transitions remain interruptible and let a later user choice supersede pending work.	Supports keeping difficulty and area navigation usable and committing only the latest selected target.	The React primitive does not supply fetching, cancellation, cache, or error UI by itself.
Next.js: Loading UI and Streaming	Preserve a useful static shell and place Suspense boundaries near unresolved dynamic content.	Supports persistent Music context with a target-panel or route-level placeholder instead of a full blank page.	The current client fetch architecture will need implementation mapping rather than documentation alone.
Next.js: Error Handling	Expected request failures need explicit UI handling, and asynchronous event-handler failures are not automatically handled by render error boundaries.	Requires local request error state, exact Retry, and a separate route-level initial failure contract.	Framework boundaries do not decide NosLog's empty, permission, or domain-specific copy.
Carbon: Loading Pattern	Skeletons fit known structured content; inline indicators fit smaller processing scopes; assistive technology needs loading and failure notification.	Supports panel skeletons, local continuation indicators, and avoiding multiple simultaneous page loaders.	Carbon's timing and component styling are not NosLog foundation tokens.
Fluent 2: Skeleton	Skeletons should represent essential dynamic structure, not fixed tabs, and must preserve focus when content appears.	Limits Music-detail skeletons to dynamic panel geometry and requires stable keyboard context.	Fluent suggests skeletons for longer waits; NosLog adopts a separately approved anti-flash threshold.
PatternFly: Skeleton	Use a skeleton when the final structure is known and a spinner when structure is unknown or likely to resolve to failure or empty.	Supports area-specific skeleton shapes while reserving compact indicators for uncertain local continuations.	PatternFly's enterprise visual anatomy is not a NosLog art direction.
Primer: Loading	Loading feedback should be component-specific, subtle, and may use delayed indicators to avoid flashing.	Supports the approximately 300 ms perceptible-delay threshold and one local indicator at an append boundary.	Primer's exact delay props are implementation examples, not universal performance guarantees.
Adobe Spectrum: Progress Circle	Indeterminate progress fits work whose duration cannot be calculated, with scale chosen for its containing region.	Supports small local feedback for Retry, continuation, and action processing rather than fake percentages.	Native-platform scale and styling are not transferred.
SAP Fiori: Placeholder Loading	Responsive skeleton pages can preserve a familiar object-page frame and replace only newly loading content.	Supports one stable Music-detail context across mobile and desktop while the selected panel changes.	Fiori floorplans and generic placeholder visuals are not copied.
SAP Fiori: Empty States	No data, user-action results, permission, configuration, and system failures require different meanings and appropriately scoped next steps.	Prevents Record, Ranking, Tier placement, permission, and request failures from collapsing into one generic empty state.	NosLog intentionally uses shorter copy than many enterprise empty-state examples.
Atlassian: Designing Messages	Empty, section, flag, and banner messages serve different scopes and severities.	Uses panel-level messages for selected-area failures and avoids a global banner for a local request.	Atlassian's flag and banner placements are product-specific.
USWDS: Alert	Alerts communicate important informational, warning, success, or error changes with explicit semantics.	Supports one concise visible error treatment after a request finally fails.	The government visual component is not adopted as NosLog styling.
TanStack Query: Paginated Queries	Previous successful rows can serve as explicitly identified placeholder data during a same-schema page change, reducing layout jumps.	Allows pending Ranking rows to remain only during Ranking pagination, not across different semantic areas or difficulties.	NosLog need not adopt TanStack Query; the state distinction transfers independently.
web.dev: Stale While Revalidate	Exact cached content can provide immediacy while an age-based background request restores freshness.	Supports exact-target Fresh/Stale semantics, 60-second dynamic data freshness, and non-blocking update state.	HTTP examples do not determine NosLog's domain-specific invalidation events.
MDN: @@NOSLOGTOKEN0@@	An obsolete fetch and response-body consumption can be cancelled before completion.	Supports latest-intent-wins difficulty and content-area navigation without wasting or committing obsolete requests.	Cancellation does not replace request identity checks, deduplication, or visible error handling.

The sources converge on scoped feedback, persistent stable context, semantically exact target data, distinct absence and failure meanings, and interruptible navigation. They differ on when a visual loader should appear: examples range from a short delayed indicator to skeletons intended for waits above roughly one second. NosLog resolves that disagreement by updating the target and busy semantics immediately, avoiding animated loader flash for sub-300 ms responses, and revealing a simplified structure-matched skeleton only for a perceptible delay. Previous visible data is retained only when it belongs to the exact target during revalidation or to the same schema during pagination; it is never borrowed from another semantic area or difficulty.

Authentication and Return-Path Guidance

Source	Transferable finding	NosLog application	Limitation
Auth0: B2C authentication architecture	Authentication should return a user to the protected destination that initiated the flow.	Record Login preserves Music, difficulty, locale, and selected area instead of falling back to Home.	Auth0's product architecture is not NosLog's implementation stack.
Auth0: Redirect users after login	Store the intended URL through authentication and validate the return target before redirecting.	Confirms the approved safe relative <code>returnTo</code> contract and exact post-login restoration.	The callback code must follow NosLog's existing Discord OAuth system.
WCAG 2.2: Link Purpose	A link's purpose must be understandable from its text and surrounding context.	Login must make clear that it unlocks personal Record and returns to the current chart context.	It does not prescribe the final localized wording.
WCAG 2.2: Focus Order	Focus order must preserve meaning and operability through navigation and context changes.	Tab order, the Login action, and restored Record content need a logical focus sequence.	Exact focus restoration still requires representative implementation testing.

Content Hierarchy and Data-Visualization Guidance

Source	Transferable finding	NosLog application	Limitation
Figma: UI design principles	Hierarchy should reflect what users need first; progressive disclosure reduces overload from secondary capability.	Best performance and core chart facts remain visible while diagnostic detail can be disclosed on demand.	This is general design guidance and does not define NOSTALGIA data meaning.
W3C: Presentation and progressive disclosure	Interfaces may reduce distraction by initially showing only what is necessary for the current task.	Supports separating factual Chart Info from Ranking and Tier/evaluation rather than mixing previews.	Reduced presentation must not hide content that every user needs.
GOV.UK: Summary list	A description list is suitable for a compact set of related key-value facts.	BPM, note count, duration, and available optional facts form one concise Chart Info group.	The GOV.UK surface styling is not a NosLog visual direction.
GOV.UK: Accordion	Accordions hide content and should be reserved for related sections that users do not all need to read.	Supports collapsing Judgement analysis, not Best performance or the cumulative summary.	User testing is still required to confirm discoverability.
Carbon: Accordion	Progressive disclosure fits secondary long content in constrained space but adds interaction cost.	Advanced judgement and timing diagnostics justify the cost; primary record facts do not.	Carbon component geometry must not be copied as a visual rule.
USWDS: Data visualizations	Prefer familiar chart types and limit a visualization to one central idea with few concepts.	Rejects duplicating the same pattern values in radar and bar charts and requires an explicit metric.	The examples are guidance, not a coded NosLog component.
ONS: Choosing a chart type	Choose the simplest familiar chart for the relationship; separate charts can be clearer than one complex chart.	A time series can answer Best-score progression while pattern comparison is decided separately.	Public-statistics audiences differ from rhythm-game experts.
Carbon: Chart anatomy	Descriptive titles, direct labels, and restrained chart frames make a chart's meaning easier to interpret.	Requires the Progress section to identify its Best score series instead of using an ambiguous trend title.	Carbon's token and chart styling are not NosLog foundations.
W3C: Complex images	Charts need short identification plus a structured text representation of essential values and relationships.	Score and pattern visualizations require exact values or an equivalent structured description.	The exact alternative depends on the final selected chart.
Apple: Charts	Charts should emphasize the relevant relationship and remain legible with accessible labels and interaction.	Reinforces focused progress and comparison views rather than decorative duplicate graphics.	Platform-specific interaction details are not automatically web requirements.
Texas: Data visualization guide	Put the most important information first; use line charts for trends and tables or labels for exact values.	Supports Best performance before history, a line for Best-score progress, and exact value access.	Government editorial guidance does not determine NosLog art direction.

Tier, Evaluation, and Pattern-Profile Evidence

Source	Transferable finding	NosLog application	Limitation
Official NOSTALGIA Op.3: How to play	Glissando is a distinct playable note behavior in NOSTALGIA.	Retain Glissando in note-type and personal-performance analysis even though it is not one of the five community radar axes.	It explains play behavior, not community evaluation taxonomy.
Official NOSTALGIA Op.3: PC environment	The official PC requirements call for a keyboard that can recognize multiple simultaneous keys.	Confirms that simultaneous-input burden is a real NOSTALGIA chart property worth evaluating as Chords.	Hardware requirements do not define a rating scale.
Current Prisma schema	The current evaluation record stores required legacy stairs, chord, trill, glissando, and repetition fields.	Requires an explicit nullable-field and taxonomy migration rather than a label-only redesign.	Current storage is observed implementation, not the 2.0 product authority.
Current evaluation configuration	The current UI maps chord to Polyrrhythm and trill to Offset.	The new Chords axis cannot silently reuse the existing chord values; Polyrrhythm and simultaneous Chords must be separated.	Existing field names are historical and semantically misleading.
SDVX.org: Effect Radar	A fixed multi-axis chart profile communicates how one rhythm-game chart concentrates different demands.	Supports one stable five-axis community fingerprint for a selected chart.	SOUND VOLTEX axes and mechanics cannot be copied into NOSTALGIA.
VOLTEXES: Effect Radar	Players use a radar shape to recognize a chart's overall tendency quickly.	Supports preserving the familiar at-a-glance profile rather than replacing it with a bar-only summary.	This is a community explanation, not controlled usability research.
Cloudy Boy: Effect Radar analysis	Experienced rhythm-game players reason about charts through fixed axis definitions and the resulting shape.	Requires stable order, shared criteria, and accessible definitions.	Expert commentary may not predict novice comprehension.
DDR Groove Radar overview	A five-axis radar has long been used to summarize chart characteristics alongside difficulty.	Provides a domain precedent for a pentagonal chart fingerprint.	The source is community maintained, and DDR's axes differ from NosLog's.
Rhythmic Footsteps: Training for the Groove Radar	Players can learn to read a radar profile, but axis terminology needs explanation.	Supports one shared criteria help entry and explicit localized axis names.	It is practitioner guidance rather than formal research.
BeatLeader: Ratings on all maps	A compact multi-dimensional shape is used to communicate different map skill demands.	Reinforces the value of a single profile for map selection and expectation setting.	Beat Saber skill dimensions are not NOSTALGIA pattern dimensions.
IBM Research: Off the Radar	Radial displays can perform poorly when users must compare composite indicators precisely.	Restrict the radar to one chart fingerprint and pair it with exact structured values.	Its comparison tasks are broader than recognizing one familiar rhythm-game profile.
Applied Ergonomics: Radar-chart efficacy	Accuracy falls when radar charts carry multiple overlapping data series.	Show only the community average and reject a personal-profile overlay.	Experimental tasks and audiences are not identical to NosLog's.
PubMed: Bar and line graph comprehension	Position and length encodings support more exact quantitative comparison than shape alone.	Provide precise values and counts as structured text without duplicating the profile as another chart.	The study does not evaluate rhythm-game experts reading a familiar radar.
Tableau: Radar Chart extension	Radar charts are intended for same-scale multivariate profiles and make balance or skew visible.	Fix every axis to the same 0–4 scale and order.	Product documentation does not establish accessibility by itself.
W3C: Complex images	Complex charts require a textual alternative that communicates essential data and relationships.	Provide all five exact averages and valid counts in structured text.	Final alternative structure depends on the approved component specimen.
USWDS: Data visualizations	A visualization should communicate one central idea and expose data accessibly.	Use the radar only for pattern tendency; do not mix tier placement or perceived difficulty into it.	It does not endorse a specific radar implementation.
UK Government Analysis Function: Charts checklist	Clear labels, reduced clutter, and accessible alternatives are required for publishable charts.	Keep axis labels legible, avoid decorative duplication, and provide structured values.	Public-statistics conventions still need adaptation for compact game data.
Highcharts: Tables and accessibility	A data table or accessible description can expose chart values, but must remain connected to the visual.	Treat exact-value text as an equivalent representation associated with the radar, not unrelated metadata.	Library-specific implementation advice does not mandate Highcharts.
NOSTALGIA wiki: Concertino in Blue	Community chart analysis identifies dense multi-note simultaneous patterns as a central difficulty source.	Supports Chords as a NOSTALGIA-relevant performance tendency.	It is a chart-specific community account, not a universal taxonomy.
NOSTALGIA wiki: PLEASURE STREAM	Changes between two- and three-note simultaneous shapes are described as miss-inducing difficulty.	Supports rating span and shape changes rather than merely counting simultaneous notes.	One chart cannot determine the complete axis definition.
Gamerch: NOSTALGIA finger practice	Simultaneous chords recur as a recognizable NOSTALGIA practice category.	Confirms that players distinguish chord handling from stairs and repetition.	Community-maintained instructional content requires cautious generalization.

Source	Transferable finding	NosLog application	Limitation
IPSJ Kansai 2024: NOSTALGIA chart-feature study	Simultaneous-note count is modeled as a chart-difficulty feature.	Provides technical support for including simultaneous input while NosLog retains a broader qualitative burden definition.	A computational feature count is not itself a user-facing community criterion.

Tier-Placement History and State Evidence

Source	Transferable finding	NosLog application	Limitation
W3C APG: Disclosure pattern	One labelled control exposes one associated secondary region and communicates expanded state semantically.	Requires one keyboard-operable history disclosure with aria-expanded and a controlled region.	It defines semantics and interaction, not NosLog content hierarchy or styling.
GOV.UK: Details	Details improve scanning when they contain information only some users need; they must not hide information most users need.	Keep six current placements visible and collapse only their secondary history.	GOV.UK notes discoverability concerns and its service styling is not a NosLog visual direction.
Apple: Disclosure controls	Essential controls stay visible, advanced detail is hidden until relevant, and multiple disclosures in one view can add confusion.	Supports one section-level history control instead of six per-placement controls.	The one-control advice is platform-specific and is supporting evidence, not a universal web rule.
Microsoft: Progressive disclosure controls	Expanded content must be collapsible and the inverse action must remain obvious.	Requires persistent, reversible history state with a clear label and indicator.	The guide targets an older Windows environment; only the interaction principle transfers.
PatternFly: Expandable section	Toggle text should describe the content that expansion reveals.	Use the descriptive localized Tier placement history label rather than a generic More control.	PatternFly component geometry and enterprise styling are not implementation requirements.
GitHub: Repository activity	Change history is most useful as dated events that identify the exact activity and offer deeper comparison only on demand.	Model placement history as factual date-grouped transitions rather than a decorative trend graph.	Repository events are more complex and actor-oriented than public tier changes.
Figma: Version history	A timeline groups saved checkpoints and uses an explicit Show older action for earlier history.	Supports newest-first initial events and explicit older-history continuation.	Figma versions are restorable document snapshots, while NosLog history is read-only placement metadata.
Linear: Assignment history	Field changes are recorded in one activity feed so users can understand what changed over time.	Keep six placement streams in one chronological feed while naming the affected mode and goal per event.	Team-work attribution is irrelevant to the public NosLog presentation.
Notion: Page version history	Current content remains primary while historical versions are accessed separately when needed.	Reinforces current placements first and secondary history on demand.	Page restoration and subscription limits do not apply to NosLog.
Carbon: Empty states	No data, user-action results, permissions, configuration, and system errors require distinct meanings; compact spaces should minimize repeated content.	Distinguish Not listed, Not published, and load failure, and use short text-only states across six positions.	Carbon's action-oriented full empty states would be excessive for each compact placement slot.
Atlassian: Empty state	Empty states briefly state what is absent and add an action only when a meaningful next step exists.	Avoid six repeated calls to action; offer one Retry only for a section-level failure.	Its Forge component props do not determine NosLog implementation.
Shopify Polaris: Empty state	Empty states belong where list, table, or chart data would appear, but the full component is not intended for every small subregion.	Use compact status values in placement cells and reserve a full error treatment for complete section failure.	Merchant onboarding goals differ from read-only rhythm-game reference data.
Official NOSTALGIA Op.2: Entrance and play mode	NOSTALGIA distinguishes Basic and Recital as separate performance modes.	Preserve Basic and Recital as the primary grouping for all six placements and their history.	The official page does not define community tier lists or their history.
Arcaea Wiki: Chart-constant change history	Rhythm-game players benefit from exact old and new chart values organized by version.	Preserve exact transitions and effective dates rather than only an aggregate delta.	Its wide cross-version tables do not fit NosLog's mobile-first selected-chart context.
osu!: Beatmap information	Current difficulty facts and last-change context are attached to the selected difficulty without replacing its primary identity.	Supports selected-chart-scoped current values with history remaining subordinate.	osu!'s algorithmic star rating and mapping lifecycle differ from community tier placement.
NOSTALGIA community guide: Nosshirube	Community chart guidance uses detailed chart-level difficulty context to help players choose and understand songs.	Confirms that chart-level tier context is useful while current readability must remain primary.	It is community-maintained editorial evidence and does not prescribe interaction design.
Current public tier data loader and current summary component	The current product selects one recent published placement, filters null removal history, and renders one small line graph.	Records the precise legacy gaps that the six-position and unified-event contract must replace.	Current code is audit evidence, not an approved visual or behavior baseline.

The authoritative disclosure sources converge on keeping primary facts visible and making secondary detail explicitly reversible. Production history products converge on one chronological activity surface with older content loaded on demand.

Empty-state systems converge on distinguishing absence from failure and avoiding repeated heavy treatments in small regions. Domain sources validate exact value transitions and the Basic/Recital grouping but do not provide a mobile-ready public-history pattern. The approved contract combines these transferable principles without copying any source's surface design.

Leaderboard, Table, and Pagination Guidance

Source	Transferable finding	NosLog application	Limitation
W3C: Tables tutorial	Related row and column data requires structural headers and associations, not visual alignment alone.	Requires meaningful Rank, Player, and Result relationships at every width.	It does not choose page size or visual density.
W3C: Table tips	Tables should remain simple, with clear headings and abbreviations explained in context.	Supports the three-group mobile row and excluding unrelated profile fields.	Responsive styling still requires product-specific testing.
USWDS: Table	Numeric comparison benefits from consistent alignment, while stacked responsive rows still need labels.	Supports right-aligned tabular scores and persistent semantic labels on mobile.	Government transaction-table styling is not a NosLog visual direction.
GOV.UK: Table	Tables should make row-column relationships clear and align numbers for comparison.	Supports one compact comparable leaderboard rather than unrelated card fields.	It does not cover game achievements or current-player context.
Carbon: Data table	Dense comparable records need clear hierarchy, predictable row structure, and deliberate loading or empty states.	Supports leaderboard-first hierarchy and stable row skeletons.	Carbon's toolbar-heavy enterprise patterns are unnecessary here.
Atlassian: Dynamic table	Paginated data retains column meaning and exposes a clear current page rather than becoming an endless feed.	Supports explicit selected-chart ranking pages and a stable comparison model.	Atlassian's component API and styling are not implementation requirements.
USWDS: Pagination	Pagination should expose the current page, destination labels, and a predictable sequence.	Supports explicit URL-backed pages and accessible page purpose.	It does not recommend NosLog's exact page size.
GOV.UK: Pagination	Page navigation needs descriptive link context and should preserve a meaningful destination after activation.	Supports returning focus and reading context to the ranking result region.	Content-page examples are less dense than a leaderboard.
Carbon v10: Pagination	Pagination becomes useful after data exceeds the default visible range; common table increments include 10 and 25.	Supports a fixed 25-player increment and hiding the control for one page.	Rows-per-page selection is useful in enterprise tables but rejected for this focused surface.
MUI: Table pagination	Production table pagination commonly offers increments such as 10, 25, 50, and 100.	Confirms 25 as a conventional balance rather than an arbitrary NosLog-only number.	Component defaults do not independently establish the final choice.
Apple: Game Center	Leaderboards should foreground comparable scores and a player's position without turning the surface into a full profile.	Supports concise current-user context plus a public score list.	Native-game presentation does not dictate web layout.
Apple: @@NOSLOGTOKEN0@@	Game Center leaderboard requests use bounded ranges with a default length of 25 and a maximum of 100.	Provides a production precedent for the approved 25-player page.	API request capacity is not itself a UX rule.
Google Play Games: @@NOSLOGTOKEN0@@	A leaderboard response distinguishes the current player's score from the surrounding public score collection and supports pagination.	Shows that current-user context and public rows can remain related without becoming one duplicate card system.	The API data shape does not prescribe when a duplicate row should be suppressed.
Steamworks: Leaderboards	Leaderboards support global ranges and ranges around a user while retaining one score entry per user.	Supports exact user position and one best result per selected chart.	Steam's download modes are implementation patterns, not NosLog navigation requirements.
osu!: Beatmap information	Individual beatmaps expose a bounded top-score leaderboard within persistent beatmap and difficulty context.	Supports selected-chart ranking without repeating chart identity in every row.	osu! commonly shows a top 50 rather than NosLog's approved 25.
SOUND VOLTEX: Battle ranking	A BEMANI ranking surface prioritizes rank, player identity, and result across a comparatively long visible list.	Confirms that 10 rows would be unnecessarily short for expert comparison.	This is a different NOSTALGIA-adjacent competition mode and must not define scoring semantics.
ScoreSaber	Map-difficulty leaderboards keep the selected chart context stable while exposing comparable ranked results and player destinations.	Reinforces chart-scoped leaderboard rows and profile links.	Beat Saber score fields and anti-cheat context differ from NosLog.

Across these sources, the converging pattern is a compact comparison collection with clear numeric alignment, bounded explicit navigation, stable selected-object context, and a recoverable way to find the current user. Sources disagree on whether the current user is duplicated outside the list and on exact page length. NosLog resolves those differences with a

conditional summary and a fixed 25-player page because they fit its mobile-first repeated-checking context without sacrificing desktop comparison.

NOSTALGIA Scoring and Tie Evidence

Source	Transferable finding	NosLog application	Limitation
NosLog: @@NOSLOGTOKEN0@@	The current rating policy starts at 950,000, uses 10,000-point anchors, and applies its strongest active weighting near 990,000 and Pianist.	Directly supports preserving the six focused high-skill buckets.	It is NosLog policy evidence, not an official universal NOSTALGIA rule.
NOSTALGIA milestone analysis	Experienced players discuss S, 990,000, and Pianist as materially different progression milestones.	Confirms that a broad S bucket would conceal useful upper-score separation.	It is practitioner analysis, not official product documentation.
Game*Spark: NOSTALGIA scoring overview	NOSTALGIA score ranks and high-score goals are distinct from merely completing a song.	Reinforces score-focused ranking and the need to respect domain-specific milestones.	Editorial coverage is secondary evidence and does not define NosLog buckets.
Gamerch: NOSTALGIA game details	The documented result rank treats 950,000–999,999 as S and 1,000,000 as Pianist.	Prevents the six analytical bands from being mislabeled as six official ranks.	Community-maintained documentation is not a current official rule page.
BEMANICN: NOSTALGIA overview	The scoring table independently records the same S and Pianist boundaries and the judgement weights behind the score.	Confirms the broad official-grade boundary while preserving exact-score analysis.	It is an independent community wiki and not a NosLog data authority.
Game Catalog Wiki: NOSTALGIA	Clear status is less discriminating than score and perfect performance in this game.	Supports a high-score-focused secondary analysis rather than a clear-grade histogram.	It is retrospective community analysis, not a bucket specification.
Moeqirl: NOSTALGIA	Its independent scoring summary also records S across 950,000–999,999.	Further checks the rank boundary across a different community corpus.	It repeats system facts and does not establish player-language frequency.
Progression practice essay	One experienced player uses average 980,000 on level-12 charts as a concrete example of advanced performance.	Shows that 980k can be a meaningful narrower progression context without making it an official rank.	It is one practitioner's example rather than a universal threshold.
nosdata community course	A community-authored course uses average 950,000, 970,000, and 990,000 as Silver, Gold, and Rainbow criteria.	Shows that 970k can also be useful in a specific progression model.	One custom course cannot define universal community milestones.
Public NOSTALGIA player post indexed by Yahoo	A player celebrates a 980,000 update and explicitly considers the next target.	Provides direct discourse evidence that intermediate upper-score goals are real.	A single transient public post is illustrative, not prevalence data.
Official 8th KAC NOSTALGIA results	Final-round chart scores include results in the 950k, 960k, 970k, 980k, and 990k ranges.	Demonstrates that equal 10,000-point bands retain separation even in elite play.	Tournament charts and players are not representative of the full NosLog population.
Official 9th KAC NOSTALGIA	Official results span multiple upper 10,000-point ranges, while competition rules also make chronological tie treatment explicit.	Supports both retained score resolution and a deterministic tie rule.	Tournament qualification rules are not automatically the public chart-ranking rule.
NIST: Histogram	A conventional frequency histogram uses equal-sized bins; width-aware normalization is needed when widths differ.	Supports retaining comparable 10,000-point score intervals.	Statistical guidance does not determine which NOSTALGIA range is product-relevant.
NIST: Software verification and validation reference	Numerical bar charts with unequal intervals can mislead because area and frequency no longer align intuitively.	Rejects a 950k–979k count beside narrower 980k and 990k counts in the same distribution.	General visualization guidance does not prescribe final chart geometry.
nosdata.info NOSTALGIA ranking	Equal scores are displayed with shared competition ranks such as 6, 6, 8.	Provides a direct NOSTALGIA-community precedent for 1, 2, 2, 4 semantics.	It is an independent community service and not a NosLog data authority.
MySQL: Window-function descriptions	RANK() assigns equal values the same rank and leaves gaps after ties, unlike ROW_NUMBER().	Precisely defines the approved competition-rank result.	Database syntax and availability depend on the later implementation query.

The user's NOSTALGIA domain explanation is also primary product evidence for this guide: upper-score differences remain meaningful even though the game does not assign an official rank to every 10,000-point interval. The guide therefore retains five equal 10,000-point analytical bands plus the terminal Pianist category, rejects both the earlier broad grade histogram and an unequal 950k–979k merged bucket, and avoids claiming that every category is a universally named community milestone.

Rhythm-Game and Data-Product Evidence

Source	Transferable finding	NosLog application	Limitation
Official NOSTALGIA: How to play	A Music selection is followed by a Normal, Hard, Expert, or optional Real difficulty selection.	Confirms Music-level identity with selected chart-level difficulty.	It documents the arcade flow, not a web detail page.
Official NOSTALGIA: Play data	Authenticated chart data prioritizes Best Score and its judgement details, then exposes cumulative performance count, Full Combo count, Perfect count, and history.	Supports Best performance first and confirms per-user chart Play count as distinct from clear count.	Most detailed content requires login and cannot be fully audited anonymously.
osu!: Beatmap information	Song/map identity stays visible; difficulty selection updates factual statistics; public play count and leaderboard data have distinct scopes.	Supports selected-chart facts and demonstrates that a play-count label must identify whose count it represents.	osu!'s public beatmap Play count is not the same as NosLog's per-user chart Play count.
osu!: Client interface	Result and leaderboard surfaces prioritize score, accuracy or judgements, Max Combo, rank, and explicit personal position.	Reinforces a dominant Best performance followed by detailed or comparative record information.	osu! scoring and clear semantics differ from NOSTALGIA.
osu!: Ranking	Individual beatmap ranking is presented in the beatmap context and highlights the current user's position separately.	Supports owning score distribution and relative placement in Ranking rather than Chart Info.	It does not prescribe NosLog's ranking visualization.
osu!: Beatmap entity	A beatmapset and its individual difficulties have distinct identifiers; a selected difficulty is reflected in the URL.	Supports a stable Music parent with shareable selected-chart state.	Identifier syntax should not be copied.
ScoreSaber Reloaded: Leaderboards	A selected map difficulty has its own leaderboard and map-information context.	Supports chart-scoped ranking without loading every difficulty's ranking together.	This is third-party documentation around a community service, not an official universal standard.
ScoreSaber Reloaded: Score tracking	Personal score detail and the full leaderboard are related but distinct destinations or views.	Supports separating personal performance and ranking under one chart context.	Its information model is Beat Saber-specific.
BeatSaver: Map detail example	Shared song/map identity can expose several difficulty targets without duplicating the entire entity.	Reinforces grouped Music identity and difficulty-level actions.	The page is map-publication oriented and does not contain NosLog personal analytics.
Arcaea Wiki: Songs by level	Difficulty, chart constant, level, and version are chart-level properties that benefit from explicit association.	Supports keeping selected chart facts distinct from Music-level title and artist.	It is a community-maintained dense catalog, not a detail-page interaction standard.

Operational and Cost Evidence

Source	Transferable finding	NosLog application	Limitation
Vercel: Function usage and pricing	Function invocations, active CPU, and provisioned memory are usage dimensions.	Avoid requiring cross-domain server work before the user selects the relevant content area.	Included allowances and production traffic determine whether extra work changes the actual bill.
Neon: Pricing	Database compute is usage-based and affected by active workload.	Unnecessary aggregate reads can increase compute demand at scale.	No exact NosLog cost can be inferred without production measurements.
Neon: Network transfer	Database egress is a monitored usage dimension.	Avoid transferring summary data that the user did not request unless measurements justify it.	Caching and query shape can substantially change the impact.

The comparison contains more than fifteen independent sources across authoritative guidance, domain behavior, production analogues, and current infrastructure. The strongest exact analogue is osu!'s selected-difficulty information page. Secondary community sources are used only to test whether that pattern recurs; they do not override authoritative guidance or NosLog requirements.

Rejected Alternatives

- Pattern B - One long page containing every area: Rejected. The four areas are substantial, have different authentication and data states, and are not a required linear reading sequence.
- Pattern C - Cross-domain summary hub before detailed views: Rejected for Music

detail. It adds an overview layer and additional information density to a page whose user already selected a Music entry and usually has a specific follow-up task. It would also require either multiple initial requests, one aggregate request backed by several domain reads, or a separately maintained summary cache.

- Treat current UI as the visual baseline: Rejected. Structural continuity does not approve the current fixed-width shell, typography, spacing, card density, or tab styling.
- Keep horizontally scrolling area tabs at compact widths: Rejected after comparing both picker and scrolling-tab precedents. NosLog has four peer destinations, a separate permanent difficulty row, and approved Korean/ Japanese/ English labels; the current-area selector preserves complete labels and one visible hierarchy without making hidden destinations depend on a horizontal gesture.
- Wrap the four area tabs into two or more rows: Rejected. Wrapping weakens one-set tab geometry, changes relative positions across locales, and consumes scarce space above every selected panel.
- Abbreviate, truncate, or replace area labels with icons: Rejected. These are different product meanings, not familiar transport controls, and their approved localized names must remain directly understandable.
- Add a permanent desktop left sidebar: Rejected. It duplicates local area navigation, competes with the Music context, and spends width even in concise Chart Info. Panel-specific wide composition is the approved use of additional space.
- Keep a fixed 390px desktop canvas or stretch one generic column indefinitely: Rejected. The former wastes analytical space and the latter damages readable line length and fact grouping. Use measured outer bounds and content-specific grids.
- Put View chart inside Chart information: Rejected. The viewer is a direct chart-level action and should not require opening an informational panel first.
- **Remove an unavailable selected-chart action or replace it with separate availability text:** Rejected. Preserve the approved stable two-position action map and communicate missing resources through the clearly disabled action itself, without adding competing empty-state copy.
- Use different queryless defaults for signed-in and signed-out users: Rejected. The same URL would open different content according to hidden authentication state, weakening predictability and shared-link meaning.
- Remember the last-used area globally: Rejected. A prior visit to another Music entry must not silently override the public default or a known source intent.
- Hide or disable personal Record while signed out: Rejected. The area is a core product capability with a clear recovery action and must remain discoverable.
- Overlay Login on placeholder record analytics: Rejected. It implies inaccessible data exists behind the gate and adds visual noise without helping task recovery.
- Return to Home after Record Login: Rejected. Authentication must restore the selected Music, difficulty, and Record area through a validated return path.
- Keep pattern profile and score distribution inside Chart Info: Rejected. Those values belong to Tier/evaluation and Ranking respectively and would turn the public default back into a cross-domain preview hub.
- Preserve unavailable optional facts as – rows: Rejected. Release date and unlock condition appear only when a meaningful value exists.
- Show the same pattern values as both radar and bar charts: Rejected. Use the approved five-axis radar as the sole chart and pair it with exact structured values and valid counts.
- Replace the pattern profile with bars only: Rejected. Exact comparison remains

available in structured text, while the radar preserves the domain-familiar at-a-glance chart fingerprint.

- Keep Glissando as the fifth community profile axis: Rejected. Use Chords because

simultaneous-input burden is a recurring NOSTALGIA pattern demand; keep Glissando in note-type and personal Judgement analysis instead.

- Overlay the current user's profile on the community radar: Rejected. Multiple

overlapping series reduce legibility and change the question from one community fingerprint to a comparison task.

- Use clear count as a Music-detail performance summary: Rejected. Keep per-user,

per-chart Play count, but do not imply that NOSTALGIA clear count differentiates a meaningful outcome for this purpose.

- Always show a complete current-user card above Ranking: Rejected. Suppress the

separate summary when the current user's highlighted row is already on the page; otherwise use one compact summary line.

- Use relative top percentage as the main current-user position: Rejected. Show

exact shared rank and total participant count without ambiguous percentile rounding.

- Force a unique rank for equal scores with user ID: Rejected. Equal scores share

competition rank; achievement time affects only order inside the tied group, and a stable ID is only the final invisible ordering key.

- Replace the focused score bands with broad Pianist/S/A+/A/B+/B/C/D grades:

Superseded and rejected. The proposal misunderstood NOSTALGIA's upper-score skill separation and would hide meaningful 950k-Pianist progression.

- Add a below-950k distribution bucket: Rejected. The visualization is explicitly

an S-or-higher analysis with its own denominator; the separate participant count still covers all positive-score players.

- Keep seven or reduce to ten players per page: Rejected. Use a fixed 25-player

page and hide pagination when the complete list fits on one page.

- Add a rows-per-page selector or infinite scroll: Rejected. Both add control or

navigation complexity to a focused leaderboard whose approved page length is stable.

- Expose public Unhelpful or dislike counts on opinions: Rejected. Use one

reversible Helpful signal for useful chart advice and keep policy reporting as a separate mechanism.

- Repeat every evaluator's five pattern-axis values in the opinion list: Rejected.

Let the aggregate radar own pattern comparison and keep goal-specific tier votes outside the goal-neutral opinion row.

- Add nested replies or pinned opinions: Rejected for the selected-chart

evaluation contract. Do not turn practical evaluation notes into a second forum.

- Make Delete opinion remove the complete evaluation: Rejected. Optional written

text and aggregate-contributing evaluation values require separate, explicitly labelled deletion scopes.

- Use one unrestricted perceived-difficulty vote for every goal: Superseded. Use

six goal-qualified mode-and-goal scopes so an S result cannot stand in for Pianist experience and Basic cannot stand in for Recital.

- Use arithmetic mean as the public community placement: Rejected. Publish median,

complete distribution, and count; retain mean only as administrator diagnostic evidence.

- Automatically rewrite official placement from community votes: Rejected. A

thresholded disagreement creates administrator review work and never bypasses the normal placement workflow.

- Automatically delete or down-weight statistical outliers: Rejected. Unusual input remains valid until explicit audit establishes an eligibility or integrity problem.
- Automatically hide an opinion globally after one report: Rejected. A report creates review work; it does not itself prove a violation.
- Use infinite scroll, Oldest sorting, or page-size controls for opinions: Rejected. Use Helpful/Newest and explicit ten-item continuation.
- Treat the approval mock-up as final visual design: Rejected. It demonstrated content and behavior only; foundations and representative specimens will determine typography, color, spacing, and component geometry.
- Put one placement-history disclosure or mini chart in every tier position: Rejected. Six controls fragment one chronological story, repeat interaction cost, and compete with the current six-position comparison.
- Keep a permanent placement-history line chart: Rejected. Addition, removal, unpublished lists, and six independent mode-and-goal streams are categorical events that a compact line chart cannot communicate accurately.
- Hide current placements inside the history control: Rejected. Current placement is the primary fact and history is optional secondary evidence.
- Force Play video into a new tab: Rejected. It is a normal external navigation, users retain native new-tab controls, and a forced context would require additional warning while increasing disorientation.
- Move focus into every newly loaded internal panel: Rejected. Difficulty and area changes retain focus on their activated controls; only a cross-route client transition establishes a new page heading context.
- Use an exhaustive Cartesian product of all fixtures: Rejected. A bounded, pairwise risk matrix covers each meaningful semantic seam without creating a suite too large to maintain or interpret.
- Validate only the existing 390x844 and 1280x900 Chromium projects: Rejected as the final 2.0 release contract. Keep them as core automation while adding compact boundary, wide-layout, cross-browser, real-device, zoom, and assistive-technology checks.

Deferred Measurements after Page-Brief Approval

No product, content, behavior, state, localization, accessibility, or page-level acceptance decision remains open in this Music-detail page brief. The exact selector-to-tab transition width, outer maximum content width, visual tokens, and component geometry are deliberately deferred measurements rather than unresolved architecture. Foundation typography/grid specimens must resolve, test, and record them before downstream high-fidelity design.

Decision Register

ID	Decision	Direction	Status
MDET-01	Entity model	Keep Music identity stable and treat the selected difficulty as active chart context	Approved
MDET-02	Difficulty state	Preserve the selected difficulty in shareable and history-restorable navigation state	Approved
MDET-03	Viewer entry	Keep View chart as a direct selected-chart action outside the Information panel; its stable placement and unavailable state follow MDET-70	Approved
MDET-04	Content architecture	Use Pattern A: one persistent context with four adaptively selected semantic areas and one selected panel at a time	Approved
MDET-05	Initial data boundary	Do not require every cross-domain detail or summary before the user selects its area; reuse valid visited-area data	Approved
MDET-06	Long-page architecture	Do not render all four complete areas as one long page	Rejected
MDET-07	Overview-hub architecture	Do not add a cross-domain summary hub before the four detailed areas	Rejected
MDET-08	Current visual inheritance	Current visual execution is audit evidence only and must not constrain the 2.0 redesign	Rejected
MDET-09	Semantic content-area order	Information, personal Record, Ranking, then Tier/community evaluation	Approved
MDET-10	Responsive and visual composition	Use the approved compact switcher, separate difficulty row, top object context, and panel-specific wide composition; measure exact visual tokens later	Approved
MDET-11	Complete page-brief contract	Complete content, state, accessibility, representative-data, and acceptance decisions through MDET-80	Approved
MDET-12	Localized area labels	Use / /Ranking and / /Tier & Evaluation without changing the approved semantic order	Approved
MDET-13	General-entry default	Open Information for both signed-in and signed-out queryless entry	Approved
MDET-14	Source-aware entry	Encode known Record, Ranking, Tier/evaluation, and viewer-return intent in restorable navigation state	Approved
MDET-15	Signed-out Record	Keep it visible and selectable; render a compact panel-level Login state without placeholder analytics or automatic authentication	Approved
MDET-16	Authentication restoration	Preserve locale, Music, difficulty, and Record through Login and required onboarding, then restore the exact destination	Approved
MDET-17	Hidden default memory	Do not vary queryless default by authentication or globally remember the last-used area	Rejected
MDET-18	Chart Info and My Record labels	Use / /Chart Info and / /My Record	Approved
MDET-19	Chart Info factual scope	Always show BPM, note count, and duration; conditionally show available release and unlock facts without duplicating persistent context	Approved
MDET-20	Cross-domain data ownership	Move pattern profile to Tier/evaluation and score distribution, player count, and relative placement to Ranking; leave no previews in Chart Info	Approved
MDET-21	Selected-chart resource actions	Earlier wording incorrectly treated a current external-preview field as an approved external-chart product action; replaced by MDET-70	Superseded
MDET-22	Personal Record hierarchy	Order Best performance, cumulative summary, Progress over time, Recent plays, then collapsed Judgement analysis	Approved
MDET-23	Progress terminology	Use / /Progress over time, while explicitly labeling the current series / /Best score	Approved
MDET-24	Play-count meaning	Preserve per-user, per-chart / /Play count; exclude clear count and defer profile-wide Play count to the Profile brief	Approved
MDET-25	Advanced record disclosure	Keep peer comparison optional and off by default; keep Judgement analysis collapsed while primary record facts remain visible	Approved
MDET-26	Duplicate pattern visualization	Do not show identical pattern values simultaneously as radar and bar charts; use one accessible five-axis radar plus exact structured values	Rejected
MDET-27	Ranking hierarchy	On mobile order conditional current-user context, participant heading, leaderboard, pagination, then secondary score distribution	Approved
MDET-28	Conditional current-user placement	Highlight the in-page row; otherwise show one compact exact-rank summary, with concise no-record and signed-out variants	Approved
MDET-29	Relative percentile	Remove top-percent ranking copy and use exact shared rank over total participants	Rejected
MDET-30	Leaderboard row model	Show one best score per player using Rank, Player, and Result groups; retain profile links and exclude unrelated row fields	Approved
MDET-31	Tie semantics	Equal scores share competition rank 1, 2, 2, 4; earlier achievement orders ties without changing rank	Approved
MDET-32	High-skill score distribution	Preserve five equal 950k-990k analytical bands plus Pianist with a separate S-or-higher denominator; reconfirmed 2026-08-01	Approved

ID	Decision	Direction	Status
MDET-33	Broad or unequal score grouping	Do not replace the upper score bands with a whole-population Pianist/S/A+/A/B+/B/C/D histogram or an unequal 950k–979k merged count	Rejected
MDET-34	Ranking pagination	Use 25 players per page, hide one-page pagination, preserve page in URL/history, and reject infinite scroll or a page-size selector	Approved
MDET-35	Ranking states and accessibility	Define stable loading geometry, concise retry and empty states, semantic labels, localized alternatives, focus restoration, and announcements	Approved
MDET-36	Ranking responsive composition	Preserve mobile reading order; allow a leaderboard-primary and distribution-secondary desktop composition without a fixed 390px canvas	Approved
MDET-37	Tier/evaluation hierarchy	Earlier hierarchy used one perceived-difficulty aggregate; replaced by the six-scope hierarchy in MDET-75	Superseded
MDET-38	Tier-placement scope	Show Basic and Recital S, Full Combo, and Pianist placements together without a preliminary selector	Approved
MDET-39	Community aggregate threshold	Earlier rule published one perceived-difficulty mean from three ratings; replaced by MDET-76	Superseded
MDET-40	Pattern-profile visualization	Use one fixed-order, fixed-scale five-axis community radar, one series only, with exact values and counts as structured accessible text	Approved
MDET-41	Pattern-profile taxonomy	Use Stairs, Repetition, Polyrhythm, Offset, and Chords; retain Glissando outside the community radar	Approved
MDET-42	Evaluation input and eligibility	Earlier rule required one perceived-difficulty field in the general evaluation; replaced by the split contracts in MDET-77	Superseded
MDET-43	Opinion information hierarchy	Earlier row made perceived difficulty prominent; replaced by the goal-neutral opinion hierarchy in MDET-77	Superseded
MDET-44	Opinion reaction and eligibility	Use one reversible Helpful reaction; no public negative count, self-reaction, or reaction without verified selected-chart play	Approved
MDET-45	Opinion sorting and continuation	Default to Helpful, offer Newest, use deterministic recency ties, and append explicit batches of ten without infinite scroll	Approved
MDET-46	Opinion and evaluation deletion	Earlier two-scope deletion did not account for separate tier votes; replaced by MDET-78	Superseded
MDET-47	Opinion reporting	Put Report in the contextual menu and collect one relevant safety or spam reason without instant public auto-hide	Approved
MDET-48	Opinion moderation	Let administrators Keep, Hide written opinion, or Exclude the general chart evaluation while retaining an audit record; tier votes remain a separate audit scope	Approved
MDET-49	Opinion visual authority	Treat the discussion mock-up as behavioral evidence only; defer exact type, color, spacing, surfaces, and geometry to foundations and specimens	Approved
MDET-50	Placement-state semantics	Keep six positions and distinguish numeric placement, Not listed, Not published, loading, and load failure with approved Korean/Japanese/English copy	Approved
MDET-51	Placement-history disclosure	Keep current placements visible and use one collapsed section-level chronological history after Basic and Recital; reject six controls and line charts	Approved
MDET-52	Placement-history continuation	Open with five newest date-grouped events and append explicit batches of ten with Show older changes; use No placement history when no event exists	Approved
MDET-53	Placement-history data contract	Materialize six semantic slots, preserve null removal events, reconstruct transitions per mode and goal, and keep absence, publication, and failure distinct	Approved
MDET-54	Target transition identity	Update the selected difficulty or area and its restorable URL immediately; replace the preceding semantic panel with the exact target's pending state	Approved
MDET-55	Loading scope and geometry	Preserve stable context, mark only the target region busy, avoid animated loader flash below about 300 ms, and use simplified structure-matched skeletons	Approved
MDET-56	Cache freshness and revalidation	Keep Chart Info fresh for the page session; use 60-second freshness for Record, Ranking, and Tier/evaluation, with exact-target background revalidation	Approved
MDET-57	Mutation invalidation and stale failure	Immediately invalidate affected targets after data changes; retain exact cached data with Updating or latest-data failure disclosure and Retry	Approved
MDET-58	Empty, authentication, and permission semantics	Keep empty distinct from failure and permission; preserve public content while replacing only restricted personal or action regions	Approved
MDET-59	Retry and failure scope	Retry network and 5xx GET failures once automatically, then show the smallest meaningful failure and exact manual Retry; never auto-retry 4xx or actions	Approved
MDET-60	Interruptible navigation	Keep valid navigation operable, cancel or supersede obsolete work, deduplicate exact requests, and commit only the latest target	Approved
MDET-61	Focus and status announcements	Retain focus on the activated control, expose responsive tab or combobox semantics, mark updating regions busy, and use one polite target-specific status region	Approved
MDET-62	Initial failure and Not Found	Preserve the application shell for initial load failure with exact Retry and Music-search return; use localized Not Found for confirmed missing entities	Approved

ID	Decision	Direction	Status
MDET-63	Compact area switcher	At 320/360/390/430px use one full-width current-area select-only combobox and anchored four-option listbox without pushing content	Approved
MDET-64	Compact area overflow alternatives	Reject horizontal-scroll tabs, wrapped tab rows, truncation, abbreviation, and icon-only area labels	Rejected
MDET-65	Difficulty responsive control	Keep Normal, Hard, Expert, and Real visible as a separate one-row four-choice control at narrow widths	Approved
MDET-66	Wide page frame	Remove the permanent 390px constraint; keep context on top, use measured gutters/max width, and do not add a permanent left sidebar	Approved
MDET-67	Panel-specific wide adaptation	Preserve mobile order while adapting Chart Info, My Record, Ranking, and Tier & Evaluation to their own comparison and analysis needs	Approved
MDET-68	Content-driven representation transition	Show tabs only when the longest localized set and validated type, padding, focus, and gaps fit; measure the exact threshold in Foundation specimens	Approved
MDET-69	Responsive area-switch accessibility	Use a select-only combobox/listbox with explicit compact selection and manual-activation APG tabs for demand-loaded wide panels	Approved
MDET-70	Selected-chart action availability	Keep View chart then Play video in two stable positions near selected difficulty; disable missing resources without visible empty-state copy, and exclude external charts	Approved
MDET-71	Play-video external navigation	Use / /Play video and navigate in the current browsing context without a forced new-tab warning	Approved
MDET-72	Route-entry and restoration focus	Use browser-default focus on hard load, Music-title h1 focus on cross-route soft entry, origin restoration on Back, control retention internally, and state-heading focus for soft errors	Approved
MDET-73	Representative fixture matrix	Use the approved actual long/missing catalog cases, localized variants, and bounded pairwise state seams rather than an exhaustive Cartesian suite	Approved
MDET-74	Page-level acceptance and verification	Verify the complete contract at 320/360/390/430/768/1024/1280/1440, content-driven transitions, core automation, cross-browser and real-device smoke, zoom, keyboard, and mobile AT	Approved
MDET-75	Goal-specific tier-vote hierarchy	Replace one perceived-difficulty value with six independent Basic/Recital $\times$ S/Full Combo/Pianist vote aggregates between official placements and the pattern radar	Approved
MDET-76	Public tier-vote aggregate	Show exact count; keep 1-2 votes Aggregating; from 3 publish median and complete distribution; never use the vote result to change official placement automatically	Approved
MDET-77	Vote eligibility and evaluation separation	Enforce exact chart/mode/goal achievement server-side, use Recital participation proof, and store scoped votes separately from one goal-neutral pattern/opinion evaluation	Approved
MDET-78	Contribution deletion and moderation scopes	Keep opinion-only, general-evaluation, and per-scope tier-vote edit/delete consequences independent; moderation never silently removes unrelated contributions	Approved
MDET-79	Administrator disagreement review	At 5+ votes and official placement outside IQR, maintain one persistent chart/mode/goal candidate with full evidence and explicit Keep, Change, or Defer workflow	Approved
MDET-80	Vote integrity and official authority	Do not incentivize votes, remove outliers automatically, or bypass administrator action and normal placement history	Approved
MDET-81	Localized-title surface boundary	Show original titles only on repeated Music surfaces; preserve approved translations/readings as search aliases and expose them visually only on Music Detail	Approved
MDET-82	Localized-title disclosure interaction	Use a visible icon and anchored non-modal popover with hover/focus opening, click/touch toggle, Escape/outside dismissal, full wrapping, and omission when no approved value exists	Approved

Current Milestone

The user approved the entity model, direct chart-viewer action, Pattern A content architecture, public Chart Info default, source-aware explicit entry, recoverable signed-out Record behavior, Chart Info boundary, selected-chart resource grouping, the Personal Record hierarchy, the selected-chart Ranking contract, and the core Tier & Evaluation contract across 2026-07-31 through 2026-08-04. Chart Info and My Record now have approved Korean, Japanese, and English labels. Chart-scoped Play count remains in the cumulative summary, while profile-wide Play count is explicitly deferred to the Profile brief. Ranking now has an approved hierarchy, conditional current-user treatment, three-group row model, competition-rank tie semantics, focused high-skill score distribution, 25-player pagination, responsive relationship, and core state and accessibility behavior. The five equal upper-score bands plus terminal Pianist category were explicitly reconfirmed after broad domain, community, competition, and visualization review; they are analytical categories rather than six official or universally named milestones.

Tier & Evaluation now has approved localized labels, a mobile information hierarchy, all six Basic/Recital placements, six corresponding goal-qualified community-vote scopes, and a single-series community radar. A scope stays Aggregating at one or two votes and publishes its median, complete distribution, and exact count from three. Basic eligibility uses the exact S, Full Combo, or Pianist achievement predicate; Recital also requires verified Recital participation on the selected chart. Votes are stored separately from the one goal-neutral general chart evaluation. The radar's fixed axes are Stairs, Repetition, Polyrythm, Offset, and Chords. Glissando remains a note type and personal Judgement metric but is not a community radar axis. General pattern-axis values and the written opinion are optional and preserve missing values distinctly from a valid zero rating.

Community voting is advisory rather than self-executing governance. At five or more valid votes, an official placement outside the vote IQR creates one persistent, deduplicated administrator review candidate for the exact chart, mode, and goal. The candidate exposes count, median, mean, and the full distribution; only an explicit administrator placement action may change the official list and its history. Outliers are never removed automatically.

The six tier positions now also have approved current-state semantics and localized copy for numeric placement, Not listed, Not published, loading, and failure. One collapsed Tier placement history disclosure follows both placement groups, opens with five newest date-grouped transitions, and appends older events in batches of ten. A removal remains Not listed in the current position and appears as Removed from tier in history. The public data contract must preserve null-valued removal events and expose six explicit mode-and-goal slots rather than one recent placement.

Community opinions now have an approved information and interaction contract. Each goal-neutral row shows concise author and time context and offers one Helpful signal; it does not repeat a goal-specific tier vote. Helpful and Newest are the only sorts; the list starts with ten rows and appends explicit batches of ten. Opinion-only, general-evaluation, and per-scope tier-vote deletion remain independent. Reporting and the administrator's Keep/Hide text/Exclude general evaluation results have explicit consequences and do not silently remove tier votes. The approval mock-up is not a visual design source; exact emphasis is deferred to the foundation and representative specimen phase.

The page now also has one approved asynchronous state and recovery contract. A target difficulty or area becomes the explicit URL-addressed context immediately; stable Music context remains available while only the target panel becomes busy. Fresh exact targets appear immediately, Chart Info remains fresh for the page session, and Record, Ranking, and Tier/evaluation use a 60-second freshness interval with non-blocking revalidation. Data-changing actions invalidate affected targets immediately. Empty, authentication, eligibility, permission, stale-refresh failure, uncached failure, and Not Found retain distinct meanings. Network and 5xx GET failures receive one automatic retry before exact manual Retry. Navigation remains interruptible, focus stays on the activated control, and one polite status region announces coherent target-specific progress without exposing each intermediate skeleton change.

Responsive composition is now approved at the product-pattern level. Difficulty remains a separate visible four-choice row. Compact widths use one full-width select-only area combobox and anchored listbox; wide widths use complete auto-width manual-activation tabs only when the longest localized set fits. The page removes the permanent 390px desktop constraint, keeps Music/chart context on top, rejects a permanent left sidebar, and gives each selected panel a content-specific wide composition while preserving mobile reading order. Foundation specimens still own the measured transition width, maximum content width, type, spacing, and visual surface values.

The selected-chart action contract is also approved. View chart and Play video occupy two stable positions immediately after selected difficulty and before content- area switching, remain available across content areas, and become clearly disabled when their corresponding resource is absent. No separate No published chart copy or external-chart action is used. Play video uses the approved localized label and navigates in the current browsing context without forcing a new tab.

This establishes the entry, authentication-restoration, Chart Info, Personal Record, Ranking, and Tier & Evaluation content contracts, including community opinions and shared asynchronous states and responsive area-switching composition. The brief also now fixes hard-versus-soft route focus, origin restoration, a real-catalog and bounded state fixture matrix, exact compact/transition/wide validation widths, release browser and assistive-technology coverage, and eleven page-level acceptance criteria.

The Music-detail page brief is therefore complete and approved as of 2026-08-04. This approval does not adopt the current page's visual design and does not pre-approve foundation values or the final Claude Design composition. The foundation and representative-specimen phases must measure the deliberately deferred visual values without changing this approved product contract.

NosLog 2.0 Tier-List Page Brief

docs/design/06-tier-list-page-brief.md

Document Control

- Status: Approved
- Decision status: `Core page contract approved: task model, mode and goal

selection, band navigation, filters, personal progress, compact and detailed result views, per-chart metrics, direct goal-context Music-detail navigation, relationship to scoped community voting, restoration, and responsive behavior`

- Evidence status: `Repository inspection, current-product audit, approved

information architecture, approved Music-detail contract, cited NOSTALGIA domain guidance, rhythm-game comparables, responsive systems, accessibility guidance, and the user-approved decision record`

- Date started: 2026-08-01
- Last decision update: 2026-08-02
- Language: English
- Parent information architecture:

[02-information-architecture.md](#)

- Downstream destination contract:

[05-music-detail-page-brief.md](#)

- Scope: Public `/[[locale]]/tiers` planning experience, with personal record and rating enhancements after authentication

- Excluded: Exact administrator tier-list or vote-review interface composition, final foundation tokens, exact high-fidelity composition, and production implementation in this design session

Decision Labels

- Observed: Verified in the repository, current browser evidence, or an approved upstream artifact.

- Approved: Explicitly agreed with the user and authoritative for downstream design.

- Proposed: Evidence-based direction awaiting user approval.
- Open: Requires further research, testing, or a user decision.
- Rejected: Considered and explicitly not selected.
- Superseded: Replaced by a later approved direction.

This brief is authoritative for the approved Tier-list page behavior and information hierarchy. Exact typography, color, spacing, radius, icon drawing, card dimensions, and final breakpoint values remain Foundation and downstream Claude Design work. Those later decisions may refine expression but must not remove or reinterpret the approved product contract.

Purpose

The Tier-list page answers one primary question:

Which chart should I play next for this performance goal?

The page lets a user choose a NOSTALGIA play mode and achievement goal, move to an appropriate tier band, compare charts with their own results, and open the exact Music difficulty for deeper inspection. It is a play-planning workspace rather than a general Music catalog, a dashboard, or an expandable analytics report.

Primary Context and Success

- Approved upstream: Tier lists are independently reachable from Home and the More navigation panel. They are not grouped with Bingo or Exams.
- Approved: Mobile use around arcade play is the primary context, while desktop remains fully supported for faster comparison and filtering.
- Approved: A successful visit ends when the user identifies an appropriate chart and opens its exact Music-detail difficulty without losing the planning context needed to return.
- Approved: The page is public. Authentication adds personal scores, achievement states, Grd, and eligible NosLog rating information; it does not replace the public collection with a different page.
- Approved: Current visual styling and the current 390px maximum-width shell are audit evidence only, not a 2.0 constraint.

Current-Product Evidence

Observed Route and Query State

- The public route is `/[[locale]]/tiers`.
- `mode` selects `basic` or `recital` and defaults to `basic`.
- `goal` selects `s`, `fc`, or `pianist` and defaults to `s`.
- `difficulty` accepts `Normal`, `Hard`, `Expert`, and `Real`.
- `level` accepts regular levels 1–12 and `real-1` through `real-3`.
- Legacy `/[[locale]]/tiers/[[slug]]` routes are compatibility redirects and are not a new 2.0 navigation family.
- `Mode`, `goal`, `difficulty`, and `level` currently update URL query state with `router.replace` and preserve vertical scroll.

Observed Data and Loading

- The server loads the published list matching the selected mode and goal.
- Band summaries include ordered band value and filtered chart count.
- The first band is loaded with the page. Later bands load as their sections approach the viewport.
- Signed-in users receive best score, rank, Full Combo type, play counts, judgement details, note-type rates, best time, and latest FAST/SLOW context per chart.

- Basic NosLog rating uses a maximum of the top 70 eligible contributions and is currently defined for the Basic Pianist policy.
- Existing data and APIs can remain useful implementation foundations, but the current presentation does not govern 2.0.

Observed Usability Baseline

- All published bands are currently stacked in one long vertical sequence; the audited Korean page was approximately 3,953px tall.
- The current result grid stays at three columns and does not use wider desktop space for band navigation, filters, or comparison.
- Signed-out cards navigate directly to Music detail, while signed-in cards become buttons that expand a large record panel inside the grid.
- The expanded panel repeats dense diagnostics that already belong to Music detail.
- Current filters update immediately on every mobile selection, and the open filter area competes with the result collection.
- The current guide disclosure combines list description, filter help, update time, and an optional Basic rating-weight chart.

These observations identify migration work. They do not approve the current layout, density, card interaction, or content order.

Approved Page Hierarchy

The mobile-first semantic order is:

1. page title and concise Tier-list explanation;
2. optional calculation-guide disclosure;
3. always-visible Basic / Recital mode selection;
4. one S / Full Combo / Pianist goal selector;
5. current band navigation and goal-specific personal progress;
6. difficulty and official-level filters;
7. applied-condition and result summary;
8. compact/detailed view control;
9. the active band's chart collection; and
10. continuation through explicit band selection rather than one uninterrupted stack of every band.

Wider layouts preserve this semantic order even when band navigation and filters move beside the result region.

Mode, Goal, and Guide

Mode

- Keep Basic and Recital as two always-visible mutually exclusive buttons.
- Mode is primary NOSTALGIA context, not a secondary filter hidden in a generic

Select.

- Changing mode updates the published Tier list and mode-specific personal metrics.
- Do not add a third umbrella mode or combine Basic and Recital results.

Goal

- Use one labelled selector for S, Full Combo, and Pianist.
- Do not render all six mode-goal combinations as permanent buttons.
- Changing the goal updates the active published list, band progress, achievement states, and result context.

Calculation Guide

- Keep the calculation/list guide available through one descriptive disclosure near the page introduction.
- It may include the current list description, last update, filter interpretation, and the Basic rating-weight explanation when applicable.
- Keep the guide secondary to choosing a mode, goal, band, and chart.
- Do not repeat the full guide inside every band.

Personal Metric Context

- When signed in, show the selected mode's official aggregate NOSTALGIA Grd as supporting planning context.
- Show the total NosLog rating only where the current policy defines it.
- Under the current approved policy, per-chart NosLog contribution is relevant only to Basic · Pianist.
- Do not show an unavailable-rating explanation on every card or in every other mode-goal combination; omit the inapplicable metric.
- Do not expose internal top 70 included/excluded, cutline, or calculation-debug labels as persistent card badges.
- An explanation of the top-70 policy belongs in the calculation guide, not in the scanning surface.

Tier-Band Navigation

Meaning

- A band is the published ordered Tier value such as 13.5, 13.0, or 12.5.
- Preserve administrator-defined band order and exact decimal labels.
- Progress always uses the current mode, goal, and committed filters.

Mobile

- Show one active band collection at a time.

- Provide a compact band control containing the current value and, when signed in, achieved count such as 6 / 21.
- Opening the control exposes the available ordered bands and their relevant counts in a mobile-appropriate selection surface.
- Selecting a band replaces the result collection without resetting mode, goal, filters, view preference, or page context.

Desktop

- Use the additional width to keep the ordered band navigator visible beside the active result collection.
- The visible navigator and active band must have the same semantics and data as the mobile selector.
- Do not merely enlarge the mobile single-column stack or render every band as one continuous desktop document.

Filters and Result Summary

Filter Scope

Use only these collection filters:

- chart difficulty: Normal, Hard, Expert, Real;
- official chart level: regular 1–12 and Real 1–3.

Do not add personal clear-state, JUST-rate, tenuto, glissando, trill, or MISS-count filters to this page. The selected achievement goal already provides the meaningful personal completion context.

Mobile Commit Model

- Open filters in a dedicated constrained surface rather than expanding permanent button rows through the result flow.
- Let users adjust multiple temporary difficulty and level values.
- Commit them with one result-labelled action such as View N results.
- Closing without committing leaves the visible results and committed conditions unchanged.

Desktop Commit Model

- Keep filters visible with enough space for the collection and update results immediately when a value changes.
- Do not add a redundant desktop Apply step when the results and filters remain visible together.

Summary

- Place committed conditions and result count adjacent to the result region.
- Use removable applied-condition tokens where they reduce the effort of undoing a

filter.

- Keep the summary concise; do not repeat the page title, complete filter form, or explanatory prose.

Chart Result Views

Default Compact View

- Compact view is the default scanning mode.
- At the representative 390px canvas, use three columns by default.
- Offer an optional four-column compact density where the minimum target and readable score remain intact.
- Each compact entry contains:
 - a small square 1:1 jacket;
 - an actual achieved S, Full Combo, or Pianist status icon when available;
 - the user's best score below the jacket, or a concise localized unplayed value.
 - Do not repeat title, difficulty, Grd, or rating contribution in

the visual compact card.

- The accessible link name still includes Music title, difficulty, official level, personal result when present, and destination purpose.

Detailed View

- Use one Detailed view checkbox or equivalent binary control; do not present two competing permanent tabs.
- At the representative 390px canvas, use two columns.
- Keep the jacket exactly 1:1 and allow the information region below it to grow for real content.
- Place the personal best score in a restrained translucent dark overlay at the bottom of the jacket.
- Keep an achieved-state icon on the jacket and support it with a border/ring when useful, but never communicate state by color alone.
- Under the jacket show, in order:
 1. original Music title;
 2. selected chart difficulty and official level;
 3. that chart's selected-mode official Grd contribution when available; and
 4. NosLog rating contribution only for the eligible Basic · Pianist context.
- Do not show internal top-70 inclusion state, cutline debugging, projected score gains, full judgement diagnostics, or note-type success rates in the card.

Achievement State

- Show only verified outcomes: S, Full Combo, and Pianist.

- Do not invent a challenging, in progress, or equivalent state from an undeliberate score threshold.
- Distinguish signed-out, unplayed, played-without-goal, and achieved semantics in data and accessible text, but avoid turning every semantic into a persistent badge.
- Status borders and icons must not reduce the jacket's recognition or create a misleading quality ranking.

Card Navigation and Restoration

- The entire chart card is one semantic link to `/[[locale]/music/[index]/[difficulty]` with the Tier source context, selected mode, and selected goal.
- A Tier-list card opens the exact Music difficulty with Tier & Evaluation selected so the official placement, matching community scope, and eligible contribution action are available without making the user rediscover the goal context.
- Signed-in and signed-out users use the same direct-navigation model.
- Do not open an intermediate record expansion, popover, drawer, or modal before Music detail.
- Pointer hover and keyboard focus may provide click-affordance feedback only; no essential information may exist exclusively on hover.
- Touch receives the stable card and direct destination without a first-tap preview.
- Browser Back must restore the previous mode, goal, committed filters, active band, compact/detailed preference, compact density, and practical scroll position.
- The restored page must not unexpectedly return to the first band or refetch already valid results in a way that destroys context.

Relationship to Goal-Specific Community Voting

- The public Tier-list page remains the administrator-owned official planning surface. Community vote medians never replace band values, reorder cards, or mutate a published list automatically.
- The six public list contexts map one-to-one to the six vote scopes:
Basic/Recital × S/Full Combo/Pianist.
- Do not add inline voting controls, vote distributions, disagreement badges, or an intermediate vote modal to the Tier card collection. Those additions would compete with the approved scanning task and have not been approved as Tier-card content.
- The exact selected chart's Tier & Evaluation area owns reading, creating, editing, and deleting a vote. Its eligibility, median, distribution, count, administrator review, and data-separation rules are defined by [the Music-detail brief](#).
- Preserve the selected mode and goal in source/restoration state. A user who returns after reading or voting must recover the same mode, goal, band, committed filters, view preference, density, and practical scroll position.
- Submitting or editing a vote invalidates the exact community aggregate and derived

administrator candidate. It must not invalidate or rewrite the published Tier list unless an administrator later completes the normal placement workflow.

Responsive Contract

Representative and Minimum Widths

- 390px is a representative mobile design and review canvas because it corresponds to several common phone viewport dimensions. It is not a universal standard, breakpoint, fixed shell, or minimum supported width.
- The page must preserve information and functionality and reflow without two-dimensional scrolling at 320 CSS px, except for content whose meaning truly requires two dimensions.
- Validate intermediate compact widths; a successful 390px specimen does not prove the entire compact range.

Content-Driven Adaptation

- Choose layout transitions where controls, translated labels, card targets, or card content no longer fit their approved hierarchy.
- Use container constraints for result-card columns where practical rather than deriving all behavior from a device-name breakpoint.
- Mobile normative examples are compact three columns, optional four-column compact density, and two-column detailed view at 390px.
- Desktop column count is not one fixed product number. Add columns only while the approved minimum readable card width, title behavior, targets, and comparison hierarchy remain intact.
- On desktop, use width for simultaneous band navigation, visible filters, and a denser comparison collection, not for stretching a 390px page.

Loading, Empty, Error, and Authentication States

- No published list: Keep the page context and selected mode/goal controls, then show one concise page-level absence state.
- No matching charts: Keep committed filters visible and provide one concise result-level empty state with a direct clear-filter recovery.
- Initial result loading: Keep page identity and controls stable; mark the result region busy and use geometry-preserving placeholders where helpful.
- Replacement loading: Keep the current result geometry stable but prevent stale cards from navigating as though they matched newly committed conditions.
- Band request failure: Contain the error to the result region and provide one retry action without resetting planning state.
- Signed out: Show the complete public Tier collection without fake scores, progress, Grd, or achievement states. Authentication is not required to open a chart.
- Signed in but unplayed: Present a truthful concise unplayed value rather than a

fabricated zero score or challenging state.

- Unavailable optional metric: Omit the field; do not render repetitive `not

available` copy across cards.

Exact localized empty and error copy may be refined with the shared content system, but it must remain concise and preserve these distinct meanings.

Accessibility

- Use semantic buttons for Basic/Recital and view/density controls, a labelled Select for goal, semantic filter controls, and one semantic link per chart card.
- Expose selected and expanded state with native semantics or correct ARIA.
- Maintain a logical source and keyboard order that follows the approved mobile hierarchy even when desktop regions sit side by side.
- Provide visible focus indicators on every action.
- Ensure all compact targets meet the approved target-size standard even when four columns are selected.
- Do not depend on jacket art, color, border, or an external rank image alone to name a chart or achievement.
- Announce committed result-count changes without moving focus unnecessarily.
- When a mobile filter surface opens, manage initial focus, focus containment, Escape or close behavior, and return focus to its trigger.
- Preserve WCAG Reflow behavior at 320 CSS px and with browser text enlargement.

Localization and Content

- Support Korean, Japanese, and English labels without relying on equal string lengths.
- Preserve original Music titles in both compact and detailed views. Approved translations/readings remain searchable and are disclosed only on Music Detail.
- Compact view may omit visible titles for density, but the accessible name must not.
- Do not force long titles or readings into a fixed-height jacket or distort the square image.
- Keep domain labels Basic, Recital, S, Full Combo, Pianist, Grd, and NosLog stable where translation would weaken implementation or game mapping.
- Format scores, counts, and decimals using locale-aware separators while preserving exact Tier values.

Implementation Mapping

This mapping guides the future implementation session; it does not authorize code changes in the current design-guide session.

- Reuse the current `/[locale]/tiers` route and `mode/goal/difficulty/level` validation.

- Extend navigation state to restore active band and view preferences without invalidating shareable committed conditions.
- Refactor `TierControls` so mobile filters stage values before Apply while desktop filters update immediately.
- Refactor `TierBandBrowser` from a mandatory stacked-all-bands document into one active-band collection plus mobile selector or desktop rail.
- Refactor `TierChartCard` so authenticated cards are links like public cards rather than inline record-expansion buttons.
- Encode the selected Tier mode, goal, active band, and return context when linking to Music detail; open the destination's Tier & Evaluation area rather than its generic default panel.
- Retire `TierRecordDetail` from the Tier scanning surface; retain useful record data for Music detail or other approved destinations.
- Add the selected-mode per-chart official Grd contribution and eligible Basic Pianist NosLog contribution to the detailed payload.
- Reuse existing published-band caching and local retry boundaries where they still satisfy the new state contract.
- Keep the scoped vote entity independent from `TierList` and `TierBandEntry`. The official collection reads only administrator-published placement data; community aggregate and review-candidate invalidation follow the Music-detail contract.
- Do not source achievement icons from unstable external URLs without an approved asset and licensing strategy.

Representative Fixtures

Validation must include:

- Basic S, Basic Full Combo, Basic Pianist, Recital S, Recital Full Combo, and Recital Pianist;
- a band with fewer than one row, a typical band, and a dense band;
- signed out, signed in with mixed achievements, and signed in with no plays;
- Normal, Hard, Expert, and Real, including Real 1-3;
- no filters, one filter, and combined difficulty/level filters;
- a long original Japanese title and Music entries found through Korean/English translated-title or Japanese-reading aliases while still showing the original;
- compact three-column, compact four-column, and detailed two-column mobile states;
- no published list, no filtered matches, loading, replacement loading, request failure, and successful retry;
- direct navigation to Music detail and Back restoration from a card near the end of a non-default band; and
- eligible and ineligible card origins for all six mode-goal contexts, verifying that Music detail restores the exact vote scope without exposing an inline Tier-card vote.

Browser Acceptance Contract

- At 320 CSS px, all controls and cards remain operable with no unintended horizontal page scroll or loss of information/functionality.
- At the representative 390px canvas, compact three-column, optional four-column, and detailed two-column layouts preserve square jackets and readable scores.
- At suitable tablet and desktop widths, band navigation and filters use additional space without changing their meaning or source order.
- Basic/Recital, goal, band, filters, view mode, and compact density are keyboard operable and expose their state.
- Mobile temporary filter changes do not alter results until committed; desktop visible filters update immediately.
- Logged-out cards navigate directly without personal placeholders; logged-in cards use the same destination and add only truthful personal information.
- No essential content is hover-only, and touch requires only one activation to open the exact Music difficulty.
- Back restores the full planning context and practical scroll position.
- Music detail receives the exact mode and goal, opens Tier & Evaluation, enforces the scoped vote contract, and returns to the unchanged official Tier-list context.
- Long Korean, Japanese, and English content does not overlap, clip controls, distort jackets, or create a fixed-height failure.
- Loading, empty, error, retry, and no-published-list states stay within the correct region and do not reset selected conditions.

Reference Matrix

The decision set uses a broad comparison instead of treating one product or framework as a template.

Source	Transferable finding	NosLog application	Limitation
Current Tier route	One public route already composes mode, goal, guide, filters, and published bands.	Preserve verified capability while replacing the long compact shell.	Current presentation is not the visual authority.
Current Tier controls	Query-backed mode, goal, difficulty, and level state already exists.	Reuse validation and committed URL meaning.	Current mobile filters apply every click and are too persistent.
Current band browser	Band boundaries, progressive requests, local retry, and goal achievement are implemented.	Preserve data boundaries while changing navigation.	Stacked bands and inline record expansion are rejected for 2.0.
Approved IA	Tier planning is independent and directly leads to exact Music detail.	Keeps the page task and direct destination stable.	It does not define card geometry.
Approved Music-detail brief	Music plus selected difficulty is the stable detailed destination.	Every Tier card can be one exact direct link.	Detail-page panels do not dictate Tier scanning density.
Current goal predicate	S, Full Combo, and Pianist achievement conditions already have explicit domain logic.	Keeps progress and downstream vote eligibility semantically aligned.	Recital requires additional participation proof.
NOSTALGIA official mode guidance	Basic and Recital are distinct play modes.	Retain them as primary context.	It does not define a community Tier interface.
ArcadeStat tier example	A rhythm-game tier product may require exact-chart achievement before voting.	Supports moving a qualified vote into exact chart context.	Its public layout and automatic aggregate are not adopted.
NIST: Measures of location	Median is less sensitive than mean to extreme tails.	Supports the downstream public median without changing official bands.	It does not define Tier-list card content.

Source	Transferable finding	NosLog application	Limitation
Google SRE: On-call	Human review signals should be actionable and high-signal.	Supports keeping disagreement in an administrator queue, not cards.	Reliability alerts are more urgent than editorial tier review.
Apple HIG: Layout	Several common iPhones are 390pt wide, while many other widths coexist.	Supports 390 as a representative canvas only.	Native points are not a universal web breakpoint.
W3C WCAG: Reflow	Content should preserve information and function at 320 CSS px except genuine two-dimensional content.	Establishes the compact minimum validation boundary.	It does not prescribe card columns or art direction.
web.dev: Responsive design basics	Start small and add breakpoints when content needs them, not for named devices.	Makes Tier transitions content-driven.	Exact NosLog thresholds still require specimens.
MDN: Responsive design	Fluid layout and relative breakpoints serve the full device range.	Rejects a fixed 390px application shell.	General web guidance does not set Tier density.
Android: Window size classes	Phone portrait is a broad compact range below 600dp.	Confirms that one phone width cannot represent the full compact class.	Native dp classes are supporting web evidence only.
Microsoft Fluent: Layout	Small is a 320-479 range and responsive layouts reflow, resize, and re-architect.	Supports mobile selector/desktop rail behavior with equal information.	Fluent visual tokens are not NosLog tokens.
GitHub Primer: Layout	Narrow layouts simplify multi-column regions and may turn side panes into sheets.	Supports compact band/filter triggers and wider visible rails.	GitHub task density differs from a rhythm-game planner.
IBM Carbon: 2x Grid	A fluid grid begins at a 320px small boundary and adds columns at larger boundaries.	Supports validated minimum card width and added desktop columns.	Carbon's exact grid and spacing are not adopted.
Atlassian Grid	The smallest grid covers 320-479px and changes columns, gutters, and margins by range.	Confirms range-based, not 390-only, validation.	Enterprise grid counts do not determine Tier cards.
USWDS Layout Grid	A mobile-first flexible grid names 320px and 480px tokens while allowing configuration.	Supports fluid outer layout and explicit compact testing.	Government content patterns are not rhythm-game card patterns.
Tailwind: Responsive design	Base styles are mobile-first; breakpoints and container queries can be customized.	Fits NosLog's stack and content/container-driven cards.	Default 640px is not automatically a NosLog breakpoint.
Bootstrap: Breakpoints	The mobile base is below 576px and provided ranges are foundations, not every device.	Reinforces that 390 is not a universal breakpoint.	NosLog does not use Bootstrap.
GOV.UK: Layout	Start with small screens and do not assume specific devices.	Supports one semantic hierarchy across widths.	Service forms are less image-dense than Tier results.
React Spectrum: Layout	A smallest base value precedes customizable mobile-first breakpoints.	Supports base-first behavior without a magic mobile width.	Spectrum components and visual language are not adopted.
W3C WCAG: Content on Hover or Focus	Hover/focus content cannot become inaccessible or pointer-only.	Keeps Tier-card essentials permanently available and touch direct.	It does not prohibit all decorative hover feedback.
Material Design: Cards	One card can group a related object and clear destination.	Supports a single whole-card Music-detail link.	Material styling and elevation are not NosLog direction.
Fluent 2: Card usage	Card hierarchy and interaction need to remain predictable across input methods.	Supports identical signed-in/signed-out card navigation.	Fluent card anatomy is not copied.
osu! beatmap listing	Rhythm-game discovery keeps chart identity, difficulty context, filters, and direct detail navigation.	Confirms domain value of quick chart-to-detail planning.	osu! grouping and scoring do not map one-to-one to NOSTALGIA.

Evidence Convergence

- Authoritative responsive guidance converges on fluid, range-based, content-driven adaptation rather than one standard mobile width.
- 390px is credible as a representative phone canvas because of common current devices, but 320 CSS px is the stronger minimum Reflow requirement.
- General card and rhythm-game references converge on stable identity and one clear destination; they do not support a mandatory intermediate modal for Tier results.
- Responsive systems converge on moving auxiliary selection into compact disclosure at narrow widths and exposing it beside content when width permits.
- No source establishes NosLog's exact mode/goal semantics, achievement thresholds,

rating policy, or card information. Those come from verified NOSTALGIA data, current NosLog logic, and explicit user decisions.

- Voting evidence converges on qualification, scoped context, robust aggregation, and human review; it does not justify replacing the official planning collection or adding more persistent card controls.

Rejected and Superseded Alternatives

- Treat 390px as a standard or fixed shell - Rejected: it is a representative canvas only; 320px Reflow and intermediate validation remain required.
- Put Basic and Recital inside the same Select as goals - Rejected: it hides the primary NOSTALGIA mode context.
- Show six permanent mode-goal buttons - Rejected: it creates unnecessary visual control density.
- Stack every band as one long document - Superseded: mobile selects one band and desktop exposes an adjacent navigator.
- Apply every mobile filter toggle immediately - Superseded: mobile stages and explicitly commits; desktop remains immediate.
- **Use personal clear state, JUST, note-type rates, or MISS as Tier filters - Rejected:** they do not serve the approved Tier planning question.
- Keep only one dense card format - Rejected: compact scanning and detailed comparison are separate user needs.
- Use two columns for every mobile card - Rejected for compact view: detailed uses two; compact uses three by default and optionally four at the representative width.
- Show challenging or infer in progress - Rejected: no approved domain rule defines that state.
- Show top-70 included/excluded on cards - Rejected: this exposes calculation mechanics as persistent noise.
- Expand record analytics inside the Tier grid - Superseded: the card goes directly to exact Music detail.
- Open a modal before Music detail - Rejected: it adds a step and duplicates the destination's information.
- Put essential data only on hover - Rejected: touch and keyboard must receive the same task-critical content.
- Fix one desktop column count - Rejected: card minimum width and container space govern desktop density.
- Vote directly inside each Tier card - Rejected: it overloads the scanning collection and bypasses the exact Music-detail evaluation context.
- Reorder official bands from community medians - Rejected: votes remain advisory and require explicit administrator review and normal placement history.

Decision Log

ID	Decision	Status
TIER-01	Tier lists remain an independent play-planning page family	Approved
TIER-02	Basic/Recital stay as always-visible primary mode buttons	Approved
TIER-03	S/Full Combo/Pianist use one goal selector	Approved
TIER-04	Keep one secondary calculation-guide disclosure	Approved
TIER-05	Mobile selects one band; desktop uses an adjacent visible navigator	Approved
TIER-06	Progress uses current mode, goal, committed filters, and authenticated records	Approved
TIER-07	Filters are difficulty and official level only	Approved
TIER-08	Mobile stages filters and commits with a result action; desktop applies immediately	Approved
TIER-09	Compact is default, with three columns and optional four-column density at 390px	Approved
TIER-10	Detailed view uses two columns at 390px and the approved identity/metric order	Approved
TIER-11	Show actual S/FC/Pianist only; no inferred challenge state	Approved
TIER-12	Official per-chart Grd is detailed context; NosLog contribution is Basic Pianist only	Approved
TIER-13	Do not expose top-70 inclusion or calculation-debug badges	Rejected
TIER-14	The whole card directly opens exact Music detail for every authentication state	Approved
TIER-15	Browser Back restores planning controls, band, view, density, and scroll context	Approved
TIER-16	No essential hover-only content or mobile first-tap preview	Approved
TIER-17	390px is a representative canvas, not a standard, breakpoint, or fixed width	Approved
TIER-18	Require 320 CSS px Reflow and content-driven transitions	Approved
TIER-19	Desktop card columns are container-driven rather than one fixed count	Approved
TIER-20	Tier mode and goal map one-to-one to six independent community-vote scopes	Approved
TIER-21	Cards open exact Music-detail Tier & Evaluation with source mode and goal preserved	Approved
TIER-22	Keep voting and distributions out of Tier cards; exact Music detail owns contribution	Approved
TIER-23	Community medians never replace or reorder official published Tier content automatically	Approved

Handoff Boundary

Claude Design may decide final typography, color, spacing, surface hierarchy, iconography, jacket-overlay treatment, minimum card widths, and exact transition points after the Foundation is approved. It must preserve the decisions and acceptance contract above. A later Codex implementation session must compare the Claude output with this brief and request a guide or design revision if the output removes a required state, changes domain meaning, introduces a mandatory modal, fixes the product to 390px, or conflicts with the approved responsive behavior. It must also preserve the official-versus-community boundary: no inline Tier-card voting, no community-driven automatic reordering, and exact mode-and-goal context when opening Tier & Evaluation.

NosLog 2.0 Chart Viewer and Editor Preservation Contract

docs/design/07-chart-viewer-editor-preservation.md

Document control

- Status: Approved – absolute preservation boundary
- Language: English
- Last updated: 2026-08-10
- Scope: the existing public chart viewer and administrator chart editor in their entirety
- Authority: the user's explicit correction, root AGENTS.md, and the remaining-work audit in document 57

Purpose

This is a preservation contract, not a redesign Page Brief. It replaces every former viewer/editor redesign, Foundation migration, responsive adaptation, accessibility reinterpretation, specimen, S4, S6, and user-contribution proposal.

The viewer and editor remain important NosLog product functions. Their current reachability and behavior may be recorded as product inventory, but their presentation and implementation are not inputs to the NosLog 2.0 ordinary-UI design system.

Locked experiences

The preservation boundary includes the complete current:

- public chart-viewer page and administrator chart-editor page;
- page and DOM shell, landmarks, labels, controls, control order, focus behavior, keyboard behavior, announcements, and recovery behavior;
- responsive composition, containment, panel sizing, scrolling, and fullscreen behavior;
- PixiJS/WebGL Falling renderer and Canvas Full-sheet renderer;
- note types, paths, left/right-hand palettes and legends, timing marks, geometry, chart mathematics, animation, audio synchronization, and rendering model;
- editor tools, property panels, histories, import/export, snapshots, and editor rendering model.

Preserve all of those elements exactly as implemented when NosLog 2.0 is designed and implemented. Do not redesign, recolor, restyle, restructure, rename, replace, migrate, or create a parallel 2.0 variant.

Foundation exclusion

The ordinary-UI contracts in document 24 do not apply inside either locked experience. In particular, do not apply or retrofit:

- Spectrum neutral surfaces, foregrounds, boundaries, focus, radius, elevation, or primary-action aliases;
- signature, feedback, difficulty, local-data, judgement, or visualization colors;
- Lucide iconography or Atlassian motion;
- ordinary page grids, containers, reusable components, patterns, or templates;
- a new accessibility model justified only by the 2.0 guide.

This exclusion does not claim that the current experiences are universally ideal. It records the user's deliberate product boundary that NosLog 2.0 must not change them.

Allowed surrounding work

Ordinary pages may continue to:

- expose the existing viewer destination and published-chart availability;
- link to the current viewer route for the exact Music and difficulty;
- preserve the current return destination and unavailable/not-found messaging; and
- document that local audio remains in the browser.

Those surrounding links must not require a change inside the target viewer or editor. If a proposed shell, navigation, route, or component change would alter either locked page, stop and ask the user to reopen that exact sub-scope.

Downstream handoff

- Claude Design must not redesign, recreate, annotate as a new visual target, or use either locked experience as an ordinary-UI Foundation specimen.
- The future implementation session must leave the relevant viewer/editor files and runtime behavior unchanged except for an independently authorized maintenance fix.
- Regression and milestone examples must omit the viewer/editor rather than embedding a historical S4 or inventing an S6.
- A precisely named maintenance defect may be diagnosed without reopening the design boundary. Implementing a change still requires the user's explicit authorization for that defect.

Decision log

ID	Decision	Status
PRES-01	Preserve the entire existing viewer and editor, not only their renderers.	Approved – 2026-08-10
PRES-02	Cancel active S4, S6, viewer/editor redesign, Foundation migration, and contribution/editor work.	Approved – 2026-08-10
PRES-03	Permit ordinary pages to retain current reachability without changing the target experience.	Approved boundary
PRES-04	Require a new explicit user decision before changing the whole exception or an exact sub-scope.	Approved boundary

NosLog 2.0 Global-Rankings Page Brief

docs/design/08-global-rankings-page-brief.md

Document Control

- Status: Approved
- Decision status: `Core Global-rankings contract approved: page purpose,

Basic/Recital and metric hierarchy, region scope, personal position, row anatomy, country marker, shared-rank semantics, 25-player pagination, runtime states, responsive composition, accessibility, localization, and browser acceptance`

- Evidence status: `Repository inspection, current browser evidence, approved

information architecture, approved Tier-list rating policy, cited leaderboard and design-system comparables, responsive and accessibility standards, and the user-approved decision record`

- Date started: 2026-08-02
- Last decision update: 2026-08-03
- Language: English
- Parent information architecture:

[02-information-architecture.md](#)

- Related rating contract:

[06-tier-list-page-brief.md](#)

- Scope: Public localized user rankings for NOSTALGIA Basic and Recital, with

Official Grd and Basic-only NosLog Rating comparison

- Excluded: Per-chart ranking inside Music detail, profile-dashboard design, changes

to the approved rating formula, administrator interfaces, final Foundation tokens, final high-fidelity composition, and production implementation in this session

Decision Labels

- Observed: Verified in the repository, current browser evidence, or an approved upstream artifact.

- Approved: Explicitly agreed with the user and authoritative for downstream design.

- Proposed: Evidence-based direction awaiting user approval.

- Open: Requires further research, testing, or a user decision.

- Rejected: Considered and explicitly not selected.

- Superseded: Replaced by a later approved direction.

This brief is authoritative for the approved Global-rankings behavior, hierarchy, responsive contract, and states. Exact typography, color, spacing, radius, shadows, avatar treatment, control dimensions, podium styling, and content-driven transition values remain Foundation and downstream Claude Design work. Later visual decisions may refine expression but must not remove or reinterpret this product contract.

Purpose

The Global-rankings page answers two related questions:

Who currently leads this selected NOSTALGIA comparison, and where do I stand in the same eligible population?

It is a public comparison destination, not a replacement for Music-detail chart ranking, a profile dashboard, a tier calculator, or a social feed. Users choose a NOSTALGIA mode, an available comparison metric, and one region scope; scan ranked players; locate their own position; and open a player's public profile for supporting context.

Primary Context and Success

- Approved upstream: Rankings remain an independent destination reachable through the Home navigation block and More panel rather than a permanent labeled Header link.
- Approved: Mobile use around arcade play is the primary context. Desktop remains required and uses additional width for faster row comparison rather than retaining a fixed 390px shell.
- Approved: A successful visit lets a user understand the selected mode, metric, and population; compare rank and value; find their own position when eligible; and open another player's public profile without losing ranking context.
- Approved: Rankings remain publicly readable when signed out. Authentication is required only for the personal-position feature and other account-specific context.
- Approved: Current visual styling is audit evidence rather than NosLog 2.0 visual authority.

Current-Product Evidence

Observed Route and Query State

- The localized page resolves at `/[locale]/rankings` and accepts mode, metric, region, and page query parameters.
- mode normalizes to `basic` | `recital`; invalid or omitted values become `basic`.
- metric normalizes to `grade` | `rating`; Rating is accepted only when mode is Basic.
- region normalizes to `all` | `kr` | `jp` | `global`.
- The internal `global` value does not mean every country. It means users whose country is neither `ko-KR` nor `ja-JP`.
- The current page and API both use a fixed `PAGE_SIZE = 7`.
- Out-of-range server-page requests redirect or clamp to the final valid page.

Observed Ranking Data and Semantics

- Official Grd ranks users with a positive mode-specific grade and returns avatar, username, profile country category, mode-specific exam, and Grd.
- Basic NosLog Rating derives from the current published Basic Pianist Tier list, eligible scores at or above the approved floor, the approved mastery curve, and the top 70 eligible contributions. Its visible maximum is 10,000.
- Rating eligibility and value depend on the currently published Tier source and its

revision. No approved Recital Rating source exists in the current product.

- Current Official Grd ranking assigns a unique ordinal by value and user ID even when two visible values match.
- Current Rating ranking sorts by unrounded Rating, raw total, and user ID, then shows a rounded integer. Equal visible integers may therefore receive different ranks.
- The current user is calculated separately and returned with every payload when the viewer is eligible for the selected population.

Observed Current Interface and Browser Behavior

- The current compact page stacks three full-width control groups: Basic/Recital, Official Grd/NosLog Rating, and four persistent region buttons.
- Selecting Rating while Recital is active silently changes the mode to Basic rather than hiding an unavailable metric.
- A complete current-user card is always placed above the list when a personal row exists, including when the same user is already visible in the current page.
- Ranking rows currently order identity as rank, avatar, country marker, username, exam, and value.
- Condition and page changes use client requests and `replaceState`; the URL is shareable but ordinary filter/page steps do not behave as a normal navigable history sequence.
- At 320px, the current Header, title, controls, and current-user area overlap or become difficult to scan. At wide desktop widths, the general content shell remains approximately 390px wide and does not use comparison space.
- Region-empty results can show both a no-personal-rank message and a no-ranking-results message, creating redundant empty-state content.

Approved Scope and Invariants

- Preserve Basic and Recital as distinct NOSTALGIA comparison modes.
- Preserve Official Grd for both modes and NosLog Rating for Basic only.
- Preserve the approved Basic Rating formula and source contract; this brief changes presentation and shared-rank semantics, not calculation inputs.
- Preserve the four population meanings: all eligible users, Korea, Japan, and users outside those two categories.
- Preserve public profile navigation from each player identity.
- Do not add score-entry, following, messaging, social reactions, seasonal leagues, arbitrary time windows, or per-chart ranking to this page.
- Do not expose private profile fields or infer nationality beyond the profile's approved country-or-region category.

Approved Information Hierarchy

Use one semantic main and the following mobile-first source order:

1. Page identity and eligible-player count
2. Basic/Recital mode selection
3. Available metric selection and region scope
4. Concise Rating basis when Rating is active
5. Conditional personal-position summary
6. Ranking result heading and update/error status
7. Ranked player rows
8. Explicit pagination

Desktop may align the control groups and widen result columns, but it must preserve this hierarchy. Do not turn the page into a dashboard with unrelated statistics, distribution charts, or multiple competing summaries.

Mode, Metric, and Region Contract

Mode

- Keep Basic and Recital as the always-visible primary exclusive choice.
- Changing mode resets page to 1 and retains the current region when valid.
- Changing to Recital deterministically selects Official Grd while no approved Recital

Rating source exists. The structure remains compatible with a separately approved future Recital Rating.

- Do not place Basic and Recital inside the region control or one mixed Select.

Metric

- In Basic, show one subordinate exclusive choice: Official Grd and **NosLog

Rating**.

- In Recital, remove the metric switch entirely and show only the resolved Official

Grd context. Do not display a disabled Rating control and do not silently switch the user back to Basic.

- Changing Basic metric resets page to 1 and retains the selected region.
- When Rating is active, show one concise basis line identifying the current published

Basic Pianist Tier source and top-70 basis. Do not place the complete formula in the persistent page hierarchy.

Region

- Use one compact Select or equivalent accessible popup with:
 - All
 - Korea
 - Japan
 - Other regions
- User-facing labels for internal global must be , , and

Other regions. Do not label it Global, because it explicitly excludes Korea and Japan.

- Changing region resets page to 1 and recomputes rank within the chosen

population.

- Do not keep four permanent region buttons; region is secondary scope rather than a peer to Basic/Recital.

URL, History, and Restoration Contract

- Keep mode, metric, region, and page shareable in the localized URL.
- Omit the metric query only for the default Official Grd state; encode Rating explicitly.
- Valid selection and pagination changes create navigable history entries. Browser

Back and Forward restore the exact prior mode, metric, region, page, result set, and practical scroll context.

- Pagination controls are real navigable links or equivalent links with valid `href` values, supporting new-tab opening, copied links, and no-JavaScript navigation.
- Invalid values normalize deterministically. Out-of-range pages resolve to the last valid page and expose the canonical resolved URL.
- A mode, metric, or region change resets to page 1; returning through Browser Back restores the previous page rather than applying that reset again.

Personal Position Contract

Signed-In and Eligible

- If the current user's row is not on the active page, show one compact summary: `My rank {rank} / {population} · {metric value}` and one `My position` action.
 - Activating `My position` navigates to the page containing the current user's row, updates the URL, and moves reading/focus context to that highlighted row.
 - If the current user's row is already on the active page, remove the separate summary instead of showing the same full player twice.
 - Highlight the current row with a non-color marker and accessible `My rank` text.
- Color may support the distinction but must not be the only signal.

Signed-In but Ineligible

- If other ranking rows exist but the current user lacks an eligible value in the selected context, show only the concise personal state `My rank unavailable`.
- Do not invent a rank, percentile, projected position, or challenge state.
- If the entire selected population is empty, do not duplicate this personal state above the page-level empty result.

Signed Out

- Keep the full public ranking readable.
- Replace personal position with one low-emphasis login action explaining that login is needed only to locate the viewer's rank.

- Successful login returns to the exact ranking URL and restores the selected context.

Shared-Rank Semantics

- Use competition ranking for equal published values: 1, 2, 2, 4.
- For Official Grd, the integer value published in the interface is the authoritative equality value. Players with the same published Grd share a rank.
- For NosLog Rating, the published rounded integer is the authoritative equality value. Players with the same published Rating share a rank.
- Raw values may determine a stable display order within one shared-rank group, but must not produce different visible ranks for the same published value.
- If a tie crosses a page boundary, each affected row retains the same shared rank.
- Podium styling must tolerate multiple players sharing first, second, or third place. It must not imply unique medals when the rank is shared.

Player-Row Anatomy

Use the first approved ranking structure as the layout basis. Each row contains:

1. Published shared rank
2. One player-identity group
 - profile avatar or approved fallback;
 - username;
 - country-or-region marker immediately after the username;
 - active-mode exam on the second identity line when one exists;
3. One right-aligned active value: Official Grd or NosLog Rating

Normative compact example:

2	[avatar] CHOYO [Korea marker] Basic Class 2	Grd 5,921
---	--	-----------

- Keep avatar and username adjacent; do not insert the country marker between them.
- Do not place a country marker before the avatar, where it competes with rank.
- Do not create separate Country/Region or Exam columns in the approved 2.0 result anatomy. Both are supporting identity metadata.
- Korea and Japan use their approved flags. Other regions use a globe marker because the stored category is not one specific nation.
- Every marker has an accessible localized name. Do not depend on flag shape, emoji rendering, or color alone.
- Username remains the clear profile link. Do not make auxiliary metadata separate competing links.
- Missing exam removes the second-line value without leaving an empty badge or placeholder.

- Numeric values use tabular figures and stable end alignment for comparison.

Pagination Contract

- Use a fixed page size of 25 eligible players.
- Do not add a page-size selector.
- Use explicit pagination; do not use infinite scroll or automatic appended loading.
- Provide Previous, Next, the current page, useful neighboring pages, and boundaries with ellipsis when needed.
- Compact layouts may reduce the quantity of visible page numbers but must retain Previous, Next, current-page identity, and deterministic access to boundaries when useful.
- Expose total eligible-player count and enough page context to understand position.
- Page changes retain mode, metric, and region and move reading context to the result start or the requested My-position row.
- Hide pagination when one page is sufficient; do not render inert pagination chrome.

Loading, Empty, Error, and Unavailable States

Updating Existing Results

- Keep the last successfully rendered rows visible while a new condition or page is loading.
- Mark the results `aria-busy` and show a concise visible updating status close to the results. Do not blank the list or replace every row with unrelated skeleton cards.
- The pending selection must be distinguishable from the last committed result.
- Cancel or ignore stale requests so an older response cannot overwrite the newest user choice.

Initial Loading

- Reserve a stable result area and expose one concise loading status.
- Do not show fabricated ranks, avatars, or metrics in skeleton content.

Empty

- When the selected population has no eligible rows, show only the concise message No ranking records in the result area.
- Preserve the controls so the user can immediately change scope.
- Do not repeat a second personal-empty message in the same state.

Error

- If an update fails after successful data exists, retain the last committed rows, revert or clearly resolve the pending selection, and show one inline error with a Retry action.
- If the initial request fails, show a bounded result error with Retry while preserving

all selection controls.

- Do not transform an error into an empty result.

Rating Source Unavailable

- Missing, incomplete, or invalid published Rating source is an unavailable metric

state, not a zero-player ranking.

- Explain concisely that NosLog Rating is temporarily unavailable and preserve a clear way to return to Official Grd.

Responsive Contract

Compact Layout

- Use 390px as a representative review canvas, not a fixed product width or breakpoint.
- Reflow without document-level two-dimensional scrolling down to 320 CSS px.
- Keep mode visible; keep metric subordinate; use one region selector.
- Render results as compact semantic ranked rows without a separate visible table header when the relationships remain clear from the page context and values.
- Keep rank and active value on stable edges. Let the identity group take the flexible middle space.
- Keep username and country marker on the first identity line and exam on the second line. Long valid usernames may truncate visually only when the full accessible name remains available.
- Do not hide essential rank, username, country category, or active value behind Hover, a first tap, or horizontal scrolling.
- The personal summary and pagination must reflow without overlapping the Header or result rows.

Wide Layout

- Remove the fixed compact-shell constraint and use an intentional comparison width.
- Present the same data as a quiet semantic table or table-like ranked list with aligned Rank, Player identity, and active-value regions.
- Preserve country marker and exam inside the Player identity group; do not reintroduce separate Region or Exam columns merely because space exists.
- Align mode, metric, and region efficiently when space allows without changing their hierarchy or producing a dense toolbar of permanent buttons.
- Keep 25 players per page; desktop width changes comparison alignment, not pagination policy.
- Do not fill extra width with unrelated player statistics.

Implementation Semantics Across Layouts

- Compact and wide presentations must expose one equivalent ordered dataset.
- If implementation renders separate compact and wide DOM structures, only the active structure may remain in the accessibility tree; do not expose duplicate rows or duplicate profile links.
- Prefer content- or container-driven transitions over one assumed device boundary.

Accessibility Contract

- Use one descriptive page heading and one labeled ranking result region.
- Mode and metric are keyboard-operable exclusive selections with programmatically exposed selected state and visible Focus.
- Region uses a native Select or an accessible popup/listbox pattern with a visible or programmatic label.
- Selection changes do not move Focus unexpectedly. Announce the committed result count or update status without announcing every row.
- Use native ordered-list or table semantics appropriate to the active responsive presentation. A wide data table has programmatically associated headers.
- Pagination is a labeled nav; the active page exposes `aria-current="page"`.
- Disabled Previous/Next controls are not focusable dead links.
- My position moves Focus only after the requested row is available and identifies it as the current user's rank.
- Profile links have the full username in their accessible name even when the visible text truncates.
- Country markers have localized accessible names. Decorative avatar fallback letters do not repeat the username to assistive technology.
- Rank, personal-row identity, selected controls, Loading, and errors never rely on color alone.
- Pointer targets satisfy the approved Foundation target-size rule and do not overlap.
- Respect reduced-motion preferences; ranking updates and page changes do not require motion to communicate state.

Localization and Content

Stable Domain Labels

- Keep Basic, Recital, Grd, and NosLog in their approved product forms.
- Approved metric labels:
 - Korean: Grd, NosLog
 - Japanese: Grd, NosLog
 - English: Official Grd, NosLog Rating
- Approved region labels:

- Korean: , , ,
- Japanese: , , ,
- English: All, Korea, Japan, Other regions

Row and State Content

- Localize exam syntax without changing the underlying Basic/Recital mode or number.
- Keep state copy concise:
 - ranking empty: equivalent of ;
 - personal unavailable: equivalent of ;
 - loading: equivalent of ;
 - error: equivalent of plus Retry.
- Format values with locale-aware grouping while preserving the domain's integer Grd

and Rating meaning.

- Test Korean, Japanese, and English control labels together; do not assume Korean is always the longest string.

Runtime State Contract

State	Required visible outcome	Interaction outcome
Basic + Official Grd	Mode, both Basic metrics, region, Grd rows	All approved controls available
Basic + Rating	Mode, both Basic metrics, region, concise basis, Rating rows	Official Grd remains directly selectable
Recital	Mode, region, Official Grd context, Recital rows	Rating control absent
Signed in, off-page	Compact My-rank summary	My position opens containing page and row
Signed in, on-page	No duplicate summary; marked personal row	Profile link and pagination remain usable
Signed in, ineligible	Concise My-rank unavailable state when list exists	Controls remain usable
Signed out	Public list and low-emphasis login action	Login safely returns to same URL
Updating	Last committed rows plus visible busy state	Stale responses cannot win
Empty	One concise result message	Controls remain usable; pagination hidden
Error after data	Last committed rows plus Retry	Retry repeats current requested context
Initial error	Result error plus Retry	Controls remain usable
Rating source unavailable	Explicit unavailable metric state	Official Grd recovery remains clear

Implementation Mapping

Approved requirement	Current source	Downstream change
Localized ranking route and normalization	@@NOSLOGTOKEN0@@	Preserve route; update page size and canonical state handling
Client control and request orchestration	@@NOSLOGTOKEN0@@	Make metric conditional, consolidate region, use navigable history, and implement robust pending/error state
API page payload	@@NOSLOGTOKEN0@@	Use 25 rows and support containing-page personal navigation without inconsistent totals
Ranking queries and Rating source	@@NOSLOGTOKEN0@@	Implement published-value shared ranks across page boundaries while preserving formula inputs
Table composition	@@NOSLOGTOKEN0@@	Remove unconditional duplicate personal card and compose conditional summary/list/pagination
Current-user summary	@@NOSLOGTOKEN0@@	Replace full duplicate card with compact off-page/ineligible/signed-out states
Player row	@@NOSLOGTOKEN0@@	Use rank, integrated identity group, second-line exam, and right-aligned value
Country and exam metadata	@@NOSLOGTOKEN0@@	Keep localized accessible marker; move marker after username and exam below identity
Pagination	@@NOSLOGTOKEN0@@	Use navigable links, compact responsive items, Focus restoration, and 25-row policy
Formatting and page utilities	@@NOSLOGTOKEN0@@	Add shared-rank and canonical-page utilities; preserve integer display
Existing automated evidence	@@NOSLOGTOKEN0@@	Add ties, boundary ties, 25-row pages, My position, history, conditional metric, and state tests
Localized labels	@@NOSLOGTOKEN0@@	Add complete Korean/Japanese/English controls, states, and accessible names

Representative Fixtures

Validate at minimum:

1. Basic Official Grd with more than twenty pages and a signed-in user on page one;
2. Basic NosLog Rating with a signed-in user on a later page;
3. Recital showing no Rating control;
4. three or more players sharing one published Grd and a tie spanning pages;
5. two users with distinct raw Rating but the same published integer;
6. current user on the active page, off the active page, and ineligible;
7. signed-out public access and exact post-login return;
8. Korea, Japan, and Other-regions identities, including missing avatar and exam;
9. a valid 20-character username in Korean, Japanese, Latin, and mixed scripts;
10. zero results, one result, exactly 25, 26, and several hundred results;
11. initial Loading, update Loading, initial error, update error, and Retry;
12. missing or invalid published Rating source;
13. localized URLs and labels for Korean, Japanese, and English;
14. 320px, representative 390px, intermediate widths, and wide desktop;
15. keyboard-only control, pagination, My position, and profile navigation.

Browser Acceptance Contract

- /ko/rankings, /ja/rankings, and /en/rankings resolve with localized metadata and equivalent behavior.
- Basic shows Official Grd and NosLog Rating. Recital omits Rating until an approved source, formula, and ranking contract exist.
- Region changes reset page and recalculate population rank. Other regions excludes Korea and Japan and is never labeled Global.
- Browser Back/Forward restores prior mode, metric, region, page, and useful scroll context.
- Direct, copied, refreshed, and new-tab pagination URLs resolve the same data.
- Every successful page contains at most 25 rows and exposes correct total/page context.
- Equal published values display shared competition ranks, including across a page boundary.
- A current user is never duplicated as both a full summary and visible row.
- My position opens the containing page, marks the row without color-only meaning, and provides appropriate Focus context.
- Username, country marker, exam, and value follow the approved integrated row anatomy in compact and wide layouts.
- At 320 CSS px, no control, personal summary, row, or pagination item causes document-level horizontal overflow or overlap.
- Wide layouts use additional comparison space without creating separate Region/Exam columns or unrelated statistics.
- Loading keeps prior rows, exposes busy state, and ignores stale responses.
- Empty, error, and Rating-unavailable states remain distinguishable and actionable.
- All controls, profile links, My position, Retry, and pagination work with keyboard alone and expose visible Focus.
- Country markers and current-row identity remain understandable without color or image rendering.
- No unexpected browser console error occurs in the tested normal and failure flows.

Reference Matrix

Source	Transferable principle	NosLog application	Limitation
Current Rankings route	Query normalization, public access, and server page bounds already exist	Preserve route and domain state while replacing the compact shell	Current 7-row policy is superseded
Current Ranking browser	Client caching and request-race IDs already protect some updates	Reuse the verified request foundation	Current controls are overly persistent and history uses Replace
Current ranking queries	Defines region populations and Rating source/calculation	Preserves domain meaning and exposes required tie changes	Current ordinal ranks differ from approved shared ranks
Approved IA	Rankings are an independent Records-and-comparison destination	Keeps direct Home/More access and public route	Does not define row anatomy
Approved Tier brief	Basic Rating is anchored to the published Basic Pianist Tier policy	Keeps Rating explanation and eligibility consistent	Tier navigation does not dictate ranking UI
NOSTALGIA official mode guidance	Basic and Recital are distinct game modes	Keeps mode above metric	Does not define NosLog ranking metrics
osu! global rankings	Uses country scope, explicit sort context, dense player comparison, and numbered pages	Supports one scoped ranked dataset with profile identity and pagination	osu! exposes more metrics than NosLog needs
ScoreSaber player rankings	Keeps rank, player identity, primary PP, country context, and explicit pages together	Supports compact rhythm-game player rows	Beat Saber PP semantics do not map to Grd
ScoreSaber ranking system	Distinguishes global and country comparison populations	Supports explicit region scope	NosLog has three profile categories rather than arbitrary countries
Google Play Games leaderboards	Public comparison and player-profile navigation coexist with personal standing	Supports public list plus contextual personal position	Native game UI does not prescribe web layout
Strava leaderboard filters	Secondary populations are selected through compact filters	Supports one region selector rather than four persistent buttons	Sport/time filters are outside NosLog scope
Chess.com leaderboards	Separates competition categories and presents aligned rank, identity, and value	Supports mode/metric hierarchy and wide comparison	Chess categories and eligibility differ
Lichess FAQ: leaderboards	Eligibility rules materially affect who appears in a ranking	Supports clear ineligible and unavailable states	Glicko eligibility is not NosLog policy
jubeat best-score ranking	Official BEMANI ranking evidence keeps visible score central	Supports domain-familiar rank/value scanning	Per-song score ranking is not a user-wide Grd ranking
W3C WCAG: Reflow	Content must preserve information and function at 320 CSS px except genuine 2D content	Requires compact rows without document horizontal scroll	Does not dictate NosLog row styling
W3C HTML Technique H5.1	Tabular relationships should use programmatically determinable table structure	Supports a semantic wide comparison table	Compact layout may use an ordered ranked-list presentation
WAI-ARIA APG: Table	Static tabular data needs row/cell relationships; native table is preferred where possible	Guides wide result semantics	The pattern is not a visual design system
Carbon Content switcher	Similar related content may use a concise exclusive switch above the controlled area	Supports Basic/Recital and subordinate Basic metric hierarchy	Carbon styling is not adopted
Carbon Data table	Tables align comparable values and require clear states and hierarchy	Supports intentional desktop expansion	NosLog mobile density requires a compact variant
Carbon Pagination	Bounded large datasets use explicit page navigation and total context	Supports fixed 25-row pages	Carbon's page-size selector is intentionally not adopted
USWDS Button group	Related choices need grouping and must avoid excessive button density	Supports two-level exclusive controls and secondary region disclosure	Action-button guidance does not establish domain hierarchy
USWDS Pagination	Bounded collections benefit from Previous/Next, boundaries, neighbors, and accessible nav labels	Supports the approved compact pager	Exact item count remains responsive
GOV.UK Pagination	Previous/Next links and meaningful destinations should remain real links	Supports robust history and no-JavaScript navigation	Content-page labels are not needed for numeric ranking pages
MDN Responsive design	Responsive layouts adapt through fluid composition and content-driven breakpoints	Rejects a fixed 390px desktop shell	General guidance does not set ranking density
web.dev Responsive design basics	Start small and add breakpoints where content needs them	Supports mobile-first rows and intentional desktop comparison	Exact thresholds require Foundation specimens

Evidence Convergence

- Rhythm-game and general leaderboard products converge on one stable ranked dataset,

compact scope selection, direct player identity, an end-aligned primary value, and explicit personal standing.

- Authoritative pagination systems converge on navigable Previous/Next and numbered

pages for a bounded comparison set; they do not support infinite scrolling as the primary ranking navigation.

- Responsive guidance converges on a compact stacked/list presentation and a wider

aligned comparison presentation, not a fixed phone-width desktop page.

- Accessibility guidance converges on programmatic result relationships, labeled

controls and navigation, visible Focus, and non-color state cues.

- No external source defines Basic/Recital, Official Grd, NosLog Rating, the internal

global population, exam meaning, or shared published-value policy. Those come from verified NosLog/NOSTALGIA domain behavior and explicit user decisions.

Rejected and Superseded Alternatives

- Keep four permanent region buttons - Superseded: region becomes one compact

secondary Select or popup.

- Show Rating in Recital and switch to Basic when activated - Rejected: unavailable

metric controls must not change the primary mode unexpectedly.

- Keep page size seven - Superseded: the approved fixed page contains 25 players.

- Offer a page-size selector - Rejected: it adds control density without serving

the primary comparison task.

- Use infinite scroll - Rejected: it weakens location, sharing, Back behavior, and

personal-position navigation in a bounded ranking.

- Always show a complete current-user card - Superseded: use a compact off-page

summary and the marked row when visible.

- Show both personal-empty and result-empty messages - Rejected: one result-empty

message is sufficient when the population is empty.

- Assign unique ranks to equal published values - Rejected: use competition shared

ranks 1, 2, 2, 4.

- **Put the country marker before the avatar or between avatar and username -

Rejected:** preserve avatar/name identity and place the marker after username.

- Create separate Region and Exam columns on desktop - Rejected: keep them as

supporting player identity metadata in every layout.

- Use the second state-demonstration example as final layout authority - Rejected:

it demonstrated states only; the first approved ranking structure governs layout.

- Keep Replace-only history for every selection and page change - Superseded: use

navigable URLs and restorable history.

- Keep the full product fixed to 390px on desktop - Rejected: 390px is only a

representative mobile review canvas.

Decision Log

ID	Decision	Status
RANK-01	Global rankings remain an independent public comparison destination	Approved
RANK-02	Basic/Recital are the always-visible primary exclusive choice	Approved
RANK-03	Official Grd exists in both modes; current NosLog Rating is Basic-only until a Recital source is approved	Approved
RANK-04	Recital hides the metric switch while unavailable and never redirects Rating to Basic	Approved
RANK-05	Region uses All/Korea/Japan/Other regions in one compact selector	Approved
RANK-06	Internal global is labeled Other regions, not Global	Approved
RANK-07	Conditions and page are shareable and restorable through navigable history	Approved
RANK-08	Off-page personal position uses one compact summary and My-position action	Approved
RANK-09	On-page personal position removes the duplicate summary and marks the row	Approved
RANK-10	Equal published Grd or Rating values use shared competition rank	Approved
RANK-11	Player identity is avatar, username plus country marker, and second-line exam	Approved
RANK-12	Country and exam do not become separate desktop columns	Approved
RANK-13	Korea/Japan use flags and Other regions uses a globe with accessible names	Approved
RANK-14	Page size is fixed at 25 with no page-size selector	Approved
RANK-15	Explicit pagination replaces infinite or appended scrolling	Approved
RANK-16	Loading preserves the last successful result and exposes busy state	Approved
RANK-17	Empty, error, personal-ineligible, and Rating-unavailable states stay distinct	Approved
RANK-18	Compact layout reflows to 320px without document horizontal scrolling	Approved
RANK-19	Wide layout uses comparison width while preserving integrated identity metadata	Approved
RANK-20	The first approved ranking structure, not the state-demo layout, governs composition	Approved

Handoff Boundary

Claude Design may decide final type scale, control and row proportions, color, spacing, avatar fallback style, podium treatment, borders, surfaces, loading indicator, and exact content-driven layout transitions after the Foundation is approved. It must preserve the hierarchy, conditional controls, population meaning, integrated player identity, shared-rank semantics, personal-position behavior, pagination, states, and acceptance criteria above. A later Codex implementation session must compare the Claude output with this brief and request a guide or design revision if it reintroduces misleading controls, unique ranks for equal published values, separate country/exam columns, duplicate current-user content, a fixed phone shell, or another conflicting behavior.

NosLog 2.0 Profile Page Brief

docs/design/09-profile-page-brief.md

Document Control

- Status: Approved
- Decision status: `Core Profile contract approved: public performance identity,

mode-scoped competitive summary, progress and record hierarchy, privacy groups, five-item previews with complete-list destinations, owner sync status, public-safe share card, runtime states, responsive composition, accessibility, localization, and browser acceptance`

- Evidence status: `Repository and schema inspection, authenticated and public

browser evidence in Korean/Japanese/English at wide, 390px, and 320px widths, approved information architecture and related page briefs, cited rhythm-game, activity-profile, privacy, dashboard, responsive, accessibility, and internationalization references, and the user-approved decision record`

- Date started: 2026-08-02
- Last decision update: 2026-08-03
- Language: English
- Parent information architecture:

[02-information-architecture.md](#)

- Related contracts:

[05-music-detail-page-brief.md](#), [06-tier-list-page-brief.md](#), and [08-global-rankings-page-brief.md](#)

- Scope: Localized public user Profile, owner-only contextual actions, public

performance summary, progress, Best Plays, record overview, Recent Plays, and dedicated complete-list destinations

- Excluded: Account-settings form design, data-sync guide design, social following,

comments or messaging, profile customization themes, badges or Brooch display, persistent NOS currency display, administrator interfaces, final Foundation tokens, final high-fidelity composition, and production implementation in this session

Decision Labels

- Observed: Verified in the repository, current browser evidence, or an approved upstream artifact.

- Approved: Explicitly agreed with the user and authoritative for downstream design.

- Proposed: Evidence-based direction awaiting user approval.

- Open: Requires further research, testing, or a user decision.

- Rejected: Considered and explicitly not selected.

- Superseded: Replaced by a later approved direction.

This brief is authoritative for the approved Profile behavior, content hierarchy, privacy meaning, responsive contract, and states. Exact typography, color, spacing, radius, elevation, chart styling, avatar treatment, control dimensions, grid tracks, and content-driven transition values remain Foundation and downstream Claude Design work. Later visual decisions may refine expression but must not remove or reinterpret this product contract.

Purpose

The Profile answers three ordered questions:

Who is this player, what is their current NOSTALGIA standing, and how do their records demonstrate progress and recent activity?

It is a public rhythm-game record profile and a supporting destination from Rankings, Tier, and record contexts. It is not an account-management dashboard, a social feed, an inventory page, a replacement for chart-scoped Music detail, or a dump of every synced NOSTALGIA field.

Primary Context and Success

- Approved upstream: Profile belongs to Records and comparison and remains

reachable through the signed-in Header identity control, public player links in Rankings, and other contextual record links.

- Approved: Mobile use around arcade play is the primary context. Desktop remains

required and must use additional width intentionally rather than retaining a fixed approximately 390px shell.

- Approved: A successful public visit identifies the player, communicates current

competitive standing, shows progress and representative records, and lets the visitor open supporting Music detail without exposing hidden personal fields.

- Approved: A successful owner visit also communicates sync freshness and provides

concise Share, Settings, and Data sync access without turning the page into account settings.

- Approved: Current styling and geometry are audit evidence, not NosLog 2.0 visual

authority.

Current-Product Evidence

Observed Route and Access

- The localized public Profile resolves at `/[[locale]]/profile/[id]`.
- The page is readable while signed out. Owner status adds analytics, Share, Settings, and Logout in the current implementation.
- The current page uses one client-side Basic/Recital state and does not encode that selection in the URL.
- Profile data is cached per user for five minutes. Owner-only judgement analytics are fetched outside the public profile cache.
- The page currently emits `noindex` metadata; search-indexing policy remains outside this page brief and must not be changed silently during visual implementation.

Observed Public Data

- Identity data includes NosLog username, avatar, profile country category,

NOSTALGIA player name, Discord information, preferred arcade, Basic and Recital exams, and privacy flags for NOSTALGIA name, Discord, and Play count.

- Competitive data includes Basic and Recital Official Grd plus global and

country-category positions for each mode.

- The current Profile does not calculate or return NosLog Rating even though Basic Rating exists in the approved Rankings and Tier contracts.
- The current schema has no Recital NosLog Rating source.
- The current page exposes the NosLog account `created_at` date and derives Last played from the newest returned `ChartPlayHistory` item.
- Rank distribution uses the stored Pianist, Full Combo, S, A+, A, B+, B, C, and D chart counts.
- Public Best Plays contain current best score, rank, level, difficulty, Max Combo, Full Combo/Pianist state, mode-specific Grd contribution, Music identity, jacket, and time. The current query returns ten Basic and ten Recital items.
- Public Recent Plays contain the latest ten official play-history items. Their current model does not establish a trustworthy Basic/Recital attempt mode.
- Current judgement analytics aggregate S-Just against all five judgement counts from current chart records and are exposed only to the owner.

Observed Retention and Sync Data

- `ChartPlayHistory` preserves imported recent-play events with a compound uniqueness key, preventing the same source event from being inserted repeatedly.
- `ChartRecordSnapshot` stores a snapshot only when a current chart record materially changes. This supports progress analysis without writing unchanged duplicates.
- `UserBestGrade` preserves Basic and Recital Official Grd history.
- Player sync stores NOSTALGIA Play count, NOS, last-play time, and Brooch data even though not all stored fields belong in the approved public Profile.
- The current schema supports only `hide_nostalgia_name`, `hide_discord_name`, and `hide_play_count`. It does not support the approved Play-activity or preferred-arcade visibility controls.

Observed Interface and Browser Behavior

- Current source order is identity, Basic/Recital tabs, Grd/rank summary, Grd trend, rank distribution and Play count, owner-only S-Just analytics, Best Plays, Recent Plays, and owner Logout.
- The mode selector appears to govern the whole page even though rank distribution, Play count, judgement, and Recent Plays are not mode-specific.
- Hidden NOSTALGIA and Discord values can leave visible `Private` placeholders instead of removing irrelevant visitor content.
- The current Header displays NosLog join date even though it is not a meaningful NOSTALGIA profile fact.
- At wide desktop widths, the profile remains a narrow centered column with large unused margins.
- At 320px, current page content produces document-level horizontal scrolling.
- Long original Japanese titles demonstrate that fixed single-language row heights are unsafe even without repeated localized-title captions.

Approved Scope and Invariants

- Keep the Profile public and useful from public Rankings and record links.
- Keep NosLog identity distinct from optional NOSTALGIA and Discord identity fields.
- Preserve Basic and Recital as distinct NOSTALGIA performance modes.
- Add approved Basic NosLog Rating to the Profile and reserve a conditional Recital

Rating slot without fabricating a value before a source is implemented.

- Preserve Official Grd, global and country-category rank, mode exam, Grade history,

rank distribution, judgement summary, Best Plays, Recent Plays, and profile-wide Play count according to the hierarchy and privacy contract below.

- Do not display NosLog account join date.
- Do not add Brooch, persistent NOS balance, arbitrary achievements, social follower

counts, status posts, or invented challenge state.

- Retain complete meaningful history without an arbitrary thirty-item storage cap and

avoid writing identical record snapshots or duplicate play events.

- Preview limits constrain the overview presentation, not retained data.
- Never infer a specific nation for the stored global country category.
- Do not expose hidden fields through HTML, metadata, Share cards, client payloads,

analytics labels, or accessible names.

Approved Information Hierarchy

Use one semantic main and the following mobile-first source order:

1. Player identity and visible supporting metadata
2. Mode-scoped competitive summary
3. Progress over time
4. Best Plays preview
5. Record overview: rank distribution, judgement summary, and optional Play count
6. Recent Plays preview when Play activity is public

This order moves from identity to current ability, evidence of growth, representative best records, broader record characteristics, and finally recent activity. Do not promote account controls, sync details, currency, or inventory above performance.

Identity and Header Contract

Public Identity

- Show the avatar or approved fallback, NosLog username, and country-category marker

as one identity group.

- Place the country marker immediately beside the username, not beside or before the

avatar. Korea and Japan may use their approved flags. Other regions use a globe marker with a localized accessible name.

- Show available Basic and Recital exam labels below the username. Missing exams are

omitted without an empty badge.

- Do not show NosLog account join date.
- Show Last played only when Play activity is public and data exists. Use a localized exact date; relative text may supplement but never replace the exact value.
- Present visible NOSTALGIA name, Discord, and preferred arcade as compact supporting metadata. Omit absent or hidden fields instead of rendering placeholders.

Owner Context

- Keep Share and Settings as compact owner-only actions associated with the identity area. They must not compete with the player name or performance summary.
- Add one owner-only sync-freshness line such as Last sync Jul 28 · Up to date or Sync needed, with a contextual Data sync action.
- Sync status is trust and maintenance context, not a public performance metric or a large dashboard card.
- Remove Logout from the Profile body. Logout belongs to the approved account/More or Settings context.
- An owner viewing their public Profile sees a concise indication when a field or activity group is hidden and a direct Settings path; a visitor never sees that private value or a Private placeholder.

Privacy and Public-Data Contract

Always Public Performance

The public Profile always includes, when data exists:

- NosLog username, avatar, and country category;
- Basic and Recital exam labels;
- Official Grd, NosLog Rating when available, global rank, and country-category rank;
- Progress over time;
- Best Plays;
- rank distribution; and
- judgement summary.

These fields establish the purpose of a public competitive record profile. The Profile does not provide a whole-page private mode because public Rankings and record links must resolve to useful supporting context.

User-Controlled Visibility

Provide five explicit visibility controls:

1. NOSTALGIA player name;
2. Discord identity;
3. preferred arcade;
4. profile-wide Play count; and
5. Play activity, controlling both Last played and Recent Plays.

- Group Last played and Recent Plays under one Play-activity control so one surface cannot reveal the date or activity that the other claims to hide.
- Keep preferred arcade separate because it is location-adjacent information.
- Changing visibility must invalidate relevant public caches and remove protected data from subsequent public payloads and generated Share artifacts.
- Settings must explain each control in plain language and preview or otherwise make its public consequence understandable.
- Do not add a separate toggle for judgement summary under the approved contract.

Basic and Recital Performance Contract

Scope of the Mode Selector

- Place one compact Basic/Recital exclusive selector at the start of the competitive performance section, not above the identity header and not as a page-global tab.
- The selector controls only:
 - mode exam context;
 - Official Grd;
 - NosLog Rating when available;
 - global and country-category ranks;
 - Progress over time; and
 - Best Plays.
- It does not change Play count, Last played, Recent Plays, rank distribution, or judgement summary.
- The selected mode and controlled region must be programmatically associated so its limited scope is clear to sighted and non-sighted users.

Competitive Summary

- Show Official Grd, NosLog Rating when available, global rank, and country-category rank as one coherent summary rather than four unrelated large cards.
- Official Grd remains the primary official metric. NosLog Rating is a clearly labeled NosLog-derived metric governed by the approved Tier and Rankings contracts.
- Basic exposes both Official Grd and NosLog Rating.
- Recital exposes Official Grd and ranks. Its NosLog Rating item is absent until an approved Recital source and calculation exist; do not show zero, Coming soon, or a disabled empty metric merely to preserve symmetry.
- Missing eligible Grd or rank uses a concise unavailable value and does not invent a percentile or projected result.

Progress-over-Time Contract

- Use the section label Progress over time.

- Default to the most recent 90 days.
- Provide one compact range selector with 30 days, 90 days, 1 year, and All.

Do not expose four persistent peer buttons when space is constrained.

- Show one metric at a time through a compact metric selector:
- Official Grd; or
- NosLog Rating when available for the active mode.
- Do not overlay Official Grd and NosLog Rating in one chart because they use different

scales and meanings.

- The Basic/Recital selector controls the available series. Omit Recital Rating until its data contract is implemented.

- Show start value, current value, and change as structured text outside the chart.
- Retain meaningful daily history for the approved periods. Collapse identical

same-value points when they add no information, but preserve the date boundary and do not manufacture interpolation.

- Provide an accessible text summary and underlying date/value access. The graphical chart must not be the only way to obtain the trend.
- When there is only one point, show the exact current value and explain concisely that more history is required; do not draw a misleading trend.

Best Plays Contract

- Show five Best Plays on the Profile overview for the active Basic/Recital mode.
- Sort by the approved mode-specific contribution and score contract. Do not silently mix Basic and Recital contribution order.
- Each preview item includes:
 - jacket or approved fallback;
 - original Music title;
 - difficulty and level;
 - score;
 - rank plus Full Combo or Pianist state when applicable; and
 - the active mode's contribution value when it is necessary to explain ordering.
- The whole primary item opens the corresponding localized Music detail and selected difficulty. Auxiliary labels must not become competing links.
- Provide View all when more than five eligible items exist.
- The complete Best Plays destination supports Basic/Recital, explicit bounded loading through pagination or a user-initiated More action, direct restoration of the selected mode and position, and no infinite scroll.
- The overview preview limit must not cap retained or queryable best records.

Record Overview Contract

Rank Distribution

- Show the profile-wide Pianist, Full Combo, S, A+, A, B+, B, C, and D distribution.
- Do not label it a clear-status distribution. NOSTALGIA clear is not a useful differentiator for this purpose.
- Keep the whole distribution mode-neutral unless a future verified data source can distinguish mode-specific chart achievement without changing its meaning.
- Provide exact counts and a structured text equivalent for any visual encoding.

Judgement Summary

- Make the approved aggregate judgement summary public performance information.
- Include the judgement basis and valid-chart sample count. Do not imply that charts lacking judgement data were measured.
- A compact S-Just emphasis may lead the summary, but the downstream design must retain access to the exact S-Just, Just, Good, Miss, and Near basis rather than presenting a context-free percentage.
- Do not add note-type success filters or Tenuto/Glissando success summaries to the profile overview.
- Do not use the Music-detail community pattern radar for player judgement data; the two visualizations answer different questions.

Profile-Wide Play Count

- Show NOSTALGIA profile-wide Play count only when the user enables its visibility and synced data exists.
- Do not substitute Clear count.
- Play count belongs in Record overview, not the identity header or competitive-metric group.

Recent Plays Contract

- Show five Recent Plays on the overview only when Play activity is public.
- Recent Plays remain mode-neutral until imported data can prove whether each attempt belongs to Basic or Recital.
- Each item includes jacket or fallback, localized/original title hierarchy, difficulty and level, score, rank, and localized exact play time.
- The item opens the corresponding localized Music detail and selected difficulty.
- Provide View all when more than five public history items exist.
- The complete Recent Plays destination uses explicit bounded pagination or a user-initiated More action, restores position when returning, and never uses automatic infinite scroll.
- Hiding Play activity removes Last played and both overview and complete Recent Plays

from public access. The owner may still inspect their private activity after clear owner authentication.

Complete-List Destination Contract

- Use dedicated localized Profile child destinations, with implementation mapping equivalent to `/[[locale]]/profile/[[id]]/best` and `/[[locale]]/profile/[[id]]/recent`.
- Preserve player identity and a concise return path without duplicating the full overview.
- Best Plays retains the active mode. Recent Plays remains mode-neutral.
- List scope, page/cursor, and mode where applicable must be restorable through direct URL, Refresh, and Browser Back/Forward.
- A visitor opening a hidden Recent Plays URL receives the same privacy-safe outcome as the overview and never learns hidden counts or timestamps.
- Empty, Loading, Error, and end-of-list behavior follow the state contract below.

URL, History, and Restoration Contract

- Keep every Profile and complete-list URL localized and shareable.
- A Music-detail round trip from Best or Recent returns to the originating Profile surface, active mode where applicable, list position, and practical scroll context.
- Complete-list pagination or More state must be deterministic and restorable.
- Exact overview mode-query syntax is deferred to implementation mapping, but Refresh and Browser Back/Forward must not unexpectedly change the user's active performance mode during one Profile visit.
- Do not store private fields or hidden activity values in the URL.

Profile Share Card Contract

Purpose and Content

- Share is an owner-only action with a preview before any external action.
- Generate a 1200×630 PNG for one owner-selected Basic or Recital mode. The card is a concise public Profile summary, not a raw export or second Profile page.
- Always include avatar, NosLog username, country category, selected mode, available Official Grd and approved NosLog Rating, global/country rank, selected-mode Exam, NosLog identity, and the localized public Profile URL.
- Include NOSTALGIA player name, Profile-wide Play count, and preferred arcade name only when each existing visibility control is enabled and the value exists.
- Exclude Discord, Last played, Recent Plays, NOS, synchronization time, arcade address, machine details, and operational metadata.
- Hidden or missing fields are omitted from the image, accessible summary, metadata, payload, and layout. Never render Private, Not set, a placeholder, or an empty reserved slot.

Share, Open Graph, and Failure Behavior

- The primary Share action uses the system share sheet with image, localized text, and URL only when capability checks confirm that exact payload is shareable.
- Secondary actions are Save image and, where supported, Copy image.
- Cancel is not an error. Unsupported, denied, generation, and network failures remain distinct and provide the applicable retry, save, or link fallback.
- X uses an explicit official Web Intent link-share fallback. Never claim that the image was automatically attached when the platform does not support it.
- Public localized Profile metadata provides a public-safe Open Graph image so X, Discord, and compatible crawlers can render a preview without owner authentication.
- A privacy-setting change invalidates the card cache and versions the Open Graph image URL so an old public image is not presented as current.

Accessibility, Localization, and Reference Basis

- Provide a localized textual equivalent of the visible card content and an accessible preview name. Decorative artwork is excluded from that name.
- Follow the current ko, ja, or en Profile locale while preserving user and official game-name spelling. Test long names, missing avatar/Exam/Rating, and every independently hidden conditional field.
- The contract applies progressive capability and privacy principles from

[MDN Web Share](#), [W3C Web Share](#), [Apple Activity Views](#), [Android Sharesheet](#), [MDN ClipboardItem](#), [X Web Intents](#), [Open Graph](#), [WCAG Non-text Content](#), [WCAG 2.2](#), [EDPB Privacy by Design and Default](#), and [ICO Data Minimisation](#). Platform support and crawler behavior vary, so feature detection and public-safe fallback are requirements rather than assumptions.

Loading, Empty, Error, Privacy, and Unavailable States

Initial Loading

- Reserve stable identity and major section regions and expose one concise loading status.
- Do not fabricate ranks, scores, charts, or activity in skeleton content.

Section Update

- A mode, metric, range, or complete-list update keeps the last committed content visible, marks only the controlled region busy, and ignores stale responses.
- Do not blank the entire Profile when only one section changes.

No Synced Records

- Preserve public identity and visible metadata.
- Show one concise record-empty outcome in the performance area and one owner-only Data sync action when the viewer owns the Profile.
- Do not repeat separate empty cards for Grd, Rating, trend, Best Plays, distribution, judgement, and Recent Plays.

Partial Data

- A player may have Basic but no Recital record, a current value but no history, Best Plays but no imported Recent Plays, or judgement coverage for only part of the chart catalog.
- Render available sections accurately and use concise local unavailable/insufficient states. Do not treat partial data as a whole-page failure.

Privacy

- Visitors do not see hidden modules, placeholder rows, hidden totals, or protected values in markup or generated assets.
- Owners see a concise private-state explanation and Settings access without exposing the protected data to public caching.
- A hidden Play-activity group removes Last played and Recent Plays together.

Error

- If one section fails after prior success, retain the last committed section content and show an inline Retry for that section.
- If the initial Profile request fails, keep the ordinary shell and provide one bounded error with Retry. Do not transform errors into empty records or private states.
- A missing user produces the localized not-found contract, not an empty Profile.

Sync Status

- Up to date, Sync needed, Syncing, Partial, and Failed are owner-only trust states and remain distinct from public record Loading or Error.
- Sync state links to the existing Data sync flow; it does not expose tokens, internal errors, or administrator health data.

Responsive Contract

Compact Layout

- Use 390px as a representative review canvas, not a fixed product width or breakpoint.
- Reflow without document-level two-dimensional scrolling down to 320 CSS px.
- Use one readable source column. Identity metadata wraps or stacks without forcing the username, country marker, owner actions, or exam labels outside the viewport.
- Keep the Basic/Recital selector immediately attached to the performance region it controls.
- Summary metrics may reflow into fewer columns or stacked groups. Never reduce labels to unexplained icons merely to preserve one row.
- Play items remain vertically scannable. Jacket ratio stays 1:1; long original titles must not overlap metadata.

- No essential value depends on Hover. Mobile does not add a tap-only replacement for decorative Hover detail.
- Charts use their actual container width and retain text summaries outside the plot.

Wide Layout

- Remove the fixed compact-shell constraint and establish an intentional profile reading width.
- Identity and competitive summary remain the opening context. Additional width may align a primary record column with a supporting analysis column when the approved source hierarchy and logical keyboard order remain intact.
- Use extra space to improve comparison of trend, Best Plays, distribution, judgement, and Recent Plays; do not fill it with NOS, Brooch, social modules, or oversized decorative surfaces.
- Best and Recent lists may expose more aligned metadata than compact rows but retain the same information meaning and primary Music-detail destination.
- Do not merely enlarge the mobile column or create unrelated dashboard cards to fill the viewport.

Implementation Semantics Across Layouts

- Compact and wide presentations expose one equivalent Profile dataset and source order.
- If separate visual structures are rendered, only the active one remains in the accessibility tree; do not duplicate headings, record links, or private data.
- Choose viewport or container transitions from content constraints and validate intermediate widths, long names, and three-language titles.

Accessibility Contract

- Use one page h1 containing the player's full NosLog username or localized unnamed fallback.
- Provide one labeled performance region controlled by the Basic/Recital selector.
- Exclusive selectors are keyboard operable, expose selected state, and retain visible Focus. Selection changes do not move Focus unexpectedly.
- Country markers and exam labels have localized accessible names and never depend on color, flag image rendering, or badge shape alone.
- Share, Settings, Data sync, View all, Music-detail items, range/metric selectors, Retry, and complete-list navigation have descriptive accessible names and visible Focus.
- Every chart has an accessible name, exact text summary, data basis, and a method to obtain underlying values. Color is never the only series or state distinction.
- Loading and committed section updates use restrained live status. Do not announce every record item or every chart point.
- Lists use semantic list structure; a wide tabular comparison uses native table

semantics and associated headings when relationships require them.

- Dates use semantic time values. Abbreviations such as Grd, FC, and S-Just receive a clear contextual label or accessible expansion where needed.
- Hidden content is absent from the accessibility tree and public payload, not merely visually concealed.
- Pointer targets satisfy the approved Foundation target-size rule and do not overlap at 320px.
- Respect reduced-motion preferences. Trend or section transitions never require motion to communicate state.

Localization and Content

Stable Domain Labels

- Keep Basic, Recital, Grd, NosLog Rating, S-Just, Just, Good, Miss, Near, Full Combo, and Pianist in approved product terminology.
- Use localized explanatory labels around these stable terms rather than translating them inconsistently across pages.
- Use the approved country-category meaning: Korea, Japan, and Other regions. Do not label Other regions as one specific country.

Titles and Identity

- Show original Music titles only in Profile play items. Approved localized/read titles remain searchable and are available on the linked Music Detail page.
- Valid Korean, Japanese, Latin, and mixed-script usernames must wrap or truncate only when the complete accessible name remains available.
- Long original Japanese titles and artists must not be clipped by a fixed single-language assumption.
- Discord handles, NOSTALGIA names, and arcade names retain their source spelling.

Dates and Counts

- Format dates by locale and expose machine-readable date/time values.
- Avoid ambiguous all-numeric dates without locale context.
- Use tabular figures for scores, Grd, Rating, rank, Play count, judgement values, and trend summaries where alignment aids comparison.
- Localize empty, hidden-owner, Loading, Error, Retry, View all, sync, and insufficient history labels in Korean, Japanese, and English with equivalent meaning.

Runtime State Contract

State	Required visible outcome	Interaction outcome
Public Basic	Identity, Basic competitive summary, Basic trend and Best, public record overview and activity	Basic/Recital and public record links remain usable
Public Recital	Identity, Recital Official Grd/ranks, Recital trend and Best; no fabricated Rating	Basic remains directly selectable
Owner	Public Profile plus Share, Settings, sync state, and private-state context	Owner actions lead to their established destinations
Signed out	Same public record contract without owner actions	Public links remain usable; login is not required to read
Play activity hidden	No Last played, Recent preview, count, timestamps, or public recent route data	Owner can open Settings; visitor receives no placeholder
Optional field hidden	Visible identity/performance remains; protected metadata omitted	No protected value leaks through Share or payload
Share preview	Public-safe selected-mode card and localized text equivalent	Owner may Share, save, or use supported copy
Share unsupported	Preview remains with save and explicit link fallback	No false success or claimed image attachment
Share generation error	Bounded Retry error; Profile remains usable	No stale or partially generated image is shared
No records	Identity plus one concise record-empty state	Owner gets contextual Data sync; visitor keeps navigation
Partial records	Only trustworthy available sections and local insufficiency states	Other sections remain usable
One trend point	Exact current value and concise insufficient-history text	Range/metric controls remain accurate
Updating section	Last committed section plus busy status	Stale responses cannot win
Initial error	Bounded Profile error and Retry	Ordinary localized shell remains usable
Section error	Last committed section plus local Retry	Unaffected Profile sections remain usable
Sync needed/failed	Owner-only concise sync status	Opens Data sync recovery; no internal details exposed
Missing user	Localized not-found outcome	No empty or private Profile is fabricated

Implementation Mapping

Approved requirement	Current source	Downstream change
Public localized route and owner check	@@NOSLOGTOKEN0@@	Preserve public access; compose approved owner/public states and complete-list links
Public data query and cache	@@NOSLOGTOKEN0@@	Add Rating/progress/public analytics, privacy-safe payloads, five-item previews, totals, and complete-list queries
Profile composition and mode state	@@NOSLOGTOKEN0@@	Scope Basic/Recital to performance, reorder approved sections, remove inline list expansion and Logout
Identity and owner actions	@@NOSLOGTOKEN0@@	Remove join date/placeholders; add approved metadata privacy, last-play, and sync-status behavior
Share preview and actions	@@NOSLOGTOKEN0@@	Add selected-mode preview, capability detection, save/copy fallbacks, accurate X link sharing, and accessible text
Share image and Open Graph	@@NOSLOGTOKEN0@@ and localized Profile metadata	Produce public-safe, privacy-aware, versioned 1200×630 OG output; remove Last played and private placeholders
Competitive summary	@@NOSLOGTOKEN0@@	Integrate Official Grd, conditional Rating, global/country ranks, and unavailable states
Mode selector	@@NOSLOGTOKEN0@@	Attach selector semantically and visually to its controlled performance region
Grade trend	@@NOSLOGTOKEN0@@	Add range and metric selectors, Rating series, exact summary, and accessible data contract
Best preview	@@NOSLOGTOKEN0@@	Use five-item preview, active-mode ordering, View all, localization, and Music-detail return context
Recent preview	@@NOSLOGTOKEN0@@	Use five-item privacy-controlled preview and View all; keep mode-neutral
Rank distribution	@@NOSLOGTOKEN0@@	Preserve approved rank taxonomy; remove inline expansion dependence and integrate optional Play count
Judgement summary	@@NOSLOGTOKEN0@@ and @@NOSLOGTOKEN1@@	Make privacy-safe public performance summary with full basis and valid-chart count
Profile settings	@@NOSLOGTOKEN0@@ , @@NOSLOGTOKEN1@@ , and @@NOSLOGTOKEN2@@	Add preferred-arcade and grouped Play-activity visibility; explain public effects and invalidate caches
Privacy storage	@@NOSLOGTOKEN0@@	Add explicit preferred-arcade and Play-activity visibility fields while preserving existing controls
Official play history	ChartPlayHistory in @@NOSLOGTOKEN1@@	Preserve deduplicated history beyond overview limits and support private/public complete lists
Record snapshots	ChartRecordSnapshot and UserBestGrade in @@NOSLOGTOKEN2@@	Preserve changed-only history and support Grd/Rating trend ranges without duplicate points
Sync ingestion	@@NOSLOGTOKEN0@@ and @@NOSLOGTOKEN1@@	Keep duplicate suppression, expose owner-safe freshness, and retain complete meaningful history
Basic Rating calculation	@@NOSLOGTOKEN0@@ and @@NOSLOGTOKEN1@@	Reuse approved published Basic Rating contract; do not create a separate Profile formula
Complete-list destinations	New localized Profile child routes	Add privacy-safe Best and Recent lists with restorable explicit bounds and Music-detail return context
Localized labels	@@NOSLOGTOKEN0@@	Add complete Korean/ Japanese/English Profile, privacy, range, metric, list, sync, and state strings
Existing automated evidence	@@NOSLOGTOKEN0@@ , @@NOSLOGTOKEN1@@ , and profile/sync tests	Add privacy leaks, mode scope, Rating, preview/full lists, history, localization, 320px reflow, and state coverage

Representative Fixtures

Validate at minimum:

1. owner and signed-out visitor viewing the same fully populated public Profile;
2. Korea, Japan, and Other-regions identities with and without avatars and exams;

3. Basic with Official Grd, Rating, ranks, long history, and more than five Best Plays;
4. Recital with Official Grd and Best Plays but no Rating source;
5. no records, Basic-only records, one trend point, partial judgement coverage, and no Recent Plays;
6. each optional privacy field hidden independently;
7. Play activity hidden, confirming Last played and Recent Plays disappear together;
8. hidden Recent child-route direct access by visitor and authenticated owner;
9. more than one page/bound of Best and Recent history and exact return from Music detail;
10. current sync, stale sync, syncing, partial sync, and failed sync for the owner;
11. a valid maximum-length username and long NOSTALGIA, Discord, and arcade names;
12. long original Japanese Music titles, translated/read-title search entry that resolves to original-title-only Profile items, and missing jacket;
13. 30 days, 90 days, 1 year, and All trend ranges with sparse, identical, and changing values;
14. initial Loading, section update, initial error, section error, Retry, missing user, and stale response ordering;
15. 320px, representative 390px, intermediate widths, wide desktop, 200% text zoom, reduced motion, keyboard-only use, and screen-reader structure.

Browser Acceptance Contract

- /ko/profile/[id], /ja/profile/[id], and /en/profile/[id] resolve with equivalent meaning and localized metadata.
- Public visitors can identify the player, compare current standing, inspect public progress and records, and open supporting Music detail without authentication.
- The identity area contains username-adjacent country marker and exam context but no NosLog join date.
- Basic/Recital changes only competitive summary, trend, and Best Plays; mode-neutral sections do not silently change.
- Basic displays Official Grd and available NosLog Rating. Recital never fabricates or reserves an empty Rating value.
- Progress defaults to 90 days, shows one selected metric, provides exact start/current/change text, and exposes accessible underlying values.
- Profile overview renders at most five Best and five Recent items and exposes View all only when more public items exist.
- Complete-list state and the return from Music detail restore useful position and mode context.
- NOSTALGIA name, Discord, preferred arcade, Play count, and Play activity obey their approved visibility controls in content, payloads, accessible names, and Share artifacts.

- Hiding Play activity removes Last played and Recent Plays together for visitors.
- Hidden or missing metadata does not leave Private, Unset, empty badges, or blank layout slots for visitors.
- Public judgement exposes its valid sample basis and does not imply coverage of missing chart data.
- Owner-only Share, Settings, and sync status remain available without a Profile-body Logout action.
- At 320 CSS px, no header, metadata, selector, metric, play item, chart, or action causes document-level horizontal overflow, clipping, or overlap.
- Wide layouts use additional reading/comparison space without becoming an unrelated dashboard or exposing excluded fields.
- Korean UI copy, original Japanese title, and long English UI content reflow without semantic truncation or fixed-height collision.
- Loading, empty, partial, privacy, unavailable, Error, sync, and not-found states are distinct and recoverable where recovery exists.
- All selectors, actions, lists, Retry controls, and record links work with keyboard alone and have visible Focus.
- Charts remain understandable without color or graphics and respect reduced motion.
- No unexpected browser console error or public private-data leak occurs in tested normal and failure flows.

Reference Matrix

Source	Transferable principle	NosLog application	Limitation
Current Profile data	Establishes implemented fields, cache boundary, list limits, mode ranks, and owner-only analytics	Separates observed behavior from approved downstream changes	Current presentation and privacy are not 2.0 authority
Current Profile composition	Shows present source order and global mode-state coupling	Identifies sections to preserve and re-scope	Current fixed compact composition is superseded
Current Profile schema	Confirms available identity, history, snapshot, sync, and privacy data	Grounds retention and migration requirements	Missing approved visibility fields and Recital Rating
Approved IA	Defines Profile as public Records-and-comparison context and Header identity destination	Preserves access, purpose, and relationship to Settings	Does not define Profile anatomy
Approved Music detail brief	Defers profile-wide Play count and preserves Profile→Music record links	Resolves deferred data meaning and round-trip behavior	Chart-scoped metrics remain separate
Approved Tier brief	Defines goal-specific Tier and Rating source behavior	Keeps Profile Rating derived from the same approved contract	Does not define Profile layout
Approved Global-rankings brief	Preserves public player links, mode metrics, country categories, and shared rank meaning	Aligns identity, ranks, and Rating labels	Ranking rows are not full Profiles
NOSTALGIA official Play Data	Publishes player identity, Play count, Basic/Recital Grd, chart bests, judgement detail, and recent plays	Validates core NOSTALGIA record vocabulary and data provenance	Official inclusion does not make NOS or Brooch a NosLog priority
NOSTALGIA official mode guidance	Basic and Recital represent distinct game performance contexts	Supports scoped mode comparison	Does not define NosLog Rating or public privacy
osu! public Profile	Leads with identity and standing, then best, history, most-played, and recent performance	Supports performance-first hierarchy and complete supporting lists	osu! PP, medals, and social context do not map directly
osu! API Profile sections	Public Profile sections are independently addressable data groups	Supports bounded Best/Recent destinations and explicit states	API structure does not dictate visual composition
ScoreSaber beginner guide	Profile identity, total performance value, global/local rank, and score stats are tightly grouped	Supports coherent competitive summary	Beat Saber PP differs from Grd and NosLog Rating
ScoreSaber ranking system	Weighted best performances explain public ranking and country position	Supports Best Plays as evidence for derived Rating	Exact weighting is not NosLog policy
BeatLeader server and API	Performance profiles connect ranked scores, history, and replay-backed evidence	Supports public record evidence and structured full lists	Replay and anti-cheat functions are outside NosLog scope
LIFE4 DDR	Competitive rank can act as a progress roadmap rather than decorative status	Supports current standing followed by growth evidence	LIFE4 achievement rules are not NOSTALGIA rules
Strava Profile	Identity, activity history, periodic progress, and recent items coexist with different priority	Supports progress summary plus bounded recent activity	Athletic metrics and social modules are not adopted
Last.fm public user Profile	Recent activity and longer-term listening reports are separate layers	Supports overview previews plus complete history	Listening activity is not competitive game performance
GitHub personal Profile	Public identity, activity visualization, and selected highlights coexist	Supports identity, progress, and Best evidence without a settings dashboard	Contribution graphs are not copied as Profile styling
GitHub contribution reference	Activity history needs clear inclusion rules and public/private semantics	Supports explicit data basis for trend and hidden activity	Contribution events differ from NOSTALGIA sync events
Google Play Games Profile privacy	Public and private profile outcomes require clear previews and visibility meaning	Supports explicit Profile visibility controls and owner understanding	Native app privacy grouping is not copied wholesale
Steam Profile privacy	Game details and playtime can be controlled separately from basic identity	Supports optional Play count and activity disclosure	Steam's whole-profile tiers are intentionally not adopted
Apple Game Center privacy	Identity and game activity are shared according to chosen disclosure	Supports explicit activity privacy and no silent public leak	Platform account relationships differ from NosLog
PlayStation privacy settings	Recent activity and profile visibility need understandable audience controls	Supports separating location-adjacent and play-activity privacy	Console audience presets are not required
Carbon Dashboards	Dashboards require clear hierarchy, minimal distraction, and focused analytical questions	Supports a performance profile without unrelated metric cards	Carbon surface styling is not NosLog authority
USWDS Data visualizations	Charts need underlying data and plain-language summaries	Requires accessible Grd/Rating trend and judgement basis	Does not define rhythm-game metrics
GOV.UK Accordion	Universally needed content should not be hidden; content should be simplified before adding disclosure	Keeps core performance visible and avoids nested profile accordions	Government content density differs from NosLog

Source	Transferable principle	NosLog application	Limitation
W3C WCAG: Reflow	Ordinary vertical content must preserve information and function at 320 CSS px without two-dimensional scrolling	Rejects the current overflow and fixed compact desktop shell	Does not prescribe exact layout tokens
W3C Tables tutorial	Tabular relationships require clear headings and associations	Guides wide complete-list and metric comparison semantics	Compact records may use semantic lists instead
WAI-ARIA APG: Tabs	Tab-like exclusive controls need clear controlled relationships and keyboard behavior	Guides the scoped Basic/Recital selector if tab semantics are chosen	Visual styling and whether tabs or segmented control are used remain open to Foundation
W3C Internationalization techniques	Language metadata and script-aware wrapping are required for multilingual text	Supports Korean/Japanese/English labels and title reflow	Exact typography requires Foundation testing
Korean Layout Requirements	Korean line breaking and typographic composition have language-specific constraints	Supports script-aware names, titles, and metadata	It does not determine NosLog visual identity

Evidence Convergence

- Rhythm-game profile references converge on identity and current competitive standing before best performances and broader activity. None supports leading with currency, inventory, or account management.
- Activity profiles converge on separating high-level progress, selected highlights, and recent history instead of putting every event in the Profile overview.
- Privacy references converge on explicit disclosure for activity, playtime, and location-adjacent fields. They do not justify leaking hidden data through placeholders or generated assets.
- Dashboard and accessibility sources converge on one question per visualization, exact text summaries, stable states, and responsive hierarchy rather than a wall of equally weighted cards.
- Responsive and internationalization guidance converges on content-driven reflow, 320px support, and variable-height multilingual rows rather than a fixed 390px product shell.
- No external source defines the exact NosLog public/private grouping, Basic/Recital scope, Rating source, five-item preview count, or exclusion of Brooch/NOS. Those decisions come from verified NosLog/NOSTALGIA behavior and explicit user approval.

Rejected and Superseded Alternatives

- Treat Basic/Recital as a page-global tab - Superseded: it controls only the competitive summary, Progress over time, and Best Plays.
- Show Basic and Recital summaries simultaneously on compact layouts - Rejected: it raises opening density and weakens the active performance context.
- Show an empty or disabled Recital Rating slot - Rejected: omit the metric until an approved source and calculation exist.
- Overlay Official Grd and Rating in one chart - Rejected: different scales and meanings make a dual-line chart misleading.
- Use all four trend ranges as permanent buttons - Rejected: one compact selector preserves the hierarchy.
- Keep NosLog join date - Superseded: Last played is the relevant NOSTALGIA activity context and is privacy-controlled.
- Control Last played and Recent Plays independently - Rejected: separate controls

can contradict each other and leak hidden activity timing.

- Render Private placeholders to visitors - Rejected: hidden fields and modules

are omitted entirely.

- Make judgement owner-only - Superseded: judgement becomes public competitive performance information with an explicit valid-data basis.

- Show ten or unlimited Best/Recent items inline - Superseded: use five-item previews and dedicated complete-list destinations.

- Use automatic infinite scroll for complete lists - Rejected: explicit bounded loading preserves position, history, and return behavior.

- Keep Logout at the end of Profile - Rejected: account termination belongs in the account/More or Settings context.

- Show Brooch or NOS as persistent Profile metrics - Rejected: they do not serve the approved public ability, progress, and record purpose.

- Add social followers, messaging, or a status feed - Rejected: no approved NosLog need justifies those modules.

- Keep desktop inside a fixed 390px column - Rejected: 390px is a representative mobile canvas, not a desktop product width.

Decision Log

ID	Decision	Status
PROF-01	Profile is a public Records-and-comparison destination centered on identity, ability, progress, and record evidence	Approved
PROF-02	Source order is identity, competitive summary, progress, Best Plays, record overview, then Recent Plays	Approved
PROF-03	Country marker sits beside username and mode exam labels sit below identity	Approved
PROF-04	NosLog account join date is removed	Approved
PROF-05	Owner keeps compact Share and Settings actions and gains contextual sync freshness	Approved
PROF-06	Logout is removed from Profile body	Approved
PROF-07	Basic/Recital selector controls only competitive summary, progress, and Best Plays	Approved
PROF-08	Official Grd remains official primary metric and Basic adds the approved NosLog Rating	Approved
PROF-09	Recital Rating is structurally supported but omitted until its approved data source exists	Approved
PROF-10	Competitive summary integrates mode Grd, conditional Rating, global rank, and country-category rank	Approved
PROF-11	Progress defaults to 90 days with 30-day, 90-day, one-year, and all ranges in one selector	Approved
PROF-12	Progress shows one selected metric at a time and exposes exact start/current/change text	Approved
PROF-13	Overview shows five active-mode Best Plays and a complete-list destination	Approved
PROF-14	Rank distribution and judgement remain mode-neutral public record overview data	Approved
PROF-15	Profile-wide Play count is optional public information and never Clear count	Approved
PROF-16	Overview shows five mode-neutral Recent Plays when Play activity is public	Approved
PROF-17	Complete Best and Recent lists use explicit bounded loading and no infinite scroll	Approved
PROF-18	Always-public performance includes identity, exams, metrics, ranks, progress, Best, distribution, and judgement	Approved
PROF-19	User controls NOSTALGIA name, Discord, preferred arcade, Play count, and grouped Play activity	Approved
PROF-20	Last played and Recent Plays share one Play-activity visibility control	Approved
PROF-21	Hidden visitor content is omitted without a Private placeholder	Approved
PROF-22	Meaningful daily history is retained without a thirty-item cap and identical events/snapshots are not duplicated	Approved
PROF-23	Brooch, persistent NOS, arbitrary achievements, and social modules are excluded	Approved
PROF-24	Compact layouts reflow without document horizontal scrolling through 320 CSS px	Approved
PROF-25	Wide layouts use additional comparison space without becoming an unrelated dashboard	Approved
PROF-26	Use an owner-previewed 1200 × 630 card scoped to one selected mode	Approved
PROF-27	Include public identity and available selected-mode competition context	Approved
PROF-28	Conditionally include only visible NOSTALGIA name, Play count, and preferred arcade name	Approved
PROF-29	Omit hidden/missing fields and exclude Discord, activity, NOS, sync, address, and operations data	Approved
PROF-30	Feature-detect system Share and provide save, supported copy, and accurate link fallbacks	Approved
PROF-31	Provide a public-safe localized Open Graph card and invalidate it after privacy changes	Approved
PROF-32	Provide a localized accessible equivalent and explicit loading, cancel, unsupported, and error behavior	Approved

Handoff Boundary

Claude Design may determine the final type scale, visual emphasis, surfaces, chart appearance, column proportions, grid tracks, spacing, avatar fallback, country-marker treatment, control styling, responsive transition points, and motion after Foundation approval. It must preserve the approved source hierarchy, scoped Basic/Recital behavior, metric meanings, privacy groups, five-item previews, complete-list access, sync trust context, states, accessibility, localization, and acceptance criteria.

The later Codex implementation session must compare the Claude output against this brief. It must request a guide or design revision before implementing any result that reintroduces the NosLog join date, exposes hidden content, treats Basic/Recital as a global page mode, fabricates Recital Rating, overlays Grd and Rating, caps retained history at the overview count, uses infinite scroll, restores Logout or Brooch/NOS as Profile priorities, keeps a fixed phone-width desktop shell, or otherwise conflicts with the approved contract.

NosLog 2.0 Bingo Page Brief

docs/design/10-bingo-page-brief.md

Document Control

- Status: Approved
- Decision status: `Bingo list and detail contract approved: permanent catalog,

manual-only progress, public browsing, authenticated editing, reward semantics, reset behavior, mission localization, responsive composition, runtime states, accessibility, and browser acceptance`

- Evidence status: `Repository, schema, seed-data, and browser inspection; official

NOSTALGIA evidence; approved information architecture; cited task-list, checkbox, grid, destructive-action, responsive, accessibility, and localization references; and the user-approved decision record`

- Date started: 2026-08-03
- Last decision update: 2026-08-03
- Language: English
- Parent information architecture:

[02-information-architecture.md](#)

- Related contracts:

[03-home-page-brief.md](#), [04-shared-discovery-page-brief.md](#), and [05-music-detail-page-brief.md](#)

- Scope: localized public Bingo catalog and Bingo detail, signed-in manual mission

records, progress and reward meaning, recent manual record, reset, and contextual Music-detail links

- Excluded: administrator editor design, automatic NOSTALGIA Bingo synchronization, attempt or retry history, final Foundation tokens, final high-fidelity composition, and production implementation in this session

Decision Labels

- Observed: Verified in the repository, current browser evidence, or an approved upstream artifact.

- Approved: Explicitly agreed with the user and authoritative for downstream design.

- Proposed: Evidence-based direction awaiting user approval.
- Open: Requires further research, testing, or a user decision.
- Rejected: Considered and explicitly not selected.
- Superseded: Replaced by a later approved direction.

This brief is authoritative for Bingo purpose, content hierarchy, state meaning, interaction, localization, responsive behavior, and acceptance. Exact typography, color, spacing, radius, elevation, cover treatment, control dimensions, grid gaps, and content-driven transition values remain Foundation and downstream Claude Design work. Later visual work may refine expression but must not reinterpret this contract.

Purpose

Bingo is a public reference and a signed-in manual checklist for NOSTALGIA Bingo missions. It answers three ordered questions:

Which board am I looking for, what must I complete, and how does my manually recorded progress relate to the music-unlock and NOS rewards?

It is not a live NOSTALGIA state mirror. NOSTALGIA does not provide NosLog with the active-board or mission-completion state needed for automatic tracking. NosLog must therefore help users read the same 5×5 mission structure they see in the game and record their own checks without claiming that those checks are official game state.

Primary Context and Success

- Approved: Mobile use beside an arcade cabinet is primary. A user should be able to locate a board, match a coordinate, read the mission, and update one check with minimal context switching.
- Approved: A signed-out visit succeeds when the user can browse all boards, understand reward structure, open any board, inspect all twenty-five missions, and follow contextual Music links without being shown fabricated personal progress.
- Approved: A signed-in visit succeeds when the user can resume the most recently manually edited board, record mission completion, understand music-unlock versus full-board progress, and recover from a save failure.
- Approved: Desktop remains required and uses its additional width for board and mission comparison. It must not preserve the current approximately 390px shell in the center of a wide viewport.
- Approved: Current styling and geometry are evidence only, not NosLog 2.0 visual authority.

Current-Product and Domain Evidence

Official Domain Evidence

- Observed: Official NOSTALGIA material presents Bingo as a 5×5 mission board with line and completion rewards and provides reset/retry behavior in the game.
 - Observed: NosLog receives no official active-board or per-cell progress feed.
- Existing user progress is therefore a NosLog manual record, not proof that the in-game board was active when a score was achieved.
- Approved interpretation: Official reset existence does not require NosLog to model attempts. NosLog needs only a way to clear its current manual checklist.

Repository and Data Evidence

- Observed: Public localized routes exist at `/[locale]/bingo` and `/[locale]/bingo/[id]`; reading is public and mutation requires authentication.
- Observed: [@@NOSLOGTOKEN0@@](#) contains 44 boards and 1,100 cells, exactly 25 cells per board.
- Observed: The data uses FORTE, Op.2, and Op.3 as release provenance. It has no board end dates. `sourceVersion` is metadata, not a user-selectable Bingo mode.

- Observed: Required music-unlock lines range from 2 to 7. Data separately models per-line NOS, full-board completion NOS, and total available NOS.
- Observed: [@@NOSLOGTOKEN0@@](#), [@@NOSLOGTOKEN0@@](#), and [@@NOSLOGTOKEN1@@](#) provide board metadata, one mission string per cell, and user-scoped manual completion timestamps.
- Observed gap: The current mission schema has one `title` string and the current imported mission text is Korean. It cannot yet represent verified official Japanese text plus independently reviewed Korean and English translations.
- Observed: Current progress calculation recognizes the twelve standard 5×5 Bingo lines and can identify a line with one remaining cell as a chance state.
- Observed: Current mutation uses optimistic client state, server persistence, rollback, and localized error feedback.

Current Interface and Browser Evidence

- Observed: The current list exposes all, in-progress, chance, and completed controls; progress ordering; compact board previews; progress values; and reward information.
- Observed: The current detail exposes cover and reward context, a 5×5 board, mission filters, all 25 missions, and manual controls.
- Observed: Current wide layouts retain a narrow mobile-like column and leave large unused margins. Compact 390px and 320px checks did not cause document-level horizontal overflow, but this does not validate long Korean/Japanese/English content or the final 2.0 hierarchy.
- Observed issue: Current “continue” and availability wording can imply a live or time-limited in-game state that NosLog cannot verify.

Approved Scope and Invariants

1. All 44 boards are permanently browsable. Do not add availability windows, ended states, an archive, or a version selector.
2. `sourceVersion` may appear only as release metadata such as FORTE, Op.2, or Op.3.
3. Progress is always a user-entered NosLog checklist. Never imply automatic sync, official activation, score-based completion, or verified in-game completion.
4. The 5×5 board remains the primary mission-finding model on detail.
5. Song-unlock progress and full-board reward progress are distinct meanings.
6. Reading is public. Login is required only to add, remove, or reset personal checks.
7. A “recent” board means the board whose NosLog manual record was edited most recently. It does not mean active, selected, or currently running in NOSTALGIA.
8. No attempt count, retry cycle, completion-history ledger, or lifetime earned-NOS total is introduced.

Approved Information Hierarchy

Bingo List

1. page identity and concise manual-record explanation;
2. catalog summary and, only for a signed-in user with progress, recent manual record;
3. compact filter and sort controls;
4. permanent Bingo catalog cards;
5. explicit next batch control when more items exist.

Bingo Detail

1. return to Bingo list and board identity;
2. reward and progress semantics;
3. 5×5 board;
4. mission list and compact mission filter;
5. contextual login or reset action when applicable.

The board and mission list are one synchronized task surface. A detached primary CTA must not compete with the act of finding and checking a mission.

Progress and Reward Semantics

Progress States

State	Rule	Required meaning
Not started	No saved completed cells	No personal progress has been manually recorded
In progress	At least one cell saved; fewer than <code>requiredLines</code> complete	Manual record exists; music-unlock threshold has not been reached
Music unlock complete	Completed lines are at least <code>requiredLines</code> ; cells remain	Required song-unlock line threshold is satisfied in the checklist
Full board complete	All 25 cells are saved complete	Checklist is complete and full-board reward condition is satisfied

- A board can exceed the music-unlock threshold without being full-board complete.
- “Completed” without qualification is ambiguous and must not merge these two states.
- Chance is a helpful board condition, not a top-level lifecycle state. It means one

unchecked cell remains in at least one valid line and may be used as a secondary filter or cue for signed-in progress.

- Signed-out users have no personal state. Do not assign them `Not started` or show

`0/25`, because that would look like a measured personal record.

Reward Model

Display reward meaning as distinct values rather than one unexplained total:

- `requiredLines`: number of completed lines required for the music unlock;
- `lineRewardNos`: NOS earned for each completed line;
- `completionRewardNos`: additional NOS for all 25 cells;
- `rewardNos`: total NOS available from all line rewards plus full-board bonus.

The interface must not label `rewardNos` as already earned. Personal progress may explain reached conditions, but NosLog cannot verify in-game receipt of the reward.

Bingo List Contract

Catalog Summary

- State that there are 44 permanently available boards and that progress is manually recorded in NosLog.
- Do not show a date range, countdown, ended badge, or release-version switcher.
- Release metadata may help identify a board but must remain subordinate to its title and cover.

Recent Manual Record

- Show only to a signed-in user when at least one saved cell record exists.
- Select the board with the most recently updated manual cell record.
- Label it with language equivalent to `Recently recorded Bingo`; do not use `Active`, `Activated`, `Continue in game`, or another phrase that implies NOSTALGIA state.
- Provide a direct return to that board. Its layout must remain visually connected to the list rather than becoming a detached dashboard.
- When the latest board is reset and no saved cells remain, recompute from the next most recent saved board or omit the module.

Filter and Sort

- Keep controls compact and contextually grouped rather than exposing a permanent row of many buttons.
- Personal status options for signed-in users: `All`, `In progress`, `Music unlock complete`, and `Full board complete`.
- Chance may be available as a secondary progress filter, but it must not replace the approved state model.
- Signed-out users do not see personal status filters.
- Sort options: `Recently recorded`, `Progress high`, and `Release order` where they are meaningful. Personal sorts are omitted or disabled with a clear reason when no authenticated progress exists; do not fabricate zero values.
- The chosen state must be restorable and compatible with browser `Back`.

Catalog Cards

Each card preserves the following information contract:

- board cover or defined missing-cover fallback;
- original board and Music titles;
- subordinate `sourceVersion` release metadata;
- compact 5×5 miniature that communicates board identity and, when signed in,

personal checked cells;

- signed-in progress state and concise progress value;
- concise music-unlock or reward context when needed for comparison.

Signed-out cards omit checked cells, progress fractions, personal state badges, chance cues, and other personal completion indicators. They remain fully interactive destinations, not disabled previews.

Batching

- Load the first 12 boards, then provide an explicit next-12 action while more remain.
- Do not use automatic infinite scroll.
- Preserve filter, sort, loaded count, and useful list position across detail round

trips and browser Back.

- A no-match result must be concise and distinguish a filter result from a missing catalog.

Bingo Detail Contract

Identity and Reward Context

- Provide a clear return to the list and identify title, cover, and release metadata.
- Explain required music-unlock lines separately from per-line NOS, full-board bonus, and total available NOS.
- Signed-in personal progress may be summarized here. Signed-out users receive reward structure without a fake personal progress block.

5 × 5 Board

- Render the complete 5 × 5 coordinate model without horizontal page scrolling at the required compact widths.
- Each cell is selectable for navigating to or emphasizing its mission details.
- Selection and saved completion are separate states. Selection is available to every visitor; completion is editable only when signed in.
- Checked, selected, chance-related, and keyboard-focus states must not rely on color alone and must remain visually distinguishable from one another.
- Board coordinates and mission rows use the same stable numbering/coordinate system.
- The board may become sticky beside the mission list on wide layouts only when it does not hide content or break keyboard and zoom behavior.

Mission List and Filter

- Show all 25 missions and preserve their relationship to board coordinates.
- Selecting a board cell moves focus or view to the corresponding mission without unexpectedly changing its completion state.
- Selecting or focusing a mission synchronizes the board selection.
- Use one compact mission-filter control rather than a permanent row of all options.

- Signed-in options: All, Incomplete, Complete, and Chance.
- Signed-out users need only All unless another non-personal browsing filter is later separately approved.
- Each row may include coordinate, localized mission instruction, required context, contextual Music-detail link when a verified relation exists, and a signed-in manual checkbox.
- Do not invent Music links by parsing text. Use verified structured relationships.

Manual Completion and Save Contract

- A signed-in checkbox adds or removes one NosLog BingoCellProgress record.
- The optimistic state may update immediately, but its save status must be perceivable and a failure must restore the last confirmed state.
- Repeated activation while the same mutation is pending must not create duplicate or out-of-order records.
- A later response must not overwrite a more recent local intent. Implementation must serialize, version, or otherwise guard cell mutations.
- Updating one cell recomputes completed cells, completed lines, unlock status, full-board status, chance cues, recent-record timestamp, and relevant list summary.
- Do not infer completion from play records, score, rank, or synchronized song data.
- The checked state means manually recorded complete in NosLog, not `officially verified complete in NOSTALGIA`.

Reset Contract

- Provide a secondary/destructive Reset Bingo record action only for a signed-in user when that board has saved progress.
- It is available whether the checklist is in progress, music-unlock complete, or full-board complete.
- Require explicit confirmation naming the board and explaining that all 25 saved checks for this board will be removed.
- Confirmation and cancellation must have unambiguous labels; initial Focus, Focus containment, Escape behavior, and return Focus must follow the adopted dialog component contract.
- On success, delete the user's progress rows for that board, recompute summaries, and remove stale recent-record references.
- On failure, preserve the confirmed checklist and show a recoverable error.
- Do not create retry cycles, attempt history, completion dates, archived boards, or lifetime earned-NOS records as a side effect.

Authentication and Permission Contract

Signed Out

- Can browse all 44 boards and open every board detail.
- Can inspect cover/title, release metadata, reward structure, the 5×5 board, and all 25 localized missions.
- Can select cells to read corresponding mission details and follow public Music links.
- Does not see completion checkboxes, $0/25$, personal status filters, personal checked mini-board cells, chance progress, or a recent-record card.
- Receives one concise login prompt near the mission editing context. Do not repeat a disabled login control on every cell or mission.
- After login, return to the same locale and exact Bingo detail when possible.

Signed In

- Receives the same public reference content plus personal manual progress controls, filters, recent record, save status, and reset when applicable.
- Authentication changes editing capability, not the board catalog or permanent availability.

Permission and Missing Resource

- Direct mutation without authentication returns an authorization outcome and never changes data.
- An invalid board or mission is a not-found/data-integrity state, not an “ended Bingo” state.
- A published-board read failure must not be presented as lack of user permission.

URL, History, and Restoration Contract

- Localized list and detail URLs remain stable and shareable.
- List filter, sort, loaded batch, and selected item context should use URL state or a history-restorable equivalent when useful.
- A list $\rightarrow$ detail $\rightarrow$ Back round trip restores the user’s catalog context.
- Mission selection may use a stable fragment or query only if it improves sharing or restoration without turning every transient focus movement into history noise.
- Login return state preserves locale, board identifier, and intended editing context.
- Reset confirmation is transient UI state and must not create a history entry.

Loading, Empty, Error, Disabled, and Destructive States

State	Required behavior
Initial catalog loading	Preserve page identity and provide a stable catalog skeleton without fake values
Next batch loading	Keep loaded boards visible; bind progress only to the explicit batch action
Catalog empty	Treat as a publishing/data failure because the approved catalog has 44 boards
Filter no result	Concisely state that no Bingo matches the current filter and preserve controls
Detail loading	Preserve board identity/return context when known and avoid cumulative layout shifts
Invalid board or mission	Provide localized not-found recovery to the permanent catalog
Signed-out editing	Omit controls and provide one contextual login prompt
Cell save pending	Preserve usable reading; prevent conflicting repeated mutation and expose saving state
Cell save failure	Revert to confirmed state, identify the failed action concisely, and allow Retry
Partial mission relation	Keep the mission readable; omit only the unavailable contextual Music link
Missing localized mission	Show verified official Japanese text with <code>lang="ja"</code> ; do not hide the mission
Reset confirmation	Name scope and consequence; do not confirm by ambiguous icon alone
Reset pending	Prevent duplicate reset while preserving the dialog's status
Reset failure	Keep saved progress intact and allow Retry or cancel
Missing cover	Use the approved media fallback without changing card or board meaning

There is no “Bingo unavailable” or “Bingo ended” runtime state in the approved permanent catalog contract.

Responsive Contract

Compact Layout

- Use 390px as the representative review canvas, not a fixed width or breakpoint.
- Verify one-dimensional reflow through 320 CSS px and intermediate widths with

long Korean, Japanese, and English content and 200% text zoom.

- The list may use two cards per row while real content remains legible. It must

collapse to one column when cover, title, mini-board, or state content no longer fits; this transition is content-driven and may occur around 350px or another tested value.

- Detail stacks board before mission list so the in-game coordinate model is available

before mission scanning.

- The board itself keeps a square 5×5 relationship, but the document must not require

two-dimensional scrolling.

- Reward information and controls wrap or recompose; they do not compress into

unreadable single rows.

Wide Layout

- Use available width for a multi-column catalog and for board/mission comparison.
- Detail may place a board/context column beside the mission-list column. Sticky board

behavior is allowed only after keyboard, zoom, and viewport-height validation.

- Do not merely enlarge the compact layout or center it inside a phone-width shell.
- Do not add more permanent filters, metadata, or repeated actions just because width

is available.

Layout Semantics

- Catalog and mission reading order remains equivalent across layouts.
- CSS visual order must not contradict DOM, keyboard, or screen-reader order.
- A miniature board may simplify labels visually, but accessible names must retain

board and progress meaning.

Accessibility Contract

- Use a semantic list for the catalog and mission collection unless a true table relationship is introduced.
- Treat the 5×5 board as one composite coordinate control. Use native buttons or an appropriate grid implementation with documented keyboard behavior; do not create 25 unlabelled clickable `div` elements.
- Every board cell exposes coordinate, localized mission summary, selected state, and, for signed-in users, manually recorded completion state.
- If roving Focus is used, Arrow keys move within the board, Home/End behavior is documented, and Tab exits the composite. If each cell is a normal button, ordinary Tab behavior must remain manageable and tested. Choose one pattern during component design and document it; do not mix both.
- Manual completion uses a native checkbox or equivalent with programmatic label and state. Board selection must not toggle it implicitly.
- Progress, unlock, chance, completion, save, and error meanings cannot rely on color, cover art, or position alone.
- Announce successful and failed manual changes without moving Focus unexpectedly.
- Reset uses a correctly named destructive confirmation dialog and returns Focus to its trigger.
- All interactive targets satisfy the approved target-size Foundation rule and remain operable by keyboard and touch.
- At 200% text zoom and 320 CSS px, long mission text, reward labels, filters, and actions reflow without clipping or overlapping the board.
- Respect reduced motion; selection and save feedback do not require movement to be understood.

Localization and Content Contract

Mission Source and Translation

- Verified official Japanese mission text is canonical domain content.
- Korean and English are independently reviewed translations, not transformations that replace the Japanese source.
- Display one mission language matching the page locale. Do not show original and translation together on every row by default.

- Mission instructions are always localized independently of the Music Detail-only translated-title disclosure.
- When approved Korean or English is missing, fall back to verified official Japanese, mark that element `lang="ja"`, and keep the surrounding interface in the selected locale.
- Do not display a verbose public translation pending message for each fallback.

Missing-review state belongs in administrator workflows.

- AI output may seed a translation draft but cannot become public until reviewed.
- Do not reverse-translate the current Korean seed and label it official Japanese.

Stable Domain Tokens

- Preserve domain tokens whose translation would damage implementation or player recognition, including `Just`, `Near`, `Miss`, `Normal`, `Hard`, `Expert`, `Real`, and `nos`.
- Translate surrounding grammar and instructions naturally for Korean, Japanese, and English rather than concatenating token-by-token fragments.
- Board coordinates remain stable across languages.

Board and Music Titles

- Show canonical original board and Music titles on Bingo surfaces. Approved Music translations/readings remain searchable and are disclosed only on Music Detail.
- Mission-instruction localization is independent from the Music Detail translation disclosure.
- Long classical titles, long artist/context names, mixed scripts, numerals, and music symbols must wrap without fixed-height clipping.

Runtime State Contract

State group	Values	Scope
Authentication	signed out, signed in	Page family
Catalog request	initial loading, ready, next-batch loading, filter empty, error	List
List query	personal status filter where authorized, sort, loaded count	List and URL/history
Recent record	absent, available	Signed-in list
Board request	loading, ready, not found, error	Detail
Mission selection	none/default, coordinate selected	Detail interaction
Manual progress	no record, in progress, music unlock complete, full board complete	Signed-in user and board
Cell mutation	confirmed unchecked, save-to-checked, confirmed checked, save-to-unchecked, failed	Signed-in user and cell
Reset	unavailable, available, confirming, pending, failed, succeeded	Signed-in user and board
Localization	approved locale text, verified Japanese fallback	Mission element
Music relation	verified link, no verified link	Mission row

Do not collapse request, authentication, selection, and manual-progress states into one overloaded card badge or a single loading boolean.

Implementation Mapping

Concern	Current source	Downstream requirement
List route and query	@@NOSLOGTOKEN0@@ and @@NOSLOGTOKEN1@@	Return all 44 published boards permanently; add restorable batch/filter/sort contract without availability filtering
List composition	@@NOSLOGTOKEN0@@	Rename live-state implications, separate signed-out/public data, and use content-responsive wide composition
Recent manual record	@@NOSLOGTOKEN0@@ and @@NOSLOGTOKEN1@@	Replace continue/active semantics with most recently manually edited board and omit when no saved progress
Filters	@@NOSLOGTOKEN0@@	Align to approved states; hide personal filters signed out; preserve restorable state
List card and miniature	@@NOSLOGTOKEN0@@ and @@NOSLOGTOKEN1@@	Preserve public identity; show personal cells/state only when authenticated
Detail route	@@NOSLOGTOKEN0@@	Separate reward meanings, signed-out public reference, and authenticated edit context
Board	@@NOSLOGTOKEN0@@	Separate selection from completion and implement an approved accessible composite pattern
Mission list and filters	@@NOSLOGTOKEN0@@ and @@NOSLOGTOKEN1@@	Synchronize coordinates; compact filtering; omit repeated signed-out edit controls
Manual mutation	@@NOSLOGTOKEN0@@ and @@NOSLOGTOKEN1@@	Preserve authorization and rollback; add stale-response/duplicate-mutation guard and explicit save feedback
Progress calculation	@@NOSLOGTOKEN0@@	Preserve twelve-line calculation and derive distinct unlock/full/chance semantics
Reset	New authenticated board-scoped action and dialog	Delete only this user's 25 board progress rows, confirm explicitly, recompute recent record, and keep no attempt history
Data model	@@NOSLOGTOKEN0@@	Add canonical Japanese plus reviewed KO/EN mission fields/statuses or an equivalent localized-content relation
Seed/import	@@NOSLOGTOKEN0@@	Source verified official Japanese; retain reviewed Korean; add reviewed English without false provenance
Localized labels	@@NOSLOGTOKEN0@@	Add complete list/detail/reward/save/reset/login/fallback strings in KO/JA/EN

Representative Fixtures

Validate at minimum:

1. signed-out and signed-in users viewing the same complete 44-board catalog;
2. no saved progress, one checked cell, multiple lines, exact unlock threshold, threshold exceeded, and all 25 cells complete;
3. one-line chance, multiple simultaneous chances, and no chance;
4. the most recently edited board changing after a cell save and after reset;
5. a board with `requiredLines` 2 and one with 7;
6. every observed reward combination, including distinct per-line, full-board, and total values;
7. FORTE, Op.2, and Op.3 metadata without version filtering;
8. a missing cover and the longest real classical title;
9. short and long Japanese official missions, reviewed Korean and English, and a missing KO/EN translation using Japanese fallback;
10. mission with and without a verified Music relation;

11. cell save success, slow save, duplicate activation, out-of-order response, authorization expiry, and save failure rollback;
12. reset cancel, success, failure, and recent-record recomputation;
13. all list filters/sorts, no-match state, first 12, next 12, and Back restoration;
14. exact board-cell and mission-row selection synchronization by mouse, touch, keyboard, and assistive technology;
15. 320px, representative 390px, intermediate widths, wide desktop, short viewport, 200% text zoom, reduced motion, and screen-reader structure.

Browser Acceptance Contract

- /ko/bingo, /ja/bingo, /en/bingo, and their detail routes resolve with equivalent behavior and localized metadata.
- Every one of the 44 permanent boards is reachable without login and no unavailable, ended, date-range, archive, or version-selector UI appears.
- Signed-out visitors can inspect all 25 missions and select board cells without seeing fake 0/25, personal checked cells, completion controls, personal filters, chance progress, or recent-record content.
- The single signed-out login prompt returns to the same locale and board after a successful login.
- Signed-in changes persist, update all derived progress/reward cues, guard against duplicate/out-of-order writes, and roll back accurately on failure.
- Music unlock, full-board completion, per-line NOS, full-board NOS, and total available NOS remain semantically distinct.
- Reset clearly names its destructive scope, removes only the current user's board records, preserves data on failure, and creates no attempt history.
- Board and mission selection remain synchronized without selection accidentally toggling completion.
- Mission instructions use the page locale when reviewed; missing KO/EN text falls back to verified Japanese with correct language metadata.
- Music-title disclosure never suppresses localized mission instructions.
- First 12 and explicit next-12 loading preserve filters, sort, loaded count, position, and useful Back behavior.
- At 320 CSS px, no card, board, mission, reward group, filter, dialog, or action causes document-level horizontal overflow, clipping, or overlap.
- Wide layouts use additional catalog and board/mission comparison space without a fixed phone-width shell or gratuitous extra controls.
- All cells, checkboxes, selectors, links, batch actions, Retry, and Reset work with keyboard alone, expose visible Focus, and retain understandable names and states.
- Loading, filter-empty, not-found, authorization, save-error, reset-error, missing relation, missing translation, and missing-cover states are distinct and recoverable where recovery exists.



- No unexpected browser console error, hydration issue, stale optimistic result, or cross-user progress leak occurs in tested normal and failure flows.

Reference Matrix

Source	Transferable principle	NosLog application	Limitation
Current Bingo routes and data	Establishes public reads, current availability filtering, progress retrieval, and recent update data	Separates observed implementation from the approved permanent catalog	Current availability and naming are not 2.0 authority
Current Bingo schema	Confirms board rewards, source metadata, cells, and user-scoped manual progress	Grounds reward and reset requirements	Does not yet support canonical JA plus reviewed KO/EN missions
Current Bingo seed	Provides all 44 real boards, 25-cell structures, long titles, versions, and reward ranges	Supplies representative production fixtures	Current Korean mission text is not verified Japanese provenance
Approved IA	Keeps Bingo an independent unlock-and-reward destination linked to Music	Preserves access and contextual Music links	Does not define list/detail anatomy
NOSTALGIA official news	Provides official Bingo availability, reward, reset, and event-domain evidence	Grounds permanent-board and reset interpretation	Official game UI does not define NosLog manual-record UX
NOSTALGIA official How to	Establishes official game vocabulary and player context	Prevents invented activation or synchronization meaning	Does not provide NosLog with user progress data
GOV.UK Task list	Tasks need clear names, status meaning, and a scan-friendly relationship	Supports coordinate-linked missions with explicit manual status	A Bingo board is spatial and cannot be reduced to a generic linear task list
GOV.UK Complete multiple tasks	Multi-step work benefits from visible progress and resumable task context	Supports recent manual record and concise progress states	Government completion flows do not define NOSTALGIA rewards
WAI-ARIA APG Checkbox	Binary completion needs programmatic checked state and labels	Governs manual mission completion	Does not define optimistic persistence or board selection
WAI-ARIA APG Grid	Composite grids require explicit Focus and keyboard behavior	Informs accessible 5 × 5 navigation if grid semantics are selected	APG grid increases implementation complexity and is not mandatory if native buttons fit
WCAG Reflow	Ordinary content must reflow at 320 CSS px without two-dimensional page scrolling	Requires compact board, mission, reward, and card reflow	Does not prescribe card count or layout tokens
WCAG Language of Parts	A fallback passage in another language needs programmatic language identification	Requires lang="ja" for Japanese mission fallback	Does not determine translation governance
Carbon Modal	Destructive modals need clear consequence, hierarchy, Focus handling, and constrained actions	Informs board-record reset confirmation	Carbon visual styling is not NosLog authority
Material Dialogs	Dialogs interrupt flow and should be reserved for necessary decisions	Supports confirmation only for reset, not ordinary mission checking	Legacy Material measurements are not adopted
eBay Confirmation dialog	Confirmations should name the action and provide safe cancellation	Supports explicit reset scope and cancel path	Marketplace task context differs from Bingo
W3C Language negotiation	Locale selection and content-language fallback are distinct concerns	Keeps page locale while one missing mission falls back to Japanese	Does not define editorial approval status
Unicode CLDR translation guide	Translation requires context, stable terminology, review, and locale-aware grammar	Supports reviewed KO/EN mission content and preserved domain tokens	CLDR itself does not supply NOSTALGIA translations
Android localization	Default/fallback resources must keep interfaces functional when locale-specific text is missing	Supports deterministic fallback instead of missing mission rows	Android resource mechanics are not copied directly into Next.js
Microsoft resource fallback	Resource lookup uses explicit culture fallback rather than ad hoc mixed content	Supports a documented mission fallback chain	.NET resource structure is not the implementation target
Apple package localization	Localized resources should preserve a base source and language-specific variants	Supports canonical-source plus reviewed variants	Apple package APIs are not used
Next.js Internationalization	Locale routes and server rendering need explicit dictionaries and routing	Aligns mission and interface locale with existing /ko, /ja, /en paths	Does not provide content-review workflow
FormatJS fallback	Runtime formatting and fallback should be deterministic and observable	Supports non-breaking fallback and complete message catalogs	Library adoption is not decided by this brief
i18next fallback	Fallback languages can be ordered without mixing every translation on screen	Supports one visible mission language with Japanese fallback	NosLog may not use i18next
Sanity localization	Field-level localization preserves content identity and editorial status	Supports per-mission canonical and translated fields	Sanity is not the NosLog CMS

Source	Transferable principle	NosLog application	Limitation
Shopify Markets fallback	Market/locale fallback must preserve a usable public experience	Supports public mission fallback while review state stays operational	Commerce markets differ from game content
Steamworks Languages	Game-facing localization needs supported-language planning and stable terminology	Supports KO/JA/EN game-domain glossary and review	Steam language support is broader than NosLog scope
GOV.UK Translations	Translated content needs ownership, maintenance, and source coordination	Supports review status and canonical Japanese provenance	Government publishing workflow is not copied wholesale
Home Office limited-English guidance	Instructions should be concise, literal, and avoid unnecessary complexity	Guides mission and login/reset support copy	English accessibility guidance does not define Japanese/Korean game vocabulary
IBM translation documentation	Fallback and translated documentation require visible, consistent language management	Supports deterministic fallback and avoids false translation claims	Documentation pages differ from per-cell missions

Evidence Convergence

- Official NOSTALGIA evidence and repository data converge on a 5×5 , reward-bearing domain object, while the lack of an official progress feed requires a manual-only NosLog contract.
- Task-list, checkbox, and grid references converge on explicit status, labeled controls, synchronized spatial/list context, and keyboard behavior. They do not justify replacing the 5×5 board with a generic linear checklist.
- Destructive-action references converge on limiting confirmation to consequential reset, naming its scope, and preserving safe cancel/Focus behavior.
- Responsive guidance and current browser evidence converge on 320 CSS px reflow and intentional desktop use rather than a fixed 390px product shell.
- Localization sources converge on canonical source content, reviewed variants, deterministic fallback, and correct language metadata. They do not support labeling reverse-translated Korean as official Japanese or publishing raw AI drafts.
- No external source determines the exact 44-board permanent contract, distinction between music unlock and full-board completion, recent-record semantics, signed-out omission rules, or absence of attempt history. Those decisions come from verified NOSTALGIA/NosLog evidence and explicit user approval.

Rejected and Superseded Alternatives

- Automatically complete missions from synchronized play records - Rejected: a qualifying record does not prove the corresponding in-game Bingo was active.
- Label one board active or currently selected - Rejected: NosLog cannot read the user's active NOSTALGIA board. Use recently manually recorded only.
- Create retry sessions, attempt counts, or completion history - Rejected: reset only clears the current checklist; no verified user need warrants a ledger.
- Add availability dates, ended states, archive, or version selector - Rejected: all 44 approved boards are permanently browsable and versions are provenance only.
- Show signed-out 0/25 and disabled completion controls - Rejected: this fabricates personal state and repeats an unavailable action 25 times.
- Hide the board from signed-out users - Rejected: board coordinates and missions

are valuable public reference information.

- Show original and translation on every mission - Rejected: one locale-matched

instruction preserves scanning; Japanese appears only as fallback where needed.

- **Treat the current Korean mission as official source and reverse-translate it -

Rejected:** official Japanese provenance must be sourced and verified.

- Use one unexplained NOS total - Superseded: line, full-board bonus, total

available, and music-unlock threshold are separate meanings.

- Make a detached persistent continue CTA - Rejected: recent record stays in the

list hierarchy and cannot imply official activity.

- Use automatic infinite scroll - Rejected: explicit batches preserve position,

control, and history.

- Keep desktop inside a fixed mobile-width shell - Rejected: 390px is a review

canvas, not a desktop layout width.

- Treat the structural discussion example as final high fidelity - Rejected: it

communicated hierarchy only; Foundation and Claude Design own final visual form.

Decision Log

ID	Decision	Status
BINGO-01	Bingo is a public reference and signed-in manual checklist, never an official synchronized state mirror	Approved
BINGO-02	All 44 boards are permanently browsable with no availability/archive/version selector	Approved
BINGO-03	sourceVersion is subordinate release provenance only	Approved
BINGO-04	Signed-out users see full board and mission reference content but no fabricated personal progress	Approved
BINGO-05	One contextual login prompt replaces repeated disabled editing controls and returns to the exact board	Approved
BINGO-06	The most recently edited manual board may appear as Recently recorded, never active/activated	Approved
BINGO-07	Progress distinguishes not started, in progress, music unlock complete, and full board complete	Approved
BINGO-08	Chance remains a secondary one-cell-from-line condition rather than a lifecycle state	Approved
BINGO-09	Required lines, per-line NOS, full-board bonus, and total available NOS remain distinct	Approved
BINGO-10	List uses compact personal filters/sorts, first 12 plus explicit next 12, and restorable context	Approved
BINGO-11	The complete 5 × 5 board remains central and synchronizes selection with the 25-mission list	Approved
BINGO-12	Selection is public and independent from signed-in manual completion	Approved
BINGO-13	Manual mutation uses authorization, optimistic feedback, rollback, and stale/duplicate-write protection	Approved
BINGO-14	Reset clears only the user's current 25-cell board record after explicit confirmation	Approved
BINGO-15	Reset creates no attempt, retry, completion-history, or lifetime-NOS record	Approved
BINGO-16	Verified official Japanese is canonical mission content; KO/EN are independently reviewed translations	Approved
BINGO-17	Mission instructions follow page locale independently from the Music Detail-only translation disclosure	Approved
BINGO-18	Missing approved KO/EN mission text falls back to verified Japanese with lang="ja"	Approved
BINGO-19	Compact layouts reflow through 320 CSS px; wide layouts use added catalog and board/mission comparison space	Approved
BINGO-20	Final high-fidelity styling remains Foundation and Claude Design work within this product contract	Approved

Handoff Boundary

Claude Design may determine final typography, visual emphasis, surfaces, cover and mini-board treatment, card proportions, column tracks, gaps, selected/check/chance styling, control appearance, dialog appearance, responsive transition points, and motion after Foundation approval. It must preserve the permanent catalog, manual-only truth model, signed-out omissions, reward meanings, central board, synchronized mission structure, reset boundary, localization provenance and fallback, state contract, accessibility, and acceptance criteria.

The later Codex implementation session must compare the Claude output against this brief. It must request a guide or design revision before implementing any design that invents live game state, auto-completes missions, hides public reference content, shows fake signed-out progress, merges unlock and full-board meaning, adds attempt history or availability UI, uses unreviewed/reverse-translated mission content, keeps a fixed phone-width desktop shell, or otherwise conflicts with the approved contract.

NosLog 2.0 Exam Page Brief

docs/design/11-exam-page-brief.md

Document Control

- Status: Approved
- Decision status: `Complete Exam-family contract approved: independent Basic,

Recital, and Event modes; official requirements; mode-specific score semantics; supported practice analysis; permanent Event reference; Basic/Recital proof and certification; proof evidence, review, privacy, and retention; URL restoration; responsive behavior; accessibility; localization; viewer/editor preservation boundary; and browser acceptance`

- Evidence status: `Repository, schema, seed, current-interface, and authenticated

workflow inspection; NOSTALGIA official guidance; original Basic and Recital result recordings; approved information architecture and related page briefs; cited rhythm-game exam, task, tabs, file-upload, security, responsive, accessibility, and internationalization references; and the user-approved decision record`

- Date started: 2026-08-03
- Last decision update: 2026-08-03
- Language: English
- Parent information architecture:

[02-information-architecture.md](#)

- Related contracts:

[03-home-page-brief.md](#), [04-shared-discovery-page-brief.md](#), [05-music-detail-page-brief.md](#), and [09-profile-page-brief.md](#)

- Scope: Localized public Exam entry and selected-Exam routes, permanent Basic,

Recital, and Event reference, signed-in score-based practice analysis where the data is trustworthy, Basic/Recital achievement proof, private moderator review, and Profile certification outcome

- Excluded: Administrator Exam-definition editor redesign, final moderator-interface

composition, automatic official Exam-result synchronization, Event certification, unsupported Recital practice prediction, final Foundation tokens, final high-fidelity composition, production implementation in this session, and Recital chart authoring or rendering

Decision Labels

- Observed: Verified in the repository, current browser evidence, official game evidence, or an approved upstream artifact.

- Approved: Explicitly agreed with the user and authoritative for downstream design.

- Proposed: Evidence-based direction awaiting user approval.

- Open: Requires further research, testing, or a user decision.

- Rejected: Considered and explicitly not selected.

- Superseded: Replaced by a later approved direction.

This brief is authoritative for the Exam family's content, scoring meaning, interaction, certification, privacy, responsive behavior, states, and acceptance criteria. Exact typography, color, spacing, radius, elevation, stage-card treatment, control dimensions, grid tracks, proof-preview styling, and content-driven transition values remain Foundation and downstream Claude Design work. Later visual work may refine expression but must not remove or reinterpret this product contract.

Purpose

The Exam family answers four ordered questions:

Which official NOSTALGIA Exam am I inspecting, what must be achieved in one ordered run, what can my synchronized records safely tell me about preparation, and how can I record an eligible Basic or Recital pass in NosLog?

It is a public official-reference and preparation surface with an optional private certification workflow. It is not a Tier list, a Bingo checklist, a generic score calculator, an official live Exam-state mirror, or a promise that independent Music bests equal a successful sequential Exam run.

Primary Context and Success

- Approved upstream: Exams remain an independent NOSTALGIA destination. They must

not be grouped with Tier lists or Bingo under a fabricated umbrella label.

- Approved: Mobile use around an arcade session is primary. Users must be able to

choose an Exam, read all three stages and cumulative conditions, and inspect or submit proof without unnecessary mode changes or two-dimensional page scrolling.

- Approved: A signed-out visitor succeeds when they can inspect every published

Basic, Recital, and Event Exam, including eligibility Grade, NOS fee, rewards, ordered stages, allowed charts, and pass conditions, without fabricated personal state.

- Approved: A signed-in visitor succeeds when they can additionally understand

eligibility, use only supported practice analysis, inspect certification state, and submit recoverable proof for an eligible Basic or Recital Exam.

- Approved: Desktop remains required. Additional width should improve simultaneous

comparison of official conditions, stages, analysis, and proof state rather than preserving a fixed approximately 390px shell.

- Approved: Current styling and geometry are audit evidence, not NosLog 2.0 visual

authority.

Current-Product and Domain Evidence

Official NOSTALGIA Evidence

- Observed: NOSTALGIA defines three Exam classes: promotion Exams in Basic and

Recital, plus special Event Exams.

- Observed: An Exam is entered from the play-mode flow and is available only at the

beginning of a three-tune play context.

- Observed: Every displayed stage condition must be met. Failure at an intermediate

condition ends the Exam; independent best scores from different plays do not prove a successful Exam run.

- Observed: Basic uses score conditions. The seeded promotion Exams use a first

single-stage threshold followed by cumulative thresholds for the first two and all three tunes.

- Observed and user-confirmed: Recital evaluates four performance categories at up

to 10 points each, for 40 points per Music performance and 120 across three tunes. Seeded Recital promotion conditions are cumulative.

- User-confirmed: The eight seeded Event Exams are permanent/always available in

NosLog's reference context. They are not separated into current and historical catalogs.

- Observed: Original Basic and Recital pass recordings show a final summary with

Exam identity, per-tune values, total condition, and a seal. The game player name remains visible in the upper-right HUD, allowing one complete frame to support a proportionate manual fan-service review.

Repository and Data Evidence

- Observed: The localized public route is currently `/[locale]/exams`; active mode

and selected Exam exist only in client state.

- Observed: The import defines 28 Exams: ten Basic promotion Exams, ten Recital

promotion Exams, and eight Event Exams. Every Exam contains ordered 1st, 2nd, and Fin stages.

- Observed: Exam, ExamStage, ExamStageChart, and ExamReward preserve mode,

scoring type, Grade, fee, required official Grade, stage conditions, multiple allowed charts, and multiple rewards.

- Observed: Published definitions are shared cached data. User play records,

achievements, and submissions are fetched outside that shared cache.

- Observed: Current Basic analysis sums chart bests from independent plays and can

compare them with cumulative conditions. It does not represent one official Exam attempt.

- Observed: Current Recital stage bests are unavailable because synchronized

PlayData does not provide the required Recital point details.

- Observed issue: Score-type Event Exams have compatible score data but current

analysis is limited by the UI to Basic mode.

- Observed issue: When an Event stage allows multiple difficulties, the current

card links to the first allowed chart. This arbitrarily chooses one permitted chart and can misrepresent the official choice.

- Observed: `User.nostalgia_name` stores the synchronized in-game player name. The

moderator submission query already retrieves it together with the private proof and Exam identity.

- Observed: ExamSubmission holds private proof, review state and notes;

ExamAchievement stores approved achievements. Legacy `exam_basic` and `exam_recital` values are still read for compatibility.

- Observed issue: The client currently uploads immediately after file selection,

without an explicit preview-and-confirm step.

- Observed issue: The visible UI omits proof from Event Exams, but the current

server availability function does not explicitly reject Event proof.

Current Interface and Browser Evidence

- Observed: The current page exposes Basic, Recital, and Event as top mode tabs,

then uses one Exam selector and one selected-Exam detail.

- Observed: Basic can show a user-controlled advice switch, eligibility/fee/reward

details, three stage cards, derived gaps, and proof upload.

- Observed: Recital shows official cumulative point conditions and proof upload but no personal analysis.
- Observed: Event shows permanent stage and reward reference, supports stages with several allowed difficulties, and omits proof.
- Observed: The current interface remains close to a narrow mobile column on wide screens. Current successful reflow is not evidence that long multilingual content, proof states, or the approved 2.0 hierarchy have been validated.

Approved Scope and Invariants

1. Basic, Recital, and Event remain separate official modes in one Exam family.
2. Show one selected Exam at a time. Do not expose ten Grade buttons or every Event as persistent top-level controls.
3. Official requirements always take priority over personal analysis and proof.
4. Preserve exact ordered stages, allowed charts, scoring type, single/cumulative conditions, required official Grade, NOS fee, and reward meaning.
5. Personal analysis is labeled and treated as *Practice analysis*; it is never an official attempt result or pass forecast.
6. Basic and score-type Event analysis may use synchronized independent bests with an explicit limitation. Recital and Recital-point Event analysis remain absent until reliable Recital detail exists.
7. Event Exams are permanent public reference content and never create NosLog Exam certification, proof submissions, or Profile Exam titles.
8. Basic and Recital certification is based on private one-image manual proof review.
9. A higher approved Grade in a mode implies completion of easier Grades in that same mode. NosLog presents the highest approved official Exam title rather than a stack of every lower title.
10. ExamAchievement or its normalized successor is the authoritative certification source. Legacy exam_basic and exam_recital are migration/compatibility inputs, not parallel authorities.
11. The complete existing chart viewer/editor is outside this brief and remains unchanged under document 07; Exam requirements do not create future chart work.

Approved Information Hierarchy

Use one semantic main and the following mobile-first source order:

1. page identity and concise Exam explanation;
2. Basic/Recital/Event mode control;
3. selected-Exam control and selected Exam identity;
4. official entry information: required Grade, fee, reward, availability and approved certification state where applicable;
5. ordered three-stage official requirements and allowed charts;
6. supported signed-in Practice analysis;

7. contextual Basic/Recital proof state and action.

Official facts must remain understandable when analysis or proof is absent. Practice analysis and proof are subordinate utilities, not competing dashboard summaries.

Navigation, Selection, and URL Contract

Entry and Selected Routes

- Keep `/[[locale]]/exams` as the stable family entry.
- Give each published Exam a stable `/[[locale]]/exams/[[slug]]` destination.
- Selecting an Exam must update navigation/history to its stable destination rather

than remaining only in ephemeral component state.

- The active mode is derived from the selected Exam. Mode changes expose that mode's compact Exam selector and a deterministic published selection; they do not create a second contradictory hidden selection.

- Browser Back restores the previous mode, selected Exam, analysis disclosure, and useful reading position when feasible.

- Direct links and refreshes reproduce the same selected Exam and official content.

Mode and Exam Controls

- Basic, Recital, and Event are the only top-level mode choices.
- Use one accessible exclusive mode control. If tabs are used, implement complete tab keyboard and controlled-panel semantics.
- Use one compact Grade/Event selector such as a select, combobox, or popover. Its exact visual form remains Foundation/Claude Design work.
- Options communicate Grade/Event identity and concise eligibility or achievement state without turning the control into a wall of badges.
- Do not hide official Exams that the current user cannot yet enter. Eligibility affects personal action, not public reference access.

Official Exam Information Contract

Entry and Reward Context

Every selected Exam displays:

- official mode and Exam title;
- required official Grade;
- the user's current relevant Grade only when signed in and available;
- NOS fee;
- official reward or promotion outcome;
- ordered three-stage requirement summary;
- current NosLog certification status for Basic/Recital when signed in.

Do not collapse Grade eligibility, NOS fee, reward, and certification into one generic status. These are different questions.

Stage Contract

Each stage preserves:

- 1st, 2nd, or Fin sequence position;
- original Music title;
- artist where useful;
- every allowed difficulty and level;
- whether the threshold applies to that stage alone or cumulative performance;
- exact required score or Recital points;
- an unambiguous Music-detail path that does not silently choose the first allowed

chart when several are valid.

When several difficulties are allowed, show the complete set and route to a Music context where the permitted set remains understandable. Do not imply that the lowest or first stored chart is the official default.

Mode-Specific Scoring Contract

Basic

- Display score values with locale-aware separators and no unit that could be confused with Recital points.
- Preserve the official threshold sequence exactly. Seeded promotion Exams use a first-tune threshold, first-plus-second cumulative threshold, and three-tune total.
- Practice analysis may compare each chart's synchronized best score with an implied per-stage preparation target and official cumulative thresholds.
- A prominent plain-language limitation states that these bests come from independent plays and do not prove the player can pass all stages in one Exam run.

Recital

- Explain the scoring model as four evaluation categories $\times$ 10 points = 40 points per tune, 120 points across three tunes.
- Preserve cumulative thresholds such as 24, 52, and 84 without converting them into Basic score or percentage semantics.
- Do not fabricate per-category or per-stage personal values when the synchronization source does not provide them.
- Omit the Practice-analysis module instead of rendering a misleading zero, disabled calculator, or Basic-score substitute.
- When a future reliable Recital source exists, add a separately researched and approved Recital analysis; do not automatically reuse Basic logic.

Event

- Treat all eight seeded Events as permanent/always available reference content.
- Do not add date ranges, ended badges, current/archive grouping, or a historical

mode selector.

- Preserve each Event's actual scoring type. Score Events may use the approved Basic score-analysis model; Recital-point Events follow the Recital no-analysis rule until reliable data exists.
- Show every permitted difficulty and every Music-unlock reward.
- Event never exposes proof, certification, Profile title, or achievement state.

Practice Analysis Contract

- Show only for a signed-in user and an Exam/scoring type supported by synchronized data.
- Label the module `Practice analysis`, not `Pass probability`, `Expected result`, `Simulation`, or another phrase that implies an official attempt.
- Keep it secondary to official conditions and user-controlled when the amount of detail would otherwise dominate the page.
- It may include stage best, preparation target, shortfall, cumulative comparison, rank/FC/Pianist marker, Max Combo, and Miss/Near where supported.
- Note-type success rates may inform a concise practice cue only where the underlying data is valid; they must not be converted into an Exam pass claim.
- Never sum unavailable stages into an optimistic 0 or infer a Recital value from Basic score, judgement counts, or note-type success rates.
- The limitation about independent bests remains visible or programmatically adjacent whenever derived totals are shown.

Certification and Achievement Contract

Eligibility and Meaning

- Certification applies only to Basic and Recital promotion Exams.
- Proof submission requires authentication, a published Exam, an official Grade that meets the Exam's `requiredGrade`, no existing approved achievement at that Grade or higher, and no active pending submission.
- Public reference remains visible when the user is signed out or ineligible. Only the personal certification action is unavailable.
- Event proof is rejected on the server even if a client is modified to request it.
- Approved proof records a NosLog-verified fan-service achievement. It must not claim to be an official KONAMI certificate or cryptographic identity verification.

Grade Inheritance and Profile Display

- An approved higher Grade implies all easier Grades in the same mode.
- Do not require separate proof or duplicate visible badges for implied lower Grades.
- Exam selectors may communicate implied completion, but the Profile shows the highest approved Basic title and highest approved Recital title only.

- Migration must reconcile legacy `exam_basic/exam_recital` with normalized achievements without downgrading an already recognized user.
- Do not allow the legacy and normalized sources to disagree silently. Complete the migration and then treat the normalized source as authoritative.

Proof Evidence Standard

Required One-Image Content

One image must show all of the following in the same readable frame:

1. the final three-tune Exam result, not an individual Music result or intermediate stage screen;
2. Basic or Recital mode;
3. the submitted Grade;
4. the final mark; and
5. the NOSTALGIA player name in the upper-right HUD.

The visible game player name must match the user's latest synchronized `nostalgia_name`. Compare it with the private moderator record, not the public NosLog username. Public `hide_nostalgia_name` preference does not hide this private review fact from authorized moderators.

If the player changed their NOSTALGIA name, instruct them to synchronize again before submitting. A missing, illegible, or materially mismatched name is rejected with a specific reason and a resubmission path.

Permitted and Rejected Image Treatment

- A full cabinet or keyboard photo is not required.
- Cropping is allowed only when every required result and identity region remains readable in one frame.
- Rotation, perspective correction, and ordinary compression are allowed.
- Image stitching, replacement of result/name content, or covering a required region is not accepted.
- Do not require an embedded date, camera metadata, or EXIF. The achievement is not time-limited and the official final result does not expose a reliable date.
- This is proportionate manual moderation, not fraud-proof identity verification. Do not add a two-image, video, handwritten-code, or full-cabinet requirement without a new evidence-backed approval.

Proof Submission and Review Contract

Choose, Preview, and Submit

- Accept one JPEG, PNG, or WebP image up to 4 MB.
- File selection enters a local preparation state and displays a readable preview, filename/type/size summary, replace action, and explicit submit action.
- Do not upload immediately when the operating-system file picker closes.
- Before confirmation, state the five required visible elements, private review use,

and six-month evidence-retention period concisely.

- Cancel or replace before submit must not leave an owned orphan Blob.

Upload and Review States

The workflow distinguishes:

1. not submitted;
 2. file selected/preparing;
 3. uploading and finalizing;
 4. pending manual review;
 5. approved;
 6. rejected with moderator reason and resubmit action; and
 7. recoverable upload or submission error.
- Disable duplicate submit while uploading or pending.
 - If Blob upload succeeds but submission creation fails, delete the owned temporary

Blob or expose a safe retry that cannot create duplicate submissions.

- Replacing a rejected submission removes or supersedes the old rejected evidence according to the approved retention policy; do not accumulate an unbounded visible stack in the user flow.

- Approval creates or updates normalized achievement state and applies Grade inheritance.

- Rejection never removes an earlier higher approved Grade.

Privacy, Authorization, and Retention

- Store proof in private Blob storage. Never expose a public object URL.
- Only the submitting user may see their submission state; only authorized moderators may view the private image and review identity.
- Validate authentication, ownership, Exam type, eligibility, pending/approved state, MIME type, size, and owned private path on the server. Client accept is only a convenience.
- Use generated server-controlled storage paths and do not trust user-provided filenames as object authority.
- Preserve reviewer reason for user recovery while it is retained; do not expose internal moderator-only notes publicly.
- Delete approved evidence and sensitive review notes six months after review while retaining the achievement. Delete rejected evidence according to the existing six-month privacy rule. Account deletion removes submissions, private images, and achievements according to the product privacy contract.

Authentication and Permission Contract

Signed Out

- Show complete public Exam reference.
- Omit fabricated player Grade, personal bests, practice analysis, achievement, and

submission state.

- Provide at most one contextual login action where certification would otherwise

begin; do not repeat disabled proof controls for every Exam stage.

- Preserve locale and selected Exam after successful login.

Signed In

- Show the relevant synchronized official Grade when available.
- If no Grade/sync data exists, explain that data synchronization is required for eligibility and player-name comparison; do not fabricate zero.
- If Grade is below the requirement, keep reference content readable and state the concise personal reason the proof action is unavailable.
- If achieved, show approved state instead of another upload action.
- If pending, show review state and block duplicates.
- If rejected, show the user-facing reason and one resubmit path.

Missing and Unauthorized Resources

- Draft, deleted, or unknown Exams do not leak private definitions.
- A direct unknown slug returns the localized not-found contract, not a silent default to another Exam.
- Authorization expiry during upload preserves the local selection where safe and provides a locale-preserving login/retry path.

Loading, Empty, Error, Disabled, and Destructive States

State	Required behavior
Initial definition loading	Preserve page identity and show shape-stable selected-Exam/stage placeholders without fabricated values
Mode has no published Exams	Show one concise localized empty message and keep the other modes usable
Selected Exam not found	Use localized not-found behavior; do not silently open a different Exam
Personal data loading	Keep official reference stable; update only personal eligibility/analysis/proof regions
Signed out	Omit personal values; preserve public reference and one contextual login path
No synchronized Grade/name	Explain sync requirement in the personal action context; do not show $\emptyset$ or an empty proof picker
Official Grade insufficient	Keep official content; disable only certification and state the requirement concisely
Unsupported analysis	Omit the module or provide one concise explanation; never show a fake zero analysis
Slow supported analysis	Keep official content readable and mark only the analysis region busy
File selected	Show local preview, requirements, replace/cancel, and explicit submit; no network upload yet
Invalid type/size	Identify the exact problem adjacent to the picker while retaining a recoverable selection path
Uploading	Mark the proof region busy, prevent duplicate action, and retain stable page content
Pending review	Show pending status and submission date if useful; do not offer duplicate upload
Approved	Show achieved status and inherited lower-Grade meaning; no upload action
Rejected	Show concise moderator reason and resubmit action without exposing internal notes
Upload/finalize error	Keep or safely discard the preview according to ownership state and provide Retry
Private image expired	Preserve achievement and explain to moderators that evidence was deleted by retention policy

No general page error should erase useful cached official reference when only personal analysis or proof state fails.

Responsive Contract

Compact Layout

- Use 390px as a representative review canvas, not a fixed product width.
- Reflow through 320 CSS px without document-level horizontal scrolling.
- Keep one-column source order, compact mode control, compact Exam selector, official context, vertical ordered stages, optional analysis, and proof state.
- Do not force stage requirements into a wide comparison table. Cumulative relationships must remain explicit in text or connected cards.
- Long Japanese classical titles, translated titles, artists, score values, and review reasons wrap without fixed-height clipping.
- File preview remains contained and does not push controls beyond the viewport.

Wide Layout

- Use additional width for meaningful comparison: selected-Exam navigation beside official detail, or official stages beside supported analysis/proof, when reading and keyboard order remain coherent.
- Do not promote every Grade/Event into a permanent button grid merely because width is available.

- Do not stretch three stage cards so far that Music titles and thresholds lose their relationship.
- Keep proof and personal analysis visibly subordinate to official requirements.

Layout Semantics

- DOM order remains meaningful without CSS placement.
- Responsive movement does not duplicate controls or personal state in the accessibility tree.
- Use viewport breakpoints or container queries at content failure points, not device names or the legacy fixed mobile shell.

Accessibility Contract

- Use one h1, ordered section headings, and an ordered list or equivalent semantic structure for 1st, 2nd, and Fin.
 - The Basic/Recital/Event control exposes selected state, name, controlled content, and complete keyboard behavior for its chosen native/APG pattern.
 - The Exam selector has a persistent accessible label, announces selected Exam and relevant eligibility/achievement context, and does not rely on visual badges alone.
 - Single versus cumulative thresholds are stated in text; arrows, indentation, or color may supplement but never replace the relationship.
 - Scores and Recital points use understandable labels and locale-aware numbers.
 - Passed, insufficient, locked, pending, approved, and rejected states do not rely on color alone.
 - Practice-analysis totals include their independent-best limitation in nearby visible text and programmatic description.
 - The file input remains a native operable input or equivalent labeled control.
- Preview, replace, cancel, submit, progress, success, and error are keyboard operable.
- Upload validation errors identify the failing field and preserve Focus or move it to the actionable error summary according to the final form pattern.
 - Async upload/review-state changes use appropriately scoped status announcements without repeatedly reading the entire page.
 - Dialogs, if used for final submission confirmation, trap and restore Focus correctly, support Escape where cancellation is safe, and do not obscure the evidence requirements.
 - Respect reduced motion. No Exam/pass styling may require animation to understand status.
 - At 200% text zoom and 320 CSS px, no official condition, player-name instruction, rejection reason, or action is clipped.

Localization and Content Contract

Interface and Domain Terms

- Provide complete Korean, Japanese, and English interface strings for modes, eligibility, fee, reward, stages, cumulative conditions, practice limitations, proof requirements, review states, errors, and retention.
- Preserve stable recognizable tokens where translation would harm game recognition, including Basic, Recital, Event, Normal, Hard, Expert, Real, and nos.
- Localize surrounding grammar, Grade labels, score/point units, dates, and status copy naturally rather than concatenating token fragments.
- The result evidence requirement may quote the official Japanese mark and explain it in the page locale.

Exam and Music Content

- Official Japanese Exam/Event names and Music titles are canonical domain content.
 - Korean and English Exam descriptions/reward explanations require reviewed localized fields or an equivalent localized-content model; the current single Exam text fields are not sufficient authority for all three locales.
 - Show the original Music title only in Exam stage references. Approved translations and readings remain searchable and are disclosed on the linked Music Detail page.
 - Missing reviewed Exam translation falls back deterministically to canonical Japanese with correct `lang="ja"`; do not present a Korean seed label as official Japanese.
 - Long titles and mixed scripts must remain complete in official stage reference.
- Visual truncation may be used only where a full accessible value and reliable expansion/destination remain available.

Runtime State Contract

State group	Values	Scope
Authentication	signed out, signed in, expired during action	Family and personal actions
Definition request	loading, ready, mode empty, selected not found, error	Public Exam reference
Active selection	Basic/Recital/Event, selected slug	URL and history
Eligibility	unknown/no sync, insufficient Grade, eligible	Signed-in Basic/Recital proof
Official scoring	Basic score, Recital point, Event score, Event Recital point	Selected Exam
Analysis support	hidden signed out, supported idle, supported busy, ready, error, unsupported	Personal analysis
Achievement	none, exact approved, implied by higher Grade	Signed-in Basic/Recital
Submission	none, file preparing, uploading, pending, approved, rejected, error	Signed-in eligible Exam
Proof file	absent, valid preview, invalid type, too large, replaced/cancelled	Local and upload flow
Private evidence	retained, expired after retention	Moderator context
Music relation	one allowed chart, multiple allowed charts, reward link, missing relation	Official stages/rewards
Localization	approved locale content, canonical Japanese fallback	Text element

Do not collapse official eligibility, analysis support, achievement, and submission into one status or a page-global loading boolean.

Implementation Mapping

Concern	Current source	Downstream requirement
Entry route	@@NOSLOGTOKEN0@@	Add stable selected <code>/[locale]/exams/[slug]</code> destinations and history restoration while retaining public entry
Definition data	@@NOSLOGTOKEN0@@	Preserve shared public cache; localize Exam content; keep personal state outside shared cache
Exam import	@@NOSLOGTOKEN0@@	Preserve 10 Basic, 10 Recital, 8 permanent Event definitions and exact scoring/conditions/rewards
Exam schema	@@NOSLOGTOKEN0@@	Support localized Exam content and normalized certification authority; preserve allowed-chart multiplicity
Dashboard composition	@@NOSLOGTOKEN0@@	Replace client-only selection with URL contract; preserve one selected Exam; scope analysis/proof correctly
Mode control	@@NOSLOGTOKEN0@@	Keep three exclusive modes with accessible semantics and compact responsive treatment
Exam selector	@@NOSLOGTOKEN0@@	Keep one compact selector, avoid persistent Grade button wall, express eligibility/achievement without hiding Exams
Official overview	@@NOSLOGTOKEN0@@	Make required Grade, fee, reward, and availability clear official facts rather than an easily missed optional detail
Stage list	@@NOSLOGTOKEN0@@	Preserve order and cumulative meaning; show every allowed chart; remove arbitrary first-chart routing
Current analysis	@@NOSLOGTOKEN0@@ and @@NOSLOGTOKEN1@@	Rename/reframe as Practice analysis, add independent-best limitation, support score Events, never fabricate Recital values
Proof UI	@@NOSLOGTOKEN0@@	Add choose-preview-confirm, evidence checklist, complete state model, and accessible recovery
Proof server	@@NOSLOGTOKEN0@@	Explicitly reject Event, validate eligibility/name-related prerequisites and private ownership, prevent duplicates/orphans
Moderator review	@@NOSLOGTOKEN0@@ and @@NOSLOGTOKEN1@@	Compare proof player name with private synchronized <code>nostalgia_name</code> , enforce evidence criteria, preserve safe approval/rejection and retention
Achievement source	ExamAchievement, legacy <code>exam_basic</code> , and <code>exam_recital</code> in @@NOSLOGTOKEN3@@	Migrate to one authoritative normalized source and derive easier Grades from the highest approved Grade
Privacy cleanup	Current private-image retention jobs and Privacy contract	Delete evidence/notes after six months while preserving approved achievement and account-deletion cascade
Localization	@@NOSLOGTOKEN0@@	Add complete KO/JA/EN selection, scoring, analysis, proof, review, error, and fallback strings
Chart system boundary	Viewer/editor preservation contract	Make no viewer/editor, renderer, schema, palette, geometry, or Recital-dynamics change under this brief

Representative Fixtures

Validate at minimum:

1. signed-out and signed-in visitors on the same Basic, Recital, and Event definitions;
2. Basic 10th and 1st Grade, Recital 10th and 1st Grade, a score Event, and a Recital-point Event;
3. exact single then cumulative thresholds and a long three-stage classical title;
4. one allowed chart and four allowed charts without arbitrary first-chart selection;
5. no synchronized Grade, insufficient Grade, exact eligibility, and already higher approved Grade;
6. no stage record, partial Basic records, all Basic records, and analysis request failure;
7. independent Basic bests that exceed the mathematical total but carry no official

pass claim;

8. Recital's four $\times$ 10, 40-per-tune, 120-total explanation with no personal Recital data;
9. Event reward with one Music and with multiple Music rewards;
10. no proof, valid local preview, invalid type, over 4 MB, replacement, cancellation, upload, and finalization failure;
11. pending, approved, rejected-with-reason, resubmit, and retained achievement after proof expiry;
12. proof with all five required elements, cropped-but-complete proof, missing player name, mismatched name, intermediate-stage screenshot, and edited/composite proof;
13. hidden public NOSTALGIA name while authorized moderator comparison still works;
14. unknown slug, deleted/draft Exam, authorization expiry, duplicate submit, and client attempt to submit Event proof;
15. original Japanese plus reviewed Korean/English Exam content and canonical Japanese fallback;
16. 320px, representative 390px, intermediate widths, wide desktop, short viewport, 200% text zoom, reduced motion, keyboard-only, and screen-reader use.

Browser Acceptance Contract

- /ko/exams, /ja/exams, /en/exams, and every published selected-Exam slug resolve with equivalent behavior and localized metadata.
- Direct links, refresh, mode changes, selected Exam changes, Music-detail round trips, and browser Back preserve or restore the correct Exam and useful position.
- All 28 approved definitions remain reachable; Event is one permanent catalog with no date/archive/current distinction.
- Signed-out users can read all official requirements and rewards without fabricated Grade, record, analysis, achievement, or submission state.
- Basic, Recital, Event score, and Event Recital-point values retain correct units and cumulative meaning.
- Every stage exposes all allowed charts, and no multi-chart Event silently routes to the first stored difficulty as if it were official.
- Supported Practice analysis is clearly subordinate, labels independent bests, and never states or visually implies an official pass forecast.
- Recital and Recital-point Event show no fabricated personal analysis until a separately approved reliable source exists.
- Basic/Recital proof is available only for an authenticated eligible user without a pending or equal/higher approved achievement. Event proof is rejected on the server.
- File selection creates a local preview and does not upload until explicit submit.
- Valid upload supports only JPEG/PNG/WebP up to 4 MB, private storage, duplicate prevention, orphan cleanup, and recoverable failure states.

- Moderator review can see the submitted Exam, private image, and synchronized NOSTALGIA name, and applies the five-element evidence rule.
- Approval derives easier same-mode Grades, Profile displays only the highest approved mode title, and proof expiry does not remove the achievement.
- Rejection exposes a concise user-facing reason and allows a safe resubmission.
- At 320 CSS px, no selector, stage, cumulative condition, long title, analysis, proof preview, reason, or action causes document-level horizontal overflow, clipping, or overlap.
- Wide layouts use added comparison space without a fixed phone-width shell or a wall of Grade/Event buttons.
- Mode and Exam controls, Music links, analysis disclosure, proof selection, replacement, cancel, submit, Retry, and login work with keyboard alone and expose visible Focus.
- Status and validation changes are announced without relying on color or excessive live-region output.
- No unexpected browser console error, hydration issue, public private-image URL, cross-user state leak, duplicate submission, or stale selected-Exam state occurs in tested normal and failure flows.

Reference Matrix

Source	Transferable principle	NosLog application	Limitation
Current Exam entry/data	Establishes public definitions, personal-state boundary, title localization, and current client-only selection	Grounds observed implementation and migration	Current layout and URL behavior are not 2.0 authority
Current Exam components	Shows three modes, one selector, analysis, stages, and proof flow	Identifies useful composition and current gaps	Immediate upload and Basic-only analysis are superseded
Current Exam schema	Preserves stages, allowed charts, rewards, submissions, achievements, and player name	Grounds data and privacy requirements	Legacy and normalized achievement sources still coexist
Current Exam import	Supplies all 28 real definitions and mode-specific thresholds	Provides representative fixtures and permanent Event set	Imported text is not complete KO/JA/EN editorial authority
Approved IA	Keeps Exams independent from Tier lists and Bingo	Preserves navigation and product meaning	Does not define Exam anatomy
Approved Music detail brief	Defines contextual Music/chart destinations and localized title hierarchy	Supports unambiguous stage-to-Music navigation	Does not define Exam scoring
Approved Profile brief	Displays highest Basic/Recital Exam titles in public performance identity	Aligns achievement outcome	Does not define proof review
NOSTALGIA Op.3 official How to	Defines Basic/Recital/Event Exams, three-stage conditions, and fail behavior	Establishes official truth hierarchy and sequential-run limitation	Does not define NosLog analysis or proof UX
NOSTALGIA Op.2 official How to	Documents Recital result/evaluation and Exam structure	Supports Recital-specific semantics	Older version imagery is not current visual authority
NOSTALGIA Op.3 official News	Publishes Grade/Exam additions and rewards	Supports official provenance and Event reward reference	News chronology does not justify an archive UI
Original Basic 3rd Grade pass recording	Final pass summary contains Grade, stage values, total, , and upper-right player identity	Validates one-frame evidence criteria	One uploader and capture setup cannot define security policy alone
Original Recital 1st Grade pass recording	Recital final summary shows point totals and the same persistent player-identity area	Confirms cross-mode evidence anatomy	Recording quality varies from user proof
Independent Basic 8th Grade recording	Independently confirms player name persists in the upper-right result context	Reduces dependence on one uploader	Op.2 visual styling is not 2.0 design authority
SOUND VOLTEX Skill Analyzer	Skill examinations separate course identity, ordered tracks, conditions, and outcome	Supports ordered official Exam reference	SDVX gauges and course ranks do not map to NOSTALGIA scoring
SOUND VOLTEX game modes	Distinct play purposes remain recognizable modes	Supports Basic/Recital/Event separation	Does not determine NosLog selector styling
IIDX course mode	Sequential course performance differs from independent song records	Reinforces no pass forecast from independent bests	IIDX gauge/failure rules differ
IIDX Play Data	Official identity and play records are separate from external service analysis	Supports explicit provenance and identity comparison	Does not authorize NosLog proof
CHUNITHM Class Certification	Certification tasks use ordered course and clear eligibility/outcome framing	Supports official-condition priority	CHUNITHM's life system is not adopted
Taiko Dan-i Dojo	Course conditions need exact per-song/overall interpretation	Supports explicit single/cumulative wording	Taiko achievement metrics differ
maimai course guidance	Skill/course modes benefit from clear selection and outcome context	Supports compact course navigation	Mode mechanics are not copied
Carbon Tabs	A small exclusive peer set may use tabs with complete keyboard behavior	Supports three mode choices	Carbon styling and measurements are not NosLog authority
GOV.UK Task list	Ordered tasks need visible status and scan-friendly relationships	Supports stage sequence and condition clarity	Generic tasks cannot replace musical stage semantics
USWDS Step indicator	Step order and current/completed meaning must be explicit and accessible	Informs ordered stages without requiring a stepper	The Exam is reference, not an interactive wizard
USWDS File input	File inputs need accepted formats, guidance, drag/selection behavior, and validation	Supports accessible proof choice	USWDS styling is not adopted
USWDS File input accessibility tests	Keyboard, label, error, zoom, and assistive-technology behavior require explicit tests	Grounds proof acceptance tests	Does not define private moderation
Carbon File uploader	Selected, uploading, success, error, and removal are distinct states	Supports choose-preview-submit and state model	Carbon's upload variants are not copied visually
MDN file input	accept guides selection but server validation remains necessary	Supports native input and MIME validation	Browser metadata is not proof authenticity
OWASP File Upload Cheat Sheet	Allowlist, size limits, generated names, private storage, authorization, and cleanup reduce upload risk	Grounds private proof security	Security controls do not determine evidence meaning

Source	Transferable principle	NosLog application	Limitation
OWASP Authorization Cheat Sheet	Authorization must be enforced server-side on every object action	Prevents cross-user proof access and Event bypass	Does not define UI hierarchy
WCAG Error Identification	Errors must identify the problem in text and be associated with the field/action	Supports upload and rejection recovery	Does not prescribe exact copy
WCAG Reflow	Content must preserve information and function at 320 CSS px without two-dimensional page scrolling	Requires compact stages and proof flow	Does not prescribe layout tokens
WAI-ARIA APG Tabs	Tab patterns require selected/controlled relationships and keyboard navigation	Governs mode tabs if selected	A native alternative may be more suitable after Foundation testing
W3C Internationalization techniques	Mixed-language content needs correct language metadata and script-aware layout	Supports Japanese fallback and KO/JA/EN content	Exact typography remains Foundation work

Evidence Convergence

- Official NOSTALGIA and comparable rhythm-game course references converge on exact ordered requirements and one-run outcomes. They do not support treating independent Music bests as an official pass forecast.
- The current data model and official scoring evidence converge on separate Basic and Recital analysis logic. They do not support inventing Recital values from Basic data.
- Tabs and selection references converge on a small three-mode control plus one compact Exam selector rather than many persistent Grade/Event buttons.
- Original result recordings converge on a one-frame Basic/Recital evidence anatomy: final Exam identity, Grade, , and upper-right player name. This supports a proportionate one-image manual workflow, not strong identity assurance.
- File-upload, security, and authorization references converge on explicit selection, preview/state feedback, server validation, private storage, ownership checks, and cleanup. They do not validate the content of a game screenshot; moderator criteria remain necessary.
- Responsive and internationalization references converge on 320 CSS px reflow, complete long titles, explicit units, and correct language metadata rather than a fixed 390px product shell.
- No external source determines permanent Event treatment, exact proof eligibility, six-month retention, Grade inheritance, or highest-title Profile display. Those decisions come from verified NosLog/NOSTALGIA behavior, the Privacy contract, and explicit user approval.

Rejected and Superseded Alternatives

- Combine Exams with Tier lists or Bingo under a Challenge landing page - Rejected: the three are distinct NOSTALGIA concepts and user tasks.
- Expose every Grade/Event as persistent buttons - Rejected: one compact selector preserves hierarchy and scales across modes/locales.
- Keep selected Exam only in client state - Superseded: every Exam receives a stable shareable/restorable slug route.
- Make official entry information an easily missed optional detail - Superseded: eligibility, fee, reward, stages, and conditions are primary reference facts.
- Call independent-best arithmetic a simulation or pass likelihood - Rejected: it cannot represent a sequential official run.

- Apply Basic analysis to Recital - Rejected: score and four-category Recital point semantics are different and current synchronized Recital details are absent.
- Hide all Event analysis because mode is Event - Superseded: scoring type, not the Event label alone, determines whether score-based Practice analysis is supported.
- Split Event into current and archive or add a version selector - Rejected: the approved eight-Exam reference set is permanent and release history is not a mode.
- Link a multi-chart Event stage to its first stored chart - Rejected: every allowed chart must remain visible and the destination cannot imply an arbitrary default.
- Allow Event proof or Profile title - Rejected: Event remains reward/reference content, not NosLog certification.
- Show every implied lower Grade on Profile - Rejected: show only the highest approved Basic and Recital title.
- Maintain legacy and normalized achievements as equal authorities - Rejected: migrate and use one normalized source.
- Upload immediately after file selection - Superseded: selection is followed by preview and explicit submit.
- **Require two images, video, handwritten code, full cabinet, date, or EXIF - Rejected: ** disproportionate friction without reliable additional assurance for this fan-service workflow.
- Accept an individual Music result or cropped frame without player name - Rejected: the one image must contain all five approved evidence elements.
- Expose proof through public Blob URLs - Rejected: evidence remains private and retention-limited.
- Keep desktop inside a fixed mobile-width shell - Rejected: 390px is a representative review canvas, not a desktop layout width.
- **Add Recital strong/weak chart backgrounds or any related editor/viewer behavior - Rejected from this scope: ** the complete viewer/editor is a locked preservation exception. This brief does not register that idea as future NosLog 2.0 work.

Decision Log

ID	Decision	Status
EXAM-01	Exams remain an independent public NOSTALGIA page family	Approved
EXAM-02	Basic, Recital, and Event are the only top-level peer modes	Approved
EXAM-03	Show one selected Exam with one compact Grade/Event selector	Approved
EXAM-04	Every selected Exam has a stable localized slug route and restorable history	Approved
EXAM-05	Official Grade, fee, reward, stage order, allowed charts, and conditions precede personal tools	Approved
EXAM-06	Basic promotion conditions preserve single then cumulative score semantics	Approved
EXAM-07	Recital uses four categories $\times 10$, 40 per tune, 120 total, and its own cumulative point semantics	Approved
EXAM-08	Personal derived content is named Practice analysis and never predicts an official pass	Approved
EXAM-09	Basic and score Events may use independent-best Practice analysis with an explicit limitation	Approved
EXAM-10	Recital and Recital-point Event analysis is omitted until reliable Recital details exist	Approved
EXAM-11	All eight seeded Event Exams are permanent reference content with no archive/version split	Approved
EXAM-12	Multi-chart stages expose every allowed chart and never imply the first stored chart is official	Approved
EXAM-13	Event has no proof, NosLog certification, achievement, or Profile Exam title	Approved
EXAM-14	Basic/Recital proof requires authentication, official Grade eligibility, and no pending/equal-or-higher approval	Approved
EXAM-15	One proof image must show final result, mode, Grade, , and matching upper-right player name	Approved
EXAM-16	Proof supports crop/rotation/perspective/compression but not missing regions, stitching, or result/name alteration	Approved
EXAM-17	Proof does not require full cabinet, second image, video, date, handwritten code, or EXIF	Approved
EXAM-18	File flow is one JPEG/PNG/WebP up to 4 MB with choose, preview, explicit submit, and recoverable states	Approved
EXAM-19	Proof is private, server-authorized, moderator-reviewed, and deleted after six months while achievement remains	Approved
EXAM-20	Synchronized nostalgia_name is the private comparison identity even when hidden publicly	Approved
EXAM-21	Higher approved Grade implies easier same-mode Grades; Profile shows the highest title only	Approved
EXAM-22	Normalized Exam achievement becomes authoritative after legacy reconciliation	Approved
EXAM-23	Compact layouts reflow through 320 CSS px and wide layouts use meaningful comparison space	Approved
EXAM-24	Exam requirements do not authorize any viewer/editor or Recital-dynamics change; document 07 preserves the complete experiences	Approved correction

Handoff Boundary

Claude Design may determine final type scale, visual emphasis, surface treatment, mode-control appearance, selector pattern, stage-card anatomy, cumulative connectors, column proportions, grid tracks, gaps, proof-preview styling, status treatment, responsive transition points, and motion after Foundation approval. It must preserve the official-first hierarchy, mode/scoring distinctions, permanent Event meaning, supported-analysis boundary, one-image evidence criteria, private proof lifecycle, Grade inheritance, localization, accessibility, and acceptance criteria.

The later Codex implementation session must compare the Claude output against this brief. It must request a guide or design revision before implementing any design that combines Exams with Tier/Bingo, exposes a button wall, hides official requirements, predicts a pass from independent bests, fabricates Recital analysis, archives permanent Events, silently selects one allowed Event chart, accepts Event proof, auto-uploads on file selection, omits player-name comparison, exposes private evidence, shows every lower Grade title, adds unapproved Recital chart semantics, keeps a fixed phone-width desktop shell, or otherwise conflicts with the approved contract.

NosLog 2.0 Arcade Discovery and Detail Page Brief

docs/design/12-arcade-discovery-page-brief.md

Document Control

- Status: Approved
- Decision status: `Complete Arcade-family contract approved: synchronized`

list-and-map discovery; explicit nearby and map-area search; stable detail routes; community-preference visualization; per-machine availability and condition; scoped verification and correction reports; limited curated photography; Korea-first but Japan/global-ready location data; responsive behavior; accessibility; localization; and browser acceptance`

- Evidence status: `Repository, schema, current-interface, and browser inspection;

approved information architecture and related page briefs; cited official locator, mapping, place-card, cartography, freshness, rhythm-game arcade, accessibility, privacy, and internationalization references; and the user-approved decision record`

- Date started: 2026-08-03
- Last decision update: 2026-08-03
- Language: English
- Parent information architecture:

[02-information-architecture.md](#)

- Related contracts:

[03-home-page-brief.md](#) and [09-profile-page-brief.md](#)

- Scope: Localized public Arcade discovery and detail routes, map/list coordination,

user-requested nearby search, NOSTALGIA cabinet availability and condition, operating information, community preference aggregation, preferred-arcade action, trusted freshness, correction reporting, limited public photos, and future country expansion

- Excluded: Administrator Arcade-editor redesign, final moderation-interface

composition, live occupancy or wait-time tracking, automatic cabinet telemetry, user reviews or star ratings, unrestricted photo galleries, final Foundation tokens, final high-fidelity composition, and production implementation in this design-guide session

Decision Labels

- Observed: Verified in the repository, current browser evidence, an approved upstream artifact, or a cited source.
- Approved: Explicitly agreed with the user and authoritative for downstream design.
- Proposed: Evidence-based direction awaiting user approval.
- Open: Requires further research, testing, or a user decision.
- Rejected: Considered and explicitly not selected.
- Superseded: Replaced by a later approved direction.

This brief is authoritative for the Arcade family's product meaning, content, navigation, data semantics, interaction, privacy, responsive behavior, states, and acceptance criteria. Exact typography, color, spacing, radius, elevation, map style, marker artwork, sheet geometry, card treatment, control dimensions, grid tracks, and content-driven transition values remain Foundation and downstream Claude Design work. Later visual work may refine expression but must not remove or reinterpret this product contract.

Purpose

The Arcade family answers four ordered questions:

Where can I play NOSTALGIA, which nearby or searched venue is appropriate, what is the verified condition of each cabinet, and how can I navigate there or help correct stale information?

It is both a location finder and a community-informed NOSTALGIA play-support surface. It is not a live crowd monitor, a general-purpose business directory, a review site, an arcade social feed, or an official KONAMI cabinet-status service.

Primary Context and Success

- Approved upstream: Arcades remain an independent NosLog destination in the Play support family and a direct Home shortcut. They are not grouped with Music, Tiers, Bingo, or Exams under a fabricated label.
- Approved: Mobile use while deciding where to play or traveling to an arcade is primary. A user must be able to find a suitable venue, assess verified cabinet availability, and open directions without navigating a dense dashboard.
- Approved: A signed-out visitor succeeds when they can search or browse all public venues, use a permission-based nearby search, inspect detail and freshness, and open directions without fabricated personal state.
- Approved: A signed-in visitor succeeds when they can additionally set one preferred arcade and submit a contextual correction or cabinet issue report.
- Approved: The locator supports both practical existence discovery and community gathering-place discovery. Community preference is factual aggregate context, not live busyness and not an automated sacred place quality award.
- Approved: Desktop remains required. Added width should support a coordinated result list and map, not preserve a fixed approximately 390px product shell.
- Approved: The initial public catalog may contain South Korean venues only, but the guide and data contract must not require a redesign to add Japan and global venues later.
- Approved: Current styling and geometry are audit evidence, not NosLog 2.0 visual authority.

Current-Product and Domain Evidence

Repository and Data Evidence

- Observed: The localized public route is currently `/[locale]/gamecenter`; no stable public Arcade-detail route exists.
- Observed: Arcade currently stores one name, region, address, coordinates, machine count, price, coin count, weekly hours JSON, one overall machine status, status note, general notes, active state, and generic `updated_at`.

- Observed: The public query counts users whose `preferred_arcade_id` references each Arcade. One user can select one preferred Arcade.
- Observed: Current public data has no country, IANA time zone, currency, localized names, phone, website, public photo, scoped verification, or per-cabinet record.
- Observed issue: One overall `machine_status` conflates whether a cabinet can be played with how well a playable cabinet's keys and judgment behave.
- Observed issue: `updated_at` is an administrator edit time. It cannot truthfully communicate when cabinet count, condition, hours, or price was last verified.
- Observed: The existing authenticated Feedback workflow supports private optional JPEG/PNG/WebP evidence up to 4 MB, moderator review, and six-month cleanup of resolved material. It currently has no Arcade or cabinet relationship and no structured correction type.
- Observed: Public Arcade data is currently sorted by stored region and Korean name. Search compares name, region, and address in client state.

Current Interface and Browser Evidence

- Observed: The current page exposes a region select, a proportional preference bubble map, a search input, region-grouped results, and expandable cards containing a second mini-map and the full venue detail.
- Observed issue: Text search filters the list but not the map. Selecting a map bubble clears the query, opens an accordion, and scrolls the page. The two discovery representations therefore do not share one result state.
- Observed issue: Every map scope rescales its highest preferred count to the largest bubble. A venue with one preference can look like a major hub when it is the maximum in a sparse region.
- Observed issue: Expanding a card creates a very tall mobile result and duplicates map context that already exists above.
- Observed: At 390×844, results use one column. At 1440×900, the current product still remains near a mobile-width shell. At 320×800, the inspected current route did not create document-level horizontal overflow.
- Observed: When search has no list result, the unfiltered map can still show venues. This visibly confirms the current query/map mismatch.
- Observed: The current map fails over to a textual list and exposes zoom controls, but selection, filtering, direct linking, and detail restoration require the 2.0 contract below.

External Domain Evidence

- Observed: Official KONAMI and SEGA locators prioritize area and current-location search. SEGA explicitly warns that network installation lists, business hours, and actual operating state can differ.
- Observed: Google, Apple, and Mapbox locator guidance converges on nearby search, distance, coordinated lists and maps, selected-place summaries, directions, and responsive detail presentation.
- Observed: Musecat and Zenius-I-vanisher demonstrate that rhythm-game players need game-specific cabinet counts, condition or fault reporting, photos, and recent community updates beyond a generic business listing.

- Observed: Cartographic guidance distinguishes clustering counts from proportional quantitative symbols and requires a stable, explainable visual scale.
- Observed: OpenStreetMap freshness conventions distinguish a survey/check date from an unrelated edit date, supporting explicit verification semantics.

Approved Scope and Invariants

1. The public Arcade family contains one discovery entry and stable detail destinations.
2. The list and map always represent the same active query, region, geographic bounds, filters, and sort context where the sort is meaningful on both representations.
3. Nearby search is user initiated. NosLog never requests location on load and never stores the user's exact current coordinates on the server.
4. Map panning does not silently replace results. An explicit `Search this area` action applies the new bounds.
5. Wide/low-zoom maps use Arcade-count clusters. Sufficiently zoomed maps use individual venues whose optional proportional size represents preferred-user count.
6. Cluster quantity, preferred-user quantity, and selected state use different visual semantics. Selection uses an outline/ring or equivalent non-size cue.
7. Preferred-user size uses one fixed national scale, capped minimum and maximum, so the same count has the same size across regions and filters.
8. Exact preferred counts below the approved minimum public sample of 3 are hidden. These venues use the base marker and do not disclose a one- or two-person aggregate.
9. Community preference is labeled as preference. It is never described as live occupancy, busyness, queue length, quality, or an automatically assigned hub.
10. Arcade availability and playable-cabinet condition are separate dimensions and are stored per cabinet.
11. User-visible verification time is separate from administrator edit time and names the information scope that was actually checked.
12. User reports never directly change public Arcade or cabinet state. An authorized moderator verifies and applies the correction.
13. Directions are the primary Arcade-detail action. Setting a preferred Arcade and reporting an issue are secondary contextual actions.
14. Public photos are optional and curated. NosLog is not a public photo feed or review gallery.
15. UI locale and Arcade country are independent. Native official venue identity, local time, local currency, and country-appropriate directions are preserved.

Approved Information Hierarchy

Discovery Entry

Use one semantic main and the following mobile-first source order:

1. page identity and concise purpose;
2. venue search, region scope, and user-triggered `Near me`;
3. active result summary and compact filter/sort access;
4. accessible result list;
5. map-view entry and synchronized map context;
6. concise empty, permission, stale-data, and failure recovery where applicable.

On wide layouts the list and map may be composed side by side, but source order and keyboard order must remain understandable without the visual split.

Arcade Detail

Use the following information priority:

1. official/native venue name and region;
2. NOSTALGIA availability summary and scoped last verification;
3. open-now/today hours and distance where reliable and available;
4. primary Directions action;
5. total and available cabinet counts, per-cabinet state, and play price;
6. address and map context;
7. optional phone and official website;
8. optional curated entrance and cabinet-area photos;
9. full weekly hours;
10. condition notes and useful visit notes;
11. publishable preferred-user aggregate and secondary preferred-Arcade action;
12. contextual correction or cabinet-issue report.

Omit an absent optional field rather than displaying a wall of `Not registered` rows. Unknown operational facts that materially affect a trip remain explicit as `Unknown` or `Not recently verified`; they are not silently omitted like optional contact data.

Discovery, Search, Filter, and Sort Contract

Shared Result Set

- Search name, reviewed localized name, approved aliases, region, locality, and address.
- Apply the same text query, region, explicit geographic bounds, open-now filter, and available-cabinet filter to both list and map.
- A result count describes this shared set. Do not let the list report no results while unrelated map markers remain visible.
- Preserve the entered query while the user inspects results or changes filters. Do not clear it when a marker is selected.

- Region choice and current map bounds are different concepts. A chosen region may establish initial bounds; subsequent map exploration changes results only after `Search this area`.

Default and Optional Sorting

- Without a query or current-location context, sort by region then locale-aware venue name for a stable, explainable catalog.
- With a query, prioritize text relevance, then region and name.
- After a successful `Near me` request, default to distance from the user for the current session.
- Offer compact optional sorting for Name and Preferred users. Offer Distance only when a user location or explicit origin exists.
- Do not default to Preferred-user order. Early and uneven samples would distort discovery and make the baseline difficult to explain.
- Sorting is one compact control or part of one `Filter and sort` disclosure. Do not create a permanent row of sort buttons.

Filters

- Primary approved filters are `Open now` and `Available cabinet`.
- `Open now` includes only venues with sufficiently structured, verified hours that evaluate as open in the Arcade's local IANA time zone. Unknown hours do not pass.
- `Available cabinet` includes only venues with at least one cabinet explicitly marked available. Unknown availability does not pass.
- The default catalog does not hide unknown or closed venues. Filters are explicit user choices and remain easy to clear.
- Keep filters in one compact disclosure and summarize active filters near the result count. Do not accumulate permanent chips for every operational attribute.

Near Me

- Present `Near me` as an explicit action, never an automatic permission request.
- Explain the immediate purpose before or with the browser prompt when needed.
- Use location only in the active browser context to center/search, compute distance, and enable distance sort.
- Do not save exact coordinates in the user profile, analytics payload, URL, report, or server log beyond unavoidable infrastructure behavior.
- On denial, timeout, unsupported browser, or insecure context, preserve search and manual region controls with concise recovery text.
- Current location and preferred Arcade are different. Do not infer or update one from the other.

Map and List Coordination Contract

Map Quantity Model

- At country/large-region or otherwise overlapping scale, cluster nearby venue markers.

Cluster label/size represents number of Arcades, not preferred users.

- At a zoom where individual venues can be distinguished, use one marker per Arcade.
- For individual markers, preferred-user proportional size is optional but approved.

Use a fixed national data scale, minimum base marker, maximum cap, and area-aware proportional encoding rather than rescaling every current filter to its own maximum.

- Counts below 3 and zero/unknown preference use the same base marker and do not

reveal the hidden count.

- A legend or accessible explanation distinguishes clusters, individual preference

markers, hidden-small-sample/base markers, and selection.

- Do not use marker size as the only selected state. Do not use color alone for

availability, condition, preferred status, or selection.

Selection and Navigation

- Selecting a list result selects and reveals the same marker without discarding the

current query or filters.

- Selecting a marker selects the same list result or preview. It does not auto-scroll

the full document unpredictably.

- Mobile marker selection opens a compact preview sheet with venue name, concise

availability, distance when known, and the route to full detail. Preserve visible map context behind the sheet.

- Desktop marker/list selection updates a detail preview panel beside the map.

- Opening full detail navigates to `/[locale]/gamecenter/[arcade-slug]` and updates

browser history.

- Browser Back restores useful discovery state: query, region, filters, sort, list/map

mode, selected venue, and map bounds when feasible.

- Direct links and refreshes reproduce the same public detail without requiring the

discovery page to be visited first.

Mobile and Desktop Discovery Composition

- Compact layout is list-first and provides one clear Map view action. Do not add a

bottom navigation or permanent competing List/Map tab bar solely for this page.

- The mobile map is a focused alternate view of the same result state, with an obvious

return to the list and preserved controls/state.

- Wide layout uses synchronized list and map regions simultaneously when content space

permits.

- Do not duplicate a full map inside every expanded result. Full venue detail belongs

to the stable detail route; previews remain concise.

Arcade Detail Route and Action Contract

Stable Route

- Keep `/[[locale]]/gamecenter` as the family entry.
- Add one stable `/[[locale]]/gamecenter/[[arcade-slug]]` route per active public Arcade.
- Slugs must remain shareable and must not expose unstable list indexes.
- Unknown, inactive, or removed Arcade destinations return a localized not-found

state without leaking internal moderation data.

- Where an Arcade has been renamed or merged, preserve an approved redirect or alias strategy rather than silently losing shared links.

Primary and Secondary Actions

- `Directions` is the primary action. It opens a country-appropriate external map or directions provider using trusted coordinates and address.
- `Set as preferred Arcade` is secondary and requires authentication. It updates the user's single preferred Arcade after clear success or recoverable failure feedback.
- `Report information` is a secondary contextual utility and requires authentication under the existing Feedback ownership model.
- Optional phone and official website use their native actions and are omitted when absent.
- Do not turn address copy, website, preferred state, and report into several visually equal primary buttons.

Cabinet Availability and Condition Contract

Two Independent Dimensions

Every active cabinet record has an identifier/label and an availability value:

Availability	Meaning
unknown	The current ability to play has not been verified recently enough.
available	The cabinet is powered/operational and can be played.
unavailable	The cabinet cannot currently be played because it is broken, under maintenance, powered down, or otherwise unavailable.

Only an available cabinet may carry a playable condition value:

Condition	Meaning
unknown	Playable, but no reliable recent key/judgment assessment exists.
good	No known input or judgment issue.
normal	Minor wear or sensitivity variation exists, but ordinary play is generally possible.
caution	Playable, but an input or judgment issue can materially affect record-focused play.

- `unavailable` is not a condition grade.
- `normal` and `caution` require a concise explanatory condition note.

- good must not claim laboratory precision; it means no known issue in the verified community/administrator context.
- Derive total and available cabinet counts from active cabinet children. Do not keep an independently editable total that can contradict them.
- Deactivate a removed cabinet rather than hard-deleting its report and verification history.
- Use deterministic default labels such as `Cabinet 1`, `Cabinet 2`; administrators may replace them with useful venue labels such as `Left cabinet` or `Window cabinet`.

Compact and Detailed Presentation

- Compact list/preview summary example: `2 of 3 available · Includes caution cabinet`.
- Detail exposes every active cabinet separately, for example:
 - `Cabinet 1 · Available · Good`
 - `Cabinet 2 · Available · Caution plus its input/judgment note`
 - `Cabinet 3 · Unavailable · Under maintenance`
- If every cabinet is unknown, say that availability is unverified rather than showing `0 available`.
- Never reduce cabinet state to color-only dots. Availability, condition, label, and note remain available as text.

Operating Information and Verification Contract

Operating Facts

- Store structured weekly hours and explicit exceptional closure/holiday information when available. Do not parse a free-text note to power `Open now`.
- Evaluate `Open now` using the Arcade's IANA time zone, including overnight hours.
- Store play price with currency code and local credit/coin meaning. Do not convert it to Korean won for global venues.
- Preserve address components sufficient for country-appropriate display and search.
- Optional phone and official website are contact facts, not required placeholders.

Verification Meaning

- Separate `updated_at` from public verification facts.
- Verification records identify what was checked, when, and by which trust class without publicly exposing private reporter identity.
- A cabinet verification updates only the cabinet/availability/condition scope that was checked. A price edit does not make old cabinet status look newly verified.
- Public copy names the scope, such as `Cabinet information verified 3 days ago` or `Hours not recently verified`, rather than one ambiguous `Updated` label.
- Verification may come from an authorized on-site check or another approved trusted

source. A raw user report is pending evidence, not verification.

- Stale thresholds may vary by information type in future operations policy, but the interface must distinguish recent, stale, and unknown without fabricating precision.

Preferred Arcade and Community Context

- One authenticated user may select one preferred Arcade, consistent with the current profile setting.
- Preferred count is an anonymous aggregate. Never expose the member list through the public Arcade page.
- Publish the exact count only at 3 or more. Below that threshold, omit the number or use concise Collecting preference data copy without revealing 1 or 2.
- The list/detail may show factual Preferred by N users when publishable.
- Preference affects the optional individual map bubble size and a user-requested sort, not default result order or a quality score.
- Do not infer attendance, current presence, queue length, skill level, or endorsement.
- Do not assign a literal hub badge automatically in the initial 2.0 contract.
- Public Profile display of the user's preferred Arcade obeys the separate Profile privacy contract. Aggregation eligibility is independent of whether the individual profile field is public.

Curated Photo Contract

- Public photos are optional and use only the following initial slots:
 1. one entrance/exterior representative image; and
 2. up to two NOSTALGIA cabinet or cabinet-area images.
- The Arcade detail remains complete when all slots are empty; omit the media region.
- Photos are administrator-curated public assets, not an unrestricted user gallery.
- Do not add ratings, likes, comments, social ordering, or an infinite photo feed.
- A private Feedback/correction image is evidence for moderation and is not republished automatically. Public reuse requires a separate explicit public-photo submission, rights confirmation, and consent.
- Reject or appropriately remove/crop images containing identifiable people, private information, unrelated copyrighted material, or misleading old cabinet context.
- Preserve meaningful alt text by slot purpose, but do not repeat adjacent venue names mechanically. Decorative crops use empty alt text.
- Show the capture/verification context where it materially prevents a stale photo from being mistaken for current cabinet evidence.

Correction and Cabinet-Issue Reporting Contract

Report Types and Target

Extend the existing authenticated Feedback workflow with Arcade context and structured types:

- cabinet broken or unavailable;
- cabinet condition/input issue;
- cabinet count change;
- play price/credit change;
- business-hours change;
- location/address change; and
- other Arcade information.
- A cabinet report targets a specific active cabinet when known or 'Unspecified cabinet' when the reporter cannot identify it reliably.
- Prefill Arcade identity and current relevant fact; do not require the user to restate the entire venue in free text.
- Require a concise description. Preserve the existing optional private JPEG/PNG/WebP evidence limit of 4 MB unless a later security contract supersedes it.
- Reports remain private to the reporter and authorized moderators except for the verified public correction applied afterward.

Moderation and Lifecycle

- Submission never changes availability, condition, count, price, hours, address, or verification time automatically.
- An authorized moderator compares the report with trusted evidence, updates only the verified scope, and records a concise resolution.
- Multiple reports may support one correction but must not produce duplicate public cabinets or contradictory counts.
- Resolved private report material follows the existing six-month cleanup contract; the resulting public fact and non-identifying verification history may remain.
- Report failure preserves entered text and selected target where safe. Authentication expiry returns a recoverable login path without pretending the report was saved.

Authentication and Permission Contract

Signed Out

- Browse, search, map/list switch, Near me, filters, detail, directions, contact, photos, verification, and publishable preference aggregates remain public.
- Do not show a fabricated preferred state or reporter identity.
- A preferred/report action may explain that login is required, then preserve the current Arcade destination across authentication.

Signed In

- The user can set or change one preferred Arcade.
- The user can submit a contextual correction or cabinet report and inspect only the

user-facing outcome allowed by the shared Feedback contract.

- Authentication does not grant direct edit access or disclosure of other reporters.

Administrator Boundary

- Public detail does not expose draft Arcades, inactive cabinets, private report

evidence, moderator notes, reporter identity, or internal trust scoring.

- Administrator Arcade editing and report queues will receive their own later design

treatment. This brief defines the public facts and moderation contract they must support, not their final UI.

Loading, Empty, Error, Disabled, and Destructive States

State	Required behavior
Initial discovery loading	Preserve page identity and control geometry; use a concise list/map loading treatment without announcing every marker.
Shared results ready	List count and map markers describe the same set.
No search results	Show concise localized No arcades found and preserve query/filter controls and clear recovery.
No venues in map bounds	Explain that no registered Arcade is in this area and retain Reset area/region recovery.
Map script/network failure	Keep the complete accessible list and directions/address facts usable; do not replace the page with a map error.
Location permission denied	Preserve manual search/region controls and offer a concise retry only when useful.
Location unavailable/timeout	Keep the current catalog and explain that distance sort is unavailable.
Unknown hours	Do not calculate Open now; display unverified hours context.
Unknown cabinet availability	Do not show 0 available; state that cabinet availability is unverified.
Stale verification	Keep the fact visible with stale context and a report path; do not silently treat it as current.
Inactive or unknown detail slug	Localized not-found state with a path back to discovery.
Preferred save busy/success/error	Disable duplicate submit only for the relevant action, announce the result, and preserve detail state.
Report choose/submit/review error	Preserve safe input, identify the problem in text, and provide Retry or correction.
Directions unavailable	Keep address and copy/contact fallback; do not render a dead primary button.
Optional photo absent	Omit the photo region; do not render empty skeleton cards after loading completes.
Cabinet deactivation	Remove it from public active count while preserving authorized history; this is not a public destructive control.

Responsive Contract

Compact Layout

- Treat 390px as the representative review canvas, not a fixed application width or

universal breakpoint.

- Reflow to 320 CSS px without document-level two-dimensional scrolling. The map

itself may pan in two dimensions because that interaction is intrinsic, but all controls, previews, detail facts, and alternatives must reflow normally.

- Use list-first discovery with one Map view action and the same preserved result

state.

- Marker selection uses a compact bottom sheet/preview; full content navigates to the

stable detail route rather than expanding an entire result in place.

- Keep Directions reachable early in detail. Secondary actions must not crowd the primary fact/action area.
- Per-cabinet rows stack or reflow without abbreviating availability/condition into unexplained codes.
- Long Korean, Japanese, English, official venue names, addresses, and notes wrap without covering map controls or actions.

Wide Layout

- Use a synchronized result list and map split when container width supports both.
- The selected Arcade may use a side preview while preserving surrounding map context.
- Full detail may use complementary columns for map/address and operational facts, but source order and reading order remain coherent.
- Do not simply enlarge mobile cards or retain a fixed phone-width shell.
- Cap line length for notes and reporting guidance while using additional width for comparison, cabinet rows, full weekly hours, and map context.

Content-Driven Transitions

- Choose transitions from the minimum space needed for readable result identity, search/filter controls, map interaction, and detail actions-not device names alone.
- Test intermediate widths where the list/map split, preview sheet/panel, cabinet row, photo slots, or action composition changes.
- Short viewport height must not trap map/sheet controls or hide sheet dismissal and Directions.

Accessibility Contract

- The list is a complete semantic alternative to the map. No venue or required action exists only as a marker.
 - Provide one visible page heading, semantic regions for controls/results/map/detail, and a programmatic result count/summary that does not become noisy during every map movement.
 - Search has a persistent label or accessible name; preserving placeholder alone is insufficient.
 - Native or fully accessible controls operate search, region, filter/sort, Near me, Search this area, map/list switch, marker/list selection, sheet dismissal, Directions, preferred state, and report.
 - Map markers are keyboard reachable in a logical order when the map library permits.
- The synchronized list remains the guaranteed keyboard path.
- Selection, preferred aggregate, open state, availability, condition, stale state, and report result never rely on color, shape, or marker size alone.
 - Focus moves into an opened modal sheet/dialog only when it is modal, is trapped

appropriately, and returns to the invoking marker/control on close. A nonmodal desktop panel must not steal focus unexpectedly.

- External directions, phone, and website actions have clear accessible names and external-context indication where needed.
- Map zoom/pan controls meet target-size and visible-focus requirements; custom gestures are never the only way to browse.
- Images use purpose-appropriate alt text. Repeated thumbnails do not create verbose duplicate names.
- Permission, validation, save, and report outcomes are announced concisely without excessive assertive live regions.
- Support 200% text zoom, reduced motion, keyboard-only use, high contrast, and screen reader reading order.

Localization and International Location Contract

Identity and Search

- Keep the official local/native Arcade name as the primary identity.
- When available, show a reviewed Korean, Japanese, or English translation, transliteration, or recognized alias as smaller secondary identity.
- Search official name, all reviewed localized names, approved aliases, and localized address fields. Do not automatically machine-translate a public venue name and present it as verified.
- Mark mixed-language strings with appropriate `lang` metadata where pronunciation or screen-reader behavior benefits.

Country-Aware Data

Preserve at least:

- stable Arcade identifier and slug/redirect aliases;
- ISO country/region code;
- administrative area, locality, and country-appropriate address lines;
- coordinates and IANA time zone;
- currency code, amount, and local credit/coin semantics;
- official/native name and reviewed localized names/aliases;
- country-appropriate external map/directions provider identifiers; and
- optional phone and official website.
- UI locale does not rewrite country truth. A Japanese Arcade remains Japanese while surrounding labels may be Korean or English.
- Format times and dates for the UI locale while calculating them in the Arcade's time zone.
- Format price with its stored currency; do not silently convert exchange rates.
- Korea may use Kakao Maps first. Provider abstraction must allow Japan/global

destinations without embedding Kakao in the product meaning or stable action label.

- Address order and line breaks adapt by country and locale. Do not store one

Korea-shaped region string as the only international address structure.

Runtime State Contract

State group	Values	Scope
Authentication	signed out, signed in, expired during action	preferred/report actions
Discovery request	initial loading, ready, empty query result, empty bounds, error	list and map
Geographic context	default country/region, chosen region, explicit map bounds, nearby origin	query and restoration
Location permission	idle, requesting, allowed, denied, unavailable, timeout	nearby/distance
Display composition	compact list, compact map, wide synchronized split	responsive UI
Selection	none, preview selected, full detail	map/list/history
Sorting	region/name default, relevance, distance, name, preferred count	list/result state
Filters	none, open now, available cabinet, combined	shared result set
Hours	structured open, structured closed, exceptional closure, stale, unknown	Arcade detail/filter
Cabinet availability	unknown, available, unavailable, inactive	each cabinet
Cabinet condition	unknown, good, normal, caution, not applicable	available cabinet
Verification	recent, stale, unknown, pending report, moderator-applied	fact scope
Preferred state	hidden-small-sample, publishable aggregate, current user's preferred, save busy/error	marker/list/detail
Photo state	absent, entrance present, cabinet photo(s), load error, removed	detail
Report	idle, composing, attachment selected, submitting, submitted, validation error, auth error	contextual feedback
Localization	native name only, reviewed localized name, native fallback, localized address	identity/content
External action	directions available, provider fallback, address-only fallback	detail

Do not collapse result loading, map loading, location permission, cabinet availability, verification, preferred save, and report submission into one page-wide status.

Implementation Mapping

Concern	Current source	Downstream requirement
Public entry	@@NOSLOGTOKEN0@@	Preserve localized entry and add stable localized Arcade-detail routes and metadata
Discovery UI	@@NOSLOGTOKEN0@@	Replace accordion-only detail with shared list/map result state, nearby, explicit area search, compact filter/sort, and route restoration
Distribution map	@@NOSLOGTOKEN0@@	Separate count clusters from fixed-scale preferred bubbles; add accessible selection, legend, preview, and synchronized filtering
Duplicate mini-map	@@NOSLOGTOKEN0@@	Use map context in stable detail where useful; do not duplicate a full map in every discovery result
Hours	@@NOSLOGTOKEN0@@ , @@NOSLOGTOKEN1@@	Add local-time evaluation, exceptional closures, verification scope, overnight handling, filters, and KO/JA/EN states
Region model	@@NOSLOGTOKEN0@@	Replace Korea-only label assumptions with country/admin-area/locality data while preserving Korean launch values
Public queries	@@NOSLOGTOKEN0@@	Support shared query/filter/sort/detail data, publishable preference threshold, and per-scope freshness without leaking private state
Arcade schema	@@NOSLOGTOKEN0@@ Arcade	Normalize country, address, timezone, currency, contact, localized identity, photo slots, scoped verification, and stable slug/aliases
Cabinets	Current single machine_count, machine_status, and status_note	Add active per-cabinet children or an equivalent normalized model with label, availability, condition, note, and verification; derive counts
Preferred Arcade	User.preferred_arcade_id and @@NOSLOGTOKEN1@@	Preserve one preference, apply privacy-safe aggregation threshold, recoverable auth, and profile privacy separation
Reports	Current Feedback models/actions and private image flow	Add Arcade ID, optional cabinet ID, structured type, scoped moderation, no auto-publish, and existing private retention/security guarantees
Public photos	Current public Blob infrastructure; no Arcade photo model	Add only curated entrance plus up-to-two cabinet slots, rights/consent, alt text, removal, and no private-evidence republishing
Localization	@@NOSLOGTOKEN0@@	Add complete KO/JA/EN discovery, permission, filter, detail, cabinet, verification, photo, report, and error copy plus native-name handling
Directions	Current Kakao link construction in gamecenterExplorer.tsx	Use a stable generic Directions action and country/provider adapter with coordinate/address fallback
Browser tests	Current Playwright locale/responsive coverage	Add list/map sync, permissions, route restoration, cabinet states, small-sample privacy, stale data, map failure, and multi-country fixtures

Representative Fixtures

Validate at least:

1. South Korean launch catalog with Seoul, regional city, and sparse-region venues;
2. future Japanese venue with long native Japanese name, reviewed Korean/English alias, Japanese address order, JPY price, and Asia/Tokyo time zone;
3. future global venue with a long Latin-script name, non-KRW currency, overnight hours, and country-appropriate Directions provider;
4. empty query, partial name, localized alias, full address, no result, and search punctuation/whitespace;
5. default region/name order, query relevance, successful distance order, name order,

and preferred-user order;

6. `Open now` and `Available cabinet` separately and together, with unknown facts not passing the filters;

7. location idle, allowed, denied, timeout, unsupported, and retry/manual fallback;

8. `map pan` before and after explicit `Search this area`, plus restored bounds on `Back`;

9. zero, one, two, three, medium, and high preferred counts proving the threshold and fixed national scale across two regions;

10. overlapping low-zoom clusters and separated individual markers without semantic confusion;

11. one good available cabinet; three cabinets with good, caution, and unavailable; all availability unknown; and a deactivated historical cabinet;

12. required notes for normal/caution, missing note validation, and unavailable without a condition grade;

13. recent cabinet verification, stale hours, unknown price verification, and an unrelated administrator edit that does not refresh public facts;

14. structured weekly hours, overnight close, holiday closure, unknown hours, optional phone/website, and address-only `Directions` fallback;

15. no photos, entrance only, all three approved slots, image load failure, and rejected private-evidence reuse;

16. signed-out preferred/report actions, signed-in preference change, report against a known cabinet, unspecified-cabinet report, attachment failure, moderator-applied correction, and six-month private evidence cleanup;

17. map script failure while the complete list and external `Directions` remain usable;

18. inactive/renamed `Arcade` slug, redirect alias, unknown slug, and direct refresh;

19. Korean, Japanese, and English UI around the same native `Arcade` identity;

20. 320px, representative 390px, intermediate widths, wide desktop, short viewport, 200% text zoom, reduced motion, keyboard-only, and screen-reader use.

Browser Acceptance Contract

- `/ko/gamecenter`, `/ja/gamecenter`, and `/en/gamecenter` expose equivalent public discovery behavior and localized metadata.

- Every active `Arcade` has a stable localized detail path; direct links, refresh, detail round trips, and browser `Back` preserve or restore useful discovery state.

- Text query, region, explicit bounds, `Open now`, and `Available cabinet` produce the same list and map result set. No unrelated marker remains when the list is empty.

- `Near me` never prompts on load, works only after user action, does not persist exact coordinates server-side, and recovers to manual controls after denial or failure.

- Panning alone does not replace results; `Search this area` does so explicitly and exposes a recoverable previous/region context.

- Low-zoom clusters encode Arcade count; individual bubbles encode publishable preferred count on one fixed scale; selection does not depend on size.
- Counts 1 and 2 are not exposed or distinguishable from the base small-sample marker. Count 3 and above may be shown exactly.
- Mobile is list-first with a synchronized focused map view and compact marker preview; wide layouts use meaningful list/map comparison space.
- Detail communicates official/native identity, NOSTALGIA availability, verification, local hours/distance, Directions, cabinet count/state, price, address, and optional supporting facts in the approved order.
- Total and available counts equal active per-cabinet data. `unavailable` is never rendered as a playable condition grade, and normal/caution always retain text notes.
- All-unknown availability does not appear as zero available. Stale and unknown facts do not appear recently verified or pass explicit filters.
- User reports do not alter public facts before moderation, preserve private evidence authorization, and update only the verified fact scope after approval.
- Private Feedback evidence never appears in a public photo slot without separate rights and consent. Missing public photos leave no empty media shell.
- Native names, reviewed aliases, address order, local time zone, currency, and country-appropriate Directions remain correct across Korean, Japanese, and English UI.
- A map failure leaves the full list, address, operational facts, and external Directions usable.
- At 320 CSS px, no search/filter control, result, sheet, long name/address, cabinet row, action, photo, note, report field, or error creates document-level horizontal overflow, clipping, or overlap.
- Wide layouts do not retain a fixed phone-width shell and do not duplicate a full map inside every result.
- All primary controls and actions work with keyboard alone, expose visible Focus, and retain a coherent reading order. State never depends on color, marker size, or map position alone.
- Tested normal and failure flows produce no unexpected console error, hydration issue, stale cross-route selection, precise-location leak, private reporter leak, duplicate preference/report submit, or contradictory cabinet count.

Reference Matrix

Source	Transferable principle	NosLog application	Limitation
Current Arcade entry	Establishes public/auth boundaries and current data flow	Grounds observed implementation	Current layout and route set are not 2.0 authority
Current Arcade explorer	Shows region, map, text search, list, preference, and detail expansion	Preserves useful functions and identifies state divergence	Client-only accordion and query-clearing behavior are superseded
Current Arcade schema	Establishes current aggregate status and preferred relation	Grounds migration requirements	Cannot represent per-cabinet truth or global location data
Approved IA	Keeps Arcades an independent Play-support destination	Preserves navigation meaning	Does not define locator anatomy
Approved Home brief	Keeps a direct Arcade shortcut after higher-priority product tasks	Preserves discoverability	Does not define Arcade search defaults
Approved Profile brief	Treats preferred Arcade as user-controlled public profile metadata	Aligns preference/privacy result	Does not define aggregate map encoding
Google Locator Plus best practices	Nearby stores, distance, details, and directions form a locator core	Supports nearby, distance, and primary Directions	Retail conversion goals differ from play-support needs
Google Store Finder architecture	Coordinates own location data, map viewport, list, and place detail	Supports synchronized shared result state	Google UI Kit is not mandatory implementation
Google Product Locator	Availability filtering, nearest locations, and marker differentiation aid trip planning	Supports available-cabinet filter and directions	Product stock is not cabinet condition
Mapbox React store locator	A list and map can share selection and geographic search state	Supports explicit result coordination	Tutorial styling is not NosLog authority
Apple Maps HIG	Compact/full place cards adapt to context, preserve map context, and avoid duplicate detail	Supports mobile preview sheet and desktop panel	Apple platform components are not copied literally
Material bottom sheets	A sheet can expose contextual map detail without replacing spatial context	Supports compact marker preview	Older Material guidance does not define final NosLog styling
Kakao marker clustering	Dense nearby markers need clustering	Supports low-zoom Arcade-count clusters	Sample does not define accessibility or preference encoding
ArcGIS proportional symbology	Quantitative symbols require consistent scales and correct area perception	Supports fixed national preferred-user scale	GIS desktop guidance needs web simplification
Mapbox data-driven styling	Feature values can drive bounded symbol properties	Supports capped preference encoding	Capability alone does not justify a metric
KONAMI NOSTALGIA locator	Official discovery starts from game, area, and venue facts	Preserves game-specific existence context	Official list does not provide key condition or community preference
SEGA CHUNITHM locator	Region and current-location search are useful; installation and hours may be stale	Supports explicit freshness and nearby fallback	CHUNITHM network state does not map to NOSTALGIA cabinet condition
Bandai Namco facility search	Venue and installed-game discovery are separate but related tasks	Supports Arcade identity plus NOSTALGIA-specific facts	Operator taxonomy is broader than NosLog scope
Musecat	Rhythm-game users need game filters, cabinet counts, edits, and fault reports	Supports per-cabinet/report direction	Multi-game community scope is broader than NosLog
Musecat Arcade detail	Photos, units, price, faults, hours, contact, and history coexist in one venue record	Supports detail facts and limited photos	Community completeness and trust vary by venue
Zenius-I-vanisher	Long-lived community databases preserve venue/game-machine context	Supports global-ready Arcade/machine relationships	Legacy density and moderation are not visual authority
OpenStreetMap @@@NOSLOGTOKEN0@@@	A checked date is distinct from an arbitrary edit date	Supports scoped public verification	OSM tag conventions do not define NosLog trust policy
OpenStreetMap @@@NOSLOGTOKEN0@@@	On-site survey provenance can communicate freshness	Supports on-site verification class	Publicly exposing contributor identity is not adopted
Google Suggest an edit	Community corrections benefit from review before public place facts change	Supports moderated reports	Google's moderation system is not available to NosLog
MDN Geolocation	Geolocation is permission-gated and secure-context dependent	Supports explicit nearby action and failure states	API behavior does not define product retention policy
Google Maps localization	Map language and region are independent, and region affects local behavior	Supports UI-locale/country separation	NosLog may retain Kakao in Korea rather than adopting Google globally now
MDN @@@NOSLOGTOKEN0@@@	Dates/times can be formatted by locale and explicit time zone	Supports local Open now and localized presentation	Structured hours and time zone data are still required
MDN @@@NOSLOGTOKEN0@@@	Currency values can preserve currency while adapting locale formatting	Supports local price display without conversion	It does not supply exchange rates or arcade credit meaning

Source	Transferable principle	NosLog application	Limitation
Apple Place Card cover photo	A curated representative place image aids identification	Supports one optional entrance image	Business-managed imagery differs from community evidence
WCAG Reflow	Required content reflows at 320 CSS px without two-dimensional page scrolling	Grounds compact layout acceptance	The intrinsic map remains a justified two-dimensional region
Minnesota accessible interactive maps	Interactive maps require text alternatives, keyboard access, and nonvisual meaning	Grounds complete list alternative and map controls	Local government examples are not product styling authority
USWDS Search	Search requires clear labeling, predictable submission, and accessible state	Supports persistent query and clear results	General site search does not define geographic bounds

Evidence Convergence

- Official and production locator sources converge on area/text/current-location

discovery, distance, coordinated list/map context, compact selected-place detail, and Directions. None supports clearing the query or leaving unrelated markers when the list filters.

- Cartographic sources converge on separating count clusters from proportional data

symbols and keeping a stable interpretable scale. They do not justify rescaling every sparse region so its maximum looks nationally important.

- Rhythm-game community sources converge on cabinet-level counts/issues, recent

community maintenance, and venue photos as meaningful trip-planning data. They do not justify live occupancy claims, unrestricted social galleries, or replacing administrator verification with raw reports.

- Freshness and official-locator warnings converge on separating a check/survey from

generic edit time and exposing uncertainty. They do not choose NosLog's operational stale thresholds.

- Place-card and photo references converge on compact previews and representative

identification imagery. Privacy and scope require NosLog to limit public slots and keep report evidence private unless separately consented.

- Localization references converge on independent language, region, local time zone,

and currency data. A Korea-shaped name/address/price model cannot support approved Japan/global expansion safely.

- Accessibility references converge on a complete list alternative, keyboard paths,

non-color state, reflow, and recoverable permission/map failures.

- Preferred-user threshold 3, one-user-one-preference meaning, fixed national scale,

no automatic hub badge, per-cabinet condition vocabulary, public photo slot count, and report lifecycle are approved NosLog product decisions; external sources inform but do not dictate them.

Rejected and Superseded Alternatives

- Map-first mobile with persistent List/Map tabs - Rejected: mobile is list-first

with one map action and preserved shared state; no new bottom navigation is added.

- Fixed narrow mobile shell on desktop - Rejected: wide layouts use synchronized

list/map comparison space.

- List search independent from map - Superseded: both represent one active result set.

- Automatically refresh results on every map pan - Rejected: explicit 'Search this area' preserves control and prevents unexpected churn.

- Request location on page load - Rejected: nearby is user initiated with manual

fallback and no exact-location persistence.

- Default sort by preferred users - Rejected: uneven early aggregates must not control baseline discovery.
- Permanent rows of sort/filter chips - Rejected: one compact disclosure preserves hierarchy while primary search/region/nearby remain visible.
- Scope-relative bubble scaling - Superseded: one fixed national scale prevents one sparse-region preference from looking like a national hub.
- Use bubble size for selection - Rejected: selection and quantity require different visual semantics.
- Expose preferred counts 1 and 2 - Rejected: exact aggregates below 3 remain hidden.
- Automatic hub/sacred place badge - Rejected: preference count is context, not a quality or live-attendance award.
- One aggregate machine status - Superseded: availability and playable condition are per-cabinet independent dimensions.
- Treat unavailable as a condition grade - Rejected: it is availability; only available cabinets can have good/normal/caution/unknown condition.
- Delete removed cabinets - Rejected: deactivation preserves report and verification history.
- Show generic Updated as freshness - Rejected: only scoped verification communicates checked operational facts.
- Raw report instantly changes public state - Rejected: moderator verification is required.
- Expanded full detail and second map inside every result - Superseded: preview remains compact and full detail uses a stable route.
- Equal visual priority for every detail action - Rejected: Directions is primary; preference and reporting are secondary.
- Unrestricted user photo gallery/reviews - Rejected: 2.0 uses one entrance and up to two cabinet-area curated slots, without ratings or social feed.
- Republish private report evidence automatically - Rejected: separate rights and public consent are required.
- Korea-only region/name/currency schema - Rejected: launch data may be Korean, but the contract is Japan/global-ready.
- Calculate open state in the viewer's time zone - Rejected: use the Arcade's IANA time zone and local structured hours.
- Convert all prices to KRW - Rejected: preserve local currency and credit meaning.

Decision Log

ID	Decision	Status
ARCADE-01	Keep Arcades an independent Play-support destination and Home shortcut	Approved
ARCADE-02	Serve a shared public discovery entry plus stable localized detail routes	Approved
ARCADE-03	Use one synchronized list/map result state for query, region, bounds, and filters	Approved
ARCADE-04	Make mobile list-first with one map action and wide layouts a list/map split	Approved
ARCADE-05	Require explicit Search this area after map movement	Approved
ARCADE-06	Make Nearby user initiated, session-scoped, and nonpersistent	Approved
ARCADE-07	Use stable region/name, query relevance, and nearby distance defaults with compact optional sorts	Approved
ARCADE-08	Provide Open now and Available cabinet in one compact filter/sort disclosure	Approved
ARCADE-09	Use Arcade-count clusters at broad scale and individual preferred-user bubbles at sufficient zoom	Approved
ARCADE-10	Use one fixed national preferred scale; never rescale every region to its own maximum	Approved
ARCADE-11	Hide exact preferred aggregates below 3, distinguish selection from size, and omit automatic hub badges	Approved
ARCADE-12	Keep one user-selected preferred Arcade and treat its aggregate as preference, not live busyness	Approved
ARCADE-13	Give each active cabinet an availability value independent from playable condition	Approved
ARCADE-14	Use condition values unknown/good/normal/caution only for available cabinets and require notes for normal/caution	Approved
ARCADE-15	Derive total/available count from active cabinet records and deactivate removed cabinets	Approved
ARCADE-16	Separate scoped public verification from administrator edit time and raw reports	Approved
ARCADE-17	Prioritize native identity, availability/freshness, hours/distance, Directions, cabinets, price, and address	Approved
ARCADE-18	Make Directions primary; keep preferred Arcade and report as secondary contextual actions	Approved
ARCADE-19	Add optional phone and official website and omit absent optional fields	Approved
ARCADE-20	Extend authenticated Feedback with Arcade/cabinet context and structured correction types without auto-publish	Approved
ARCADE-21	Preserve optional private evidence and six-month resolved cleanup; never expose reporter identity publicly	Approved
ARCADE-22	Allow one curated entrance photo and up to two curated cabinet-area photos, with no public gallery or review feed	Approved
ARCADE-23	Never republish private correction evidence without separate public rights and consent	Approved
ARCADE-24	Launch with Korean data while preserving country, address, timezone, currency, native/localized name, and provider expansion	Approved
ARCADE-25	Keep native official name primary, reviewed localized identity secondary, and search both	Approved
ARCADE-26	Calculate open state in the venue's time zone and format local currency without exchange conversion	Approved
ARCADE-27	Preserve a complete accessible list alternative, 320 CSS px reflow, keyboard paths, and non-color state	Approved

Handoff Boundary

Claude Design may determine final type scale, visual hierarchy, surfaces, map style, cluster and marker artwork, preference legend, sheet/panel geometry, list-card anatomy, action styling, cabinet-row composition, photo crops, spacing, grid tracks, responsive transition values, and motion after Foundation approval. It must preserve the shared result state, explicit location/area actions, fixed-scale and privacy-safe preference meaning, stable detail navigation, approved information order, per-cabinet state semantics, verification/report lifecycle, limited photo policy, international data meaning, accessibility, and acceptance criteria.



The future Codex implementation session must compare Claude output with this brief. It must request a guide or design revision before implementing any result that splits map/list truth, auto-prompts location, defaults to popularity, exposes small preference counts, uses region-relative bubbles, implies live occupancy, collapses cabinet availability and condition, treats edit time as verification, lets reports auto-publish, hides Directions, expands full detail inside every result, publishes private evidence, adds an unrestricted review/gallery surface, assumes Korean location formats globally, or leaves required information accessible only through the map.

NosLog 2.0 Data Sync Page Brief

docs/design/13-data-sync-page-brief.md

Document Control

- Status: Approved
- Decision status: `Complete Data Sync page contract approved: first-use and

returning-use hierarchy; explicit full-versus-recent scope; persistent coverage; processing, delay, partial-completion, failure, and recovery states; concise result previews and recent attempt history; account-specific bookmarklet security; text-led media guidance; responsive behavior; accessibility; localization; and browser acceptance`

- Evidence status: `Repository, schema, tests, current-interface, and authenticated

browser inspection; approved information architecture and Home contract; cited official NOSTALGIA, rhythm-game score-import, production import, browser, security, accessibility, responsive, and disclosure references; and the user-approved decision record`

- Date started: 2026-08-03
- Last decision update: 2026-08-03
- Language: English
- Parent information architecture:

[02-information-architecture.md](#)

- Related Home contract:

[03-home-page-brief.md](#)

- Scope: The localized public Data Sync entry, authenticated bookmarklet installation

and execution guidance, attempt and coverage reporting, short attempt history, recovery, token invalidation, security and privacy explanation, responsive composition, accessibility, localization, and future implementation acceptance

- Excluded: Administrator sync-monitor redesign, replacement of the verified ingestion

pipeline, direct official API integration, automatic background sync, storage of p.eagate credentials or cookies, final Foundation tokens, final high-fidelity composition, and production implementation in this design-guide session

Decision Labels

- Observed: Verified in the repository, current browser evidence, an approved upstream artifact, or a cited source.
- Approved: Explicitly agreed with the user and authoritative for downstream design.
- Proposed: Evidence-based direction awaiting user approval.
- Open: Requires further research, testing, or a user decision.
- Rejected: Considered and explicitly not selected.
- Superseded: Replaced by a later approved direction.

This brief is authoritative for the Data Sync page's product meaning, content, information hierarchy, data semantics, interaction, recovery, security, privacy, responsive behavior, states, and acceptance criteria. Exact typography, color, spacing, radius, elevation, illustration treatment, media framing, card treatment, control dimensions, grid tracks, and

content-driven transition values remain Foundation and downstream Claude Design work. Later visual work may refine expression but must not remove or reinterpret this product contract.

Purpose

The Data Sync page answers five ordered questions:

Is my NOSTALGIA data currently connected, what should I do next, what did the latest attempt add or update, what does NosLog currently cover, and how can I recover safely when the process fails?

It is a repeatable play-data transfer and confidence surface, not merely a one-time bookmarklet tutorial. It is not an official KONAMI integration, a password manager, a continuous background synchronization service, an administrator log viewer, or a raw technical diagnostic console.

Primary Context and Success

- Approved upstream: Data Sync remains an independent Play-support destination and a visually distinct Home row after the primary destination collection. It is not hidden under Music or Profile.
- Approved: Mobile use after playing at an Arcade is primary. A returning user must be able to understand sync state and start the next sync without first rereading the installation tutorial.
- Approved: First-time use must remain sufficiently explicit that a user can install and run the bookmarklet without outside instructions.
- Approved: A signed-out visitor succeeds when they understand what Data Sync does, what it sends, what it does not send, and how signing in enables an account-specific bookmarklet.
- Approved: A signed-in first-time user succeeds when they install the bookmarklet, open the official NOSTALGIA page, run it, and receive an understandable result.
- Approved: A returning user succeeds when the latest status, one clear next action, the latest result, and any required recovery are immediately visible.
- Approved: Recent-only synchronization is a valid successful outcome when the official detailed data is unavailable. It must never be presented as a failed or corrupted sync merely because it did not include the full catalog.
- Approved: Desktop remains required. Added width supports side-by-side status/result and setup/recovery comprehension rather than preserving a fixed approximately 390px shell.
- Approved: Current styling and geometry are audit evidence, not NosLog 2.0 visual authority.

Current-Product and Domain Evidence

Repository and Data Evidence

- Observed: The localized public route is currently `/[locale]/bookmarklet`.

Signed-out visitors can read the guide; an authenticated user is required to create the account-specific bookmarklet and view their result.

- Observed: `createSyncToken` signs `{ userId, version }` with HMAC. The token has no time expiry. `sync_token_version` invalidates every previously generated bookmarklet for the user when incremented.

- Observed: The bookmarklet runs only from the official

`https://p.eagate.573.jp` origin, reads player data and the recent history, requests detailed music data when available, then sends the structured result and NosLog sync token to NosLog.

- Observed: The transfer does not send the user's p.eagate password or p.eagate

login cookie to NosLog. The account-specific token is embedded in the bookmarklet code and must not be presented as a standalone secret or written to logs.

- Observed: The receive endpoint requires the exact p.eagate origin and JSON,

limits request bodies to 8 MB, caps recent history at 100 entries and music data at 2,000 entries, enforces a 30-second cooldown, and permits only one active processing attempt per user.

- Observed: A processing attempt may remain active for up to 15 minutes. A later

request marks an older attempt failed when that timeout has elapsed. Administrator health monitoring already treats processing at or above 10 minutes as delayed.

- Observed: Full sync updates profile data, accumulates deduplicated recent play

events, applies current records only to known charts, stores record snapshots only when values changed, and recalculates dependent user and ranking data.

- Observed: Recent-only sync updates profile and accumulated recent plays but does

not replace all current chart records. Existing full records remain available.

- Observed: ChartPlayHistory deduplicates by user, chart, source play time, score,

max combo, and rank. ChartRecordSnapshot stores changed full-record states by sync and chart. Repeated attempts therefore support history without duplicating identical play events.

- Observed: Unknown music charts are skipped. The attempt can still complete while

recording a notice. The current public summary reduces this to a boolean; the raw skipped chart IDs and internal message remain an administrator concern.

- Observed: DataSync stores attempt status, scope, received recent plays, inserted

plays, changed records, an optional internal message, start, and completion time. The current public query reads only the latest attempt.

- Observed: Current coverage is separately derived from PlayData and accumulated

history: played charts, charts with complete judgement counts, and charts with FAST/SLOW history.

- Observed: The Privacy page states that profile, play, judgement, rating, and sync

records are retained until account deletion and that credentials are not stored.

Current Interface and Browser Evidence

- Observed: The current page places status, token reset, latest result, bookmarklet

installation, and run guidance in one long fixed-width column.

- Observed: Latest result expands to show attempt scope, received and inserted recent

plays, changed records, and current judgement/timing coverage. It does not show past attempts or changed-item previews.

- Observed: The installation component switches between a desktop drag guide and a

mobile bookmark-editing guide. Text and GIFs are both present.

- Observed: Token regeneration already uses a modal that explains immediate

invalidation. Initial focus lands on the non-destructive Cancel action.

- Observed: At 390×844, the closed page is a long single column. At 320×800, the

inspected page did not create document-level horizontal overflow. The secondary copy button was 36px high and should not establish the 2.0 target size.

- Observed: At 1440×900, the main content remains exactly about 390px wide and

leaves most desktop space unused.

- Observed: Expanding the mobile installation guide loads two additional tall GIFs.

Current guide GIFs generated Next Image LCP warnings but no runtime error.

- Observed: Processing state does not automatically refresh, so a completed attempt can remain visually processing until the user reloads.

External Domain Evidence

- Observed: Official NOSTALGIA Play Data exposes recent history for the latest 30 songs and requires the e-amusement Basic Course for detailed song records.
- Observed: Tachi, Gitadora-to-Kamaitachi, mai-tools, GITADORA Skill Viewer, and V-ARCHIVE demonstrate repeatable score collection, official-site extraction, installation instructions, missing-catalog limitations, and preserved history as established rhythm-game tracking needs.
- Observed: Notion and Slack import guidance exposes status, limitations, completion, partial outcomes, history, and recovery rather than treating import as an opaque submit action.
- Observed: Process-list guidance distinguishes a concise setup sequence from a linear step indicator. The bookmarklet is installed once and then reused; the page is not a persistent multi-screen wizard.
- Observed: Details and accordion guidance supports progressive disclosure when a returning majority does not need setup content, while warning against hiding content required to complete the primary first-time task.
- Observed: Progress guidance requires an indeterminate state when duration cannot be measured. A fabricated percentage would falsely imply knowledge the server does not have.
- Observed: WCAG status-message and modal-dialog guidance requires programmatic announcements without unnecessary focus movement and clear focus behavior for consequential confirmation.
- Observed: Security guidance converges on account-specific, revocable credentials, least exposure, no logs, and explicit consequences when credentials are replaced.
- Observed: Browser bookmarklet guidance confirms that mobile bookmark creation commonly requires copying and editing a bookmark URL and that behavior varies by browser.

Approved Scope and Invariants

1. The Data Sync entry remains one localized public route with informative signed-out, first-time signed-in, and returning signed-in states.
2. Returning users see status and the next sync action before setup instructions.
3. First-time users see a concise setup process with installation and execution guidance expanded by default.
4. The page never asks the user to confirm installation with an unverifiable manual Installed checkbox.
5. The recurring sync path is not represented as a permanent step indicator or wizard.

6. The primary recurring action opens the official NOSTALGIA page in the expected context; the user explicitly runs the installed bookmarklet there.
7. Attempt scope and persistent NosLog coverage are separate concepts and separate visual groups.
8. Full and recent-only attempts are both valid. Recent-only never deletes or visually discredits previously synchronized full records.
9. First mention uses the localized equivalent of 'e-amusement Basic Course (Basic Pass); later mentions may use Basic Course'. The label explains availability but does not imply NosLog sells or controls the subscription.
10. No determinate percentage is shown unless the future pipeline can truthfully measure total work and completed work. The current pipeline uses indeterminate processing.
11. Processing auto-refreshes while active. At 10 minutes it becomes delayed; at 15 minutes it exposes retry recovery consistent with the server timeout.
12. Unknown charts create Completed · some excluded, not a full failure. Public UI shows an excluded count and safe explanation, never raw IDs or internal errors.
13. Latest-result metrics use user-meaningful labels: Recent plays checked, 'New plays saved, and Charts with updated best records'.
14. Latest result may show at most three linked change previews. Large first full syncs are summarized as First full record import rather than rendered as hundreds of changes.
15. A collapsed Sync History exposes the latest five attempts. It is not an infinite technical audit log.
16. Token invalidation is secondary security/help functionality, not a persistent warning competing with the primary sync action.
17. Invalidation immediately expires every existing bookmarklet for the account and makes reinstallation the required next action.
18. The page clearly states what data is sent and that the p.eagate password and login cookie are not sent to NosLog.
19. A raw sync token is never rendered as standalone visible text, copied separately, written to client/server logs, analytics, monitoring, or public error details. The signed token remains embedded only where technically required in the account- specific bookmarklet.
20. Text instructions are independently complete. GIFs supplement those instructions; they never become the only explanation.
21. The page reflows at 320 CSS px, uses added desktop space intentionally, and does not preserve a fixed phone- width shell.

Terminology and Data Meaning

User-Facing Terms

Meaning	Required user-facing concept	Must not imply
One server ingestion	Sync attempt	Continuous connection or background sync
Detailed catalog response present	All records	Every historical play event ever made
Detailed catalog response unavailable	Recent 30 plays	Failure, deletion, or damaged data
Current stored completeness	NosLog coverage	The scope of only the latest attempt
New deduplicated recent events	New plays saved	Every row received was newly stored
Changed current chart record	Updated best record	The user necessarily played it in this exact attempt
Unknown catalog entries	Some excluded	Entire sync failure
Signed bookmarklet credential	Account-specific bookmarklet	p.eagate password or official KONAMI token

Attempt Scope

- `All records` means the official detailed music response was available and the attempt could update the current per-chart record set in addition to recent plays.
- `Recent 30 plays` means the attempt received the official recent history but not the detailed music response. It adds new recent events and profile context while leaving existing current chart records intact.
- The number `30` describes the official recent-history window, not a NosLog deletion policy. NosLog retains deduplicated accumulated events under the approved privacy contract.

Current NosLog Coverage

Coverage is the persistent state after all successful attempts, not a claim about the latest payload. Show:

1. played-chart count;
2. charts with complete judgement details;
3. charts with FAST/SLOW details.

The design may express numerator/denominator only when the denominator is meaningful and derived from the user's played records. Never merge the three measures into one unexplained sync percentage.

Approved Information Hierarchy

Signed-Out Entry

Use one semantic main and this source order:

1. page identity and concise explanation;
2. what is synchronized and what is not collected;
3. sign-in action;
4. concise preview of the installation/run process;
5. limitations, including Basic Course scope.

Do not fabricate personal status, result, coverage, token, or history while signed out.

First-Time Signed-In State

Use this mobile-first source order:

1. page identity;
2. Not synced yet status and concise next-action explanation;
3. account-specific security/privacy note;
4. expanded bookmarklet installation process;
5. expanded official-page execution process;
6. troubleshooting and token invalidation as secondary content.

The first setup uses a concise process list because all steps are required. It does not use a global completion indicator and does not ask the user to mark steps complete.

Returning Signed-In State

Use this mobile-first source order:

1. current status and its timestamp;
2. primary Open NOSTALGIA page action or status-appropriate recovery action;
3. latest result, including attempt scope and current coverage as separate groups;
4. up to three change previews when useful;
5. collapsed Install or reinstall bookmarklet guidance;
6. collapsed Sync history with the latest five attempts;
7. secondary Help/Security, including bookmarklet invalidation.

When a failure is specifically caused by an expired token or an installation problem, open or strongly reveal the relevant recovery guidance instead of forcing the user to find a collapsed section manually.

Wide Composition

On wide layouts, preserve the semantic source order while using two purposeful areas:

- status, primary action, latest result, coverage, and previews;
- installation/recovery, history, and security/help.

The result area receives more visual weight. Do not create an empty desktop dashboard, duplicate status cards, or place every section in equal-width equal-priority boxes.

Action Priority

Primary Actions

- First-time authenticated: create/install the account-specific bookmarklet.
- Returning idle/completed: Open NOSTALGIA page.
- Expired token: Reinstall bookmarklet.
- Timed-out/failed: Try sync again after explaining the next valid step.

Only one primary action is emphasized in a given state.

Secondary Actions

- expand installation or browser-specific help;
- copy the bookmarklet address when required by the browser workflow;
- inspect a previewed changed Music detail;
- expand recent Sync History;

- report a repeated error;
- invalidate existing bookmarklets.

Do not place all secondary actions in the persistent top action row.

Setup and Repeated-Sync Flow

First Installation

1. Explain that the bookmarklet belongs to the current NosLog account and must not be shared.
2. Provide desktop drag installation where supported.
3. Provide a mobile/browser fallback that copies the complete bookmarklet address, creates a normal bookmark, and replaces its URL.
4. Explain browser-specific bookmark-editing limitations and the supported fallback.
5. Direct the user to sign into the official NOSTALGIA Play Data page.
6. Tell the user to run the bookmarklet from that official page.
7. Return to or refresh the NosLog status automatically when technically possible; otherwise give one concise return instruction.

The guide must not describe pasting the account-specific code into an untrusted page, sharing it, or sending it to support.

Returning Sync

1. The page presents current status and Open NOSTALGIA page.
2. The user signs in to the official page if necessary and runs the existing bookmarklet.
3. NosLog enters indeterminate processing and begins status refresh.
4. The completed result separates attempt scope, latest changes, and current coverage.
5. The user may open a previewed Music detail or leave the page; no extra confirmation is required.

Basic Course Limitation

- On the first relevant explanation, use e-amusement Basic Course (Basic Pass) or its approved localized equivalent.
- Explain the effect, not only the subscription name: without detailed official data, the current attempt can still synchronize the recent 30 plays, while existing full records stay in NosLog.
- Do not use a warning color simply because the user has no Basic Course response.
- Do not present a purchase action unless it is an ordinary external official link and its presence is separately approved later.

Status, Timing, and Recovery Contract

Status Model

State	Visible meaning	Primary response	Additional behavior
Signed out	Sign-in is required for an account-specific bookmarklet	Sign in	Keep public explanation available
No history	No attempt has completed or started	Install bookmarklet	First-use guide expanded
Processing <10 min	Sync is being processed	No duplicate submit	Indeterminate status and automatic refresh
Delayed 10–<15 min	Sync is taking longer than usual	Wait; retain safe recovery help	Continue refresh; no fake percentage
Timed out ≥15 min	Current attempt did not finish in the allowed window	Try again	Show retry and repeated-error report path
Completed - full	All available detailed records and recent history processed	Open NOSTALGIA page for a later sync	Show full scope and coverage
Completed - recent	Recent 30 plays processed; previous full data preserved	Open NOSTALGIA page for a later sync	Explain Basic Course effect neutrally
Completed - some excluded	Known data processed and unknown charts excluded	Optional detail/retry later	Show excluded count, no raw chart IDs
Failed - signed out of NOSTALGIA	Official session unavailable	Sign in to NOSTALGIA and run again	Open execution help
Failed - expired token	Bookmarklet version invalid	Reinstall bookmarklet	Open reinstall help
Cooldown	A valid attempt ran too recently	Wait remaining time	Countdown based on server response
Failed - server/process	NosLog could not finish	Try again	Offer error report after repetition

Automatic Refresh

- Poll only while an attempt is active or when returning from the official page and a new attempt is expected.
- Stop when the attempt reaches a terminal state, the page is hidden for a sufficiently long period, the user leaves, or a bounded network-failure threshold is reached.
- Use cache-safe server data and avoid creating duplicate ingestion requests. Status polling never reruns the bookmarklet.
- Announce meaningful transitions such as completed, partial, failed, or delayed.

Do not announce every poll.

- Keep focus where the user placed it. Completion does not move focus into the result.

Failure Copy

- Explain what happened in one short statement and give one state-specific next action.
- Preserve the latest successful coverage even when the latest attempt fails.
- Never show stack traces, raw exception text, raw skipped IDs, token fragments, database identifiers, or administrator-only diagnostic messages.
- If exact failure classification is not safely available, use the general server/process recovery rather than guessing that the page session or token was at fault.

Result and History Contract

Latest Result

Always identify:

- terminal/ active status;
- start or completion time in the active locale;
- attempt scope: All records or Recent 30 plays;
- duration when known;
- three attempt metrics with the approved user-facing labels;
- separate current NosLog coverage;
- partial exclusion count when applicable.

Zero values remain visible when they answer a meaningful question, such as a valid sync that found no new play. Avoid celebratory success treatment that implies a record improvement when all change counts are zero.

Change Preview

- Show at most three preview items after a completed attempt when useful.
- Recent-only attempts prioritize newly stored recent plays.
- Full attempts prioritize changed best records.
- Each item identifies Music, difficulty, and the relevant changed value without

reproducing a complete record card.

- Each item may link to the localized Music detail.
- A first full sync with a very large changed count uses one summary such as 'First full

record import'; it does not pretend hundreds of baseline rows are individual new achievements.

- If no new or changed item exists, omit the preview region rather than displaying an empty decorative container.

Sync History

- Keep the latest five attempts in reverse chronological order under a collapsed

Sync history disclosure.

- Each row shows localized date/time, status, scope, duration if known, and concise attempt metrics.

- Partial completion is distinguishable from complete success and full failure.
- The current attempt may appear as processing/delayed at the top.
- History does not expose internal errors, tokens, raw chart IDs, administrator notes,

request sizes, or infrastructure metadata.

- No infinite scroll, pagination, export, or complete technical audit log is required in the user page.

Installation Guidance and Media Contract

Progressive Disclosure

- First-time signed-in state: installation and run guidance are expanded.
- Returning successful state: group them under `Install` or `reinstall` bookmarklet and collapse by default.
- Relevant installation failure or expired token: reveal the affected guidance.
- Preserve expansion state during the current visit where practical.

Text and GIF Relationship

- Every installation and execution step has complete visible text. A user must be able to finish the task when animations fail, are paused, are not understood, or are not loaded.
- A GIF illustrates the same local action and is supplementary. Do not replace the instruction with `See the animation` or rely on pixels alone to identify a control.
- Use descriptive alternative text only when the animation adds information not already stated next to it. Otherwise use an empty alternative to avoid duplication.
- Provide an accessible enlargement or full-media view when the action is too small to inspect at mobile width.
- Respect reduced-motion preferences. A paused/static first frame or user-controlled playback must remain understandable.
- Defer returning-user media until its disclosure is opened. Do not make multiple tall GIFs compete with status/result for initial loading priority.
- Preserve aspect ratio and prevent cumulative layout shift with known dimensions or equivalent reserved space.

Browser-Specific Guidance

- Describe the supported desktop drag flow and mobile copy/edit flow without claiming every browser uses identical labels or menu locations.
- Identify known browsers where editing a bookmark URL is unavailable or materially different and give a supported alternative, such as desktop installation plus bookmark synchronization, when verified.
- If clipboard permission fails, keep the complete next-step explanation and provide a recoverable retry; never reveal only the token portion.
- Do not promise bookmarklet execution where a browser blocks `javascript: bookmarks`.

Security and Privacy Contract

Required Explanation Near Setup

State concisely that:

1. the bookmarklet is generated for the current NosLog account and must not be shared;
2. NosLog receives player information, recent play history, and detailed record data

only when the official response provides it;

3. NosLog does not receive the user's page password or page login cookie;

4. synchronized profile, play, judgement, rating, and sync records follow the Privacy page's retention and account-deletion policy.

Do not turn this into a permanent alarm banner. The explanation belongs near setup and in Help/Security.

Bookmarklet Invalidation

- Label the secondary action by consequence, such as 'Invalidate existing bookmarklets, rather than the implementation term increment token version'.
- Open a modal naming that every existing bookmarklet for this account stops working immediately.
- Initial focus lands on Cancel or the least destructive action.
- Keep destructive confirmation visually and semantically distinct and name the consequence in the final action label.
- Escape, Cancel, and close return focus to the trigger without mutation.
- On success, close the modal, announce success, update page state, and make reinstallation the required next action.
- Do not imply the user can restore an invalidated bookmarklet. Recovery is generation and installation of the new account-specific bookmarklet.

Transport and Error Boundaries

- Preserve exact official-origin checks, request schema validation, payload limits, cooldown, single-processing-attempt enforcement, and no-store response behavior.
- Do not place the signed bookmarklet, token, payload, page content, or private record details in analytics or error-report attachments by default.
- Public result previews expose only the authenticated user's own permitted data and ordinary Music metadata.
- A feedback report about sync failure may include safe attempt ID/time and classified state generated by the server, but not a raw token or full payload.

Authentication and Permission Contract

Signed Out

- The guide, data categories, limitations, and privacy explanation remain public.
- Account-specific installation, result, coverage, history, and invalidation require sign-in.
- After sign-in, return the user to the localized Data Sync page.

Signed In

- A user sees only their own bookmarklet, attempts, coverage, previews, and recovery.

- No role beyond an ordinary authenticated user is required to synchronize their own data.

- Session expiry during a page action returns a concise sign-in recovery and never exposes previously rendered credentials in an error.

Administrator Boundary

- Administrator health, delays, raw errors, attempt IDs, user lookup, and operational investigation remain in the separate administrator surface.
- The user page may consume safe derived classifications and excluded counts but must not become a mirror of the administrator log.

Responsive Contract

Compact Layout

- Design mobile-first at a representative 390px, then verify reflow down to 320 CSS px and intermediate widths.
- Use the approved returning-user source order: status, next action, latest result, preview, install/recovery, history, security.
- Stack metrics or use a wrapping compact grid according to label/value width. Do not reduce critical labels below legibility to retain three rigid columns.
- Primary actions span an appropriate reliable touch width. Secondary icon-only controls require accessible names and adequate targets.
- Long Korean, Japanese, and English status or browser instructions wrap without overlapping icons or actions.
- GIF/media stays within its container and can enlarge without causing document-level two-dimensional scrolling.

Wide Layout

- Do not retain the current fixed 390px content width.
- Use a bounded responsive container and a two-area composition when content supports it: result/status as the main area and setup/recovery/help as the supporting area.
- Latest metrics and coverage may use wider horizontal comparison, but source order, heading relationships, and keyboard order remain coherent without CSS placement.
- Avoid stretching instructional prose and GIFs to the entire viewport. Use readable line lengths and purposeful media sizes inside the wider grid.
- A one-column layout may remain at widths where two columns would make either result or instruction content too narrow; transition values are content-driven.

Short and Zoomed Viewports

- Token confirmation remains operable with internal scrolling without hiding the

title or actions.

- At 200% text zoom, status, metrics, history rows, and instructional steps reflow rather than clip.

- Sticky actions, if later used, must not cover status messages, expanded media, or the final history/security content.

Accessibility Contract

- Use one h1, ordered section headings, semantic lists for setup steps and history, and native button/link semantics.

- A process list is ordinary content, not a fake progress widget. Do not add `aria-current="step"` to repeated synchronization.

- The processing region exposes a concise accessible name and indeterminate busy state. Mark only the updating result region `aria-busy`, not the entire page.

- Announce meaningful status transitions with an appropriate status or alert region without moving focus. Avoid repeated announcements from each poll.

- The visible status never depends only on color or a pulsing dot; pair it with text.

- Disclosures expose expanded state, retain a visible keyboard focus indicator, and use controls with accessible names that describe their content.

- Modal confirmation follows the dialog pattern, traps focus while open, starts at the least destructive action, supports Escape, and returns focus to its trigger.

- Copy feedback is programmatically announced and does not remove focus from the copy control.

- Instructions identify controls by label and purpose, not only location, shape, or color.

- GIFs never autoplay in a way that violates motion guidance; reduced-motion users receive an equivalent static or controlled experience.

- Linked preview rows expose Music and difficulty in their accessible name and do not use the changed numeric value as the only link label.

- All interactive targets and information remain keyboard-operable and readable at 320 CSS px and 200% zoom.

Localization Contract

- `/ko/bookmarklet`, `/ja/bookmarklet`, and `/en/bookmarklet` provide equivalent features, states, recovery, security, history, and metadata.

- Preserve official identity and product terms. Localized first mention explains the official e-amusement Basic Course and the parenthetical Basic Pass term approved for NosLog; do not mistranslate it as a NosLog plan.

- All `records` and `Recent 30 plays` must remain semantically distinct in every locale. Avoid a translated generic `Partial sync` label that sounds like damage.

- Localize dates, times, relative times, durations, and number grouping with locale-aware formatters. Store and compare timestamps as absolute values.
 - Korean and Japanese text may be compact; English recovery and security text may be materially longer. Layout transitions are driven by content rather than language-specific hard-coded widths.
 - Browser menu labels may differ by OS, browser version, and locale. Use verified localized labels where available and pair them with a purpose-based explanation.
 - Alternative text communicates the action demonstrated, not a filename or a literal frame-by-frame narration.
 - Error classification is stable across languages even when user-facing copy differs.
- Do not parse localized strings to determine recovery behavior.

Runtime State Contract

Use explicit server-derived state rather than inferring behavior from visual copy:

```
type PublicSyncStatus =
  | "none"
  | "processing"
  | "delayed"
  | "completed"
  | "completed_with_exclusions"
  | "failed";

type SyncScope = "full" | "recent";

type SyncRecovery =
  | "none"
  | "sign_in_nostalgia"
  | "reinstall_bookmarklet"
  | "wait_for_cooldown"
  | "retry"
  | "report_repeated_failure";

interface PublicSyncAttempt {
  id: number;
  status: PublicSyncStatus;
  scope: SyncScope;
  startedAt: string;
  completedAt: string | null;
  receivedRecentPlays: number;
  insertedRecentPlays: number;
  changedBestRecords: number;
  excludedChartCount: number;
  recovery: SyncRecovery;
  retryAfterSeconds: number | null;
}

interface SyncCoverage {
  playedCharts: number;
  judgementCharts: number;
  timingCharts: number;
}
```

The exact implementation may use equivalent names. It must preserve the separation of attempt, persistent coverage, safe recovery classification, and administrator-only raw diagnostics.

Implementation Mapping

Area	Current source	2.0 obligation
Route and server composition	@@NOSLOGTOKEN0@@	Branch signed-out, first-use, returning, processing, delayed, result, and recovery hierarchy without fixed phone width
Latest result query	@@NOSLOGTOKEN0@@	Return safe latest-five attempts, excluded count/classification, coverage, and bounded change previews without raw errors
Token invalidation	@@NOSLOGTOKEN0@@	Preserve version invalidation, expose consequence-led response, and require reinstall after success
Install guide	@@NOSLOGTOKEN0@@	Add first/returning disclosure behavior, complete text, media enlargement, reduced-motion/static equivalent, lazy returning media, and browser-specific recovery
Result presentation	@@NOSLOGTOKEN0@@	Separate attempt scope and coverage, use approved labels, add partial and preview/history contracts, and announce live transitions
Confirmation	@@NOSLOGTOKEN0@@	Keep least-destructive initial focus and return focus; move trigger to secondary Help/Security and make reinstall the post-success action
Bookmarklet creation	@@NOSLOGTOKEN0@@	Preserve signed account-specific code, official origin flow, and no standalone token/log exposure
Receive endpoint	@@NOSLOGTOKEN0@@	Preserve origin/schema/size/cooldown/locking/timeout controls; return safe machine-readable recovery and exclusion counts
Full-record update	@@NOSLOGTOKEN0@@	Preserve known-chart filtering, current-record replacement semantics, and changed snapshot count
Recent history	@@NOSLOGTOKEN0@@	Preserve deduplication and expose bounded safe new-play preview data
Profile update	@@NOSLOGTOKEN0@@	Preserve profile update without turning it into a separate user-facing scope
Schema	@@NOSLOGTOKEN0@@ DataSync, ChartPlayHistory, ChartRecordSnapshot, and User.sync_token_version	Add safe excluded count/recovery classification if needed; retain historical and cascade/privacy guarantees
Admin health	@@NOSLOGTOKEN0@@ and @@NOSLOGTOKEN1@@	Keep raw operations separate while sharing the 10-minute delayed and 15-minute timeout meaning
Privacy	@@NOSLOGTOKEN0@@	Keep collection, credential exclusion, retention, and deletion copy synchronized with the Data Sync explanation
Localization	@@NOSLOGTOKEN0@@	Add complete KO/JA/EN status, scope, coverage, history, security, media, browser, and recovery copy
Tests	@@NOSLOGTOKEN0@@ , @@NOSLOGTOKEN1@@ , and @@NOSLOGTOKEN2@@	Extend safe state classification, attempt history, partial results, polling, token recovery, media fallback, responsive, and accessibility coverage

Representative Fixtures

Validate at least:

1. signed-out visitor in Korean, Japanese, and English;
2. signed-in user with no attempt and a newly generated account-specific bookmarklet;
3. first-time desktop drag installation and first-time mobile copy/edit installation;
4. browser where bookmark URL editing works, differs, is blocked, or clipboard access

is denied;

5. processing at 5 seconds, 9:59, 10:00, 14:59, and 15:00;
6. polling that transitions once from processing to full completion without duplicate

announcements or duplicate ingestion;

7. a full attempt receiving 30 recent plays, inserting 0, changing 1 best record, and retaining broad current coverage;
8. a recent-only attempt inserting several events while preserving earlier full chart records and coverage;
9. valid completion with all three change metrics equal to zero;
10. first full import with hundreds of changed records summarized as a baseline import;
11. one, three, and more than three preview candidates with correct truncation and localized Music links;
12. completed attempt with one and many unknown charts, safe excluded count, and no raw ID in the public page;
13. latest five attempts containing full, recent, partial, failed, delayed, and active variants in reverse chronological order;
14. official NOSTALGIA session missing, expired token, active processing conflict, 30-second cooldown, server failure, and repeated failure;
15. failed latest attempt while earlier successful coverage remains visible;
16. token invalidation cancel, Escape, confirm failure, confirm success, focus return, and mandatory reinstall state;
17. attempted token, payload, and raw-error leakage through visible copy, console, analytics, monitoring, URL, or feedback context;
18. GIF loaded, deferred, failed, enlarged, paused/ static, and reduced-motion behavior while text remains sufficient;
19. 320px, representative 390px, intermediate widths, wide desktop, short viewport, 200% text zoom, keyboard-only, and screen-reader use;
20. long Korean recovery text, Japanese browser labels, and substantially longer English security copy.

Browser Acceptance Contract

- /ko/bookmarklet, /ja/bookmarklet, and /en/bookmarklet expose equivalent Data Sync behavior and metadata.
- Signed-out users receive an accurate public explanation and sign-in recovery without a bookmarklet, personal result, coverage, or history leak.
- First-use signed-in users receive complete expanded text-led installation and execution guidance; returning successful users receive status and next action first.
- Desktop drag and supported mobile copy/edit flows can install the current account's bookmarklet. Unsupported browser behavior is stated and has an honest fallback.
- Running from a non-peerage origin remains rejected. Invalid content type, oversized payload, malformed payload, invalid token, cooldown, and active processing remain safely rejected.
- Processing auto-refreshes without rerunning ingestion, uses no fake percentage, announces terminal/delayed transitions once, and does not steal focus.

- The interface changes to delayed at 10 minutes and offers retry recovery at the 15-minute timeout boundary consistently with server behavior.
- Full and recent-only results are both successful and clearly distinct. A recent-only result never deletes, hides, or implies deletion of earlier full records.
- Latest result visually and semantically separates this attempt's scope/metrics from persistent NosLog coverage.
- Partial completion shows an excluded count and safe explanation without internal error text or raw chart IDs.
- At most three useful change previews appear, first full imports are summarized, and preview links resolve to the correct localized Music detail.
- Sync History shows at most the latest five attempts in correct order with safe status, scope, time, duration, and metrics.
- Invalidation confirmation starts at the least destructive action, supports Cancel and Escape, returns focus, immediately invalidates old bookmarklets only after success, and makes reinstall the next action.
- No raw token, password/cookie, source payload, private record detail, stack trace, or administrator-only diagnostic appears in visible public copy, URL, console, analytics, monitoring, or error-report defaults.
- GIF failure, non-animation, deferral, reduced motion, or an unavailable enlargement never prevents completion because adjacent text is independently complete.
- At 320 CSS px, no status, metric, action, history row, long browser instruction, security copy, modal, or media frame creates document-level horizontal overflow, clipping, or overlap.
- Wide layouts use meaningful result/setup space and do not retain a fixed phone-width shell or stretch instructional prose/media indiscriminately.
- At 200% text zoom and in short viewports, all content and confirmation actions remain reachable and correctly ordered.
- Normal and failure flows produce no unexpected console error, hydration issue, duplicate status announcement, duplicate ingestion, stale processing state, focus loss, or credential leakage.

Reference Matrix

Source	Transferable principle	NosLog application	Limitation
Current Data Sync entry	Establishes public/auth hierarchy, current status, guide, and result flow	Grounds observed functionality and current problems	Current fixed-width composition is not 2.0 authority
Current bookmarklet implementation	Shows account-specific signed code and official-site extraction	Grounds security, execution, and token meaning	Minified runtime is not user-facing guidance
Current receive endpoint	Establishes origin, validation, size, cooldown, concurrency, timeout, and partial-catalog behavior	Grounds safe state and recovery requirements	Current public response classification is not yet sufficiently detailed
Current sync schema	Separates attempt, accumulated recent events, changed snapshots, and token version	Grounds scope, coverage, history, and invalidation	Latest-five public history and excluded count need safe query support
Current sync tests	Encodes verified security and ingestion behavior	Protects implementation invariants	Does not cover every approved 2.0 presentation state
Official NOSTALGIA Play Data notice	Recent history is the latest 30 songs; detailed music data depends on the Basic Course	Grounds full-versus-recent meaning and subscription explanation	Official availability can change and does not define NosLog retention
Official NOSTALGIA Play Data	Official records prioritize authenticated player and song data	Grounds source identity	Most content requires official authentication and cannot define NosLog UI
Tachi	Rhythm-game tracking preserves scores, sessions, history, and integrations	Supports repeatable sync and historical value	Multi-game architecture is broader than NosLog
Gitadora to Kamaitachi	Official-site scraping needs an explicit guide and may exclude songs missing from the destination catalog	Supports safe partial completion and setup	Userscript/file workflow differs from NosLog's direct bookmarklet post
mai-tools bookmarklet guide	Desktop drag and mobile copy/edit installation are established bookmarklet flows	Supports browser-specific text-led setup	It does not define NosLog security or supported-browser policy
GITADORA Skill Viewer	A bookmarklet can fetch and store official-site skill data for later viewing	Supports the recurring extraction model	Legacy surface and injected-script implementation are not visual/security authority
V-ARCHIVE client guide	Imported rhythm-game records need explicit credential handling and clear capture/upload feedback	Supports concise trust and result feedback	Native client capture differs from browser bookmarklets
Notion: Import data	Imports expose status, limitations, completion, and troubleshooting	Supports status, limitation, and recovery disclosure	Workspace migration is larger and less frequent than score sync
Slack import FAQ	Multi-phase imports communicate progress, completion dependencies, and troubleshooting	Supports honest processing and failure recovery	Enterprise migration phases do not map one-to-one to NosLog
USWDS Process List	A process list explains a sequence without implying interactive wizard progress	Supports first-use setup steps	It does not define recurring status or final NosLog styling
USWDS Step Indicator	Step indicators are for linear multi-step flows with current-position meaning	Supports rejecting a permanent sync stepper	First setup still benefits from ordinary numbered instructions
GOV.UK Details	Secondary detail may be disclosed on demand, but essential task content should not be hidden	Supports first-use expansion and returning-use collapse	Browser-native details styling is not NosLog visual authority
WAI-ARIA APG Accordion	Disclosure headers expose state and remain keyboard operable	Supports install/history/help sections	APG semantics do not select which content is primary
Carbon Progress Indicator	Step progress differs from background system processing	Supports rejecting a recurring wizard	Enterprise component styling is not adopted
Carbon Progress Bar	Indeterminate presentation is required when total progress cannot be calculated	Supports honest processing without fake percentages	Future measurable pipelines may justify determinate progress
Carbon Inline Loading	Local processing can transition to success or error without blocking the entire page	Supports status-local loading	Exact animation and timing are Foundation decisions
WCAG 2.2 Status Messages	Important progress, success, and error changes must be programmatically exposed without focus movement	Supports polling announcements	It does not prescribe visible layout or poll frequency
WAI-ARIA APG Modal Dialog	Modal focus is contained, predictable, cancellable, and returned to the trigger	Supports token invalidation confirmation	It does not define consequence copy
GOV.UK Warning Text	Warning treatment is reserved for significant consequences	Supports consequence-led invalidation while rejecting permanent alarm treatment	Government risk tone can be excessive for routine setup
MDN @@NOSLOGTOKEN0@@ URLs	javascript: navigation executes script in the page context and is subject to browser/security restrictions	Grounds bookmarklet limitations	It documents the platform, not a recommendation to bypass browser policy

Source	Transferable principle	NosLog application	Limitation
MDN CORS	Cross-origin requests require explicit origin and response controls	Supports preserving exact official-origin handling	CORS alone is not authentication or payload validation
OWASP Secrets Management Cheat Sheet	Secrets should be least-exposed, revocable, rotated, and excluded from logs	Supports account-specific token and invalidation boundaries	Bookmarklet delivery still requires the signed credential inside executable code
GitHub token security	Revocation must have clear consequences and requires replacement credentials	Supports explicit invalidation and reinstall recovery	GitHub tokens have different scope and expiry capabilities
Apple Safari bookmarks on iPhone	Mobile bookmark creation and editing are platform-specific user actions	Supports browser-specific instructions	The page does not guarantee <code>javascript:</code> execution in every browser/version
WCAG Reflow	Required content reflows at 320 CSS px without page-level two-dimensional scrolling	Grounds compact acceptance	Media enlargement may use a deliberate bounded viewer
WCAG Animation from Interactions	Motion triggered by interaction needs a disable/alternative when nonessential	Supports reduced-motion and static guidance	Instructional GIF policy also depends on content equivalence

Evidence Convergence

- Official NOSTALGIA and current ingestion evidence converge on two legitimate payload

scopes: detailed full records when Basic Course data is available and recent 30 plays otherwise. Neither supports labeling recent-only as failure or deleting prior full data.

- Rhythm-game trackers converge on repeatable import, preserved history, missing-

catalog handling, and clear setup instructions. They do not justify exposing internal scraper errors or technical logs to ordinary users.

- Production import services converge on visible status, bounded history, limitations,

completion, partial outcomes, and actionable recovery. Their enterprise phase models do not justify fabricated percent progress for NosLog.

- Process and disclosure guidance converges on expanded essential first-use instructions

and collapsed secondary returning-use help. It does not support a permanent wizard or an unverifiable Installed checkbox.

- Accessibility references converge on indeterminate busy state, programmatic terminal

announcements without focus theft, keyboard disclosures, consequence-led modal behavior, and text alternatives to media.

- Security sources converge on account-specific revocable credentials, least exposure,

no logging, explicit invalidation effects, and replacement after revocation. They do not remove the technical need to embed the signed credential inside the bookmarklet.

- Browser references converge on text-led, browser-aware installation and honest

limitations. GIF-only guidance cannot carry the approved accessibility or recovery contract.

- The 10-minute delayed threshold, 15-minute retry threshold, latest-five history,

three-preview cap, terminology, ordering, and post-invalidation reinstall requirement are approved NosLog product decisions informed but not dictated by external sources.

Rejected and Superseded Alternatives

- Keep setup above status for every visit - Superseded: returning users see current

status and next action first; setup collapses unless relevant.

- Permanent multi-step wizard or step indicator - Rejected: recurring sync is not a

linear multi-screen completion flow.

- Manual Installed checkbox - Rejected: NosLog cannot verify it and the state can become false after browser cleanup or token invalidation.
- Hide first-use instructions in a disclosure - Rejected: every first-time step is required to complete the task.
- Show only GIFs - Rejected: text must independently complete the task; animations are supplementary and may fail, be paused, or be inaccessible.
- Remove GIFs entirely - Rejected: verified animations remain useful visual support when paired with complete text, enlargement, deferred loading, and reduced-motion handling.
- Show a determinate percentage based on elapsed time - Rejected: elapsed time is not completed work and would be deceptive.
- Require Basic Course for any success - Rejected: recent 30 plays remain a valid successful scope.
- Treat recent-only as warning/failure - Rejected: explain its neutral limitation and preserve earlier full records.
- Merge latest-attempt scope and persistent coverage into one percentage - Rejected: they answer different questions and have no honest common denominator.
- Show all changed records inline - Rejected: cap useful previews at three and summarize first full import.
- Expose complete user technical logs - Rejected: latest five safe summaries are sufficient; administrator diagnostics remain separate.
- Fail the entire attempt for unknown charts - Rejected: known records complete and exclusions are counted safely.
- Expose raw skipped chart IDs or exception text - Rejected: public UI uses a safe count/classification.
- Keep token invalidation as a persistent top warning - Superseded: move it to secondary Help/Security with a consequence-led modal.
- Focus the destructive confirm action first - Rejected: initial focus remains on Cancel or the least destructive action.
- Allow invalidated bookmarklets to be restored - Rejected: successful invalidation requires generation and installation of the new bookmarklet.
- Store or request p.eagate credentials - Rejected: NosLog receives only the approved structured data and its own signed sync token.
- Automatically sync in the background - Rejected: current official-site access and security model require an explicit user-run bookmarklet.
- Preserve fixed 390px content on desktop - Rejected: wide layouts use purposeful status/result and setup/recovery space.

Decision Log

ID	Decision	Status
SYNC-01	Keep Data Sync an independent localized Play-support destination and Home row	Approved
SYNC-02	Serve informative signed-out, first-use signed-in, and returning signed-in states on one route	Approved
SYNC-03	Show returning users current status and one next action before setup instructions	Approved
SYNC-04	Expand the required installation/run process for first use and collapse it for normal return use	Approved
SYNC-05	Use an ordinary process list for first setup; do not use a recurring stepper or manual installed checkbox	Approved
SYNC-06	Keep Open NOSTALGIA page as the primary recurring action and require explicit bookmarklet execution	Approved
SYNC-07	Distinguish All records from Recent 30 plays and treat both as valid outcomes	Approved
SYNC-08	Explain e-amusement Basic Course (Basic Pass) once and describe its effect neutrally	Approved
SYNC-09	Preserve prior full records and accumulated deduplicated history after recent-only sync	Approved
SYNC-10	Separate latest-attempt scope/metrics from persistent NosLog coverage	Approved
SYNC-11	Use indeterminate processing, automatic status refresh, 10-minute delayed, and 15-minute retry states	Approved
SYNC-12	Announce meaningful status transitions without focus movement or repeated poll announcements	Approved
SYNC-13	Classify recovery by official login, expired token, cooldown, timeout/process failure, and repetition	Approved
SYNC-14	Treat unknown charts as Completed · some excluded and expose only a safe excluded count	Approved
SYNC-15	Use the labels Recent plays checked, New plays saved, and Charts with updated best records	Approved
SYNC-16	Show at most three linked change previews and summarize a large first full import	Approved
SYNC-17	Expose the latest five safe attempts in a collapsed Sync History	Approved
SYNC-18	Keep token invalidation in secondary Help/Security, explain immediate impact, and focus Cancel first	Approved
SYNC-19	Make reinstall the required next action after successful bookmarklet invalidation	Approved
SYNC-20	State that the bookmarklet is account-specific, must not be shared, and never sends the p.eagate password or login cookie	Approved
SYNC-21	Never display/log a standalone raw token or include credentials/payloads in public diagnostics	Approved
SYNC-22	Retain complete text plus supplementary GIFs, enlargement, reduced-motion support, and deferred returning-user media	Approved
SYNC-23	Document browser-specific bookmark editing limitations and honest supported fallbacks	Approved
SYNC-24	Reflow at 320 CSS px and use purposeful two-area composition on sufficiently wide layouts	Approved
SYNC-25	Keep administrator raw diagnostics and monitoring outside the user page	Approved

Handoff Boundary

Claude Design may determine the final type scale, surfaces, status treatment, illustration and GIF framing, process-list anatomy, card hierarchy, metric layout, preview-row styling, disclosure treatment, modal appearance, spacing, grid tracks, responsive transition values, and restrained motion after Foundation approval. It must preserve the approved first/returning hierarchy, legitimate scope meanings, persistent coverage distinction, state timing, partial completion, bounded previews/history, recovery, security/privacy explanation, text-led media contract, accessibility, and acceptance criteria.

The future Codex implementation session must compare Claude output with this brief. It must request a guide or design revision before implementing any result that puts setup above returning-user status, creates a fake stepper or progress percentage, treats recent-only as failure, implies earlier full data was deleted, merges attempt and coverage, exposes raw diagnostics or tokens, omits partial-exclusion meaning, shows an unbounded change/history feed, focuses destructive invalidation first, fails to require reinstallation after invalidation, relies on GIFs without complete text, fixes desktop to phone width, or leaves processing and recovery inaccessible.

NosLog 2.0 Announcements Archive and Detail Page Brief

docs/design/14-announcements-page-brief.md

Document Control

- Status: Approved
- Decision status: 'Complete announcements contract approved: one authoritative

NosLog-authored announcement system; distinct active service-critical and routine Home placements; localized public Archive and Detail routes; concise chronological listing; bounded URL pagination; restricted Markdown; scheduling and expiry; locale-specific modification disclosure; stable multilingual identity; responsive behavior; accessibility; search metadata; and browser acceptance`

- Evidence status: 'Repository, schema, administrator flow, current-interface, and

authenticated browser inspection; approved information architecture and Home page contract; more than twenty cited accessibility, content, production announcement, changelog, and rhythm-game references; and the user-approved decision record`

- Date started: 2026-08-03
- Last decision update: 2026-08-03
- Language: English
- Parent information architecture:

[02-information-architecture.md](#)

- Related Home contract:

[03-home-page-brief.md](#)

- Scope: NosLog-authored service-critical and routine announcements, localized public

Archive and Detail destinations, Home-to-announcement handoff, publication and expiry meaning, content format, modification disclosure, responsive composition, accessibility, localization, search metadata, data requirements, and future implementation acceptance

- Excluded: NOSTALGIA official X content, a complete administrator-interface redesign,

comments, reactions, subscriptions, notification delivery, RSS, announcement search and filters, final Foundation tokens, final high-fidelity composition, and production implementation in this design-guide session

Decision Labels

- Observed: Verified in the repository, current browser evidence, an approved upstream artifact, or a cited source.

- Approved: Explicitly agreed with the user and authoritative for downstream design.
- Proposed: Evidence-based direction awaiting user approval.
- Open: Requires further research, testing, or a user decision.
- Rejected: Considered and explicitly not selected.
- Superseded: Replaced by a later approved direction.

This brief is authoritative for the public announcement system's product meaning, content hierarchy, publication behavior, localization, responsive behavior, states, accessibility, metadata, and acceptance criteria. Exact typography, color, spacing, surface treatment, radius, elevation, control dimensions, grid tracks, and content-driven transition values remain Foundation and downstream Claude Design work. Later visual work may refine expression but must not remove or reinterpret this product contract.

Purpose

The announcement system answers three ordered questions:

Is anything affecting my use of NosLog now, what has NosLog recently announced, and where can I read the complete current or historical notice in my language?

It replaces the current Home-only expandable notice with a durable public publishing system. It is not a general blog, a NOSTALGIA official-news mirror, a social feed, a support ticket system, or a high-volume product changelog.

Primary Context and Success

- Approved upstream: The Home page may expose one currently active service-critical notice before primary search when use of NosLog is materially affected.

- Approved upstream: The lower Home editorial area exposes the three newest routine

NosLog announcements as localized title-and-publication-date links immediately before the separate NOSTALGIA official-news area.

- Approved: Home succeeds when the user can recognize an active service impact or choose a recent routine notice without expanding full body content in place.

- Approved: The Archive succeeds when the user can scan current and historical

NosLog notices chronologically, open a specific notice, share or restore the current page, and understand when there are no notices.

- Approved: Detail succeeds when the selected locale presents the complete title, publication date, applicable modification date, and structured body without requiring authentication.

- Approved: Korean, Japanese, and English pages refer to the same announcement identity. A missing translation blocks public publication instead of falling back to Korean.

- Approved: Mobile around Arcade use is primary, while Desktop remains required and must not preserve the current fixed approximately 390px shell.

- Approved: Current styling and geometry are audit evidence, not NosLog 2.0 visual authority.

Current-Product and Domain Evidence

Repository and Data Evidence

- Observed: Announcement currently stores one title, one content, `isPublished`, `publishedAt`, `createdAt`, and `updatedAt` value. There is no public slug, translation identity, placement, priority, schedule, expiry, constrained rich content, or locale-specific public modification timestamp.

- Observed: The public query selects only published records, sorts by `publishedAt` and `id` descending, caches for five minutes, and returns at most three records.

- Observed: The current public record shape contains only `id`, `title`, `content`, and optional `publishedAt`.
- Observed: The Korean administrator form limits the title to 80 characters and body to 2,000 characters. Publication is a checkbox, publication happens immediately, and an existing `publishedAt` is preserved while the record remains published.
- Observed: Unpublishing clears `publishedAt`; deletion is a hard delete. The current workflow has no translation-completeness validation, schedule, expiry, preview, or published-content modification distinction.
- Observed: The administrator list returns at most 100 records. Public Archive and Detail routes and announcement-specific automated tests do not currently exist.
- Observed: Cache invalidation currently covers Home and the administrator page, not localized public Archive or Detail destinations.

Current Interface and Browser Evidence

- Observed: Home currently renders up to three announcements as native details disclosures. Opening one exposes the entire body inline and displaces the Hero, search, and primary destinations.
- Observed: The inspected development data contained one notice titled `안녕하세요` with a Korean-only body.
- Observed: At 390×844, the closed notice row fit without document-level horizontal overflow. Expanding the body increased the notice area from about 84px to about 200px and moved the Hero downward.
- Observed: At 320×800, both the title and publication date were truncated with ellipses in the current row even though the document itself did not overflow.
- Observed: At 1440×900, the current main remained exactly about 390px wide, leaving most Desktop width unused.
- Observed: `/ja` and `/en` localized the section heading to `공지사항` and `Announcements`, but the stored title and body remained Korean.
- Observed: No Console warnings or errors were recorded during the announcement inspection.

External Evidence

- Observed: USWDS Collection guidance treats a compact list as links to complete content, recommends that the unique headline itself be the link, uses limited metadata such as date, and directs larger catalogs to a separate Archive.
- Observed: USWDS and GOV.UK pagination guidance supports URL-addressable pagination for chronological Archives, rejects unnecessary pagination for short collections, and cautions against infinite scrolling.
- Observed: W3C guidance requires descriptive headings, meaningful link purposes, correct page language, semantic structure, visible focus, and reflow.
- Observed: Google localized-page guidance supports a distinct URL per language connected with reciprocal `hreflang`, while Article guidance supports explicit headline, publication date, modification date, and organization-author metadata.

- Observed: GitHub, Vercel, Notion, Linear, Cloudflare, Discord, Apple, and Steam

separate Archive/list discovery from complete content. Their advanced filters, search, authors, media, RSS, and taxonomy answer volumes and editorial models broader than the approved NosLog need.

- Observed: Official NOSTALGIA, SOUND VOLTEX, maimai, and osu! news surfaces

reinforce chronological date-and-title discovery in the rhythm-game context. Their legacy presentation, official publishing role, and mixed external content are not visual or product authority for NosLog.

Approved Scope and Invariants

1. One authoritative NosLog-authored announcement record supplies every public Home, Archive, and Detail presentation. Home does not maintain a separate copy.
2. Each announcement has one placement role: `Service critical` or `Routine`. The same announcement is not duplicated in both Home locations.
3. Home displays at most one highest-priority currently active service-critical notice before primary search. It reserves no empty shell when none is active.
4. Home displays at most the three newest routine announcements in the lower editorial area. It shows title and publication date only and never expands the body inline.
5. NOSTALGIA official X content stays in its separate approved official-news area and never enters the NosLog announcement Archive.
6. The public Archive paths are `/ko/announcements`, `/ja/announcements`, and `/en/announcements`.
7. The Archive is reverse chronological by original publication date and shows one semantic list. It does not split chronology into visual columns.
8. Each Archive row shows only the complete localized title and localized original publication date. It has no summary, thumbnail, author, reading time, reaction, visible category Chip, or duplicate `Read more` link.
9. Each Archive page contains at most 20 notices. URL-based pagination appears only when a second page exists.
10. Announcement pagination uses an addressable query such as `?page=2`, survives refresh and sharing, and never uses infinite scroll or a scrollable inner list.
11. Archive search, filtering, sorting controls, page-size selection, and RSS are not part of the approved initial system. They require a future verified user need.
12. Detail exposes one Archive return link, localized h1, localized publication date, locale-specific modification date when applicable, and the complete localized body.
13. Detail does not add author profiles, reading time, share controls, related notices, previous/next notices, comments, or reactions.
14. Announcement body supports only approved restricted Markdown: paragraphs, h2, h3, unordered lists, ordered lists, strong emphasis, and links.
15. Raw HTML, body h1, tables, images, video, embeds, files, scripts, and custom styling are not permitted. Text and links must independently communicate the notice.

16. Each locale has an 80-character title limit and a 5,000-character Markdown body limit. Limits count the stored content consistently and are not inferred from rendered pixel width.
17. Publication follows Draft → Scheduled or immediate publication → Published. Schedule, activation, and expiry are explicit data rather than client-only timers.
18. A service-critical announcement has an activation interval. After expiry it disappears from the critical Home position but remains in Archive and Detail.
19. A routine announcement may remain published without expiry.
20. A published announcement is unpublished before destructive removal. Previously public records are not casually hard-deleted from the administrator list.
21. Korean, Japanese, and English title and body content are all required before any announcement becomes public.
22. Every announcement uses one immutable, language-neutral public slug across all locale routes. Editing a title does not change its URL.
23. Any post-publication change to visible localized content, including title, body, or a visible link, updates that locale's public modification timestamp.
24. Pre-publication edits and administrator-only placement, schedule, priority, or internal-state edits do not create a visible content modification date.
25. Detail shows both publication and modification dates when a public modification exists. Home and Archive continue to show only original publication date and keep their original-publication ordering.
26. Announcement pages are public and equivalent for signed-out and signed-in users. They contain no personal read state or account-specific module.
27. Archive and Detail reflow without page-level two-dimensional scrolling at 320 CSS px; Desktop uses a purposeful readable measure instead of a fixed phone canvas.

Terminology and Data Meaning

Concept	Required meaning	Must not mean
Service-critical announcement	A currently relevant NosLog issue or change that materially affects use	Every routine update, promotional emphasis, or a generic warning style
Routine announcement	A normal NosLog update preserved in the lower Home list and Archive	Low-quality or optional data that may be deleted
Original publication date	The first time the complete three-language announcement became public	The latest edit, schedule edit, or Home activation time
Public modification date	The last post-publication change to visible content for that locale	Any database updatedAt or internal administrator edit
Activation	When a service-critical notice may occupy the critical Home position	Initial creation or translation drafting
Expiry	End of service-critical Home prominence	Deletion from historical Archive or invalidation of its Detail URL
Unpublish	Intentional removal from public destinations while preserving administration history	Casual permanent deletion
Public slug	Immutable language-neutral path identity shared across locales	A title-derived locale string that changes on edit

Placement and Priority

- Service critical and Routine control Home placement, not a visible catalog taxonomy.

- If more than one service-critical notice is active, the system uses an explicit administrator priority and a deterministic time tie-breaker to choose the single Home notice. Other active notices remain available in the Archive.

- The Archive does not expose a category filter or category Chip solely because this internal placement field exists.

Publication and Modification Dates

- `publishedAt` is immutable after first public publication except for an explicitly approved data correction.

- Each translation needs its own public-content modification timestamp because one language may be corrected without changing the others.

- A first publication has no separate visible modification date.

- Archive order never moves an older notice forward merely because it was corrected.

- Visible dates use localized human-readable formatting and a machine-readable `datetime` value.

Approved Information Hierarchy

Home Service-Critical Surface

Use this source order only when an active notice exists:

1. concise critical context or label;
2. complete localized notice title as the Detail link;
3. original publication date when it helps orient the user.

The control does not expand the body. It must not become a dismissible marketing banner, carousel, or permanent empty slot. Dismissal and read-state behavior are not approved.

Home Routine Surface

Use this source order:

1. localized section heading;
2. up to three routine announcement title-and-date links in newest-first order;
3. one descriptive All announcements Archive link.

Omit the entire routine section when no routine announcement is public. Keep the separate NOSTALGIA official-news area after it according to the Home contract.

Archive

Use one semantic main and this mobile-first source order:

1. page identity and concise purpose only if required;
2. reverse-chronological announcement list;

3. pagination when more than one page exists.

Do not add a Hero, featured announcement, search field, filter row, category tabs, result count, or explanatory marketing copy merely to occupy space. The page title and the notice list should answer the task directly.

Detail

Use one semantic article within main and this source order:

1. descriptive Archive return link or breadcrumb-equivalent location cue;
2. localized announcement title as the single page h1;
3. original publication date and, when present, locale-specific modification date;
4. restricted-Markdown body in authored source order.

Do not duplicate the Archive return link at the end unless later browser testing proves that long approved bodies create a real navigation problem. The maximum body length is bounded and browser Back remains available.

Wide Composition

- Archive remains a single chronological reading column. Added width may improve page

framing and readable line length but must not produce two independent chronological columns.

- Detail uses an editorial reading measure suitable for Korean, Japanese, and English.

It does not stretch body lines across the available Desktop viewport.

- No permanent Sidebar is justified by the approved title, dates, and bounded body.
- Exact container width, measure, margins, and transition points remain Foundation and

downstream design decisions validated with representative content.

Action Priority

Archive Actions

- Primary per item: open that notice by activating its descriptive title link.
- Secondary: navigate to another Archive page when pagination exists.

Do not add a second link to the same Detail destination inside one row.

Detail Actions

- Primary: read the announcement.
- Secondary: return to the announcement Archive or follow an authored body link.

There is no emphasized button required on ordinary Detail pages. Body links use normal link semantics and external destinations identify their external behavior.

Archive Contract

List Item Anatomy

Each list item contains:

1. the complete localized title;
2. the localized original publication date.

The title is the only Detail link. It wraps instead of using a destructive fixed-width ellipsis in the Archive. At compact widths the date may move below the title; it must not force both values into an unreadable single row.

Pagination

- Page one is the canonical Archive root without a required `?page=1` suffix.
- Pages after the first use a stable URL query.
- Do not render pagination for zero to 20 notices.
- Pagination exposes previous and next navigation and current-page meaning. Wide

layouts may expose a compact bounded page-number set; compact layouts may reduce visible numbers while preserving accessible first, previous, current, next, and last meaning.

- Pagination remains on one visual line and has touch targets that meet the approved

Foundation accessibility target.

- Invalid or out-of-range pages resolve to a safe first-page or localized not-found

behavior without rendering an empty successful Archive. Exact redirect status is an implementation-level SEO choice.

Empty Archive

Show one concise localized statement equivalent to `No announcements`. Do not add a search suggestion, category suggestion, illustration requirement, or disabled pagination.

Detail Content Contract

Restricted Markdown

Allowed authored structures are:

- paragraphs;
- h2 and h3 section headings;
- unordered and ordered lists;
- strong emphasis;
- internal and external links.

Rendering must sanitize content with an explicit allowlist. Markdown syntax must not permit raw HTML, scriptable URLs, arbitrary attributes, custom color, layout, or style. The administrator authoring experience must preview the same sanitized structure that public Detail will render, but its final visual redesign belongs to a later administrator initiative.

Link Behavior

- Internal NosLog links prefer the active locale and preserve approved route identity.
- External links expose their destination behavior visually and programmatically.
- Link text describes the destination; generic repeated `Click here` or `Read more`

text is not sufficient when the notice can name the target.

- Long URLs or uninterrupted tokens wrap without page-level overflow.
- Opening a new tab is not the default unless an explicit product or security reason is

approved later.

Content Limits

- Title: maximum 80 characters per locale.
- Body: maximum 5,000 stored Markdown characters per locale.
- The body does not accept images, video, embeds, tables, or file attachments.
- Long headings, long Japanese strings, English expansion, lists near the limit, and multiple links must be included in representative fixtures.

Publication and Lifecycle Contract

Status Model

Status	Public Archive and Detail	Home critical	Home routine
Draft	Hidden	Hidden	Hidden
Scheduled before public start	Hidden	Hidden	Hidden
Published routine	Visible	Hidden	Eligible for newest three
Published active service critical	Visible	Eligible by priority	Hidden
Published expired service critical	Visible	Hidden	Hidden
Unpublished	Hidden from public users	Hidden	Hidden

The Archive preserves expired service-critical announcements because expiry ends prominence, not historical meaning.

Publication Readiness

Publication is blocked until all of the following are valid:

1. immutable public slug;
2. one approved placement role;
3. Korean, Japanese, and English title and body;
4. title and body length limits;
5. sanitized restricted-Markdown validation;
6. valid schedule and activation ordering;
7. expiry after activation when expiry is present.

Service-critical publication additionally requires enough timing and priority data to produce deterministic Home behavior.

Unpublish and Destructive Removal

- Unpublishing removes the record from Home, Archive, Detail, sitemap, and public metadata without exposing draft content.

- A request to an unpublished or unavailable public slug uses the shared localized not-found experience and does not reveal whether a private record exists.

- Hard deletion of a previously public record is exceptional and belongs behind a consequence-led administrator confirmation. Exact retention and administrator permissions belong to future implementation and administrator-design work.

Date and Revision Contract

Original Publication

- The original publication timestamp is set when the complete announcement first becomes public.
- Scheduled publication uses the actual effective public time.
- Unpublish and republish do not silently rewrite historical publication chronology.

Public Modification

- After first publication, changing any visible localized title, body text, or visible authored link updates that locale's public modification timestamp.
- Every public-facing edit counts; the administrator does not need to classify it as major before users receive transparent modification information.
- Editing Japanese only does not mark Korean or English as modified.
- Draft edits made before first publication do not produce a modification date.
- Placement, priority, schedule, expiry, and other administrator-only edits do not produce a localized content modification date unless they also change visible content.

Public Presentation

- Detail presents publication and modification dates together when the modification timestamp exists.
- Home and Archive show only original publication date to preserve concise scanning.
- Archive and Home order remain based on original publication date.
- Article metadata uses the same locale-specific public modification date visible on the page; it must not expose an unrelated database updatedAt.

URL, Metadata, and Indexing Contract

Public Routes

- Archive: `/[[locale]]/announcements`
- Detail: `/[[locale]]/announcements/[publicSlug]`
- Pagination: `/[[locale]]/announcements?page=N` for pages after the first

The public slug is generated or explicitly assigned once, is language-neutral, and is not regenerated from edited titles.

Locale Identity

- Each Korean, Japanese, and English Detail URL represents one translation of the same announcement identity.
- Reciprocal hreflang alternatives connect all three available locale routes.
- Each locale page has a self-referential Canonical URL rather than Canonicalizing all translations to one language.

- Locale switching on Detail preserves the public slug and opens the equivalent translation.

Metadata

Each Detail page provides localized:

- document title and description derived from approved content;
- Open Graph title, description, URL, and NosLog identity;
- original publication and locale-specific modification date;
- `Article` or another implementation-validated compatible structured-data type with

NosLog as the organization author/publisher;

- reciprocal alternate-language links.

Images are not required by this brief. Metadata must not invent an announcement image or reuse copyrighted NOSTALGIA artwork merely to fill an Article image field.

Published Archive and Detail destinations participate in the public sitemap. Draft, scheduled-before-publication, and unpublished records do not.

Authentication and Permission Contract

Public Users

- Signed-out and signed-in users receive the same announcement content and navigation.
- No login prompt, personalized read indicator, dismissal state, or account-dependent ordering appears.
- Public rendering must not expose administrator notes, drafts, scheduling controls, translation readiness, or priority values.

Administrator Boundary

The future administrator workflow must support the approved content model, validation, preview, schedule, activation, expiry, priority, locale-specific modification dates, unpublish, and exceptional destructive confirmation. This brief does not approve its final visual layout or broaden administrator access beyond the existing administrator boundary.

Responsive Contract

Compact Archive

- Validate first at representative 390px and reflow through 320 CSS px.
- Preserve full title comprehension. Let the title wrap and move the date to a separate line when required instead of truncating both values.
- Maintain one chronological column and document-level scrolling.
- Pagination must remain understandable and operable without wrapping into an ambiguous second line.
- Do not use horizontal scrolling, fixed phone-width children, or an inner scroll area.

Compact Detail

- Title, dates, headings, lists, paragraphs, and links wrap within the viewport.
- Heading hierarchy and spacing must preserve authored relationships at 320 CSS px.
- Long links and Japanese strings wrap safely.
- No body feature requires a hover state.

Wide Archive and Detail

- The page shell expands beyond the current 390px maximum while keeping Archive and Detail at purposeful readable measures.
- Archive does not become a masonry or multi-column card Grid.
- Detail does not introduce a permanent metadata Sidebar or stretch body text across the viewport.
- Added width may improve framing, title/date alignment, and pagination placement without duplicating content or changing source order.
- Exact maximum measure and content-driven transition values remain Foundation and downstream Claude Design decisions.

Zoom and Short Viewports

- At browser zoom and short heights, no fixed overlay hides the title, dates, list, or body.
- The shared header must follow the approved shell contract: compact auto-hide must restore consistently, and neither compact nor persistent-wide behavior may trap Archive or Detail navigation behind viewport-height assumptions.

Accessibility Contract

- Archive uses a semantic heading, unordered list, and list items. Each title is a uniquely named link to its Detail page.
- Detail uses one main, one article, one page h1, and authored h2/h3 hierarchy.
- Dates use semantic time elements with machine-readable datetime values.
- Pagination uses a descriptive nav label, list semantics, link semantics, and `aria-current="page"` for the current page.
- Visible focus follows the approved Foundation contract and is not clipped by list or content containers.
- Link purpose is understandable from visible text or its programmatic context.
- External-link meaning is not indicated by color or an unexplained icon alone.
- Service-critical meaning is conveyed by text and semantics, not color alone.
- Restricted Markdown renders native semantic paragraphs, headings, lists, emphasis, and links rather than generic clickable containers.
- Content reflows at 320 CSS px without page-level two-dimensional scrolling.
- Touch targets meet the approved Foundation target and maintain adequate separation.

- Initial server-rendered Archive and Detail content remains understandable without client-side JavaScript. Progressive client behavior must not be required to read a notice or follow its primary links.
- Page language matches the active locale; any intentionally embedded foreign-language fragment uses appropriate language-of-parts markup when needed.

Localization Contract

- All public routes and UI labels support Korean, Japanese, and English.
- NosLog-authored title and body content require all three approved translations before publication. No public fallback silently substitutes Korean on Japanese or English routes.
- The same announcement identity and immutable slug are retained across locales.
- Dates use locale-appropriate visible formatting while retaining one unambiguous machine-readable timestamp.
- Archive titles, Detail headings, empty text, not-found text, pagination names, publication and modification labels, Archive return link, and external-link meaning are localized.
- Internal body links prefer the active locale. If an equivalent localized destination does not exist, the content must identify the actual destination rather than imply a nonexistent translation.
- Korean and Japanese line breaking, English expansion, punctuation, and full-width characters must not be normalized into one language's visual assumptions.
- Public-content modification is tracked per translation and only the changed locale exposes its modification date.

Runtime State Contract

State	Required public result	Status
No active service-critical notice	No critical Home container or reserved gap	Approved
One active service-critical notice	One linked notice before primary search	Approved
Multiple active critical records	Deterministically show only the highest-priority one; keep all public items in Archive	Approved
No routine notice	Omit the lower Home announcement section	Approved
One to three routine notices	Show every available title-and-date link	Approved
More than three routine notices	Show newest three plus All announcements	Approved
Empty Archive	Show one concise localized empty statement and no pagination	Approved
One to twenty Archive records	Show one complete list and no pagination	Approved
More than twenty Archive records	Show twenty and URL-addressable pagination	Approved
Archive page refresh/share/back	Preserve the same page through its URL	Approved
Out-of-range Archive page	Safe first-page or localized not-found resolution; never an empty successful list	Approved
Normal Detail	Show localized title, publication date, and body	Approved
Modified Detail	Also show that locale's modification date	Approved
Expired service-critical Detail	Remain readable without current critical Home prominence	Approved
Scheduled but not public	Do not expose in Home, Archive, Detail, sitemap, or metadata	Approved
Unpublished or unavailable slug	Shared localized not-found result without private-record disclosure	Approved
Translation missing at publish	Block publication for all public locales	Approved
Body contains disallowed markup	Block or sanitize according to the allowlist before public rendering	Approved
Initial request failure	Use the shared page-level retry/error contract without presenting stale private drafts	Approved
Signed out	Full public reading and navigation remain available	Approved
Signed in	Same public content; no personal read state added	Approved

Archive and Detail have no user-facing destructive action. Publication, unpublish, and hard-delete failures belong to the future administrator contract but must preserve the public invariants above.

Implementation Mapping

Required Semantic Data

The implementation needs the following meanings, though exact Prisma normalization is an implementation decision:

- immutable public slug;
- placement role;
- service-critical priority;
- draft, scheduled, published, and unpublished lifecycle meaning;
- original publication timestamp;
- service-critical activation and optional expiry timestamps;
- Korean, Japanese, and English title and restricted-Markdown body;
- locale-specific public-content modification timestamp;
- ordinary internal creation and update audit timestamps that are not automatically

shown to users.

A normalized Announcement plus AnnouncementTranslation model is a plausible mapping but is not mandated if another schema preserves the approved identity, validation, and query behavior.

Required Queries

- highest-priority active service-critical notice for Home;
- newest three published routine notices for Home;
- reverse-chronological paginated public Archive for one locale;
- public Detail by immutable slug and locale;
- reciprocal locale metadata for one Detail record;
- administrator validation and lifecycle queries.

All public queries must exclude draft, scheduled-before-publication, and unpublished content. Expired service-critical records remain eligible for Archive and Detail.

Rendering and Sanitization

- Parse restricted Markdown with an explicit allowlist.
- Sanitize links and reject scriptable schemes.
- Render semantic server-readable HTML.
- Use one public rendering path for administrator preview and final Detail meaning so

preview does not promise unsupported structures.

- Cache and revalidate Home, every affected localized Archive page, Detail locale routes, sitemap, and metadata when publication state or visible content changes.

Current-to-Target Migration

- Existing one-language records require Korean source preservation plus approved Japanese and English translations before becoming public in the 2.0 system.
- Existing IDs may remain internal, but public links require the new immutable slug.
- Current plain text can migrate to Markdown-compatible paragraphs without adding raw HTML.
- Existing Home disclosures become title/date links; the body moves to Detail.
- Existing `updatedAt` must not be reused blindly as public modification date.

Representative Fixtures

The downstream guide examples, implementation fixtures, and browser tests must include:

1. no announcements;
2. one routine announcement;
3. exactly three and more than three routine announcements;
4. no active critical notice and one active critical notice;
5. overlapping active critical notices with deterministic priority;
6. an expired critical notice still present in Archive and Detail;
7. exactly 20 and 21 Archive records;
8. first, middle, and last Archive pages;
9. an 80-character Korean title;
10. a long Japanese title and expanded English title;

11. body paragraphs, h2, h3, both list types, strong text, internal link, and external link;
12. a body near 5,000 characters;
13. long uninterrupted link text and mixed full-width characters;
14. unmodified first publication;
15. Korean-only post-publication correction, proving Japanese and English modification dates remain absent;
16. modified title and modified body/link;
17. scheduled, unpublished, and missing-translation records that never become public;
18. disallowed raw HTML and unsafe URL attempts;
19. signed-out and signed-in access to the same public Detail;
20. invalid and out-of-range Archive/Detail URLs.

Fixture text must be representative content, not repeated placeholder strings that hide line-breaking or hierarchy problems.

Browser Acceptance Contract

Validate all approved public states at:

- 320 CSS px compact reflow;
- representative 390px mobile viewport;
- at least one intermediate width where title/date or pagination composition changes;
- a Desktop width such as 1280px or 1440px;
- browser zoom sufficient to expose fixed-height, clipping, and reflow failures.

Required checks:

- Korean, Japanese, and English Archive and Detail routes;
- no Korean content fallback in Japanese or English;
- Home critical absence and active state;
- Home routine counts 0, 1, 3, and more than 3;
- every Home and Archive title opens the correct locale-equivalent Detail;
- All announcements opens the correct locale Archive;
- complete non-truncated Archive titles at 320px and safe date reflow;
- no inline body disclosure on Home;
- exactly 20 items per Archive page and no pagination on a single page;
- pagination share, refresh, forward, and Back restoration;
- semantic current-page announcement and keyboard navigation;
- Detail publication and locale-specific modification dates;
- expired critical Archive/Detail persistence and Home removal;
- draft, scheduled, untranslated, and unpublished exclusion;
- restricted Markdown semantics and sanitization;
- long body, long link, long Korean/Japanese/English content, and no horizontal document overflow;



- visible focus, heading hierarchy, list semantics, time semantics, link purpose, language markup, and touch targets;
- self-Canonical, reciprocal hreflang, localized metadata, structured dates, and sitemap inclusion/exclusion;
- equivalent signed-out and signed-in public access;
- no unhandled Console error or hydration failure;
- useful server-rendered content and link navigation when client JavaScript is unavailable.

Reference Matrix

Source	Transferable principle	NosLog application	Limitation
USWDS Collection	Compact related-content lists use unique headline links, limited metadata, semantic lists, and a separate Archive for more items	Title is the only Detail link; date is the only row metadata; Home hands off to Archive	USWDS supports optional summaries and images that NosLog does not need
USWDS Pagination	Large chronological collections may use bounded URL pagination with current-page semantics and generous targets	Supports 20-item Archive pages and accessible navigation	It does not choose NosLog's page size or final visual styling
GOV.UK Pagination	Paginate only when useful, avoid infinite scroll, hide pagination on one page, and preserve understandable adjacent navigation	Supports conditional URL pagination and rejection of infinite scroll	Government journey styling is not NosLog visual authority
GOV.UK Notification banner	Interruptive notification treatment is for information users need to know, not routine editorial content	Supports reserving the pre-search position for service-critical notices only	Its alert roles and tone cannot be copied without matching urgency
W3C Link Purpose	Users must understand destination from link text or programmatic context	Announcement title links and descriptive Archive navigation	It does not select page layout or metadata density
W3C Headings and Labels	Descriptive headings help orientation and scanning	One Archive heading, one Detail h1, authored h2/h3	It does not prescribe typography
W3C Language of Page	Assistive technology needs correct page and part language	Locale routes and no silent Korean fallback	It does not define the translation workflow
W3C Reflow	Content reflows at 320 CSS px without two-dimensional page scrolling	Grounds title/date stacking, body wrap, and compact pagination	Exact responsive transitions remain content-driven
Google localized versions	Localized equivalents use distinct URLs and reciprocal language alternatives	Same slug across /ko, /ja, and /en with hreflang	Search discovery does not replace usability or translation QA
Google Article structured data	Article metadata can expose headline, publication, modification, and organization author	Grounds locale-specific dates and NosLog publisher metadata	Rich-result display is not guaranteed and images are not required by this brief
MDN @@NOSLOGTOKEN0@@	Human dates can carry machine-readable values	Localized visible dates with unambiguous datetime	It does not choose the visible locale format
GitHub Changelog	High-volume updates use searchable taxonomy, dated links, Detail pages, Archive grouping, and RSS	Confirms Archive/Detail separation and metadata value	Its volume, tags, and product breadth do not justify NosLog filters
Vercel Changelog	Dense product updates support search and categories when catalog scale demands them	Provides a future comparison if NosLog volume grows	Current NosLog announcements are smaller and not a product-marketing feed
Notion Releases	Release Archive and individual dated Detail content remain shareable	Supports stable Detail identity and chronology	Long promotional release packages exceed NosLog notice needs
Linear Changelog	Editorial Changelog can combine dates, full narrative, media, search, and categories	Confirms that richer functions should follow editorial need	Continuous product storytelling and media are outside current scope
Cloudflare Changelog	Technical Archives expose dated entries, product context, pagination, and RSS	Supports stable chronological preservation	Technical product taxonomy and code-heavy bodies are broader than NosLog
Discord Blog	Article Archives use categories, summaries, media, and load-more discovery	Shows why a general Blog pattern carries more information than a notice Archive	NosLog is not an editorial magazine or press center
Apple Newsroom	News Archive distinguishes content types and provides dated permanent articles	Supports durable public Detail and Archive identity	Press releases, photography, and topic taxonomy are not NosLog requirements
Steam News	Game-service announcements preserve dated long-form updates and stable links	Supports complete Detail outside compact discovery	Community reactions, media, and social counts are explicitly excluded
NOSTALGIA official	Rhythm-game users encounter chronological date-and-update information near the game context	Confirms date-title scanning familiarity	Official Japanese-only legacy presentation is not a NosLog accessibility/layout authority
SOUND VOLTEX News	Routine updates and important apologies coexist chronologically	Supports preserving expired critical history while separating prominence	Mixed character voice, images, and official marketing do not fit NosLog-authored notices
maimai News	Paginated date-title archives are established in rhythm-game services	Supports chronological pagination	Its legacy pagination density and visual treatment are not copied
osul News and News API	News has stable records, slugs, publication/update metadata, authors, images, and pagination	Supports durable machine-readable identity and localized-ready data separation	Community editorial scale and author/media fields exceed approved NosLog scope

Evidence Convergence

- Accessibility and collection guidance converge on semantic lists, descriptive title links, limited metadata, correct language, date semantics, and reflow. This supports title/date rows and rejects the current cramped single-row truncation.
- Pagination guidance and production Archives converge on URL-addressable pages for a growing chronological history and reject unnecessary pagination or infinite scroll. The exact 20-item size is an approved NosLog choice, not a universal standard.
- Production services converge on stable Detail URLs, original publication dates, and modification metadata. Their search, categories, RSS, authors, media, and reactions solve larger editorial catalogs and do not justify initial NosLog complexity.
- Rhythm-game sources converge on date-first chronological discovery and preservation of important service updates. Their official status and legacy presentation do not justify copying layout, tone, or Japanese-only content.
- Localization and search guidance converge on distinct locale URLs, shared content identity, reciprocal language alternates, and truthful visible/structured dates.
- Current NosLog evidence and the approved Home brief converge on replacing inline disclosure with links, separating current service impact from routine editorial updates, and preserving all complete content in localized Detail and Archive pages.

Rejected and Superseded Alternatives

- Keep Home-only Accordion bodies - Superseded: Home now links compact notice discovery to complete localized Detail pages.
- Use one Home notice placement for every announcement - Superseded: active service impact and routine updates have distinct approved positions and one role per record.
- Duplicate one notice in critical and routine Home areas - Rejected: one record has one Home placement and the Archive preserves universal discovery.
- Put official NOSTALGIA X posts in the NosLog Archive - Rejected: source identity, language, ownership, and approved Home role remain separate.
- Show body summaries, thumbnails, categories, and authors in Archive - Rejected: title and date provide the approved information scent without unnecessary density.
- Add Archive search, filters, sorting, or page-size controls now - Rejected: no verified current lookup need justifies them.
- Use infinite scroll or an internal scrolling list - Rejected: URL pagination preserves location, sharing, restoration, keyboard access, and historical browsing.
- Use multi-column chronological Archive cards on Desktop - Rejected: a single list preserves unambiguous reading order.
- Use title-derived localized slugs - Rejected: title edits and three languages would fragment identity and break shared links.
- Publish with one or two translations and fall back to Korean - Rejected: every NosLog-authored public announcement requires all three languages.

- Show database updatedAt as modification date - Rejected: public Detail shows only locale-specific visible-content changes after publication.
- Require a major edit checkbox before showing modification - Superseded: every post-publication visible-content edit updates that locale's public modification date.
- Reorder Archive by modification date - Rejected: corrections do not turn an old notice into a new announcement.
- Delete expired critical notices - Rejected: expiry ends Home prominence, not historical access.
- Allow raw HTML, images, embeds, tables, or attachments - Rejected: restricted semantic Markdown covers the approved notice need with lower security and layout risk.
- **Add comments, reactions, read state, dismissal, or personalized ordering - Rejected: ** announcements are public reading content, not a social or inbox system.
- Fix Archive and Detail to 390px on Desktop - Rejected: the responsive shell uses wide space intentionally while protecting readable measure.

Decision Log

ID	Decision	Status
ANN-01	Replace the Home-only expandable notice with one authoritative Home, Archive, and Detail system	Approved
ANN-02	Give each record one Service critical or Routine Home placement role	Approved
ANN-03	Show at most one highest-priority active critical notice before Home search and no empty shell	Approved
ANN-04	Show the newest three routine title/date links in the lower Home editorial area	Approved
ANN-05	Keep NOSTALGIA official X content separate from the NosLog announcement Archive	Approved
ANN-06	Provide public /[locale]/announcements Archive routes	Approved
ANN-07	Use one newest-first semantic list with localized full title and original publication date only	Approved
ANN-08	Paginate after 20 items with addressable URLs; do not use infinite or inner scroll	Approved
ANN-09	Omit initial Archive search, filters, sorting, page-size selection, and RSS	Approved
ANN-10	Provide public localized Detail with Archive return, one h1, dates, and full body	Approved
ANN-11	Omit authors, reading time, sharing controls, related/adjacent notices, comments, and reactions	Approved
ANN-12	Allow only paragraphs, h2, h3, lists, strong emphasis, and links in restricted Markdown	Approved
ANN-13	Keep an 80-character title and expand each locale body limit to 5,000 Markdown characters	Approved
ANN-14	Reject raw HTML, body h1, tables, images, video, embeds, files, scripts, and custom styling	Approved
ANN-15	Use Draft, scheduled or immediate publication, Published, expiry, and Unpublished lifecycle meaning	Approved
ANN-16	Remove expired critical notices from Home prominence while preserving Archive and Detail	Approved
ANN-17	Require unpublish before exceptional destructive removal of a previously public record	Approved
ANN-18	Require complete Korean, Japanese, and English title/body content before publication	Approved
ANN-19	Use one immutable language-neutral public slug across all locale routes	Approved
ANN-20	Keep original publication date immutable and use it for Home/Archive display and ordering	Approved
ANN-21	Mark every post-publication visible-content edit with that locale's public modification date	Approved
ANN-22	Do not treat pre-publication or administrator-only edits as public content modifications	Approved
ANN-23	Show publication and applicable modification dates on Detail; show publication only elsewhere	Approved
ANN-24	Make public content identical for signed-out and signed-in users with no personal read state	Approved
ANN-25	Use locale-specific Canonical, reciprocal hreflang, truthful Article metadata, and sitemap inclusion	Approved
ANN-26	Reflow through 320 CSS px and use purposeful readable Desktop measures without multi-column chronology	Approved
ANN-27	Preserve semantic lists, headings, dates, pagination, link purpose, focus, language, and server-readable content	Approved

Handoff Boundary

Claude Design may determine the final type scale, editorial measure, surfaces, critical notice emphasis, row dividers, date treatment, pagination appearance, Markdown rhythm, spacing, grid tracks, responsive transition values, and restrained motion after Foundation approval. It must preserve the approved two Home roles, non-duplicated content identity, title/date Archive density, 20-item URL pagination, minimal Detail, restricted Markdown, lifecycle, translation gate, stable slug, transparent locale-specific modifications, public access, semantic structure, and acceptance criteria.

The future Codex implementation session must compare Claude output with this brief. It must request a guide or design revision before implementing any result that restores inline Home bodies, duplicates notices across Home roles, mixes official X content into the Archive, hides or truncates Archive titles, adds unapproved catalog controls, depends on infinite scroll, changes URLs with titles, publishes incomplete translations, deletes expired history, exposes raw HTML, mistakes internal updatedAt for public modification, reorders history on correction, adds account-dependent read state, fixes Desktop to phone width, or makes the content inaccessible without client-side JavaScript.

NosLog 2.0 Shared Shell and Navigation Brief

docs/design/15-shared-shell-navigation-brief.md

Document Control

- Status: Approved
- Decision status: `Complete shared-shell contract approved: restrained ordinary

header; signed-out Login or signed-in profile control; one navigation trigger; ordered two-column product and utility navigation; compact modal and wide popover adaptations; compact-only scroll hiding; footer-only Privacy and GitHub; minimal authentication shell; focused chart-viewer shell; system-recovery shell; accessibility, localization, state, and browser acceptance requirements`

- Evidence status: `Repository and browser inspection at 320, 390, and 1280 CSS px;

approved information architecture and page briefs; more than twenty cited accessibility, design-system, production-service, and rhythm-game references; and the user-approved decision record`

- Date started: 2026-08-03
- Last decision update: 2026-08-03
- Language: English
- Parent information architecture:

[02-information-architecture.md](#)

- Authentication and onboarding contract:

[17-authentication-onboarding-page-brief.md](#)

- Focused-viewer contract:

[07-chart-viewer-editor-preservation.md](#)

- System-recovery states contract:

[19-system-recovery-states-page-brief.md](#)

- Scope: repeated public-user shells, ordinary header, account and navigation

controls, opened navigation behavior, footer, skip route, semantic landmarks, responsive adaptation, scroll visibility, authentication shell, focused-viewer shell boundary, recovery shell, localization, accessibility, states, and future implementation acceptance

- Excluded: final visual styling, exact Foundation tokens, precise dimensions and

transition breakpoint, final localized copy, page-specific content hierarchy, administrator-interface redesign, final high-fidelity composition, and production implementation in this design-guide session

Decision Labels

Preservation override: The ordinary shell may continue to reach the existing chart viewer. This brief does not redesign or redefine the locked viewer/editor shell; document 07 is the complete authority for those experiences.

- Observed: Verified in the repository, current browser evidence, an approved

upstream artifact, or a cited source.

- Approved: Explicitly agreed with the user and authoritative for downstream design.
- Proposed: Evidence-based direction awaiting user approval.

- Open: Requires further research, testing, or a user decision.
- Rejected: Considered and explicitly not selected.
- Superseded: Replaced by a later approved direction.

This brief is authoritative for shell membership, information order, behavior, responsive adaptation, states, accessibility, and acceptance criteria. Typography, color, spacing, border, radius, elevation, icon drawing, precise header height, panel width, and the content-driven compact-to-wide transition remain Foundation and downstream Claude Design work. Those later decisions may refine expression but must not alter this contract.

Purpose

The shared shell answers four questions without competing with page content:

Which service am I using, how do I reach another major NosLog destination, how do I access my account, and how do I recover when the current context is exceptional?

NosLog has enough independent product destinations that the shell must provide reliable orientation and access, but it must not display every destination as persistent header buttons. The shell is a stable frame around content, not a dashboard, a site map, or a replacement for contextual links inside pages.

Primary Context and Success

- Approved: Mobile use around an arcade is the primary context. A representative 390px canvas does not become a fixed application width or universal breakpoint.
- Approved: Ordinary pages succeed when users can identify NosLog, reach Home, access account state, open the complete global destination set, skip repeated navigation, and continue into page content without crowding.
- Approved: Wide pages preserve the same destination meaning and order while using a persistent sticky header and an anchored popover instead of a modal compact panel.
- Approved: Authentication pages reduce navigation distraction without removing service identity, Home recovery, or footer trust links.
- Approved: The chart viewer uses its own focused shell. The ordinary header and footer do not consume chart space or interrupt playback.
- Approved: Maintenance and fatal-error surfaces expose only NosLog identity and an appropriate recovery action rather than a nonfunctional full navigation system.
- Approved: Korean, Japanese, and English layouts preserve destination identity and semantic order even when labels occupy different widths.

Current-Product Evidence

Repository Evidence

- Observed: `app/(navigation)/layout.tsx` currently constrains the whole ordinary page shell to `max-w-97.5`, approximately 390px, even at wide viewports.
- Observed: `components/layout/header.tsx` currently renders NosLog, three labeled destination links, account/profile, and the opened-menu trigger.
- Observed: `components/layout/headerNavigation.tsx` currently exposes only Bingo,

Exams, Arcades, Data Sync, and conditional Admin. It does not expose the complete approved global destination set or public Settings and Feedback.

- Observed: `components/layout/scrollAwareHeader.tsx` hides the header on downward

scroll below 1024px and leaves it persistent at wider widths. The numeric threshold is implementation evidence, not an approved 2.0 breakpoint.

- Observed: The current opened panel locks body scrolling and closes on Escape, but

browser inspection did not verify complete focus containment.

- Observed: `components/layout/footer.tsx` already provides Privacy, GitHub, and copyright content.

- Observed: `app/(auth)/layout.tsx` does not currently provide the ordinary header

or footer. Login contains an inline Privacy link; that placement is current-product evidence, not an approved shared-shell requirement.

Browser Evidence

- Observed: At 1280px, ordinary content remains centered in an approximately

390px column rather than adapting to desktop space.

- Observed: At 390px, the header retains Music, Rankings, and Tiers in addition to

the account and navigation controls.

- Observed: At 320px in Japanese, the persistent destination labels crowd the

service identity and controls.

- Observed: The current two-column opened panel remains approximately 390px wide

and does not become a desktop-anchored popover.

- Observed: Browser accessibility inspection exposed duplicate close naming around

the opened navigation backdrop and trigger. The redesigned shell must expose one unambiguous visible close operation and one coherent accessible interaction scope.

Approved Shell Variants

Variant	Applies to	Required repeated content	Explicit exclusions	Status
Ordinary public shell	Home, Music, Rankings, Tiers, Bingo, Exams, Arcades, Data Sync, Settings, Profile, announcements, Privacy, and other ordinary user pages	Skip route, responsive header, one main, ordinary footer	Persistent bottom navigation; labeled destination row in the header	Approved
Minimal authentication shell	Login, onboarding, and authentication recovery	NosLog identity linked to localized Home, one main, ordinary trust footer	Profile control, More trigger, global destination panel	Approved
Focused chart-viewer shell	Falling viewer, full-sheet viewer, and their fullscreen states	Viewer-specific back/orientation control, chart identity, tabs and playback controls defined by the viewer brief	Ordinary header, More panel, ordinary footer	Approved
System-recovery shell	Maintenance and fatal application-error states	NosLog identity, clear state message, context-appropriate recovery action	Full global navigation when destinations cannot reliably work	Approved

The Privacy page may use the ordinary public shell. “Footer-only” describes where the Privacy destination is globally advertised; it does not forbid the Privacy page itself from having an ordinary header.

Ordinary Public Shell Contract

Semantic Order

The document order is:

1. skip-to-main link;
2. site header;
3. page-level main landmark;
4. ordinary footer.

There must be exactly one page-level main. Page components must not introduce nested or competing main landmarks. Visual reordering at wider widths must not produce a different or confusing reading and focus order.

Header Anatomy

The ordinary header contains only:

1. Left: NosLog identity linked to localized Home.
2. Right account position: a visible localized Login text control while signed out, or the signed-in profile image/control while authenticated.
3. Right navigation position: a navigation/hamburger icon control that opens the global destination panel.

Music, Chart Viewer, Rankings, Tiers, Bingo, Exams, Arcades, Data Sync, Settings, Feedback, Privacy, GitHub, and Admin are not persistent labeled header controls.

Service Identity

- The visible identity is NosLog; do not substitute the legacy NOSTORY name.
- It links to the Home route for the active locale.
- It remains available in all four shell variants, although fullscreen browser UI may temporarily suppress it under the focused-viewer contract.
- Final wordmark drawing, size, and typography belong to the Foundation. It must remain legible and not shrink to make room for excess controls.

Account Control

- Signed out: show a localized visible Login text control. Do not rely on an unlabeled avatar placeholder.
- Signed in: show the current profile image/control. Its accessible name identifies the profile destination or account owner without exposing private Discord data.
- The signed-in profile control opens the user's profile destination directly; it does not duplicate Settings or the complete More panel.
- Missing or failed profile images use an accessible fallback without moving adjacent controls.

Navigation Trigger

- Use a familiar navigation/hamburger symbol, not an ellipsis, because it opens the

primary destination set rather than an item-specific overflow list.

- Provide a localized accessible name, `aria-expanded`, and `aria-controls` or an equivalent relationship.
- The trigger must communicate open state without permanently appearing selected on every product page.
- The open interaction exposes exactly one unambiguous visible close operation. Do not produce duplicate accessible “close navigation” controls for one action.

Global Destination Panel

Information Order

The approved visual rows and semantic sequence are:

Row	Left	Right
1	Music	Chart Viewer
2	Rankings	Tiers
3	Bingo	Exams
4	Arcades	Data Sync
Divider	Utilities begin; no visible group heading	-
5	Settings	Feedback / Error Report
Conditional final row	Admin, when authorized	Empty

The linear DOM, reading, and keyboard order follows each row left-to-right and then top-to-bottom. If CSS changes the visual tracks, it must not reorder this sequence.

Content Rules

- Each destination uses an icon and a concise localized text label only.
- Do not add descriptions, counts, badges, promotional copy, or explanatory subtitles to the global panel unless a later guide revision establishes a verified need.
- Do not add visible product-group labels. A visual divider separates the eight product destinations from the two utilities.
- Tiers, Bingo, and Exams remain independent destinations. Their adjacency does not create a combined “challenge” or other umbrella concept.
- Settings is one public route for both authentication states; page contents adapt to the user’s state.
- Feedback / Error Report retains the approved dialog-based submission flow. It is not duplicated on Home or in the footer.
- When a signed-out user submits Feedback, Login carries the exact validated current

locale, route, and query. After authentication and onboarding it returns to that context and reopens the Feedback dialog; an unsafe or invalid destination falls back to the same localized page without fabricating cross-origin state.

- Admin appears only for authorized administrators and is visually separated as a conditional final destination. Its absence must not leave a confusing blank gap.
- Privacy and GitHub never appear in this panel.

Destination Meaning

- Music opens the shared discovery surface in Music scope.
- Chart Viewer opens that same surface in Chart scope; it is a direct entry into the approved chart-discovery flow, not a duplicate catalog.
- Rankings, Tiers, Bingo, Exams, Arcades, and Data Sync open their independent approved page families.
- The current destination uses `aria-current="page"` on its link or an equivalent route-aware semantic state. A child route may mark its owning destination current.
- Opening the panel must not change the current route, query, scroll position, or form state.

Responsive Panel Behavior

Compact Modal Adaptation

- The panel spans the available content width directly below the visible header and uses two equal semantic columns.
- A scrim separates the open navigation state from page content.
- Page scrolling is locked while the panel is open.
- Keyboard focus is contained within the navigation interaction scope until it closes.
- The header remains visible while the panel is open or focus is within its interaction scope.
- Opening moves focus according to the final accessible component contract; closing returns focus to the trigger unless navigation moved focus to a new page.
- Escape, the visible close operation, activating a destination, and an intentional scrim/outside action close the panel.
- Do not introduce an inner scrolling region while the complete approved navigation can reflow in the available viewport. On unusually short viewports, the interaction must remain operable at 200% and 400% zoom without hiding the final actions.

Wide Popover Adaptation

- The panel becomes a right-aligned two-column non-modal popover anchored to the navigation trigger.
- The page remains scrollable and does not receive a modal scrim or body lock.
- Outside pointer action, Escape, destination activation, or trigger toggle closes it.
- Focus is not forcibly trapped, but keyboard traversal and focus return remain predictable.
- The popover must remain within the viewport and must not obscure its trigger or the focused element.

Transition Rule

The switch between modal and popover is content-driven. The current 1024px logic is not a prescribed breakpoint. Foundation and downstream layout testing must choose the transition where the complete header and panel fit without crowding, clipping, or unusable pointer and keyboard targets. The taxonomy, row order, and destination meaning do not change across the transition.

Scroll-Aware Header Contract

- On compact layouts, downward document scrolling may hide the header to preserve content space; upward scrolling reveals it.
- On wider desktop layouts, the header remains persistently visible and sticky.
- The header begins visible on first load and after every route change.
- It remains visible while the destination panel is open, while focus is within header or panel controls, and while a skip-link target transition is occurring.
- It must reveal before keyboard focus would otherwise become obscured.
- Small scroll jitter around a fixed point must not repeatedly hide and reveal it.
- Scrolling near the document top always reveals it.
- Under `prefers-reduced-motion`: reduce, remove the sliding transition; visibility may change without motion.
- Exact thresholds, hysteresis distance, duration, easing, header height, and compact transition width remain Foundation and prototype measurements, not arbitrary values inherited from the current implementation.

Footer Contract

The ordinary footer contains only the stable trust and project layer required here:

1. Privacy;
 2. GitHub, identified as an external destination;
 3. NosLog copyright/service notice.
- Privacy and GitHub are footer destinations and are not duplicated in the header or More panel.
 - Privacy is reachable while signed out.
 - The account-deletion context may include an additional contextual Privacy link when needed for informed consent; that does not make Privacy a global header destination.
 - The exact question of an additional inline Privacy link in Login body content is deferred to the authentication page brief. The current inline link is not itself an approved 2.0 requirement.
 - The footer must not become a second full site map.

Minimal Authentication Shell

- Login, onboarding, and authentication recovery use the NosLog identity linked to the localized Home route.

- Do not render profile or More controls before authentication context is established.
- Preserve the skip route, exactly one main, and the ordinary trust footer.
- The shell must allow users to leave authentication and return Home without relying on browser Back.

- Login methods, Discord disclosure, the inline contextual Privacy link, onboarding content, incomplete-profile gating, safe return, and authentication recovery follow [17-authentication-onboarding-page-brief.md](#).

Focused Chart-Viewer Shell Boundary

- The entire existing chart-viewer shell is preserved exactly under [document 07](#).
- Ordinary-shell work may retain the current destination but cannot add, remove, or restyle a header, footer, More panel, return path, identity, feedback access, landmark, tab, fullscreen control, or any other viewer element.

System-Recovery Shell

- Maintenance and fatal application errors show NosLog identity, concise state meaning, and the most useful available recovery action.
- Do not show global destinations that are known to be unavailable.
- A recoverable page-level error inside an otherwise functioning ordinary page may keep the ordinary shell; the page brief determines its recovery action.
- Not-found pages should preserve enough shell context to reach Home or another valid destination unless the application itself cannot initialize.
- The complete approved distinction between Not found, recoverable page error, fatal global error, and planned Maintenance-including content, actions, HTTP semantics, timing, locale, diagnostics, and acceptance-follows [19-system-recovery-states-page-brief.md](#).

Accessibility Contract

- Provide a first-focusable skip link that targets the page-level main.
- Use header, nav, main, and footer landmarks with non-duplicated accessible names where multiple navigation regions exist.
- The opened destination collection is link navigation. Do not use ARIA menu or menuitem roles, which would impose desktop-menu keyboard semantics inappropriate for ordinary page links.
- Use native links for route destinations and native buttons for open/close actions.
- Preserve a logical DOM and focus order at every width and locale.
- Meet WCAG 2.2 target-size or spacing requirements; high-frequency compact controls should exceed the minimum when Foundation proportions allow it.
- Focus indicators meet contrast and are not clipped by sticky headers, popovers, panels, or viewport edges.

- Reflow at 320 CSS px without page-level two-dimensional scrolling. At 200% and 400% zoom, all destinations remain available and the close action remains operable.
- Icon meaning never stands alone when the destination panel is open; each link keeps a visible text label.
- Opening, closing, route change, and account-image failure are announced through native semantics without noisy custom live regions.

Localization Contract

- Preserve the same destination identity and relative order in Korean, Japanese, and English.
- Final labels are validated as part of the localization phase; this brief approves destination meanings, not an unreviewed translation string set.
- Test representative long labels, including Chart Viewer, Feedback / Error Report, Data Sync, localized Login, and administrator wording.
- Do not abbreviate a translation until it changes meaning merely to preserve one line.

Links may wrap within their cell while the two-column row remains readable.

- The NosLog service name remains untranslated.
- Every Home, destination, Settings, Privacy, Login, and profile route preserves the active /ko, /ja, or /en locale unless the user explicitly changes language.
- The signed-out browser preference and signed-in account preference behavior remains governed by the approved information architecture and later Settings brief.

Runtime State Contract

State	Required presentation and behavior	Status
Signed out	Login text and navigation trigger; complete public destination panel	Approved
Signed in	Profile image/control and navigation trigger; complete public destination panel	Approved
Administrator	Signed-in state plus conditional final Admin destination	Approved
Profile image missing/error	Stable accessible fallback; no layout shift	Approved
Compact panel closed	Page scroll enabled; trigger reports collapsed	Approved
Compact panel open	Two columns under header, scrim, body lock, focus containment, visible close operation	Approved
Wide popover open	Right-anchored two columns, no scrim or body lock, predictable outside/Escape close	Approved
Current child route	Owning destination receives semantic current state	Approved
Route transition	Shell starts visible; opened navigation closes; focus follows route-navigation contract	Approved
Reduced motion	No header slide; no essential meaning depends on animation	Approved
320 CSS px	No horizontal page scroll; labels and targets remain operable	Approved
Long localized copy	Wrap or adapt without clipping, semantic reorder, or hidden destination	Approved
Focused viewer	Viewer-specific shell only	Approved
Maintenance/fatal error	Minimal identity and recovery action	Approved

Rejected and Superseded Alternatives

- Persistent mobile bottom navigation - Rejected: it creates a mobile-only global taxonomy and consumes chart and arcade-use viewport space. NosLog keeps one responsive top-shell model.
- Persistent labeled product links in the header - Rejected: current evidence at 320px shows crowding, and the approved panel already provides complete access.
- Ellipsis as the global navigation trigger - Rejected: an overflow metaphor is weaker for the service's primary destination set than a navigation/hamburger symbol.
- Different mobile and desktop destination taxonomies - Rejected: layout changes, meaning and relative order do not.
- Descriptions under every destination - Rejected: the panel is frequent navigation, not onboarding documentation; descriptions would increase density without an approved need.
- Visible utility group heading - Rejected: Settings and Feedback remain evident after a divider without introducing an unapproved umbrella label.
- Combine Tiers, Bingo, and Exams - Rejected: the concepts have different NOSTALGIA meanings and user tasks.
- Privacy, GitHub, or Language as separate More entries - Rejected: Privacy and GitHub belong to the footer; language belongs inside the one public Settings route.
- Privacy as a header destination - Rejected: footer access is stable and does not compete with task navigation. Contextual consent links remain page-specific.
- Modal desktop navigation - Rejected: wide layouts can preserve page context with an anchored non-modal popover.
- Non-modal compact panel without focus containment - Rejected: scrim and body lock create a modal interaction and must have coherent keyboard containment.
- Auto-hide on every viewport - Superseded: compact layouts may auto-hide; wider desktop keeps a persistent sticky header.
- Any ordinary-shell migration inside the chart viewer - Rejected from this scope: the complete current viewer shell is locked, irrespective of ordinary-shell rules.

Implementation Mapping

Future implementation should evaluate and reuse the existing shell files rather than blindly preserve their current geometry:

Current area	Required 2.0 responsibility
<code>app/(navigation)/layout.tsx</code>	Remove fixed-wide-page behavior; compose skip link, shell variant, one main, and footer according to route family
<code>components/layout/header.tsx</code>	Restrict ordinary anatomy to identity, account control, and navigation trigger
<code>components/layout/headerNavigation.tsx</code>	Implement complete ordered destinations, compact modal and wide popover adaptations, authorization, semantics, and state
<code>components/layout/scrollAwareHeader.tsx</code>	Implement compact-only hide/reveal safeguards and persistent wide behavior with reduced-motion handling
<code>components/layout/footer.tsx</code>	Preserve Privacy, external GitHub identification, and copyright without becoming a site map
<code>app/(auth)/layout.tsx</code>	Add the minimal authentication shell and trust footer without ordinary global navigation

Current area	Required 2.0 responsibility
Chart viewer layouts/components	Preserve the focused viewer contract and prevent nested ordinary shells

Exact component names may change during implementation. The semantic responsibilities and approved behavior must remain traceable in tests.

Browser Acceptance Contract

Future downstream design and implementation must verify at minimum:

1. 320px Korean, Japanese, and English ordinary pages with signed-out controls, longest representative labels, open panel, last utility, and close action visible;
2. representative 390px signed-in ordinary pages, including failed profile image and Admin present/absent states;
3. intermediate widths around the actual content-driven panel transition;
4. a wide desktop viewport such as 1280px, with a persistent sticky header and right-anchored non-modal popover;
5. downward/upward scroll, near-top jitter, route changes, open-panel scrolling, focus inside the header/panel, and reduced-motion behavior;
6. keyboard-only opening, all links in semantic order, Escape, outside close, visible focus, focus return, and skip-to-main;
7. 200% and 400% zoom, short viewport height, and no inaccessible final destinations;
8. signed-out Login, signed-in Profile, conditional Admin, current route, and settings availability without authentication;
9. ordinary footer Privacy and GitHub, absence of both in header and More, and minimal authentication footer presence;
10. focused chart viewer with no ordinary header/footer and one page-level main;
11. maintenance, fatal error, recoverable page error, and not-found recovery behavior;
12. no unexpected horizontal page scroll, clipped focus, duplicate close action, body scroll leak in compact modal state, or body lock in wide popover state.

Automated tests should cover semantics, route order, permission conditions, body-lock state, focus return, reduced motion, and responsive overflow. Browser inspection must still validate actual visual fit and interaction; lint, typecheck, and component tests are not substitutes.

Reference Matrix

Source	Transferable principle	NosLog application	Limitation
W3C Reflow	Content reflows at 320 CSS px without two-dimensional page scrolling	Compact header, wrapping labels, and complete panel access	Does not prescribe NosLog layout or breakpoints
W3C Consistent Navigation	Repeated navigation preserves relative order	Same destination sequence across locale and viewport	Focused contexts may deliberately use a documented reduced shell
W3C Bypass Blocks	Repeated blocks need a bypass mechanism	First-focusable skip-to-main link	Does not determine visual treatment
W3C Consistent Help	Repeated help access remains predictably located	Feedback stays in one ordinary More-panel utility position	Feedback is a product dialog, not a complete support center
W3C Focus Not Obscured	Sticky layers must not hide keyboard focus	Reveal header and constrain panel/popover geometry around focus	Does not choose header height
W3C Target Size	Pointer targets need minimum size or spacing	Header and panel targets remain operable at compact widths	Minimum compliance is not a visual token system
WAI APG Disclosure Navigation	Ordinary link navigation can use a disclosure button without ARIA menu roles	Button controls a link collection with Escape and focus return	Example is not a modal compact-panel specification
GOV.UK Navigate a Service	Global navigation should expose useful top-level areas rather than become a site map	Keep a bounded product set and contextual page links	Government content hierarchy is not NosLog art direction
GOV.UK Service Navigation	Service identity and responsive navigation can share one top system	Stable NosLog identity and responsive opened panel	Exact component styling does not transfer
USWDS Header	Simple and expanded header variants respond to information depth and width	Compact modal and wide popover share one taxonomy	Federal visual styling does not transfer
Carbon UI Shell Header	A stable product shell separates global controls from page content	Restrained identity/account/navigation anatomy	Enterprise density and left rails are not NosLog requirements
Carbon Global Header	Global header configuration should match product depth	One top shell with a complete on-demand destination set	Carbon taxonomy is not copied
Adobe Spectrum Headers	Header hierarchy should protect product identity and essential actions	Do not shrink NosLog around persistent product labels	Spectrum tokens are not NosLog tokens
Material Top App Bar	Top bars provide navigation, identity, and actions and may respond to scroll	Supports compact scroll-aware behavior	Material visual and motion values are not adopted automatically
Radix Navigation Menu	Navigation components require keyboard, focus, and collision behavior	Informs future component evaluation and tests	Its default anatomy does not cover the approved compact modal state
Radix Popover	Anchored content can handle collision, focus, and outside dismissal	Candidate basis for the wide non-modal adaptation	Does not determine mobile semantics or visual styling
Shopify Polaris Top Bar	Account and global actions can remain compact while navigation is disclosed	Supports separating profile and navigation controls	Commerce administration is not NosLog's user context
osu!	A rhythm-game service uses a compact mobile navigation trigger for a broad destination set	Domain evidence that persistent destination labels are unnecessary on compact widths	osu!'s taxonomy and visual system do not transfer
Taiko.wiki	Rhythm-game utilities require visible locale-aware navigation and compact controls	Reinforces testing long multilingual control combinations	Its persistent icon set is not adopted because NosLog has a different approved hierarchy
V-ARCHIVE	A rhythm-game archive uses logo, search, and a disclosed mobile destination surface	Domain evidence for a dedicated navigation trigger and two-dimensional destination layout	Its modal drawer and content taxonomy are not copied
KONAMI NOSTALGIA	Official game identity and terminology contextualize NosLog destinations	Prevents generic grouping from distorting Tiers, Bingo, and Exams	Official promotional navigation is not a service-shell model

Evidence Convergence

- Accessibility sources converge on stable order, bypass, reflow, focus visibility, target operability, and link-navigation semantics.
- Design systems converge on protecting service identity and adapting the opened navigation to available space rather than forcing every destination into a narrow header.
- Rhythm-game references confirm compact disclosed navigation is familiar in the

domain, but disagree in exact panel form. NosLog therefore uses its approved needs: a complete two-column compact modal and a wide anchored popover.

- No credible source supports adding Privacy, GitHub, or a speculative umbrella group

to NosLog's frequent product navigation. Their approved footer and independent product meanings remain stronger product evidence.

Decision Log

ID	Decision	Status
SHELL-01	Use one responsive top-shell taxonomy; do not add persistent bottom navigation	Approved
SHELL-02	Ordinary header contains NosLog, account state, and one navigation trigger only	Approved
SHELL-03	Signed-out account position uses a visible Login text control	Approved
SHELL-04	Use a navigation/hamburger trigger rather than an ellipsis	Approved
SHELL-05	Keep eight product destinations in the approved row and semantic order	Approved
SHELL-06	Put Settings and Feedback / Error Report after a divider with no group heading	Approved
SHELL-07	Keep Admin conditional and separate after ordinary utilities	Approved
SHELL-08	Use icon plus concise text label; do not add descriptions	Approved
SHELL-09	Compact navigation is a full-width two-column modal below the header	Approved
SHELL-10	Compact open state uses scrim, body lock, focus containment, and reliable close/focus return	Approved
SHELL-11	Wide navigation is a right-anchored two-column non-modal popover without body lock	Approved
SHELL-12	Choose the modal/popover transition from content fit, not the current 1024px implementation	Approved
SHELL-13	Compact header hides downward and reveals upward; wide desktop header remains sticky and visible	Approved
SHELL-14	Keep the header visible during open navigation, header/panel focus, and route entry	Approved
SHELL-15	Reduced motion removes header sliding	Approved
SHELL-16	Ordinary footer owns Privacy, GitHub, and copyright	Approved
SHELL-17	Privacy and GitHub do not appear in the header or More panel	Approved
SHELL-18	Login and onboarding use a minimal identity-plus-footer shell without More/profile	Approved
SHELL-19	Login body includes concise Discord-data disclosure and an inline Privacy link under the authentication brief	Approved
SHELL-20	Preserve the complete current chart-viewer shell; this brief authorizes no internal shell change	Approved correction
SHELL-21	Maintenance and fatal errors use a minimal identity and recovery shell; exact state behavior follows Brief 19	Approved
SHELL-22	Opened destinations remain native link navigation, not ARIA menu semantics	Approved
SHELL-23	Preserve identical destination identity and semantic order across ko, ja, and en	Approved
SHELL-24	Exact Foundation tokens, dimensions, breakpoint, and final localized strings remain downstream work	Approved
SHELL-25	Signed-out Feedback preserves validated locale/route/query and reopens the dialog after Login	Approved

Handoff Boundary

Claude Design must preserve the approved shell variants, anatomy, destination order, compact and wide behaviors, scroll rules, footer ownership, semantics, and states. It may determine visual composition within the later approved Foundation. It must not reintroduce persistent header destination labels, bottom navigation, descriptive menu cards, Privacy in More, a universal auto-hiding desktop header, or the ordinary shell inside the focused viewer.



The future Codex implementation session must map these requirements to code and automated/browser tests. If Foundation testing shows that two columns cannot remain usable at 320 CSS px, or if one visible close-control anatomy cannot satisfy modal focus containment, report the conflict and obtain a guide revision rather than silently changing taxonomy or behavior.

NosLog 2.0 Settings and Account Management Page Brief

docs/design/16-settings-account-page-brief.md

Document Control

- Status: Approved
- Decision status: `Complete settings and account-management contract approved:

one public locale-prefixed destination; responsive category navigation; guest and authenticated scope; immediate and explicit save ownership; language and theme behavior; profile image, NosLog nickname, NOSTALGIA identity, country/region, and preferred-arcade rules; five positive privacy controls; Discord identity management; logout; and permanent account deletion`

- Evidence status: `Repository and browser inspection; approved information

architecture, profile, and shared-shell briefs; more than thirty cited accessibility, internationalization, design-system, platform, and production references; and the user-approved decision record`

- Date started: 2026-08-03
- Last decision update: 2026-08-04
- Language: English
- Parent information architecture:

[02-information-architecture.md](#)

- Shared-shell contract:

[15-shared-shell-navigation-brief.md](#)

- Authentication and onboarding contract:

[17-authentication-onboarding-page-brief.md](#)

- Privacy and data-practices contract:

[18-privacy-data-practices-page-brief.md](#)

- Profile contract: [09-profile-page-brief.md](#)

- Scope: public settings entry, category structure, preference ownership and saving,

signed-out and signed-in behavior, profile editing, privacy, Discord connection, logout, deletion, responsive adaptation, localization, accessibility, states, and future implementation acceptance

- Excluded: final visual styling, exact Foundation tokens and dimensions, final

localized copy, raw account-data export, administrator settings redesign, database/API implementation, and production code changes in this design-guide session

Decision Labels

- Observed: Verified in the repository, current browser evidence, an approved

upstream artifact, or a cited source.

- Approved: Explicitly agreed with the user and authoritative for downstream design.

- Proposed: Evidence-based direction awaiting user approval.
- Open: Requires further research, testing, or a user decision.
- Rejected: Considered and explicitly not selected.
- Superseded: Replaced by a later approved direction.

This brief is authoritative for settings membership, information order, behavior, ownership, states, responsive adaptation, accessibility, and acceptance criteria. Claude Design may define the final visual composition within the later approved Foundation, but it must not change which settings exist, how they are saved, who can use them, or the consequences of sensitive actions.

Purpose

Settings gives every visitor one predictable place to control the NosLog experience and gives authenticated users a safe place to manage identity, public visibility, connection state, and account lifecycle.

The surface must answer five questions without becoming one long undifferentiated form:

1. How should NosLog look and which language should it use on this device or account?
2. Which identity and arcade information represents me?
3. Which approved profile and activity fields may other people see?
4. Which Discord account is used to authenticate me?
5. How do I sign out or permanently delete my NosLog account with informed consent?

Primary Context and Success

- Approved: Settings is an ordinary public-shell destination at

`/[[locale]]/settings`, reachable from More whether signed out or signed in.

- Approved: A guest succeeds when they can change language and theme without

encountering disabled account forms.

- Approved: An authenticated user succeeds when they can find a category,

understand persistence and public consequences, save changes without losing input, and return to the same category or view their profile.

- Approved: Sensitive identity and deletion actions explain consequences before

commitment and never imply success after a partial or failed operation.

- Approved: Mobile is the primary context, but wide layouts must use available

space for orientation and efficient category switching rather than retaining the current approximately 390px column.

- Approved: Korean, Japanese, and English preserve the same category meaning,

control ownership, and consequence hierarchy.

Current-Product Evidence

Repository Evidence

- Observed: Settings currently exists only under authenticated profile routing;

signed-out access redirects to login. A public `/[[locale]]/settings` route does not yet exist.

- Observed: The current page combines avatar, theme, locale, localized-title

visibility, arcade, username, country, privacy, editable Discord data, Save/Cancel, and account deletion in one long form.

- Observed: Theme is currently an immediate local-storage preference with dark as the fallback. Locale is currently staged and takes effect after the entire form is saved.
- Observed: The current save action remains available without a dirty-state distinction and redirects to Profile after success. There is no verified unsaved leave warning.
- Observed: The current username path uppercases input and applies a uniqueness constraint. The data model also holds a separate synced `nostalgia_name`; these are different identity concepts.
- Observed: Current avatar upload accepts JPG, PNG, and WebP up to 4 MB and stores a public Blob, but does not provide the approved remove and crop workflow.
- Observed: Preferred arcade currently uses an active-arcade native select. It does not provide name/region search, unavailable-selection retention, or discovery navigation.
- Observed: Current privacy fields are three negative `hide_*` controls. They do not cover the approved five positive public-visibility concepts.
- Observed: Discord OAuth is the sole authentication identity. Existing callback behavior refreshes Discord-derived information, while the current form also exposes Discord values as editable fields.
- Observed: Current deletion requires an exact phrase, removes uploaded Blobs, deletes database data, and destroys the session on success. Blob deletion failure prevents database deletion, but complete idempotent retry and recent OAuth reauthentication are not current verified contracts.

Browser Evidence

- Observed: At compact width, the single form creates a very long page with unrelated actions sharing one save boundary.
 - Observed: At wide desktop width, the settings content still occupies the same narrow centered shell rather than adding persistent category orientation.
 - Observed: The current hierarchy does not clearly distinguish immediate display preferences, staged profile edits, read-only login identity, and irreversible account deletion.
- Current implementation is a feature and data inventory. It is not the visual or interaction authority for NosLog 2.0.

Research Synthesis

Convergent Findings

1. Mobile settings work best as a categorized overview that opens one focused group; wide settings can keep category navigation visible beside the detail region.
2. Immediate preferences and explicit-save forms may coexist when their persistence boundary is visually and semantically clear.
3. Language must be manually selectable, reflected in document language and URL, and must not be silently overwritten by automatic negotiation after an explicit choice.
4. Theme should include system preference in addition to light and dark, and must remain operable without relying on color alone.
5. Public-profile controls are clearer when labels describe the visible result and

enabled means public, rather than presenting a collection of negative “hide” rules.

6. Authentication identity should remain read-only outside a dedicated sensitive account-change flow.

7. Searchable single-selection is appropriate for a growing named-venue set; it needs keyboard-complete combobox semantics rather than a custom inaccessible picker.

8. Destructive account deletion needs escalating friction: consequences, recent authentication, exact confirmation, an unambiguous final action, robust processing, and truthful completion reporting.

9. A human-readable social profile card and a raw machine-readable data archive solve different tasks and must not share one label or implied behavior.

NosLog-Specific Fit

- Arcade-adjacent mobile use favors short category tasks and immediate display preferences.
- Country/region is not a language proxy. It defines the user’s main NOSTALGIA play region and regional ranking population.
- NOSTALGIA’s official player name is game-synced and uppercase; NosLog nickname is a separate service identity with broader writing-system support.
- Discord is the only login method, so “disconnect” would strand the account. NosLog instead provides refresh and a separately confirmed login-account change.
- Profile-card sharing remains a profile feature. It is not a settings backup or a prerequisite for deletion.

Approved Information Architecture

One Destination, Contextual Scope

- Use one localized entry: `/[[locale]]/settings`.
- Do not create a guest-only settings page or a second account-settings entry in More.
- Exact child-route versus query-state naming is deferred to implementation mapping, but the selected category must be restorable through browser back/forward and a direct URL.
- Preserve existing localized links through a compatibility redirect from `/[[locale]]/profile/settings` when 2.0 is implemented.

Category Set and Order

Order	Category	Guest	Signed in	Required contents
1	Experience	Yes	Yes	Language and theme
2	Profile	No	Yes	Avatar, NosLog nickname, read-only NOSTALGIA identity context, country/region, preferred arcade
3	Privacy	No	Yes	Five positive public-visibility controls
4	Connections	No	Yes	Read-only Discord identity, refresh information, change login account
5	Account	No	Yes	Logout, contextual Privacy access, permanently delete account

- A guest sees Experience plus a compact sign-in note explaining that profile and

account settings become available after login.

- Do not render inaccessible authenticated categories as a long disabled list.
- Category labels remain stable across layout adaptations; do not merge categories to

save space.

Information Priority

1. current category identity and any unsaved state;
2. primary controls and concise consequence text;
3. category-specific save or sensitive action;
4. inline validation and status feedback;
5. contextual supporting links.

Long generic explanations, repeated legal copy, raw internal identifiers, and duplicate navigation links are progressively disclosed or omitted.

Experience Category Contract

Language

- Options are Korean, Japanese, and English.
- Selection takes effect immediately and navigates to the same settings category under the new locale prefix.
- Update the URL, visible UI, document `<html lang>`, and stored preference as one coherent transition.
- Signed-in selection persists to the account. Signed-out selection persists only in the browser.
- An explicit shared URL such as `/ja/music/...` renders in Japanese for that visit but does not silently overwrite a previously stored account or browser preference.
- For a first signed-out visit with no explicit choice, initialize Korean for a Korean browser, Japanese for a Japanese browser, and English otherwise.
- Do not infer country/region from the selected UI language.

Theme

- Options are System, Dark, and Light.
- System is the initial default for new users and guests who have not made an explicit choice.
- Preserve an existing explicit dark or light choice during migration.
- Theme remains device-local even while signed in; do not sync it across devices.
- System follows the current operating-system preference and responds when that preference changes.
- All three options apply immediately. No category Save action is required.
- The approved NosLog representative art direction remains dark, while both dark and

light modes require complete contrast, state, chart, image, and focus testing.

Profile Category Contract

Profile fields are one staged form with one explicit category Save action. The Save action is disabled until a valid change exists.

Avatar

- Show the current avatar, a Change action, and a Remove action when a custom avatar exists.
- Accept JPG, PNG, and WebP up to 4 MB.
- After choosing a file, provide a local 1 : 1 crop/position step and circular profile preview. The crop interaction must work with touch and keyboard.
- The staged preview does not become public until Profile is saved successfully.
- If upload or save fails, preserve the existing public avatar and the user's staged editing context.
- Remove is staged with the rest of Profile and falls back to the NosLog-generated identity image only after a successful save.
- Do not let Discord refresh overwrite a user-selected NosLog avatar.

NosLog Nickname

- Label the editable field NosLog nickname in meaning, not "NOSTALGIA name."
- Allow 1-20 Unicode letters and numbers across Korean, Japanese, and Latin writing, plus internal spaces and ., _, and -.
- Trim outer whitespace; reject blank-only values, controls, and emoji in the initial 2.0 contract.
- Preserve the entered display case and allowed width form.
- Enforce uniqueness through a normalized comparison key that is case-insensitive and full-width/half-width-insensitive.
- Existing numeric profile URLs remain canonical; nickname changes must not break shared profile links.
- Explain uniqueness errors inline without erasing the entered nickname.

NOSTALGIA Official Player Name Boundary

- NOSTALGIA player name is a separate, synced identity supplied by game data.
- It remains uppercase according to the game and is never editable in NosLog settings.
- If context is necessary, show it as concise read-only supporting identity, not as a second editable name field.
- Its public visibility is controlled in Privacy.

Country or Region

- Options are Korea, Japan, and Other.

- This value means main NOSTALGIA play region and regional-ranking population. It does not select language and is not inferred from language.
- Changing the existing value opens a short confirmation explaining the ranking and profile consequence before the staged change is accepted.
- Do not require proof, impose a long cooldown, or suggest that the choice represents nationality.

Preferred Arcade

- The closed field summarizes the selected venue as `name · region` and provides Change or Clear.
- Change opens a searchable, keyboard-complete, single-select list supporting venue name and region queries.
- Provide a contextual route to arcade discovery; do not embed a duplicate map inside Settings.
- A venue chosen from Settings is staged until Profile save.
- The contextual “set as preferred” action on an arcade detail page may update the same field immediately because the venue and consequence are already explicit there.
- If the selected venue later becomes inactive, retain it as unavailable and offer Change or Clear. Never silently erase it.

Profile Save and Completion

- Save commits all valid staged Profile changes as one category operation.
- Remain in Profile after success and announce a concise success status.
- Provide a separate View my profile link; do not force navigation after save.
- Preserve every valid input and expose field errors if save fails.
- If the user attempts to leave with staged changes, warn before discarding them.

Privacy Category Contract

Use positive labels. On means the data is visible on approved public surfaces; Off means NosLog withholds it from other users. Do not add a whole-profile private switch.

Order	Control	Public meaning when On	Coupling rule
1	NOSTALGIA player name	Show the synced official player name where the profile contract allows	Does not affect NosLog nickname
2	Discord identity	Show approved Discord display identity on the public profile	Does not disconnect or change login identity
3	Preferred arcade	Show the selected preferred arcade	Does not remove the stored selection
4	Total play count	Show aggregate play count	Does not hide score or ranking data unless another contract says so
5	Play activity	Show Last played and Recent Plays together	One control owns both to avoid contradictory partial activity

- Privacy is one explicit-save category. Save is disabled until dirty.
- Changing a toggle does not erase the underlying data.
- Labels and short descriptions state the public consequence without exposing internal

hide_* names.

- If save fails, keep the pending choices, announce the failure, and identify the affected control when possible.
- Public surfaces must consume the same privacy policy consistently; a profile card, profile page, ranking identity, and other approved consumers may not invent their own incompatible visibility meanings.

Connections Category Contract

Discord Identity

- Discord remains the sole NosLog login method.
- Show the current Discord-derived display identity read-only. Do not provide manual

Discord username or display-name fields.

- Refresh `Discord information` requests current approved identity data through OAuth and updates Discord-derived fields only.
- Refresh must not overwrite the NosLog nickname, custom avatar, country, arcade, or privacy settings.
- Public Discord visibility is controlled only in Privacy.

Change Login Account

- Provide a separate sensitive `Change login account` action.
- Before OAuth begins, confirm that future login identity and account association will change; do not present this as a casual information refresh.
- Complete the change only after the callback proves the new Discord identity and the server resolves uniqueness and account-association rules safely.
- Do not offer Disconnect while Discord is the only authentication method.
- Cancellation or OAuth failure returns to Connections with the existing login identity intact and an actionable status.

Account Category Contract

Logout

- Logout is a direct account action separated from permanent deletion.
- It clears the authenticated session but preserves device-local theme and the saved signed-out browser language preference.
- After logout, navigate to the localized Home and provide concise confirmation.

Contextual Privacy Access

- The ordinary footer remains the global owner of Privacy and GitHub links.
- Account may provide a contextual Privacy link near deletion consequences because the policy is directly relevant there. This is not a new header or More-panel entry.

Permanent Account Deletion

Account deletion is immediate and irreversible. There is no grace period or recovery window in the approved 2.0 contract.

Entry and Consequence Summary

1. Keep the destructive area visually and semantically separate from Logout.
2. Open an accessible confirmation dialog instead of deleting inline.
3. Explain that the NosLog account is deleted, while Discord and the official

NOSTALGIA account remain unaffected.

4. Show a concise user-centered consequence summary with exact counts when reliable.

Use no more than approximately four or five grouped rows, omit zero-value rows when that improves clarity, and never expose raw database-table names.

Approved consequence groups include:

- play, synchronization, and recent-play records;
- growth and grade history;
- tier votes and community activity;
- Bingo and Exam progress or submissions;
- user uploads and evidence files;
- public profile and ranking presence.

Counts make the consequence tangible; they must not become a dense database inventory.

Verification and Confirmation

1. Require recent Discord OAuth authentication before final deletion.
2. If Discord authentication is unavailable, do not weaken verification; provide the approved Privacy contact/recovery route.
3. Require typing one localized exact confirmation phrase supplied by the interface.
4. The final destructive button remains disabled until recent authentication and the exact phrase are both valid.
5. Do not ask for a deletion reason.

Exact final localized wording belongs to the localization-copy pass, but it must retain the meaning “permanently delete this NosLog account” and must not use ambiguous generic confirmation such as OK.

Processing and Result

- On final submission, prevent duplicate requests and prevent dismissing the dialog while the irreversible server operation is active.
- The server operation must be idempotent or safely retryable.
- Do not show success if account data or uploads were only partially deleted.
- On a retryable failure, preserve safe recovery context and provide Retry and Error report routes without leaving the account in a falsely completed UI state.
- On complete success, destroy the session, clear account-sensitive client caches, navigate to localized Home, and show a one-time completion status.
- Device-local guest theme and language preferences remain.
- Signing in later with the same Discord identity creates a new NosLog account rather

than restoring deleted data.

Raw Account-Data Export Boundary

- Rejected for NosLog 2.0 scope: Do not add a raw Export my data control to this

Settings brief.

- The approved profile-card Share feature creates a visually composed profile summary

for X, Discord, and other social services. It is not a backup, archive, portability package, or deletion prerequisite.

- If a raw machine-readable archive becomes a verified future need, research its data

scope, privacy, generation, expiry, localization, and operational cost as a separate product capability. Do not relabel profile-card sharing as data export.

Persistence and Save Ownership

Control or action	Ownership	Commit timing	Failure behavior
Language	Account when signed in; browser as guest	Immediate	Stay on usable locale/context; expose retryable status
Theme	Device/browser	Immediate	Retain last usable theme
Avatar and Profile fields	Account	Explicit Profile Save	Keep input/staged preview; preserve existing public avatar
Five Privacy controls	Account	Explicit Privacy Save	Keep pending controls and expose error
Refresh Discord information	Account connection	Explicit OAuth action	Preserve existing identity
Change login account	Account connection	Confirmed OAuth action	Preserve existing identity
Logout	Session	Explicit direct action	Do not report logout until session invalidation succeeds
Delete account	Account lifecycle	Reauth + exact phrase + final action	Truthful partial/retry state; never false success

Explicit-Save Category Rules

- Save is disabled before any valid change and while a save is running.
- A visible dirty state must not rely only on button color.
- Leaving, changing category, using browser history, or closing the page with unsaved

changes triggers one consistent discard warning.

- After server validation failure, focus the error summary first when present and then

make the first invalid field reachable predictably.

- Success and error feedback uses a programmatic status announcement without stealing

focus unnecessarily.

- Mobile may use a category-only sticky save region. It is not global navigation and

appears only for an explicit-save category.

- Wide layouts keep the category action within the detail region.

State Contract

State	Required behavior
Guest	Experience works; compact sign-in note; no disabled authenticated-category list
Authenticated overview	Five categories in approved order with concise current summaries where useful
Category loading	Preserve category orientation and stable geometry; do not replace the whole shell
Preference applying	Prevent conflicting repeat input only as needed; retain readable current value
Clean explicit-save category	Save disabled; no unsaved warning
Dirty valid category	Save enabled; dirty state exposed textually or semantically
Dirty invalid category	Save disabled or submission blocked; inline guidance identifies invalid field
Saving	Save busy and protected from duplicate submission; other destructive actions unavailable
Save success	Remain in category; announce concise result; clear dirty state
Save failure	Preserve input; error summary plus inline error; no forced navigation
Unsaved navigation	Confirm discard or remain; cancel preserves state
Avatar local preview	Public avatar unchanged until successful Profile save
Avatar upload failure	Existing avatar remains; user can retry or choose another file
Nickname conflict	Preserve entered form; explain uniqueness conflict inline
No preferred arcade	Clear empty value with Change/select action
Preferred arcade unavailable	Retain labeled unavailable value; provide Change and Clear
Discord refresh in progress	Existing login identity remains visible; prevent repeat refresh
Discord change cancelled/failed	Existing account association remains; return actionable status
Privacy save failure	Underlying data and prior public state unchanged; pending choices remain for retry
Deletion dialog initial	Least-destructive focus, clear title/consequences, final action disabled
Deletion reauthentication needed	Explain requirement and preserve dialog progress that is safe to retain
Deletion processing	Dialog cannot dismiss; duplicate final action blocked
Deletion retryable failure	No success claim; retry and error-report paths
Deletion complete	Session and sensitive cache cleared; localized Home and one-time completion status
Offline or interrupted request	Distinguish unapplied local input from uncertain server result; reconcile before another sensitive request
Permission/session expired	Preserve non-sensitive staged input where safe; explain sign-in requirement and return path

Responsive Layout Contract

Compact and Mobile

- Start with a Settings overview that lists only categories available to the current authentication state.
- Selecting a category opens a focused detail surface with a clear Settings-back relationship.
- Preserve category and form state through back/forward navigation.
- One column reflows through 320 CSS px without two-dimensional page scrolling.
- Explicit-save categories may use a bottom sticky action region above safe-area insets. It must not cover the final field, validation, focused content, or software keyboard.
- Dialogs, comboboxes, avatar crop, and exact-phrase confirmation must remain operable

at short viewport heights and 200-400% zoom.

Wide Layout

- Use a persistent category list at left and one detail region at right when content fit supports it.
- Do not merely center and enlarge the compact screen.
- Category selection updates the detail and history state without losing orientation.
- Keep destructive Account content within the detail column; do not promote deletion into persistent navigation.
- Exact transition width is determined later from real Korean, Japanese, and English labels and detail-content fit, not from the current 1024px implementation.

Accessibility Contract

- One page-level main and one descriptive h1; category title follows a coherent heading order.
- Category navigation uses ordinary links or buttons with current state, not ARIA menu semantics.
- Every form control has a persistent programmatic label. Placeholder text is never the only label.
- Toggle name and state expose the positive public consequence; color is not the only state indicator.
- Use native radio semantics for language and theme choices unless an equivalent composite passes complete keyboard and screen-reader testing.
- Preferred arcade follows the WAI-ARIA combobox pattern: text input, announced result count/state, arrow navigation, Enter selection, Escape behavior, and visible focus.
- Avatar crop exposes non-pointer controls for position and zoom and a meaningful preview description.
- Validation satisfies error identification, suggestion where known, and prevention for account deletion.
- Save and preference results use appropriate live status semantics. Do not announce every keystroke or crop movement.
- Confirmation and deletion use modal-dialog/alert-dialog behavior as appropriate: semantic title and description, focus containment, Escape before processing, least-destructive initial focus, and focus restoration on cancellation.
- While deletion is processing, dismissal is disabled but the busy state remains perceivable.
- Meet approved contrast, target-size, focus-visible, reflow, zoom, reduced-motion, and focus-not-obscured requirements once Foundation tokens are defined.

Localization and Content Contract

- Provide complete Korean, Japanese, and English labels, instructions, validation, status, confirmation phrase, consequence text, and recovery actions.
- Do not derive locale labels by transliteration or make Korean the semantic source at runtime.
- Allow Japanese and English category/action labels to wrap without truncating the setting meaning.
- Preserve code identifiers and exact user-entered nickname form where required.
- Normalize nickname uniqueness separately from display form and test Korean, Japanese, Latin, full-width, half-width, spaces, punctuation, and combining forms.
- Locale changes update document language before announcing the new category content.
- Country values use localized display names, while stored identifiers remain stable.
- Destructive confirmation phrases must be language-specific and shown close to the input; never require users to guess or translate the phrase.
- Dates and counts in deletion consequences use locale-aware formatting.

Data and Representative Content Requirements

Future design specimens and tests must include:

- a 20-character mixed-script NosLog nickname and a uniqueness conflict;
- distinct NosLog nickname and uppercase NOSTALGIA player name;
- Korean, Japanese, and English category/action labels at realistic longest lengths;
- a preferred arcade with a long Japanese venue name and region;
- an inactive preferred arcade;
- missing, custom, failed, and staged avatar states;
- Discord display name changes and refresh failure;
- zero, small, and large deletion consequence counts;
- profiles with and without play activity, Discord visibility, and preferred arcade;
- signed-out browser preferences, an existing signed-in account preference, and a new account seeded from guest preference;
- system theme changes while Settings is open;
- expired session, offline save, server validation, OAuth cancellation, and partial deletion-retry states.

Do not use only ideal short Korean content when judging layout.

Implementation Mapping

Future implementation should evaluate current code and preserve data safely rather than copy current form geometry:

Current or required area	Required 2.0 responsibility
Current <code>/[locale]/profile/settings</code> route	Compatibility redirect preserving locale and, where possible, category intent

Current or required area	Required 2.0 responsibility
New /[locale]/settings family	Public overview, authenticated categories, URL-restorable detail state, ordinary shell
Current Settings form/action	Split save ownership into immediate Experience controls and explicit Profile/Privacy operations
User preference model	System theme migration, account/browser language precedence, five positive privacy concepts
User identity model	Preserve separate NosLog nickname and synced uppercase NOSTALGIA name
Nickname persistence	Add normalized uniqueness key without changing canonical numeric profile URLs
Avatar storage and action	Staged crop/remove, safe Blob replacement, failure rollback, user-avatar precedence over Discord
Arcade selector and APIs	Searchable active venue selection, unavailable retained value, contextual detail action
Discord OAuth	Read-only display, refresh-only field updates, confirmed account change, recent reauthentication for deletion
Deletion action and storage	Consequence counts, safe upload/data deletion, idempotency, partial-failure truth, session/cache clearing
Profile/privacy consumers	Enforce the same positive visibility contract across public profile, cards, rankings, and approved surfaces
Automated and browser tests	Persistence, history, dirty warnings, validation, OAuth, deletion, reflow, locale, theme, semantics, and privacy consistency

Exact database migrations, endpoint names, category route syntax, and final component names belong to the future implementation plan. They may not weaken this behavior contract.

Browser Acceptance Contract

Future downstream design and implementation must verify at minimum:

1. guest and authenticated /ko/settings, /ja/settings, and /en/settings entry, including More-panel navigation and legacy-route redirect;
2. guest Experience controls with no disabled account-category inventory;
3. signed-in category overview and direct/restored Profile, Privacy, Connections, and Account category state through link, reload, back, and forward;
4. immediate language transition retaining category, correct URL and `<html lang>`, stored-preference precedence, and explicit shared-locale URL behavior;
5. System/Dark/Light application, existing-choice migration, operating-system change, reload persistence, and both visual themes;
6. removal of the former localized-title preference without losing translated/read-title search aliases or the Music Detail disclosure;
7. avatar format/size rejection, touch and keyboard crop, preview, remove, save success, upload failure, and Discord-refresh non-interference;
8. nickname Unicode rules, normalization collisions, display preservation, validation recovery, and unchanged numeric profile URLs;
9. separate read-only uppercase NOSTALGIA name and its privacy behavior;
10. country confirmation and independence from language, plus preferred-arcade search, clear, unavailable retention, discovery link, and detail-page immediate action;
11. every positive Privacy control across all consuming public surfaces and save

failure without underlying data loss;

12. Discord read-only identity, refresh, cancellation/failure, account change, lack of Disconnect, and no overwrite of unrelated profile fields;

13. explicit-save clean, dirty, invalid, saving, success, failure, discard-warning, category-change, and expired-session behavior;

14. deletion consequence counts, recent OAuth reauthentication, exact localized phrase, button gating, keyboard focus, processing lock, retryable/partial failure, complete deletion, cache/session clearing, and later new-account behavior;

15. 320px, representative 390px, intermediate content-driven transitions, and a wide viewport such as 1280px in all three languages, at short height and 200-400% zoom;

16. keyboard-only navigation, visible focus, labels, announcements, combobox, confirmation dialog, reduced motion, target sizes, no clipped focus, and no unexpected horizontal page scroll.

Lint, typecheck, and component tests do not replace actual browser inspection of the localized responsive interactions.

Reference Matrix

Source	Transferable principle	NosLog application	Limitation
Android Settings	Group related preferences in predictable categories	Compact overview and focused category detail	Android visual patterns do not define NosLog web styling
SAP Fiori Profile and Settings	Separate profile, application settings, and account actions	Five explicit categories	Enterprise mobile scope differs from NosLog
Primer Layout	Responsive composition should use available space intentionally	Compact drill-in and wide list-detail adaptation	Does not prescribe settings content
Grafana Save pattern	Save ownership and feedback must be predictable	Category-level staged saves	Grafana has denser administrative forms
GitLab Saving and Feedback	Distinguish immediate, explicit, loading, success, and failure states	Mixed save model with clear boundaries	GitLab component styling is not adopted
Agriculture Warn before leaving	Warn when navigation would discard meaningful unsaved work	Profile and Privacy dirty-state protection	Exact browser integration remains implementation work
W3C Error Identification	Identify errors in text and associate them with controls	Error summary and inline validation	Does not choose product wording
W3C Status Messages	Announce results without unnecessary focus movement	Immediate preference and save feedback	Live-region implementation requires testing
W3C Form Labels	Controls require persistent programmatic labels	All settings, confirmation, and crop controls	Does not define NosLog hierarchy
Android Dark Theme	Support system preference and complete theme coverage	System, Dark, and Light	Android tokens do not transfer
Apple Dark Mode	Preserve legibility, contrast, and imagery across appearances	Both theme modes require full visual verification	Apple platform styling is not adopted
web.dev prefers-color-scheme	Respect and react to operating-system appearance preference	System theme	Browser support details may evolve
web.dev Theme switch	A theme control needs explicit state, persistence, and accessible interaction	Immediate three-option theme setting	Example code is not the implementation authority
W3C Language Negotiation	Automatic negotiation is an initial choice, not a substitute for user control	First-visit locale default	Does not define URL routing
W3C Site Language Navigation	Offer a visible language choice and remember explicit selection	Public Settings language control	Content strategy remains NosLog-specific
W3C Language Selector	Use understandable language names and avoid flag-only language controls	Korean, Japanese, and English choices	Does not define category layout
W3C Declaring Language	Document language metadata must match rendered language	Update <code><html lang></code> with locale	Does not define persistence
Google Search settings	Guests can control browser-scoped language and display preferences	Public Experience category	Google has a different preference set
YouTube Language or Location	Language and location are distinct preferences with different consequences	Keep locale independent from play region	YouTube location semantics differ
osu! Account Help	Rhythm-game identity and country changes require explicit account semantics	Country consequence and identity separation	osu! policy does not determine NosLog verification
osu! Ranking	Country grouping affects competitive ranking context	Regional-ranking population explanation	NOSTALGIA ranking rules remain authoritative
Unicode CLDR Territory Names	Stable identifiers may use localized display names	Korea, Japan, and Other presentation	“Other” is a NosLog product grouping
Discord OAuth2	OAuth identity actions require explicit authorization boundaries	Refresh, account change, and recent reauthentication	NosLog owns account-association policy
Discord User Resource	Discord fields originate from a remote identity record	Read-only derived Discord information	Available fields depend on scopes
Discord Usernames	Username and display name are distinct Discord concepts	Avoid manual ambiguous Discord editing	Discord terminology may change
Discord Connections FAQ	Connection visibility and account connection are separate concerns	Privacy toggle does not disconnect login	Discord-native profile connections differ from NosLog
Google Profile Picture	Users expect preview, change, and removal for profile images	Avatar workflow	Google crop behavior is not copied
GitHub Profile Personalization	Service identity fields should be clearly named and independently editable	NosLog nickname boundary	GitHub naming rules differ
GOV.UK File Upload	State accepted types, size, errors, and recovery clearly	JPG/PNG/WebP and 4 MB avatar validation	Crop is outside the component scope

Source	Transferable principle	NosLog application	Limitation
W3C Images Tutorial	Images need purpose-appropriate alternatives	Avatar and preview semantics	Interactive crop needs additional controls
W3C Personal Names	Names should not be constrained to one writing system or Western structure	Unicode NosLog nickname	Product-safe punctuation and uniqueness remain NosLog decisions
osu! Registration	Rhythm-game community identity uses explicit uniqueness and naming rules	Comparable nickname validation context	NosLog deliberately supports different scripts and URLs
WAI-ARIA Combobox	Searchable selection needs defined keyboard, focus, and popup behavior	Preferred-arcade search	Exact visual composition remains downstream
USWDS Combo Box	Long option sets benefit from filtering and robust status/error states	Venue name and region filtering	Federal tokens do not transfer
Primer Autocomplete	Autocomplete should communicate results and selection clearly	Single preferred-arcade result	GitHub's use cases include multi-select
Carbon Dropdown	Choose dropdown, combobox, or autocomplete from option-set size and task	Avoid a map or long native select for growing venues	Carbon terminology is not the final component name
Steam Privacy	Public identity and activity fields may have distinct visibility controls	Five field-level privacy concepts	Steam's whole-profile modes are explicitly not adopted
Google Profile Visibility	Explain which personal information other people can see	Positive consequence labels	Google has broader account ecosystems
GitHub Delete Account	Deletion should enumerate consequences and require deliberate confirmation	Structured NosLog consequence dialog	GitHub ownership-transfer rules do not apply
Google Delete Account	Explain data loss and unaffected external services	NosLog versus Discord/NOSTALGIA boundary	Google offers export, which is not approved for NosLog 2.0
Discord Delete Account	Authentication-platform account lifecycle differs from connected-service deletion	Clarify Discord account remains	Discord deletion itself is outside NosLog
Mozilla Delete Account	Permanent deletion needs clear scope and completion state	NosLog data groups and irreversible result	Mozilla data categories differ
Steam Account Deletion	High-impact deletion uses confirmation and safeguards	Escalating friction	Steam's grace-period policy is not adopted
Microsoft Close Account	External subscriptions/services and account effects must be distinguished	Unaffected NOSTALGIA/Discord explanation	Microsoft ecosystem complexity is not NosLog's
Atlassian Delete Account	Deletion status must account for distributed data and retry behavior	Truthful completion and partial failure	Organization ownership does not apply
W3C Error Prevention	User-controlled data deletion needs review, confirmation, or reversibility	Consequence review, reauth, and exact phrase	NosLog chooses confirmation because deletion is not reversible
WAI-ARIA Alert Dialog	Urgent confirmation needs semantic title, description, and controlled focus	Final deletion warning	Not every settings dialog should use alertdialog
WAI-ARIA Modal Dialog	Modal interactions need focus containment, Escape, and return	Account change and deletion dialogs	Processing-lock behavior is product-specific
USWDS Modal	Modal content should be focused, concise, and operable at narrow widths	Bounded consequence summary	USWDS styling does not transfer
Google Download Data	Raw data archives are a distinct portability workflow	Evidence for separating export from social sharing	NosLog 2.0 explicitly excludes this capability
Discord Data Package	Data packages require generation, scope, download, and privacy rules	Supports treating future export as a separate product	Discord package scope does not define NosLog data

Rejected and Superseded Alternatives

- Authenticated-only Settings - Rejected: guests need usable language and theme preferences without authentication.
- Separate guest settings route - Rejected: one predictable destination is clearer and can reveal scope by authentication state.
- One long authenticated form - Rejected: unrelated persistence and consequence boundaries become unclear, especially on mobile.

- Disabled authenticated categories for guests - Rejected: they add length without enabling a task; a compact sign-in note is sufficient.
- Mobile-only bottom settings navigation - Rejected: it conflicts with the approved responsive top-shell model and does not transfer to wide layouts.
- Theme synchronized to the account - Rejected: device environment is the stronger owner; language and title visibility remain account-aware.
- Dark as the universal default - Superseded: System is the initial default while preserving prior explicit dark/light choices.
- Language from country/region - Rejected: UI language and play/ranking region are different user concepts.
- Automatic locale negotiation overwriting explicit preference - Rejected: direct links may render a locale without silently changing stored choice.
- One global Save for every category - Rejected: immediate display preferences and staged profile/privacy data require different commit timing.
- Forced redirect to Profile after save - Rejected: success remains in context; viewing the profile is a separate action.
- Editable NOSTALGIA name - Rejected: it is synced official game identity.
- Forced-uppercase NosLog nickname - Superseded: preserve user display form while enforcing normalized uniqueness.
- Emoji in initial nickname rules - Rejected for 2.0: defer until normalization, moderation, rendering, and search behavior are intentionally specified.
- Map embedded in preferred-arcade settings - Rejected: searchable single-select solves editing; full discovery remains in the Arcade family.
- Silently clearing inactive preferred arcade - Rejected: preserve user context and make unavailable status explicit.
- Whole-profile private mode - Rejected: use the approved five field concepts.
- Negative `hide_*` labels - Superseded: positive labels make On consistently mean public.
- Separate Last played and Recent Plays controls - Rejected: one Play activity control prevents contradictory partial visibility.
- Manually editable Discord name - Rejected: Discord owns its identity data.
- Disconnect Discord - Rejected: it is the sole login method.
- Discord refresh changing NosLog profile choices - Rejected: refresh only remote identity fields.
- Deletion grace period - Rejected: deletion is immediate after strong informed confirmation.
- Deletion reason survey - Rejected: it adds friction unrelated to safety.
- Raw database table inventory in deletion dialog - Rejected: concise user-centered groups and reliable counts communicate consequence better.

- Raw account-data export in 2.0 - Rejected: no verified immediate requirement; future portability is a separate researched capability.
- Treating profile-card Share as data export - Rejected: social presentation and machine-readable backup have different users, content, and risk.

Decision Log

ID	Decision	Status
SET-01	Use one public locale-prefixed <code>/[[locale]]/settings</code> destination for guests and authenticated users	Approved
SET-02	Preserve selected category in direct URL and browser history; exact syntax remains implementation mapping	Approved
SET-03	Use Experience, Profile, Privacy, Connections, and Account in that order	Approved
SET-04	Guests see usable Experience plus a compact sign-in note, not disabled account controls	Approved
SET-05	Compact layouts use overview-to-category navigation; wide layouts use persistent list-detail	Approved
SET-06	Language is immediate, locale-prefixed, account-owned when signed in, and browser-owned as guest	Approved
SET-07	Direct locale URLs render that locale without overwriting a stored explicit preference	Approved
SET-08	Theme offers System, Dark, and Light and remains device-local	Approved
SET-09	New users default to System; migrate existing explicit dark/light choices	Approved
SET-10	Earlier direction added an immediate localized/reading-title visibility preference	Superseded
SET-11	Profile and Privacy each use an explicit category Save with dirty protection	Approved
SET-12	Save remains in category and offers a separate View my profile action	Approved
SET-13	Avatar supports JPG/PNG/WebP up to 4 MB, staged 1:1 crop, circular preview, change, and remove	Approved
SET-14	Failed avatar save preserves the existing public avatar	Approved
SET-15	NosLog nickname is separate from NOSTALGIA official player name	Approved
SET-16	Nickname supports approved Unicode scripts and punctuation, display preservation, and normalized uniqueness	Approved
SET-17	Keep numeric profile URLs canonical across nickname changes	Approved
SET-18	NOSTALGIA official player name stays synced, uppercase, read-only, and privacy-controlled	Approved
SET-19	Country/region means main play and regional-ranking region, independent from language	Approved
SET-20	Country change uses a short consequence confirmation without proof or long cooldown	Approved
SET-21	Preferred arcade uses searchable single-select, Clear, discovery link, and unavailable-value retention	Approved
SET-22	Settings venue edits are staged; arcade-detail contextual set action may be immediate	Approved
SET-23	Use five positive privacy controls; On always means public	Approved
SET-24	One Play activity control owns Last played and Recent Plays	Approved
SET-25	Discord identity is read-only and refreshed through OAuth without overwriting NosLog profile fields	Approved
SET-26	Change login account is a separate confirmed sensitive OAuth action	Approved
SET-27	Do not expose Disconnect while Discord is the sole login method	Approved
SET-28	Logout preserves device-local and guest browser preferences	Approved
SET-29	Keep Privacy globally in the footer while allowing contextual deletion access	Approved
SET-30	Account deletion is immediate, permanent, and preceded by grouped consequences and reliable counts	Approved
SET-31	Require recent Discord reauthentication and an exact localized phrase before deletion	Approved
SET-32	Deletion processing prevents duplicates/dismissal and reports partial failure truthfully	Approved
SET-33	Complete deletion clears session and sensitive cache, returns to localized Home, and does not restore later	Approved
SET-34	Discord and official NOSTALGIA accounts remain unaffected by NosLog deletion	Approved
SET-35	Exclude raw account-data export from NosLog 2.0 Settings	Rejected
SET-36	Keep profile-card Share separate as a social profile feature, never relabel it as export	Approved
SET-37	Future raw export, if justified, requires its own product, privacy, and operational brief	Approved
SET-38	Remove the localized/reading-title preference; original titles are persistent and translation disclosure belongs only to Music Detail	Approved

Handoff Boundary

Claude Design must preserve the approved categories, order, authentication scope, immediate versus explicit-save boundaries, profile concepts, positive privacy meaning, Discord constraints, and deletion safeguards. It may determine final typography, spacing, component styling, and content-driven transition within the future approved Foundation. It must not turn Settings back into one long form, expose account controls to guests as disabled clutter, make NOSTALGIA identity editable, add Discord disconnect, weaken deletion verification, or present profile-card Share as a backup.

The future Codex implementation session must reconcile schema, migration, OAuth, storage, route, and test implications before coding. If an implementation limitation would merge persistence boundaries, lose existing preferences, make deletion non-idempotent, or prevent the approved multilingual responsive behavior, report the conflict and obtain a guide revision instead of silently weakening this contract.

NosLog 2.0 Authentication and Onboarding Page Brief

docs/design/17-authentication-onboarding-page-brief.md

Document Control

- Status: Approved
- Decision status: `Complete authentication and onboarding contract approved:

one Discord OAuth entry; public browsing without authentication; destination-aware safe return; concise data disclosure; minimal nickname and country/region onboarding; visible Discord account confirmation; incomplete-profile gating; explicit logout-and-browse escape; accessible error recovery; responsive authentication shell; and Korean, Japanese, and English parity`

- Evidence status: `Repository, schema, tests, current-interface, and browser

inspection at 320, 390, and 1280 CSS px; approved information-architecture, shared-shell, settings, and profile contracts; more than twenty cited accessibility, security, design-system, production-service, and rhythm-game references; and the user-approved decision record`

- Date started: 2026-08-03
- Last decision update: 2026-08-04
- Language: English
- Parent information architecture:

[02-information-architecture.md](#)

- Shared-shell contract:

[15-shared-shell-navigation-brief.md](#)

- Settings and account contract:

[16-settings-account-page-brief.md](#)

- Privacy and data-practices contract:

[18-privacy-data-practices-page-brief.md](#)

- Profile contract: [09-profile-page-brief.md](#)
- Scope: signed-out Login, Discord OAuth entry and callback recovery, initial profile

completion, incomplete-profile gating, safe destination return, authentication shell content, responsive behavior, accessibility, localization, states, data boundaries, and future implementation acceptance

- Excluded: final visual styling, exact Foundation tokens and dimensions, final

localized copy, another login provider, password authentication or recovery, administrator authentication redesign, legal advice, production OAuth implementation, database migration, and high-fidelity page design

Decision Labels

- Observed: Verified in the repository, current browser evidence, an approved upstream artifact, or a cited source.
- Approved: Explicitly agreed with the user and authoritative for downstream design.

- Proposed: Evidence-based direction awaiting user approval.
- Open: Requires further research, testing, or a user decision.
- Rejected: Considered and explicitly not selected.
- Superseded: Replaced by a later approved direction.

This brief is authoritative for the authentication and onboarding product meaning, information order, transitions, permissions, recovery, responsive adaptation, accessibility, and acceptance criteria. Claude Design may define final visual composition within the later approved Foundation, but it must not add login methods, split Login and registration, collect additional onboarding data, change the incomplete-profile gate, or remove the approved public-browsing escape.

Purpose

Authentication lets a visitor deliberately connect one Discord identity to NosLog without obscuring what data is used or blocking public exploration. Onboarding creates the minimum complete NosLog identity required for personal records, rankings, regional context, and public profile behavior.

The family must answer six questions:

1. Why is authentication needed for the action the user just selected?
2. Which external identity and minimum data will NosLog use?
3. Can the user continue exploring public content without authentication?
4. Which two NosLog profile values must a new user provide?
5. What happens if authentication, onboarding, or the session fails?
6. Where does the user return after successful completion or intentional exit?

Primary Context and Success

- Approved: Login is used from the signed-out header and whenever an account-only action requires authentication.

- Approved: Public music, charts, rankings, tiers, announcements, arcades, and other approved public information remain explorable without a NosLog account.

- Approved: A signed-out visitor succeeds when they can understand the single Discord action, the data boundary, the destination after completion, and the public-browsing alternative.

- Approved: A new authenticated user succeeds when they can confirm the Discord account, create a NosLog nickname, select a country/region, and reach the original safe destination without an extra celebration or configuration step.

- Approved: An incomplete account is never left in an ambiguous partially usable personalized state. It completes onboarding or explicitly logs out and returns to public Home.

- Approved: A returning complete account bypasses onboarding and returns directly to the safe requested destination, or localized Home when none exists.

- Approved: Korean, Japanese, and English preserve identical meaning, action priority, error recovery, and data disclosure.

Current-Product Evidence

Repository and Data Evidence

- Observed: Discord OAuth is the sole login method. The authorization request uses the `identify` scope and the callback retrieves `Discord id`, `username`, `global_name`, and `avatar`.
- Observed: NosLog stores the stable Discord user ID as the account link. The current callback does not persist a Discord password or OAuth access token after retrieving identity.
- Observed: The current OAuth start route stores a one-time state value and an internal-looking `returnTo` value in the session. The callback consumes both before validating the response.
- Observed: A complete returning account may return to the stored destination, but a new account is sent to onboarding and current onboarding completion always sends the user to Home. The original destination is therefore lost across onboarding.
- Observed: A Discord authorization cancellation without a code currently falls into the same visible error family as an invalid or expired state.
- Observed: Login currently maps configuration, token exchange, profile retrieval, account-linking, and user lookup failures to localized messages, but some messages expose operator-oriented meaning instead of user recovery.
- Observed: The current session cookie is HTTP-only, SameSite Lax, secure in production, and configured for a fourteen-day lifetime. Exact future lifetime is a security and implementation policy, not a visual-design decision in this brief.
- Observed: An incomplete authenticated profile is currently redirected to onboarding from all ordinary user routes. A completed profile cannot reopen onboarding.
- Observed: Current onboarding asks for one NosLog username and one country/region radio choice. It does not ask for avatar, preferred arcade, data sync, privacy, tutorial, or NOSTALGIA player data.
- Observed: Current onboarding uppercases the NosLog username and derives the UI locale from country. Both behaviors conflict with the approved Settings contract: NosLog nickname preserves approved Unicode display, and country/region is independent from language.
- Observed: Current onboarding has no explicit logout or public-browsing escape, no visible confirmation of which Discord account is connected, and no preserved original destination.
- Observed: Current server validation preserves duplicate-nickname and generic failure messages, but field association, error focus, and dynamic status semantics are incomplete.

Browser Evidence

- Observed: The signed-out Login was inspected on the separate local `127.0.0.1` origin because the existing `localhost` session was already signed in. No protected content or account data was accessed through that signed-out origin.
- Observed: Korean Login at 320 CSS px had no horizontal overflow and exposed the NosLog identity, one Discord action, a Privacy link, and a browse-without-login action.
- Observed: Korean, Japanese, and English Login retained the same semantic content at 320 CSS px.
- Observed: At 1280 CSS px, the current Login remained an approximately 390px

centered column and left most wide space unused. That fixed composition is current evidence, not 2.0 authority.

- Observed: The current OAuth error message is visible, but the inspected error container had no error or live-region role.
- Observed: Signed-out onboarding redirects to Login, and a completed signed-in account visiting onboarding redirects to Home.
- Observed: A live incomplete-profile browser specimen was not available without creating or mutating a user account. The onboarding visual was therefore verified from repository evidence only. The future acceptance suite must include a seeded incomplete account.

Research Synthesis

Convergent Findings

1. Authentication entry works best when one primary action reflects the actual identity provider and secondary paths do not compete with it.
2. Login and registration should not be presented as different choices when one federated action determines whether the linked account already exists.
3. Onboarding should request only information necessary to establish a usable account; optional profile, preference, education, and synchronization tasks belong later in context.
4. A one-screen, two-field completion task does not benefit from a multi-step progress indicator.
5. Federated authentication should identify the provider, disclose the relevant data use, request the least privilege, use a durable provider ID, validate state, and return only to trusted internal destinations.
6. A user should be able to identify the external account being connected and recover from choosing the wrong account without completing the service profile.
7. Required authentication and onboarding errors need concise textual meaning, programmatic notification, preserved input, and a clear retry or exit.
8. Public exploration remains a distinct product path. An account gate should protect personal actions without falsely implying that all public NosLog value requires login.
9. Responsive authentication remains a focused task column; wide space does not justify adding marketing carousels, unrelated navigation, or a second information hierarchy.

NosLog-Specific Fit

- NosLog has exactly one authentication provider and does not manage a password. Separate “Login,” “Register,” and “Forgot password” flows would describe capabilities that do not exist.
- Discord identity establishes account ownership, while the NosLog nickname is the public service identity. Showing both during onboarding prevents wrong-account completion without merging their meanings.
- Country/region affects regional rankings and primary play context, not interface language.
- Arcade-adjacent mobile use favors a short completion task and reliable return to the chart, tier, bingo, exam, sync, or profile action that prompted authentication.

- A hard completion gate avoids partially initialized personal records and rankings.

The explicit logout-and-browse path preserves public access without requiring every personalized surface to support an incomplete account.

Approved Authentication Model

State and Transition Map

Starting state	Trigger	Required transition	Success destination	Exit or failure
Signed out	Header Login	Login → Discord OAuth	Localized Home for complete account	Retry or browse public Home
Signed out	Account-only action	Contextual Login → Discord OAuth	Original validated destination for complete account	Retry or return to the public context
Signed out, new Discord identity	Any Login entry	Login → Discord OAuth → Onboarding	Original validated destination, else localized Home	Logout and browse public Home
Signed in, profile incomplete	Any ordinary or account-dependent route	Redirect to Onboarding	Original validated destination after completion	Logout and browse public Home
Signed in, profile complete	Login or Onboarding route	Bypass auth surface	Localized Home or preserved valid destination	Not applicable
Session expired during protected task	Protected action	Contextual Login	Resume safe destination after success	Preserve safe non-sensitive context; retry or Home
OAuth cancelled or invalid	Discord callback	Login recovery state	Retry then follow original safe return	Browse public context or Home

Return-Destination Contract

- Preserve the intended destination across Login, Discord OAuth, and Onboarding.
- Accept only normalized internal user destinations that belong to the NosLog origin

and approved locale-prefixed user routing.

- Reject external URLs, protocol-relative URLs, authentication callback routes,

API/framework routes, administrator routes unless separately authorized, and any malformed or recursively gated destination.

- Store and validate the destination on the server-side flow; do not trust a client label or arbitrary query value as authorization.

- Display a localized, concise context line when the destination is meaningful, such as “After login, you will return to your profile.” Do not expose raw paths.

- If validation fails or no destination exists, use localized Home.
- On logout from incomplete onboarding, go to localized public Home rather than the protected destination, preventing an immediate login loop.

Login Contract

Information and Action Order

1. skip link to `main`;
2. NosLog identity linked to localized Home;
3. Login heading and one concise purpose line;
4. optional destination-context line when authentication was action-triggered;
5. one primary `Continue` with `Discord` action;

6. concise Discord data-use statement with an inline Privacy link;
7. secondary Browse without login text action;
8. ordinary trust footer from the minimal authentication shell.

Primary Action

- Use one Discord-branded action with localized text equivalent to “Continue with Discord.”
- Do not split Login and registration. The callback determines whether to resume an account or create an incomplete one.
- Do not add email, password, passkey, Steam, Google, X, or NOSTALGIA credentials.
- Request only Discord identify. Adding email, guild, or other scopes requires a new verified product need, privacy review, and user approval.
- After activation, expose a busy state and prevent duplicate starts without changing the action’s accessible name into an unexplained spinner.

Data and Privacy Disclosure

- Place a concise statement directly after the primary action explaining that NosLog receives the Discord identifier, display name, username, and avatar for account authentication and initial identity.
- Provide an inline localized Privacy link because the disclosure belongs to the authentication decision. Privacy remains in the ordinary footer elsewhere and does not become a header or More-panel destination.
- Do not add a separate mandatory consent checkbox unless later legal review requires distinct recorded consent. The action and adjacent disclosure must not imply access to email, guilds, messages, contacts, or the user’s Discord password.
- Never present Discord authorization as NOSTALGIA, KONAMI, or e-amusement login.

Public-Browsing Alternative

- Keep one secondary text action to leave authentication and browse public NosLog.
- From a general Login entry, it opens localized Home.
- From an action-triggered Login, it returns to the previous safe public context when available; otherwise it opens localized Home.
- The secondary action must remain visibly and programmatically distinct from the primary Discord action without becoming another filled button of equal weight.

Onboarding Contract

Purpose and Information Order

Onboarding is account completion, not a product tour or Settings substitute.

1. skip link to main;
2. NosLog identity;
3. onboarding heading and concise purpose;

4. destination reason when entry resulted from a protected destination;
5. compact connected-Discord confirmation;
6. NosLog nickname field;
7. country/region single choice;
8. one completion action;
9. Log out and browse secondary text action;
10. ordinary trust footer.

Connected Discord Confirmation

- Show the Discord avatar and display name in a compact read-only identity row.
- Label the row as the connected login account; do not present it as the editable

NosLog nickname or NOSTALGIA player name.

- Do not expose the raw Discord ID.
- The approved escape for a wrong account is Log out and browse; a future explicit

account-change flow remains governed by Settings after account completion.

- If the Discord avatar is absent or cannot load, retain the display name and an accessible fallback avatar without blocking completion.

NosLog Nickname

- Use the same nickname concept, allowed Unicode scripts and punctuation, display preservation, normalized uniqueness, and canonical numeric profile identity as the Settings contract.
- Do not force uppercase. NOSTALGIA's official player name remains a different, synchronized uppercase concept.
- Explain the field as the name shown in NosLog, not the Discord name and not the official NOSTALGIA name.
- Server validation remains authoritative. On conflict or invalid input, preserve the entered value and associate concise correction guidance with the field.
- Do not ask the user to re-enter the Discord display name.

Country or Region

- Offer Korea, Japan, and Global/Other using localized labels whose meaning remains consistent across languages.
- Explain that this choice represents the main play and regional-ranking region.
- Do not use it to change the interface language.
- The initial account language inherits the approved explicit guest preference when one exists; otherwise it follows the approved browser-locale default.
- A later change follows the Settings country/region consequence confirmation; initial onboarding selection does not need that change warning.

Explicitly Excluded Onboarding Content

- avatar upload or crop;

- preferred arcade;
- profile-visibility controls;
- data-sync installation;
- NOSTALGIA player-name entry;
- gameplay history, rating, grade, or record import;
- feature tour, slideshow, checklist, or celebration page;
- notification, newsletter, or marketing consent;
- theme control already owned by the guest device preference;
- a progress indicator for this one-screen task.

Incomplete-Profile Gate

- A newly created account enters Onboarding before any ordinary personalized destination or authenticated Home state.
 - While the authenticated profile remains incomplete, requests outside the permitted OAuth callback, Onboarding, logout, and required recovery endpoints redirect to Onboarding.
 - A direct request for personal Profile, Settings account categories, Bingo editing, Exam submission, Data Sync, or another account-dependent action follows the same redirect rule.
 - Do not show a warning modal before redirecting. The destination-aware reason is rendered inside Onboarding, immediately before the form context.
 - Example reason: “Complete your account setup to use your profile.” Final localized wording remains a content-design task.
 - After successful completion, return directly to the original validated destination.
- Do not insert another mandatory confirmation or celebration page.
- Log out and browse destroys the authenticated session, preserves approved device-local guest preferences, and opens localized public Home.
 - Logging in again with the same Discord identity resumes the incomplete Onboarding; it does not create a duplicate account.
 - A completed account visiting Onboarding is redirected away and never sees or edits profile fields through this initial-completion surface.

Form Submission and Persistence

- Nickname and country/region commit together as one explicit onboarding submission.
- Submit remains disabled only when the form is invalid or already processing; do not require an unrelated checkbox.
- Prevent duplicate submission and expose a textual or semantic busy state.
- On validation or network failure, preserve nickname, selected region, connected identity context, and safe return destination.
- Completion must be atomic from the user’s perspective: do not claim success until

the profile is complete and the authenticated session reflects that state.

- Country/region must not overwrite the active language.
- Successful completion may announce a concise one-time status at the destination,

but the status must not become an extra page or block the destination task.

Error and Recovery Contract

State	User-facing meaning	Primary recovery	Secondary recovery
Discord authorization cancelled	Login was not completed	Try Discord again	Browse public NosLog
OAuth state missing, invalid, or expired	The Login attempt expired or could not be verified	Start Login again	Browse public NosLog
Discord temporarily unavailable	NosLog could not complete Discord authentication	Retry	Browse public NosLog
Identity retrieval failed	NosLog could not confirm the Discord account	Retry	Browse public NosLog
Discord identity already connected elsewhere during a change flow	The selected identity belongs to another NosLog account	Return to existing account settings	Feedback/error report when unresolved
Server or configuration fault	Login is temporarily unavailable	Retry later	Browse public NosLog
Session expired before protected action	Login is required again	Login and return	Return to public context
Nickname conflict	The nickname is unavailable	Edit nickname and submit	None
Invalid nickname	The nickname does not meet the stated rules	Correct the identified field	None
Region missing	One region is required	Select a region	None
Onboarding save failed	Account setup was not completed	Retry with preserved input	Log out and browse
Return destination rejected	The requested destination was unsafe or unavailable	Continue to localized Home	None

- Never expose client secrets, provider responses, stack traces, raw callback parameters, database codes, or “check configuration” operator instructions.
- Distinguish user cancellation, expiry/security validation, provider failure, and service failure even when they share one visual error pattern.
- Error text identifies what happened and the next useful action without blaming the user.
- Dynamic errors and busy/completion states use appropriate live-region or status semantics. Do not over-announce every keystroke.
- When a submitted form has errors, focus a concise error summary when useful and make the first invalid control predictably reachable. Associate field errors through native labels and descriptions.

Responsive Layout Contract

Compact and Mobile

- Use one fluid task column with content-driven inline padding; do not set the application or shell to a fixed 390px width.
- Reflow through 320 CSS px without horizontal page scrolling.
- Keep identity, purpose, connected-account confirmation, form, and escape in one semantic order.

- Do not use a bottom navigation, full ordinary header, decorative side illustration, or modal onboarding.
- Long Korean, Japanese, and English error and disclosure text wraps without reducing touch-target size or obscuring the primary action.
- The form may scroll vertically on short viewports; the completion action must not cover focused fields or error text.

Wide Layout

- Retain one focused task column with a readable maximum line length and fluid outer space.
- The final Foundation may modestly widen the form compared with compact view, but it must not preserve the current approximately 390px width as a universal fixed canvas.
- Do not add a second marketing panel, testimonial carousel, feature list, or ordinary product navigation merely to fill desktop space.
- The connected identity and two fields may use available inline space only when the content remains one clear completion sequence.

Accessibility Contract

- Keep the shared-shell first-focusable skip link, one main, NosLog Home link, and ordinary trust footer.
- Use one page h1; visible labels for nickname; and fieldset/legend or an equivalent native grouping for country/region.
- The Discord action has an accessible name that identifies both the action and provider. Provider iconography is decorative when the text already names Discord.
- Do not rely on color, Discord avatar, or icon alone to communicate account, selection, busy, success, or error state.
- Associate guidance and errors with their fields. Use `aria-invalid` only when invalid and preserve an understandable error message in text.
- Busy states remain announced and prevent accidental duplicate activation.
- Authentication recovery and public-browsing actions remain keyboard reachable in logical order.
- Redirected destination context is conveyed by text, not only by a changed URL.
- Focus after redirect lands at the page heading or a concise contextual error/reason region according to the task; successful return restores a predictable page starting point without attempting to focus a missing old element.
- Meet WCAG 2.2 AA contrast, focus appearance, target size, reflow, accessible authentication, error identification, error suggestion, and status-message requirements.

Localization and Content Contract

- Provide complete Korean, Japanese, and English Login, Onboarding, disclosure, destination-context, error, busy, logout, and completion strings.
- Keep one semantic action vocabulary across languages: continue with Discord, complete account setup, log out and browse, retry, and browse without login.
- Do not translate NosLog, Discord, route identifiers, OAuth terms in implementation mapping, or the official all-capital NOSTALGIA service name into a different product identity.
- Localize region display labels but preserve stable stored values.
- Do not derive language from country/region.
- Context lines use human destination names rather than interpolated paths.
- Error copy may expand significantly in Japanese or English; no control placement may depend on Korean string length.
- Final legal wording requires privacy/legal review, but the approved product data boundary and minimum disclosure cannot be removed by copy editing.

Data and Representative Content Requirements

Design and implementation specimens must include:

1. complete returning account and new incomplete account;
2. Discord display name shorter than 8 characters and longer than 24 characters;
3. available and conflicting NosLog nicknames in Korean, Japanese, Latin, digits, and approved punctuation;
4. Korea, Japan, and Global/Other region choices in all three interface languages;
5. a direct Login with no return target;
6. a contextual Login returning to Profile and one other account-dependent page;
7. user-cancelled OAuth, expired state, provider failure, and service failure;
8. missing Discord avatar with a usable fallback;
9. onboarding validation and server failure with preserved input;
10. 320, 390, intermediate, and 1280 CSS px layouts;
11. keyboard-only completion and screen-reader error/status behavior;
12. logout-and-browse followed by a later Login that resumes the same incomplete account.

Implementation Mapping

Concern	Current source	Required 2.0 mapping
Authentication shell	@@NOSLOGTOKEN0@@	Preserve minimal identity, skip route, one main, trust footer, and fluid responsive width
Login page	@@NOSLOGTOKEN0@@	One Discord action, destination context, data disclosure, Privacy, public-browse exit, classified recovery
OAuth start	@@NOSLOGTOKEN0@@	Server-side trusted return destination, one-time state, least identify scope
OAuth callback	@@NOSLOGTOKEN0@@	Distinguish cancellation and security expiry, preserve return across new-user onboarding, retain stable Discord ID behavior
Onboarding page	@@NOSLOGTOKEN0@@	Destination reason, Discord identity row, approved two-field form, logout-and-browse
Onboarding form	@@NOSLOGTOKEN0@@	Settings nickname rules, region grouping, associated errors, busy protection, no language mutation
Onboarding action	@@NOSLOGTOKEN0@@	Atomic completion, preserved guest preferences, country-language independence, safe return
Completion route	@@NOSLOGTOKEN0@@	Return to validated destination or localized Home without extra page
Gate and locale	@@NOSLOGTOKEN0@@	Incomplete-profile gate, completed-user bypass, session-expiry return, no unsafe redirect
Session	@@NOSLOGTOKEN0@@	Preserve secure session properties; exact lifetime remains security policy
OAuth tests	@@NOSLOGTOKEN0@@	Add cancellation, invalid return, new-user preserved return, and recovery cases
Onboarding tests	@@NOSLOGTOKEN0@@	Add display-preserving nickname, language independence, identity confirmation data, logout, resume, and safe return
Localization	Current locale message catalogs	Add matched ko/ja/en destination, disclosure, state, and recovery strings

The table maps approved behavior to later work. It does not authorize production code changes in this design-guide session.

Browser Acceptance Contract

Future implementation is not accepted until the following are verified in the actual browser:

1. signed-out general Login at 320, 390, intermediate, and 1280 CSS px;
2. Korean, Japanese, and English Login with no horizontal overflow;
3. contextual Login names the destination and returns to it after a complete-account

OAuth flow;

4. a new seeded account preserves the destination through Onboarding;
5. Onboarding shows the correct Discord avatar/display name without exposing raw ID;
6. nickname and region errors preserve input and are programmatically associated;
7. country/region does not change the active UI language;
8. completion prevents duplicates, updates the session, and returns only to a validated

internal destination;

9. direct Profile access by an incomplete account redirects to Onboarding, shows the contextual reason, and returns to Profile after completion;

10. Log out and browse clears the session and opens localized public Home;
11. signing in again with the same incomplete Discord account resumes Onboarding

without duplicate-account creation;

12. OAuth cancellation, invalid/expired state, provider failure, and server failure show distinct useful recovery while public browsing remains available;
13. screen reader announces dynamic errors, busy state, and completion without duplicate or per-keystroke noise;
14. keyboard focus order follows identity, primary action/form, escape, and footer;
15. 320 CSS px reflow and 200%/400% zoom do not create two-dimensional page scrolling;
16. no Login, Onboarding, callback, or error page is indexed;
17. no Discord access token, secret, raw provider response, or unsafe return URL appears in the UI, client state, logs exposed to the browser, or navigation history.

The currently unavailable live incomplete-profile state must be covered by seeded E2E and a real browser specimen before implementation acceptance. Unit, type, lint, and build checks do not substitute for this stateful browser verification.

Reference Matrix

Source	Transferable principle	NosLog application	Limitation
Apple HIG: Onboarding	Keep onboarding focused and postpone nonessential setup	Ask only nickname and region	Native Apple guidance does not define NosLog web styling
W3C Forms Tutorial	Short forms, labels, grouping, validation, and notifications reduce abandonment	One two-field form with native semantics	Does not prescribe product hierarchy
W3C Redundant Entry	Do not ask for the same information twice in one process	Reuse Discord identity and guest preferences	Does not decide which NosLog fields are required
W3C Accessible Authentication	The whole authentication path must avoid cognitive barriers	One external provider action and understandable recovery	Provider-owned Discord UI remains outside NosLog control
W3C Error Identification	Identify the error and affected item in text	Associated nickname and region errors	Does not define final error styling
W3C Error Suggestion	Provide a correction when known	Actionable nickname and retry guidance	Security-sensitive errors may intentionally remain general
W3C Status Messages	Dynamic results, busy states, and errors need programmatic exposure	OAuth/form status semantics	Avoid making the experience overly chatty
W3C User Notifications	Preserve input, associate messages, and focus errors predictably	Onboarding recovery and error summary	Example presentation is not a NosLog visual source
GOV.UK Button	Use one clear primary action and prevent duplicate submission	One Discord CTA and one completion action	Government styling is not visual authority
GOV.UK Create a username	Ask for a custom username only when needed and explain uniqueness	NosLog public nickname with later editing	GOV.UK's character model is not NosLog's Unicode rule
Carbon Progress Indicator	Do not use progress indicators for fewer than three steps	No progress UI for one-screen onboarding	Carbon visual anatomy is not authority
Microsoft Design: Reimagining our front door	Calm, focused sign-in reduces clutter and dead ends	Restrained Login and recovery paths	Enterprise scale differs from NosLog
Primer Feature Onboarding	Context, proximity, dominance, dismissal, and return affect comprehension	Destination reason and explicit exit	Feature education is broader than account completion
Primer Getting Started	Familiar responsive patterns should remain inclusive	Native form and predictable task order	GitHub product context is different
Atlassian Empty State	Keep messages concise with the next useful action	Concise classified auth recovery	Authentication errors are not ordinary empty states
OAuth 2.0 Security BCP, RFC 9700	Validate callbacks, prevent open redirects, and use state securely	Trusted internal return and state handling	Engineering security authority, not page layout
Discord OAuth2	Scopes define provider data access	Retain only identify	Discord controls its own authorization screen
Discord User Resource	Stable ID and profile fields have distinct meanings	Durable account link plus display/avatar confirmation	Provider fields can change or be absent
GitHub OAuth best practices	Request minimal scope and store durable unique IDs	Supports Discord minimal-scope and stable-ID boundary	GitHub permissions differ from Discord
GitHub Authorizing OAuth apps	Users should understand the app and requested information	Adjacent data disclosure and Privacy link	GitHub's provider screen is not NosLog UI
Google third-party access	Provider credentials and third-party accounts remain separate; review requested data	Explain that Discord password is not shared and NosLog account is separate	Google-specific fields and controls differ
Steam Help: Sign in	Primary sign-in and visible recovery coexist without broad site navigation	Supports focused auth shell and secondary recovery	Steam uses passwords and QR, unlike NosLog
osu! Registration	Rhythm-game services define a distinct public account identity and rules	Supports explicit NosLog nickname meaning	osu! manages its own password and account creation
Osekai INEX	Public rhythm-game exploration can coexist with provider-linked account features	Keep public browsing beside Discord authentication	Osekai uses osu! identity and a different feature set
Current Login	Establishes one Discord action, Privacy, and public-browse baseline	Preserve verified feature intent while replacing fixed composition	Current hierarchy and errors are not 2.0 authority
Current Onboarding	Establishes two required fields and completion gate	Preserve minimal domain requirements	Uppercase and country-locale coupling are superseded

Evidence Convergence

- Security sources converge on least privilege, durable provider identity, state

validation, and trusted return destinations.

- Accessibility and form sources converge on short input, native semantics, associated errors, preserved values, and programmatic status.
- Production services converge on a focused sign-in task with visible recovery rather than a full product dashboard.
- Rhythm-game comparables support provider-linked account features alongside public exploration, but they do not override NosLog's Discord-only and two-field product contract.
- No credible evidence supports splitting Login and registration, collecting more onboarding fields, using a progress indicator, or treating country as language for NosLog.

Rejected and Superseded Alternatives

- Separate Login and registration controls - Rejected: one Discord flow determines whether the account exists; two controls describe a false product distinction.
- Add more identity providers - Rejected for 2.0: no verified NosLog need or account-linking contract supports another provider.
- Password reset or email recovery - Rejected: NosLog stores no password or email authentication credential.
- Make authentication mandatory for public exploration - Rejected: public discovery is an approved service path.
- **Allow an incomplete authenticated profile to use personalized surfaces - Rejected: ** it creates ambiguous identity, record, regional-ranking, and privacy states.
- Show a warning modal before redirecting an incomplete profile - Rejected: it adds a step without resolving the required form; destination context belongs in Onboarding.
- Offer no escape from incomplete Onboarding - Superseded: use explicit logout and public Home.
- Discard the original destination after Onboarding - Superseded: preserve one validated internal destination through the complete flow.
- Use an arbitrary client `returnTo` URL - Rejected: use server-validated, same-origin, approved user destinations only.
- Show raw technical OAuth errors - Rejected: classify cancellation, expiry, provider, and service recovery without secrets or operator instructions.
- **Use a mandatory consent checkbox - Rejected unless later legal review requires it: ** concise adjacent disclosure and the explicit Discord action are the approved product pattern.
- Force NosLog nickname uppercase - Superseded: preserve the approved Unicode nickname; only official NOSTALGIA player name remains uppercase.
- Derive language from country/region - Superseded: language preference and play region are independent.
- **Add avatar, preferred arcade, privacy, data sync, or tutorial to Onboarding -

Rejected:** these are optional later tasks or established Settings destinations.

- Use a progress indicator - Rejected: the approved task is one screen with two input groups.
- Fix authentication content to a 390px application width - Superseded: 390px is a representative review canvas, not a fixed width or breakpoint.
- Add a wide marketing split-screen - Rejected: wide adaptation must preserve the focused authentication task without speculative content.

Decision Log

ID	Decision	Status
AUTH-01	Keep Discord as the only NosLog 2.0 authentication provider	Approved
AUTH-02	Use one “Continue with Discord” action; do not split Login and registration	Approved
AUTH-03	Keep public browsing available without authentication	Approved
AUTH-04	Show a concise human destination context for action-triggered Login	Approved
AUTH-05	Preserve one server-validated internal destination across Login, OAuth, and Onboarding	Approved
AUTH-06	Fall back to localized Home when no safe destination exists	Approved
AUTH-07	Request only Discord identify; do not imply password, email, guild, or message access	Approved
AUTH-08	Place concise Discord data disclosure and an inline Privacy link after the primary action	Approved
AUTH-09	Do not require a separate consent checkbox unless later legal review changes the requirement	Approved
AUTH-10	Use one-screen onboarding with NosLog nickname and country/region only	Approved
AUTH-11	Show Discord avatar and display name as a compact read-only connected-account confirmation	Approved
AUTH-12	Reuse the Settings nickname rules and do not force uppercase	Approved
AUTH-13	Keep country/region independent from UI language	Approved
AUTH-14	Earlier direction inherited explicit guest language and localized-title preferences	Superseded
AUTH-15	Do not add a progress indicator, tour, or extra profile/setup fields	Approved
AUTH-16	Gate incomplete authenticated profiles through Onboarding before ordinary or personalized use	Approved
AUTH-17	Redirect direct Profile and other account-dependent access to Onboarding without a warning modal	Approved
AUTH-18	Show a concise destination-aware reason inside Onboarding	Approved
AUTH-19	Return directly to the validated destination after successful completion	Approved
AUTH-20	Provide “Log out and browse” and return to localized public Home	Approved
AUTH-21	Resume the same incomplete account on later Login; never create a duplicate	Approved
AUTH-22	Distinguish OAuth cancellation, expiry/security, provider, and service failures	Approved
AUTH-23	Preserve form input and expose associated, programmatic error and status feedback	Approved
AUTH-24	Use the minimal identity-plus-trust-footer shell without profile, More, or bottom navigation	Approved
AUTH-25	Use a fluid focused task column through 320 CSS px; do not fix the shell to 390px	Approved
AUTH-26	Keep the same semantic contract and recovery in Korean, Japanese, and English	Approved
AUTH-27	Require a seeded incomplete account in future browser and E2E acceptance	Approved
AUTH-28	Inherit only the approved explicit guest language preference into a new account; title disclosure is not a setting	Approved

Handoff Boundary

Claude Design must preserve the single Discord action, public-browse alternative, destination context, adjacent disclosure, two-field onboarding, connected-account confirmation, incomplete-profile gate, logout escape, safe return, error classification, semantic order, and responsive/accessibility contracts. It may define final typography, spacing, component styling, and content-driven width within the later approved Foundation. It must not invent another provider, a Login/register split, optional onboarding modules, a progress stepper, a warning modal before Onboarding, or a desktop marketing panel.

The future Codex implementation session must map this brief to OAuth, session, proxy, localization, database, unit, E2E, and browser behavior. If Discord platform policy, privacy/legal review, or implementation security requires a materially different scope, return flow, consent mechanism, or account state, report the conflict and obtain a guide revision before implementation.

NosLog 2.0 Privacy and Data-Practices Page Brief

docs/design/18-privacy-data-practices-page-brief.md

Document Control

- Status: Approved with release blockers
- Decision status: `Privacy experience approved: public localized policy; age-fourteen

account eligibility; layered at-a-glance disclosure plus complete policy; in-page navigation; explicit public-profile consequences; verified no-collection statements; differentiated service-provider, external-service, cookie, and device-storage disclosure; settings and email rights paths; version history; responsive long-form reading; and Korean, Japanese, and English parity. Final operator identity and legal copy remain blocked on pre-release legal review.`

- Evidence status: `Repository, schema, deletion, retention, upload, session, OAuth,

localization, external-service, and deployment inspection; live Korean, Japanese, and English browser inspection at 320, 390, and 1280 CSS px; approved Profile, Settings, Authentication, Data Sync, Shared Shell, and information-architecture contracts; more than twenty cited regulatory, accessibility, provider, and production-service references; and the user-approved decision record`

- Date started: 2026-08-03
- Last decision update: 2026-08-03
- Language: English
- Parent information architecture:

[02-information-architecture.md](#)

- Shared-shell contract:

[15-shared-shell-navigation-brief.md](#)

- Settings and account contract:

[16-settings-account-page-brief.md](#)

- Authentication and onboarding contract:

[17-authentication-onboarding-page-brief.md](#)

- Profile privacy contract: [09-profile-page-brief.md](#)
- Data Sync contract: [13-data-sync-page-brief.md](#)
- Chart viewer/editor preservation contract:

[07-chart-viewer-editor-preservation.md](#)

- Scope: public Privacy route, data-practice disclosure, public-data consequences,

retention and deletion explanation, cookies and device storage, processors and external services, international transfers, age eligibility, privacy rights and contact paths, policy history, responsive reading, accessibility, localization, implementation mapping, and release acceptance

- Excluded: legal advice, final legally operative wording, autonomous publication of

the operator's real name, final Foundation tokens and visual styling, a raw self-service account-data export, a cookie-consent platform selected without legal review, administrator privacy-operation redesign, production implementation, database or storage migration, and high-fidelity page design

Decision Labels

- Observed: Verified in the repository, browser, deployment configuration, an approved upstream artifact, or a cited source.
- Approved: Explicitly agreed with the user and authoritative for downstream design and implementation.
- Proposed: Evidence-based direction awaiting user approval.
- Open: Requires research, operational verification, legal review, or a user decision before release.
- Release blocker: May be designed as a clearly marked placeholder but must not be represented as resolved or shipped as final copy.
- Rejected: Considered and explicitly not selected.
- Superseded: Replaced by a later approved direction.

This brief governs the NosLog 2.0 privacy experience and the consistency contract between what the interface says and what the product actually processes. It is not a substitute for legal review. Claude Design may define the final visual composition inside the approved Foundation, but it must not simplify away a required disclosure, invent a data practice, imply consent where no valid consent occurred, hide a public consequence, or present a release blocker as resolved.

Purpose

The Privacy page lets a visitor or account holder understand, without reading source code, what NosLog receives, creates, stores, displays publicly, sends to service providers, keeps, deletes, and deliberately does not collect. It also provides direct ways to manage settings, delete an account, request privacy assistance, and inspect earlier policy versions.

The page must answer nine questions in this order:

1. Who operates NosLog and which service does this notice cover?
2. What does NosLog collect, from which source, and for which purpose?
3. Which profile, record, ranking, or community data can other people see?
4. Which credentials, audio, location, advertising, and tracking data does NosLog not collect under the approved product contract?
5. How long is each meaningful category retained, and what happens on deletion?
6. Which processors, infrastructure providers, identity providers, embedded services, and external content origins receive data or connection metadata?
7. Which cookies and device-local preferences exist, how long do they last, and what breaks if they are removed?
8. How can a user access, correct, restrict, hide, or delete data?
9. What changed, when did it take effect, and where can an earlier version be read?

Primary Context and Success

- Approved: Privacy is a public, locale-prefixed destination at `/[[locale]]/privacy`; no login is required.
- Approved: The ordinary-page Footer is the persistent global entry. Login,

account deletion, uploads, external integrations, and other collection contexts may add a contextual Privacy link without moving Privacy into the More panel.

- Approved: A visitor succeeds when the first screen communicates the most consequential data practices and provides direct navigation to full detail.
- Approved: An account holder succeeds when they can understand public-profile effects and reach Settings, account deletion, or the privacy email without searching another page.
- Approved: A policy reader succeeds when every statement is specific enough to compare with real product behavior, not a generic list of things NosLog merely “may” do.
- Approved: The full policy remains available and searchable on one page. The concise first layer does not replace the complete notice.
- Approved: Korean, Japanese, and English expose the same material facts, rights, limitations, effective dates, and release blockers.
- Approved: NosLog account creation and authenticated account use are limited to people aged fourteen or older. Public browsing remains available regardless of account eligibility.
- Open / release blocker: Final legally operative copy, controller/operator identity, jurisdiction-specific legal bases, complaint channels, and consent requirements must receive qualified legal review before NosLog 2.0 release.

Current-Product Evidence

Current Policy and Route

- Observed: The current public route is implemented in [@@NOSLOGTOKEN0@@](#) with complete Korean, Japanese, and English copy embedded in the page module.
- Observed: Current sections cover data and purposes, collection methods, retention, third-party provision, processors and international transfer, deletion, rights, cookies, security, contact, and changes.
- Observed: The current policy identifies the contact only as NosLog operator with an email address. The user has explicitly deferred publishing a real operator name.
- Observed: The page is public and indexable, uses the ordinary user shell, and is linked from the Footer.
- Observed: The content uses one h1, sequential h2 section headings, and h3 item headings. The language attribute changes correctly for Korean, Japanese, and English.
- Observed: There is no policy table of contents, concise practice summary, previous-version archive, separate last-updated date, or direct Settings action.

Browser Evidence

- Observed: The current page was inspected live in Korean, Japanese, and English at 320, 390, and 1280 CSS px.
- Observed: None of the nine specimens created document-level horizontal overflow.
- Observed: At 320 CSS px, measured document height was approximately 3,705px in Korean, 4,273px in Japanese, and 4,816px in English.

- Observed: At 390 CSS px, measured document height was approximately 3,255px in Korean, 3,614px in Japanese, and 4,021px in English.
- Observed: At 1280 CSS px, the ordinary main content remained a centered 390px column. Korean was approximately 3,232px high and English approximately 3,931px high, leaving most wide space unused.
- Observed: The current mobile header still fits at 320 CSS px, but the long page requires repeated scrolling with no overview or section navigation.
- Observed: Heading order, Skip link, email link, localized Home link, and Footer links provide a useful semantic baseline that should be preserved.

Account and Identity Data

- Observed: Discord OAuth requests only `identify`. It retrieves Discord ID, username, global display name, and avatar and does not request email, guild, message, or connection scopes.
- Observed: The callback uses a short-lived Discord access token to retrieve the identity and does not persist the access token or Discord password.
- Observed: The account stores a durable Discord identifier and display fields, NosLog username, NOSTALGIA player name, avatar reference, country/region, locale, localized-title preference, preferred arcade, public-visibility flags, role, official game metrics, and synchronization metadata.
- Approved migration: The localized-title preference is a current-schema field to remove or retire for 2.0; it is not an ongoing user preference in the approved Settings contract.
- Observed: The approved Profile contract makes NosLog username, avatar, country-category identity, exams, competitive metrics, ranks, progress, Best Plays, rank distribution, and judgement summary public when data exists.
- Observed: The approved Profile contract adds five explicit user-controlled disclosures: NOSTALGIA player name, Discord identity, preferred arcade, Play count, and grouped Play activity covering both Last played and Recent Plays.
- Observed: The current schema supports only three of those five controls; preferred-arcade and Play-activity visibility require 2.0 implementation work.

NOSTALGIA Records and Product Activity

- Observed: The bookmarklet runs on the official `p.eagate.573.jp` page, uses the user's existing official-site browser session to request player, recent-play, and full-record responses, and sends the returned record payload plus a signed NosLog sync token to NosLog.
- Observed: NosLog does not receive the user's BEMANI password or official-site session cookie.
- Observed: Stored game data includes profile totals, modes and grades, detailed best records, score, rank, combo, judgement counts, timing values, note-type rates, play count, full-combo and Pianist counts, recent play events, record snapshots, sync attempts, and timestamps.
- Observed: The approved Profile contract retains complete meaningful history without an arbitrary thirty-item cap and avoids duplicate events or identical snapshots.
- Observed: User-created or user-linked product activity can also include Bingo

progress, exam submissions and achievements, chart evaluations and reactions, feedback reports, profile-card sharing, and future approved tier voting.

- Observed: Tier voting is an approved future capability but does not yet have a production schema. The policy and collection notice must be updated before that feature collects votes.

Uploads, Retention, and Deletion

- Observed: Avatars use public Vercel Blob storage. Anyone with the URL can request a public Blob; Profile and Share artifacts may display the selected avatar.
- Observed: Exam evidence and feedback attachments use a separate private Vercel Blob store and are delivered only through an authorization-checked server path.
- Observed: Images are limited to JPEG, PNG, or WebP and 4MB; upload-token grants are rate-limited by user and purpose.
- Observed: Resolved feedback records and attachments are deleted six months after resolution.
- Observed: Approved exam evidence and reviewer notes are redacted six months after review while the approved achievement remains until account deletion.
- Observed: Rejected exam submissions and evidence are deleted six months after review.
- Observed: The retention Cron runs daily. Cleanup is batched and failures are counted and logged for later operational attention.
- Observed: Account deletion first attempts to remove known avatar, feedback, and exam Blobs, then deletes the User row and cascade-linked data, and finally destroys the session. A Blob failure prevents the active account row from being deleted so the system does not knowingly lose the file reference.
- Observed: Client flows try to discard canceled feedback and exam uploads, and replace old avatars after a successful save.
- Open / release blocker: A directly uploaded file can be abandoned before its URL is attached to a database record. A storage lifecycle or explicit orphan-upload cleanup guarantee is not currently demonstrated for every path.
- Open / release blocker: Current wording promises immediate permanent deletion without documenting managed-database point-in-time history, backups, CDN copies, or provider deletion windows. Exact active-system and backup expiration behavior must be verified before final wording.

Cookies, Device Storage, Logs, and External Services

- Observed: `user_session_cookie` is essential, HTTP-only, SameSite Lax, Secure in production, and configured for up to fourteen days.
- Observed: `noslog-locale` is a non-HTTP-only language-preference cookie configured for one year. It is not disclosed in the current policy.
- Observed: Theme, chart-viewer metronome volume, and Strict Performance preference use browser local storage. These values remain on the device and are not account profile fields.
- Observed: Chart-editor piano visibility also uses local storage. This is current product privacy inventory only and does not authorize viewer/editor design work.

- Observed: The current codebase has no product analytics, advertising SDK, tracking pixel, or marketing profile dependency.
- Observed: The deployment uses Vercel Functions in `sin1`, and the configured Neon host resolves to `AWS ap-southeast-1` in Singapore.
- Observed: The current policy says both Blob stores are in `Seoul icn1`; the repository cannot independently verify the Blob dashboard setting.
- Observed: Kakao Maps loads its JavaScript SDK only on map experiences. X's official widget loads on Home with `data-dnt=true`. Discord OAuth, Discord avatar delivery, official NOSTALGIA assets and record pages, and external links can also transmit ordinary connection metadata to their respective operators.
- Open / release blocker: Exact Vercel log fields and retention, Neon history and backup retention, Blob regions and deletion lifecycle, subprocessor lists, and the legal classification of each external service require release-environment verification.
- Open / release blocker: Legal review must determine whether X, Kakao, or another nonessential third-party embed requires prior consent, a just-in-time notice, or a user-initiated load in any supported jurisdiction. This brief does not silently add or waive a consent gate.

Research Synthesis

Convergent Findings

1. A privacy notice must describe actual categories, purposes, retention, recipients, rights, automated collection, and contact routes rather than provide a generic disclaimer.
2. Required and optional processing, consent-based and non-consent processing, direct collection and external-source collection, and processor and third-party roles should remain distinguishable.
3. Key information should be available at or before collection and linked from stable service locations. A single footer link is necessary but contextual collection links remain useful.
4. A layered notice improves comprehension when the short layer identifies the operator, principal data categories, purposes, public consequences, and control routes while the complete policy remains accessible.
5. Long content benefits from descriptive headings and in-page navigation. Full legal meaning should not be hidden behind a large stack of closed accordions.
6. Data minimization, purpose limitation, precise retention, deletion, and truthful “we do not collect” statements are trust and engineering requirements, not only copywriting choices.
7. International services require specific, maintained disclosure. Static vendor claims become misleading when regions, subprocessors, or retention defaults change.
8. Public game records and rankings need an explicit public-consequence explanation. A public profile cannot rely on the user inferring visibility from the interface.
9. The account-rights path should combine direct self-service controls with a human contact route for requests the product cannot complete automatically.
10. Policy versions and effective dates help users and reviewers determine which data promise applied at a given time.

11. Multilingual translations must preserve legal meaning, not merely approximate the visual length of the source language.

12. Under-fourteen account access is not safe to introduce without a complete guardian consent and verification system. Restricting accounts to fourteen and older avoids inventing an unimplemented legal process while preserving public browsing.

NosLog-Specific Conclusion

- Approved: Preserve the current full policy categories, but reorganize them around real product data and public consequences.
- Approved: Add one concise at-a-glance layer and in-page navigation; do not replace the policy with a summary.
- Approved: Treat Privacy as a living product contract synchronized with the schema, infrastructure, and approved page briefs.
- Approved: Explicitly disclose account data, NOSTALGIA record data, public profile/ranking consequences, submissions, community activity, service operations, cookies, and device-only preferences.
- Approved: Explicitly state verified non-collection boundaries and require the policy to change before those boundaries change in code.
- Approved: Maintain a versioned archive and separate Last updated from Effective.
- Approved: Keep Settings and email as the rights paths; do not add a raw data export button to 2.0 merely because some larger services provide one.
- Approved: Do not publish the operator's real name without a later explicit user decision and legal review. Keep it as a release blocker rather than filling a fake person or silently treating NosLog operator as legally sufficient.

Approved Scope and Invariants

Public Route and Entry Points

- Keep `/[locale]/privacy` stable for Korean, Japanese, and English.
- Keep the ordinary-page Footer link in every authentication state.
- Login places a contextual Privacy link beside the concise Discord disclosure.
- Account deletion places a contextual Privacy link near the destructive consequence explanation.
- Feedback, exam proof, avatar, Data Sync, profile visibility, and external-map or embed contexts may use concise just-in-time copy that links to the relevant policy heading.
- Do not duplicate Privacy as a More-panel destination.
- Do not require acceptance of an unchanged policy merely to browse public content.
- Whether account creation needs an explicit consent control is a legal-review outcome, not a visual assumption.

Age Eligibility

- Public NosLog information remains browseable without an account.
- A person must be at least fourteen years old to create or use a NosLog account.
- Login and account creation communicate the age requirement before completing the account action.
- Do not collect date of birth merely to decorate a Profile or personalize content.
- The implementation may use a concise age confirmation only if legal review approves that mechanism as sufficient. This brief does not invent identity-document or guardian-data collection.
- If a future product decision admits users under fourteen, it requires a new approved guardian-consent, verification, withdrawal, retention, and privacy-copy contract before implementation.

Verified Non-Collection Statements

The at-a-glance layer and complete policy may state the following while the verified product behavior remains unchanged:

- NosLog does not receive or store a Discord password.
- NosLog does not persist the Discord OAuth access token used to retrieve basic identity.
- NosLog does not request Discord email, guild, message, or connection scopes.
- NosLog does not receive or store the user's BEMANI password or official-site session cookie.
- Local MP3 or other audio selected for the chart editor/viewer remains in the browser and is not uploaded to the NosLog server or database.
- NosLog does not request precise device geolocation.
- NosLog does not use advertising, behavioral analytics, or marketing-tracking tools.
- NosLog does not sell personal information or provide it for third-party advertising.
- NosLog does not collect payment-card information.

Each statement is a product invariant. If later implementation proposes a conflicting practice, update and approve the guide, just-in-time notice, policy, and legal basis before collection begins. Do not leave a false reassurance live during a staged rollout.

Information Hierarchy

Use this source order:

1. page identity, Last updated, and Effective date;
2. concise at-a-glance disclosure;
3. page contents navigation;
4. operator, scope, and account-age eligibility;
5. data categories, sources, purposes, required/optional meaning, and legal basis;
6. public display and user-controlled visibility;
7. retention, deletion, backups, and orphan cleanup;
8. processors, transfers, independent external services, and external content;
9. cookies and device-local storage;

10. privacy rights and control routes;
11. security practices and breach/contact information;
12. policy changes, history, and earlier versions.

The final legally reviewed policy may split or rename a section to meet applicable law, but it must preserve this user-facing question order and all verified product facts.

At-a-Glance Contract

Purpose

The first layer is a concise orientation, not an icon-only legal summary and not a consent banner. It should be understandable without expanding anything.

Required Content

Use four compact groups:

1. What NosLog uses: Discord basic identity, NosLog Profile settings, NOSTALGIA records deliberately synchronized by the user, submissions and community activity, and essential service logs.
2. What becomes public: the approved public Profile, records, rankings, evaluations, and the five user-controlled identity/activity groups.
3. What NosLog does not collect: credentials, local audio, precise location, advertising/behavioral analytics, payment data, and sale for advertising.
4. Your controls: Settings, visibility controls, account deletion, privacy email, and policy history.

Presentation Rules

- Plain text carries the meaning; icons may support but never replace labels.
- Do not place a green “safe” badge over unresolved or nuanced practices.
- Do not use absolute security claims such as 100% secure.
- Link each group to the matching full section.
- A short note identifies that detailed provider, transfer, and retention information follows.
- The first layer must remain concise in all three languages and may reflow vertically.

Full Policy Content Contract

1. Operator, Scope, and Eligibility

- Identify NosLog as an unofficial NOSTALGIA records, rankings, archive, chart-editor, and chart-viewer service unaffiliated with KONAMI.
- Define which website, localized routes, account features, APIs, and user submissions the policy covers.
- State the fourteen-and-older account rule and public-browsing alternative.
- Distinguish the service operator from Discord, KONAMI/BEMANI, Vercel, Neon, Kakao,

and X.

- Show the privacy contact email.
- Release blocker: final controller/operator name or approved service-department

identity and any legally required address, telephone, officer, complaint body, or representative cannot be finalized without legal review and explicit user approval.

2. Data Categories, Sources, Purposes, and Basis

For every category, disclose:

- specific or meaningfully grouped fields;
- whether the source is Discord, direct user input, a deliberate BEMANI bookmarklet sync, product use, administrator review, or automatic infrastructure operation;
- purpose;
- whether the data is necessary for the requested account/feature or optional;
- retention rule or a direct link to its retention row;
- whether it can be public;
- the legally reviewed processing basis.

Avoid one undifferentiated “service improvement” purpose. NosLog does not currently use personal activity for advertising or broad behavioral analytics, and the policy must not reserve that practice speculatively.

3. Public Data and Visibility

- Explain that NosLog is partly a public records and comparison service.
- Enumerate always-public and user-controlled Profile groups according to the approved

Profile brief.

- Explain that rankings, tier-related voting, chart evaluations, and reactions may

associate a contribution with the user’s public NosLog identity where that feature’s approved contract requires it.

- Explain that public avatars are stored in a public Blob and may appear in Profile,

Rankings, comments, or generated Share artifacts.

- Explain that hiding a field removes it from subsequent public payloads and Share

artifacts; it does not delete the underlying account field.

- Generated Profile cards include only the approved public identity and selected-mode

summary plus visible NOSTALGIA name, Play count, and preferred arcade name. They omit hidden fields, Discord, play activity, NOS, sync metadata, and arcade details.

- Hidden fields are omitted from visitors rather than displayed as a Private

placeholder.

- Visibility choices must be presented before a field is first made public and remain

changeable in Settings.

4. Retention and Deletion

- Use a scannable category/purpose/retention table or an accessible reflowing

equivalent.

- Distinguish active account data, immutable or accumulated record history, public

community data, private submissions, temporary upload controls, session cookies, language cookies, local-device preferences, provider logs, backups, and abandoned uploads.

- Preserve the approved six-month feedback and exam rules.
- Explain account deletion as deletion from active NosLog systems and linked known uploads, subject to verified backup/provider expiration and any narrowly applicable legal retention.
- Do not say `immediate` and `permanently unrecoverable` everywhere until backup, CDN, and provider behavior is verified and legally reviewed.
- State whether open feedback or pending exam evidence remains until resolution/review plus the approved period, or until account deletion.
- State that meaningful record history remains until account deletion; the UI's five-item preview is not a retention limit.
- Give an exact operational-log retention or an honest, legally valid determination rule before release.

5. Processors and International Transfers

- Use a maintained record for each processor containing legal entity, function, categories transferred, purpose, country/region, timing and method, retention or determination rule, and relevant privacy/DPA link.
- At minimum, verify Vercel hosting/functions, public and private Vercel Blob, and Neon database processing against the production environment.
- Do not treat a deployment code such as `sin1` or `icn1` as a permanent legal fact without a human-readable country and current dashboard evidence.
- Recheck provider subprocessors and regional configuration at every release that changes infrastructure.
- Distinguish processing on behalf of NosLog from an independent service's own processing. Final classifications require legal review.

6. Independent External Services and Content

- Explain Discord OAuth and identity retrieval, including the minimal `identify` scope and Discord's own policy.
- Explain the user-initiated `pageate` bookmarklet path and that KONAMI/BEMANI processes the official-site session under its own terms.
- Explain Kakao Maps connection metadata when a map is loaded.
- Explain the official X widget and X's processing when the widget is loaded, even with the available Do Not Track option enabled.
- Identify material direct remote-media origins when a user's browser contacts them.
- Provide provider-policy links with clear names; do not imply that an external link makes NosLog responsible for or affiliated with that provider.
- If legal review requires consent or user-initiated loading for a nonessential embed, the final design must include that approved gate before the request occurs.

7. Cookies and Device-Local Storage

At minimum, distinguish:

Technology	Current purpose	Current duration / clearing behavior	Effect of blocking
user_session_cookie	Essential authenticated session and OAuth state	Up to 14 days under the current security configuration	Login and account features fail
noslog-locale	Signed-out and route language preference	Up to 1 year	Language falls back to route, account, or browser resolution
noslog-theme	Device-local theme preference	Until changed or browser storage is cleared	Default theme is used
Metronome volume	Device-local chart-viewer/editor audio preference	Until changed or browser storage is cleared	Default volume is used
Strict Performance	Device-local chart-viewer performance interpretation	Until changed or browser storage is cleared	Default viewer behavior is used

- Do not call all device storage a cookie.
- Explain that local-storage values are not synchronized to the NosLog account under the approved contract.

- Do not show a cookie banner solely because essential and preference storage exists.

Legal review determines whether third-party embeds create a separate consent need.

- Provide practical browser-clearing guidance or link to maintained browser guidance without turning the policy into a browser manual.

8. Rights and Controls

- Direct self-service controls include Profile/Settings editing, five visibility groups, language preference, Logout, and permanent account deletion.
- Email remains the human path for access, correction, deletion, restriction, or other legally applicable requests that the product cannot complete automatically.
- Do not promise a one-click raw data export in 2.0. Legal access requests may still be fulfilled manually in a commonly usable form after identity verification.
- Explain necessary identity verification without requesting unrelated credentials or a Discord password.
- State expected response timing only after legal review establishes the correct obligation and operational ability.
- Link account deletion directly to the approved destructive flow when signed in; signed-out readers receive Login with a safe return.
- Explain that deleting the account removes the NosLog account and stored NosLog data; it does not delete the person's Discord or KONAMI account.

9. Security and Incident Information

- Describe measures at an understandable category level: encrypted transport, HTTP-only session, authorization checks, private evidence storage, format and size validation, rate limiting, least-privilege operator access, retention cleanup, and dependency/infrastructure practices actually in use.
- Do not publish secrets, exact attack surfaces, or unsupported certification claims.
- Do not equate private Blob access with immunity from breach.
- Provide the privacy/security contact path and, after legal review, any required

authority or complaint routes.

- A material incident-notification promise must match the incident-response process;

do not improvise it in visual copy.

10. Changes and Version History

- Show `Last updated` and `Effective` as separate labeled dates.
- Maintain previous policy versions with stable, locale-aware URLs or equivalent

versioned artifacts.

- The current page links to a chronological history that identifies version, effective date, and a concise change summary.

- Significant changes are announced through NosLog service announcements before they take effect when practicable. Do not promise email notification because NosLog does not collect account email.

- A typo-only translation correction may update `Last updated` without implying a new data practice; material changes receive a new effective version.

- Archived versions are read-only and clearly marked as superseded.

Interaction and Navigation Contract

In-Page Navigation

- Generate or author a descriptive link for every top-level full-policy section.
- Compact layouts present one concise `On this page` disclosure near the top. It may collapse its link list, but it does not collapse the policy sections themselves.
- Wide layouts may use a persistent side navigation when the content column has enough room. Sticky behavior must not obscure the Header, focused target, or section heading.
- Active-section indication supplements but never replaces the section labels.
- Anchor navigation updates Focus or reading context accessibly and respects reduced motion.
- Each heading receives a stable localized or language-neutral anchor contract that does not break contextual links whenever copy is edited.

Actions and Links

- Primary utility actions are `Open Settings` for a signed-in user and `'Privacy contact'` for every user; neither visually outranks the policy itself.
- `Delete account` is a contextual link into Settings, not a destructive button on the Privacy page.
- External provider policies open with clear destination names and ordinary external-link treatment.
- `Previous versions` remains an internal destination.
- Do not retain a redundant full-width `Back to Home` action when the ordinary Header

and Footer provide Home. A compact context-preserving Back link may be used only if the final shared-shell pattern requires it consistently.

Responsive Layout Contract

Compact Layouts

- Validate first at representative 390px and through 320 CSS px.
- Use one content column with page identity, at-a-glance groups, compact contents disclosure, and all policy sections in source order.
- Cards, tables, provider details, dates, email addresses, URLs, and long Korean, Japanese, or English terms wrap without document-level horizontal scrolling.
- A wide legal table must recompose into labeled rows or description groups rather than force routine two-dimensional scrolling.
- The full text remains selectable, searchable, zoomable, and printable.

Wide Layouts

- Do not retain the current fixed 390px desktop column.
- Use a comfortable long-form reading measure for policy prose and a separate contents column only when both can fit without compressing the prose.
- Use wide space for navigation, retention/provider comparison, and scanning-not for decorative empty panels or marketing content.
- Exact container width, column proportions, gaps, and sticky transition remain later Foundation and Claude Design decisions, tested with English's longest content.
- Keep ordinary shared Header and Footer alignment while allowing the policy body to use an appropriate editorial container.

Print and Text Enlargement

- Print output uses a single complete content flow, visible URLs or useful link text, effective/version dates, and no sticky navigation or hidden sections.
- At 200% and 400% zoom, the page preserves content and controls without two-dimensional scrolling except for content that genuinely requires it.
- Text-spacing overrides do not clip section titles, provider names, dates, or links.

State Contract

State	Required result	Forbidden result
Current policy available	Summary, full policy, dates, contact, and history access	Summary without full text
No prior version yet	Hide or concisely explain unavailable history	Empty archive chrome or fabricated version
Archived version	Read-only full copy with version and superseded status	Controls implying it is current
Signed out	Full policy, email, public Home, and contextual Login for account controls	Blocking policy behind authentication
Signed in	Same policy plus Settings/account-control links	Different legal meaning based on login
Provider detail unavailable at build/release	Block release or show a legally reviewed truthful determination rule	Guessing a region or retention period
Localized copy not legally synchronized	Keep phase unapproved and block release for that locale	Shipping a summary or machine-only approximation
Policy rendering failure	Plain, complete fallback content or ordinary recoverable system error	Blank page or redirect to Home
External provider link failure	Policy remains readable; identify failed external destination	Hiding NosLog's own disclosure

The policy should normally be server-rendered from versioned local content and should not need a loading skeleton. Do not make essential privacy meaning depend on a client request or third-party script.

Accessibility Contract

- Use one descriptive h1, sequential section headings, and subsection headings that describe purpose rather than repeat legal numbering alone.
- Preserve the global Skip link and one main landmark.
- In-page navigation is a labeled nav; the current link uses `aria-current` or an equivalent textual state without color-only meaning.
- Anchor targets use sufficient scroll margin so the Header does not obscure them.
- Links communicate their destinations from text or programmatic context. Avoid repeated unlabeled `Learn more` links.
- Contact information uses real `mailto:` semantics while keeping the address visible as text.
- Data categories and retention relationships use semantic tables only when tabular; reflowed compact presentations preserve header associations.
- Icons, color, labels, and status chips never carry legal meaning alone.
- Focus remains visible and does not jump merely because the active contents item changes during scrolling.
- Respect reduced motion for smooth anchor scrolling and active-section transitions.
- The page meets WCAG 2.2 AA requirements relevant to Reflow, Resize Text, Text Spacing, Contrast, Headings and Labels, Focus, Link Purpose, Language of Page/Parts, and Status Messages.

Localization and Legal-Copy Contract

- Korean, Japanese, and English carry the same substantive categories, purposes, retention, public consequences, provider facts, rights, age rule, dates, and release limitations.

- Use human-reviewed legal translation before release. Machine translation may create a draft but is not final authority.
- Keep stable code identifiers such as `user_session_cookie`, `noslog-locale`, `Discord`, `NOSTALGIA`, `BEMANI`, provider names, and region codes intact where translation would create ambiguity.
- Use localized explanatory labels around `Basic`, `Recital`, `Grd`, `NosLog Rating`, and other approved domain terms.
- Provider legal names, countries, dates, and email addresses must not be localized into different facts.
- Long English provider and purpose descriptions, Japanese unbroken terms, and Korean legal compounds must be included in responsive tests.
- Open / release blocker: legal review must decide whether one language is legally controlling and how that relationship is disclosed. Do not autonomously declare the English design-document source or Korean product copy legally controlling.

Data and Content Requirements for Design Specimens

Required representative content includes:

1. a signed-out Korean visitor at 390px;
2. a signed-in Japanese user with all five optional Profile groups hidden;
3. a signed-in English user with every optional Profile group public;
4. current and archived policy versions with separate update/effective dates;
5. one provider with a long legal name, country, region, data list, transfer timing, and retention explanation;
6. one long retention row and one honest unresolved/log-determination specimen;
7. session cookie, language cookie, and local-storage preferences;
8. the complete verified no-collection group;
9. a 320px specimen with long provider URLs and no horizontal overflow;
10. 1280px wide layout with contents navigation and editorial reading measure;
11. print layout; and
12. previous-version history with at least one superseded item.

Do not use Lorem ipsum, invented provider regions, fictional legal names, or shortened English-only copy to validate the page.

Implementation Mapping

Approved requirement	Current source	Downstream change
Public localized Privacy route	@@NOSLOGTOKEN0@@	Preserve route and metadata; replace fixed single-column composition with versioned structured policy content
Footer access	@@NOSLOGTOKEN0@@	Preserve global public link and localized destination
Login contextual disclosure	@@NOSLOGTOKEN0@@ and Auth brief	Keep concise data and age context with heading-specific Privacy link
Account controls and deletion	@@NOSLOGTOKEN0@@	Preserve verified deletion ordering; align copy with active-system and backup truth
Five visibility groups	Profile and Settings briefs; @@NOSLOGTOKEN0@@	Add missing preferred-arcade and Play-activity controls and prevent public payload/cache leakage
Discord data boundary	@@NOSLOGTOKEN0@@ and @@NOSLOGTOKEN1@@	Preserve identify only and no persisted access token; expose accurate disclosure
BEMANI sync source	@@NOSLOGTOKEN0@@ , receive route, and Data Sync brief	Explain user-initiated source, payload, signed token, and credential/session-cookie exclusion
Active retention cleanup	@@NOSLOGTOKEN0@@ and @@NOSLOGTOKEN1@@	Preserve six-month rules; add operational monitoring and policy-version evidence
Public/private uploads	@@NOSLOGTOKEN0@@ and upload actions	Preserve access separation; guarantee orphan cleanup and verified provider deletion lifecycle
Cookie inventory	@@NOSLOGTOKEN0@@ , @@NOSLOGTOKEN1@@ , and @@NOSLOGTOKEN2@@	Disclose session and one-year locale cookies exactly
Device-local preferences	@@NOSLOGTOKEN0@@ , chart viewer preference hooks	Disclose theme, metronome volume, and Strict Performance without claiming server sync
External widgets and maps	@@NOSLOGTOKEN0@@ and @@NOSLOGTOKEN1@@	Add exact external-service disclosure and any legally required load gate after review
Infrastructure regions	@@NOSLOGTOKEN0@@ , Production dashboards, provider contracts	Verify human-readable countries, regions, subprocessors, logs, backups, and retention before release
Policy history	No current route	Add versioned current/history data source and locale-aware archived destinations
Tests	Existing privacy-retention, account-deletion, localization, and E2E suites	Add content-schema, data-practice consistency, versions, age disclosure, public fields, keyboard, reflow, print, and locale parity coverage

Pre-Release Privacy Blockers

ID	Required resolution	Owner/evidence	Status
PRIV-B01	Legally sufficient operator/controller identity and contact disclosure without publishing a real name before explicit user approval	User decision plus qualified Korean/international privacy review	Release blocker
PRIV-B02	Applicable legal bases, consent points, complaint channels, rights timing, and supported-jurisdiction obligations	Qualified legal review	Release blocker
PRIV-B03	Exact Vercel operational-log fields and retention	Production plan/dashboard and Vercel documentation	Release blocker
PRIV-B04	Exact Neon point-in-time history, backup, deletion, and Singapore processing facts	Production Neon project and DPA/subprocessor evidence	Release blocker
PRIV-B05	Exact public/private Blob regions, cache/deletion lifecycle, and abandoned-upload cleanup	Production Blob dashboards, lifecycle implementation, and tests	Release blocker
PRIV-B06	Current processor/subprocessor, country, transfer, and retention register	Production vendor contracts and release checklist	Release blocker
PRIV-B07	X/Kakao/other nonessential external-load consent or just-in-time notice requirement	Legal review plus network/browser evidence	Release blocker
PRIV-B08	Korean/Japanese/English legally reviewed substantive parity and any governing-language clause	Human legal translation review	Release blocker
PRIV-B09	Fourteen-and-older account disclosure and a legally adequate, non-dark-pattern eligibility mechanism	Legal review, Auth design, and E2E	Release blocker

The release may not convert a blocker to Approved merely because a placeholder has been styled or the current policy already contains a similar sentence. The former chart-contribution blocker is superseded by PRIV-33, PRIV-35, and document 07; it is not release work and must not be restored from older text.

Browser and QA Acceptance

Future implementation acceptance must verify:

1. /ko/privacy, /ja/privacy, and /en/privacy are public, indexable as intended, and share the same material section set;
2. Footer, Login disclosure, and account-deletion context open the correct localized policy or heading;
3. current version shows separate Last updated and Effective dates;
4. previous versions are stable, read-only, localized, and marked superseded;
5. at-a-glance links reach the corresponding full sections without obscured headings;
6. compact contents navigation is keyboard operable and policy sections remain fully available without expanding each one;
7. wide contents navigation has correct reading and Focus order and never covers text;
8. 320, 360, 390, intermediate, tablet, and representative desktop widths have no ordinary two-dimensional page scroll;
9. Korean, Japanese, and English long provider, retention, cookie, and contact values wrap without clipping;
10. 200%/400% zoom, text spacing, reduced motion, and keyboard-only use preserve the complete policy;
11. screen readers can navigate the heading outline, contents nav, retention relationships, external links, and contact information;
12. signed-out readers can read everything and contact the operator without Login;
13. signed-in Settings and deletion links use safe localized return behavior;
14. public-data disclosure matches the actual API, Profile, Rankings, community, and Share payloads for all five visibility controls;
15. Discord scope and persisted fields match the disclosed identity list and no access token, password, or unrequested provider field is persisted;
16. local chart audio never appears in a NosLog upload request, server log payload, or database object;
17. session and locale cookie names, durations, and failure effects match production;
18. local-storage preferences remain device-only and clearing them produces the disclosed default behavior;
19. retention tests prove feedback and exam deadlines, active account deletion, Blob handling, and orphan cleanup;
20. production evidence records current regions, processors, subprocessors, log retention, backup retention, and external embed behavior;

21. no analytics, advertising, or tracking request contradicts the approved

no-collection statements;

22. the age requirement appears before account creation and under-fourteen accounts

cannot silently complete the ordinary account flow;

23. the page remains complete when X, Kakao, Discord, or any provider policy link is

unavailable; and

24. print output includes full policy meaning, dates, contact, and version identity.

Lint, typecheck, unit tests, and build are necessary but do not substitute for network, storage, locale, public-visibility, screen-reader, print, and responsive browser verification.

Reference Matrix

Source	Transferable principle	NosLog application	Limitation
Korean PIPC: 2026 Privacy Policy Guidelines index	Use the current Korean policy-writing baseline	Release legal-copy checklist starts from current guidance	The index does not replace qualified review of NosLog facts
Korean Personal Information Protection Act	Disclose purpose, retention, provision, deletion, processors, rights, contact, automated collection, and transfer as applicable	Defines the core complete-policy inventory	Exact applicability and basis require legal review
PIPC 2025 guideline release	Distinguish required/recommended items, legal bases, accessible entry points, rights, and behavioral data	Supports Footer plus contextual links and specific data/basis rows	The 2026 guide supersedes details where changed
Japan PPC general APPI guidelines	Services outside Japan may still need to consider Japanese residents and actual data handling	Justifies Japanese legal review and equal substantive notice	Does not determine NosLog's Korean controller obligations
Japan PPC foreign-transfer guidelines	Foreign recipient, purpose, safeguards, and country information need specificity	Supports maintained provider and transfer facts	Exact applicability depends on service role and flow
European Commission: information to individuals	Identity, purposes, categories, basis, retention, recipients, transfers, rights, and sources should be clear	Supports complete structured disclosure	EU applicability is a legal-review question
European Commission: data-processing principles	Purpose limitation, minimization, accuracy, and transparency constrain collection	Supports verified no-collection and no speculative purposes	Does not define UI layout
EDPB endorsed transparency guidelines	Transparency must be concise, intelligible, accessible, and specific	Supports layered but complete policy	European guidance is not the sole governing law
ICO: methods for privacy information	A top layer can summarize identity, collection, and purpose while full detail remains available	Supports at-a-glance plus full sections	UK examples do not define Korean legal sufficiency
ICO privacy-notice checklist	Inventory actual data, purpose, future use, consequences, access, security, and non-use	Supports code-to-policy consistency audit	Checklist still needs jurisdiction-specific review
OECD Privacy Principles	Collection limitation, purpose, security, openness, participation, and accountability form a durable system	Supports privacy as an engineering lifecycle	Principles are not direct page-copy requirements
ETC Data Security	Collect only what is needed, protect it, and dispose of it securely	Supports orphan, log, and backup blockers	US enforcement scope differs
California CCPA general notices	Collection notice should identify categories, purposes, sale/ share, and retention near collection	Supports contextual just-in-time links	CCPA applicability requires legal review
WCAG 2.2	Reflow, headings, link purpose, focus, language, and text spacing apply to legal content	Sets 320px and accessible reading requirements	Does not prescribe policy wording
W3C Headings tutorial	Semantic headings communicate organization and enable navigation	Preserve and extend current heading outline	Does not define visual hierarchy tokens
USWDS In-page navigation	Lengthy pages benefit from a tested contents navigator with deliberate keyboard order	Supports compact and wide TOC behavior	Government component styling is not NosLog authority
GOV.UK Footer	Privacy and cookie information belong in a stable secondary service location	Preserves Privacy in Footer	Contextual collection links are still required
Discord OAuth2 and permissions	identify grants basic profile fields and scopes should remain minimal	Supports exact Discord disclosure	Discord controls its own authorization interface
Discord User resource	ID, username, global name, avatar, and email have distinct scope behavior	Confirms that identify does not require email	Returned optional fields may change
Discord retention guidance	Provider retention and user rights belong to the provider's policy, not an invented NosLog promise	Supports role separation and provider link	Discord's own data is not NosLog database data
Vercel Blob	Public and private stores have materially different access; region is chosen and cannot be changed	Supports avatar/evidence distinction and dashboard verification	Exact NosLog store region is deployment-specific
Vercel Data Processing Addendum	Processor, subprocessor, deletion, assistance, and cross-border terms need maintained contractual evidence	Supports vendor register	Contract interpretation needs legal review
Neon subprocessors	Infrastructure providers use their own subprocessors and update lists	Requires a maintained release register	Does not state the exact NosLog project configuration
Neon Security	Security and transfer claims should rely on provider evidence	Supports accurate high-level safeguards	Marketing/security pages do not replace DPA review
Kakao Privacy	Device, IP, cookies, and usage information may be processed by the map/service provider	Supports external-map disclosure	Exact Kakao Maps SDK flow needs network verification
GitHub General Privacy Statement	Effective date, contents navigation, categories, rights, transfers, minors, changes, and translations can coexist in one long-form policy	Supports full structured policy and history	GitHub's scale and commercial purposes do not transfer

Source	Transferable principle	NosLog application	Limitation
osu! Privacy Policy	Public scores, rankings, Profile data, account security, and game records require explicit game-domain disclosure	Supports NosLog public-record consequences	osu!'s anti-cheat and deletion rules do not transfer
Current Privacy implementation	Establishes multilingual content, useful semantic heading order, and existing retention promises	Preserve verified facts while improving structure	Fixed width, omissions, and unverified claims are not 2.0 authority
Current schema	Reveals actual identity, records, progress, submissions, evaluations, sync, and visibility fields	Prevents generic or incomplete category copy	Future approved fields require migrations and policy updates
Current retention implementation	Proves six-month feedback/exam behavior and operational failure handling	Keeps policy aligned with executable deletion logic	Does not handle every provider backup or orphan file

Evidence Convergence

- Korean, Japanese, European, OECD, and US guidance converge on actual data inventory, purpose, retention, recipients, rights, security, and accessible contact-not vague boilerplate.
- Privacy-content sources converge on layered delivery only when the full policy remains available and materially complete.
- Accessibility and design-system sources converge on headings, contents navigation, Reflow, clear link purpose, and stable Footer access for long documents.
- Provider sources confirm that scope, storage access, regions, subprocessors, logs, and retention are configuration-dependent facts that require maintenance.
- Gaming references support explicit public record and ranking consequences rather than treating gameplay data as ordinary private account settings.
- No credible source supports guessing a legal operator name, allowing under-fourteen accounts without a guardian system, claiming universal immediate deletion without backup evidence, or treating a short summary as the complete policy.

Rejected and Superseded Alternatives

- Keep only the current wall of cards - Superseded: preserve full content but add an at-a-glance layer, contents navigation, and wide editorial composition.
- Replace the full policy with icons or a short summary - Rejected: the first layer cannot carry complete legal and operational detail.
- Collapse every policy section by default - Rejected: it impairs search, scanning, printing, and complete access; only the compact contents list may collapse.
- Keep desktop fixed to 390px - Superseded: the fixed mobile column creates an unnecessarily long wide-screen document.
- Use broad may collect boilerplate - Rejected: disclose real current and approved practices and update before adding a new practice.
- Treat every external organization as the same kind of third party - Rejected: processor, identity provider, independent embed, official data source, and external content roles differ and require legal classification.
- Omit language cookie and local storage - Rejected: device persistence is part of understandable product behavior even when not synchronized to an account.

- Claim permanent deletion everywhere immediately - Rejected until verified: active deletion, provider caches, backups, and history have different lifecycles.
- **Publish a fictional operator name or infer consent to real-name publication - Rejected: ** operator identity remains a release blocker until explicit approval and legal review.
- Allow under-fourteen accounts without guardian infrastructure - Rejected: public browsing remains available, but account eligibility begins at fourteen.
- Collect date of birth for the age rule by default - Rejected: it would add new personal data without an approved necessity and verification contract.
- Promise email policy notices - Rejected: NosLog does not collect account email; use service announcements and a stable version history.
- Add a raw self-service data-export dashboard to 2.0 - Rejected: Settings and human privacy requests cover the approved need; legal access remains supportable manually.
- Hide Privacy inside More - Rejected: Footer is the stable global destination; collection contexts add direct links where needed.
- Let the policy depend on X, Kakao, or another third-party script - Rejected: the entire NosLog disclosure must render without external scripts.

Decision Log

ID	Decision	Status
PRIV-01	Keep Privacy public at every locale-prefixed /privacy route	Approved
PRIV-02	Keep Privacy in the ordinary Footer and out of More	Approved
PRIV-03	Add contextual Privacy links at Login, deletion, uploads, sync, and material collection points	Approved
PRIV-04	Use an at-a-glance first layer plus the complete policy	Approved
PRIV-05	Use in-page navigation and keep full policy sections visible	Approved
PRIV-06	Show separate Last-updated and Effective dates	Approved
PRIV-07	Maintain stable previous-version history	Approved
PRIV-08	Limit NosLog account creation/use to age fourteen and older	Approved
PRIV-09	Preserve public browsing without an account	Approved
PRIV-10	Do not add under-fourteen guardian flows without a new approved contract	Approved
PRIV-11	Explicitly disclose approved always-public and five user-controlled Profile groups	Approved
PRIV-12	Explain public Rankings, community contributions, and Share-artifact consequences	Approved
PRIV-13	State verified Discord and BEMANI credential/token exclusions	Approved
PRIV-14	State that local chart audio never reaches the server	Approved
PRIV-15	State no precise geolocation, advertising, behavioral analytics, payment data, sale, or advertising sharing	Approved
PRIV-16	Treat verified non-collection statements as product invariants that require prior policy revision to change	Approved
PRIV-17	Distinguish processor, international transfer, independent external service, and content-source roles	Approved
PRIV-18	Disclose both session and locale cookies	Approved
PRIV-19	Disclose theme, metronome-volume, and Strict-Performance device-local storage	Approved
PRIV-20	Preserve six-month feedback and exam retention rules	Approved
PRIV-21	Preserve complete meaningful record history until account deletion without equating preview count to retention	Approved
PRIV-22	Keep Settings self-service plus email-based human privacy requests	Approved
PRIV-23	Do not add a raw self-service account-data export in 2.0	Approved
PRIV-24	Use service announcements and history for policy changes, not promised account email	Approved
PRIV-25	Require semantic headings, accessible TOC, 320px Reflow, wide editorial layout, and print completeness	Approved
PRIV-26	Preserve substantive Korean/Japanese/English parity	Approved
PRIV-27	Defer real operator-name publication; do not invent or autonomously publish it	Approved
PRIV-28	Resolve legally sufficient operator/controller disclosure before release	Release blocker
PRIV-29	Resolve legal bases, consent points, rights timing, and jurisdiction details before release	Release blocker
PRIV-30	Verify logs, backups, regions, subprocessors, external embeds, and deletion lifecycles before release	Release blocker
PRIV-31	Implement and prove abandoned-upload cleanup before release	Release blocker
PRIV-32	Obtain human legal translation review and decide any governing-language clause before release	Release blocker
PRIV-33	Do not introduce a user chart-contribution privacy contract; the former feature proposal is cancelled	Superseded correction
PRIV-34	Limit Profile share artifacts to approved public-safe fields and invalidate caches after visibility changes	Approved
PRIV-35	Former user chart-contribution launch blocker	Superseded by document 07

Handoff Boundary

Claude Design must preserve the at-a-glance/full-policy relationship, section order, public-data consequences, verified non-collection statements, Settings and email control paths, age rule, version history, accessible in-page navigation, complete compact content, wide editorial adaptation, print behavior, and every visible release blocker. It may define final typography, spacing, summary treatment, table/card composition, contents-navigation appearance, sticky threshold, and external-link treatment within the later approved Foundation. It must not design away legal detail, invent consent, add tracking, publish an operator name, hide full content in accordions, or imply that a styled placeholder is legally complete.

The future Codex implementation session must run a code-to-policy data inventory, verify production vendor settings and network requests, implement policy versioning, add the missing Profile visibility controls, establish orphan and backup deletion truth, update tests, and obtain the recorded legal and translation approvals. If the legal review changes age eligibility, consent, controller identification, rights, international-transfer wording, external-embed loading, or retention, return to this guide for explicit revision before implementation or release.

NosLog 2.0 System-Recovery States Page Brief

docs/design/19-system-recovery-states-page-brief.md

Document Control

- Status: Approved
- Decision status: 'Four distinct recovery meanings approved: localized not-found

inside the ordinary shell; recoverable page errors with retry and context preservation; fatal application errors inside a minimal recovery shell; and planned maintenance with truthful optional timing, manual refresh, and HTTP 503 semantics.'

- Evidence status: 'Current repository and test inspection; live Korean, Japanese,

and English browser inspection of not-found and maintenance at 1280 CSS px; previously recorded compact not-found evidence; approved information-architecture and shared-shell contracts; more than twenty cited platform, HTTP, search, accessibility, design-system, and production-service references; and the user-approved decision record'

- Date started: 2026-08-03
- Last decision update: 2026-08-03
- Language: English
- Parent information architecture:

[02-information-architecture.md](#)

- Shared-shell contract:

[15-shared-shell-navigation-brief.md](#)

- Announcement contract:

[14-announcements-page-brief.md](#)

- Scope: unmatched routes and unavailable public resources; recoverable route errors;

fatal root errors; planned maintenance; shell ownership; copy hierarchy; actions; locale, metadata, HTTP and cache semantics; responsive behavior; accessibility; diagnostics boundaries; implementation mapping; and browser acceptance

- Excluded: page-local loading, empty, validation, permission, upload, and destructive

states already governed by their page-family briefs; final Foundation tokens and artwork; an external status service; a new support-ticket system; administrator incident tooling; production implementation; and high-fidelity page design

Decision Labels

- Observed: Verified in the repository, browser, tests, approved upstream artifact, or cited source.

- Approved: Explicitly agreed with the user and authoritative for downstream design and implementation.

- Proposed: Evidence-based direction awaiting user approval.

- Open: Requires later implementation or operational verification without changing the approved product behavior.

- Rejected: Considered and explicitly not selected.
- Superseded: Replaced by a later approved decision.

This brief governs only service-level recovery states. A downstream designer must not turn the four states into one generic error template, invent unsupported operational promises, expose technical diagnostics, or restore navigation that the application cannot reliably execute.

Purpose

System-recovery states let a visitor understand what failed, whether NosLog itself is available, and which single action is most likely to recover. They prevent dead ends without overloading users with technical detail.

The family answers four ordered questions:

1. Is the requested destination missing, or is NosLog malfunctioning?
2. Can the current page recover without leaving its context?
3. Is the application shell itself unavailable?
4. Is NosLog intentionally under maintenance, and is there a truthful expected return

time?

State Taxonomy and Success

State	Meaning	Shell	Primary success
Not found	NosLog is available, but the route or authorized public resource cannot be found	Ordinary public shell	Reach Home or another valid destination without mistaking the state for an outage
Recoverable page error	The ordinary shell works, but one route segment or request failed	Ordinary public shell	Retry successfully or leave through a safe ordinary route without losing avoidable context
Fatal global error	Root application rendering or initialization failed	Minimal system-recovery shell	Reinitialize the document or leave through a full navigation without depending on the broken shell
Planned maintenance	NosLog intentionally returns temporary unavailability	Minimal system-recovery shell	Understand the temporary state and manually check again, with truthful timing when known

- Approved: These meanings remain distinct even if their eventual visual language

shares typography, spacing, icon, or action primitives.

- Approved: A permission-sensitive resource may intentionally resolve as not found

when revealing its existence would leak private information. This brief does not add a universal 403 page.

- Approved: Component-local and task-local errors remain in their owning page brief.

They escalate to this family only when the page or application cannot continue.

Current-Product Evidence

Current Implementation

- Observed: [@@NOSLOGTOKEN0@@](#) renders localized title,

description, and Home link through the client locale provider. When reached outside the ordinary route group, it does not independently provide a main landmark, ordinary header, or footer.

- Observed: The current unmatched route inherits the generic site title rather than

a localized, descriptive not-found document title.

- Observed: [@@NOSLOGTOKEN0@@](#) records the error, writes it to

the Console, shows generic localized copy, and exposes only `reset()`.

- Observed: [@@NOSLOGTOKEN0@@](#) replaces the root

document and exposes only `reset()`. It initializes English and reads the document language after mount, so correct first-render locale is not guaranteed by the current contract.

- Observed: [@@NOSLOGTOKEN0@@](#) renders a

localized minimal page with one `main`, NosLog mark, wrench icon, heading, and description. It has no recovery action or operational timing.

- Observed: [@@NOSLOGTOKEN0@@](#) rewrites ordinary requests to Maintenance

with status 503, `Cache-Control: no-store`, and fixed `Retry-After: 3600`. APIs receive Korean-only JSON regardless of requested locale.

- Observed: Login, administrator, OAuth, metadata assets, and Maintenance itself

bypass the maintenance rewrite. This is operational behavior, not a promise that all bypass destinations belong in the user-facing maintenance page.

- Observed: [@@NOSLOGTOKEN0@@](#) verifies

the 503 rewrite, API response, fixed `Retry-After` value, and bypass paths.

- Observed: [@@NOSLOGTOKEN0@@](#)

stores a bounded in-browser diagnostic list. There is no verified external incident or support identifier that would make a user-visible reference code meaningful.

Browser Evidence

- Observed: Current Korean, Japanese, and English unmatched routes and Maintenance

were inspected at 1280 CSS px. The visible copy was localized and neither surface created document-level horizontal overflow.

- Observed: The current unmatched route had no `main`, dedicated localized page

title, or ordinary shell. The current Maintenance route had one `main`, localized no-index metadata, and no action.

- Observed: The Maintenance content remained constrained to approximately 390px

on the wide viewport. That is current evidence, not a 2.0 maximum-width rule.

- Observed: Earlier product-audit browser evidence confirmed localized not-found

behavior for an unavailable public chart in a compact viewport.

- Open implementation verification: The final 2.0 states still require deliberate

320, 390, intermediate, and 1280 CSS px tests in every locale. The 1280 audit does not substitute for compact and zoom validation.

Research Synthesis

Convergent Findings

1. HTTP and platform guidance distinguish missing resources, recoverable rendering

errors, root rendering failures, and temporary service unavailability. Their response status and recovery behavior should not be merged.

2. Government and product design systems converge on one descriptive heading, short

neutral copy, a useful next action, and no blame, jokes, or technical jargon.

3. The ordinary site structure remains useful for a genuine not-found state because

the service still works. Maintenance and fatal errors must not depend on potentially broken global navigation.

4. Retry is appropriate only when it can plausibly resolve the failure. A primary action must not pretend to fix a missing route or unavailable feature.
5. Planned maintenance may show an expected return time when it is maintained and truthful. Unknown timing must be omitted rather than guessed.
6. Descriptive titles, one main, one h1, logical focus, programmatic status feedback, keyboard access, and 320 CSS px reflow remain required even on short recovery pages.

NosLog-Specific Fit

- NosLog already has localized paths, a stable ordinary shell, a minimal recovery surface, and page/global Next.js error boundaries. The 2.0 contract can refine existing responsibilities rather than create a separate application.
- Users commonly arrive from shared music, profile, ranking, tier, Bingo, Exam, and chart links. A dedicated music-only search control on the universal 404 would be misleading for non-music failures.
- NosLog has no approved external status page and no verified user-facing incident identifier. Neither is required for an honest recovery experience.

Reference Limitations

- Government services provide strong content and accessibility patterns but are not NosLog art direction.
- Next.js defines file-convention behavior, not final copy or responsive layout.
- HTTP and search guidance define protocol meaning but not action hierarchy.
- Design-system empty states inform concise recovery content but do not turn a system failure into a normal no-data state.
- Statuspage guidance informs truthful maintenance communication; it does not justify adding an external service to NosLog.

Approved Shared Content Contract

- Use one visible h1 and no second competing title.
- Follow the heading with at most one concise explanatory paragraph in the default state. Optional maintenance timing is structured metadata, not another essay.
- Present one primary action. A secondary action is allowed only where this brief explicitly requires it.
- Use neutral, direct language. Do not blame the user, apologize repeatedly, joke, personify the failure, or use NOSTALGIA terminology as decoration.
- Do not show stack traces, exception messages, route digests, request payloads, raw database identifiers, internal paths, or a fabricated reference code.
- A decorative icon or NosLog mark may support recognition, but text carries the state meaning. Do not require a large illustration or mascot scene.
- Final typography, color, icon drawing, spacing, and action styling belong to the

approved Foundation and Claude Design. Visual treatment must preserve the hierarchy and shell contract defined here.

Approved Not-Found Contract

Meaning and Shell

- Render inside the ordinary public shell: first-focusable Skip link, Header, one page-level main, and Footer.
- Preserve ordinary Home identity, account state, More navigation, Privacy, and GitHub access. Do not create a special navigation taxonomy for 404.
- Return a real HTTP 404 for an unmatched route or missing public resource and apply no-index behavior. Do not render a successful 200 soft-404 page.

Content and Actions

1. Localized document title equivalent to `Page not found | NosLog`.
 2. Localized h1 equivalent to `Page not found`.
 3. One short sentence stating that the requested page cannot be found.
 4. One primary Home link.
- Do not add a dedicated search field, Music action, Back button, suggested links, support paragraph, or giant visible 404 number.
 - The ordinary More panel already provides broader destinations and Feedback / Error Report when the user needs them.
 - Browser Back remains available but is not duplicated as the page's primary recovery because the prior document may be absent, external, or equally invalid.

Security-Sensitive Missing Resources

- Unpublished announcements, private profiles or fields, unavailable chart revisions, and similar resources may share this not-found presentation when existence must not be disclosed.
- Copy must not distinguish `never existed`, `deleted`, `private`, or `not authorized` unless the owning product brief explicitly permits disclosure.

Approved Recoverable Page-Error Contract

Meaning and Shell

- Keep the ordinary shell when Header, navigation, locale, and page boundary remain functional.
- Keep the failed content region in the page's normal reading position. Do not replace a functioning application with the fatal-error shell.

Content and Actions

1. Localized h1 or region heading equivalent to `Could not load this page`.
2. One short sentence equivalent to `Please try again in a moment`.

3. Primary Try again button calling the page recovery boundary.
4. Secondary Home text link.
 - The ordinary More panel's Feedback / Error Report remains available.
 - Do not reveal the error digest or raw exception.
 - If only a subordinate region failed and the rest of the page remains usable, use a contextual region error governed by that page brief rather than elevating the whole page.

Retry and Context Preservation

- Disable or mark the retry action busy while one retry is in progress and prevent duplicate activation.
- Announce the meaningful retry result without moving focus unnecessarily.
- On success, restore the page at the same meaningful context where technically possible.
- Preserve entered values, selected filters, selected difficulty, scroll-relevant route state, and completed steps when the owning flow can do so safely.
- Never claim that data was saved or preserved unless the application can prove it.
- On repeated failure, keep the concise recovery state and ordinary support access; do not continuously append technical messages or automatically retry.

Approved Fatal Global-Error Contract

Meaning and Shell

- Replace the broken application with the minimal system-recovery shell.
- Render only NosLog identity, one main, one h1, concise explanation, primary retry, and secondary Home link.
- Do not render the ordinary Header, More panel, Footer, feedback Dialog, Toast stack, or page-specific navigation because their dependencies may be part of the failure.

Actions

- Primary Try again reinitializes or reloads the document through the framework's supported recovery path.
- Secondary Home uses an ordinary full-document link rather than client-only routing.
- Do not auto-reload. A repeated root crash must remain stable enough to read and act.

Locale and Root Safety

- Resolve Korean, Japanese, or English before meaningful recovery copy is painted.
- Do not initialize English and replace it after mount when another locale is known.
- The replacement `<html>` uses the correct `lang`, approved theme baseline, font fallback, viewport behavior, and sufficient standalone styling without assuming the ordinary provider tree rendered.
 - If locale cannot be recovered from the request or route, use the same documented

product fallback used by normal first entry; do not infer from an exception message.

Approved Planned-Maintenance Contract

Meaning and Shell

- Use the minimal system-recovery shell, not the ordinary Header, More panel, Footer, feedback Dialog, or a broken destination list.
- Keep a recognizable NosLog identity, one main, one h1, concise operator message, optional truthful timing, and one manual recovery action.
- Maintenance is a temporary operational state, not a NosLog announcement article.

A related public announcement may provide history, but the 503 page must remain understandable on its own.

Content Hierarchy

1. NosLog identity.
 2. Localized h1 equivalent to `Service maintenance in progress`.
 3. One short localized explanation.
 4. Optional expected end time when known.
 5. Optional last-updated time when an operator message or estimate changes.
 6. Primary `Check again` button.
- An operator message must be short, plain, and safe to show in all supported locales.
 - If the expected end is unknown, omit the field. Do not show unknown, an empty row, or a generic one-hour estimate.
 - Render an exact localized date and time with an unambiguous timezone such as KST.

A relative phrase may supplement it but cannot replace the exact value.

- Show `Last updated` only when it communicates a real public change. It is not the deployment start time by default.

Refresh and Availability Behavior

- `Check again` performs a user-initiated document refresh and exposes a busy state.
- Do not auto-refresh, poll, count down, or redirect when the estimated end passes.
- Continue returning HTTP 503 for maintained public pages and APIs.
- Send `Cache-Control: no-store` for the temporary recovery response.
- `Retry-After`, when sent, must reflect maintained operational data or a deliberately

configured retry interval. The current fixed 3600 is not a user-visible promise and must not be treated as an expected end time.

- API maintenance responses require safe locale-consistent machine-readable behavior;

Korean-only JSON is not the 2.0 multilingual contract.

- No external status page, paid API, or workaround embed is introduced by this brief.

Responsive and Layout Contract

- Design mobile first using 390px as the representative review canvas, not as a fixed content width or breakpoint.
- Reflow at 320 CSS px without page-level horizontal scrolling, clipped actions, or hidden copy.
- The ordinary not-found and recoverable-error states follow the ordinary shell's compact and wide behavior.
- Fatal and Maintenance remain visually focused at every width. Wide layouts may use a larger readable measure and intentional negative space, but must not merely freeze a 390px mobile canvas or add a second information column.
- Actions may use available inline width on wider layouts and stack when content fit requires it. Semantic order remains primary then secondary.
- Verify short viewport heights, safe areas, 200% zoom, 400% zoom, Korean wrapping, Japanese line breaking, and longer English action labels.

Accessibility Contract

- Every standalone state exposes exactly one page-level main and one visible h1.
- Not-found and recoverable states retain the ordinary first-focusable Skip link.
- On client route transition to a system state, move or restore programmatic focus to the page heading or main start according to the shared route-focus pattern. Do not leave focus on a removed trigger.
- Use native links for Home and native buttons for Retry or Check again.
- Busy state is programmatically determinable, prevents duplicate activation, and does not remove the button label.
- Announce a meaningful retry failure or success through the shared status pattern without repeatedly announcing unchanged countdown or polling content.
- Focus indicators remain visible and unobscured. Controls satisfy WCAG 2.2 target size or spacing requirements.
- State meaning never depends on icon, color, animation, or HTTP code alone.
- Respect reduced motion. These states require no decorative motion to be understood.
- Descriptive localized document titles distinguish Not found, Error, and Maintenance in browser history and assistive-technology navigation.

Localization and Content Contract

- Korean, Japanese, and English provide the same state meaning, action availability, timing facts, privacy boundary, and technical-detail omissions.
- Do not translate NosLog or code identifiers. User-visible labels use natural product language rather than literal framework terminology such as `error` boundary, `digest`, `render`, or `HTTP 503`.
- Maintenance timestamps use locale-appropriate order and numerals while retaining an

explicit timezone.

- A missing translation must not make the fatal boundary flash English and then swap.

The implementation must provide stable initial-language resolution.

- Copy examples in this brief are semantic requirements, not final translation

approval. Human review remains required during the localization and content phase.

Metadata, Search, and Protocol Contract

State	HTTP and cache	Indexing	Document title	
Not found	Real 404 for unmatched or missing public resource	noindex; do not include in sitemap	Localized 'Page not found	NosLog' equivalent
Recoverable page error	Preserve the truthful response semantics available to the boundary; never manufacture a 404	Do not create a separate indexable error URL	Localized page-error title when the boundary owns the document	
Fatal global error	Preserve framework/server failure semantics; do not turn a root failure into a successful indexable page	No indexable standalone recovery URL	Localized Could not load NosLog equivalent	
Maintenance	503, no-store, truthful optional Retry-After	noindex, nofollow, and no sitemap destination	Localized 'Service maintenance	NosLog' equivalent

- Canonical and hreflang must not imply that a missing route is a valid canonical document.

- Maintenance may keep locale-addressable rendering behavior without becoming a permanent navigable content destination.

- Social and search metadata must not reuse a Korean description for Japanese or English recovery pages.

Privacy, Diagnostics, and Support Boundary

- Client and server logging may retain safe operational detail under the later observability contract, but visible copy exposes none of it.

- Do not place tokens, request bodies, official record payloads, user-entered form content, exception messages, or private URLs in visible diagnostics or default feedback attachments.

- Do not show a reference or incident ID until an implemented support path can resolve that ID. A random-looking code without operator value is rejected.

- Feedback / Error Report remains reachable through the ordinary More panel for Not-found and recoverable errors. It is absent from fatal and Maintenance states.

- The existing feedback Dialog and private attachment handling remain governed by the shared shell and Privacy briefs. This brief does not add another submission form.

State and Edge-Case Matrix

Condition	Required result	Status
Unknown localized route	Ordinary-shell Not found, Home primary, real 404	Approved
Unpublished or privacy-sensitive resource	Same safe Not found unless owning brief permits disclosure	Approved
Page boundary fails once	Ordinary-shell page error with Try again and Home	Approved
Retry succeeds	Restore meaningful page context where possible	Approved
Retry remains unsuccessful	Keep concise state and ordinary Feedback access; no auto loop	Approved
Root/provider tree crashes	Minimal fatal shell with Try again and full-document Home	Approved
Locale known during fatal crash	Correct locale on first meaningful paint	Approved
Maintenance with expected end	Show exact localized time and timezone plus Check again	Approved
Maintenance without expected end	Omit timing row; never invent an estimate	Approved
Estimate changes	Update value and public Last updated timestamp	Approved
Estimate passes but service remains unavailable	Remain stable; no automatic redirect or false completion claim	Approved
API during maintenance	503, no-store, safe locale-consistent error contract	Approved
320 CSS px or 400% zoom	Complete reading and actions without two-dimensional page scroll	Approved
Decorative asset fails	Text and actions remain complete without layout collapse	Approved

Implementation Mapping

Responsibility	Current source	2.0 requirement
Not-found rendering	@@NOSLOGTOKEN0@@	Place in ordinary shell with one main, localized title, concise copy, Home only, real 404/noindex
Recoverable boundary	@@NOSLOGTOKEN0@@	Add secondary Home, busy/status behavior, preserve ordinary shell and safe context
Fatal boundary	@@NOSLOGTOKEN0@@	Resolve locale before paint, use standalone minimal shell, primary retry plus full-document Home
Maintenance page	@@NOSLOGTOKEN0@@	Add Check again and optional truthful expected-end/last-updated data without fixed-width authority
Maintenance routing	@@NOSLOGTOKEN0@@	Preserve 503/no-store, make Retry-After truthful, define locale-consistent API contract
Maintenance tests	@@NOSLOGTOKEN0@@	Cover locale, known/unknown estimate, exact status/cache, bypass safety, and API behavior
Client diagnostics	@@NOSLOGTOKEN0@@	Keep operational details invisible and sensitive data excluded; no unresolvable public code
Shared shell	@@NOSLOGTOKEN0@@ and shared components	Ordinary shell for Not found/recoverable; no ordinary shell for fatal/Maintenance
Metadata	@@NOSLOGTOKEN0@@ and route metadata	Provide locale-specific titles/descriptions and correct robots/canonical behavior
Localized copy	@@NOSLOGTOKEN0@@ and fatal-safe copy source	Maintain semantic parity across ko/ja/en and initial fatal-locale correctness

- This is a downstream mapping, not authorization to implement in this design-guide

session.

- Exact maintenance-data storage may be environment configuration or a small

operator-controlled source. It must support the approved truthful fields and safe fallback; the guide does not choose a database migration prematurely.

Browser and Automated Acceptance Contract

Future implementation must verify at minimum:

1. unknown routes and unavailable safe resources in Korean, Japanese, and English;
2. real 404 status, noindex, locale-specific title, one main, one h1, ordinary Header/Footer, and Home navigation;
3. recoverable failure, busy retry, duplicate-click prevention, success restoration, repeated failure, Home link, and ordinary Feedback access;
4. fatal error in every locale without English flash, provider dependency, duplicate root landmarks, client-only Home routing, or automatic reload;
5. Maintenance with known time, unknown time, changed estimate, expired estimate, and manual Check again;
6. Maintenance page and API 503, no-store, truthful Retry-After behavior, bypass paths, and locale-consistent safe API payload;
7. 320, 390, representative intermediate, and 1280 CSS px in all locales;
8. 200% and 400% zoom, short viewport height, keyboard-only operation, visible focus, target spacing, reduced motion, and no horizontal document overflow;
9. direct entry, route transition, browser Back/Forward, refresh, and shared invalid links;
10. no raw error, digest, token, payload, private route, false saved-data claim, fabricated incident code, hydration failure, or unexpected Console failure caused by the recovery interface.

Automated checks must cover response semantics, metadata, locale, landmark count, actions, retry state, and maintenance variants. Real browser inspection remains required because lint, typecheck, unit tests, and snapshots do not verify actual reflow, focus visibility, first-paint locale, or action clarity.

Reference Matrix

Source	Transferable principle	NosLog application	Limitation
Next.is Error Handling	Expected failures, route boundaries, root errors, retry, and logging have distinct responsibilities	Preserve page and global boundary distinction	Does not define NosLog copy or art direction
Next.is @@NOSLOGTOKEN0@@	Unmatched resources use the not-found convention and noindex behavior	Real shared localized 404	Framework convention does not choose shell composition
Next.is @@NOSLOGTOKEN0@@	A route can intentionally stop and render its segment's not-found UI	Safe missing-resource resolution	Does not decide permission-disclosure policy
RFC 9110	404 and 503 communicate different meanings; Retry-After may accompany 503	Truthful status and temporary-unavailability semantics	Protocol semantics do not define visual hierarchy
Google crawling error guidance	Missing resources should return 404/410 rather than soft 404	Prevent indexable successful missing pages	Search guidance does not define user actions
W3C Page Titled	Pages need descriptive titles that identify topic or purpose	Distinct localized Not found, Error, and Maintenance titles	Does not prescribe title wording
W3C Page Regions	Landmarks expose page structure	Exactly one page-level main	Does not decide ordinary versus minimal shell
W3C Headings	Headings communicate hierarchy	One visible state h1	Visual scale remains Foundation work
WCAG Focus Order	Focus follows meaning and operability	Route-state heading focus and logical action order	Does not prescribe framework focus APIs
WCAG Status Messages	Dynamic status changes can be exposed without disruptive focus movement	Retry busy/result announcement	Does not require excessive announcements
WCAG Reflow	Content remains usable at 320 CSS px-equivalent reflow	Compact recovery-state acceptance	Intrinsically two-dimensional content exceptions do not apply here
WCAG 2.2	Keyboard, contrast, focus, target size, language, and reflow apply to every state	Whole-state accessibility baseline	Does not define NosLog components
GOV.UK Page not found	Use a descriptive title, concise non-blaming explanation, and useful next step	Minimal Not-found copy and Home recovery	Government service language is not copied literally
GOV.UK Problem with the service	Unexpected failures differ from missing pages and planned maintenance	Separate recoverable/fatal meaning	Transaction-preservation examples are context-specific
GOV.UK Service unavailable	Planned unavailability may state return timing and alternatives when known	Optional truthful maintenance timing	NosLog has no approved alternative service channel
USWDS 404 template	Consistent service layout, plain explanation, and recovery actions prevent dead ends	Ordinary-shell Not found	Its optional code and support content are unnecessary here
Primer Blankslate	Heading, description, and bounded action hierarchy form a clear state	Shared concise anatomy	A generic blankslate is not an outage taxonomy
Primer Degraded Experiences	Preserve unaffected UI, avoid false data-loss implications, and offer actions that can resolve the issue	Keep ordinary shell for recoverable failure	GitHub product examples do not define NosLog content
Carbon Empty States	Plain language and actionable next steps avoid dead ends	Concise missing/unavailable communication	System failure remains distinct from empty data
Atlassian Empty State	Short scannable heading, limited body, and one clear CTA reduce overload	Supports one primary action	Does not define HTTP or fatal-shell semantics
Atlassian Statuspage Maintenance	Planned start, duration, state, and updates require maintained operational facts	Expected end and Last updated fields	Does not require adopting Statuspage
Atlassian Statuspage User Guide	Clear current state and transparent updates support trust	Truthful maintenance communication	External subscription/status features remain excluded
Current NosLog recovery code	Provides actual copy, locale, shell, and action baseline	Distinguishes evidence from 2.0 requirements	Current styling and gaps are not visual authority
Current NosLog maintenance routing	Proves 503, no-store, fixed Retry-After, API, and bypass behavior	Defines implementation risks and preserved protocol behavior	Static one-hour retry and Korean-only API are not approved 2.0 contracts

Evidence Convergence

- Platform and HTTP sources converge on four distinct meanings and truthful status.
- Government and product-system sources converge on concise, neutral, actionable

content rather than decorative or technical failure pages.

- Accessibility sources converge on descriptive titles, landmarks, headings, focus, status communication, keyboard access, and reflow.
- Maintenance sources converge on showing timing only when it is maintained and truthful.
- No credible source justifies a giant code, automatic reload loop, universal music search, broken full navigation, raw diagnostic, or invented incident ID for NosLog.

Rejected and Superseded Alternatives

- One generic error page for every failure - Rejected: it hides whether a route is missing, retryable, globally broken, or intentionally unavailable.
- Minimal shell for 404 - Rejected: NosLog remains functional and ordinary navigation provides useful recovery.
- Ordinary global navigation during fatal error or Maintenance - Rejected: it may expose destinations known to be unreliable and adds noise to a recovery task.
- Dedicated music search on 404 - Rejected: invalid NosLog links can target many non-music product families, while ordinary navigation already provides discovery.
- Visible giant 404 or technical error code - Rejected: concise semantic text and truthful HTTP status are sufficient; large codes do not improve recovery.
- Back as the primary 404 action - Rejected: prior history may be absent, external, or invalid. Home is stable and Back remains browser-native.
- Automatic retry, polling, countdown, or redirect - Rejected: it surprises users, creates load, and can enter a failure loop.
- Fixed one-hour maintenance promise - Superseded: show an actual expected end only when known; otherwise omit timing.
- External status service - Rejected: no verified need or approved integration; the 503 surface must stand alone.
- Feedback upload inside fatal or Maintenance shell - Rejected: its dependencies may be unavailable; ordinary-shell states retain the established support path.
- User-visible digest or random reference ID - Rejected: there is no implemented support lookup that makes it useful, and technical detail may expose sensitive data.
- Large illustration or humorous failure copy - Rejected: state meaning and action clarity take priority; final art may use a restrained non-semantic icon only.

Decision Log

ID	Decision	Status
RECOVERY-01	Keep Not found, recoverable page error, fatal global error, and planned Maintenance as four distinct states	Approved
RECOVERY-02	Render Not found inside the ordinary public shell with Home as its only dedicated action	Approved
RECOVERY-03	Return real 404/noindex semantics and localized descriptive metadata	Approved
RECOVERY-04	Omit dedicated search, giant code, Back control, suggestion list, and extra support prose from Not found	Approved
RECOVERY-05	Allow privacy-sensitive missing resources to use the same non-disclosing Not-found state	Approved
RECOVERY-06	Keep the ordinary shell for recoverable page errors with Try again primary and Home secondary	Approved
RECOVERY-07	Preserve safe user context where possible and never claim unverified persistence	Approved
RECOVERY-08	Use busy/status behavior, prevent duplicate retry, and do not auto-retry	Approved
RECOVERY-09	Use a minimal standalone shell for fatal global errors	Approved
RECOVERY-10	Give fatal errors Try again primary and full-document Home secondary, without Feedback or global navigation	Approved
RECOVERY-11	Resolve fatal-boundary locale before meaningful first paint	Approved
RECOVERY-12	Use a minimal standalone shell and manual Check again for planned Maintenance	Approved
RECOVERY-13	Support optional expected end and Last updated only from truthful maintained data	Approved
RECOVERY-14	Do not auto-refresh, poll, count down, or redirect Maintenance	Approved
RECOVERY-15	Preserve 503/no-store and make Retry-After and API locale behavior truthful	Approved
RECOVERY-16	Show no raw error, digest, private payload, fabricated reference code, or unsupported data-loss claim	Approved
RECOVERY-17	Reflow through 320 CSS px and preserve one main, one h1, focus, keyboard, zoom, and locale parity	Approved
RECOVERY-18	Leave exact visual tokens and final human-reviewed strings to Foundation and downstream design without changing behavior	Approved

Handoff Boundary

Claude Design must preserve each state's meaning, shell, hierarchy, actions, timing rules, locale parity, and semantic requirements. It may create a restrained shared visual language within the later approved Foundation, but must not merge states, add unsupported actions, turn error codes into the focal point, invent an estimate, or make Maintenance depend on ordinary navigation.

The future Codex implementation session must compare the final design with this brief, map each state to the approved Next.js and proxy responsibilities, and verify both protocol behavior and browser interaction. If implementation cannot provide stable first-paint locale or truthful maintenance timing, it must omit the unsupported field and request a guide revision rather than silently displaying misleading information.

NosLog 2.0 Cross-Cutting Principles and Exception Governance

docs/design/22-cross-cutting-reference-matrix.md

Document control

- Status: Approved – consolidated current authority
- Language: English
- Research date: 2026-08-03
- Consolidated: 2026-08-10
- Scope: evidence roles, approved cross-cutting principles, accessibility and

internationalization constraints, and specialized-pattern governance

- Normative Foundation values: [document 24](#)
- Foundation provenance: [document 25](#)
- Locked viewer/editor boundary:

[document 07](#)

This document consolidates the still-current substance of the former cross-cutting matrix and exception register. It does not reopen completed Foundation values or authorize any viewer/editor change.

Evidence method

References are used only for the role they can support.

Role	Evidence class	Valid use	Invalid use
A	Standards and authoritative accessibility/internationalization guidance	Required semantics, language, reflow, input, focus, contrast, and preference behavior	Visual art direction or domain meaning
B	Maintained official design systems and platform guidance	Foundation models, token roles, responsive patterns, interaction anatomy, implementation constraints	Copying brand values or components without a focused NosLog decision
C	Current production services	Observing hierarchy, density, adaptation, and real-world tradeoffs	Treating one product as a universal rule
D	Official game material and rhythm-game products	Domain terminology, score relationships, chart identity, and arcade context	Importing another game's mechanics or surface styling
E	Editorial and art-direction references	Proportion, typographic contrast, pacing, composition, imagery, and expression	Accessibility, navigation, or dense-product behavior

Localized copies, mirrors, package versions, and repeated documentation pages are not independent evidence. A material decision requires at least twelve relevant, independent sources and should continue past fifteen when credible evidence still changes the result. A broad source pool is a starting point, never a waiver for focused research.

Approved cross-cutting principles

ID	Principle	Required interpretation
PR-01	Shared hierarchy	Map page tasks to shared semantic roles rather than creating page-local emphasis systems.
PR-02	Familiar interaction, exact domain	Use familiar web patterns without replacing NOSTALGIA entities, labels, or relationships.
PR-03	Concise with context	Keep default views concise while preserving the scope, selection, state, unit, denominator, or value needed to interpret results.
PR-04	Dark anchor, complete appearances	Use Dark as the representative art-direction anchor while supporting complete System, Dark, and Light behavior through documented semantic roles.
PR-05	One multilingual hierarchy	Preserve one semantic typographic hierarchy across Korean, Japanese, English, and mixed-script content; validate each script's actual composition.
PR-06	Content-driven recomposition	Preserve task and meaning while recomposing from content and container constraints from 320 CSS px through wide analytical layouts.
PR-07	Exact comparison evidence	Align comparison frames and connect every visualization to exact scope, unit, denominator, order, scale, time, labels, and accessible data.
PR-08	Restrained controls	Keep emphasis scarce, disclose secondary controls contextually, and build identity through content and composition rather than persistent accent.
PR-09	Accessibility as construction input	Preserve equivalent information and task completion through semantics, keyboard, touch, focus, reflow, alternatives, and preference support.
PR-10	Governed specialization	Admit specialized behavior only through documented purpose, smallest boundary, fallback, validation, ownership, and review.

All ten principles are Approved. Exact values and aliases are governed by document 24, not by early open questions preserved in Git history.

Accessibility and internationalization floor

The design and release target is WCAG 2.2 AA. Native HTML semantics are preferred. Custom composites require complete name, role, value, state, focus, keyboard, pointer, touch, and announcement behavior.

Every applicable ordinary-UI requirement and specimen must verify:

- no loss of content or function at 200% text resize and 320 CSS px reflow;
- user text-spacing overrides, browser zoom, safe areas, and tiled windows;
- visible keyboard focus, logical source/focus order, skip paths, and no keyboard trap;
- pointer and touch target geometry with alternatives to dragging;
- Light/Dark contrast, non-color cues, forced colors, color-disabled review, and

color-vision-deficiency review for data;

- prefers-reduced-motion with immediate state and equivalent static meaning;
- loading, empty, partial, error, disabled, permission, and destructive states;
- Korean, Japanese, English, and mixed-script line breaking, punctuation, labels,

date/number formatting, and long real content;

- equivalent text or semantic-table access for nontrivial visualizations.

Automated checks, lint, or a component-library audit alone are not proof. Validate representative complete tasks with keyboard-only, screen-reader, zoom, text-spacing, forced-colors/high-contrast, reduced-motion, touch, and browser review as applicable.

Primary standards include [WCAG 2.2](#), [WAI-ARIA APG](#), [WCAG Reflow](#), [WCAG Text Spacing](#), [WCAG Target Size](#), [KLReq](#), [JLReq](#), [CSS Text](#), and [Unicode LDML](#).

Responsive and content rules

- 390px is a representative mobile review canvas, not a fixed width, minimum, standard, or breakpoint.
- Ordinary content reflows without page-level two-dimensional scrolling at 320 CSS px.
- Use stable semantic/source order across layouts. Recomposition may change grouping, columns, disclosure, and visible density without changing task meaning.
- Wide layouts use space for comparison, analysis, parallel reading, and administration, not simply an enlarged mobile column.
- Viewport queries govern page-level alignment; nested components use container queries when their own available space determines composition.
- Do not shrink type, targets, or data marks to preserve a preferred arrangement.
- The locked viewer/editor is outside these rules.

Specialized-pattern classification

Classification	Meaning	Governance
Domain invariant	A factual NOSTALGIA or NosLog product relationship	Record in the relevant brief; do not call it an exception.
Normal adaptation	Expected responsive, locale, input, or state variation	Keep inside the shared rule; no exception record.
Specialized contract	A permanent, task-specific pattern that narrows a shared rule	Record purpose, boundary, fallback, validation, owner, and review triggers.
Bounded exception	A local variance necessary for meaning or task completion	Use the smallest exact region and require normal rules outside it.
Temporary exception	A short-lived implementation limitation	Name removal milestone, replacement path, and owner.
Scope boundary	Work deliberately excluded from the initiative	Record as excluded; never treat it as pending design work.
Implementation debt	Current code that fails an approved requirement	Track as debt; never elevate it into design authority.

A proposed exception must show a verified need, the shared rule that is insufficient, the smallest route/component/region/state boundary, an equivalent path or fallback, cross-cutting impact, validation, lifecycle, and rejected alternatives. Visual preference, legacy code, schedule pressure, framework defaults, and one screenshot are insufficient.

Only the user can approve, expand, supersede, or retire an exception. A second page family requesting the same local pattern triggers review for a shared abstraction; repetition never promotes it automatically.

Current specialized and bounded records

ID	Contract	Boundary and current disposition
PRES-01	Complete chart viewer/editor preservation	Scope boundary governed only by document 07; it is not a reusable 2.0 pattern.
SP-05	Single-series five-axis community-pattern radar	Keep one stable learned five-axis order and scale, visible axis labels, exact supporting values, and a semantic alternative. Do not use it for precise or multi-series comparison.
SP-06	Supplementary official X content	Load after core content, disclose third-party behavior, preserve a first-party summary/link and failure fallback, and never make it the only carrier of an announcement.
DATA-2D	Inherently dimensional ordinary data table or visualization	Contain overflow inside a labeled region and provide a semantic summary/table; ordinary page chrome still reflows.
AUDIO-LOCAL	User-selected chart audio remains device-local	Do not upload MP3 data to NosLog servers or databases.



The first four former viewer/editor entries are superseded by the single stronger PRES-01 boundary. They must not be interpreted as authorization to redesign or apply ordinary Foundation rules inside those experiences.

Focused source pool

The approved principles and Foundation research used, among others:

- standards: W3C WCAG/WAI, WAI-ARIA APG, KLReq, JLReq, CSS Text, Unicode LDML;
- maintained systems: Adobe Spectrum, Atlassian, Microsoft Fluent, IBM Carbon,

GitHub Primer, SAP Fiori, Material, Shopify Polaris, Radix Colors, GitLab Pajamas, LINE, Ant Design, USWDS, GOV.UK, Apple HIG, and Japan Digital Agency;

- production and domain evidence: current NosLog code/browser behavior, official

NOSTALGIA material, music/catalog services, ranking and chart products, and representative Korean/Japanese production work.

The focused selection provenance, package versions, exact candidates, measured failures, and user decisions are consolidated in document 25.

Downstream handoff

- Claude Design may refine composition only inside approved page briefs, document

24, and the records above. It may propose but not silently create an exception.

- Future implementation maps each active record to code and appropriate automated plus manual checks.

- If an approved pattern lacks a required state or fails an acceptance requirement, report the conflict and reopen it with the user.

- Git history preserves the retired detailed matrix and comparison evidence; it is not current design authority.

Decision log

ID	Decision	Status
REF-D01	Keep evidence roles distinct and record source limitations.	Approved
REF-D02	Require focused twelve-to-fifteen-source research for material decisions.	Approved
REF-D03	Preserve approved page briefs and NOSTALGIA semantics over reference styling.	Approved
REF-D04	Centralize exact Foundation values and selection provenance in documents 24 and 25.	Approved consolidation – 2026-08-10
EXC-D01	Use classified governance rather than treating every domain rule as an exception.	Approved
EXC-D02	Use trigger-based review for permanent contracts and removal milestones for temporary ones.	Approved
EXC-D03	Reserve exception approval and expansion to the user.	Approved
EXC-D04	Supersede former viewer/editor specialized entries with the absolute preservation contract.	Approved correction – 2026-08-10

NosLog 2.0 Foundation v0.1

docs/design/24-foundation-v0.1.md

Document control

- Status: Approved – Foundation v0.1 normative authority
- Language: English
- Last updated: 2026-08-11
- Scope: default Foundation for eligible ordinary NosLog 2.0 UI
- Provenance and decision history:

[document 25](#)

- Current promotion gate:

[document 63](#)

- Excluded: the complete chart viewer/editor, final high-fidelity composition,

production implementation, and final logo drawing

This is the single normative source for approved Foundation values and role contracts. Do not reconstruct tokens from old comparison documents, specimens, Tailwind defaults, or Git history.

Scope and source rules

1. Neutral hierarchy is the default. Chroma appears only for an approved semantic or domain role.
2. Use exact published values and mappings from the selected source. Do not mix, interpolate, shift, or create a “NosLog-like” replacement.
3. A source approval does not imply a component alias. A primitive, role mapping, component alias, and implementation are distinct gates.
4. Tailwind CSS may implement approved values and responsive behavior. Its defaults are not source values.
5. The entire chart viewer/editor remains unchanged under [document 07](#). Nothing below applies inside it.

Typography

Family and language behavior

- Primary family: Pretendard JP Variable, with the official Pretendard JP fallback order.
- Keep kerning and the typeface’s natural tracking. Shared roles add no default letter-spacing.
- Apply the approved Korean glyph feature ss05 only inside lang="ko"; do not force

it onto Japanese or English.

- Delivery uses the official Pretendard JP 1.3.9 variable dynamic-subset CSS and

referenced WOFF2 slices, version-pinned and first-party self-hosted on the NosLog origin. Preserve the upstream font data, license, `font-display: swap`, and official fallback order; only asset URLs may be repackaged for the same origin.

- Do not preload the complete 5.35 MB variable file. A critical slice may be

preloaded only after later performance evidence justifies it.

- The current bundled standard Pretendard file does not satisfy this family and stays

only until the future implementation migration passes multilingual and fallback verification.

Physical core

- Size primitives: 12, 14, 16, 20, 24, and 32px, plus gated 40px.
- Line-height primitives: 16, 20, 24, 28, 32, 40, and 48px.
- Weights: regular 400, medium 500, semibold 600, bold 700.
- Shared user-facing HTML text never resolves below 12px.
- Do not use shared weights 100–300, 800–900, or unnamed intermediate values.

Semantic composites

Role	Composite	Figures	Boundary
display	40/48 · 700	Proportional	Rare, short, separately approved expressive moment; no automatic page assignment
page-title	24/32 · 700	Proportional	Compact/default page or focused-task identity
section-title	20/28 · 600	Proportional	Real major content boundary, not a decorative card label
component-title	16/24 · 600	Proportional	Dialog, drawer, panel, or grouped-module identity
entity-title	16/24 · 600	Proportional	Ordinary list/card entity identity
entity-companion	14/20 · 400	Proportional	Optional localized/read identity in the approved Music Detail popover
body	16/24 · 400	Proportional	Ordinary reading, explanation, and system-message copy
body-secondary	14/20 · 400	Proportional	Concise supporting context, never the only critical meaning
control	14/20 · 500	Proportional	Visible action, choice, field-label, or navigation label
metadata	12/16 · 400	Proportional	Short genuinely tertiary fact only
metric-display	32/40 · 700	Tabular	One dominant quantitative result with visible label, unit, and scope
metric-value	14/20 · 500	Tabular	Comparable quantitative value in a row, group, or visualization

Focused entities use `page-title` while retaining correct HTML heading semantics. Entered and selected field values use `body`, while the label/action uses `control`. Only metric roles enable tabular figures by default.

At a twelve-column page-layout container of at least 1056 CSS px, `page-title` may step to 32/40 · 700 only when its governed region spans at least eight tracks or has at least 640 CSS px of measured inline space and is not a reading composition. There is no fluid interpolation, locale-specific size, or page-local title size.

Spacing, grid, and containers

Spacing primitives

Value	Role boundary
0px	Intentional absence of space
2px	Documented optical correction inside an icon, badge, or specialized visualization only
4px	Internally inseparable details
8px	Inline peers and tightly related controls
12px	Compact component inset and dense control groups
16px	Default component inset and related content blocks
24px	Subsection separation
32px	Section separation
48px	Major page-region separation
64px	Rare large page boundary with a proven hierarchy need

Do not use 2px for ordinary layout spacing. Do not introduce arbitrary local values or use 48/64px merely to make a sparse surface appear premium.

Page alignment

Tier	Query-container width	Columns	Gutter	Minimum inline margin
Compact	below 672px	4	12px	16px, safe-area aware
Intermediate	672–1055px	8	16px	24px, safe-area aware
Wide	1056px+	12	16px	32px, safe-area aware

Use the available page-layout query container, not a device name. The compact validation contract covers 320–479 CSS px; 390px is representative only. At 320px the 16px margins remain intact and ordinary content reflows without page-level horizontal scrolling.

Container	Maximum / measure	Default task family
reading	768px shell; continuous prose capped at 68ex	Guidance, policy, onboarding, settings/help
standard	1280px	Home, discovery, Tiers, Bingo, Exams
wide	1440px	Music analysis, Rankings, Profile, Arcade
workspace	Fluid inside approved margins	Ordinary administrative or meaning-dependent professional visualization only

Container maximums are ceilings, never fixed canvases. Component recomposition uses its own measured failure point and a container query when nested.

Neutral color - Adobe Spectrum S2

Adobe Spectrum S2 is the exclusive neutral primitive and semantic source. Use the published exact values below.

Surfaces - M-A

Role	Light	Dark	Contract
canvas	#FFFFFF	#111111	Page and shell baseline
surface	#F8F8F8	#1B1B1B	Flat grouped content; ordinary cards remain unraised
sunken	#E9E9E9	#111111	An intentionally receding ordinary data or work well
raised	#FFFFFF	#222222	Content with real lift, movement, overlap, or justified emphasis
overlay	#FFFFFF	#222222	Menu, popover, tooltip, sheet, dialog; placement/boundary also communicates stacking
scrim	black at 40%	black at 60%	Modal background suppression only

Foregrounds - F-A

Role	Light	Dark	Contract
content-default	#292929	#DBDBDB	Headings, body, primary icons, important labels/values
content-subdued	#505050	#AFAFAF	Metadata, helpers, timestamps, secondary icons
content-interactive	#131313	#F2F2F2	Default interactive content during hover/pressed/content-focus
content-subdued-interactive	#292929	#DBDBDB	Subdued interaction during hover/pressed/focus/selected
content-disabled	#C6C6C6	#444444	Genuinely unavailable nonessential content only

Static headings remain content-default; do not use the higher state value for decorative emphasis. Disabled information needs an available explanation elsewhere.

Neutral boundaries - NB-A

Role	Light	Dark	Contract
divider	#E1E1E1	#323232	Decorative rhythm only
border-subtle	#DADADA	#393939	Nonessential framing and disabled boundary
border-default	#C6C6C6	#444444	Ordinary edge when another cue already identifies the object
border-strong	#717171	#8A8A8A	Necessary neutral control or graphic boundary that must independently remain identifiable

The quiet roles are intentionally below 3:1 on some surfaces and must never become the sole necessary cue. Do not outline every Dark container or selected row.

Neutral interaction - NI-A

There is no universal neutral hover, pressed, or selected fill. Preserve the approved Spectrum component-family recipes:

Family state	Light	Dark
Stack/Tree hover or neutral selected	#E9E9E9	#2C2C2C
Stack selected hover / equivalent keyboard fill	#E1E1E1	#323232
Stack selected pressed	#DADADA	#393939
Menu state set	#E9E9E9	#323232
Disabled background	#E9E9E9	#2C2C2C
Disabled border	#DADADA	#393939
Disabled content	#C6C6C6	#444444

Selection requires programmatic state plus a persistent non-fill cue such as a checkmark, current indicator, or explicit label. Hover and selection do not add a white Dark-theme outline or automatically promote to border-strong.

Keyboard focus - FI-C, Fluent 2

- Light focus color: #000000.

- Dark focus color: #FFFFFF.
- Width: 2px.
- Geometry: zero-gap perimeter rendered outside the focused object with a pseudo-element extent of -2px.
- Show only for keyboard-visible focus; pointer focus does not leave a persistent outline.
- Do not recolor the component, selection, identity, or semantic state.
- In forced colors, use the system Highlight color and preserve a visible perimeter.
- Prevent clipping at scroll, rounded, sticky, and frame boundaries.

Identity and primary action

Signature source and shell identity

- SS-08 · Radix Colors Indigo is the approved reserved signature source.
- It currently has **no** approved ordinary-UI, shell, logo, navigation, selection, or action alias. Do not invent a placement merely because the source was selected.
- ITA-C · Achromatic is the approved shell identity alias: graphical NosLog mark and

visible wordmark use content-default for the active appearance on a transparent field. No default white outline or Indigo field is allowed.

Filled primary action - RPA-A

Use at most one proven non-destructive internal primary action per page, bounded region, or temporary flow; many views need none.

Appearance	Default	Hover / pressed	Foreground
Light	#292929	#131313	#FFFFFF
Dark	#DBDBDB	#F2F2F2	#111111

Ordinary actions, navigation, links, tools, and equal-priority choices remain lower neutral hierarchy. External-brand and destructive actions use their own semantics. Radix has no filled-action alias.

Material geometry - MG-A, Adobe Spectrum S2

Role	Exact approved source alias/value
radius-control	corner-radius-small-default → 4px
radius-container	corner-radius-medium-default → 8px
radius-overlay	corner-radius-large-default → 10px
radius-full	corner-radius-full → 50% of the relevant box
elevation-raised	drop-shadow-emphasized: 0 2px 8px ambient + 0 1px 4px transition + 0 0 1px key
elevation-overlay	drop-shadow-elevated: 0 4px 12px ambient + 0 2px 6px transition + 0 0 2px key
elevation-dragged	drop-shadow-dragged: 0 12px 16px ambient + 0 6px 8px transition + 0 0 6px key
Shadow colors	Use the exact appearance-specific published alias; ambient Light/Dark .08/.24, transition .04/.12, and source-defined key opacity
scrim	Black at Light 0.4, Dark 0.6

Flat canvas, surface, and sunken have no default shadow. Dark depth needs surface or boundary support in addition to shadow. Directional scroll boundaries retain the approved 1px boundary and add no invented fourth shadow. Full rounding is a shape contract, not the default for buttons or containers.

Feedback and status - FS–BN

Atlassian owns semantic chroma; Spectrum owns message-container title/body typography.

Role	Light background / marker	Dark background / marker
Information	#E9F2FE / #357DE8	#1C2B42 / #4688EC
Success	#EFFFDD / #6A9A23	#28311B / #82B536
Warning	#FFF5DB / #E06C00	#3A2C1F / #FBC828
Danger	#FFECEB / #C9372C	#42221F / #F15B50

Message title/body use #292929/#DBDBDB. Field-error and destructive text use Atlassian danger text #AE2E24/#FD9891; invalid/destructive boundary uses #C9372C/#F15B50. Every state retains explicit title, copy, symbol/shape, and programmatic semantics. Carbon contributed only the restraint observation; no Carbon color is part of the mapping.

Difficulty markers - DU–01, Adobe Spectrum S2

Role	Light	Dark
Normal	#0BA45D	#068850
Hard	#E86A00	#E06400
Expert	#F03823	#CD2E1D
Real	#A65CE7	#AD69E9

These colors appear only on compact persistent difficulty markers in eligible repeated-scanning ordinary DOM UI. Names, levels, order, and pattern/selected cues remain visible. Do not color difficulty text, backgrounds, containers, selection, focus, feedback, or actions.

Local data color - LD–03, SAP Fiori Horizon

Use exact sap_horizon / sap_horizon_dark chart tokens.

Role	Light	Dark
Single series	#168EFF	#3278BE
Score buckets, low → high	#62B3FF, #3FA2FF, #168EFF, #0074E2, #0065C3, #0055A5	#1D456D, #275E96, #3278BE, #5291D1, #7AABDC, #A2C4E7
FAST / SLOW	#168EFF / #C87B00	#3278BE / #F2A634
Generic categorical 1-5	#168EFF, #C87B00, #75980B, #DF1278, #8B47D7	#3278BE, #F2A634, #B4CE35, #FA4F96, #8B47D7

Score buckets retain number, label, and fixed order. FAST/SLOW retain direct labels, solid/circle versus dashed/square treatment, and are never good/bad semantics. Numeric thresholds remain neutral unless separately promoted to feedback meaning. The narrower judgement mapping below supersedes SAP only for judgement.*.

Judgement markers - JD-02, Radix Colors 3.0.0

Role	Light	Dark
S-Just	pink11 #C2298A	#FF8DCC
Just	amber11 #AB6400	#FFCA16
Good	cyan11 #107D98	#4CCCE6
Near	blue11 #0D74CE	#70B8FF
Miss	gray11 #646464	#B4B4B4

The five colors apply only to local judgement markers/bars. Labels, counts, percentages, surfaces, and containers remain neutral. Radix gray11 is a judgement-domain color, not a Foundation neutral. JD-02 does not own FAST/SLOW; that pair remains LD-03 SAP.

Iconography - IC-06, Lucide

- Use `lucide-react` as the single ordinary-UI icon family and review changed glyphs

when upgrading the source package.

- Preserve the published 24×24 viewBox, 2px stroke, round linecaps/linejoins, and

outline treatment.

- Render routine action/wayfinding glyphs at 20px. Use 16px only for compact

supporting/metadata icons beside a visible label. Reserve 24px for a proven prominent standalone affordance or empty state.

- Primary, unfamiliar, destructive, and low-frequency actions retain visible text.

Icon-only controls are limited to universally understood contextual actions and require an explicit accessible name.

- Mobile icon-only target: at least 44×44px; eligible desktop target: at least

40×40px.

- Icons inherit the control foreground and never gain signature, status, difficulty,

judgement, or data color merely for emphasis.

- Decorative icons beside text are hidden from the accessibility tree. Tooltips do

not replace accessible names or required persistent labels.

Motion - M0-02, Atlassian

Role	Duration	Easing / boundary
Immediate state, focus, error, critical status	0ms	No delayed semantics
Routine high-frequency hover	50ms	<code>out.practical cubic-bezier(.4,1,.6,1)</code>
Pressed feedback / quick exit	100ms	<code>out.practical / in.practical cubic-bezier(.6,0,.8,.6)</code>
Persistent selection / small entrance	150ms	<code>out.practical; popup may use out.bold cubic-bezier(0,.4,0,1)</code>
Modal or large exit	200ms	<code>in.practical</code>
Modal entrance or justified in-place scale/reposition	250ms	<code>inout.bold cubic-bezier(.4,0,0,1)</code>
Proven large ordinary transition ceiling	400ms	Not a default

600ms, bounce, stagger, celebration, parallax, and page choreography are unassigned. Under

`prefers-reduced-motion`: reduce, remove nonessential translate/scale/rotate, parallax, stagger, and auto-scrolling

motion rather than slowing it. Apply visible and programmatic state immediately. Replace spinner motion with a static cue, persistent localized busy text, and `aria-busy`.

Ordinary data visualization - DV-05, GitHub Primer

1. Provide a visible localized title and enough subtitle context to identify measure, dimension, date range, and unit.
2. Show axes and units by default. Compact tick density may reduce; numeric meaning may not disappear.
3. Use collision-free direct labels or a persistent legend in plot order. Never hide the only legend behind hover.
4. Pointer, keyboard focus, and touch expose the same localized dimension, series, exact value, and unit. Arrow keys move points; Home/End move to series ends.
5. Keep the conclusion and current/latest exact value visible without interaction.
6. Every analytical chart exposes the active same-data semantic table. CSV is optional reuse support and never replaces the table.
7. Loading reserves plot geometry and supplies busy text; empty/error/partial states name cause and recovery.
8. At 320px, 390px, and desktop, legends and toolbars recompose without page-level overflow. An inherently wide data table may use a labeled contained scroller.
9. Use LD-03, JD-02, and DU-01; Primer anatomy does not import Primer colors.
10. Personal versus benchmark uses an outlined blue circle with a solid line versus a filled orange circle with a dashed line. This does not alter FAST/SLOW's separate circle/square contract.

Foundation acceptance

Eligible ordinary UI must retain all meaning and operation under:

- Light, Dark, and device/System appearance;
- Korean, Japanese, English, mixed script, long real content, and locale formatting;
- 320px, representative 390px, intermediate thresholds, wide layouts, zoom, and 200% text resize;
- keyboard, touch, pointer, screen reader, text-spacing override, forced colors, reduced motion, and color-disabled conditions;
- loading, empty, partial, error, disabled, permission, and destructive states.

FPR-03 promoted these contracts together as the approved Foundation v0.1 normative authority on 2026-08-11. Reusable component and pattern responsibilities remain a separate FPR-04 gate in document 63; they do not reopen this Foundation.

NosLog 2.0 Foundation v0.1 Provenance and Decision Record

docs/design/25-foundation-v0.1-provenance.md

Document control

- Status: Approved – consolidated current decision record
- Language: English
- Last updated: 2026-08-11
- Normative values: [document 24](#)
- Current scope: [document 57](#)
- Purpose: preserve selected sources, candidate disposition, measured limitations,

and user approvals without keeping every superseded comparison active

This document replaces the active authority of the former serial Foundation research, comparison, specimen-validation, and approval files. Detailed historical tables and comparison artifacts remain recoverable in Git history, but they are not current scope or implementation targets.

Research and decision method

Material Foundation decisions followed these rules:

1. compare at least twelve independent relevant authoritative or production sources, continuing past fifteen when credible additions still changed the result;
2. align equivalent semantic roles and actual Light/Dark values rather than unrelated marketing swatches;
3. prefer one maintained published source intact for each approved responsibility;
4. extract version-pinned values when packages were the most precise official source;
5. hold already approved NosLog inputs constant in controlled real-content specimens;
6. measure contrast, overflow, focus, localization, narrow widths, zoom, forced colors, reduced motion, and non-color alternatives as relevant;
7. let an unchanged source fail rather than silently adjusting it; and
8. require explicit user approval for the final material choice.

Tailwind palette values and starter styling were excluded. The legacy NOSTORY Figma was not current design evidence. The over-accented FCM-11 and SIG-07 examples are Rejected and may not be revived.

Consolidated approval register

Responsibility	Approved result	Date	Current boundary
Typography family and delivery	Pretendard JP Variable	2026-08-04/11	Family and hierarchy approved; official 1.3.9 variable dynamic subsets are version-pinned and first-party self-hosted under FPR-02
Type scale, spacing, grid, containers	NosLog role map derived from focused official reference comparison	2026-08-04-08	Exact normative map in document 24; no Tailwind value authority
Neutral primitives and surfaces	M-A · Adobe Spectrum S2	2026-08-08	Exclusive Light/Dark neutral source
Neutral foreground	F-A · Adobe Spectrum S2	2026-08-09	Exact content aliases only
Neutral boundary	NB-A · Adobe Spectrum S2	2026-08-09	Quiet roles are not sole necessary cues
Neutral interaction	NI-A · Spectrum component-family fidelity	2026-08-09	No universal interaction fill
Keyboard focus	FI-C · Microsoft Fluent 2 achromatic focus	2026-08-09	Black Light / white Dark, 2px, zero gap
Reserved signature source	SS-08 · Radix Colors Indigo	2026-08-10	No approved current UI alias
Shell identity	ITA-C · Achromatic	2026-08-10	Neutral mark and wordmark; no Indigo field or default outline
Filled primary action	RPA-A · Achromatic primary	2026-08-10	Spectrum neutral; at most one proven action per bounded context
Material geometry	MG-A · Adobe Spectrum S2	2026-08-10	Exact radius, shadow, scrim mapping
Feedback/status	FS-BN · Atlassian semantic color + neutral message typography	2026-08-10	Atlassian chroma, Spectrum message copy
Difficulty markers	DU-01 · Adobe Spectrum S2	2026-08-10	Four compact ordinary-UI markers only
Local data	LD-03 · SAP Fiori Horizon	2026-08-10	Single, score buckets, FAST/SLOW, generic categories
Judgement markers	JD-02 · Radix Colors 3.0.0	2026-08-10	Five judgement markers only; not FAST/SLOW
Iconography	IC-06 · Lucide	2026-08-10	Eligible ordinary UI only
Motion	MO-02 · Atlassian	2026-08-10	Eligible ordinary UI and instant reduced mode
Data visualization anatomy	DV-05 · GitHub Primer	2026-08-10	Ordinary non-viewer charts; NosLog retains its approved colors
Foundation package	Document 24 contracts promoted together as Foundation v0.1	2026-08-11	Approved normative authority for eligible ordinary UI under FPR-03; implementation remains downstream

Typography, spacing, and layout provenance

The physical and semantic system was informed by independent official sources including [Atlassian Typography](#), [IBM Carbon type sets](#), [Primer Typography](#), [USWDS Typography](#), [GOV.UK type scale](#), [Ant Design Font](#), [GitLab type fundamentals](#), [SAP Fiori Typography](#), [Microsoft Fluent Typography](#), [Material 3 typography](#), [Adobe Spectrum typography data](#), [LINE typography](#), [Japan Digital Agency typography](#), [Apple Typography](#), [WCAG Resize Text](#), [WCAG Reflow](#), and [Pretendard JP](#).

Convergence supported a readable 16/24 body, compact 14/20 product UI, restricted 12/16 metadata, a small upper hierarchy, natural tracking, and stable semantic roles across scripts. Adjacent upper steps and page-local sizes were rejected because they increased multilingual drift without distinct shared meaning.

Spacing and responsive comparisons included [Material 3 layout](#), [Carbon Grid](#), [Atlassian Grid](#), [Fluent Layout](#), [Adobe Spectrum responsive grid](#), [Ant Design Layout](#), [Japan Digital Agency spacing](#), [USWDS Layout Grid](#), [GOV.UK spacing](#), [LINE Layout](#), [Apple Layout](#), [Primer Breakpoints](#), [MDN Container Queries](#), and [WCAG Reflow](#).

The approved 672/1056px page-layout thresholds are NosLog-specific measured transitions: the selected margins, gutters, and 4/8/12 columns produce entry track widths of approximately 63/64/68px. Framework breakpoints were comparison evidence, not the reason for those values.

Neutral and focus provenance

The neutral review compared maintained Light/Dark systems including Adobe Spectrum, Atlassian, Carbon, Fluent, GitHub Primer, GitLab Pajamas, SAP Fiori, Shopify Polaris, Material, Ant Design, Radix Colors, LINE, USWDS, GOV.UK, Apple, and current NosLog evidence, with WCAG contrast requirements as acceptance constraints.

Adobe Spectrum S2 was selected because its published grayscale and current semantic aliases supplied the complete restrained surface/foreground/boundary responsibilities without Tailwind or local interpolation. Its token evidence was pinned to @adobe/spectrum-tokens@14.15.0 during extraction.

Key decisions:

- M-A preserves Spectrum base, layer, pasteboard, and elevated aliases. A proposed

NosLog-specific Light reversal and custom Dark overlay step were rejected.

- F-A keeps static headings on gray-800; gray-900 remains interaction-state

content. gray-600 measured only 4.02:1 on Light sunken and was not promoted to a universal normal-text role.

- NB-A uses gray-200/300/400/600. Only gray-600 owns a necessary neutral boundary;

lower roles are deliberately quiet.

- NI-A was selected after comparing Spectrum Stack, Tree, Menu, and Table recipes.

A universal hover/selected fill was rejected because those component families do not publish one shared recipe.

- Persistent white outlines in Dark were rejected. FI-C instead appears only during

keyboard-visible focus.

The focus review compared [WCAG Focus Appearance](#), [Microsoft Fluent color tokens](#), [Fluent @@NOSLOGTOKEN0@@](#), Adobe Spectrum, Atlassian, Carbon, Primer, Material, Shopify, GitLab, SAP, USWDS, GOV.UK, Ant Design, and browser forced-colors behavior. The approved Fluent polarity measured at least 15.91:1 across approved surfaces and passed native Tab, 200% zoom, clipping, roving-focus, and forced-colors checks.

Signature, identity, and action provenance

The broad signature review included Adobe Spectrum, Radix Colors, Shopify Polaris, Atlassian, Fluent, Carbon, Primer, Material, Ant Design, GitLab, SAP Fiori, LINE, USWDS, GOV.UK, Apple, information services, and current NosLog domain-color collisions.

SS-08 · Radix Colors Indigo was selected over the Shopify Polaris source and the experimental Polaris-Light/Radix-Dark split. The split was rejected as a cross-system appearance hybrid. The source selection did not prove a valid shell or action alias.

Three identity treatments were then compared on identical content:

Candidate	Disposition	Reason
ITA-A Indigo mark	Rejected	Unnecessary brand color on the logo and collision pressure with domain hues
ITA-B Indigo field	Rejected	Added a colored identity container and unresolved shape ownership
ITA-C Achromatic	Approved	Stable identity through placement and neutral mark/wordmark without decorative chroma

Three primary-action policies were compared. RPA-A was approved. RPA-B/C were rejected because exact Radix Dark hover/pressed #5472E4 with white text measured 4.28:1, below the required 4.5:1. No altered Indigo was invented, and Radix has no approved action alias.

Material provenance

The material review compared fourteen maintained systems, then extracted three complete finalists:

Candidate	Disposition	Reason
MG-A Adobe Spectrum S2	Approved	Complete radius, raised/overlay/dragged shadow, and Light/Dark scrim roles with the same neutral provenance
MG-B Microsoft Fluent 2	Rejected	Published Web set lacked equivalent dragged and directional scroll-boundary ownership
MG-C Atlassian	Rejected	Atlassian requires shadows paired with its own elevation surfaces, conflicting with Spectrum's exclusive surface ownership

The exact extraction used @adobe/spectrum-tokens@14.15.0, @fluentui/react-theme@9.2.1 / @fluentui/tokens@1.0.0-alpha.23, and @atlaskit/tokens@16.3.0. Mixing radius, shadow, scrim, or surfaces across finalists was explicitly rejected.

Feedback and domain-color provenance

Feedback/status

The status review compared Adobe Spectrum S2, Atlassian, and IBM Carbon recipes after broad semantic-color research. Exact evidence used @adobe/spectrum-tokens@14.15.0, @atlaskit/tokens@16.3.0, and @carbon/themes@11.78.0.

- Atlassian had the preferred semantic color set and clear field-error treatment.
- Carbon's neutral Dark notification typography demonstrated useful restraint, but its

Light warning marker measured 1.53:1 and its colors were not imported.

- FS-BN was approved: exact Atlassian background/marker/error roles plus existing

Spectrum neutral title/body typography.

This is a component-role mapping over one chromatic source, not a mixed palette.

Difficulty

Thirteen independent sources/constraints were reviewed, including Spectrum, Radix, Primer, Atlassian, Carbon, SAP, Elastic, PatternFly, GitLab, Tableau, ColorBrewer, WCAG, and official NOSTALGIA evidence. Eleven exact mappings were compared.

Only unchanged maintained DU-01 Spectrum, DU-05 Carbon, and DU-06 SAP candidates passed the 3:1 compact marker target in both appearances. Spectrum was selected because green → orange → red → purple most clearly preserved the learned difficulty progression. Carbon and SAP remained valid comparison evidence but were not selected. Neutral-only DU-D0 was rejected because the user requirement is four persistent, different difficulty colors in ordinary repeated-scanning UI.

Local data

Fourteen sources established the categorical/sequential/diverging and non-color contract. Complete finalists were Carbon Charts, GitLab Pajamas, and SAP Fiori Horizon. Exact evidence included @carbon/charts@1.27.18, @gitlab/ui@136.1.0, and @sap-theming/theming-base-content@11.36.3.

LD-03 · SAP Fiori Horizon was selected after the user found Carbon's purple-led mapping visually unsuitable and preferred SAP's calm blue sequence plus immediately legible blue/orange FAST/SLOW pair. The earlier Carbon recommendation is Rejected and Superseded. FAST/SLOW are labeled independent counts, not positive/negative status.

Judgement

User-supplied NOSTALGIA gameplay evidence established hue families only: rose S-Just, yellow Just, cyan Good, blue Near, and neutral Miss. Screenshot pixels were rejected as exact web values because capture, glow, display processing, and background alter them.

Fifteen sources/constraints were reviewed; complete exact finalists were Spectrum S2, Radix Colors, and Primer DataVis. JD-02 · Radix Colors 3.0.0 step 11 was selected for its clear, game-adjacent treatment and comfortable contrast reserve. It supersedes SAP only for the five judgement.* roles. It does not own FAST/SLOW.

Iconography provenance

Seventeen independent sources were audited and five adoptable maintained systems plus the current control were rendered with the same eight NosLog roles. The comparison included Lucide, Fluent 2 Regular, Atlassian, Carbon, Primer, and Adobe Spectrum, with Material, Apple, WAI-ARIA, WCAG, and production guidance informing label and target constraints.

The initial recommendation favored Fluent, but the user selected IC-06 · Lucide after reviewing real Korean content. Lucide remained distinct without competing with labels; the choice was not based on package convenience. Source paths, 24×24 viewBox, 2px round stroke, and outline treatment remain intact. The viewer/editor, logo, and data marks are excluded.

Motion provenance

Fourteen independent authorities were reviewed. Six exact-source candidates compared Adobe Spectrum, Atlassian, IBM Carbon productive, Shopify Polaris, Material, and SAP Fiori with identical NosLog interactions and reduced states.

The user selected M0-02 · Atlassian. It provided the clearest semantic fit for 50ms hover, 150ms persistent interaction, entrance/exit asymmetry, modal timing, and instant reduced mode. An early specimen incorrectly treated persistent selection as 50ms; this was corrected to the published 150ms interactive-highlight role. Spectrum 130ms, Tailwind 150ms ease, and other source timings are not mixed in.

Primary references include [Atlassian Motion](#), [Adobe Spectrum Motion](#), [IBM Carbon Motion](#), [Material Motion](#), [Shopify motion tokens](#), [SAP Fiori Motion](#), [Primer motion accessibility](#), and [MDN prefers-reduced-motion](#).

Data-visualization provenance

Sixteen independent sources were audited and six controlled anatomy candidates were compared. Sources included Adobe Spectrum, IBM Carbon, SAP Fiori, GitLab Pajamas, GitHub Primer, Atlassian, W3C/WAI, Microsoft Power BI, Apple, Vega, Observable, D3, ColorBrewer, Elastic, and PatternFly.

DV-05 · GitHub Primer was approved because one maintained product system covered title/subtitle, axes, grid, point/crosshair detail, persistent legend, non-color stroke/marker distinction, compact actions, same-data table, and CSV support. Primer colors were not adopted. Spectrum's line/shape prohibition conflicted with the already approved FAST/SLOW reinforcement; SAP's full analytical toolbar was heavier than necessary for compact NosLog charts.

The initial benchmark marker was a square. The user requested a filled orange circle; the final approved ordinary personal-versus-benchmark treatment uses outlined blue and filled orange circles with solid/dashed lines. This does not alter FAST/SLOW's separate circle/square contract.

Rejected and superseded evidence

Item	Disposition
Tailwind colors, theme, starter cards, gradients, radii, shadows, and implicit transitions	Rejected as design authority
FCM-11, SIG-07 over-accented examples	Rejected; never downstream evidence
Custom mixed neutral ramp or Light/Dark palette hybrid	Rejected
Persistent white outline around Dark containers or identity	Rejected
ITA-A, ITA-B chromatic logo treatments	Rejected
RPA-B, RPA-C Radix action policies	Rejected – 4.28:1 exact Dark state
MG-B, MG-C material mappings	Rejected – role gap / provenance conflict
Carbon as the local-data selection	Rejected and Superseded by LD-03
Neutral-only difficulty	Rejected
Screenshot-sampled judgement hex values	Rejected
Earlier generic SAP judgement colors	Superseded only for judgement.* by JD-02
Fluent icon recommendation	Superseded by user-selected Lucide
Any S4, S6, viewer/editor Foundation or redesign target	Superseded and prohibited by document 07

Evidence retention policy

The active guide keeps this consolidated provenance record and the normative document 24. Deleted serial research files and interactive comparison artifacts remain in Git history for forensic review. They must not be treated as current scope, active specimens, pending approvals, or implementation targets.

NosLog 2.0 Foundation v0.1 Promotion and Reusable Ordinary UI

docs/design/63-foundation-v0.1-reusable-ui-regression.md

Document control

- Status: Approved – Block 5 complete
- Language: English
- Last updated: 2026-08-11
- Normative Foundation: [document 24](#)
- Provenance: [document 25](#)
- Scope authority: [document 57](#)
- Controlled artifact:

[Foundation v0.1 integrated regression](#)

- Excluded: complete chart viewer/editor, final logo drawing, new page structure, final high-fidelity pages, and production implementation

Block 5 purpose

Block 5 checks whether the already approved Foundation contracts operate together on representative ordinary NosLog content and packages only the reusable responsibilities that current page briefs already require. It does not redo source research, promote historical specimen styling, or create a new page family.

The controlled artifact is a self-contained regression harness. It must not iframe, copy, or depend on old serial comparison pages. It is not a final NosLog page or a Claude Design visual target.

Regression contract

The harness covers four different ordinary-UI pressures without assigning them old S labels:

1. music discovery and result refinement;
2. Music detail identity, difficulty, metrics, and judgement/local-data summaries;
3. dense ranking and exact-value comparison;
4. Home routing, feedback, loading/empty/error recovery, and ordinary overlays.

It exposes Light/Dark appearance, Korean/Japanese/English content, representative 320px, 390px, and wide content regions, and 100/200% text conditions. It validates scope and token collisions rather than prescribing final composition.

Gate	Required result
Scope	No viewer/editor, renderer, S4, S6, or production file reference
Authority	Values come only from document 24; no Tailwind palette, old comparison candidate, or local hybrid
Neutral hierarchy	Surfaces, text, ordinary interaction, boundaries, identity, and primary action retain their approved restrained roles
Narrow chroma	Feedback, difficulty, local data, and judgement color remains inside its exact semantic marker/plot responsibility

Gate	Required result
Focus	Keyboard-visible black Light / white Dark 2px zero-gap perimeter; no persistent Dark outline
Typography	Approved composites, natural tracking, real multilingual pressure, and approved first-party dynamic-subset delivery
Responsive	No page-level horizontal overflow at 320px, 390px, or eligible wide arrangements
Text growth	Content and controls remain available at 200% text size without hiding required meaning
Non-color	State, difficulty, judgement, FAST/SLOW, and chart comparison retain names, values, order, shape/pattern, or explicit status
Accessibility	Semantic headings, labels, tables, visible focus, named icon-only controls, and explicit states remain intact

Historical glyph placeholders and temporary controls are not icon or component authority. Downstream design must use the approved Lucide and semantic contracts, not copy the harness appearance.

Completed browser verification

The self-contained harness was checked in the local test browser on 2026-08-10. These results validate the harness as controlled evidence; they do not approve its page composition or settle the material decisions below.

Condition	Result
Korean, Dark, 320px, 100% text	All four fragments and the review frame fit their content region without horizontal overflow.
English, Dark, 320px, 200% text	Required content and controls remain available; the root, frame, toolbar, fragments, and table do not overflow horizontally.
Japanese, Light, 390px, 100% text	Content reflows without horizontal overflow and the Japanese title/content switch is applied.
Korean, Dark, wide region, 100% text	Two-column comparison uses the available region without root, frame, or fragment overflow.
Pointer focus	Pointer activation produces no decorative perimeter, including when the browser still reports : focus-visible.
Keyboard focus	The input-modality-owned perimeter is exactly black in Light and white in Dark, 2px, zero-gap, with a -2px pseudo-element extent.
Overlay focus	Opening the details dialog focuses its named close control; closing it restores focus to the invoking Details button.
Scope and dependencies	The document contains no iframe, canvas, external resource, viewer/editor fragment, renderer dependency, or historical specimen dependency.
Semantics and runtime	Four labeled article regions, one semantic ranking table, named controls, and explicit status copy remain present; no console warning or error was observed.

The pointer/keyboard result required one harness correction: the focus perimeter is now owned by an explicit input-modality attribute rather than the browser's :focus-visible heuristic alone. This prevents the persistent Dark white outline the user rejected while preserving the approved keyboard-visible indicator.

Corrected Foundation summary

Responsibility	Approved contract
Typography	Pretendard JP Variable family, document 24 composites, and approved FPR-02 delivery contract
Neutral	Adobe Spectrum S2 exact M-A, F-A, NB-A, and NI-A
Focus	FI-C Fluent achromatic 2px zero-gap perimeter
Reserved signature	SS-08 Radix Indigo has no current UI alias
Identity	ITA-C achromatic mark and wordmark
Filled primary	RPA-A Spectrum-neutral, rare and bounded
Material	MG-A Adobe Spectrum S2
Feedback	FS-BN Atlassian chroma with neutral message typography
Difficulty	DU-01 Spectrum four-marker mapping
Local data	LD-03 SAP single/sequential/FAST-SLOW/generic categorical mapping
Judgement	JD-02 Radix five judgement markers only
Iconography	IC-06 Lucide
Motion	MO-02 Atlassian 0/50/100/150/200/250ms roles and 400ms ceiling
Data visualization	DV-05 Primer anatomy with NosLog colors and semantic-table floor

The corrected summary intentionally does not assign Radix to primary actions, does not assign FAST/SLOW to JD-02, and does not rename MG-A as MG-01.

FPR-03 promoted all contracts in document 24 together as the approved Foundation v0.1 normative authority on 2026-08-11. This promotion changes no values, source selections, production files, final page composition, or viewer/editor boundary.

Pretendard JP delivery and fallback decision

Repository finding

The current application bundles `app/fonts/PretendardVariable.woff2` through `next/font/local`. It is standard Pretendard 1.20250, not the approved Pretendard JP family. It is migration evidence only and must not be described as Foundation v0.1 compliance.

Official-source findings

- Pretendard JP publishes a variable family and an official KO/JA/system fallback sequence. The reviewed upstream release is 1.3.9.
- The complete `PretendardJPVariable.woff2` is approximately 5.35 MB; unconditional first-view preload would impose unnecessary transfer.
- The official version-pinned variable dynamic-subset CSS loads only the Unicode ranges required by a page.
- Next.js can self-host local font assets and use explicit fallbacks. Production need not depend on a runtime third-party CDN.

Primary sources: [Pretendard JP official documentation](#), [version-pinned variable dynamic-subset CSS](#), and [Next.js Font API](#).

Approved production contract - FPR-02

1. Vendor the official Pretendard JP 1.3.9 variable dynamic-subset CSS and referenced



WOFF2 subsets on the NosLog origin.

- 2. Preserve the upstream font data. Repackage only the asset URLs needed to serve the CSS and WOFF2 slices from the same NosLog origin.
- 3. Pin version and SIL OFL 1.1 license/provenance; do not use an unversioned runtime CDN URL.
- 4. Use the official family order beginning with Pretendard JP Variable, then Pretendard JP, Pretendard, platform UI fonts, Japanese/Korean system fonts, and generic sans-serif.
- 5. Apply ss05 only in lang="ko".
- 6. Keep font-display: swap, validate fallback metrics in Korean/ Japanese/English, and remove the current standard Pretendard asset only after migration verification.
- 7. Do not preload the complete 5.35 MB variable file. Preload a critical subset only if later performance evidence justifies it.
- 8. Treat the official dynamic-subset stylesheet as the delivery mechanism rather than replacing it with one complete next/font/local JP file.
- 9. The future implementation session performs the font migration; this design-guide session changes no production font asset.

This resolves the only primitive-delivery decision in Block 5.

Approved reusable component aliases - FPR-04

These aliases describe responsibilities, not appearance or a request to build a large library now.

Alias	Responsibility
AppHeader	Achromatic identity, current navigation context, and labeled or accessible secondary actions
SearchField	Accessible query, submit, loading, empty, error, and result-status relationships
ContentScopeSwitch	Switch content kind within one search/comparison task without pretending to be page navigation
FilterSortControl	Disclose secondary refinement without persistent option clutter
ViewModeSwitch	Change presentation of one result set with programmatic and persistent selected state
ResultCollection	Flat scannable linked entities with stable identity, metadata, and narrow domain markers
MusicEntityHeader	Canonical Music identity, localized companion access, facts, and contextual actions
DifficultySelector	Neutral control with four persistent approved markers outside the locked viewer/editor
MetricSummary	Label, exact value, unit/basis, and comparison context without decorative color
DataTable	Semantic headers, row identity, exact values, current-user context, and responsive priority
Pagination	Current/adjacent pages, ellipsis semantics, and previous/next actions
StatusMessage	Neutral title/body with approved Atlassian semantic marker, boundary, icon, and recovery
FormField	Persistent label, help/constraint, value and availability state, associated error, and safe input preservation
Disclosure	Keyboard-operable reveal of secondary explanation or controls
Overlay	Family contract that selects the correct popover/menu/dialog semantics, focus, dismissal, geometry, and motion rather than one universal component
OrdinaryDataChart	Primer anatomy, exact-value interaction, non-color distinction, and same-data semantic table

Visible icon controls use Lucide. Icon-only controls need an accessible name and approved target. A local alias may not add a color, radius, shadow, or motion outside document 24.

FormField is a shared responsibility across Settings and onboarding, not a visual field template. It covers persistent programmatic labels, help and constraints, disabled/read-only/busy state where applicable, associated validation feedback, and preservation of valid input after a failed submission. Native controls remain the default where they satisfy the approved semantics.

Overlay is an interaction family, not permission to implement one polymorphic overlay for every case. Each use must choose the correct dialog, popover, disclosure, or ordinary navigation semantics from its owning page brief.

Approved reusable patterns - FPR-04

Pattern	Contract
Discovery and refinement	Search first; expose committed result status; disclose filters; retain loading/empty/error recovery and restorable state.
Focused entity detail	Lead with canonical identity and current task, then progressively disclose records, comparison, and explanation.
Dense comparison	Preserve table relationships, scan order, current-user context, exact values, and narrow priority without page-level two-dimensional scrolling.
Home task routing	One clear search entry, restrained peer destinations, routine product tasks before editorial content, and explicit service/search failure.
Feedback and recovery	Explain in neutral typography, attach the approved severity roles, and provide one clear recovery action when available.
Responsive adaptation	Recompose from content needs; validate 390px, reflow at 320px, and use wide space for comparison or parallel reading.

These patterns preserve the current approved page briefs. They are not final templates, wireframes, or permission to copy old specimen controls. There is no viewer/editor template in the 2.0 package.

Promotion prohibitions

- No Tailwind palette, starter card, sample gradient, radius, shadow, or implicit transition becomes a Foundation value.
- No new hybrid neutral, chromatic step, radius, shadow, or timing may be invented.
- Chroma remains a narrow semantic exception, not decoration.
- Dark containers do not receive persistent white outlines.
- Block 5 does not implement production code or authorize viewer/editor changes.

Block 5 decision log

ID	Entry	Status
FPR-01	Use one self-contained artifact only as a collision/regression harness for approved ordinary UI.	Accepted supporting evidence - 2026-08-11
FPR-02	Adopt version-pinned, first-party self-hosted Pretendard JP variable dynamic-subset delivery and official fallback order.	Approved - 2026-08-11
FPR-03	Promote the approved document 24 contracts together as Foundation v0.1 without reopening source decisions.	Approved - 2026-08-11
FPR-04	Adopt the reusable aliases and patterns above, adding FormField, narrowing MusicEntityHeader, and treating Overlay as a family contract.	Approved - 2026-08-11
FPR-05	Keep the complete viewer/editor outside regression, reusable UI, and downstream template work.	Locked approved boundary

Block 5 completion

Block 5 is complete. The controlled harness passed its stated checks, FPR-02 approved the production font-delivery contract, FPR-03 promoted Foundation v0.1, and FPR-04 approved the lean reusable ordinary-UI package on 2026-08-11.

Do not reopen Block 5 from an older proposal, specimen, checklist, or deleted comparison. Only a precise acceptance failure or a new explicit user decision may reopen a named contract. There is no viewer/editor follow-up.

NosLog 2.0 Downstream Design and Implementation Handoff

docs/design/64-downstream-design-implementation-handoff.md

Document control

- Status: Approved – Block 6 complete
- Language: English canonical source
- Last updated: 2026-08-11
- Milestone: NosLog 2.0 Design Guide v0.1
- Scope authority: [document 57](#)
- Foundation authority: [document 24](#)
- Foundation provenance: [document 25](#)
- Reusable ordinary UI: [document 63](#)
- Absolute preservation boundary:

[document 07](#)

- Milestone export:

[@@NOSLOGTOKEN0@@](#)

Purpose

This document is the single downstream entry point for the approved NosLog 2.0 design guide. It indexes rather than duplicates the exact product, page, Foundation, and acceptance contracts in the active English sources.

It introduces no new product feature, hierarchy, interaction, visual token, page family, or viewer/editor work. If this summary appears to conflict with a linked authority, the authority order below governs and the conflict must be reported.

Authority and conflict handling

Use this order:

1. the user's latest explicit decision;
2. root AGENTS.md, especially the viewer/editor boundary and process rules;
3. root README.md and [document 57](#);
4. [document 07](#) for the locked chart

experiences;

5. [document 24](#) for normative Foundation values;
6. [document 25](#) for source and decision history;
7. the relevant approved Page Brief;
8. [document 22](#) and

[document 63](#).

Do not resolve a conflict by copying the current visual implementation, the legacy NOSTORY Figma, a deleted comparison, the regression-harness composition, Tailwind defaults, or a downstream designer's preference. Stop and request a guide or design revision when a material conflict remains.

Three-stage delivery boundary

Stage	Owner	Required result	Prohibited expansion
Guide packaging	This Codex session	Complete editable authority, downstream index, QA contract, and versioned milestone export	Final page suite or production implementation
High-fidelity design	Claude Design	Final website and Figma design inside the approved product, Foundation, state, responsive, accessibility, and localization contracts	New product behavior, omitted required state, viewer/editor redesign, or unsourced token
Production implementation	Later Codex session	Map the approved guide and Claude output to the existing stack, code, data, and verified browser behavior	Silently resolving guide/design conflicts or changing the locked experiences

Active source index

Source	Governing role
01 - Current product audit	Current feature, route, data, permission, component, browser, and administrator inventory
02 - Information architecture	Page families, navigation relationships, route ownership, and important flows
03-19 - Page and shared briefs	Required purpose, hierarchy, actions, state, responsive behavior, accessibility, localization, mapping, and acceptance by family
07 - Viewer/editor preservation	Absolute exclusion from ordinary 2.0 design and implementation
22 - Cross-cutting authority	Shared principles, accessibility floor, responsive rules, and exception governance
24 - Foundation v0.1	Exact normative typography, spacing, layout, color, material, iconography, motion, and ordinary data-visualization contracts
25 - Foundation provenance	Source versions, approvals, rejections, and supersessions; not a substitute token ledger
57 - Remaining-work audit	Six-block progress and obsolete-work disposition
63 - Reusable ordinary UI	Approved responsibility aliases, patterns, and integrated regression evidence
This document	Downstream reading order, screen coverage, mapping, QA, and export manifest

Screen and page-family requirements

The linked brief is the full contract. The summary below identifies the required downstream design output and the acceptance risk that must remain visible.

Family or surface	Routes or boundary	Full authority	Required downstream representation	Critical implementation and QA ownership
Shared ordinary shell	Locale-prefixed ordinary user pages	15 , 19	Restrained header, account state, one More trigger, compact modal, wide popover, footer, skip path, scroll behavior	Stable taxonomy and source order, modal/popover semantics, focus return, compact hide/reveal, persistent wide header
Home	/ko, /ja, /en	03	Search-first entry, eight equal peer destinations, bounded announcements, official-news fallback	IME-safe preview, stale-response rejection, 3 × 3 compact and 4 × 2 fitting geometry, all content/service states
Music and Chart discovery	/[[locale]/music with Music or Chart scope	04	One shared search surface, scope-aware results, staged compact filters, visible wide refinement, explicit continuation	URL/history restoration, exact filter logic, IME timing, finite measured timeout, no infinite scroll, direct viewer entry without target changes
Music detail	/[[locale]/music/[index] /[[difficulty]	05	Stable Music/chart context, four content areas, resource actions, record/ranking/tier/evaluation and community evidence	Atomic target state, freshness/retry rules, exact score/tie/tier meanings, eligibility, semantic tables, return focus, viewer link only

Family or surface	Routes or boundary	Full authority	Required downstream representation	Critical implementation and QA ownership
Tier planning	/[[locale]]/tiers	06	Mode/goal hierarchy, band navigation, staged compact filters, compact/detailed result presentations	Official/community separation, restorable state, exact per-chart context, no voting or automatic reordering inside Tier cards
Chart viewer and editor	Existing routes and implementation only	07	No new Claude Design screen, specimen, component, annotation, or Foundation application	Preserve entire page, DOM, controls, accessibility, responsive behavior, renderers, palettes, geometry, animation, audio, and editor model
Global rankings	/[[locale]]/rankings	08	Mode/metric/region hierarchy, integrated player identity, exact values, conditional personal position, 25-row pagination	Shared-rank semantics, population truth, semantic table relationships, responsive priority, current-user context without duplication
Public profile	/[[locale]]/profile/[[id]] plus complete Best/Recent destinations	09	Public performance identity, mode-scoped summary, progress, five-item previews, full-list access, owner sync context, public-safe share	Five privacy groups, no fabricated Recital Rating, exact retention, cache invalidation, hidden-state and owner/public separation
Bingo	/[[locale]]/bingo, /[[locale]]/bingo/[[id]]	10	Permanent catalog, central 5 × 5 board, synchronized mission list, reward meaning, signed-in manual completion and reset	No live-state fabrication or automatic completion, public signed-out reference, checkbox semantics, save rollback, localized mission provenance
Exams	/[[locale]]/exams, /[[locale]]/exams/[[slug]]	11	Basic/Recital/Event reference, official requirements, supported analysis, proof and certification states	Event restrictions, private one-image evidence, player-name comparison, orphan cleanup, retention, no viewer/editor or Recital-renderer changes
Arcade discovery and detail	/[[locale]]/gamecenter, /[[locale]]/gamecenter/[[arcade-slug]]	12	Synchronized list/map discovery, explicit nearby/area actions, stable detail, cabinet facts, verification, directions, bounded reporting	No automatic location prompt, one result truth, small-sample privacy, map-independent access, international address/time/currency semantics
Data Sync	/[[locale]]/bookmarklet	13	First-use and returning hierarchy, exact scope/coverage, processing and recovery, bounded history, text-led media, token invalidation	No fake progress, raw diagnostics, token or credential leakage; exact timing, partial result, timeout, retry, security and privacy boundaries
Announcements	/[[locale]]/announcements, /[[locale]]/announcements/[[publicSlug]]	14	Localized archive and detail, two distinct Home roles, chronological density, restricted Markdown, 20-item URL pagination	Stable multilingual identity and slugs, publication/expiry/history truth, no X mixing, translation completeness, no client-JS dependency
Settings and account	/[[locale]]/settings; compatibility redirect from /[[locale]]/profile/settings	16	Public overview, guest preferences, authenticated categories, focused detail, five positive privacy controls, deletion safeguards	Persistence ownership, schema/OAuth/storage migration, field semantics, dirty/save/error states, reauthentication and idempotent deletion
Authentication and onboarding	Localized Login, Discord callback recovery, onboarding, and incomplete-profile gate	17	Minimal auth shell, one Discord action, public-browse exit, destination context, two-field onboarding, identity confirmation	Safe return, OAuth state/security, least identify scope, no password/provider invention, preserved guest preferences and recovery
Privacy and data practices	/[[locale]]/privacy and stable version history	18	At-a-glance layer plus complete policy, TOC, public-data consequences, provider/retention detail, print and release-blocker visibility	Code-to-policy audit, production vendor evidence, legal review, human translation, orphan/backup deletion truth; never style a blocker as resolved
System recovery	Not found, recoverable page error, fatal root error, planned Maintenance	19	Four distinct meanings with the correct ordinary or minimal shell and truthful actions/timing	Next.js/proxy ownership, HTTP/cache semantics, first-paint locale, retry/context preservation, no raw diagnostics or invented estimate
Administrator product	Existing /admin/* inventory	01	No broad 2.0 redesign output	Functional maintenance only unless separately authorized; current chart editor is additionally locked by document 07

Foundation application contract

Claude Design and later implementation must:

1. map every ordinary Light, Dark, and System appearance to the exact semantic roles in document 24;
2. keep Adobe Spectrum S2 as the exclusive neutral primitive source and preserve exact published values;



- 3. keep Radix Indigo reserved without inventing a current alias;
- 4. keep the identity achromatic and the rare filled primary action neutral;
- 5. keep Atlassian feedback chroma, Spectrum difficulty, SAP local-data, and Radix judgement color inside their approved semantic boundaries;
- 6. use Lucide for eligible visible ordinary-UI icons and Atlassian motion roles with the approved reduced-motion behavior;
- 7. use Primer ordinary data-visualization anatomy with exact-value and semantic-table access;
- 8. use the approved first-party, version-pinned Pretendard JP delivery contract; and
- 9. never apply any of these rules inside the locked chart viewer/editor.

Tailwind may implement an approved rule. It may not supply colors, templates, radii, shadows, gradients, or component appearance.

Reusable responsibility mapping

These aliases are responsibilities, not a demand for one component per row or a license to invent styling. The exact contract remains in document 63.

Responsibility group	Approved aliases	Primary consumers
Shell and navigation	AppHeader, Overlay, Disclosure	Shared shell, Home, Settings, auth, recovery
Search and refinement	SearchField, ContentScopeSwitch, FilterSortControl, ViewModeSwitch	Home, discovery, tiers, rankings, arcade
Entity and result reading	ResultCollection, MusicEntityHeader, DifficultySelector, MetricSummary	Discovery, Music detail, tiers, profile, exams
Exact dense data	DataTable, Pagination, OrdinaryDataChart	Music detail, rankings, profile, announcements, privacy
Forms and feedback	FormField, StatusMessage	Settings, auth, Bingo, exams, arcade reports, Data Sync, recovery

Overlay is a family contract. Choose dialog, popover, disclosure, listbox, or ordinary navigation semantics from the owning brief; do not build one universal polymorphic overlay. MusicEntityHeader is Music-scoped and must not become an unsupported generic entity model.

Implementation mapping contract

The future implementation session must begin with a code-and-design reconciliation, not immediate styling.

Mapping layer	Required action	Acceptance evidence
Routes and history	Preserve approved public routes, add approved detail/list destinations and compatibility redirects, normalize query/fragment state, and retain safe return	Direct entry, reload, Back/Forward, share URL, locale switch, Login/onboarding return
Data and schema	Compare every brief’s Implementation Mapping with current Prisma, queries, actions, caches, uploads, and retention jobs before migration	Migration plan, fixtures, authorization tests, cache invalidation, privacy data inventory
Authentication and permission	Centralize Discord, incomplete-profile, owner/public, moderator, signed-out, and destructive boundaries	Server authorization plus browser state coverage; no disabled fake capability
Localization and content	Implement complete KO/JA/EN UI and reviewed content, preserve canonical NOSTALGIA identifiers, and use locale-aware number/date/address formatting	Three-locale fixture parity, mixed-script layout, fallback provenance, metadata and lang checks
Foundation tokens	Map document 24 semantic roles to code tokens without Tailwind or local visual invention	Exact-value token audit in Light/Dark/System and component-state review
Reusable UI	Reuse approved responsibilities where behavior is actually shared; keep page-specific domain contracts local	Component tests plus representative complete-task browser tests

Mapping layer	Required action	Acceptance evidence
Async and recovery	Preserve request identity, stale-response rejection, local busy boundaries, retry, restoration, and status announcements	Reordered-response, timeout, cancellation, partial, retry, and repeated-failure tests
Privacy and security	Complete document 18 release blockers with production and qualified-review evidence	No release while a blocker is unresolved; network, storage, deletion, provider, and policy parity checks
Viewer/editor exclusion	Identify and protect all relevant routes/files before broad shell or token migration	No diff or runtime change inside the locked experiences except separately authorized maintenance

Exact source files and downstream code changes remain in each Page Brief's Implementation Mapping section. This index does not replace them.

Current code-entry inventory

This inventory gives the future implementation session a starting point. It is not a complete change list and does not make current composition authoritative.

Family	Current code entry points to inspect first
Shared shell	app/(navigation)/layout.tsx, components/layout/header.tsx, headerNavigation.tsx, scrollAwareHeader.tsx, footer.tsx, skipLink.tsx
Home	app/(navigation)/(home)/page.tsx, Home actions, official-news and feedback components
Discovery	app/(navigation)/music/page.tsx, data.ts, query.ts, schema.ts, components/music/musicSearch.tsx, musicResults.tsx, and components/music/search/*
Music detail	app/(navigation)/music/[index]/[difficulty]/page.tsx, data.ts, loadMusicDetail.ts, actions/schema, and ordinary components/music/* detail/record/ranking/tier/evaluation modules
Tiers	app/(navigation)/tiers/page.tsx, data.ts, legacy compatibility route, and components/tiers/*
Rankings	app/(navigation)/rankings/page.tsx, app/api/rankings/route.ts, lib/rankings.ts, and components/rankings/*
Profile	app/(navigation)/profile/[id]/*, components/profile/dashboard/*, Profile actions/data, and public share-card route
Bingo	app/(navigation)/bingo/*, components/bingo/*, and Bingo actions/data
Exams	app/(navigation)/exams/*, components/exams/*, proof actions, and current moderator-review implementation for functional integration only
Arcades	app/(navigation)/gamecenter/*, components/gamecenter/*, lib/arcades.ts, lib/arcadeDetails.ts, and lib/arcadeRegions.ts
Data Sync	app/(navigation)/bookmarklet/*, components/bookmarklet/*, lib/bookmarklet.ts, and the receive-data API boundary
Announcements	lib/announcements.ts, Home announcement reads, and current administrator publication flow; approved public Archive/Detail routes are new work
Settings	Current app/(navigation)/profile/settings/* and components/profile/* settings/security modules; approved /[locale]/settings is the new canonical family
Authentication	app/(auth)/layout.tsx, Login, Discord start/complete, onboarding routes/actions, components/onboarding/onboardingForm.tsx, and session/proxy boundaries
Privacy	app/(navigation)/privacy/page.tsx, lib/privacyRetention.ts, Blob/session/routing/proxy sources, provider settings, and policy-version data to be added
Recovery	app/not-found.tsx, app/global-error.tsx, app/maintenance/page.tsx, shared error boundaries, and proxy.ts
Viewer/editor	Resolve the current target routes/files only to protect them from the migration. Do not use them as ordinary design input or add them to a redesign work list.

Broad administrator redesign remains excluded even where an approved public workflow must continue to integrate with an existing moderator action.

Responsive and content acceptance matrix

Every applicable ordinary surface must be evaluated against its actual content and container, not only device names.

Dimension	Minimum Block 6 handoff requirement
Compact	Representative 390px design plus successful one-dimensional reflow at 320 CSS px
Intermediate	Test widths where the longest KO/ JA/EN labels, controls, tables, cards, or panels force composition changes
Wide	Use additional space for comparison, analysis, parallel reading, maps, or settings navigation; do not enlarge a phone column
Text growth	Verify 200% text resize and 400% zoom where applicable; no clipped focus, hidden action, or obscured software-keyboard target
Content stress	Use real long titles, mixed scripts, large values, zero/empty/partial/extreme data, long recovery text, and unavailable resources
Orientation and input	Support keyboard, pointer, touch, safe areas, short viewport heights, and orientation changes where the task permits
Two-dimensional data	Contain only inherently dimensional data, preserve page reflow, and provide a semantic summary/table
Motion	Preserve immediate state meaning under prefers-reduced-motion; never rely on animation for availability or completion

No breakpoint is approved merely because a framework supplies it. Document a content-fit reason for every layout transition. The approved fixed thresholds already recorded in a Page Brief remain authoritative for that exact pattern.

State and interaction acceptance matrix

Each family must cover only applicable states, but no required state may be omitted from Claude Design merely because implementation will occur later.

State class	Required evidence
Request lifecycle	Initial, retained/revalidation, loading, slow response, success, empty, partial, stale, failure, retry, cancellation, and out-of-order response where applicable
Identity and permission	Signed out, incomplete profile, signed in, owner, public viewer, moderator, unavailable action, and permission loss during a task
Form and mutation	Pristine, dirty, invalid, busy, success, recoverable failure, duplicate prevention, rollback, destructive confirmation, and focus restoration
Data meaning	Unknown, not published, not listed, not eligible, hidden by privacy, absent optional value, zero value, and unavailable external resource remain distinct
Navigation	Direct entry, source-aware entry, reload, Back/Forward, locale change, Login/onboarding round trip, pagination/continuation, and meaningful focus destination
External dependency	X, map, video, image, Discord, provider link, or network failure leaves first-party purpose and recovery intact
System recovery	Not found, recoverable page error, fatal root error, and Maintenance retain different shell and protocol meanings

Accessibility and localization release floor

The target is WCAG 2.2 AA. Automated checks are necessary but insufficient.

- Use native semantics first; custom composites require complete name, role, value, state, keyboard, focus, pointer, touch, and announcement behavior.
- Keep one logical source/focus order across responsive compositions, with skip paths, visible keyboard focus, no trap, and no obscured focus.
- Do not communicate status, difficulty, judgement, FAST/SLOW, chart series, selection, error, or availability through color alone.
- Verify forced colors/high contrast, color-disabled and color-vision-deficiency review,

reduced motion, screen-reader navigation, touch targets, text spacing, and zoom.

- Validate Korean, Japanese, English, and mixed-script line breaking, punctuation, canonical domain labels, dates, values, units, addresses, and fallback language.
- Keep nontrivial visualizations connected to exact values and equivalent semantic data.

Browser and verification coverage

The future implementation release matrix must include:

1. current stable Chromium, Firefox, and Safari on representative desktop systems;
2. representative iOS Safari and Android Chromium touch behavior;
3. 320px, 390px, intermediate content-fit transitions, and wide analytical layouts;
4. KO/JA/EN route, metadata, content, search, form, error, and return-path coverage;
5. keyboard-only and screen-reader coverage for primary tasks and every custom composite;
6. Light, Dark, System, forced-colors/high-contrast, reduced-motion, and text-growth checks;
7. network delay, reordered requests, provider failure, image/media failure, and offline-adjacent recovery where applicable;
8. no unexpected console, hydration, uncaught runtime, authorization, privacy, or horizontal-overflow error; and
9. explicit regression proof that the chart viewer/editor remained unchanged.

Each Page Brief contains the exact route, fixture, state, and acceptance additions for its family. Those requirements are cumulative with this floor.

Privacy release blockers

The design experience is approved, but NosLog 2.0 may not release until document 18 records evidence for:

- legally sufficient operator/controller identity and contact;
- legal bases, consent points, complaint channels, rights timing, and jurisdiction;
- exact Vercel logs and retention;
- exact Neon history, backup, deletion, region, and processing facts;
- public/private Blob regions, cache and deletion lifecycle, and abandoned-upload cleanup;
- the processor/subprocessor, country, transfer, and retention register;
- X/Kakao/other nonessential external-load consent or notice requirements;
- legally reviewed Korean/Japanese/English parity and any governing-language clause;

and

- a legally adequate, non-dark-pattern fourteen-and-older account mechanism.

The cancelled user chart-contribution proposal is not a blocker, screen, component, legal-copy task, or implementation task.

Claude Design handoff

Claude Design must produce the final high-fidelity website and Figma design, including the applicable ordinary page families, required states, content-driven compact and wide adaptations, reusable responsibilities, and Foundation variables/components.

For every page family, Claude Design must:

1. cite the governing Page Brief and preserve its source order, hierarchy, action, state, domain, privacy, and responsive contract;
2. use realistic KO/JA/EN content and the representative/edge fixtures in that brief;
3. show enough state and responsive evidence that implementation does not need to invent behavior;
4. map visible values to document 24, not Tailwind or a new hybrid;
5. mark any unresolved implementation measurement as a measured handoff item rather than inventing a product rule; and
6. report any conflict or missing required state before finalizing the affected design.

Claude Design must not:

- use the legacy NOSTORY Figma as current authority;
- copy the integrated regression harness as page composition;
- redesign, recreate, annotate, or apply Foundation to the chart viewer/editor;
- add a new user chart-contribution/editor flow;
- remove a verified function, state, locale, privacy control, or recovery path;
- turn release blockers into reassuring finished UI; or
- present arbitrary visual preference as a NosLog rule.

Future Codex implementation handoff

Before coding, the later Codex session must:

1. reread root AGENTS.md, README.md, this document, documents 07, 22, 24, 25, 57, and 63, then the owning Page Brief;
2. inspect the current code, schema, tests, runtime UI, and final Claude Design output;
3. produce a guide/design/code reconciliation report and stop on material conflicts;
4. identify all locked viewer/editor routes and files before global shell, font, token, or component migration;
5. plan schema, route, content, cache, privacy, localization, and test changes by page family; and
6. implement in small reviewable units with browser verification after each meaningful unit.

Implementation is not complete until applicable lint, typecheck, unit, integration, build, migration, E2E, accessibility, responsive, locale, privacy, browser, and viewer/editor-preservation checks pass.

Milestone PDF assembly manifest

The versioned PDF should package the editable authority in this reading order :

1. cover, version, date, status, and authority order ;
2. product context and current-product audit summary ;
3. information architecture and page-family map ;
4. approved Page Briefs, with document 07 presented as a preservation contract ;
5. cross-cutting principles and exception governance ;
6. Foundation v0.1 normative rules and concise provenance/decision history ;
7. reusable ordinary-UI package and regression findings without treating the harness

as final composition ;

8. this downstream screen, mapping, QA, and escalation package ; and
9. visible privacy release-blocker register and milestone limitations.

Do not include deleted comparison documents, Korean companion files, historical S plans, rejected over-accented examples, or a viewer/editor redesign specimen.

The approved milestone package is one English PDF. Canonical Markdown remains the editable source of truth ; the PDF is a versioned reading and distribution artifact.

Milestone PDF editorial system

Before choosing the PDF treatment, the comparison covered nineteen independent official or first-party systems and manuals: Adobe Spectrum, Atlassian, IBM Carbon, Microsoft Fluent, Material Design, Shopify Polaris, GitHub Primer, SAP Fiori, Salesforce Lightning, Apple Human Interface Guidelines, GOV.UK, USWDS, NHS, Ant Design, W3C Design System, Government of Canada, VA, NSW, and the NASA Graphics Standards Manual. The comparison evaluated cover and chapter hierarchy, contents and navigation, dense table treatment, technical insets, status/callout notation, accessibility, and long-form maintenance rather than brand similarity alone.

ED-03 · GitHub Primer is approved for the PDF editorial system. Apply the current [Primer light functional colors](#) exactly to the distribution artifact :

Editorial role	Primer functional role	Published value
Paper	bgColor-default	#FFFFFF
Ink	fgColor-default	#1F2328
Muted text	fgColor-muted	#59636E
Inset surface	bgColor-muted	#F6F8FA
Rule/boundary	borderColor-default	#D1D9E0
Link/notation	fgColor-accent	#0969DA

Use the accent only for links, chapter markers, and restrained document notation. This editorial mapping is not a NosLog product primitive, semantic role, component alias, or signature-color decision. It does not override document 24, transfer to Claude Design or production UI, or apply to the locked chart viewer/editor.

The approved export path is output/pdf/noslog-2.0-design-guide-v0.1.pdf. The export must retain searchable text, document metadata, linked contents, and PDF bookmarks, then be rendered page by page for blank-page, clipping, overflow, and visual consistency review.

Block 6 decision log

ID	Decision	Status
HND-01	Use this one English editable document as the downstream index rather than creating several overlapping handoff files.	Approved – 2026-08-11
HND-02	Carry every approved page family through the screen, mapping, state, responsive, accessibility, localization, and browser matrices above.	Approved – 2026-08-11
HND-03	Keep the viewer/editor and administrator redesign outside the downstream ordinary-UI package.	Inherited approved boundary
HND-04	Preserve Privacy release blockers while removing the superseded chart-contribution blocker.	Inherited approved correction
HND-05	Export one English milestone PDF using ED-03 · GitHub Primer as artifact-only editorial notation.	Approved – 2026-08-11

Block 6 is complete when the linked PDF passes the export checks above. All six top-level design-guide blocks are then complete; privacy, legal, production-evidence, downstream visual-design, and implementation obligations remain release or later-stage work rather than additional design-guide blocks.