Variables[index range]
Events
Functions
explanation,
condition, frequency of event,
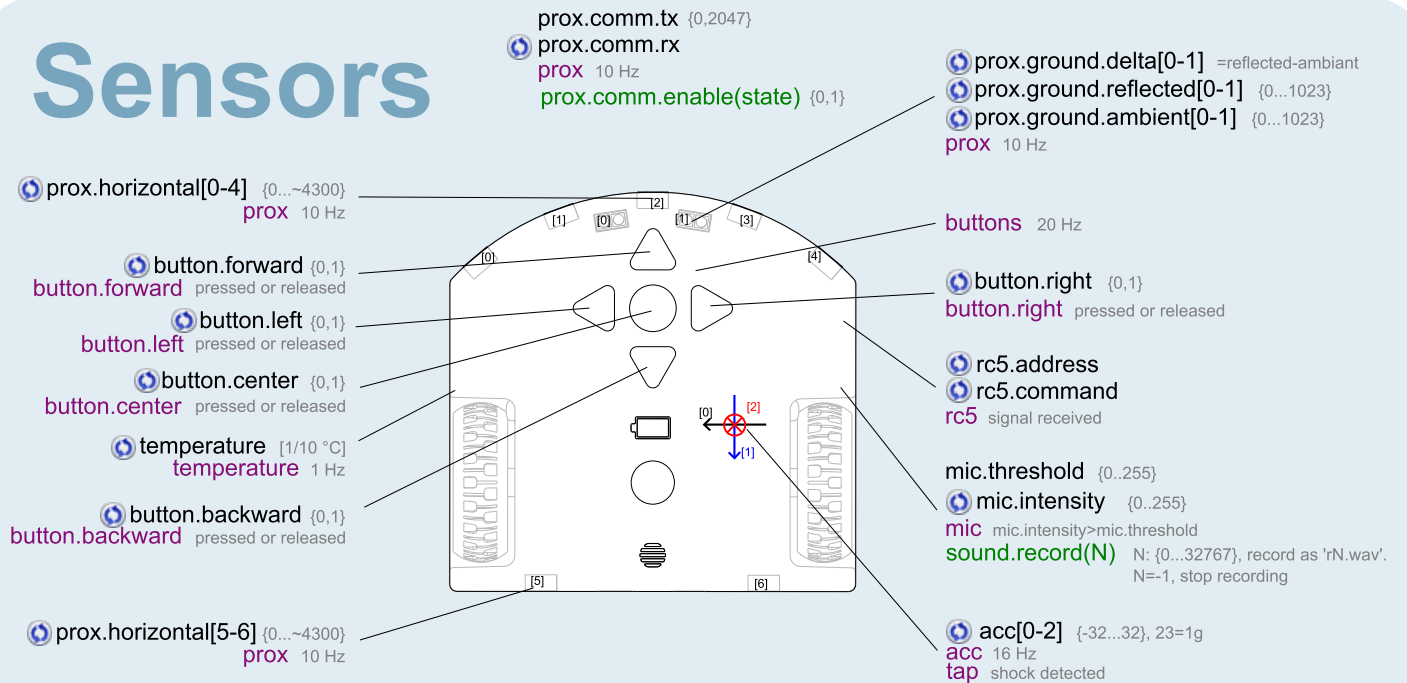{range}
[unit]
⊙ variable updated automatically

timer.period[0-1] [ms]
timer0 every timer.period[0] ms
timer1 every timer.period[1] ms

Sensors

prox.comm.tx {0,2047}
⊙ prox.comm.rx
prox 10 Hz
prox.comm.enable(state) {0,1}

⊙ prox.ground.delta[0-1] =reflected-ambiant
⊙ prox.ground.reflected[0-1] {0...1023}
⊙ prox.ground.ambient[0-1] {0...1023}
prox 10 Hz

⊙ prox.horizontal[0-4] {0...~4300}
prox 10 Hz

buttons 20 Hz

⊙ button.forward {0,1}
button.forward pressed or released

⊙ button.right {0,1}
button.right pressed or released

⊙ button.left {0,1}
button.left pressed or released

⊙ button.center {0,1}
button.center pressed or released

⊙ rc5.address
⊙ rc5.command
rc5 signal received

⊙ temperature [1/10 °C]
temperature 1 Hz

mic.threshold {0..255}
⊙ mic.intensity {0..255}
mic mic.intensity>mic.threshold
sound.record(N) N: {0...32767}, record as 'rN.wav'.
N=-1, stop recording

⊙ button.backward {0,1}
button.backward pressed or released

⊙ prox.horizontal[5-6] {0...~4300}
prox 10 Hz

⊙ acc[0-2] {-32...32}, 23=1g
acc 16 Hz
tap shock detected

Actuators

leds.prox.h(led0, led1, led2, led3, led4, led5, led6, led7) {0...32}

leds.prox.v(led0, led1) {0...32}

leds.buttons(led0, led1, led2, led3) {0...32}

leds.rc(led) {0...32}

leds.circle(led0, led1, led2, led3, led4, led5, led6, led7) {0...32}

leds.bottom.right(red, green, blue) {0...32}

leds.bottom.left(red, green, blue) {0...32}

leds.sound(led) {0...32}

leds.temperature(red, blue) {0...32}

motor.right.target desired speed {-500...500}, 500 = ~20 cm/s
⊙ motor.right.speed actual speed
⊙ motor.right.pwm motor command
motor 100 Hz

motor.left.target desired speed {-500...500}, 500 = ~20 cm/s
⊙ motor.left.speed actual speed
⊙ motor.left.pwm motor command
motor 100 Hz

sound.finished a sound finished playing
sound.system(N) N: {0...7}, play system sound N. N=-1, stop playing
sound.freq(Hz,ds) [Hz],[1/60 s]
sound.wave(wave[142]) change primary wave, wave[i] : {-128...127}
sound.play(N) N: {0...32767}, play 'pN.wav'. N=-1, stop playing
sound.replay(N) N: {0...32767}, replay 'rN.wav'. N=-1, stop playing

leds.top(red, green, blue) {0...32}

leds.prox.h(led0, led1, led2, led3, led4, led5, led6, led7) {0...32}