Neutrino Flavor Conversions in Dense Media: Matter Stimulation and Dispersion Relations

PhD Defense
Lei Ma
Supervisor: Huaiyu Duan

Outline

Outline for Section 1

What are Neutrinos?

Elementary particles.
Source: symmetrymagazine.org

Neutrinos are

- fermions,
- electrically neutral,
- three flavors,
- non-vanishing mass.

Adapted from Olga Mena &
Stephen Parke (2004)

What are Neutrinos?

Elementary particles.
Source: symmetrymagazine.org

Neutrinos are

- fermions,
- electrically neutral,
- three flavors,
- non-vanishing mass.
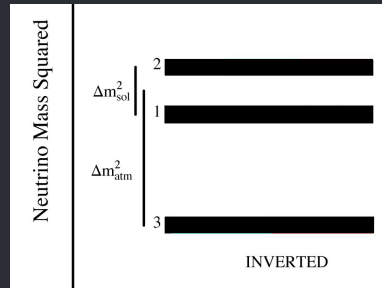
Adapted from Olga Mena &
Stephen Parke (2004)

Why Do Neutrinos Oscillate?

Two flavor senario

Flavor states are different from mass states.

$$\begin{pmatrix} \psi_e \\ \psi_\mu \end{pmatrix} = \begin{pmatrix} \cos\theta_v & \sin\theta_v \\ -\sin\theta_v & \cos\theta_v \end{pmatrix} \begin{pmatrix} \psi_1 \\ \psi_2 \end{pmatrix}$$

θ_v: vacuum mixing angle

Why Do Neutrinos Oscillate?

Equation of Motion

$$i\partial_x \begin{pmatrix} \psi_e \\ \psi_\mu \end{pmatrix} = \mathbf{H} \begin{pmatrix} \psi_e \\ \psi_\mu \end{pmatrix}$$

Why Do Neutrinos Oscillate?

Equation of Motion

$$i\partial_x \begin{pmatrix} \psi_e \\ \psi_\mu \end{pmatrix} = \mathbf{H} \begin{pmatrix} \psi_e \\ \psi_\mu \end{pmatrix}$$

$$\mathbf{H} = \frac{\omega_v}{2} \left(-\cos 2\theta_v \sigma_3 + \sin 2\theta_v \sigma_1 \right)$$

- Mixing angle θ_v
- Oscillation frequency:

$$\omega_v = \frac{\delta m^2}{2E} = \frac{m_2^2 - m_1^2}{2E}$$

Flavor Isospin

Hamiltonian: $\mathbf{H} = -\dfrac{\vec{\sigma}}{2} \cdot \vec{H}$

Flavor isospin: $\vec{s} = \Psi^{\dagger} \dfrac{\vec{\sigma}}{2} \Psi$

Electron flavor survival probability:

$$P = \frac{1}{2} + s_3$$

Equation of motion:

$$\dot{\vec{s}} = \vec{s} \times \vec{H}$$

electron flavor   muon flavor

Flavor Isospin

Hamiltonian: $\mathbf{H} = -\dfrac{\vec{\sigma}}{2} \cdot \vec{H}$

Flavor isospin: $\vec{s} = \Psi^\dagger \dfrac{\vec{\sigma}}{2} \Psi$

Electron flavor survival probability:

$$P = \frac{1}{2} + s_3$$

Equation of motion:

$$\dot{s} = \vec{s} \times \vec{H}$$

Vacuum oscillation Hamiltonian

$$\frac{\omega_v}{2}\left(-\cos 2\theta_v \sigma_3 + \sin 2\theta_v \sigma_1\right)$$

$$\rightarrow \cos 2\theta_v \begin{pmatrix} 0 \\ 0 \\ \omega_v \end{pmatrix} - \sin 2\theta_v \begin{pmatrix} \omega_v \\ 0 \\ 0 \end{pmatrix}$$

Outline for Section 2
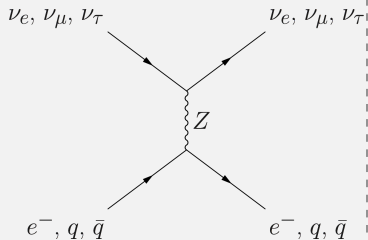
Neutral current interaction between ν_e, ν_μ, ν_τ, and e^-.

Charged current interaction between ν_e and e^-

Hamiltonian with matter interaction in flavor basis ($\omega_v = \delta m^2 / 2E$):

$$\mathbf{H} = \frac{\omega_v}{2}\left(-\cos 2\theta_v \sigma_3 + \sin 2\theta_v \sigma_1\right) + \frac{\lambda(x)}{2}\sigma_3$$

- Vacuum Hamiltonian
- Matter interaction
- $\lambda(x) = \sqrt{2} G_F n_e(x)$

Matter Interaction

$$\mathbf{H} = \frac{\omega_{\mathrm{v}}}{2}\left(-\cos 2\theta_{\mathrm{v}}\sigma_3 + \sin 2\theta_{\mathrm{v}}\sigma_1\right) + \frac{\lambda(x)}{2}\sigma_3$$

$$\rightarrow \omega_{\mathrm{v}}\begin{pmatrix} -\sin 2\theta_{\mathrm{v}} \\ 0 \\ \cos 2\theta_{\mathrm{v}} \end{pmatrix} + \begin{pmatrix} 0 \\ 0 \\ -\lambda(x) \end{pmatrix}$$

$$= \vec{H}_{\mathrm{v}} + \vec{H}_{\mathrm{m}}(x)$$
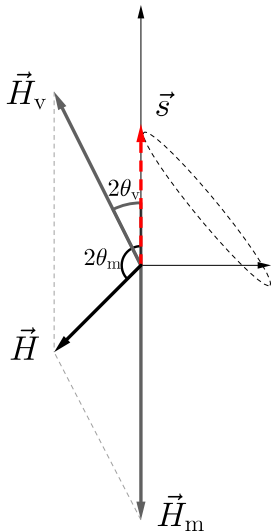
Electron flavor survival probability

$$P = \frac{1}{2} + s_3$$

Oscillation frequency in **vacuum**:

$$\omega_v = |\vec{H}_v|$$

Oscillation frequency in **matter**:

$$\omega_m = |\vec{H}|$$

Flavor states and mass states in matter

$$\begin{pmatrix} \psi_e \\ \psi_\mu \end{pmatrix} = \begin{pmatrix} \cos\theta_m & \sin\theta_m \\ -\sin\theta_m & \cos\theta_m \end{pmatrix} \begin{pmatrix} \psi_L \\ \psi_H \end{pmatrix}$$

Adiabatic matter density change

Large density

MSW Effect

Adiabatic matter density change

Large density · Lower density

Adiabatic matter density change
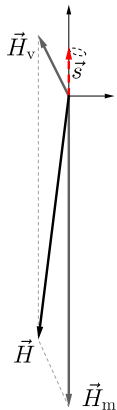
Large density
Lower density
Low density

MSE Resonance
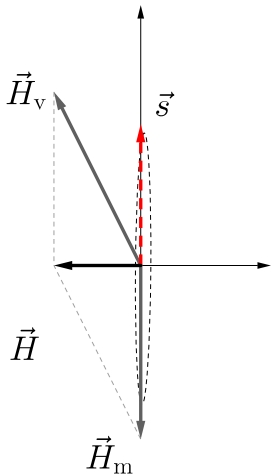
- Maximum possible flavor transition probability amplitude
- MSW Resonance
- A specific matter density

$$\sqrt{2}G_F n_e \equiv \omega_v \cos 2\theta_v$$

Supernova Matter Density Profile

Astrophysical environments: supernovae, accretion disks etc
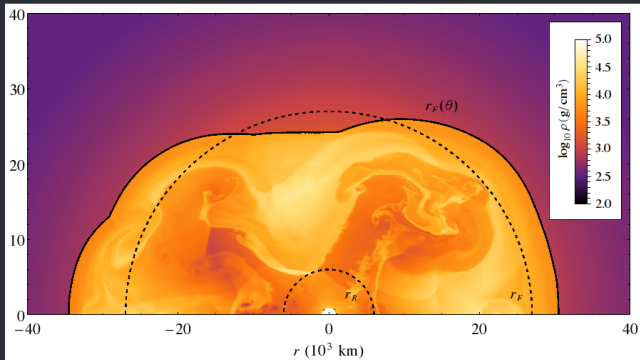
Supernova shock and turbulence. E. Borriello, et al (2014)

Neutrino Flavor Conversions in Matter

$$\lambda(x) = \lambda_0$$

Stimulated Oscillations
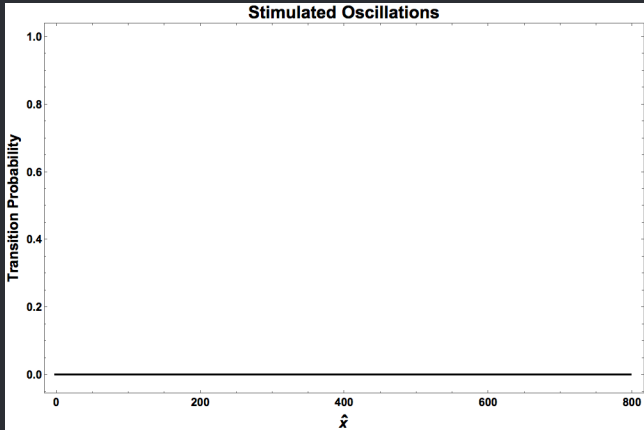
Transition probabilities between mass states in matter.

Neutrino Flavor Conversions in Matter

$$A = 0.1\omega_{\mathrm{m}}$$
$$k = 0.995\omega_{\mathrm{m}}$$
$$\theta_{\mathrm{m}} = \pi/6$$

$$\lambda(x) = \lambda_0 + A\cos(kx)$$

Stimulated Oscillations
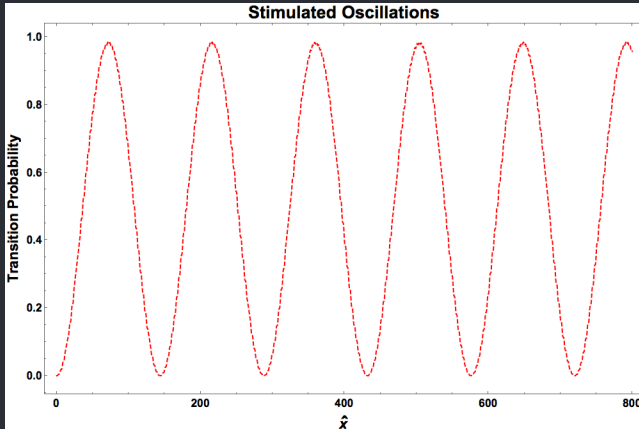
P. Krastev and A. Smirnov (1989); A. Friedland et al (2006); J. Kneller et al (2013); K. Patton et al (2014);

Rabi Oscillations

Scheme

$E_2 = \frac{\omega_0}{2}$

Incoming light

Frequency : k

$E_1 = -\frac{\omega_0}{2}$

Rabi Oscillation

Hamiltonian

$$-\frac{\omega_m}{2}\sigma_3 - \frac{\alpha}{2}\begin{pmatrix} 0 & e^{ikt} \\ e^{-ikt} & 0 \end{pmatrix}$$

Rabi Oscillations

Static Frame

$$\vec{H}_3 = \omega_\text{m} \begin{pmatrix} 0 \\ 0 \\ 1 \end{pmatrix}, \vec{H}_+ = \alpha \begin{pmatrix} \cos(kt) \\ -\sin(kt) \\ 0 \end{pmatrix}$$

Rabi Oscillations

Static Frame

Corotating Frame

$$\vec{H}_3 = \omega_m \begin{pmatrix} 0 \\ 0 \\ 1 \end{pmatrix}, \vec{H}_+ = \alpha \begin{pmatrix} \cos(kt) \\ -\sin(kt) \\ 0 \end{pmatrix}$$

$$\vec{H}'_3 = (\omega_m - k) \begin{pmatrix} 0 \\ 0 \\ 1 \end{pmatrix}, \vec{H}'_+ = \alpha \begin{pmatrix} 1 \\ 0 \\ 0 \end{pmatrix}$$
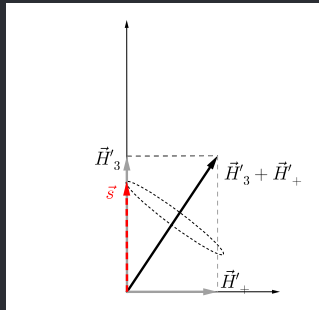
Corotating Frame

$$\vec{H}'_3 = (\omega_{\mathrm{m}} - k) \begin{pmatrix} 0 \\ 0 \\ 1 \end{pmatrix} = 0 \Rightarrow k = \omega_{\mathrm{m}}$$
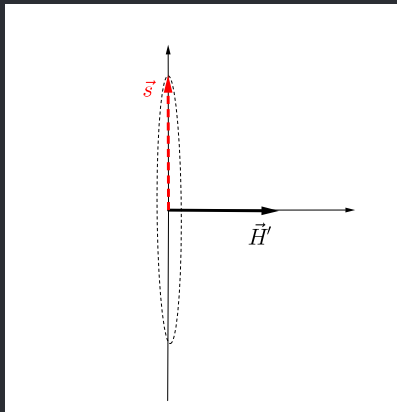
Rabi Oscillations

Scheme

$E_2 = \frac{\omega_0}{2}$ ———————— Incoming light

Frequency : *k*

$E_1 = -\frac{\omega_0}{2}$ ————————

Rabi Oscillation

Hamiltonian

$$-\frac{\omega_m}{2}\sigma_3 - \frac{\alpha}{2}\begin{pmatrix} 0 & e^{ikt} \\ e^{-ikt} & 0 \end{pmatrix}$$

Rabi formula

$$P_{1\to 2} = \frac{1}{1+D^2}\sin^2\left(\frac{\Omega_R}{2}t\right).$$

Relative detuning

$$D = \left|\frac{\omega_m - k}{\alpha}\right|.$$

Rabi frequency

$$\Omega_R = |\alpha|\sqrt{1+D^2}$$

$$\begin{pmatrix} \psi_e \\ \psi_\mu \end{pmatrix} = \begin{pmatrix} \cos\theta_m & \sin\theta_m \\ -\sin\theta_m & \cos\theta_m \end{pmatrix} \begin{pmatrix} \psi_L \\ \psi_H \end{pmatrix}$$

Matter Potential

$$\lambda(x) = \lambda_0$$

Hamiltonian

matter basis:

$$\mathbf{H} = \frac{1}{2}\left(-\omega_m\right)\boldsymbol{\sigma_3}$$

$$\begin{pmatrix} \psi_e \\ \psi_\mu \end{pmatrix} = \begin{pmatrix} \cos\theta_m & \sin\theta_m \\ -\sin\theta_m & \cos\theta_m \end{pmatrix} \begin{pmatrix} \psi_L \\ \psi_H \end{pmatrix}$$

Matter Potential

$$\lambda(x) = \lambda_0 + A\cos(kx)$$

Hamiltonian

Background matter basis:

$$\mathbf{H} = \frac{1}{2}\left(-\omega_m + A\cos(kx)\cos 2\theta_m\right)\sigma_3 - \frac{A\cos(kx)}{2}\sin 2\theta_m \sigma_1$$

Matter potential frequency

$$k \sim \omega_{\mathrm{m}}$$

$$\mathbf{H} = \frac{1}{2}\left(-\omega_{\mathrm{m}} + \underline{\cos 2\theta_{\mathrm{m}} A \cos(kx)}\right)\sigma_3 - \frac{\sin 2\theta_{\mathrm{m}}}{2} A\cos(kx)\sigma_1$$

$$\rightarrow \omega_{\mathrm{m}}\begin{pmatrix}0\\0\\1\end{pmatrix} + \alpha\begin{pmatrix}\cos(kx)\\-\sin(kx)\\0\end{pmatrix} + \alpha\begin{pmatrix}\cos(-kx)\\-\sin(-kx)\\0\end{pmatrix}$$

$$\alpha = \frac{\sin 2\theta_{\mathrm{m}}}{2}A$$

Matter potential frequency

$$k \sim \omega_{\mathrm{m}}$$

$$\mathbf{H} = \frac{1}{2}\left(-\omega_{\mathrm{m}} + \underbrace{\cos 2\theta_{\mathrm{m}} A \cos(kx)}\right)\sigma_3 - \frac{\sin 2\theta_{\mathrm{m}}}{2}A\cos(kx)\sigma_1$$

$$\rightarrow \omega_{\mathrm{m}}\begin{pmatrix} 0 \\ 0 \\ 1 \end{pmatrix} + \alpha\begin{pmatrix} \cos(kx) \\ -\sin(kx) \\ 0 \end{pmatrix} + \alpha\begin{pmatrix} \cos(-kx) \\ -\sin(-kx) \\ 0 \end{pmatrix}$$

$$\alpha = \frac{\sin 2\theta_{\mathrm{m}}}{2}A$$

Rabi Formula Works
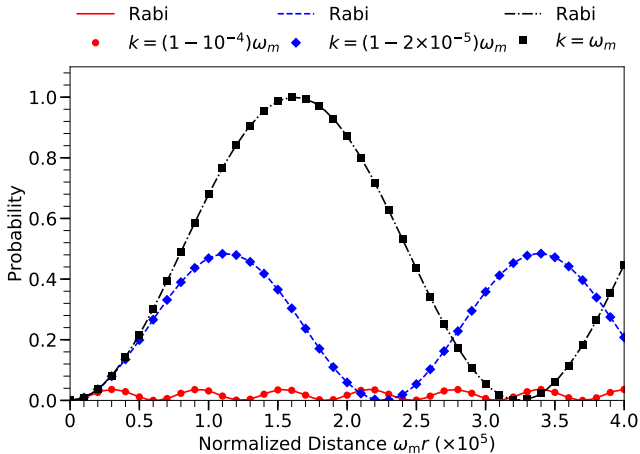
Transition between two mass states in background matter potential λ_0; $A_1 = -10^{-4}\omega_m$

Single Frequency Matter Potential Revisited

We have been making approximations.

$$\mathbf{H} = \frac{1}{2}\left(-\omega_{\mathrm{m}} + \underline{\cos 2\theta_{\mathrm{m}} A \cos(kx)}\right)\sigma_3 - \frac{\sin 2\theta_{\mathrm{m}}}{2}A\cos(kx)\sigma_1$$
$$\rightarrow \omega_{\mathrm{m}}\begin{pmatrix}0\\0\\1\end{pmatrix} + \alpha\begin{pmatrix}\cos(kx)\\-\sin(kx)\\0\end{pmatrix} + \alpha\begin{pmatrix}\cos(-kx)\\-\sin(-kx)\\0\end{pmatrix}$$

Rabi Basis

Hamiltonian in Background Matter Basis

$$\mathbf{H} = \frac{1}{2}\left(-\omega_{\mathrm{m}} + A\cos(kx)\cos 2\theta_{\mathrm{m}}\right)\boldsymbol{\sigma_3} - \frac{A\cos(kx)}{2}\sin\theta_{\mathrm{m}}\boldsymbol{\sigma_1}.$$

A Better Basis

Define Rabi basis in which the wave function is related to wave function in background matter basis through

$$\begin{pmatrix} \psi_{\mathrm{L}} \\ \psi_{\mathrm{H}} \end{pmatrix} = \begin{pmatrix} e^{-i\eta(x)} & 0 \\ 0 & e^{i\eta(x)} \end{pmatrix} \begin{pmatrix} \tilde{\psi}_{\mathrm{L}} \\ \tilde{\psi}_{\mathrm{H}} \end{pmatrix},$$

where

$$\eta(x) - \eta(0) = \frac{\cos 2\theta_{\mathrm{m}}}{2} \int_0^x A\cos(k\tau)d\tau.$$

Single Frequency Matter Potential

$$\lambda(x) = \lambda_0 + A \cos(kx)$$

Hamiltonian in Rabi Basis

The Hamiltonian

$$\widetilde{\mathbf{H}} = -\frac{\omega_{\mathrm{m}}}{2}\sigma_3 + \sum_{n=-\infty}^{\infty} \begin{pmatrix} 0 & \frac{1}{2}\alpha_n e^{i(nk)x} \\ \frac{1}{2}\alpha_n^* e^{-i(nk)x} & 0 \end{pmatrix}$$

where $\alpha_n = -(-i)^n nk \tan 2\theta_{\mathrm{m}} J_n(A \cos 2\theta_{\mathrm{m}}/k)$.

Map neutrino oscillations in single frequency matter potential to Rabi oscillations with many driving potentials.

Single Frequency Matter Potential

$$\lambda(x) = \lambda_0 + A\cos(kx)$$

Hamiltonian in Rabi Basis

The Hamiltonian

$$\widetilde{\mathbf{H}} = -\frac{\omega_{\mathrm{m}}}{2}\sigma_3 + \sum_{n=-\infty}^{\infty} \begin{pmatrix} 0 & \frac{1}{2}\alpha_n e^{i(nk)x} \\ \frac{1}{2}\alpha_n^* e^{-i(nk)x} & 0 \end{pmatrix}$$

where $\alpha_n = -(-i)^n nk \tan 2\theta_{\mathrm{m}} J_n(A\cos 2\theta_{\mathrm{m}}/k)$.

Map neutrino oscillations in single frequency matter potential to Rabi oscillations with many driving potentials.

Resonance condition for each mode: $nk = \omega_{\mathrm{m}}$

Rabi Oscillations With Multiple Driving Frequencies

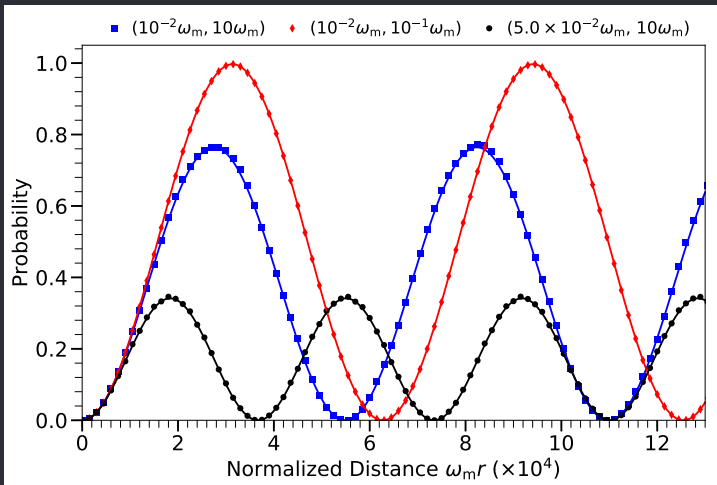Relative detuning for two driving potentials, α_1, k_1 and α_2, k_2

$$D' = \left| \frac{\omega_m - k_1}{\alpha_1} + \frac{\alpha_2^2}{2\alpha_1(\omega_m - k_2)} \right|$$

Amplitude

$$\frac{1}{1 + D'^2}$$

Rabi Oscillations With Multiple Driving Frequencies

$A_1 = 10^{-4}\omega_m$, $k_1 = \omega_m$; Legend shows (A_2, k_2); Grid lines: amplitude predicted using $1/(1 + D'^2)$

Rabi Oscillations With Multiple Driving Frequencies

Consider $k_1 = \omega_m$

$$D' = \left| \frac{\alpha_2^2}{2\alpha_1(\omega_m - k_2)} \right|$$

Amplitude reduces from 1 to 1/2 if

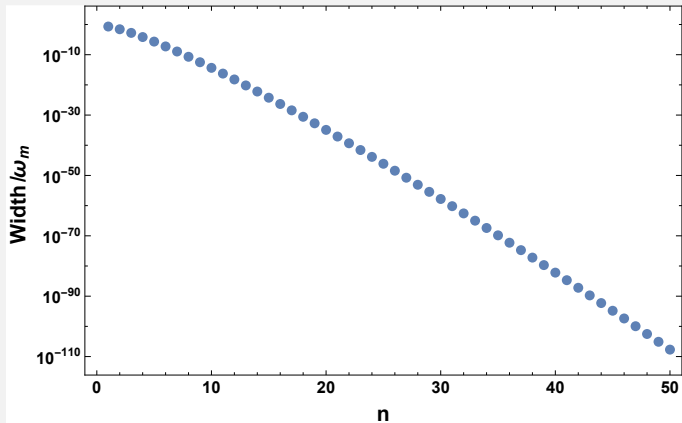$$D' = 1 \Rightarrow \alpha_{2,C} \equiv \sqrt{2|\alpha_1(k_2 - \omega_m)|}.$$

Two driving frequencies k_1, and k_2, with amplitude α_1, and α_2
For $k_1 = \omega_m$, survival of resonance requires

$$|\alpha_2| \ll \alpha_{2,C} \equiv \sqrt{2|\alpha_1(k_2 - \omega_m)|}$$

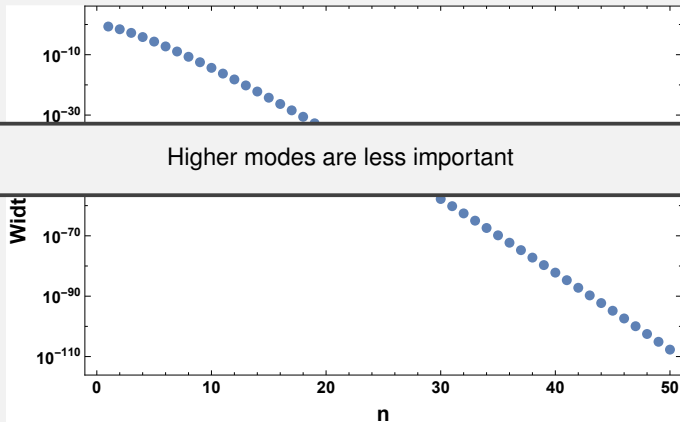# Single Frequency Matter Potential

Width of different modes given value of matter potential frequency *k*

Single Frequency Matter Potential

Width of different modes given value of matter potential frequency *k*

Multiple Frequencies in Matter Potential

$$\lambda(x) = \lambda_0 + \sum_{a=1}^{N} A_a \sin(k_a x)$$

Hamiltonian in Rabi Basis

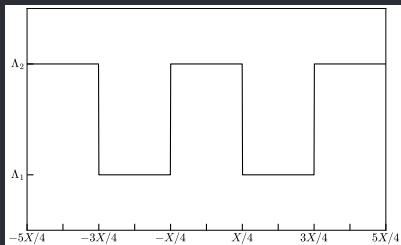$$\widetilde{\mathbf{H}} = -\frac{\omega_m}{2}\sigma_3 + \frac{1}{2}\sum_{n_1=-\infty}^{\infty}\cdots\sum_{n_N=-\infty}^{\infty}\begin{pmatrix} 0 & B_{\{n_a\}}\,e^{i\sum_a n_a k_a x} \\ B_{\{n_a\}}^{*}\,e^{-i\sum_a n_a k_a x} & 0 \end{pmatrix}$$

where

$$B_{\{n_a\}} = -(-i)^{\sum_a n_a}\tan 2\theta_m\left(\sum_a n_a k_a\right)\left(\prod_a J_{n_a}\left(\frac{A_a}{k_a}\cos 2\theta_m\right)\right)$$

Castle Wall Matter Potential

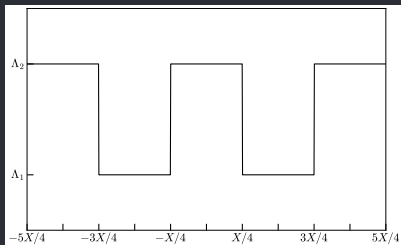$$\lambda(x) = \lambda_0 + \sum_{1}^{\infty} \lambda_n \cos(k_n x)$$

where

$$\lambda_0 = (\Lambda_1 + \Lambda_2)/2$$
$$\lambda_n = 2(-1)^n (\Lambda_1 - \Lambda_2)/(2n\pi - \pi)$$
$$k_n = 2\pi(2n - 1)/X$$

Castle wall matter profile:
$\Lambda_2 = 0.7\omega_v \cos 2\theta_v$
$\Lambda_1 = 0.3\omega_v \cos 2\theta_v$
period $X = 2\pi/\omega_m$

Castle Wall Matter Potential

Castle wall matter profile:
$\Lambda_2 = 0.7\omega_v \cos 2\theta_v$
$\Lambda_1 = 0.3\omega_v \cos 2\theta_v$
period $X = 2\pi/\omega_m$

$$\lambda(x) = \lambda_0 + \sum_1^\infty \lambda_n \cos(k_n x)$$

where

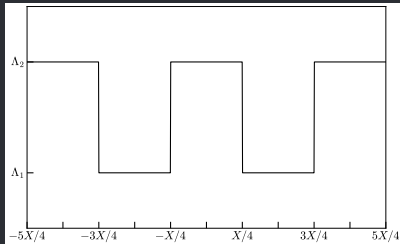$\lambda_0 = (\Lambda_1 + \Lambda_2)/2$
$\lambda_n = 2(-1)^n(\Lambda_1 - \Lambda_2)/(2n\pi - \pi)$
$k_n = 2\pi(2n-1)/X$

$$k_1 = \omega_m$$

Castle Wall Matter Potential
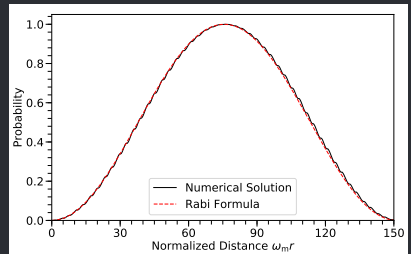

Castle wall matter profile:
$\Lambda_2 = 0.7\omega_v \cos 2\theta_v$
$\Lambda_1 = 0.3\omega_v \cos 2\theta_v$
period $X = 2\pi/\omega_m$

Transition probability is a Rabi resonance with small variations due to higher orders.

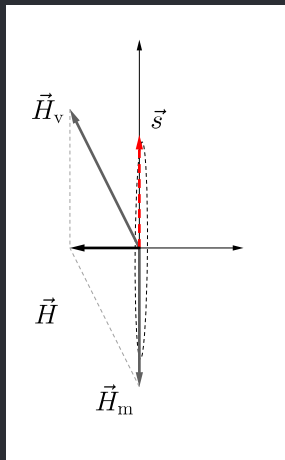# Summary of Neutrino Oscillations in Matter

1. Vacuum oscillations: flavor states are not mass states.

1. Vacuum oscillations: flavor states are not mass states.
2. MSW resonance: matter potential cancels out the vacuum diagonal elements of the Hamiltonian.

Summary of Neutrino Oscillations in Matter

1. Vacuum oscillations: flavor states are not mass states.
2. MSW resonance: matter potential cancels out the vacuum diagonal elements of the Hamiltonian.
3. Neutrino oscillations in matter: variation in matter potential can cause resonances.

For matter potential

$$\lambda(x) = \lambda_0 + A\cos(kx),$$

Resonance condition

$$nk = \omega_{\mathrm{m}}$$

Summary of Neutrino Oscillations in Matter

1. Vacuum oscillations: flavor states are not mass states.
2. MSW resonance: matter potential cancels out the vacuum diagonal elements of the Hamiltonian.
3. Neutrino oscillations in matter: variation in matter potential can cause resonances.
4. In many cases neutrino oscillations in multi-frequency matter potential can be viewed as Rabi oscillations with few driving frequencies.

Outline for Section 3

Neutrino Self-interactions

Interaction Hamiltonian $\mathbf{H}_{\nu\nu}$

$$\sqrt{2}G_F n(p')(1-\hat{p}\cdot\hat{p}')\rho(p')$$

In Flavor Isospin space

$$-2\sqrt{2}G_F n(p')(1-\hat{p}\cdot\hat{p}')\bar{s}(p')$$

$$\vec{H}_{\nu\nu} \sim \vec{s}(\mathbf{p}')$$

$$\vec{s}$$
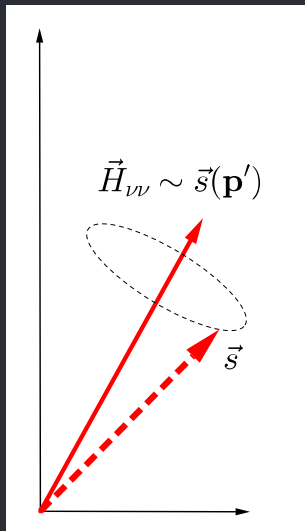
Two-Beam Model

$$H_{v,1} = -\frac{1}{2}\omega_v\sigma_3$$
$$H_{v,2} = \frac{1}{2}\omega_v\sigma_3$$
$$H_{\nu\nu} = \frac{1}{2}(\mu_1\rho_1 - \mu_2\rho_2)$$

where

$$\mu_{1(2)} = \sqrt{2}G_F\xi n_{2(1)}$$

Geometric factor

$$\xi = (1 - \cos(\theta_1 - \theta_2))$$
$$= 3/2$$

ρ_1: neutrinos; ρ_2: antineutrinos $\theta_1 = 5\pi/6$; $\theta_2 = \pi/6$

$$\theta_v = 0$$

Neutrino Self-interactions

Neutrino Self-interactions

Neutrino Self-interactions

Neutrino Self-interactions

Neutrino Self-interactions

Neutrino Self-interactions

Neutrino Self-interactions

Neutrino Self-interactions

Characteristic Energy Scales

- $\omega_v = \delta m^2 / 2E$
- $\lambda \sim G_F n_e$
- $\mu \sim G_F (1 - \hat{v}_1 \cdot \hat{v}_2) n_\nu$

Vacuum oscillation oscillation frequencies

$$\omega_v = \frac{\Delta m^2}{2E} \sim \frac{2\pi}{1\text{km}} \left(\frac{\Delta m_{32}^2}{2.5 \times 10^{-3} \text{eV}^2} \right) \left(\frac{1 MeV}{E} \right)$$

$$\sim \frac{2\pi}{33\text{km}} \left(\frac{\Delta m_{12}^2}{7.5 \times 10^{-5} \text{eV}^2} \right) \left(\frac{1\text{MeV}}{E} \right)$$

Neutrino Self-interactions

Characteristic Energy Scales

- $\omega_v = \delta m^2 / 2E$
- $\lambda \sim G_F n_e$
- $\mu \sim G_F (1 - \hat{v}_1 \cdot \hat{v}_2) n_\nu$

Vacuum oscillation oscillation frequencies

$$\omega_v = \frac{\Delta m^2}{2E} \sim \frac{2\pi}{1\text{km}} \left(\frac{\Delta m_{32}^2}{2.5 \times 10^{-3} \text{eV}^2} \right) \left(\frac{1 MeV}{E} \right)$$

$$\sim \frac{2\pi}{33\text{km}} \left(\frac{\Delta m_{12}^2}{7.5 \times 10^{-5} \text{eV}^2} \right) \left(\frac{1\text{MeV}}{E} \right)$$

Neutrino self-interactions might lead to faster oscillations, since $\mu \gg \omega_v$.

Neutrino Self-interactions

Characteristic Energy Scales

- $\omega_v = \delta m^2 / 2E$
- $\lambda \sim G_F n_e$
- $\mu \sim G_F (1 - \hat{v}_1 \cdot \hat{v}_2) n_\nu$

Suppose we have neutrino flux $10^{50} \mathrm{ergs} \cdot \mathrm{s}^{-1}$. We estimate the potential at radius R to be

$$\mu \sim \frac{1}{0.01 km} \left(\frac{100 \mathrm{km}}{R} \right)^2 \left(\frac{1 \mathrm{MeV}}{E} \right)$$

$$H_{\nu\nu} = \frac{1}{2} \left(\mu_1 \rho_1 - \mu_2 \rho_2 \right)$$

$$i\partial_z \rho_i = [H_i, \rho_i]$$

ρ_1: neutrinos; ρ_2: antineutrinos

$$\theta_1 = 2\pi/3, \theta_2 = \pi/6$$

$$H_{\nu\nu} = \frac{1}{2} \left(\mu_1 \rho_1 - \mu_2 \rho_2 \right)$$

Linear Stability Analysis

$$H_{\nu\nu} = \frac{1}{2}\left(\mu_1 \rho_1 - \mu_2 \rho_2\right)$$

$$i\partial_z \rho_i = [H_i, \rho_i]$$

ρ_1: neutrinos; ρ_2: antineutrinos

$$\rho_i = \frac{1}{2}\begin{pmatrix} 1 & \epsilon_i \\ \epsilon_i^* & -1 \end{pmatrix}$$

$$\theta_1 = 2\pi/3, \theta_2 = \pi/6$$

$$H_{\nu\nu} = \frac{1}{2}\left(\mu_1 \rho_1 - \mu_2 \rho_2\right)$$

Linear Stability Analysis

$$H_{\nu\nu} = \frac{1}{2}\left(\mu_1\rho_1 - \mu_2\rho_2\right)$$

$$i\partial_z\rho_i = [H_i, \rho_i]$$

ρ_1: neutrinos; ρ_2: antineutrinos

$$\rho_i = \frac{1}{2}\begin{pmatrix} 1 & \epsilon_i \\ \epsilon_i^* & -1 \end{pmatrix}$$

$$i\partial_z\begin{pmatrix} \epsilon_1 \\ \epsilon_2 \end{pmatrix} = \begin{pmatrix} \mu/2 + \omega_v & -\mu/2 \\ \mu/2 & -\omega_v - \mu/2 \end{pmatrix}\begin{pmatrix} \epsilon_1 \\ \epsilon_2 \end{pmatrix}$$

$$\theta_1 = 2\pi/3, \theta_2 = \pi/6$$

$$H_{\nu\nu} = \frac{1}{2}\left(\mu_1\rho_1 - \mu_2\rho_2\right)$$

Linear Stability Analysis

Collective mode

$$\begin{pmatrix} \epsilon_1(z) \\ \epsilon_2(z) \end{pmatrix} = \begin{pmatrix} \epsilon_1(0) \\ \epsilon_2(0) \end{pmatrix} e^{iK_z z}$$

Eigenvalues or collective oscillation frequencies

$$K_z = \pm\sqrt{\omega_v(\omega_v + \mu)}$$

Identify the condition for complex eigenvalues

$$\omega_v(\omega_v + \mu) < 0$$

Linear Stability Analysis

Collective mode

$$\begin{pmatrix} \epsilon_1(z) \\ \epsilon_2(z) \end{pmatrix} = \begin{pmatrix} \epsilon_1(0) \\ \epsilon_2(0) \end{pmatrix} e^{iK_z z}$$

Eigenvalues or collective oscillation frequencies

$$K_z = \pm\sqrt{\omega_{\rm v}(\omega_{\rm v} + \mu)}$$

Identify the condition for complex eigenvalues

$$\omega_{\rm v}(\omega_{\rm v} + \mu) < 0$$

- Normal hierarchy: $\omega_{\rm v} > 0$, requires $\mu \leq -\omega_{\rm v} < 0$, no instability;
- Inverted hierarchy: $\omega_{\rm v} < 0$, requires $\mu > |\omega_{\rm v}|$.

Linear Stability Analysis

Collective mode

$$\begin{pmatrix} \epsilon_1(z) \\ \epsilon_2(z) \end{pmatrix} = \begin{pmatrix} \epsilon_1(0) \\ \epsilon_2(0) \end{pmatrix} e^{iK_z z}$$

Eigenvalues or collective oscillation frequencies

$$K_z = \pm\sqrt{\omega_v(\omega_v + \mu)}$$

Identify the condition for complex eigenvalues

$$\omega_v(\omega_v + \mu) < 0$$

- Normal hierarchy: $\omega_v > 0$, requires $\mu \le -\omega_v < 0$, no instability;
- Inverted hierarchy: $\omega_v < 0$, requires $\mu > |\omega_v|$.

K_z is instability in z direction for our model.

Linear Stability Analysis

Collective mode

$$\begin{pmatrix} \epsilon_1(z) \\ \epsilon_2(z) \end{pmatrix} = \begin{pmatrix} \epsilon_1(0) \\ \epsilon_2(0) \end{pmatrix} e^{iK_z z}$$

Eigenvalues or collective oscillation frequencies

$$K_z = \pm\sqrt{\omega_v(\omega_v + \mu)}$$

Identify the condition for complex eigenvalues

$$\omega_v(\omega_v + \mu) < 0$$

- Normal hierarchy: $\omega_v > 0$, requires $\mu \leq -\omega_v < 0$, no instability;
- Inverted hierarchy: $\omega_v < 0$, requires $\mu > |\omega_v|$.

K_z is instability in z direction for our model.

Similar analysis can be done for all four dimensions t, x, y, z,

$$\left(\Omega, K_x, K_y, K_z\right)$$

Dispersion Relation

Izaguirre, I., Raffelt, G., & Tamborra, I. (2017). *Fast Pairwise Conversion of Supernova Neutrinos: A Dispersion Relation Approach*. Physical Review Letters, 118(2), 021101.

- Linear stability analysis → dispersion relation for Ω and $\mathbf{K}$.

Dispersion Relation

Izaguirre, I., Raffelt, G., & Tamborra, I. (2017). *Fast Pairwise Conversion of Supernova Neutrinos: A Dispersion Relation Approach*. Physical Review Letters, 118(2), 021101.

- Linear stability analysis → dispersion relation for Ω and $\mathbf{K}$.
- Instabilities and dispersion relation gaps are possibly related.

Dispersion Relation

Equation of motion for off-diagonal element of density matrix (Izaguirre et al, 2017)

$$i(\partial_t + v \cdot \nabla_r)\epsilon(v) = v^\mu (\Lambda + \Phi)_\mu - \int d\Gamma' v^\mu v'_\mu G(v')\epsilon(v')$$

Dispersion Relation

Equation of motion for off-diagonal element of density matrix (Izaguirre et al, 2017)

$$i(\partial_t + v \cdot \nabla_r)\epsilon(v) = v^\mu (\Lambda + \Phi)_\mu - \int d\Gamma' v^\mu v'_\mu \, G(v') \, \epsilon(v')$$

- v^μ: four-velocity of neutrinos $(1, v)$
- Λ: matter contribution $(\sqrt{2}G_F n_e, \sqrt{2}G_F n_e v_e)$
- Φ: neutrino flux $(\sqrt{2}G_F n_\nu, \sqrt{2}G_F n_\nu v)$
- $G(v')$: electron lepton number of neutrinos
  $$\sqrt{2}G_F \int_0^\infty \frac{E^2 dE}{2\pi^2} \left(n_{\nu_e} - n_{\bar{\nu}_e} \right)$$

Dispersion Relation

Collective mode of off-diagonal element

$$\epsilon \to \tilde{\epsilon} e^{-i(\Omega t - K \cdot r)}$$

Dispersion Relation

Collective mode of off-diagonal element

$$\epsilon \to \tilde{\epsilon} e^{-i(\Omega t - K \cdot r)}$$

Replacement:

- $\epsilon \to \tilde{\epsilon}$
- $\partial_t \to -i\Omega$, $\nabla_r \to iK$

Dispersion Relation

Collective mode of off-diagonal element

$$\epsilon \rightarrow \tilde{\epsilon} e^{-i(\Omega t - K \cdot r)}$$

Replacement:

- $\epsilon \rightarrow \tilde{\epsilon}$
- $\partial_t \rightarrow -i\Omega$, $\nabla_r \rightarrow iK$

Collective mode

$$v^\mu(K_\mu - (\Lambda + \Phi)_\mu)\tilde{\epsilon}(v) = - \int d\Gamma' v^\mu v'_\mu G(v')\tilde{\epsilon}(v')$$

Dispersion Relation

Collective mode of off-diagonal element

$$\epsilon \rightarrow \tilde{\epsilon} e^{-i(\Omega t - K \cdot r)}$$

Replacement:

- $\epsilon \rightarrow \tilde{\epsilon}$
- $\partial_t \rightarrow -i\Omega$, $\nabla_r \rightarrow iK$

Collective mode

$$v^\mu \boxed{\left(K_\mu - (\Lambda + \Phi)_\mu\right)} \tilde{\epsilon}(v) = -\int d\Gamma' v^\mu v'_\mu G(v') \tilde{\epsilon}(v')$$

with $K_\mu \rightarrow (\Omega, K)$

Dispersion Relation

Collective mode of off-diagonal element

$$\epsilon \rightarrow \tilde{\epsilon} e^{-i(\Omega t - K \cdot r)}$$

Replacement:

- $\epsilon \rightarrow \tilde{\epsilon}$
- $\partial_t \rightarrow -i\Omega$, $\nabla_r \rightarrow iK$

Collective mode

$$v^\mu \, k_\mu \, \tilde{\epsilon}(v) = - \int d\Gamma' v^\mu v'_\mu G(v') \tilde{\epsilon}(v')$$

with $k_\mu \rightarrow (\omega, k)$

Dispersion Relation

Collective mode of off-diagonal element

$$\epsilon \rightarrow \tilde{\epsilon} e^{-i(\Omega t - K \cdot r)}$$

Replacement:

- $\epsilon \rightarrow \tilde{\epsilon}$
- $\partial_t \rightarrow -i\Omega$, $\nabla_r \rightarrow iK$

Collective mode

$$v^\mu \, k_\mu \, \tilde{\epsilon}(v) = - \int d\Gamma' \, v^\mu v'_\mu G(v') \tilde{\epsilon}(v')$$

with $k_\mu \rightarrow (\omega, k)$

Without neutrino self-interaction: $v^\mu k_\mu = 0$

Dispersion Relation

Rewrite

$$- \int d\Gamma' \, v^\mu v'_\mu G(v') \tilde{\epsilon}(v')$$

$$= v^\mu \left(- \int d\Gamma' v'_\mu G(v') \tilde{\epsilon}(v') \right)$$

$$\equiv v^\mu \, a_\mu$$

Dispersion Relation

Rewrite

$$-\int d\Gamma' \, v^\mu v'_\mu G(v') \tilde\epsilon(v')$$

$$= v^\mu \left(-\int d\Gamma' v'_\mu G(v') \tilde\epsilon(v') \right)$$

$$\equiv v^\mu \, a_\mu$$

EoM

$$v^\mu k_\mu \tilde\epsilon(v) = v^\mu a_\mu$$

Dispersion Relation
Rewrite

$$\nu^\mu k_\mu \tilde{\epsilon}(v) = -\int d\Gamma' \nu^\mu \nu'_\mu G(v')\tilde{\epsilon}(v')$$

$$-\int d\Gamma' \,\nu^\mu \nu'_\mu G(v')\tilde{\epsilon}(v')$$

$$= \nu^\mu \left(-\int d\Gamma' \nu'_\mu G(v')\tilde{\epsilon}(v')\right)$$

$$\equiv \nu^\mu \, a_\mu$$

EoM

$$\nu^\mu k_\mu \tilde{\epsilon}(v) = \nu^\mu a_\mu$$

$$\implies$$

$$\tilde{\epsilon}(v) = \nu^\mu a_\mu / \nu^\mu k_\mu$$

Collect all terms of a_μ

$$\nu^\mu \left(\delta^\nu_\mu + \int d\Gamma' \frac{G(v')\nu'_\mu \nu^\nu}{\nu^\alpha k_\alpha}\right) a_\nu = 0$$

Dispersion Relation

Axially symmetric: $v^\alpha k_\alpha = \omega(1 - n\cos\theta)$ where $n = |\boldsymbol{k}|/\omega$

Nontrivial solutions to EoM requires

$$v^\mu \left(\omega \delta^\nu_{\ \mu} + N^\nu_{\ \mu}\right) a_\nu = 0 \qquad I_n(\theta) = \int_{\cos\theta_2}^{\cos\theta_1} d\cos\theta\, G(\theta) \frac{\cos^n\theta}{1 - n\cos\theta}$$

$$N^\mu_{\ \nu} \to$$

$$\begin{pmatrix} \dfrac{1}{2}I_0 & 0 & 0 & -\dfrac{1}{2}I_1 \\ 0 & -\dfrac{1}{4}(I_0 - I_2) & 0 & 0 \\ 0 & 0 & -\dfrac{1}{4}(I_0 - I_2) & 0 \\ \dfrac{1}{2}I_1 & 0 & 0 & -\dfrac{1}{2}I_2 \end{pmatrix}$$

Dispersion Relation

Axially symmetric: $v^\alpha k_\alpha = \omega(1 - n\cos\theta)$ where $n = |k|/\omega$

Nontrivial solutions to EoM requires

$$v^\mu \left(\omega\delta^\nu_{\ \mu} + N^\nu_{\ \mu} \right) a_\nu = 0$$

$$I_n(\theta) = \int_{\cos\theta_2}^{\cos\theta_1} d\cos\theta\, G(\theta) \frac{\cos^n\theta}{1 - n\cos\theta}$$

$$N^\mu_{\ \nu} \rightarrow$$

$$
\begin{pmatrix}
\frac{1}{2}I_0 & 0 & 0 & -\frac{1}{2}I_1 \\
0 & -\frac{1}{4}(I_0 - I_2) & 0 & 0 \\
0 & 0 & -\frac{1}{4}(I_0 - I_2) & 0 \\
\frac{1}{2}I_1 & 0 & 0 & -\frac{1}{2}I_2
\end{pmatrix}
$$

Dispersion Relation

Axially symmetric: $v^\alpha k_\alpha = \omega(1 - n\cos\theta)$ where $n = |k|/\omega$

Nontrivial solutions to EoM requires

$$v^\mu \left(\omega \delta^\nu_{\ \mu} + N^\nu_{\ \mu} \right) a_\nu = 0$$

$$\Rightarrow$$

$$\left(\omega \delta^\nu_{\ \mu} + N^\nu_{\ \mu} \right) a_\nu = 0$$

$$I_n(\theta) = \int_{\cos\theta_2}^{\cos\theta_1} d\cos\theta \, G(\theta) \frac{\cos^n\theta}{1 - n\cos\theta}$$

$$N^\mu_{\ \nu} \rightarrow$$

$$\begin{pmatrix} \dfrac{1}{2}I_0 & 0 & 0 & -\dfrac{1}{2}I_1 \\ 0 & -\dfrac{1}{4}(I_0 - I_2) & 0 & 0 \\ 0 & 0 & -\dfrac{1}{4}(I_0 - I_2) & 0 \\ \dfrac{1}{2}I_1 & 0 & 0 & -\dfrac{1}{2}I_2 \end{pmatrix}$$
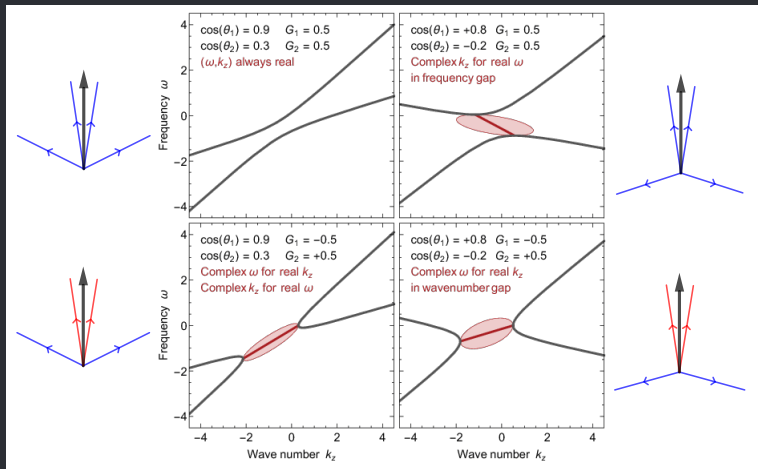
Dispersion Relation

Axially symmetric: $v^\alpha k_\alpha = \omega(1 - n\cos\theta)$ where $n = |k|/\omega$

Nontrivial solutions to EoM requires

$$v^\mu \left(\omega \delta^\nu_{\;\mu} + N^\nu_{\;\mu} \right) a_\nu = 0$$

$$\Rightarrow$$

$$\left(\omega \delta^\nu_{\;\mu} + N^\nu_{\;\mu} \right) a_\nu = 0$$

$$\Rightarrow$$

$$\text{Det}(\omega I + N) = 0,$$

$$I_n(\theta) = \int_{\cos\theta_2}^{\cos\theta_1} d\cos\theta\, G(\theta) \frac{\cos^n\theta}{1 - n\cos\theta}$$

$$N^\mu_{\;\nu} \rightarrow$$

$$\begin{pmatrix} \frac{1}{2}I_0 & 0 & 0 & -\frac{1}{2}I_1 \\ 0 & -\frac{1}{4}(I_0 - I_2) & 0 & 0 \\ 0 & 0 & -\frac{1}{4}(I_0 - I_2) & 0 \\ \frac{1}{2}I_1 & 0 & 0 & -\frac{1}{2}I_2 \end{pmatrix}$$

Dispersion Relation

$$a_\mu = - \int d\Gamma' v'_\mu G(v') \tilde\epsilon(v')$$

$$\omega = \boxed{\frac{1}{4}(I_0 - I_2)}, \qquad \boxed{-\frac{1}{4}\left(I_0 - I_2 \pm \sqrt{(I_0 - 2I_1 + I_2)(I_0 + 2I_1 + I_2)}\right)}$$

- MAA solution : Related to axial symmetry breaking
- MZA solution : Related to azimuthal symmetry breaking

Dispersion Relation and Instabilities

Two zenith angles

Dispersion Relation and Instabilities

The left panels use forward modes ($0 < \cos\theta_{1,2} < 1$) as in traditional bulb emission. If ν_e dominates in both modes (upper left), both ω and k_z are real: no fast flavor conversion occurs. If one mode has a $\bar{\nu}_e$ excess ($G_1 < 0$), the DR has a gap, providing complex ω for real k_z and the other way around, as indicated by the red blob. Disturbances with k_z in the gap grow exponentially in time. A real ω imposed at the boundary causes exponential spatial growth. These conclusions carry over to more general $G(\theta)$ where one needs a crossing from positive to negative ELN intensities to obtain a dispersion gap, which, in turn, enables fast flavor conversion, similar to spectral crossings for slow modes [40–42].

The DR alone only indicates which solutions are consistent with the EOM, but not which ones will actually occur. We would be sure that the system was always stable if the DR did not have any gaps, which, however, seem to be generic. Except for quantum fluctuations or hypothetical flavor-violating interactions [46–48], M^2 is the only source of seed perturbations. However, which spectrum of flavor disturbances is produced, and where, remains to be better understood.
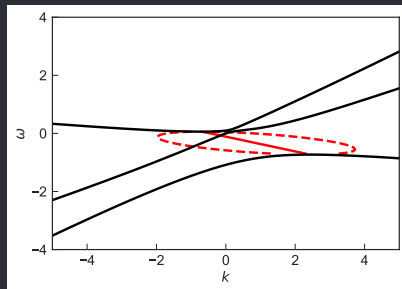
1. Gaps lead to Instabilities.
2. Instabilities do not occur without gap.

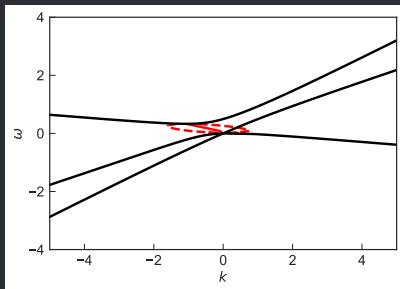# Dispersion Relation and Instabilities
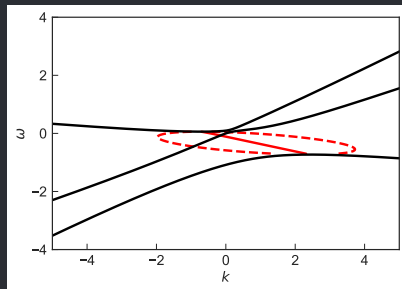
Three zenith angles
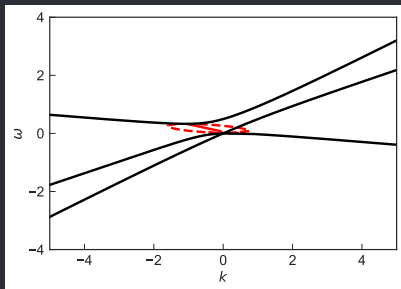
MAA solutions

MZA solutions

Dispersion Relation and Instabilities
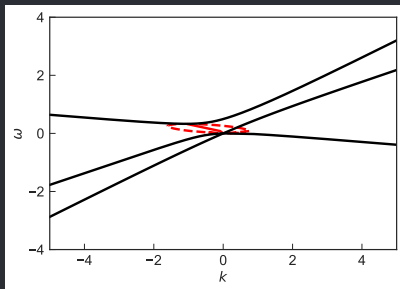
Three zenith angles
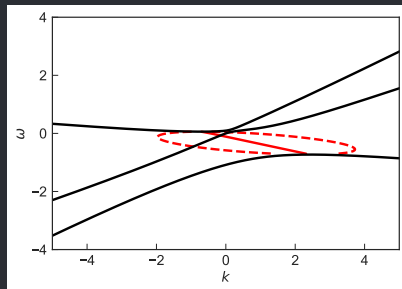

MAA solutions

MZA solutions

Cubic equation of $k = |\boldsymbol{k}| \Rightarrow$ 3 solutions of k for given ω

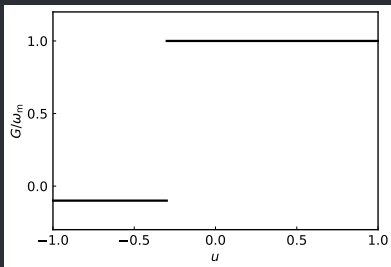# Dispersion Relation and Instabilities
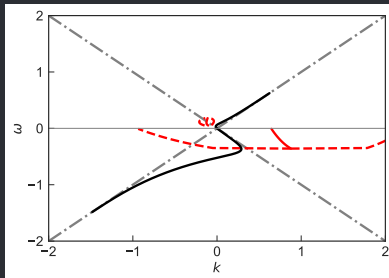
Three zenith angles

MAA solutions

MZA solutions

Cubic equation of $k = |k| \Rightarrow$ 3 solutions of k for given ω

Instabilities occur without gaps.
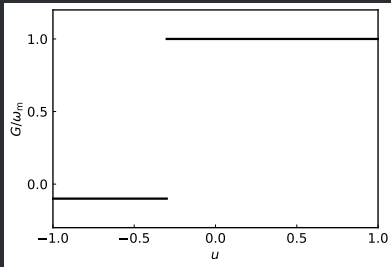
Dispersion Relations and Instabilities

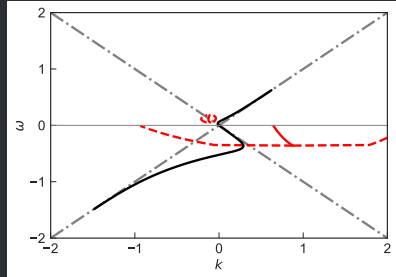Box spectrum: -0.1 for $u \in [-1, -0.3]$; 1 for $u \in [-0.3, 1]$

MZA solution: no gaps yet unstable in some regions

Dispersion Relations and Instabilities

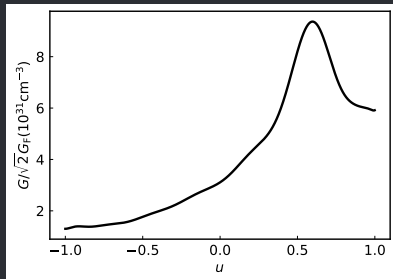Box spectrum: -0.1 for $u \in [-1, -0.3]$; 1 for $u \in [-0.3, 1]$

MZA solution: no gaps yet unstable in some regions

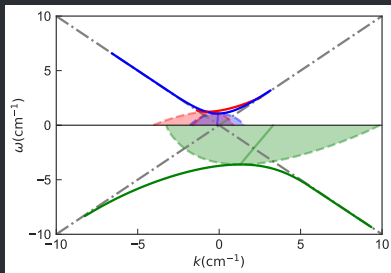Instabilities occur without gaps.

Dispersion Relations and Instabilities

Define $u = \cos\theta$
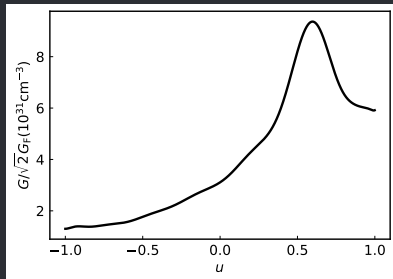
Garching spectrum:

Garching spectrum $G(u)$

MAA: red; MZA: blue and green

Dispersion Relations and Instabilities

Define $u = \cos\theta$

Garching spectrum:

Garching spectrum $G(u)$
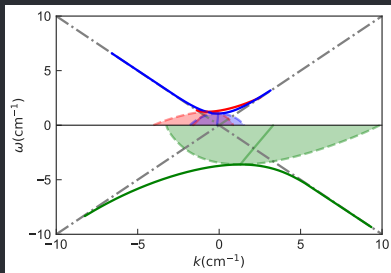
MAA: red; MZA: blue and green

- MAA solutions: unstable region stops at $\omega \to 0$
- MZA solutions: instabilities are different for region $\omega > 0$ and $\omega < 0$.

Dispersion Relations and Instabilities

Define $u = \cos\theta$

Garching spectrum:
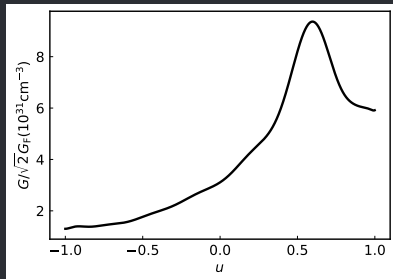

Garching spectrum $G(u)$

MAA: red; MZA: blue and green

- MAA solutions: unstable region stops at $\omega \rightarrow 0$
- MZA solutions: instabilities are different for region $\omega > 0$ and $\omega < 0$.

Instabilities might occur in gaps of DR and $\omega = 0$ if there is any.
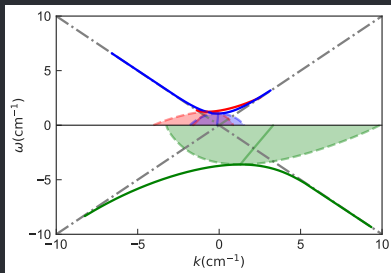
Summary of Dispersion Relation

- Neutrino oscillation instabilities might occur in DR gaps.
- Neutrino oscillation instabilities might occur even if DR has no gaps.
- If there exists gaps, gaps should be defined as the gap between dispersion relation and $\omega = 0$ instead of the gaps between dispersion relation curves.

Acknowledgement

Backup Slides

Parameters

Vacuum oscillations: $\sin^2 \theta_v = 0.093$
Bipolar model animation:

- $\theta_v = 0$
- $\alpha = 1$
- $\mu = 5$

Initial condition

-

$$\bar{s} = \begin{pmatrix} 10^{-3} \\ 0 \\ 1 \end{pmatrix}$$

Rabi Oscillations With Multiple Driving Frequencies

Consider Rabi oscillation with two driving frequencies $k_1 = n_1 k$, $k_2 = n_2 k$

$$\vec{H} = \begin{pmatrix} 0 \\ 0 \\ \omega_m \end{pmatrix} + \alpha_1 \begin{pmatrix} \cos(k_1 x) \\ -\sin(k_1 x) \\ 0 \end{pmatrix} + \alpha_2 \begin{pmatrix} \cos(k_2 x) \\ -\sin(k_2 x) \\ 0 \end{pmatrix}$$

Corotating frame of the second potential

$$\vec{H} = \begin{pmatrix} 0 \\ 0 \\ \omega_m - k_2 \end{pmatrix} + \alpha_1 \begin{pmatrix} \cos(k_1 - k_2 x) \\ -\sin(k_1 - k_2 x) \\ 0 \end{pmatrix} + \alpha_2 \begin{pmatrix} 1 \\ 0 \\ 0 \end{pmatrix}$$

Energy gap in this frame becomes the length of the vector

$$\begin{pmatrix} 0 \\ 0 \\ \omega_m - k_2 \end{pmatrix} + \alpha_2 \begin{pmatrix} 1 \\ 0 \\ 0 \end{pmatrix}$$

Rabi Oscillations With Multiple Driving Frequencies

Relative detuning

$$D' = \left| \frac{\omega_m - k_1}{\alpha_1} + \frac{\alpha_2^2}{2\alpha_1(\omega_m - k_2)} \right|$$

MAA and MZA

$$\tilde{\epsilon} = \frac{\nu^\mu a_\mu}{\nu^\alpha k_\alpha}$$

Dispersion Relations

Solve k for MAA solutions

$$1 = \frac{1}{4k} \int \mathrm{d}u\, G(u) \frac{1 - u^2}{\omega/k - u}.$$

around $\omega \to 0$.

Dispersion Relations

Solve k for MAA solutions

$$1 = \frac{1}{4k} \int du G(u) \frac{1-u^2}{\omega/k - u}.$$

around $\omega \to 0$.

Apply Stokhotski-Plemelj theorem

$$\text{Re}(k) = \frac{1}{4} \left(\mathscr{P} \int du G(u) \frac{1-u^2}{-u} \right)$$

$$\text{Im}(k) = \frac{\pi}{4} G(0) \, \text{Sign}(\omega) \, \text{Sign}(\text{Im}(k)).$$

Dispersion Relations

Solve k for MAA solutions

$$1 = \frac{1}{4k} \int du G(u) \frac{1-u^2}{\omega/k - u}.$$

around $\omega \to 0$.

Apply Stokhotski-Plemelj theorem

$$\text{Re}(k) = \frac{1}{4} \left(\mathscr{P} \int du G(u) \frac{1-u^2}{-u} \right)$$

$$\text{Im}(k) = \frac{\pi}{4} G(0) \, \text{Sign}(\omega) \, \text{Sign}(\text{Im}(k)).$$

- $G(0) \, \text{Sign}(\omega) > 0$: $|\text{Im}(k)| = \frac{\pi}{4} |G(0)|$
- $G(0) \, \text{Sign}(\omega) < 0$: $|\text{Im}(k)| = 0$

Dispersion Relations

Solve k for MAA solutions

$$1 = \frac{1}{4k} \int \mathrm{d}u G(u) \frac{1-u^2}{\omega/k - u}.$$
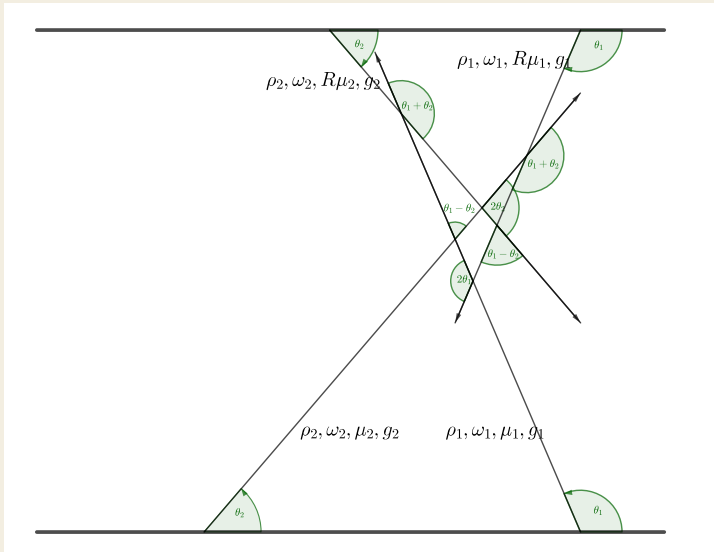
around $\omega \to 0$.

Apply Stokhotski-Plemelj theorem

$$\mathrm{Re}(k) = \frac{1}{4} \left(\mathscr{P} \int \mathrm{d}u G(u) \frac{1-u^2}{-u} \right)$$

$$\mathrm{Im}(k) = \frac{\pi}{4} G(0) \, \mathrm{Sign}\,(\omega) \, \mathrm{Sign}\,(\mathrm{Im}(k)).$$

- $G(0) \, \mathrm{Sign}(\omega) > 0$: $|\mathrm{Im}(k)| = \frac{\pi}{4} |G(0)|$
- $G(0) \, \mathrm{Sign}(\omega) < 0$: $|\mathrm{Im}(k)| = 0$

> Gap between dispersion relation and $\omega = 0$
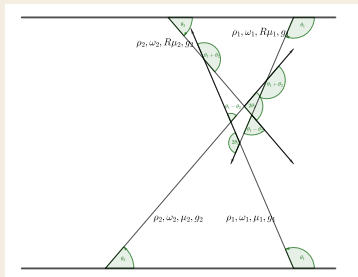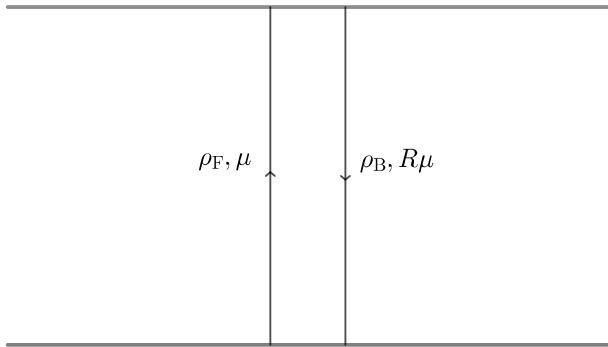
Assumptions

- Neutrinos are translational symmetric on the emission line.

- Reflection obays Snell's law.

- Neutrinos are reflected on a fixed surface $z = L$.

- Neutrino reflections are translational symmetric.

Flavor Isospin

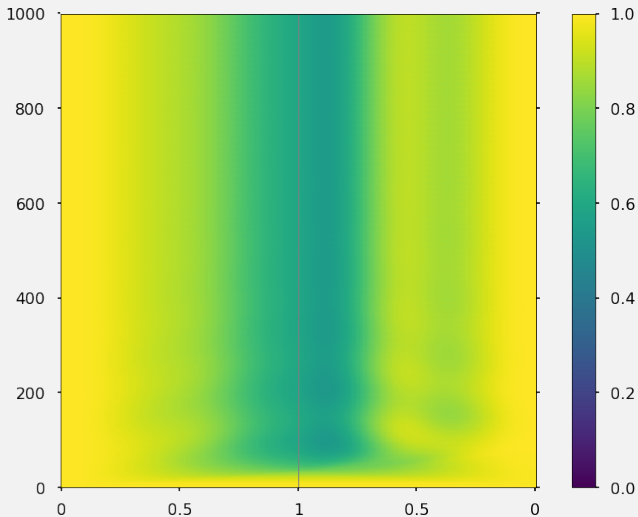

ρ_{F}, μ $\rho_{\mathrm{B}}, R\mu$

Relaxation Scheme

Algorithm

1. Calculate forward beam using null backward beam;
2. Calculate backward beam using forward beam calculated in step 1;
3. Calculate forward beam using backward beam calculated in step 2;
4. Repeat 2 and 3 until the beams reach equilibrium.

Numerical Method

Horizontal axis is the location of neutrinos; Vertical axis is the number of iteration steps; Color indicates the electron flavor probability.

Numerical Method
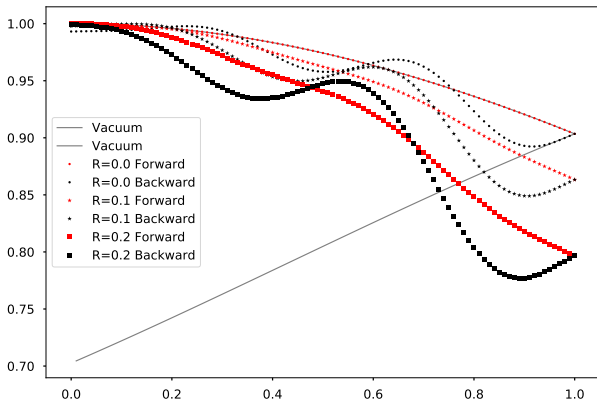
Linear Stability Analysis

EoM

$$i\partial_t \vec{s}_F = s_F \times (\vec{H}_v + R\mu \vec{s}_B)$$
$$i\partial_t \vec{s}_B = \vec{s}_B \times (-\vec{H}_v - \mu \vec{s}_F).$$

Compare with bipolar

$$i\partial_t \vec{s} = s \times (\eta \vec{H}_v + \alpha\mu \bar{\vec{s}})$$
$$i\partial_t \bar{\vec{s}} = \bar{\vec{s}} \times (\eta \vec{H}_v + \mu \vec{s})$$

Linear Stability Analysis

Off Diagonal (mu=1.0, reflection=0.07)