

Stimulated Neutrino Flavor Conversions and Rabi Oscillations

Lei Ma
in collaboration with
Huaiyu Duan, and Shashank Shalgar

Department of Physics
UNM

January 31, 2017



DOE EPSCoR grant
#DE-SC0008142



OUTLINE

1. Background
 - What are Neutrinos
 - Neutrino Oscillations
 - Why Do Neutrinos Oscillate
2. Matter Effect
 - Interactions with Matter
 - MSW Effect
3. Stimulated Neutrino Flavor Conversions
 - Rabi Oscillations
 - Single Frequency Matter Profile and Rabi Oscillations
4. Single Frequency Matter Potential Decomposed
 - Basis and Formalism
 - Rabi Oscillations With Multiple Driving Frequencies
 - Multiple Frequencies in Matter Potential
5. Summary

OVERVIEW

Background

- What are Neutrinos

- Neutrino Oscillations

- Why Do Neutrinos Oscillate


Matter Effect

Stimulated Neutrino Flavor Conversions

Single Frequency Matter Potential Decomposed

Summary

WHAT ARE NEUTRINOS?

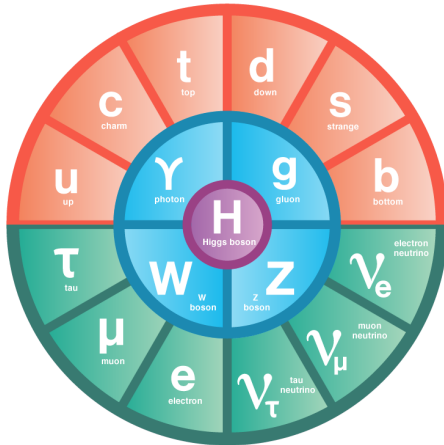


Elementary particles.

Source: symmetrymagazine.org


Neutrinos are

- fermions,
- electrically neutral,
- three flavors,
- none vanishing mass.

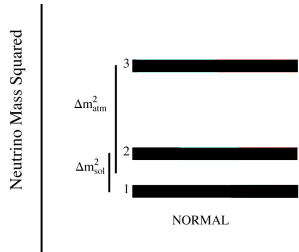

Adapted from Olga Mena & Stephen Parke (2004)


WHAT ARE NEUTRINOS?

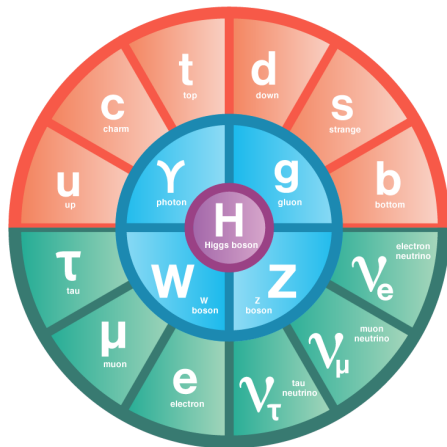

Elementary particles.
Source: symmetrymagazine.org

Neutrinos are

- fermions,
- electrically neutral,
- three flavors,
- none vanishing mass.




Adapted from Olga Mena &
Stephen Parke (2004)

WHAT ARE NEUTRINO OSCILLATIONS?

Neutrino Oscillations


||

Neutrino Flavor Conversions

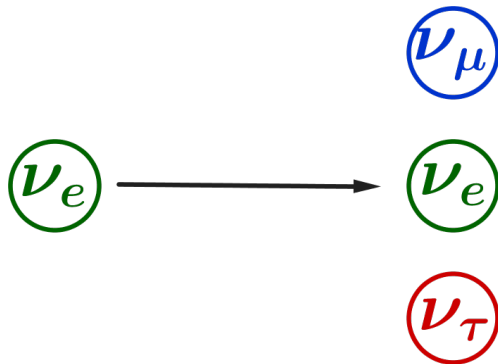

Neutrino Oscillations

WHAT ARE NEUTRINO OSCILLATIONS?

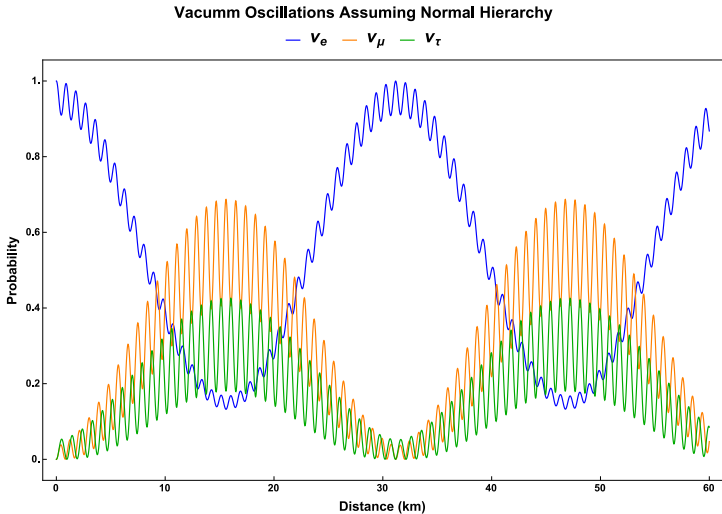

Probabilities of finding neutrinos to be in each flavor.

WHY DO NEUTRINOS OSCILLATE?

Flavor states are different from mass states.

$$\begin{pmatrix} \psi_e \\ \psi_\mu \end{pmatrix} = \begin{pmatrix} \cos \theta_v & \sin \theta_v \\ -\sin \theta_v & \cos \theta_v \end{pmatrix} \begin{pmatrix} \psi_1 \\ \psi_2 \end{pmatrix}$$

WHY DO NEUTRINOS OSCILLATE?

Equation of Motion

$$i\partial_x \begin{pmatrix} \psi_e \\ \psi_\mu \end{pmatrix} = \mathbf{H} \begin{pmatrix} \psi_e \\ \psi_\mu \end{pmatrix}$$

WHY DO NEUTRINOS OSCILLATE?

Equation of Motion

$$i\partial_x \begin{pmatrix} \psi_e \\ \psi_\mu \end{pmatrix} = \mathbf{H} \begin{pmatrix} \psi_e \\ \psi_\mu \end{pmatrix}$$

$$\mathbf{H} = \frac{\omega_v}{2} (-\cos 2\theta_v \boldsymbol{\sigma}_3 + \sin 2\theta_v \boldsymbol{\sigma}_1)$$

- Oscillation frequency:

$$\omega_v = \frac{\delta m^2}{2E} = \frac{m_2^2 - m_1^2}{2E}$$

- Mixing angle θ_v

FLAVOR ISOSPIN

Hamiltonian: $\mathbf{H} = -\frac{\vec{\sigma}}{2} \cdot \vec{H}$

Flavor isospin: $\vec{s} = \Psi^\dagger \frac{\vec{\sigma}}{2} \Psi$

Electron flavor survival probability

$$P = \frac{1}{2} + s_3$$

Equation of motion

$$\dot{\vec{s}} = \vec{s} \times \vec{H}$$

electron flavor



muon flavor



FLAVOR ISOSPIN

Hamiltonian: $\mathbf{H} = -\frac{\vec{\sigma}}{2} \cdot \vec{H}$

Flavor isospin: $\vec{s} = \Psi^\dagger \frac{\vec{\sigma}}{2} \Psi$

Electron flavor survival probability

$$P = \frac{1}{2} + s_3$$

Equation of motion

$$\dot{\vec{s}} = \vec{s} \times \vec{H}$$


Vacuum oscillation Hamiltonian

$$\frac{\omega_v}{2} (-\cos 2\theta_v \sigma_3 + \sin 2\theta_v \sigma_1)$$

$$\rightarrow \cos 2\theta_v \begin{pmatrix} 0 \\ 0 \\ \omega_v \end{pmatrix} - \sin 2\theta_v \begin{pmatrix} \omega_v \\ 0 \\ 0 \end{pmatrix}$$

electron flavor

muon flavor

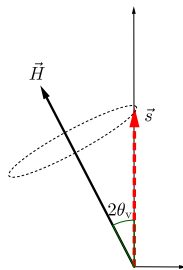

OVERVIEW

Background

Matter Effect

Interactions with Matter


MSW Effect

Stimulated Neutrino Flavor Conversions

Single Frequency Matter Potential Decomposed

Summary

INTERACTIONS WITH MATTER

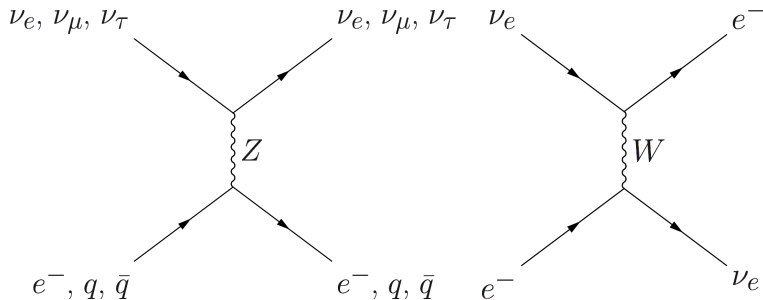

Neutral current interaction between ν_e, ν_μ, ν_τ , and e^-, q, \bar{q} .

Charged current interaction between ν_e and e^-

MATTER INTERACTION

Hamiltonian with matter interaction in flavor basis ($\omega_v = \delta m^2/2E$):

$$\mathbf{H} = \frac{\omega_v}{2} (-\cos 2\theta_v \sigma_3 + \sin 2\theta_v \sigma_1) + \frac{\lambda(x)}{2} \sigma_3$$

► Vacuum Hamiltonian


► Matter interaction

► $\lambda(x) = \sqrt{2}G_F n_e(x)$

MSW EFFECT

$$\begin{aligned}\mathbf{H} &= \frac{\omega_v}{2} (-\cos 2\theta_v \boldsymbol{\sigma}_3 + \sin 2\theta_v \boldsymbol{\sigma}_1) + \frac{\lambda(x)}{2} \boldsymbol{\sigma}_3 \\ &\rightarrow \omega_v \begin{pmatrix} -\sin 2\theta_v & \\ & 0 \\ & & \cos 2\theta_v \end{pmatrix} + \begin{pmatrix} 0 & \\ 0 & \\ -\lambda(x) & \end{pmatrix} \\ &= \vec{H}_v + \vec{H}_m(x)\end{aligned}$$

MSW EFFECT

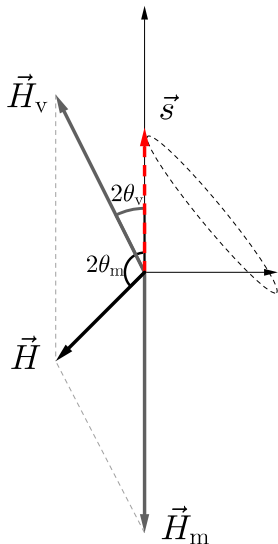

Electron flavor survival probability

$$P = \frac{1}{2} + s_3$$

Oscillation frequency in **vacuum**:

$$\omega_v = |\vec{H}_v|$$

Oscillation frequency in **matter**:


$$\omega_m = |\vec{H}|$$

Flavor states and mass states in matter



$$\begin{pmatrix} \psi_e \\ \psi_\mu \end{pmatrix} = \begin{pmatrix} \cos \theta_m & \sin \theta_m \\ -\sin \theta_m & \cos \theta_m \end{pmatrix} \begin{pmatrix} \psi_L \\ \psi_H \end{pmatrix}$$

MSW EFFECT

Adiabatic matter density change

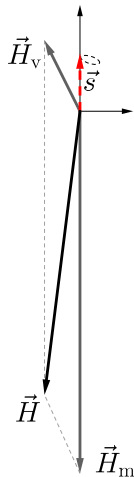


Large density

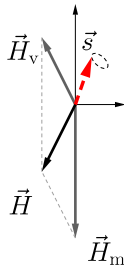

Low density

MSW EFFECT

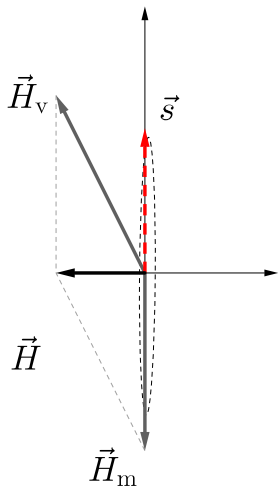


- ▶ Maximum possible flavor transition probability amplitude
- ▶ MSW Resonance
- ▶ A specific matter density

$$\sqrt{2}G_F n_e \equiv \omega_v \cos 2\theta_v$$

MORE COMPLICATED MATTER POTENTIAL


Astrophysical environments: supernovae etc

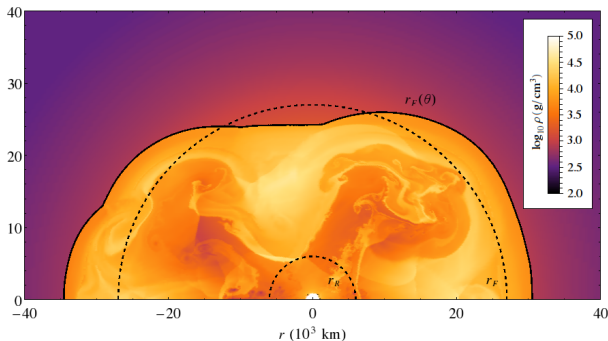

Turbulence in supernova. E. Borriello, et al (2014)

STIMULATED NEUTRINO FLAVOR CONVERSIONS


$$\lambda(x) = \lambda_0$$

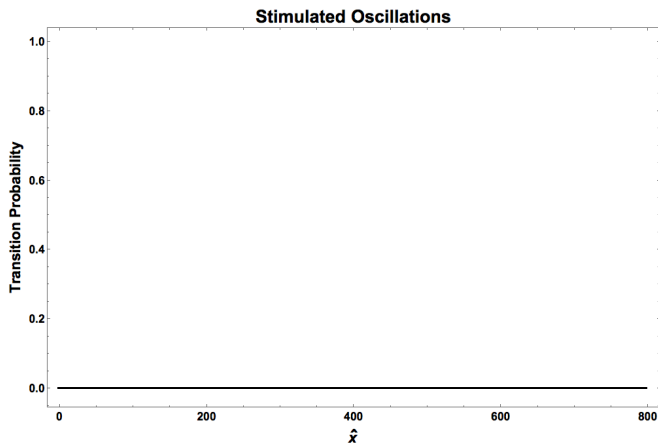

Transition probabilities between mass states in matter.

STIMULATED NEUTRINO FLAVOR CONVERSIONS

$$\lambda(x) = \lambda_0 + A \cos(kx)$$

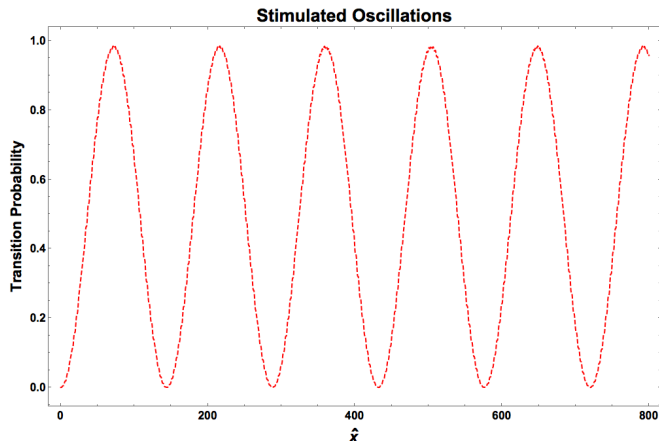

P. Krastev and A. Smirnov (1989); A. Friedland et al (2006); J. Kneller et al (2013); K. Patton et al (2014);

OVERVIEW

Background

Matter Effect

Stimulated Neutrino Flavor Conversions

Rabi Oscillations

Single Frequency Matter Profile and Rabi Oscillations

Single Frequency Matter Potential Decomposed

Summary

RABI OSCILLATIONS

Rabi Oscillation

Hamiltonian

$$-\frac{\omega_m}{2}\sigma_3 - \frac{\alpha}{2} \begin{pmatrix} 0 & e^{ikt} \\ e^{-ikt} & 0 \end{pmatrix}$$

$$E_2 = \frac{\omega_m}{2}$$

Periodic Driving Potential




$$E_1 = -\frac{\omega_m}{2}$$

Frequency : k

RABI OSCILLATIONS

Static Frame


$$\vec{H}_3 = \omega_m \begin{pmatrix} 0 \\ 0 \\ 1 \end{pmatrix}, \vec{H}_+ = \alpha \begin{pmatrix} \cos(kt) \\ -\sin(kt) \\ 0 \end{pmatrix}$$

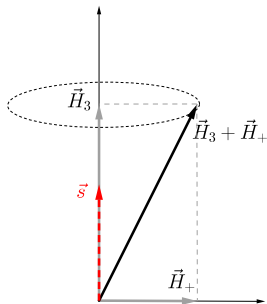

RABI OSCILLATIONS


Static Frame

$$\vec{H}_3 = \omega_m \begin{pmatrix} 0 \\ 0 \\ 1 \end{pmatrix}, \vec{H}_+ = \alpha \begin{pmatrix} \cos(kt) \\ -\sin(kt) \\ 0 \end{pmatrix}$$



Corotating Frame


$$\vec{H}'_3 = (\omega_m - k) \begin{pmatrix} 0 \\ 0 \\ 1 \end{pmatrix}, \vec{H}'_+ = \alpha \begin{pmatrix} 1 \\ 0 \\ 0 \end{pmatrix}$$



RABI OSCILLATIONS

Corotating Frame

$$\vec{H}'_3 = (\omega_m - k) \begin{pmatrix} 0 \\ 0 \\ 1 \end{pmatrix} = 0 \Rightarrow k = \omega_m$$

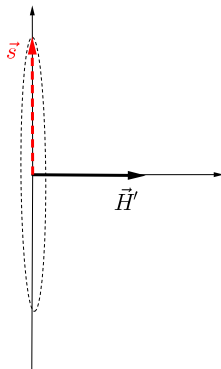

RABI OSCILLATIONS

Rabi Oscillation

Hamiltonian

$$-\frac{\omega_m}{2}\sigma_3 - \frac{\alpha}{2} \begin{pmatrix} 0 & e^{ikt} \\ e^{-ikt} & 0 \end{pmatrix}$$

Rabi formula

$$P_{1 \rightarrow 2} = \frac{1}{1 + D^2} \sin^2 \left(\frac{\Omega_R}{2} t \right).$$

Relative detuning

$$D = \left| \frac{\omega_m - k}{\alpha} \right|.$$

Rabi frequency

$$\Omega_R = |\alpha| \sqrt{1 + D^2}$$

$$E_2 = \frac{\omega_m}{2}$$

$$E_1 = -\frac{\omega_m}{2}$$

Periodic Driving Potential



Frequency : k

HAMILTONIAN IN MATTER BASIS $\begin{pmatrix} \psi_e \\ \psi_\mu \end{pmatrix} = \begin{pmatrix} \cos \theta_m & \sin \theta_m \\ -\sin \theta_m & \cos \theta_m \end{pmatrix} \begin{pmatrix} \psi_L \\ \psi_H \end{pmatrix}$

Matter Potential

$$\lambda(x) = \lambda_0$$

Basis

matter basis:

$$\mathbf{H} = \frac{1}{2} (-\omega_m) \boldsymbol{\sigma}_3$$

HAMILTONIAN IN MATTER BASIS $\begin{pmatrix} \psi_e \\ \psi_\mu \end{pmatrix} = \begin{pmatrix} \cos \theta_m & \sin \theta_m \\ -\sin \theta_m & \cos \theta_m \end{pmatrix} \begin{pmatrix} \psi_L \\ \psi_H \end{pmatrix}$

Matter Potential

$$\lambda(x) = \lambda_0 + A \cos(kx)$$

Basis

Background matter basis:

$$\mathbf{H} = \frac{1}{2} (-\omega_m + A \cos(kx) \cos 2\theta_m) \sigma_3 - \frac{A \cos(kx)}{2} \sin 2\theta_m \sigma_1$$

HAMILTONIAN IN MATTER BASIS

Matter potential frequency

$$k \sim \omega_m$$

$$\mathbf{H} = \frac{1}{2} \left(-\omega_m + \cancel{\cos 2\theta_m A \cos(kx)} \right) \sigma_3 - \frac{\sin 2\theta_m}{2} A \cos(kx) \sigma_1$$
$$\rightarrow \omega_m \begin{pmatrix} 0 \\ 0 \\ 1 \end{pmatrix} + \alpha \begin{pmatrix} \cos(kx) \\ -\sin(kx) \\ 0 \end{pmatrix} + \alpha \begin{pmatrix} \cos(-kx) \\ -\sin(-kx) \\ 0 \end{pmatrix}$$

$$\alpha = \frac{\sin 2\theta_m}{2} A$$


HAMILTONIAN IN MATTER BASIS

Matter potential frequency

$$k \sim \omega_m$$

$$\begin{aligned} \mathbf{H} &= \frac{1}{2} \left(-\omega_m + \cancel{\cos 2\theta_m A \cos(kx)} \right) \sigma_3 - \frac{\sin 2\theta_m}{2} A \cos(kx) \sigma_1 \\ &\rightarrow \omega_m \begin{pmatrix} 0 \\ 0 \\ 1 \end{pmatrix} + \alpha \begin{pmatrix} \cos(kx) \\ -\sin(kx) \\ 0 \end{pmatrix} + \cancel{\alpha \begin{pmatrix} \cos(-kx) \\ -\sin(-kx) \\ 0 \end{pmatrix}} \\ \alpha &= \frac{\sin 2\theta_m}{2} A \end{aligned}$$

RABI FORMULA WORKS

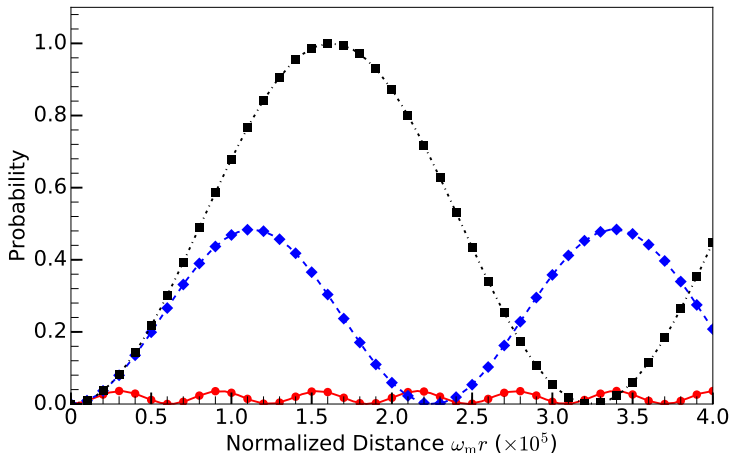

Transition between two mass states in background matter potential λ_0

Lines: Rabi formula

Dots, diamonds, triangles, and squares are **full solutions without approximations** for $k = \omega_m$, $k = (1 - 2 \times 10^{-5})\omega_m$, and $k = (1 - 10^{-4})\omega_m$ respectively.

OVERVIEW

Background

Matter Effect

Stimulated Neutrino Flavor Conversions

Single Frequency Matter Potential Decomposed
Basis and Formalism
Rabi Oscillations With Multiple Driving Frequencies
Multiple Frequencies in Matter Potential

Summary

SINGLE FREQUENCY MATTER POTENTIAL REVISITED

We have been making approximations.

$$\mathbf{H} = \frac{1}{2} \left(-\omega_m + \cancel{\cos 2\theta_m A \cos(kx)} \right) \sigma_3 - \frac{\sin 2\theta_m}{2} A \cos(kx) \sigma_1$$
$$\rightarrow \omega_m \begin{pmatrix} 0 \\ 0 \\ 1 \end{pmatrix} + \alpha \begin{pmatrix} \cos(kx) \\ -\sin(kx) \\ 0 \end{pmatrix} + \cancel{\alpha \begin{pmatrix} \cos(-kx) \\ -\sin(-kx) \\ 0 \end{pmatrix}}$$

RABI BASIS

Hamiltonian in Background Matter Basis

$$\mathbf{H} = \frac{1}{2} (-\omega_m + A \cos(kx) \cos 2\theta_m) \sigma_3 - \frac{A \cos(kx)}{2} \sin \theta_m \sigma_1.$$

A Better Basis

Define Rabi basis in which the wave function is related to wave function in background matter basis through

$$\begin{pmatrix} \psi_L \\ \psi_H \end{pmatrix} = \begin{pmatrix} e^{-i\eta(x)} & 0 \\ 0 & e^{i\eta(x)} \end{pmatrix} \begin{pmatrix} \tilde{\psi}_L \\ \tilde{\psi}_H \end{pmatrix},$$

where

$$\eta(x) - \eta(0) = \frac{\cos 2\theta_m}{2} \int_0^x A \cos(k\tau) d\tau.$$

SINGLE FREQUENCY MATTER POTENTIAL

$$\lambda(x) = \lambda_0 + A \cos(kx)$$

Hamiltonian in Rabi Basis

The Hamiltonian

$$\tilde{\mathbf{H}} = -\frac{\omega_m}{2}\sigma_3 + \sum_{n=-\infty}^{\infty} \begin{pmatrix} 0 & \frac{1}{2}\alpha_n e^{i(nk)x} \\ \frac{1}{2}\alpha_n^* e^{-i(nk)x} & 0 \end{pmatrix}$$

where $\alpha_n = -(-i)^n n k \tan 2\theta_m J_n(A \cos 2\theta_m/k)$.

SINGLE FREQUENCY MATTER POTENTIAL

$$\lambda(x) = \lambda_0 + A \cos(kx)$$

Hamiltonian in Rabi Basis

The Hamiltonian

$$\tilde{\mathbf{H}} = -\frac{\omega_m}{2}\sigma_3 + \sum_{n=-\infty}^{\infty} \begin{pmatrix} 0 & \frac{1}{2}\alpha_n e^{i(nk)x} \\ \frac{1}{2}\alpha_n^* e^{-i(nk)x} & 0 \end{pmatrix}$$

where $\alpha_n = -(-i)^n nk \tan 2\theta_m J_n(A \cos 2\theta_m/k)$.

Map neutrino oscillations in single frequency matter potential to Rabi oscillations with many driving potentials.

Resonance condition for each mode: $nk = \omega_m$

RABI OSCILLATIONS WITH MULTIPLE DRIVING FREQUENCIES

Consider Rabi oscillation with two driving frequencies $k_1 = n_1 k$, $k_2 = n_2 k$

$$\vec{H} = \begin{pmatrix} 0 \\ 0 \\ \omega_m \end{pmatrix} + \alpha_1 \begin{pmatrix} \cos(k_1 x) \\ -\sin(k_1 x) \\ 0 \end{pmatrix} + \alpha_2 \begin{pmatrix} \cos(k_2 x) \\ -\sin(k_2 x) \\ 0 \end{pmatrix}$$

Corotating frame of the second potential,

$$\vec{H} = \begin{pmatrix} 0 \\ 0 \\ \omega_m - k_2 \end{pmatrix} + \alpha_1 \begin{pmatrix} \cos(k_1 - k_2 x) \\ -\sin(k_1 - k_2 x) \\ 0 \end{pmatrix} + \alpha_2 \begin{pmatrix} 1 \\ 0 \\ 0 \end{pmatrix}$$

Energy gap in this frame becomes the length of the vector


$$\begin{pmatrix} 0 \\ 0 \\ \omega_m - k_2 \end{pmatrix} + \alpha_2 \begin{pmatrix} 1 \\ 0 \\ 0 \end{pmatrix}$$

RABI OSCILLATIONS WITH MULTIPLE DRIVING FREQUENCIES

Relative detuning

$$D' = \left| \frac{\omega_m - k_1}{\alpha_1} + \frac{\alpha_2^2}{2\alpha_1(\omega_m - k_2)} \right|$$

RABI OSCILLATIONS WITH MULTIPLE DRIVING FREQUENCIES

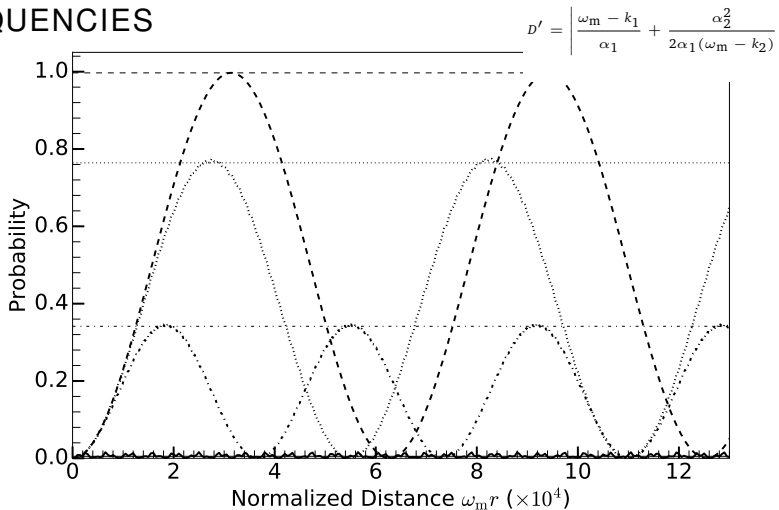

Grid lines: amplitude predicted using $1/(1 + D'^2)$

α_2, k_1 values			
Dashed	dotted	dash-dotted	solid
$10^{-2} \omega_m, 10 \omega_m$	$10^{-2} \omega_m, 10^{-1} \omega_m$	$5.0 \times 10^{-2} \omega_m, 10 \omega_m$	$5 \times 10^{-2} \omega_m, 10^{-1} \omega_m$

RABI OSCILLATIONS WITH MULTIPLE DRIVING FREQUENCIES

Consider $k_1 = \omega_m$

$$D' = \left| \frac{\alpha_2^2}{2\alpha_1(\omega_m - k_2)} \right|$$

Amplitude reduces from 1 to 1/2 if

$$D' = 1 \Rightarrow \alpha_{2,c} \equiv \sqrt{2|\alpha_1(k_2 - \omega_m)|}.$$

Two driving frequencies k_1 , and k_2 , with amplitude α_1 , and α_2
For $k_1 = \omega_m$, survival of resonance requires

$$|\alpha_2| \ll \alpha_{2,c} \equiv \sqrt{2|\alpha_1(k_2 - \omega_m)|}$$

SINGLE FREQUENCY MATTER POTENTIAL REVISITED

Matter potential

$$\lambda(x) = \lambda_0 + A \cos(kx),$$

Consider the resonance condition ($k = \omega_m$)

$$\tilde{\mathbf{H}} \sim -\frac{\omega_m}{2}\sigma_3 + \frac{1}{2} \begin{pmatrix} 0 & \alpha_1 e^{ikx} \\ \alpha_1^* e^{-ikx} & 0 \end{pmatrix} + \frac{1}{2} \begin{pmatrix} 0 & \alpha_n e^{inkx} \\ \alpha_n^* e^{-inkx} & 0 \end{pmatrix}$$

SINGLE FREQUENCY MATTER POTENTIAL REVISITED

Matter potential

$$\lambda(x) = \lambda_0 + A \cos(kx),$$

Consider the resonance condition ($k = \omega_m$)

$$\tilde{\mathbf{H}} \sim -\frac{\omega_m}{2}\sigma_3 + \frac{1}{2} \begin{pmatrix} 0 & \alpha_1 e^{ikx} \\ \alpha_1^* e^{-ikx} & 0 \end{pmatrix} + \frac{1}{2} \begin{pmatrix} 0 & \alpha_n e^{inkx} \\ \alpha_n^* e^{-inkx} & 0 \end{pmatrix}$$

$$D' = \left| \frac{\alpha_2^2}{2\alpha_n(\omega_m - nk)} \right|$$

$k = \omega_m$		
n	D'	Amplitude
1	0	1
1 & -1	4.8×10^{-6}	$1 - 2.3 \times 10^{-11}$
1 & 2	2.1×10^{-14}	$1 - 4.4 \times 10^{-28}$
1 & -2	6.9×10^{-15}	$1 - 4.8 \times 10^{-29}$

SINGLE FREQUENCY MATTER POTENTIAL REVISITED

Width

$$\alpha_n = -(-i)^n n k \tan 2\theta_m J_n(A \cos 2\theta_m / k)$$


$$|\alpha_n| \propto \sqrt{\frac{n}{2\pi}} \left(\frac{eA \cos 2\theta_m}{2nk} \right)^n, \quad \text{for large } n$$

Width drops fast at large n .

But the critical value for each mode becomes larger for large n 's


$$\alpha_{n,C} \equiv \sqrt{2|\alpha_1(nk - \omega_m)|}$$

SINGLE FREQUENCY MATTER POTENTIAL

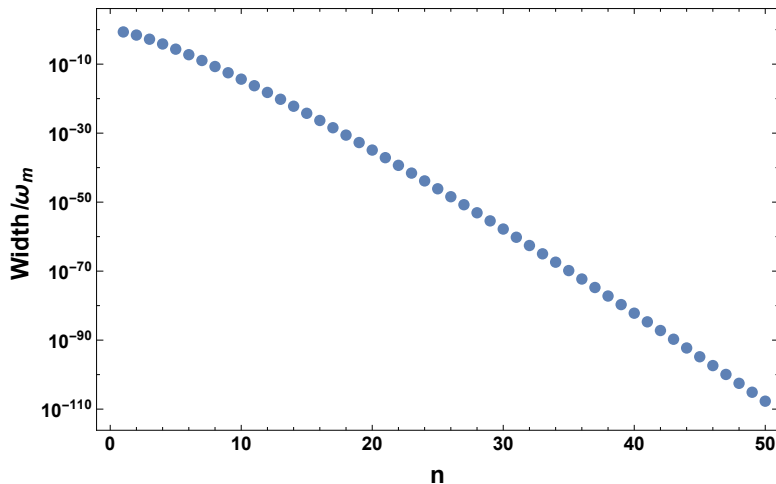

Width of different modes given value of matter potential frequency k

SINGLE FREQUENCY MATTER POTENTIAL

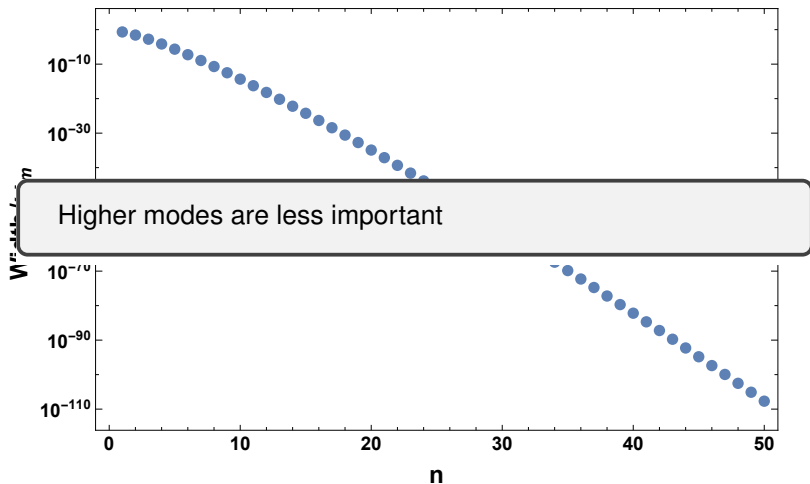

Width of different modes given value of matter potential frequency k

MULTIPLE FREQUENCIES IN MATTER POTENTIAL

$$\lambda(x) = \lambda_0 + \sum_{a=1}^N A_a \sin(k_a x)$$


Hamiltonian in Rabi Basis

$$\tilde{H} = -\frac{\omega_m}{2}\sigma_3 + \frac{1}{2} \sum_{n_1=-\infty}^{\infty} \cdots \sum_{n_N=-\infty}^{\infty} \begin{pmatrix} 0 & B_{\{n_a\}} e^{i \sum_a n_a k_a x} \\ B_{\{n_a\}}^* e^{-i \sum_a n_a k_a x} & 0 \end{pmatrix}$$

where

$$B_{\{n_a\}} = -(-i)^{\sum_a n_a} \tan 2\theta_m \left(\sum_a n_a k_a \right) \left(\prod_a J_{n_a} \left(\frac{A_a}{k_a} \cos 2\theta_m \right) \right)$$

CASTLE WALL MATTER POTENTIAL

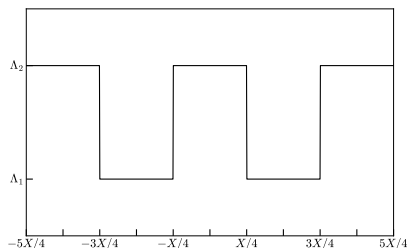

Castle wall matter profile:

$$\Lambda_2 = 0.35\omega_v \cos 2\theta_v,$$

$$\Lambda_1 = 0.15\omega_v \cos 2\theta_v \text{ and period}$$

$$X = 2\pi/\omega_m$$

$$\lambda(x) = \lambda_0 + \sum_1^{\infty} \lambda_n \cos(k_n x)$$


where

$$\lambda_0 = (\Lambda_1 + \Lambda_2)/2$$

$$\lambda_n = 2(-1)^n (\Lambda_1 - \Lambda_2) / (2n\pi - \pi)$$

$$k_n = 2\pi(2n - 1)/X$$

CASTLE WALL MATTER POTENTIAL

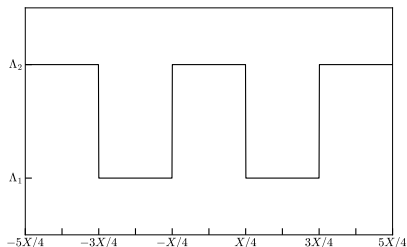


Castle wall matter profile:

$$\Lambda_2 = 0.35\omega_v \cos 2\theta_v,$$

$$\Lambda_1 = 0.15\omega_v \cos 2\theta_v \text{ and period}$$

$$X = 2\pi/\omega_m$$

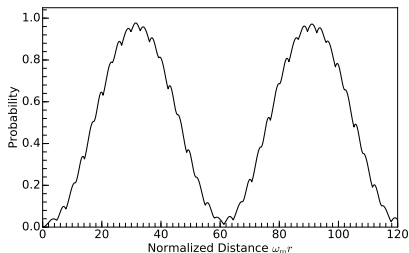

Transition probability is a Rabi resonance with small variations due to higher orders.

OVERVIEW

Background

Matter Effect


Stimulated Neutrino Flavor Conversions

Single Frequency Matter Potential Decomposed

Summary


SUMMARY

1. Vacuum oscillations: flavor states are not mass states.
2. MSW resonance: matter potential cancels out the vacuum diagonal elements of the Hamiltonian.
3. Stimulated oscillations: variation in matter potential can cause resonances.
4. In many cases neutrino oscillations in multi-frequency matter potential can be viewed as Rabi oscillations with few driving frequencies.



SUMMARY

1. Vacuum oscillations: flavor states are not mass states.
2. MSW resonance: matter potential cancels out the vacuum diagonal elements of the Hamiltonian.
3. Stimulated oscillations: variation in matter potential can cause resonances.
4. In many cases neutrino oscillations in multi-frequency matter potential can be viewed as Rabi oscillations with few driving frequencies.

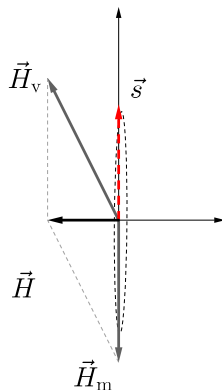

SUMMARY

1. Vacuum oscillations: flavor states are not mass states.
2. MSW resonance: matter potential cancels out the vacuum diagonal elements of the Hamiltonian.
3. Stimulated oscillations: variation in matter potential can cause resonances.
4. In many cases neutrino oscillations in multi-frequency matter potential can be viewed as Rabi oscillations with few driving frequencies.

For matter potential

$$\lambda(x) = \lambda_0 + A \cos(kx),$$

Resonance condition

$$nk = \omega_m$$

SUMMARY

1. Vacuum oscillations: flavor states are not mass states.
2. MSW resonance: matter potential cancels out the vacuum diagonal elements of the Hamiltonian.
3. Stimulated oscillations: variation in matter potential can cause resonances.
4. In many cases neutrino oscillations in multi-frequency matter potential can be viewed as Rabi oscillations with few driving frequencies.

BACKUP SLIDES

BACKUP SLIDES

WHY DO NEUTRINOS OSCILLATE?

Equation of Motion

$$i\partial_x |\Psi\rangle = \hat{\mathbf{H}} |\Psi\rangle$$

- Basis: Hamiltonian diagonalized basis/mass basis/propagation basis, $\{|\nu_1\rangle, |\nu_2\rangle\}$.

►

$$\mathbf{H} = -\frac{\omega_v}{2}\sigma_3, \quad \text{where } \omega_v = \frac{\delta m^2}{2E} = \frac{m_2^2 - m_1^2}{2E}.$$

- The system can be solved given initial condition of the amplitudes of the two eigenstates $(\langle\nu_1|\Psi(0)\rangle, \langle\nu_2|\Psi(0)\rangle)^T$,

$$\begin{pmatrix} \langle\nu_1|\Psi(x)\rangle \\ \langle\nu_2|\Psi(x)\rangle \end{pmatrix} = \begin{pmatrix} \langle\nu_1|\Psi(0)\rangle \exp(i\omega_v x/2) \\ \langle\nu_2|\Psi(0)\rangle \exp(-i\omega_v x/2) \end{pmatrix}$$

WHY DO NEUTRINOS OSCILLATE?

Flavor basis

Neutrino wave function in flavor basis $\{|\nu_e\rangle, |\nu_\mu\rangle\}$ is related to state in energy basis $\{|\nu_1\rangle, |\nu_2\rangle\}$ through

$$\begin{pmatrix} |\nu_e\rangle \\ |\nu_\mu\rangle \end{pmatrix} = \begin{pmatrix} \cos \theta_v & \sin \theta_v \\ -\sin \theta_v & \cos \theta_v \end{pmatrix} \begin{pmatrix} |\nu_1\rangle \\ |\nu_2\rangle \end{pmatrix}$$

θ_v : vacuum mixing angle

WHY DO NEUTRINOS OSCILLATE?

Flavor basis

Neutrino wave function in flavor basis $\{|\nu_e\rangle, |\nu_\mu\rangle\}$ is related to state in energy basis $\{|\nu_1\rangle, |\nu_2\rangle\}$ through

$$\begin{pmatrix} |\nu_e\rangle \\ |\nu_\mu\rangle \end{pmatrix} = \begin{pmatrix} \cos \theta_v & \sin \theta_v \\ -\sin \theta_v & \cos \theta_v \end{pmatrix} \begin{pmatrix} |\nu_1\rangle \\ |\nu_2\rangle \end{pmatrix}$$

θ_v : vacuum mixing angle

Hamiltonian H

Mass basis

$$\begin{aligned} & \frac{\omega_v}{2} \begin{pmatrix} -1 & 0 \\ 0 & 1 \end{pmatrix} \\ &= -\frac{\omega_v}{2} \sigma_3 \end{aligned}$$

Flavor basis

$$\begin{aligned} & \frac{\omega_v}{2} \begin{pmatrix} -\cos 2\theta_v & \sin 2\theta_v \\ \sin 2\theta_v & \cos 2\theta_v \end{pmatrix} \\ &= \frac{\omega_v}{2} (-\cos 2\theta_v \sigma_3 + \sin 2\theta_v \sigma_1) \end{aligned}$$

NATURE OF NEUTRINO OSCILLATION

Transition Probability

$$P(|\nu_e\rangle \rightarrow |\nu_\mu\rangle) = \sin^2(2\theta_v) \sin^2(\omega_v x/2)$$

- ▶ $\omega_v = (m_2^2 - m_1^2)/2E$ determines oscillation wavelength.
- ▶ Mixing angle θ_v determines flavor oscillation amplitude.

MSW EFFECT

$$\begin{pmatrix} |\nu_e\rangle \\ |\nu_\mu\rangle \end{pmatrix} = \begin{pmatrix} \cos \theta_v & \sin \theta_v \\ -\sin \theta_v & \cos \theta_v \end{pmatrix} \begin{pmatrix} |\nu_1\rangle \\ |\nu_2\rangle \end{pmatrix}$$

Constant matter profile λ_0 as an example,

Significance of θ_m

Define matter basis (eigenenergy basis) $\{|\nu_L\rangle, |\nu_H\rangle\}$

$$\begin{pmatrix} |\nu_e\rangle \\ |\nu_\mu\rangle \end{pmatrix} = \begin{pmatrix} \cos \theta_m & \sin \theta_m \\ -\sin \theta_m & \cos \theta_m \end{pmatrix} \begin{pmatrix} |\nu_L\rangle \\ |\nu_H\rangle \end{pmatrix}$$

In matter basis

$$\mathbf{H}_{\text{matter-basis}} = -\frac{\omega_m}{2} \sigma_3$$

MSW EFFECT

$$\begin{pmatrix} |\nu_e\rangle \\ |\nu_\mu\rangle \end{pmatrix} = \begin{pmatrix} \cos \theta_v & \sin \theta_v \\ -\sin \theta_v & \cos \theta_v \end{pmatrix} \begin{pmatrix} |\nu_1\rangle \\ |\nu_2\rangle \end{pmatrix}$$

Constant matter profile λ_0 as an example,

Significance of θ_m

Define matter basis (eigenenergy basis) $\{|\nu_L\rangle, |\nu_H\rangle\}$

$$\begin{pmatrix} |\nu_e\rangle \\ |\nu_\mu\rangle \end{pmatrix} = \begin{pmatrix} \cos \theta_m & \sin \theta_m \\ -\sin \theta_m & \cos \theta_m \end{pmatrix} \begin{pmatrix} |\nu_L\rangle \\ |\nu_H\rangle \end{pmatrix}$$


In matter basis

$$\mathbf{H}_{\text{matter-basis}} = -\frac{\omega_m}{2} \sigma_3$$

Transition Probability

$$P(|\nu_e\rangle \rightarrow |\nu_\mu\rangle) = \sin^2(2\theta_m) \sin^2(\omega_m x)$$

SOLAR NEUTRINO PROBLEM

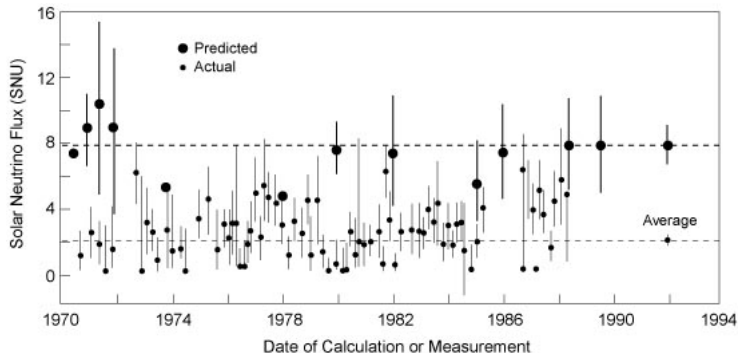


Chlorine detector (Homestake experiment) results and theory predictions.
SNU: 1 event for 10^{36} target atoms per second. Kenneth R. Lang (2010)

MSW EFFECT AND SOLAR NEUTRINOS

$$\mathbf{H} = \frac{\lambda(x) - \omega_v \cos 2\theta_v}{2} \sigma_3 + \frac{\omega_v \sin 2\theta_v}{2} \sigma_1$$

$$\begin{pmatrix} |\nu_L\rangle \\ |\nu_H\rangle \end{pmatrix} = \begin{pmatrix} \cos \theta_m & -\sin \theta_m \\ \sin \theta_m & \cos \theta_m \end{pmatrix} \begin{pmatrix} |\nu_e\rangle \\ |\nu_\mu\rangle \end{pmatrix}$$

$$\mathbf{H}_{\text{matter-basis}} = -\frac{\omega_m}{2} \sigma_3$$

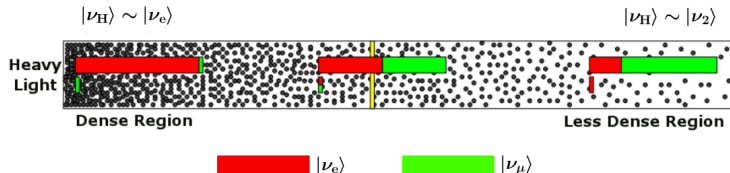

Yellow bar is the resonance point. Red: $|\nu_e\rangle$. Green: $|\nu_\mu\rangle$. Adapted from Smirnov, 2003.

MSW EFFECT INVERTED HIERARCHY

Suppose $\omega_v = (m_2^2 - m_1^2)/2E < 0$,

$$\mathbf{H} = -\frac{\omega_v}{2} \begin{pmatrix} -\cos 2\theta_v & \sin 2\theta_v \\ \sin 2\theta_v & \cos 2\theta_v \end{pmatrix} + \sqrt{2}G_F n_e(x) \begin{pmatrix} 1 & 0 \\ 0 & 0 \end{pmatrix}$$



$$\mathbf{H} = \left(\frac{-\omega_v}{2} \cos 2\theta_v + \frac{\lambda(x)}{2} \right) \sigma_3 - \frac{\omega_v}{2} \sin 2\theta_v \sigma_1$$

HAMILTONIAN

Matter Profile

$$\lambda(x) = \lambda_0 + \delta\lambda(x)$$

Basis

Background matter basis (eigen energy basis): Hamiltonian is diagonalized with only background matter profile λ_0 ,

$$H_{\text{background}} = -\frac{\omega_m}{2} \sigma_3.$$

Hamiltonian

$$\mathbf{H} = \frac{1}{2} (-\omega_m + \delta\lambda(x) \cos 2\theta_m) \sigma_3 - \frac{\delta\lambda(x)}{2} \sin \theta_m \sigma_1.$$

HAMILTONIAN

Hamiltonian in Background Matter Basis

$$\mathbf{H} = \frac{1}{2} (-\omega_{\text{m}} + \delta\lambda(x) \cos 2\theta_{\text{m}}) \sigma_3 - \frac{\delta\lambda(x)}{2} \sin 2\theta_{\text{m}} \sigma_1.$$

Matter profile

$$\lambda(x) = \lambda_0 + A \cos(kx),$$

$$\mathbf{H} = \frac{1}{2} (-\omega_{\text{m}} + \cos 2\theta_{\text{m}} A \cos(kx)) \sigma_3 - \frac{\sin 2\theta_{\text{m}}}{2} A \cos(kx) \sigma_1.$$

HAMILTONIAN

Hamiltonian in Background Matter Basis

$$\mathbf{H} = \frac{1}{2} (-\omega_{\text{m}} + \delta\lambda(x) \cos 2\theta_{\text{m}}) \sigma_3 - \frac{\delta\lambda(x)}{2} \sin 2\theta_{\text{m}} \sigma_1.$$

Matter profile

$$\lambda(x) = \lambda_0 + A \cos(kx),$$

$$\mathbf{H} = \frac{1}{2} \left(-\omega_{\text{m}} + \cos 2\theta_{\text{m}} A \cos(kx) \right) \sigma_3 - \frac{\sin 2\theta_{\text{m}}}{2} A \cos(kx) \sigma_1.$$

RABI OSCILLATIONS

The coupling strength is calculated as

$$\alpha = \langle 1 | \mathbf{d} \cdot \mathbf{E} | 2 \rangle$$


where the electric field is

$$\mathbf{E} = \mathbf{E}_0 \sin(kt).$$

and \mathbf{d} is the dipole moment.

RABI FORMULA WORKS

$$\vec{H} \sim \omega_m \begin{pmatrix} 0 & \\ & 0 \\ & & 1 \end{pmatrix} + \alpha \begin{pmatrix} \sin(kx) & \\ \cos(kx) & \\ & & 0 \end{pmatrix}$$

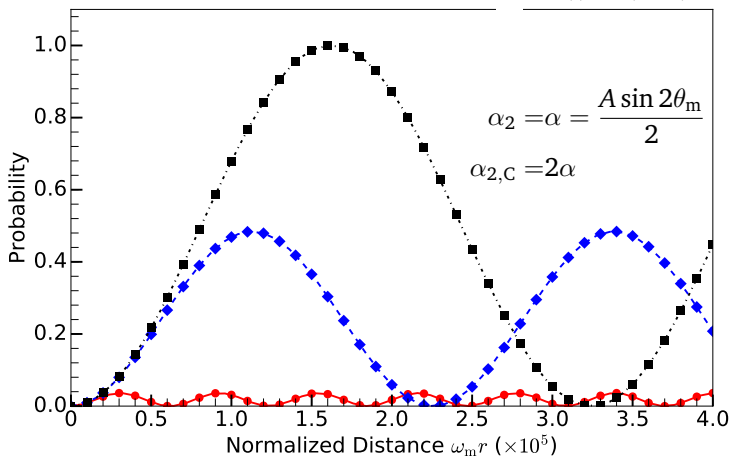

Lines: Rabi formula

Dots, diamonds, triangles, and squares are for $k = \omega_m$,
 $k = (1 - 2 \times 10^{-5})\omega_m$, and $k = (1 - 10^{-4})\omega_m$ respectively.

PARAMETERS USED FOR VACUUM OSCILLATIONS

$$\theta_{12} = 33.36/180\pi; \theta_{13} = 8.66/180\pi; \theta_{23} = 40/180 * \pi; \delta_{cp} = 0;$$
$$m_1^2 = 0.01; m_2^2 = m_1^2 + 0.000079; E = 1\text{MeV}$$

SINGLE FREQUENCY MATTER POTENTIAL

Matter potential

$$\lambda(x) = \lambda_0 + A \sin(kx),$$

Hamiltonian in new basis

$$\tilde{\mathbf{H}} = -\frac{\omega_m}{2}\sigma_3 - \frac{\delta\lambda(x)}{2}\sin 2\theta_m \begin{pmatrix} 0 & e^{2i\eta(x)} \\ e^{-2i\eta(x)} & 0 \end{pmatrix} = -\frac{\omega_m}{2}\sigma_3 + \begin{pmatrix} 0 & h \\ h^* & 0 \end{pmatrix}$$

Hamiltonian in New Basis

$$\begin{aligned} h &\equiv -\frac{\delta\lambda(x)}{2}e^{2i\eta(x)} \\ &= \frac{i}{4} \left[\exp \left(ikx + i \cos 2\theta_m \frac{A}{k} \cos(kx) \right) \right. \\ &\quad \left. - \exp \left(-ikx + i \cos 2\theta_m \frac{A}{k} \cos(kx) \right) \right] \end{aligned}$$

SINGLE FREQUENCY MATTER POTENTIAL

Off-diagonal Term in Our System

$$\tilde{\mathbf{H}} = -\frac{\omega_m}{2}\sigma_3 + \begin{pmatrix} 0 & h \\ h^* & 0 \end{pmatrix}$$

$$h \propto \left[\exp \left(ikx + i \cos 2\theta_m \frac{A}{k} \cos(kx) \right) - \exp \left(-ikx + i \cos 2\theta_m \frac{A}{k} \cos(kx) \right) \right]$$

Jacobi-Anger expansion (Kneller et al, 2013)

$$e^{i\beta \cos(kx)} = \sum_{n=-\infty}^{\infty} i^n J_n(\beta) e^{inkx},$$

where $J_n(\beta)$ are Bessel's functions of the first kind.

SINGLE FREQUENCY MATTER PROFILE

Transition Probability

$$P_{L \rightarrow H}^{(n)} = \frac{|\hat{B}_n|^2}{|\hat{B}_n|^2 + (n\hat{k} - 1)^2} \sin^2 \left(\frac{q^{(n)}}{2} x \right),$$

where

$$q^{(n)} = \sqrt{|\Gamma^{(n)}|^2 + (n\hat{k} - 1)^2}, \quad \text{frequency of oscillations}$$

$$\Gamma^{(n)} = |\hat{B}_n|, \quad \text{width of resonance } (n\hat{k} \text{ as parameter})$$

Resonance conditions

$$\hat{k} \sim \frac{1}{n}$$

SINGLE FREQUENCY MATTER POTENTIAL REVISITED

Width

$$\alpha_n = -(-i)^n n k \tan 2\theta_m J_n(A \cos 2\theta_m/k)$$

$$J_n(n \operatorname{sech} \beta) \sim \frac{e^{-n(\beta - \tanh \beta)}}{\sqrt{2\pi n \tanh \beta}}, \quad \text{for large } n$$

\Rightarrow

$$|\alpha_n| \propto \frac{e^{-n(\beta - \tanh \beta)}}{\sqrt{2\pi n \tanh \beta}}, \quad \text{for large } n$$

where $\operatorname{sech} \beta = A \cos 2\theta_m/\omega_m$.

$\beta - \tanh \beta > 0 \Rightarrow$ **Width** drops fast at large n .

TWO-FREQUENCY MATTER PROFILE

Matter Profile

$$\lambda(x) = \lambda_0 + \delta\lambda(x), \quad \delta\lambda(x) = A_1 \sin(k_1 x) + A_2 \sin(k_2 x).$$

TWO-FREQUENCY MATTER P

$$\hat{h} = \sum_{n=-\infty}^{\infty} \frac{1}{2} \hat{B}_n e^{i(n\hat{k}-1)\hat{x}},$$

Hamiltonian Off-diagonal Element

Apply Jacobi-Anger expansion,

$$\hat{h} = \sum_{n_1=-\infty}^{\infty} \sum_{n_2=-\infty}^{\infty} \frac{1}{2} \hat{B}_{n_1, n_2}(\hat{k}_1, \hat{k}_2) e^{i(n_1 \hat{k}_1 + n_2 \hat{k}_2 - 1)\hat{x}},$$

where

$$\begin{aligned} & \hat{B}_{n_1, n_2}(\hat{k}_1, \hat{k}_2) \\ &= -(-i)^{n_1+n_2} (n_1 \hat{k}_1 + n_2 \hat{k}_2) J_{n_1} \left(\frac{\hat{A}_1 \cos 2\theta_m}{\hat{k}_1} \right) J_{n_2} \left(\frac{\hat{A}_2 \cos 2\theta_m}{\hat{k}_2} \right) \end{aligned}$$

Which terms are important?

SINGLE FREQUENCY MATTER PROFILE REVISITED

Matter profile

$$\lambda(x) = \lambda_0 + A \cos(kx),$$

$k_1 = \omega_m$			
n	D	D'_1	$2\pi\omega_m/\Omega_n$
1	0	-	3.2×10^5
-1	10^5	4.8×10^{-6}	3.1
2	1.1×10^9	2.1×10^{-14}	6.3
-2	3.4×10^9	6.9×10^{-15}	2.1

SINGLE FREQUENCY MATTER PROFILE REVISITED

Matter profile

$$\lambda(x) = \lambda_0 + A \cos(kx),$$

$k_1 = (1 - 2 \times 10^{-5})\omega_m$			
n	D	D'_1	$2\pi\omega_m/\Omega_n$
1	1	-	2.2×10^5
-1	10^5	1	3.1
2	1.1×10^9	1	6.3
-2	3.4×10^9	1	2.1

SINGLE FREQUENCY MATTER PROFILE REVISITED

Matter profile

$$\lambda(x) = \lambda_0 + A \cos(kx),$$

$$k_1 = (1 - 10^{-4})\omega_m$$

n	D	D'_1	$2\pi\omega_m/\Omega_n$
1	5.2	-	6.2×10^4
-1	10^5	5.2	3.1
2	1.1×10^9	5.2	6.3
-2	3.4×10^9	5.2	2.1

CASTLE WALL MATTER PROFILE


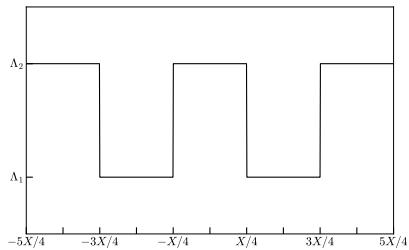



Figure: Castle wall matter profile

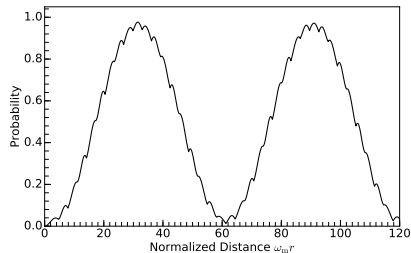

CASTLE WALL MATTER PROFILE

Table: Relative detuning of each frequency.

$\{n_1, n_2\}$	D	$D'_{\{1,0\}}$
$\{1, 0\}$	0	-
$\{-1, 0\}$	48	1.0×10^{-2}
$\{0, 1\}$	1.5×10^2	1.1×10^{-3}
$\{2, 0\}$	2.4×10^2	2.0×10^{-4}

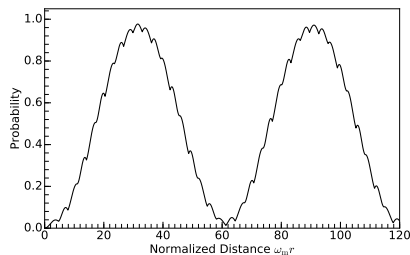

TWO-FREQUENCY MATTER PROFILE

Resonance Lines


There are still resonances, i.e., (almost) zero phases, on lines

$$n_{1,0}\hat{k}_1 + n_{2,0}\hat{k}_2 - 1 = 0$$

in $\{\hat{k}_1, \hat{k}_2\}$ plane. \Rightarrow Resonance width for each point on resonance lines.


TWO-FREQUENCY MATTER Pf

$$\hat{h} = \sum_{n_1} \sum_{n_2} \frac{1}{2} \hat{B}_{n_1, n_2}(\hat{k}_1, \hat{k}_2) e^{i(n_1 \hat{k}_1 + n_2 \hat{k}_2 - 1)\hat{x}},$$

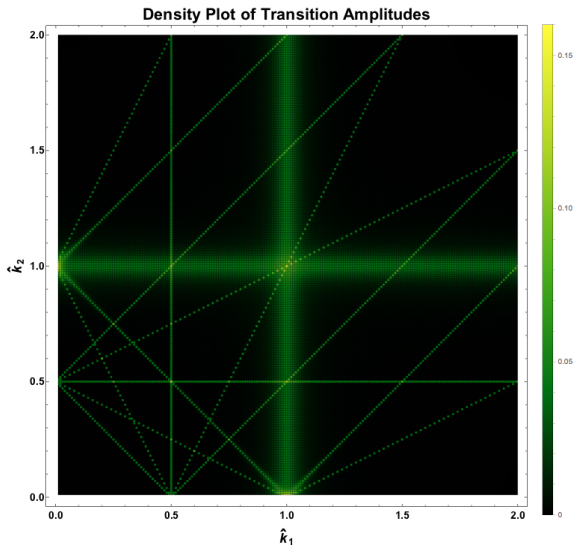

Density plot of transition amplitudes calculated using only one term out of the whole summation in Hamiltonian. $n_1, n_2 \in [-2, 2]$

TWO-FREQUENCY MATTER PROFILE

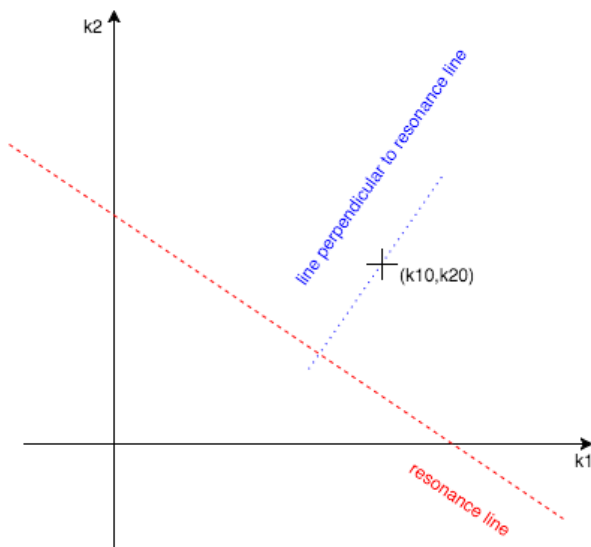

Resonance line, distance to resonance, and width

TWO-FREQUENCY MATTER PROFILE

Width

$$\Gamma_2 = \frac{\hat{B}_{n_1, n_2}(\hat{k}_{1, \text{intercept}}, \hat{k}_{2, \text{intercept}})}{\sqrt{n_1^2 + n_2^2}}.$$


Distance to Resonance Line

$$d = \frac{|n_1 \hat{k}_{10} + n_2 \hat{k}_{20} - 1|}{\sqrt{n_1^2 + n_2^2}}.$$


Distance to Resonance Width Ratio

$$Q_2 = \frac{d}{\Gamma_2}.$$


TWO-FREQUENCY MATTER PROFILE

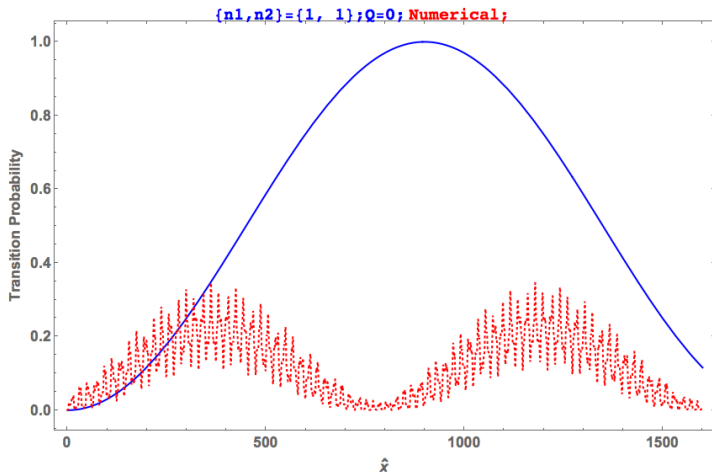


TWO-FREQUENCY MATTER PROFILE

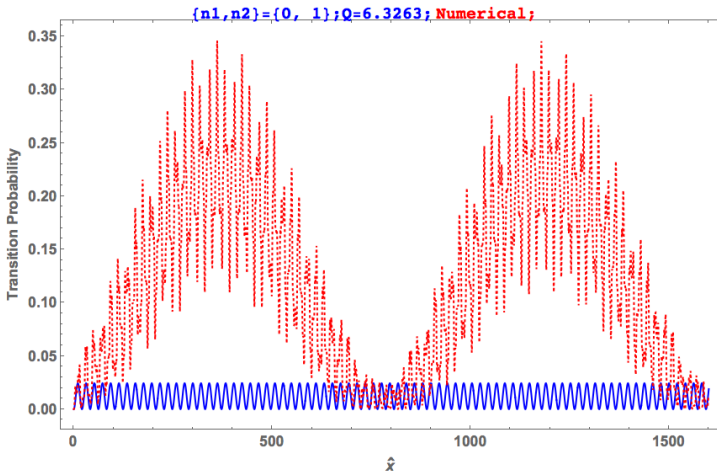


TWO-FREQUENCY MATTER PROFILE

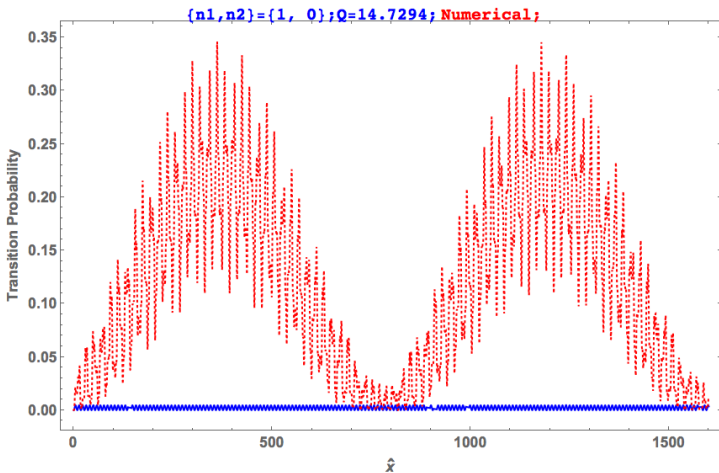


TWO-FREQUENCY MATTER PROFILE

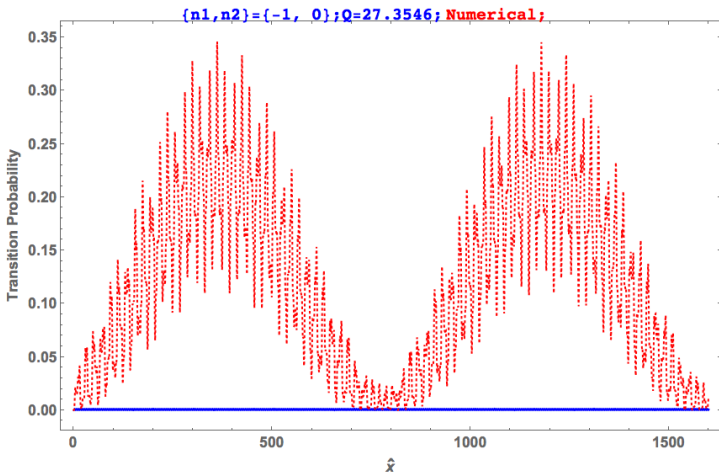

TWO-FREQUENCY MATTER PROFILE

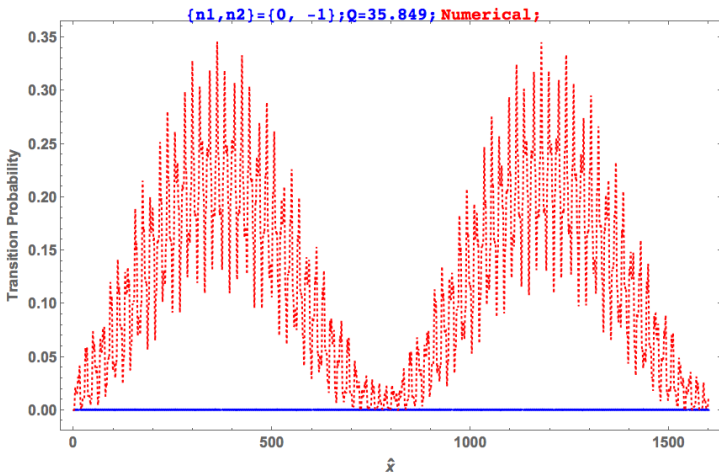

TWO-FREQUENCY MATTER PROFILE

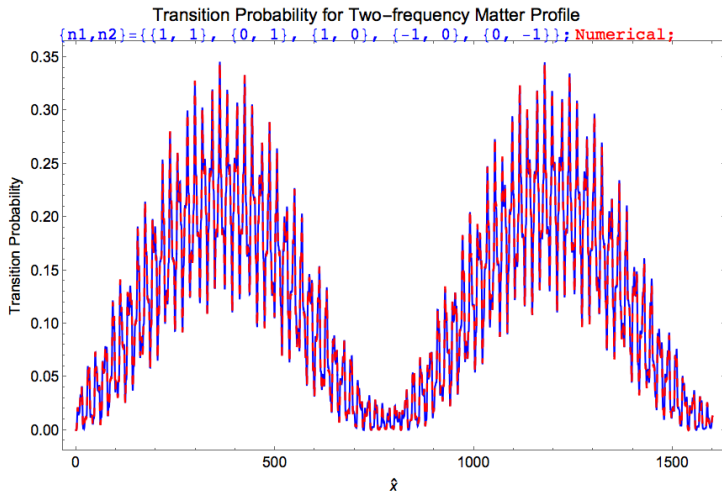

BESSEL'S FUNCTION

$$J_n(\beta) = \sum_{m=0}^{\infty} \frac{(-1)^m}{m! \Gamma(m+n+1)} \left(\frac{\beta}{2}\right)^{2m+n}$$

REFERENCES I