# Asynchronous and Decentral Group Management in Messengers with Delegates Proof of Stake

And Hell - 2020/03/17

### Index

- Look back
- Updated Protocol
  - Elections
  - Forks
- Delivery Issues
- Conclusion

### Look back

- Group Chats
- Delegated Proof of Stake

## **Group Chats**

$$gr = (\mathit{Id}_{gr}, \mathcal{M}_{gr}, \mathcal{M}_{gr}^*, \mathit{info}_{gr})$$

#### **Closeness**

**Privacy** 

**Same State** 

## **Delegated Proof of Stake (DPoS)**

- Stakeholders elect Delegates
- Delegates confirm Transactions with Blocks

## **Group Chats + DPoS**

- Members elect Delegates
- Delegates confirm Suggestions with Blocks
  - (Add, Remove, Info)
- Blocks updates the Group

## **Open Issues**

- Elections with *Voting Windows* 
  - Synchronous
  - Complexity
- Forks
  - Can violate Same State
  - Information loss

## **Updated Protocol**

- Asynchronous Elections
- Fork avoidance with Server-Side-Timestamps

#### **Elections**

$$V = (u_{id}, \mathcal{V}_{u_{id}}, \textit{Signature}, \textit{BlockRef})$$

- $ullet \, {\cal V}_{u_{id}} = \{v_1, \ldots, v_n\}$
- Send Votes any time
- Votes are included in the blocks
- $\mathcal{M}^*$  is recomputed on each block


$$egin{aligned} \mathcal{V} &= \{\mathcal{V}_1,...,\mathcal{V}_m\} \ &x_{u_{id}} = \sum_{i=0}^{|\mathcal{V}|} egin{cases} rac{1}{|\mathcal{V}_i|} & ext{, if } u_{id} \in \mathcal{V}_i \ 0 & ext{, else} \end{cases} & ext{for all } u_{id} \in \mathcal{M} \ &\mathcal{M}^* := \sqrt{|\mathcal{M}|} \, best \, x_{u_{id}} \end{aligned}$$

#### **Block**

 $B_S = (b_{id}, pbh, S, sig, u_{id}, MVP, VMR, nVMR, votes)$ 


#### Fork avoidance


- Messages are tagged with Server-Side-Timestamps
- SST are used to detect the first block

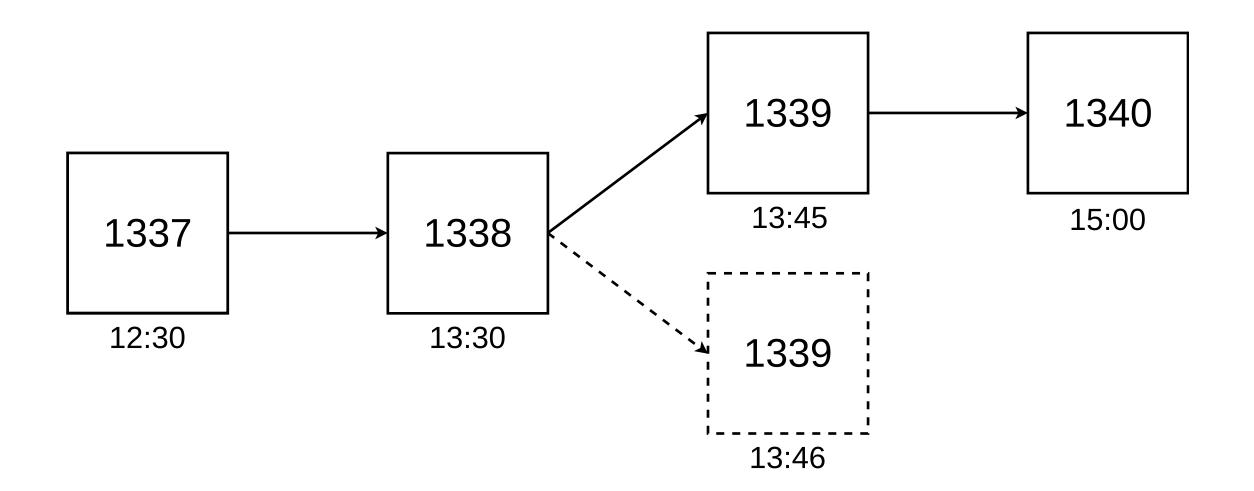

# **Delivery Issues**


- Delayed Messages
- Lost Messages

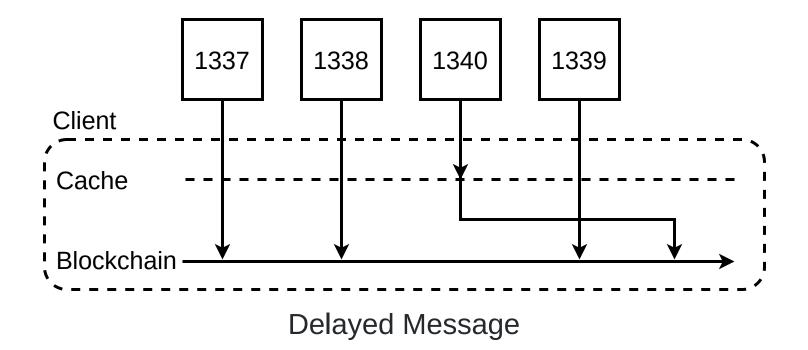

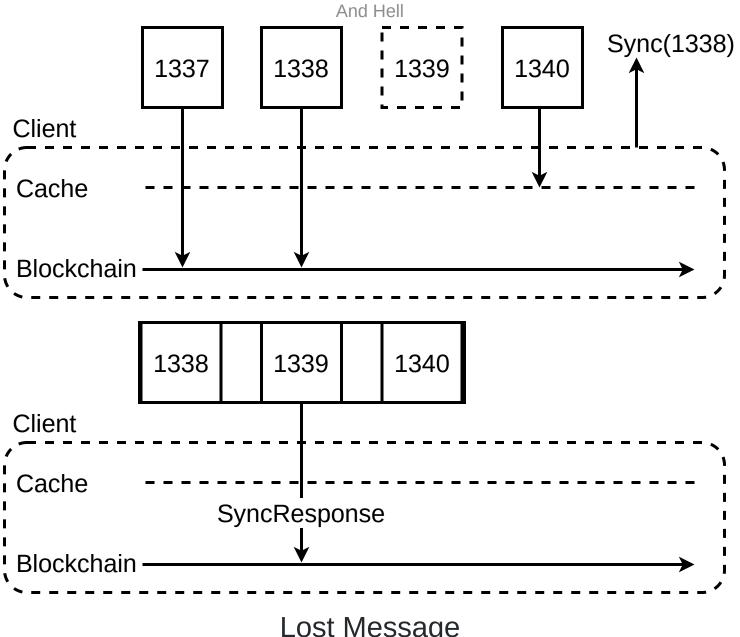

Lost Message

## Example

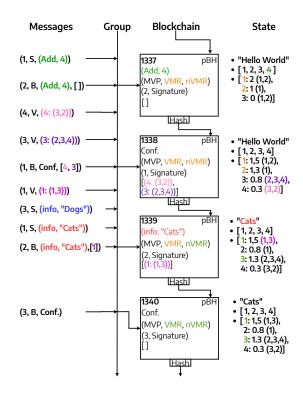

## **Conclusion**

