

A (R)EVOLUÇÃO DO **FRONT-END**



MARLOS CARMO

GERENTE DE OPERAÇÕES DIGITAIS
NA **RC COMUNICAÇÃO**

#SOUDEV HÁ 15 ANOS / **#SOUCHEFE** HÁ 8 ANOS



marlos@gmail.com

twitter.com/marloscarmo

facebook.com/marloscarmo

github.com/marloscarmo

Há **15 anos** atrás não “existia” a disciplina de front-end...

Ou você era:

Ou você era:

webmaster



Ou você era:

webmaster ou



Ou você era:

webmaster ou **webdesigner**



No final das contas **era quase a mesma coisa** e o que os diferenciava era...

O.F.D.I.

O

RIA

ENIADAS

GIONAIS

O.F.D.I.

OTOS

LHOS

A O.F.D.I.

ios

A

RABALHO



BEM VINDO A O.F.D.I.



BEM VINDO A O.F.D.I.

COM DIPLOMA E CREDENCIAL
OFICIALIZADO PELA O.F.D.I.
ORDEM FEDERAL DOS
DETETIVES E INVESTIGADORES
.CURSO COM DURAÇÃO DE 60
DIAS PARA ALUNOS DE PASSO
FUNDO E REGIÃO .CURSO AO
VIVO EM SALAS DE AULA PARA
ALUNOS DE OUTROS ESTADOS
CURSO POR
CORRESPONDENCIA
COMPOSTO DE APOSTILAS E QUESTI
ENVIADO A ESCOLA PARA SER AVALIDOS
APROVADOS, APOS O ALUNO RECEBERA
DE INDENTIFICAÇÃO E REGISTRO DO
NACIONAL DE INVESTIGAÇÃO E SEGURANÇ



SEJA UM PROFISSIONAL

webmaster

fazia sites com fundo

preto



webdesigner

fazia sites com fundo

branco



Apple

The chip
every Pow
Macintos
is up to t
as fast.

April 29, 1998

Hot News Headlines

\$55 Million Q2 Profit for App

QuickTime 3 takes
multimedia to the
next level — for
Mac and Windows.



Think 3.

The fastest, baddest
Power Mac G3's.
Built to order.
Shipped factory direct.
Order 24 hours a day.



Think 300MHz.

The
Apple Store

Hot News

About Apple

Products

Support


Design & Publish

Find:




Shortcut

Em 1998 os sites eram praticamente todos **estáticos** e os **editores WYSIWYG** reinavam.

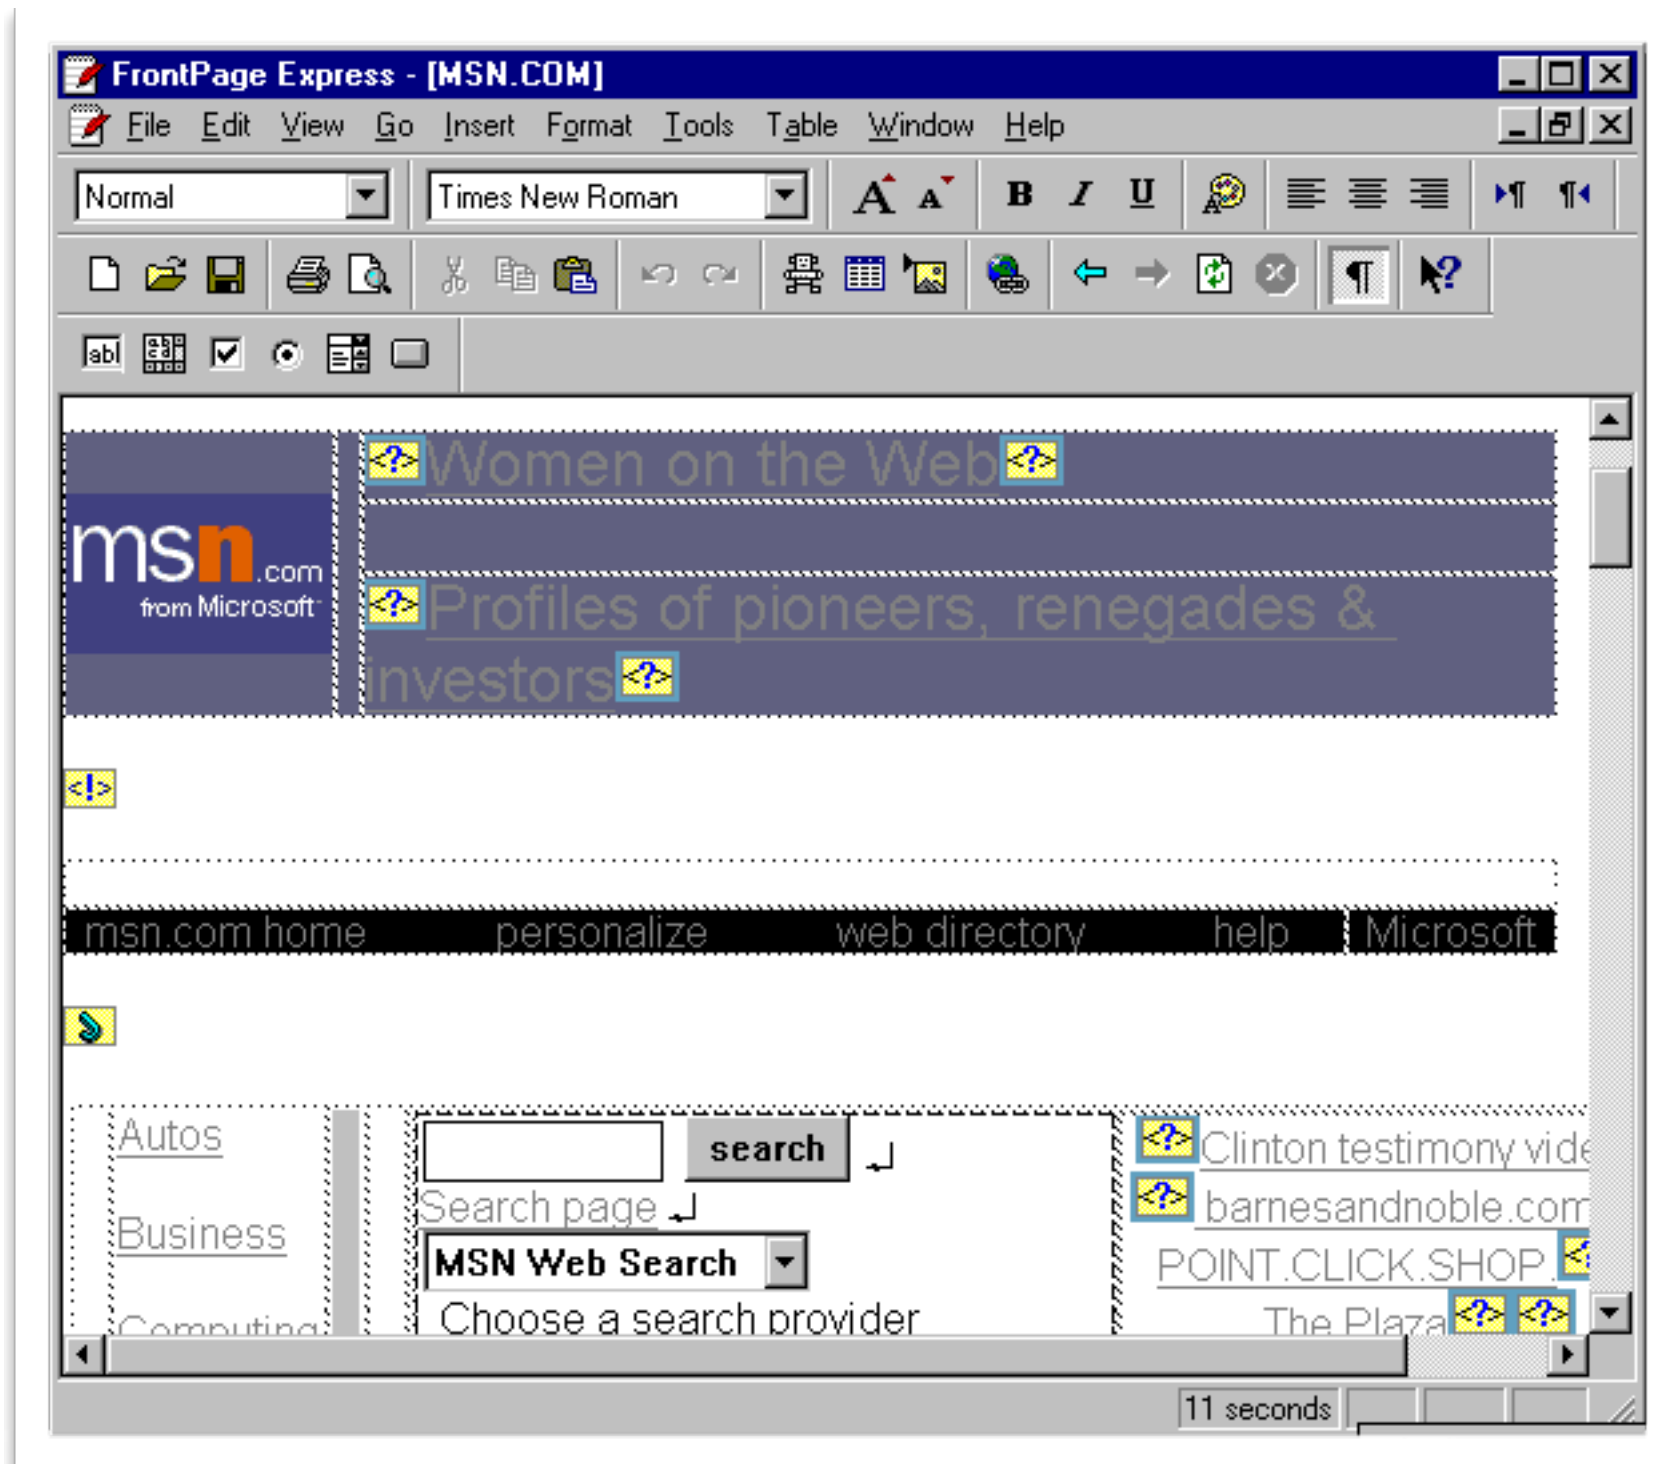


FrontPage

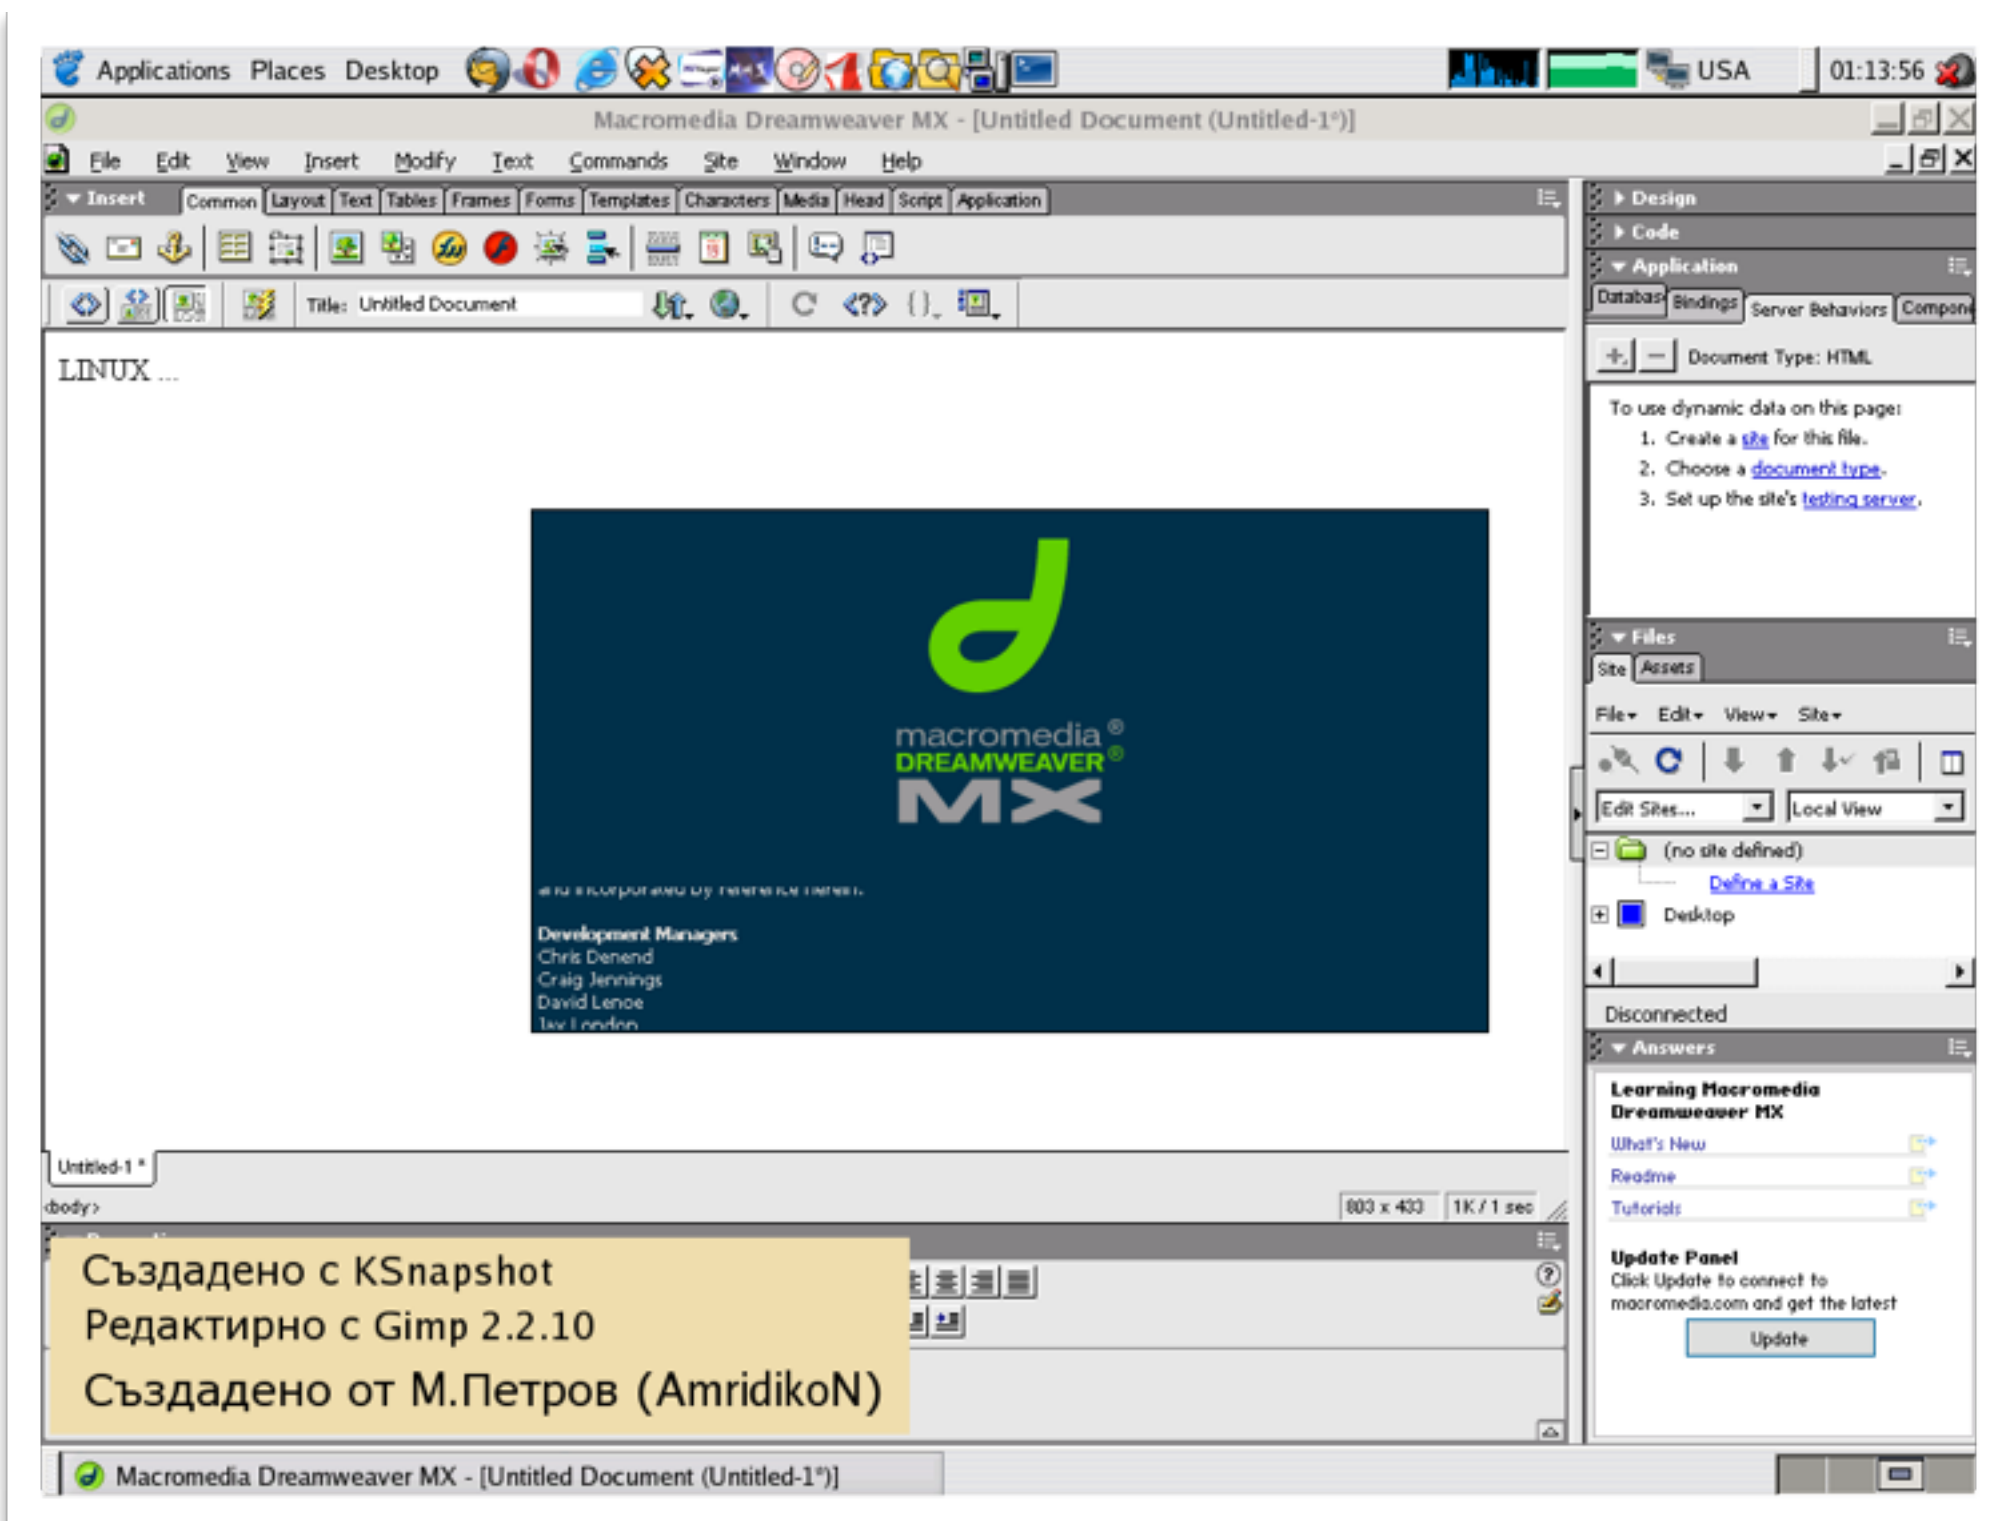

Dreamweaver

Não existia nenhuma preocupação com o código e sua manutenção.

“Desenhou” o site no FrontPage e rodou no IE. **#pronto**

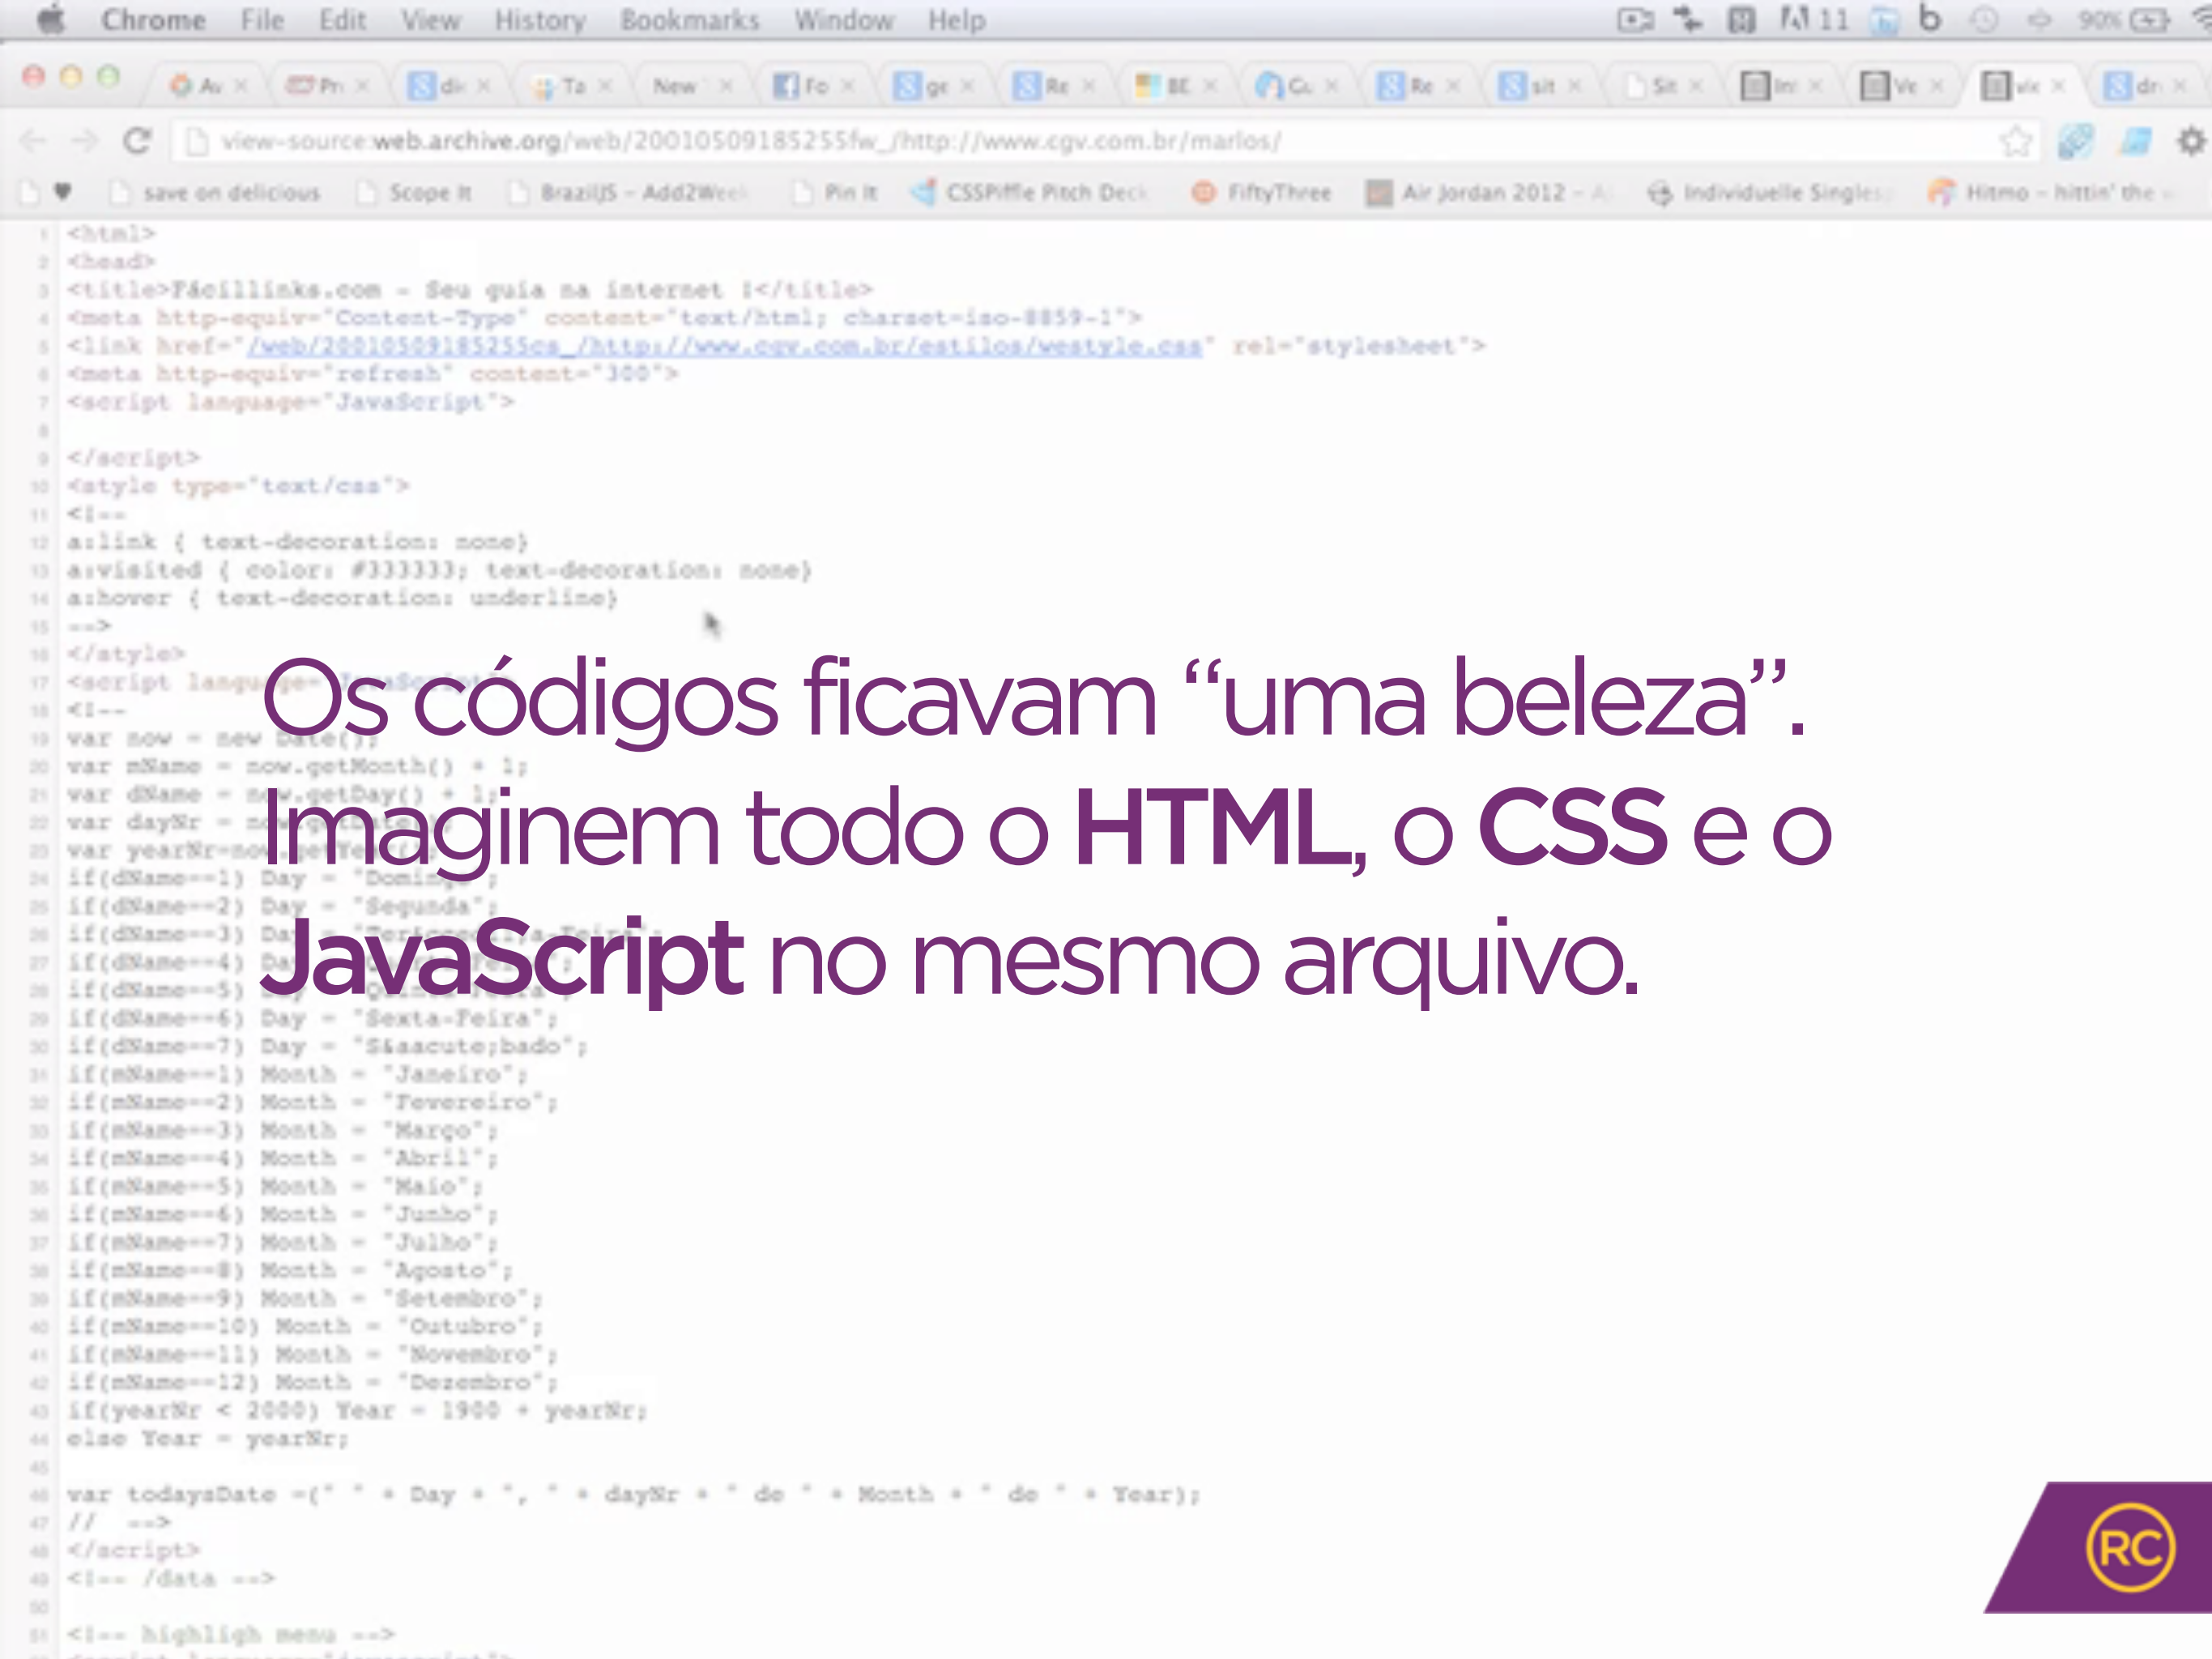

Os códigos ficavam “uma beleza”.
Imaginem todo o **HTML**, o **CSS** e o
JavaScript no mesmo arquivo.

A arte do CTRL + C/ Ctrl + V prevalecia.

Existiam diretórios com vários tipos de menus, gifs animados, DHTMLs, Applets e tudo mais. Era só copiar e colar no seu código.

Com o passar do tempo a **divisão dos cargos** foi aumentando junto com a popularização das tecnologias.

webdesigner

programador ASP

webdeveloper

programador PHP

webwriter

Com o passar do tempo a **divisão dos cargos** foi aumentando junto com a popularização das tecnologias.

webdesigner

programador ASP

webdeveloper

programador PHP

webwriter

menino do HTML


Os programadores que se especializavam seguiam o caminho do back-end, pois lá estava toda a magia.

“Você, menino do HTML, um dia será um programador back-end”

(mas enquanto isso recorte estas 42 telas aqui para hoje)

Isso se tornou mais forte ainda com a popularização do Flash.

Os sites não precisavam ter muito conteúdo, desde que tivessem uma animação de abertura.

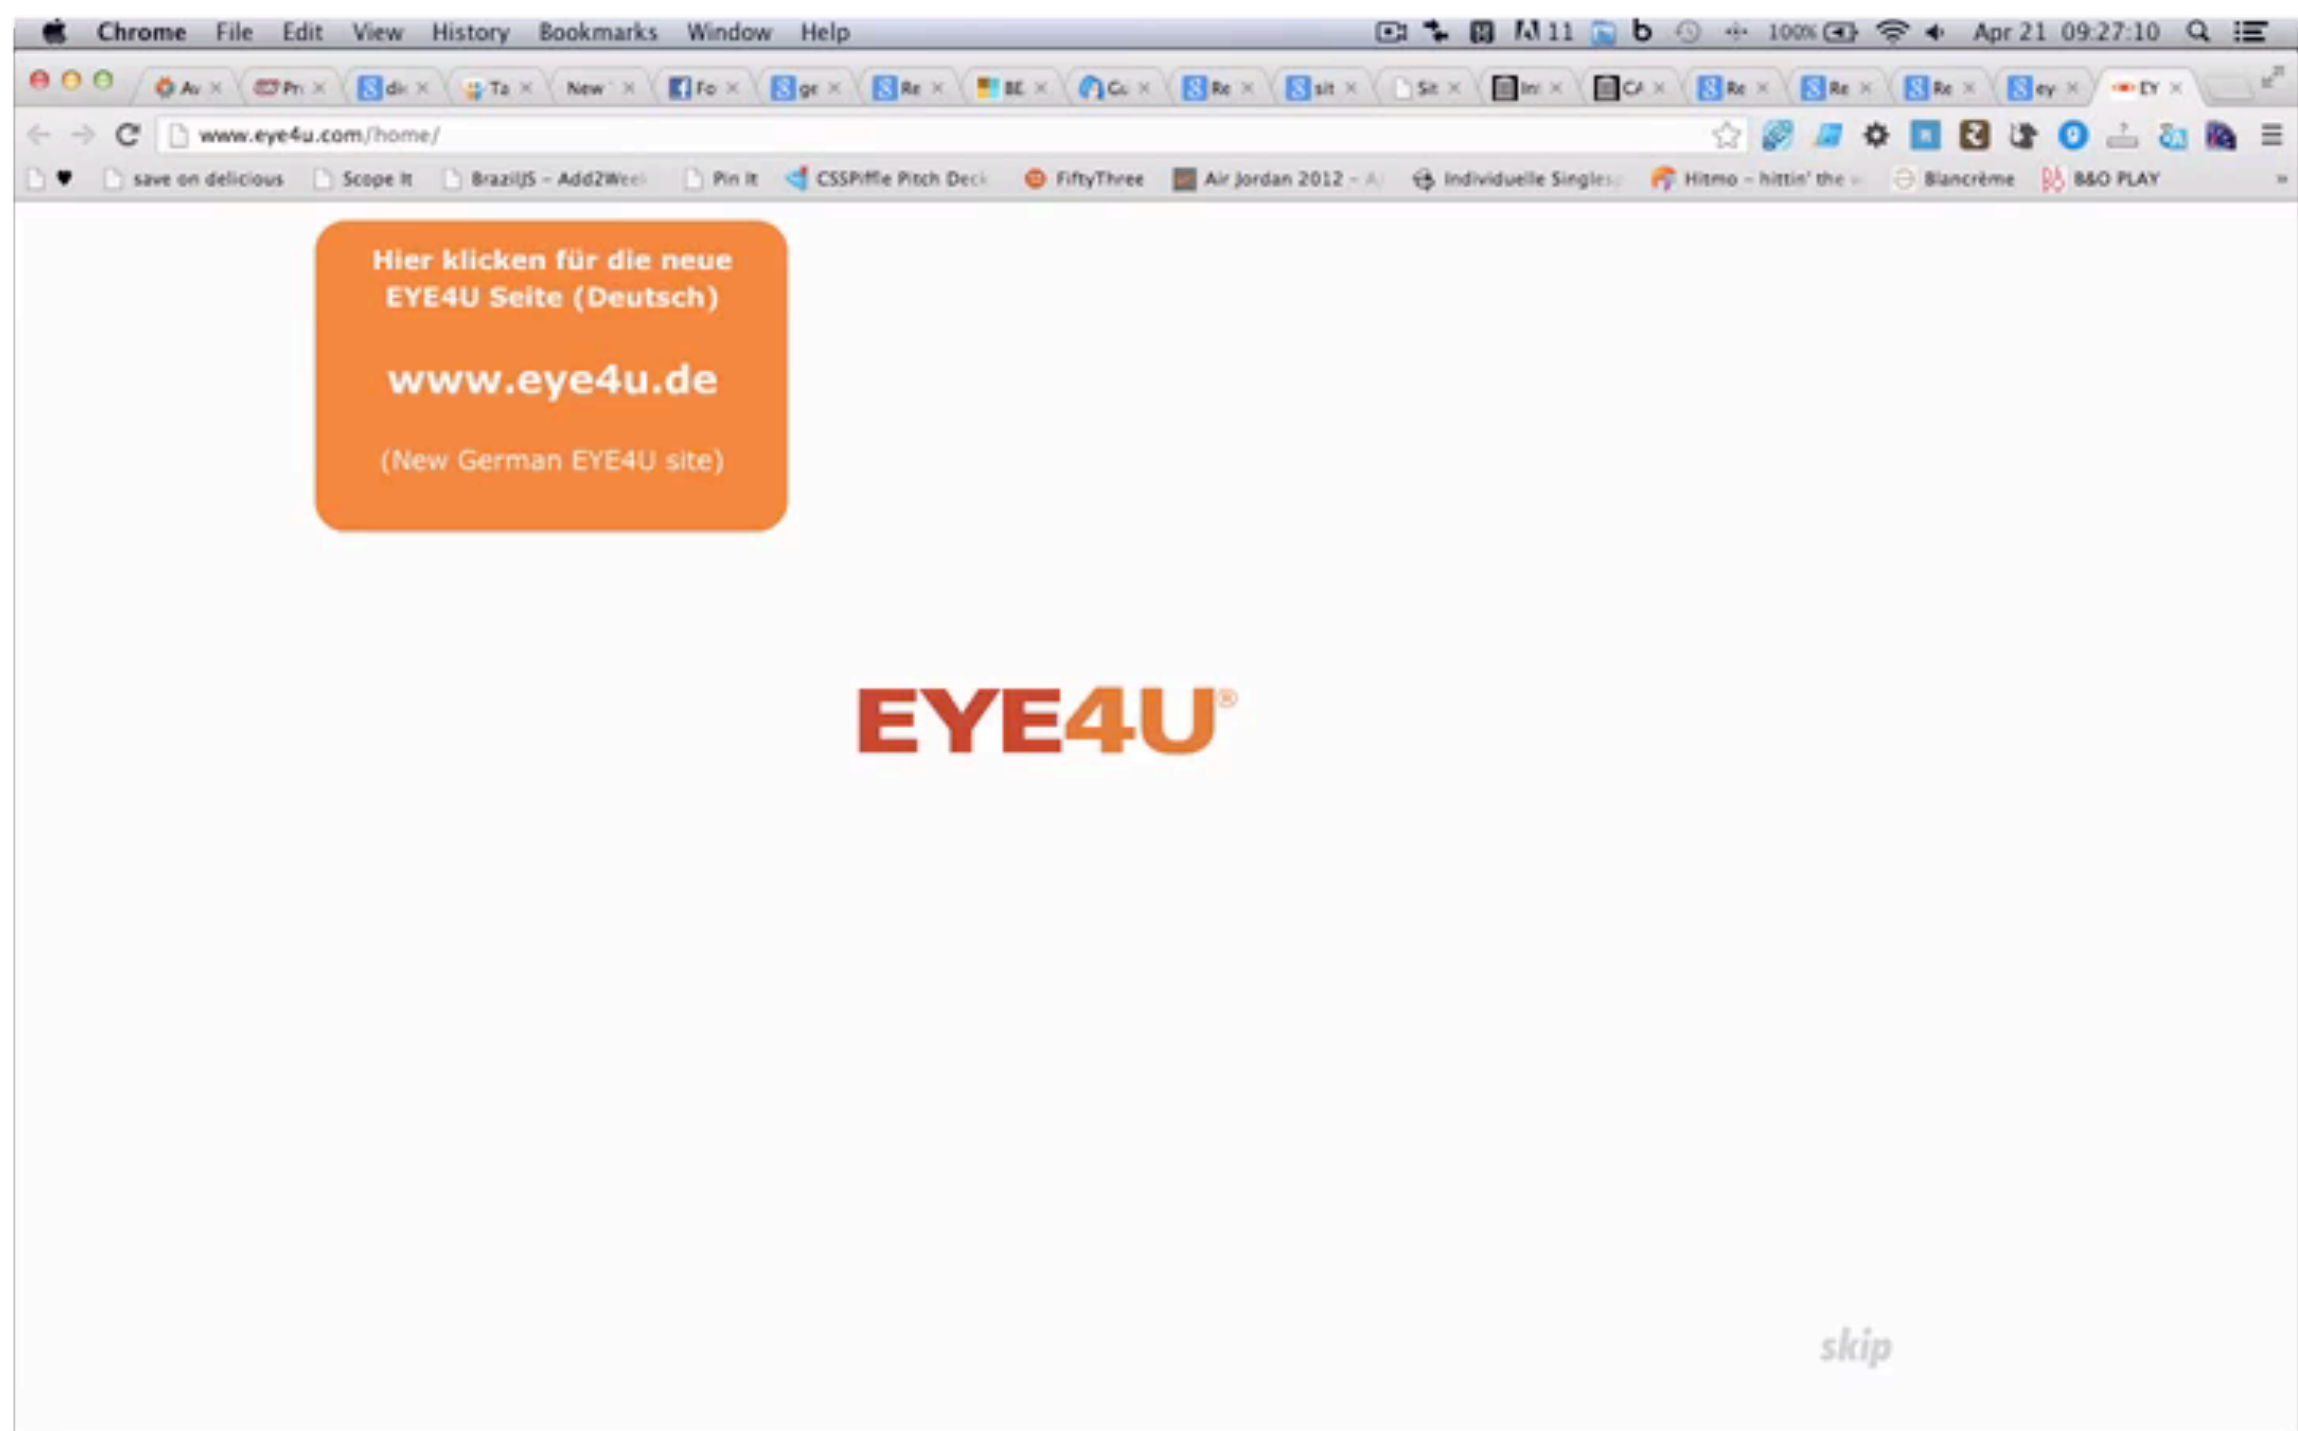

E nos dias de hoje a coisa mudou muito.
O menino do HTML agora tem até nome:
FRONT-END ENGINEER

E o trabalho fica cada vez mais
COMPLEXO

Antes, o JavaScript que não era levado a sério e era considerado uma

TOY LANGUAGE

Atualmente está se tornando uma
linguagem cada vez mais universal.



BROWSER



WEB APPS



PhoneGap

MOBILE APPS



DESKTOP APPS



SERVIDOR

ETC



E um bom profissional de front-end tem que **entender bem das seguintes disciplinas...**

CONHECIMENTOS DE SERVER

SUORTE MULTI-BROWSERS

SUORTE MULTI-DEVICES

SUORTE MULTI-TELAS

ACESSIBILIDADE

PERFORMANCE

SEGURANÇA

TESTES

SEO



ALGUNS PASSOS PARA UM BOM



FRONT-END



Nãõ use IE


#pronto

**Ajudar a comunidade também é
super importante.**

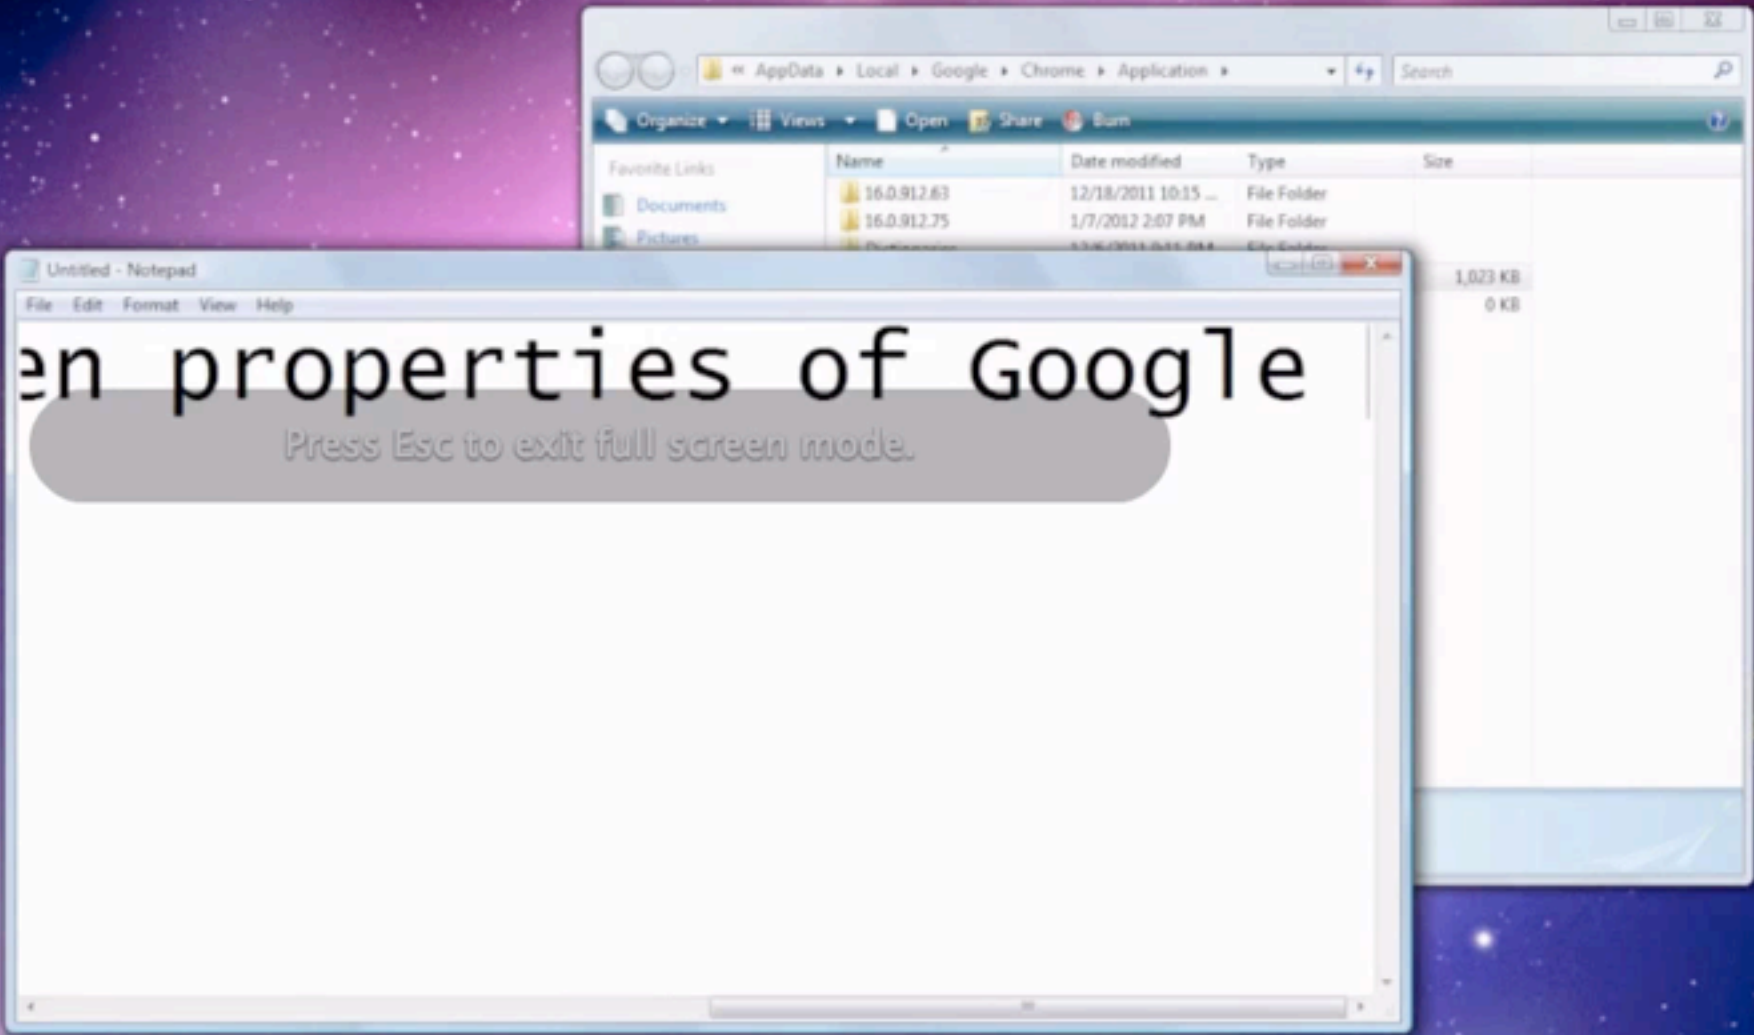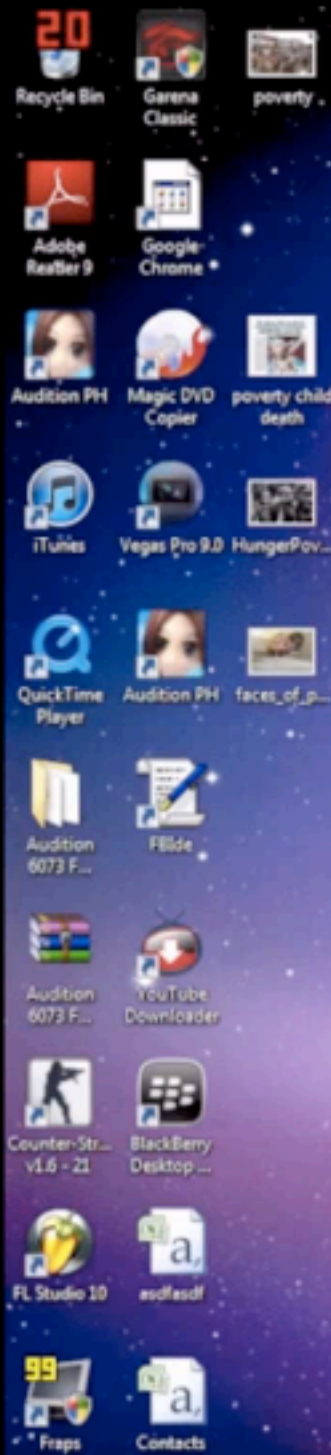

Escolha um bom
EDITOR

Sublime Text

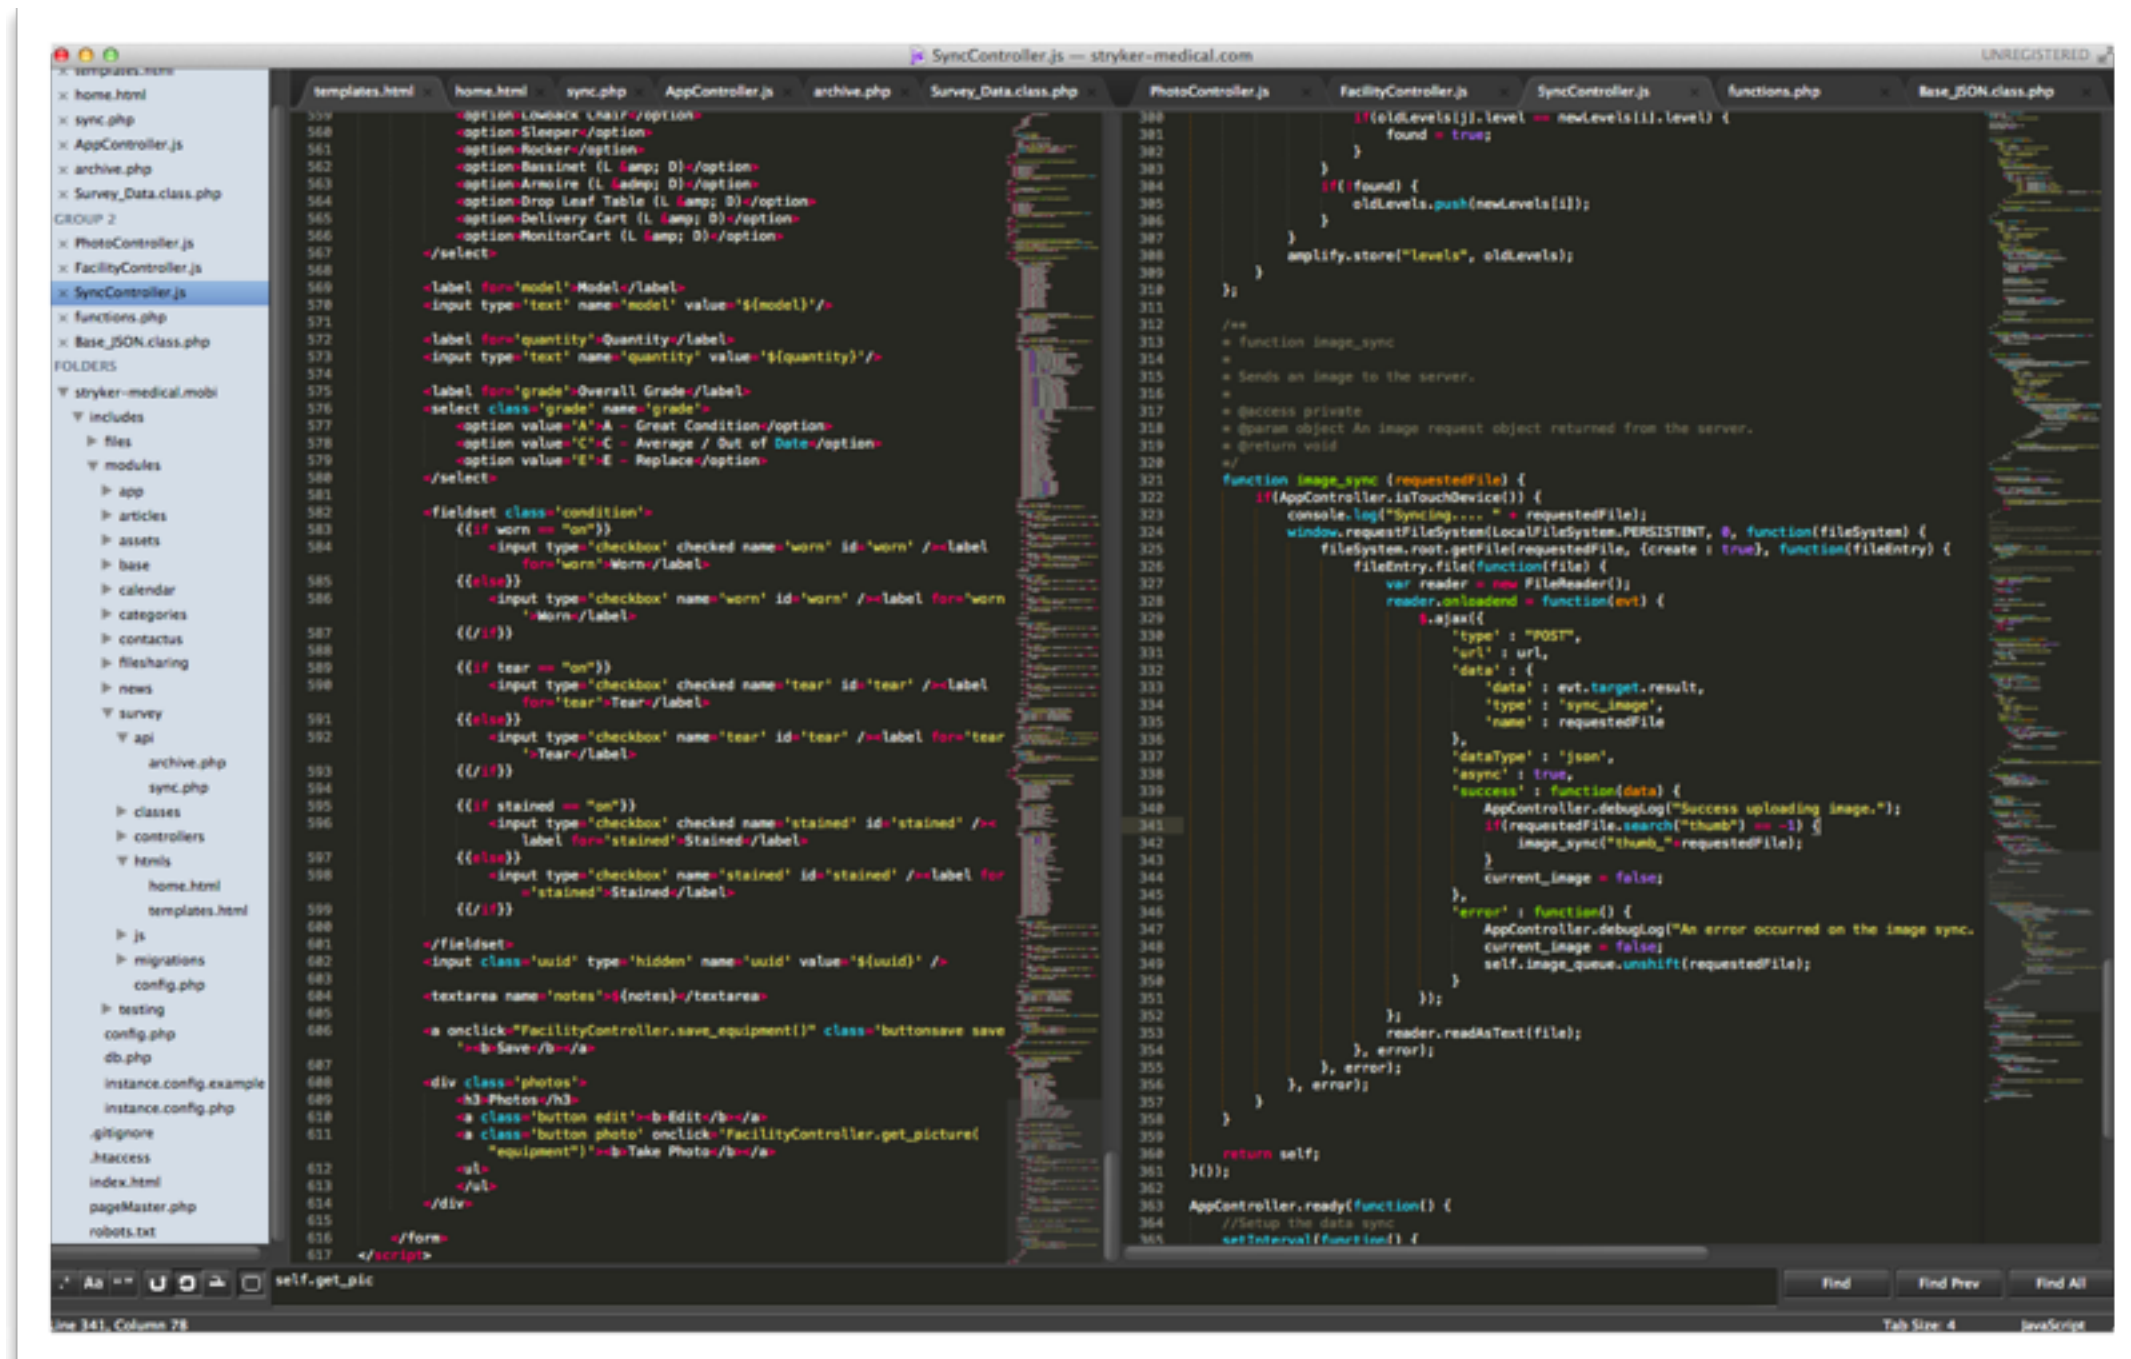

<http://www.sublimetext.com/>

VIM

```
* Press ? for help
.. (up a dir)
s/marloscarma/Sites/kanban/js/
└ lib/
  kanban.js
  main.js
  plugins.js
  presentation.js
  redmine.js
  tool.js

1 /*!
2 * Kanban by @marloscarma
3 * Author: Marlos Carmo
4 * http://www.apache.org/licenses/LICENSE-2.0.txt
5 */
6
7 define(['jquery', 'exports', 'underscore'], function($, exports, underscore){
8
9   exports.init = function($scope, kanban) {
10     $scope.tool = new Redmine($scope, kanban);
11     $scope.tool.start();
12   }
13
14   var Redmine = function($scope, kanban) {
15     this.$scope = $scope;
16     this.$scope.tasks = [];
17     this.proxyURI = "";
18     this.kanban = kanban;
19     this.listOfSpentTimesUsed = [];
20     this.reloadCount = 0;
21     this.totalLoadTasks = 0;
22   }
23
24   Redmine.prototype.start = function() {
25     this.proxyURI = this.$scope.settings.appURI +
26       "redmine.php?api_key=" + this.$scope.settings.apiKey +
27       "&redmine_uri=" + this.$scope.settings.redmineURI;
28
29     this.reloadCount++;
30
31     this.loadActivities();
32     this.loadSpentTimeActivities();
33   }
34
35   Redmine.prototype.loadActivities = function() {
36     this.loadAPI({
37       action : "loadActivities"
38     }, this.onLoadActivities );
39   }
40
41   Redmine.prototype.onLoadActivities = function(data) {
42     this.$scope.activities = [];
43
44     for (var t in data.trackers) {
45       this.$scope.activities.push({
46         name : data.trackers[t].name,
47         id : data.trackers[t].id
48       });
49     }
50
51   }
52 }
```

rs/marloscarma/Sites/kanban/js/redmine.js
"redmine.js" 595L, 21681C

<http://www.vim.org/>

NÃO REIVENTE A RODA

Use as melhores práticas

HTML5 Boilerplate

HTML5 ★ BOILERPLATE

SOURCE CODEDOCSOTHER PROJECTS

The web's most popular front-end template

HTML5 Boilerplate helps you build **fast**, **robust**, and **adaptable** web apps or sites. Kick-start your project with the combined knowledge and effort of 100s of developers, all in one little package.

Download v4.2.0

Get a custom build

[See the CHANGELOG](#)

Save time. Create with confidence.

★ **Analytics, icons, and more**


A lean, mobile-friendly HTML template; optimized Google Analytics snippet; placeholder touch-device icons; and docs

★ **Normalize.css and helpers**

Includes [Normalize.css](#) v1 — a modern, HTML5-ready alternative to CSS resets — and further base styles, helpers, media queries,

<http://html5boilerplate.com/>

HTML5 Boilerplate

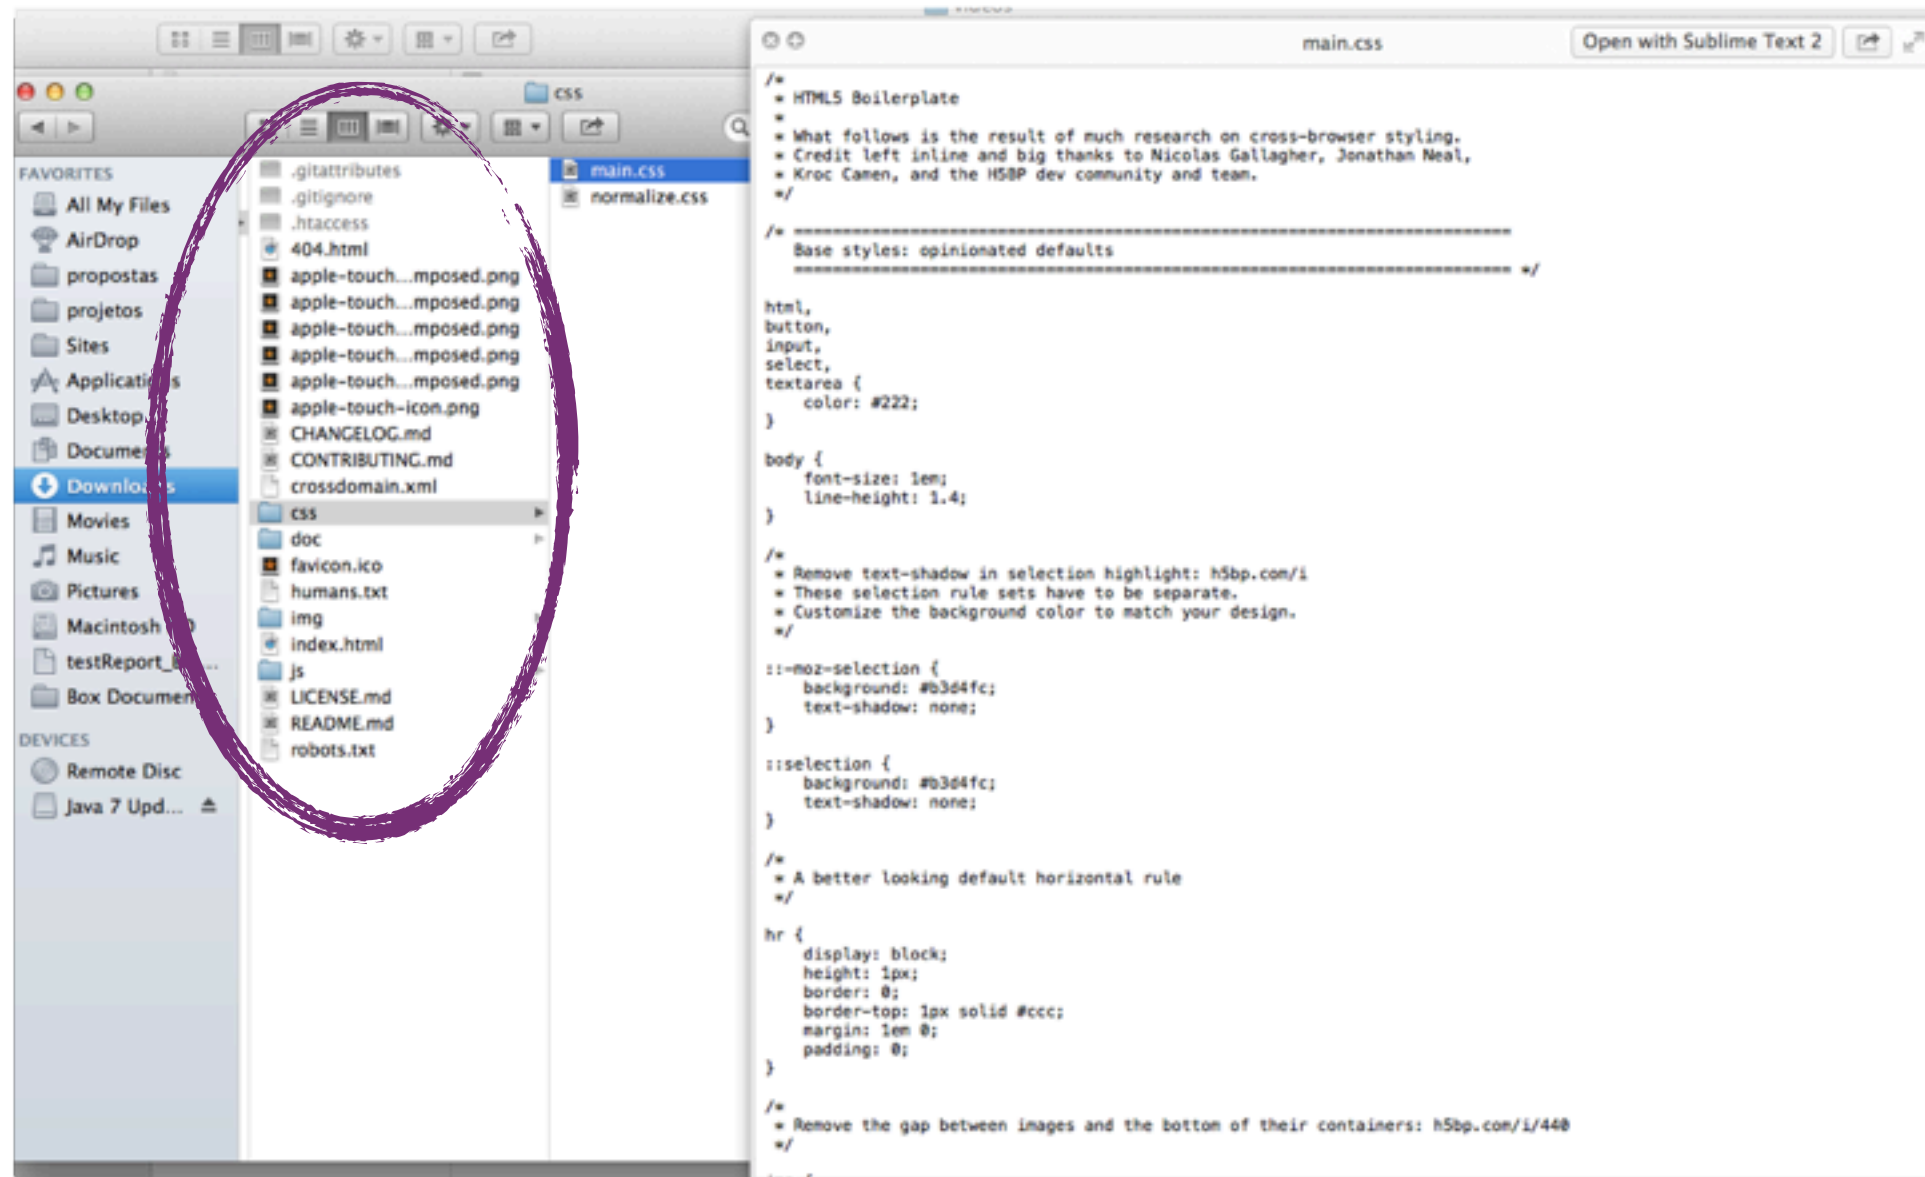

HTML Email Boilerplate



<http://htmlemailboilerplate.com/>

HTML Email Boilerplate

```
/* Some sensible defaults for images
1. "-ms-interpolation-mode: bicubic" works to help ie properly resize images in IE. (if you are resizing them using the
width and height attributes)
2. "border:none" removes border when linking images.
3. Updated the common Gmail/Hotmail image display fix: Gmail and Hotmail unwantedly adds in an extra space below images
when using non IE browsers. You may not always want all of your images to be block elements. Apply the "image_fix"
class to any image you need to fix.

Bring inline: Yes.
*/
img {outline:none; text-decoration:none; -ms-interpolation-mode: bicubic;}
a img {border:none;}
.image_fix {display:block;}

/** Yahoo paragraph fix: removes the proper spacing on the paragraph (p) tag. To correct we set the top/bottom margin to
1em in the head of the document. Simple fix with little effect on other styling. NOTE: It is also common to use two
breaks instead of the paragraph tag but I think this way is cleaner and more semantic. NOTE: This example recommends
1em. More info on setting web defaults: http://www.w3.org/TR/CSS21/sample.html or
http://meiert.com/en/blog/20070922/user-agent-style-sheets/

Bring inline: Yes.
**/
p {margin: 1em 0;}

/** Hotmail header color reset: Hotmail replaces your header color styles with a green color on H2, H3, H4, H5, and H6
tags. In this example, the color is reset to black for a non-linked header, blue for a linked header, red for an
active header (limited support), and purple for a visited header (limited support). Replace with your choice of
color. The !important is really what is overriding Hotmail's styling. Hotmail also sets the H1 and H2 tags to the same
size.

Bring inline: Yes.
**/
h1, h2, h3, h4, h5, h6 {color: black !important;}
h1 a, h2 a, h3 a, h4 a, h5 a, h6 a {color: blue !important;}
```


Twitter Bootstrap



<http://twitter.github.io/bootstrap/>

Twitter Bootstrap

[Home](#) [Get started](#) [Scaffolding](#) [Base CSS](#) [Components](#) [JavaScript](#) [Customize](#) [Bootstrap](#)

[Typography](#) [Code](#) [Tables](#) [Forms](#) [Buttons](#) [Images](#) [Icons by Glyphicons](#)

Default buttons

Button styles can be applied to anything with the `.btn` class applied. However, typically you'll want to apply these to only `<a>` and `<button>` elements for the best rendering.

Button	class=""	Description
Default	<code>btn</code>	Standard gray button with gradient
Primary	<code>btn btn-primary</code>	Provides extra visual weight and identifies the primary action in a set of buttons
Info	<code>btn btn-info</code>	Used as an alternative to the default styles
Success	<code>btn btn-success</code>	Indicates a successful or positive action
Warning	<code>btn btn-warning</code>	Indicates caution should be taken with this action
Danger	<code>btn btn-danger</code>	Indicates a dangerous or potentially negative action
Inverse	<code>btn btn-inverse</code>	Alternate dark gray button, not tied to a semantic action or use
Link	<code>btn btn-link</code>	Deemphasize a button by making it look like a link while maintaining button behavior

Cross browser compatibility

IE9 doesn't crop background gradients on rounded corners, so we remove it. Related, IE9 jankifies disabled `button` elements, rendering text gray with a nasty text-shadow that we cannot fix.

Button sizes

Fancy larger or smaller buttons? Add `.btn-large`, `.btn-small`, or `.btn-mini` for additional sizes.

USE FRAMEWORKS

(com moderação)

Angular JS



The screenshot shows the AngularJS homepage. At the top is a navigation bar with links for Home, Learn, Develop, and Discuss, along with a search bar. The main content area features the AngularJS logo (a red shield with a white 'A') and the text 'ANGULARJS by Google'. Below the logo is the tagline 'HTML enhanced for web apps!'. There are two prominent buttons: 'View on GitHub' and 'Download (1.0.6/1.1.4)'. Below these buttons are social media links for following AngularJS on Google+, GitHub, and Twitter. The bottom section is divided into three columns: 'Why AngularJS?', 'Alternatives', and 'Extensibility'. Each column contains a brief description of the framework or its alternatives.

ANGULARJS by Google

HTML enhanced for web apps!

[View on GitHub](#) [Download \(1.0.6/1.1.4\)](#)

Follow +AngularJS on [Google+](#) [+1](#) [Lucas](#) [Follow @angularjs](#) 12.6K followers [Tweet](#) 3,295

Why AngularJS?

HTML is great for declaring static documents, but it falters when we try to use it for declaring dynamic views in web-applications. AngularJS lets you extend HTML vocabulary for your application. The resulting environment is extraordinarily expressive, readable, and quick to develop.

Alternatives

Other frameworks deal with HTML's shortcomings by either abstracting away HTML, CSS, and/or JavaScript or by providing an imperative way for manipulating the DOM. Neither of these address the root problem that HTML was not designed for dynamic views.

Extensibility

AngularJS is a toolset for building the framework most suited to your application development. It is fully extensible and works well with other libraries. Every feature can be modified or replaced to suit your unique development workflow and feature needs. Read on to find out how.

<http://angularjs.org>

Backbone.JS

Backbone.js (1.0.0)

- » [GitHub Repository](#)
- » [Annotated Source](#)

Introduction

Upgrading

Events

- on
- off
- trigger
- once
- listenTo
- stopListening
- listenToOnce
- [Catalog of Built-in Events](#)

Model

- extend
- constructor / initialize
- get
- set
- escape
- has
- unset
- clear
- id
- idAttribute
- cid
- attributes
- changed
- defaults
- toJSON
- sync
- fetch
- save
- destroy
- Underscore Methods (6)
- validate
- validationError



BACKBONE.JS

Backbone.js gives structure to web applications by providing **models** with key-value binding and custom events, **collections** with a rich API of enumerable functions, **views** with declarative event handling, and connects it all to your existing API over a RESTful JSON interface.

The project is [hosted on GitHub](#), and the [annotated source code](#) is available, as well as an online [test suite](#), an [example application](#), a [list of tutorials](#) and a [long list of real-world projects](#) that use Backbone. Backbone is available for use under the [MIT software license](#).

You can report bugs and discuss features on the [GitHub issues page](#), on Freenode IRC in the [#documentcloud](#) channel, post questions to the [Google Group](#), add pages to the [wiki](#) or send tweets to [@documentcloud](#).

Backbone is an open-source component of [DocumentCloud](#).

Downloads & Dependencies (Right-click, and use "Save As")


Development Version (1.0.0)	58kb, Full source, tons of comments
Production Version (1.0.0)	6.3kb, Packed and gzipped (Source Map)
Edge Version (master)	Unreleased, use at your own risk

build

packing

<http://backbonejs.org/>

Ember

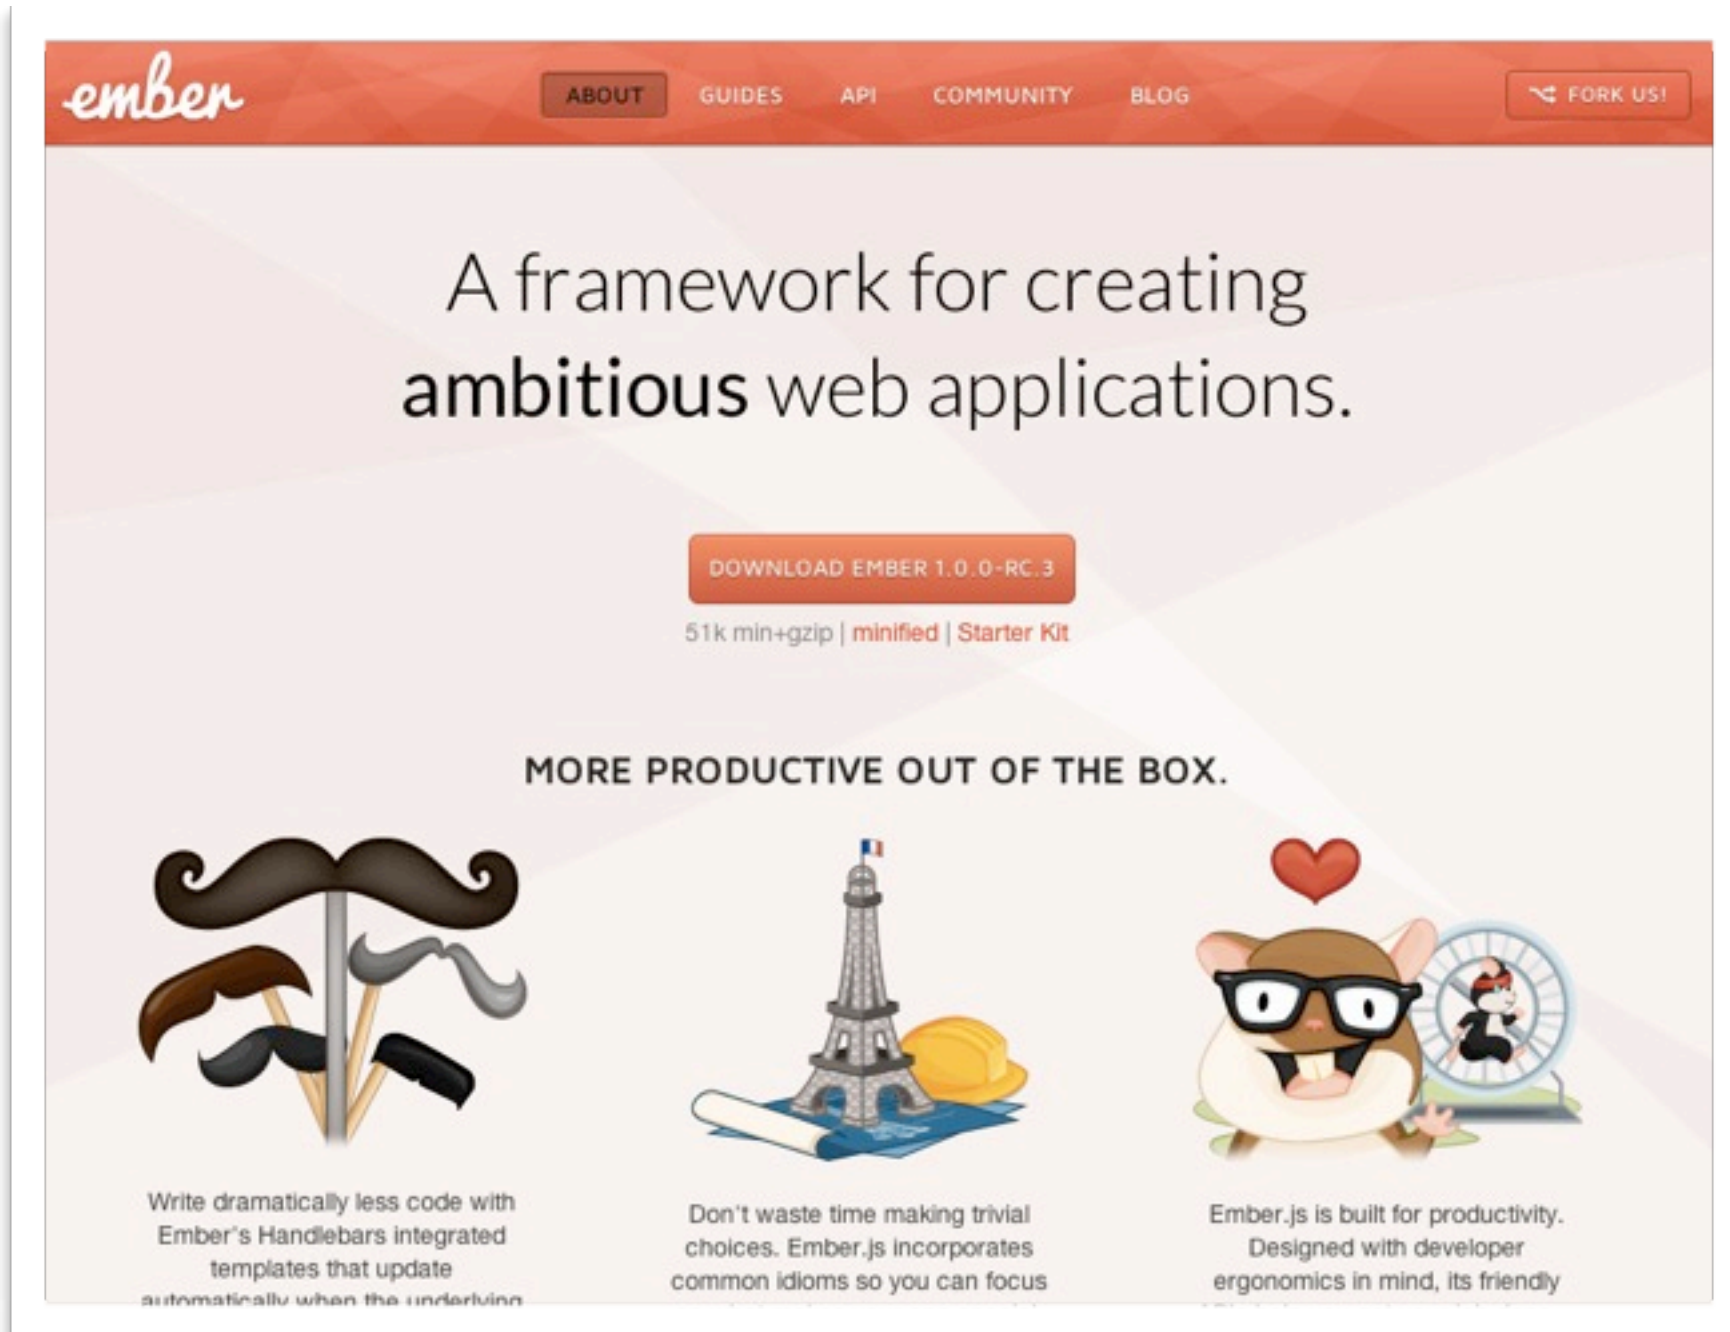

The screenshot shows the Ember.js homepage with an orange header bar. The header contains the 'ember' logo, navigation links for 'ABOUT', 'GUIDES', 'API', 'COMMUNITY', and 'BLOG', and a 'FORK US!' button. The main content area has a light background with a large heading 'A framework for creating ambitious web applications.' Below this is a 'DOWNLOAD EMBER 1.0.0-RC.3' button and links for '51k min+gzip', 'minified', and 'Starter Kit'. A section titled 'MORE PRODUCTIVE OUT OF THE BOX.' features three columns: 1) Mustaches icon and text about Handlebars templates; 2) Eiffel Tower icon and text about common idioms; 3) A chipmunk icon and text about productivity and ergonomics.

ember

ABOUT GUIDES API COMMUNITY BLOG FORK US!

A framework for creating
ambitious web applications.

DOWNLOAD EMBER 1.0.0-RC.3

51k min+gzip | [minified](#) | [Starter Kit](#)

MORE PRODUCTIVE OUT OF THE BOX.

 Write dramatically less code with Ember's Handlebars integrated templates that update automatically when the underlying

 Don't waste time making trivial choices. Ember.js incorporates common idioms so you can focus

 Ember.js is built for productivity. Designed with developer ergonomics in mind, its friendly

<http://emberjs.com/>


Meteor

Meteor PREVIEW 0.6.2.1

[Home](#) | [Examples](#) | [Documentation](#) | [FAQ](#) | [Blog](#) | [Get Involved](#) [Follow](#)

A better way to build apps.

Meteor is an open-source platform for building **top-quality web apps** in a **fraction of the time**, whether you're an expert developer or just getting started.

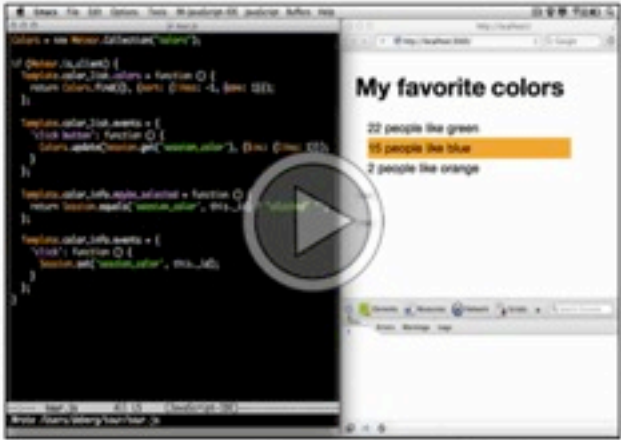

[Watch the screencast](#)
Also see the sequel

001

Pure JavaScript.
Write your entire app in pure JavaScript. All the same APIs are available on the client and the server — including database APIs! — so the same code can easily run in either environment.

002

Live page updates.
Just write your templates. They automatically update when data in the database changes. No more boilerplate redraw code to write. Supports any templating language.

This is the web framework I always wanted.



<http://meteor.com/>

7 PRINCÍPIOS do Meteor

1

Data on the wire

Nunca trafegue HTML.
Envie a informação e deixe o
cliente decidir como apresentá-la.



2

One Language

Escreva JavaScript no front e no back-end.

Reutilize seus códigos.

3

Database Everywhere

Use a mesma API para acessar seu banco de dados no client e no server.

4

Latency Compensation

Simula latência zero com o banco de dados no servidor.

5

Full Stack Reactivity

Faça realtime por padrão.
Todas as camadas, do banco ao
template, devem ser orientadas aos
eventos de interface.

6

Embrace the Ecosystem

Meteor é open source e integra, ao invés de substituir, ferramentas e frameworks existentes.



Simplicity Equals Productivity

A melhor maneira de fazer algo parecer simples é torná-lo realmente simples. Buscamos isso através de uma API clean e extremadamente fácil.

AUTOMATIZE

seus scripts



call wraps forward to the end of the line or block expression.



TABLE OF CONTENTS

TRY COFFEESCRIPT

ANNOTATED SOURCE

Functions

Functions are defined by an optional list of parameters in parentheses, an arrow, and the function body. The empty function looks like this: `->`

```
square = (x) -> x * x
cube   = (x) -> square(x) * x
```

load

```
var cube, square;

square = function(x) {
  return x * x;
};

cube = function(x) {
  return square(x) * x;
};
```

run: cube(5)

Functions may also have default values for arguments. Override the default value by passing a non-null argument.

```
fill = (container, liquid = "coffee") ->
  "Filling the #{container} with #{liquid}..."
```

load

```
var fill;

fill = function(container, liquid) {
  if (liquid == null) {
    liquid = "coffee";
  }
  return "Filling the " + container + " with " + liquid + "...";
};
```

run: fill("cup")

Objects and Arrays

The CoffeeScript literals for objects and arrays look very similar to their JavaScript cousins. When each property is listed on its own line, the commas are optional. Objects may be created using

<http://coffeescript.org/>



```
.scss .sass
$blue: #3bbfce;
$margin: 16px;

.content-navigation {
  border-color: $blue;
  color:
    darken($blue, 9%);
}

.border {
  padding: $margin / 2;
  margin: $margin / 2;
  border-color: $blue;
}
```

```
/* CSS */

.content-navigation {
  border-color: #3bbfce;
  color: #2b9eab;
}

.border {
  padding: 8px;
  margin: 8px;
  border-color: #3bbfce;
}
```

```
.scss .sass
.error {
  border: 1px #f00;
  background: #fdd;
}
.error.intrusion {
  font-size: 1.3em;
  font-weight: bold;
}

.badError {
  @extend .error;
  border-width: 3px;
}
```

```
/* CSS */

.error, .badError {
  border: 1px #f00;
  background: #fdd;
}

.error.intrusion,
.badError.intrusion {
  font-size: 1.3em;
  font-weight: bold;
}

.badError {
  border-width: 3px;
}
```

<http://sass-lang.com/>

variáveis



(style with attitude)

.scss .sass

```
$blue: #3bbfce;  
$margin: 16px;
```

```
.content-navigation {  
  border-color: $blue;  
  color:  
    darken($blue, 9%);  
}
```

```
.border {  
  padding: $margin / 2;  
  margin: $margin / 2;  
  border-color: $blue;  
}
```

/* CSS */

```
.content-navigation {  
  border-color: #3bbfce;  
  color: #2b9eab;  
}
```

```
.border {  
  padding: 8px;  
  margin: 8px;  
  border-color: #3bbfce;  
}
```

.scss .sass

```
.error {  
  border: 1px #f00;  
  background: #fdd;  
}
```

```
.error.intrusion {  
  font-size: 1.3em;  
  font-weight: bold;  
}
```

```
.badError {  
  @extend .error;  
  border-width: 3px;  
}
```

/* CSS */

```
.error, .badError {  
  border: 1px #f00;  
  background: #fdd;  
}
```

```
.error.intrusion,  
.badError.intrusion {  
  font-size: 1.3em;  
  font-weight: bold;  
}
```

```
.badError {  
  border-width: 3px;  
}
```

<http://sass-lang.com/>

variáveis



(style with attitude)

.scss .sass

```
$blue: #3bbfce;  
$margin: 16px;
```

```
.content-navigation {  
  border-color: $blue;  
  color:  
    darken($blue, 9%);  
}
```

```
.border {  
  padding: $margin / 2;  
  margin: $margin / 2;  
  border-color: $blue;  
}
```

/* CSS */

```
.content-navigation {  
  border-color: #3bbfce;  
  color: #2b9eab;  
}
```

```
.border {  
  padding: 8px;  
  margin: 8px;  
  border-color: #3bbfce;  
}
```

expressões

.scss .sass

```
.error {  
  border: 1px #f00;  
  background: #fdd;  
}  
.error.intrusion {  
  font-size: 1.3em;  
  font-weight: bold;  
}
```

```
.badError {  
  @extend .error;  
  border-width: 3px;  
}
```

/* CSS */

```
.error, .badError {  
  border: 1px #f00;  
  background: #fdd;  
}
```

```
.error.intrusion,  
.badError.intrusion {  
  font-size: 1.3em;  
  font-weight: bold;  
}
```

```
.badError {  
  border-width: 3px;  
}
```

<http://sass-lang.com/>

variáveis



herança

<http://sass-lang.com/>

.scss .sass

```
$blue: #3bbfce;
$margin: 16px;

.content-navigation {
  border-color: $blue;
  color:
    darken($blue, 9%);
}

.border {
  padding: $margin / 2;
  margin: $margin / 2;
  border-color: $blue;
}
```

```
/* CSS */

.content-navigation {
  border-color: #3bbfce;
  color: #2b9eab;
}

.border {
  padding: 8px;
  margin: 8px;
  border-color: #3bbfce;
}
```

expressões

.scss .sass

```
.error {
  border: 1px #f00;
  background: #fdd;
}

.error.intrusion {
  font-size: 1.3em;
  font-weight: bold;
}

.badError {
  @extend .error;
  border-width: 3px;
}
```

```
/* CSS */

.error, .badError {
  border: 1px #f00;
  background: #fdd;
}

.error.intrusion,
.badError.intrusion {
  font-size: 1.3em;
  font-weight: bold;
}

.badError {
  border-width: 3px;
}
```



LESS Input

```
1 .transition(@transition) {  
2   -webkit-transition: @transition;  
3   -moz-transition: @transition;  
4   -o-transition: @transition;  
5   transition: @transition;  
6 }  
7 .opacity(@opacity) {  
8   opacity: @opacity / 100;  
9   filter: ~"alpha(opacity=@{opacity})";  
10 }  
11  
12 a {  
13   .transition(all 0.4s);  
14   &:hover {  
15     .opacity(70);  
16   }  
17 }  
18  
19 // Selector interpolation only works in 1.3.1+. Try it  
20 @theGoodThings: ~".food, .beer, .sleep, .javascript";  
21  
22 @{theGoodThings} {  
23   font-weight: bold;  
24 }
```

CSS Output

```
1 a {  
2   -webkit-transition: all 0.4s;  
3   -moz-transition: all 0.4s;  
4   -o-transition: all 0.4s;  
5   transition: all 0.4s;  
6 }  
7 a:hover {  
8   opacity: 0.7;  
9   filter: alpha(opacity=70);  
10 }  
11 .food, .beer, .sleep, .javascript {  
12   font-weight: bold;  
13 }  
14
```

→ código dinâmico

<http://lesscss.org/>



EMMET.IO

```
1 <!doctype html>
2 <html lang="en">
3 <head>
4   <title>Demo</title>
5 </head>
6 <body>
7
8 </body>
9 </html>
```

"Expand Abbreviation" (Tab key)

"Next Edit Point" (^⌘→)
"Previous Edit Point" (^⌘←)

"Match Pair" (⌘D)

"Select Next Item" (⇧⌘.)
"Select Previous Item" (⇧⌘,)

"Toggle Comment" (⌘/)

<http://www.emmet.io/>

jade

Node Template Engine

[View Documentation](#)

```
doctype 5
html(lang="en")
  head
    title= pageTitle
    script(type='text/javascript')
      if (foo) {
        bar()
      }
  body
    h1 Jade - node template engine
    #container
      if youAreUsingJade
        p You are amazing
      else
        p Get on it!
```



```
<!DOCTYPE html>
<html lang="en">
  <head>
    <title>Jade</title>
    <script type="text/javascript">
      if (foo) {
        bar()
      }
    </script>
  </head>
  <body>
    <h1>Jade - node template engine</h1>
    <div id="container">
      <p>You are amazing</p>
    </div>
  </body>
</html>
```

<http://jade-lang.com/>

JS Hint

```
25     this.proxyURI = this.$scope.settings.appURI +
26         "redmine.php?api_key=" + this.$scope.settings.apiKey +
27         "&redmine_uri=" + this.$scope.settings.redmineURI;
28
29     this.reloadCount++;
30
31     this.loadActivities();
32     this.loadSpentTimeActivities();
33 }
34
35 Redmine.prototype.loadActivities = function() {
36     this.loadAPI({
37         action : "loadActivities"
38     }, this.onLoadActivities );
39 }
40
41 Redmine.prototype.onLoadActivities = function(data) {
42     this.$scope.activities = [];
43
44     for (var t in data.trackers) {
45         this.$scope.activities.push({
46             name : data.trackers[t].name,
47             id : data.trackers[t].id
48         });
49     }
50
51     this.loadProjects();
52 }
53
54 Redmine.prototype.loadSpentTimeActivities = function() {
55     this.loadAPI({
56         action : "loadSpentTimeActivities"
57     }, this.onLoadSpentTimeActivities );
58 }
59
```

Lint

Warn

- ☒ About debugging code
- ☒ About unsafe `for..in`
- ☒ About `== null`
- ☒ About `arguments.caller` and `.callee`
- ☒ About empty blocks
- ☒ About unsafe comparisons

- ☒ About `eval`
- ☒ About unsafe line breaks
- ☒ When bitwise operators are used
- ☒ When code is not in strict mode
- ☒ When variable is undefined
- ☒ When variable is defined but not used

Assume

- ☒ Browser
- ☐ Development (`console` , etc.)
- ☐ jQuery
- ☐ EcmaScript 5
- ☐ NodeJS

[More options](#)

<http://www.jshint.com/>

ENXUGUE
ao máximo seu site



Home | **Grade** | Components | Statistics

Rulesets YSlow(V2) Edit | ? Help ↓

Grade C Overall performance score 78 Ruleset applied: YSlow(V2) URL: <http://rccomunicacao.com.br/case-doe-palavras>

ALL (23) FILTER BY: [CONTENT \(6\)](#) | [COOKIE \(2\)](#) | [CSS \(6\)](#) | [IMAGES \(2\)](#) | [JAVASCRIPT \(4\)](#) | [SERVER \(6\)](#)

[Tweet](#)

[Share](#)

- F Make fewer HTTP requests
- F Use a Content Delivery Network (CDN)
- A Avoid empty src or href
- F Add Expires headers
- A Compress components with gzip
- A Put CSS at top
- A Put JavaScript at bottom
- A Avoid CSS expressions
- n/a Make JavaScript and CSS external
- B Reduce DNS lookups
- C Minify JavaScript and CSS

Grade F on Make fewer HTTP requests

This page has 9 external Javascript scripts. Try combining them into one. This page has 16 external background images. Try combining them with CSS sprites.

Decreasing the number of components on a page reduces the number of HTTP requests required to render the page, resulting in faster page loads. Some ways to reduce the number of components include: combine files, combine multiple scripts into one script, combine multiple CSS files into one style sheet, and use CSS Sprites and image maps.

[»Read More](#)

Copyright © 2013 Yahoo! Inc. All rights reserved.

<http://yslow.org/>



Refresh

Clear

Overview

High priority (2)

Specify a cache validator
Serve resources from a ...

Medium priority (1)

Optimize images

Low priority (5)

Leverage browser caching
Serve scaled images
Specify image dimensions
Remove query strings fro...
Specify a Vary: Accept-...

Already done! (19)

Overview

The page [RC Comunicação | 40 anos](#) got an overall PageSpeed Score of **94** (out of 100). [Learn more](#)

Suggestion Summary

Click on the rule names to see suggestions for improvement.

- High priority.** These suggestions represent the largest potential performance wins for the least development effort. You should address these items first:
[Specify a cache validator](#), [Serve resources from a consistent URL](#)
- Medium priority.** These suggestions may represent smaller wins or much more work to implement. You should address this item next:
[Optimize images](#)
- Low priority.** These suggestions represent the smallest wins. You should only be concerned with these items after you've handled the higher-priority ones:
[Leverage browser caching](#), [Serve scaled images](#), [Specify image dimensions](#), [Remove query strings from static resources](#), [Specify a Vary: Accept-Encoding header](#)

<https://developers.google.com/speed/pagespeed/?hl=pt-BR>

Como perder peso no browser?



<http://browserdiet.com/pt/>

Prepare bem seu
AMBIENTE



Yeoman consiste em um **conjunto de ferramentas** voltadas para **criar rapidamente** um novo **projeto web** e gerenciá-lo durante o processo.

<http://yeoman.io/>



YEOMAN



YEOMAN



YO



GRUNT



BOWER



YO



Faz um **scaffold** da estrutura do seu projeto.

`$yo webapp`

```
marloscarmo@Marloss-MacBook-Air:~/Sites$ yo webapp
```



```
Welcome to Yeoman,  
ladies and gentlemen!
```

```
Out of the box I include HTML5 Boilerplate, jQuery and Modernizr.  
Would you like to include Twitter Bootstrap for Sass? (Y/n) Y  
Would you like to include RequireJS (for AMD support)? (Y/n) Y
```

\$yo **webapp**

[illegible]

```
Out of the box I include HTML5 Boilerplate, jQuery and Modernizr.  
Would you like to include Twitter Bootstrap for Sass? (Y/n) Y  
Would you like to include RequireJS (for AMD support)? (Y/n) Y
```




Ele vai passar um **JSHint** no código, compilar arquivos **CoffeeScript** e **SASS**, utilizar o **r.js** para **compilar** e **otimizar** módulos AMD, **juntar** e **minificar** arquivos **.css** e **.js**, **comprimir as imagens** utilizando o OptiPNG para **.png** e JPEGtran-turbo para **.jpeg**, vai **rodar os testes utilizando PhantomJS** e utilizar o **Confess.js** para criar o arquivo de cache da aplicação.



`$grunt server // cria um servidor e altera em tempo real`

`$grunt test // roda os testes da sua aplicação`

`$grunt build // monta sua aplicação para produção`

\$grunt **server** // cria um servidor e altera em tempo real

\$grunt **test** // roda os testes da sua aplicação

\$grunt **build** // monta sua aplicação para produção




Gerencia dependências do seu projeto. **Baixa, adiciona** e **atualiza** o componente de forma automatizada.

```
$bower install jquery
```

```
$bower update jquery
```

Existe algumas outras opções ao YEOMAN

Brunch

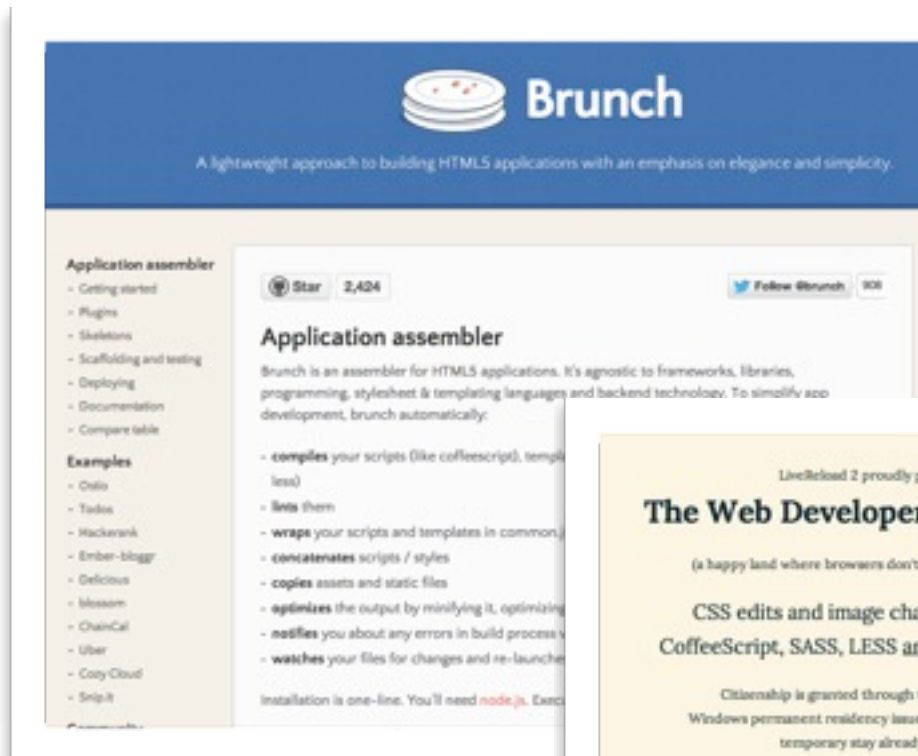


CodeKit



LiveReload

O GOOGLE
quer ler e entender seu site

Woorank

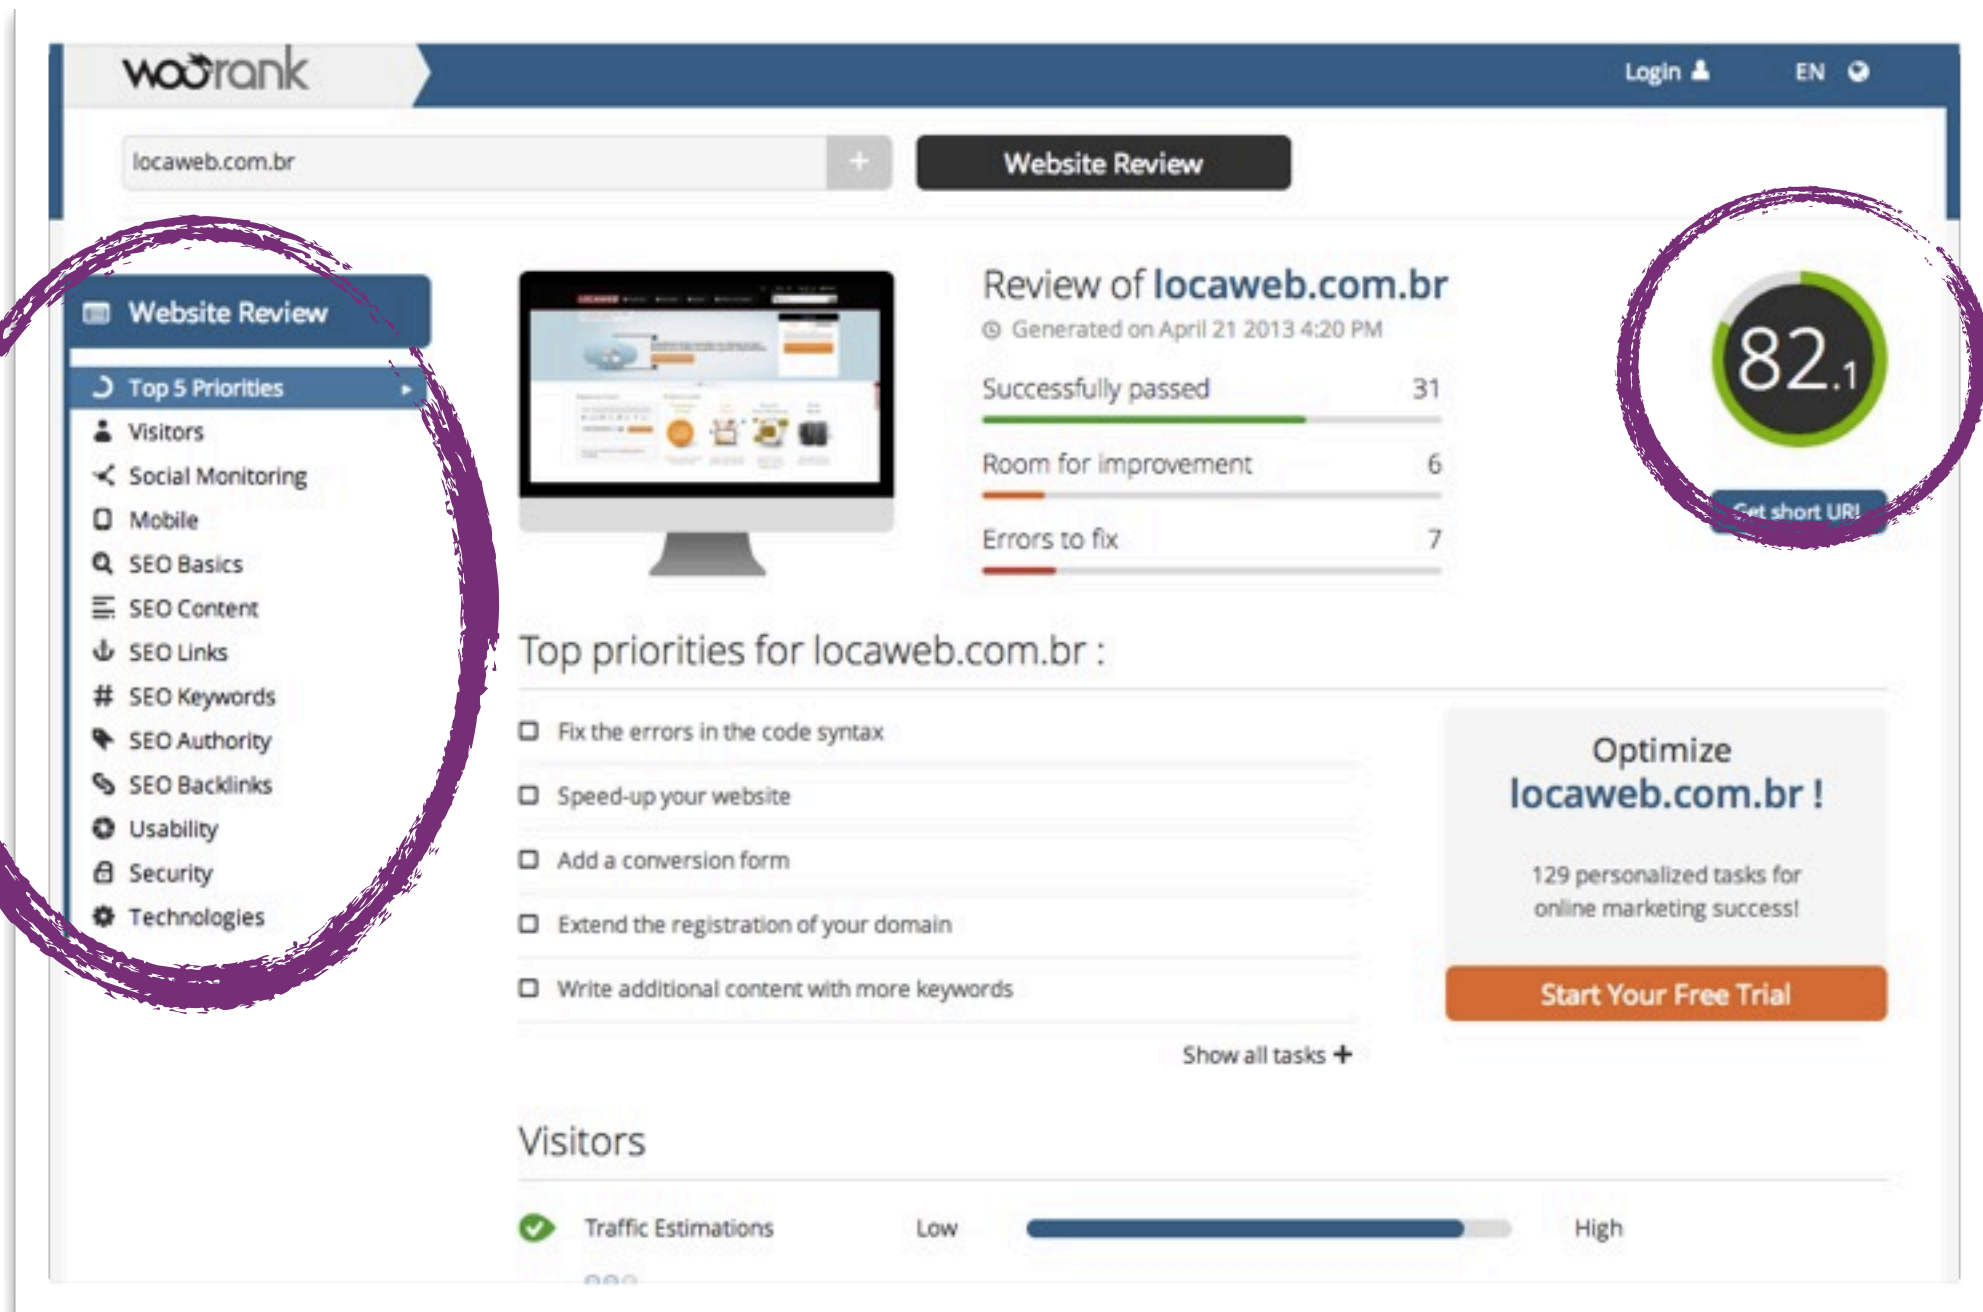

<http://www.woorank.com/>

SEOMOZ Tools

The screenshot shows the SEOMoz website's 'SEO Tools' section. At the top is a navigation bar with links for FEATURES, PRICING & PLANS, COMMUNITY, RESOURCES, BLOG, and ABOUT, along with a search bar and links for Log in, Sign up, and Help. Below the navigation bar is a blue header with the text 'SEO Tools'. The main content area features a section titled 'Manage Your SEO More Effectively' with a subtext explaining the platform's capabilities. To the right of this section is a prominent red button that says 'Take a 30-day FREE TRIAL', with a link below it that says 'or take a tour of SEOMoz PRO'. Below this, there are six tool cards arranged in a 2x3 grid. Each card has an icon, a title, a brief description, and a 'Take a free trial' button. The tools shown are Campaign Manager, Followerwonk, Link Analysis, and three others with icons of a document with an arrow, a laptop with a bar chart, and a laptop with a warning sign.

SEOMoz Log in Sign up Help

FEATURES PRICING & PLANS COMMUNITY RESOURCES BLOG ABOUT Search

SEO Tools

Manage Your SEO More Effectively

With SEOMoz tools you can better handle everyday SEO tasks. You can analyze keywords, research backlinks, do on-page analysis, find accessibility issues and track rankings all in one easy-to-use management platform.

Take a 30-day FREE TRIAL

or take a [tour of SEOMoz PRO](#)

Campaign Manager

Complete Platform for SEO

Every week, our platform tracks rankings, grades pages, monitors site traffic, locates errors and much more.

[Take a free trial](#)

Followerwonk

Twitter Analytics

Analyze your followers, discover deep insights about your social graph, target influences, search Twitter bios, connect with interesting people, and so much more.

[Take a free trial](#) [Try now](#)

Link Analysis

Research Links & Competitors

Use our [Open Site Explorer](#) to check the links pointing to your site and your competitors. Learn which links are helping, and find opportunities.

[Take a free trial](#) [Try now](#)

####

####

####

<http://www.seomoz.org/tools>

Dicas - MestreSEO

SEO para Front-End

Dicas para construir sites melhores

Por Fábio Ricotta, Co-Fundador da MestreSEO
BeagaJS - Março de 2013


mestreseo

www.slideshare.net/fabioricotta/seo-para-frontend-beagajs

TESTE

sua aplicação

QUnit

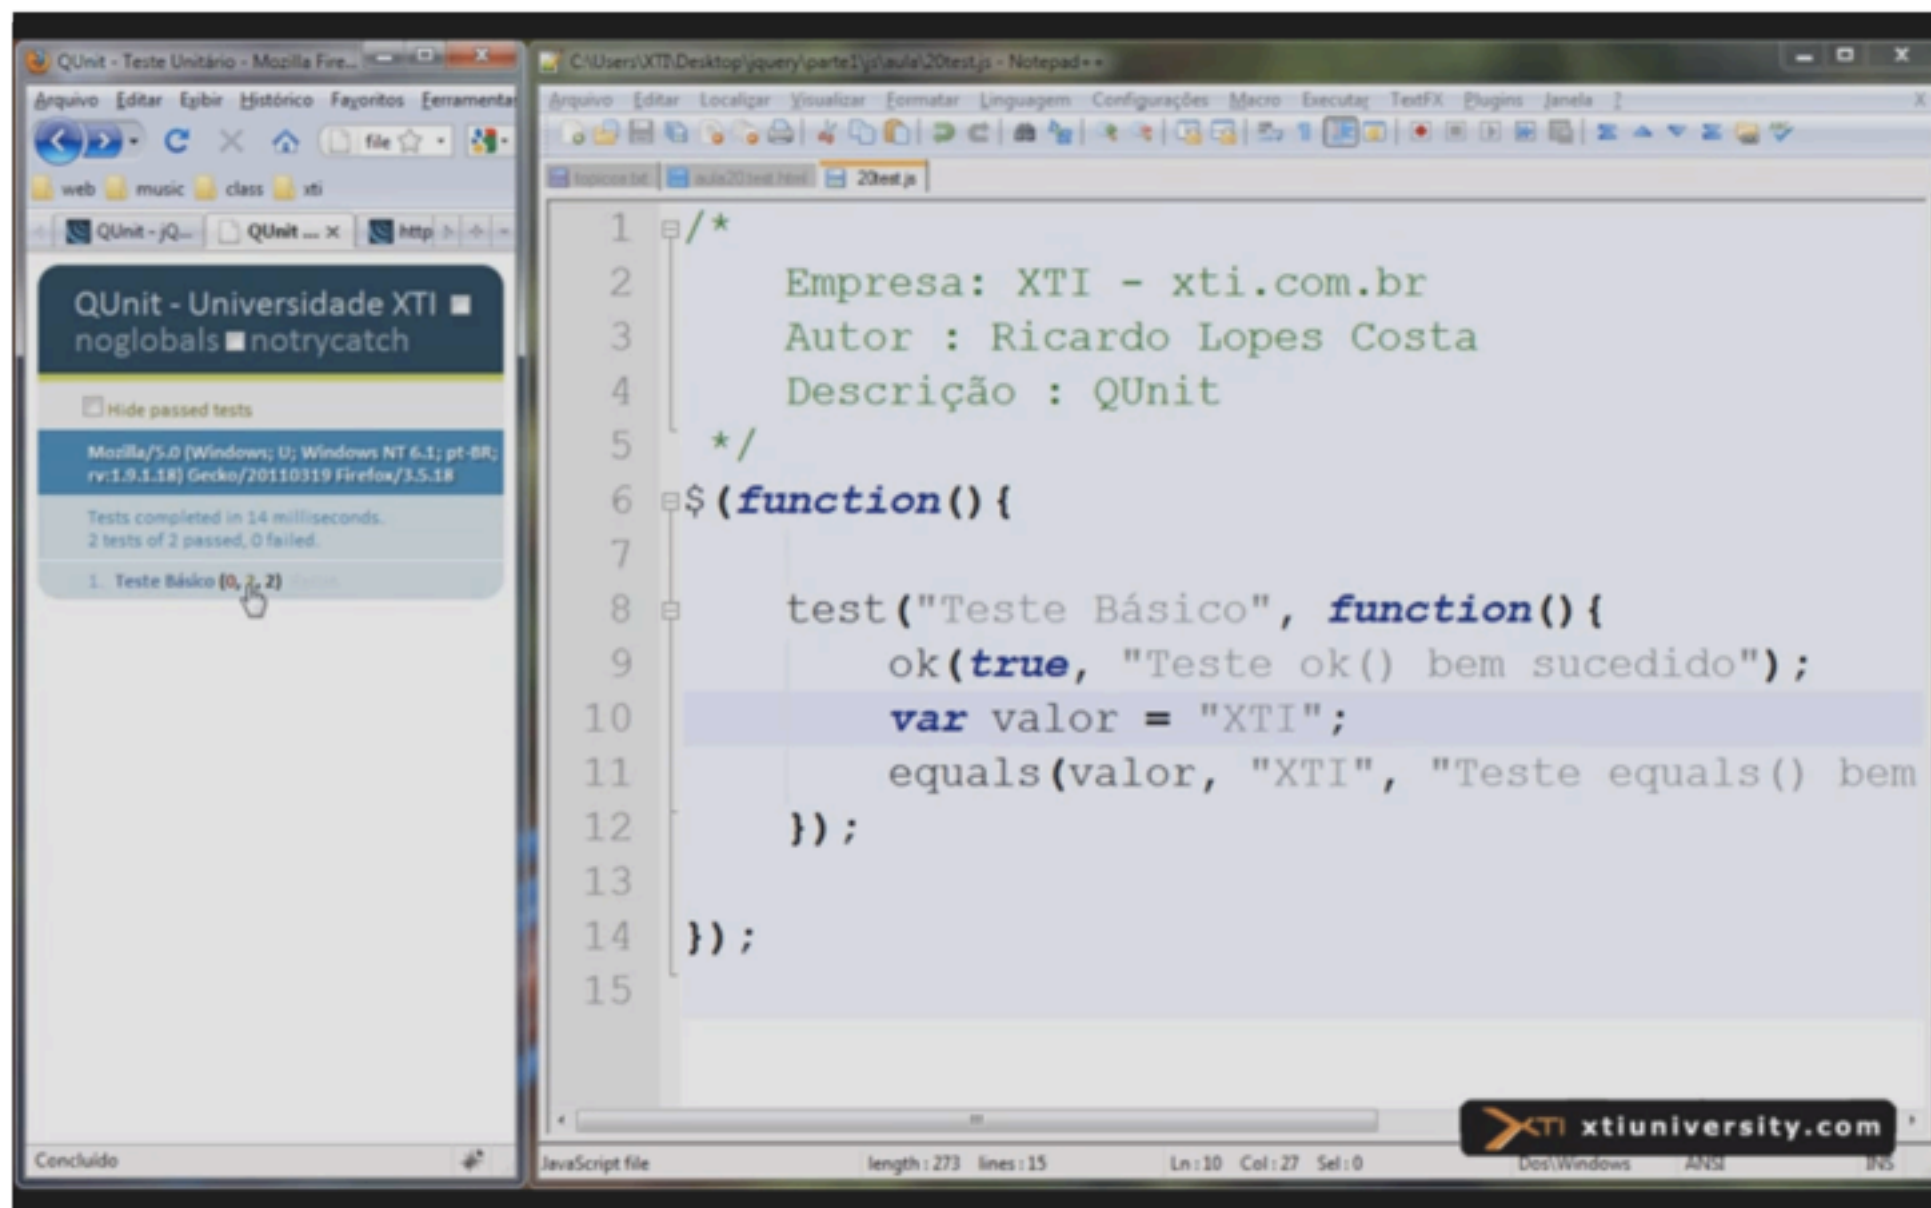

<http://www.youtube.com/watch?v=5z6eFve4TxI>

DEPLOY!

esqueça o ftp

FABRIC

<http://docs.fabfile.org/en/1.6/>

CAPISTRANO

<http://capify.org>

RSYNC

<http://rsync.samba.org/>



define o ambiente de desenvolvimento

```
1 from __future__ import with_statement
2 import datetime
3 from fabric.api import cd, env, sudo, local, prompt, put, run
4 from fabric.context_managers import settings
5 from fabric.colors import blue, red
6 import user
7
8 global repo_path
9
10 def dev():
11     global repo_path
12     repo_path = '/var/www/site-rc/'
13     env.user = user.name
14     env.hosts = ['192.168.1.101']
15
16 def prod():
17     global repo_path
18     repo_path = '~/domains/rccomunicacao.com.br/html/site-rc/'
19     env.user = 'rccom.com.br'
20     env.hosts = ['205.186.147.45']
21
22 def config():
23     _printOut('Creating repo on: '+str(env.hosts))
24     with cd('/var/www/'):
25         sudo('hg clone ssh://hg@bitbucket.org/rccomunicacao/site-rc', user='www-data')
26
27 def update(branch='default'):
28     _printOut('Updating server on: '+str(env.hosts))
29     _push_changes()
30     update_server(branch)
31
32 def _push_changes():
33     _printOut('Pushing local changes to repo')
34     with settings(warn_only=True):
35         local('hg push')
36
37 def update_server(branch):
38     global repo_path
39     _printOut('Uploading to dev server on :'+str(env.hosts))
40     with cd(repo_path):
41         if env.hosts == ['192.168.1.101']:
42             sudo('hg pull', user='www-data')
43             sudo('hg up '+branch, user='www-data')
44         else:
45             run('hg pull')
```



```
1 from __future__ import with_statement
2 import datetime
3 from fabric.api import cd, env, sudo, local, prompt, put, run
4 from fabric.context_managers import settings
5 from fabric.colors import blue, red
6 import user
7
8 global repo_path
9
10 def dev():
11     global repo_path
12     repo_path = '/var/www/site-rc/'
13     env.user = user.name
14     env.hosts = ['192.168.1.100']
15
16 def prod():
17     global repo_path
18     repo_path = '~/domains/rccomunicacao.com.br/html/site-rc/'
19     env.user = 'rccom.com.br'
20     env.hosts = ['205.188.146.146']
21
22 def config():
23     _printOut('Creating repo on: '+str(env.hosts))
24     with cd('/var/www/'):
25         sudo('hg clone ssh://hg@bitbucket.org/rccomunicacao/site-rc', user='www-data')
26
27 def update(branch='default'):
28     _printOut('Updating server on: '+str(env.hosts))
29     _push_changes()
30     update_server(branch)
31
32 def _push_changes():
33     _printOut('Pushing local changes to repo')
34     with settings(warn_only=True):
35         local('hg push')
36
37 def update_server(branch):
38     global repo_path
39     _printOut('Uploading to dev server on :'+str(env.hosts))
40     with cd(repo_path):
41         if env.hosts == ['192.168.1.100']:
42             sudo('hg pull', user='www-data')
43             sudo('hg up '+branch, user='www-data')
44         else:
45             run('hg pull')
```

define o ambiente de
produção



```
1 from __future__ import with_statement
2 import datetime
3 from fabric.api import cd, env, sudo, local, prompt, put, run
4 from fabric.context_managers import settings
5 from fabric.colors import blue, red
6 import user
7
8 global repo_path
9
10 def dev():
11     global repo_path
12     repo_path = '/var/www/site-rc/'
13     env.user = user.name
14     env.hosts = ['192.168.1.100']
15
16 def prod():
17     global repo_path
18     repo_path = '~/domains/rccomunicacao.com.br/html/site-rc/'
19     env.user = 'rccom.com.br'
20     env.hosts = ['192.168.1.100']
21
22 def config():
23     _printOut('Creating repo on: '+str(env.hosts))
24     with cd('/var/www/'):
25         sudo('hg clone ssh://hg@bitbucket.org/rccomunicacao/site-rc', user='www-data')
26
27 def update(branch='default'):
28     _printOut('Updating server on: '+str(env.hosts))
29     _push_changes()
30     update_server(branch)
31
32 def _push_changes():
33     _printOut('Pushing local changes to repo')
34     with settings(warn_only=True):
35         local('hg push')
36
37 def update_server(branch):
38     global repo_path
39     _printOut('Uploading to dev server on :'+str(env.hosts))
40     with cd(repo_path):
41         if env.hosts == ['192.168.1.100']:
42             sudo('hg pull', user='www-data')
43             sudo('hg up '+branch, user='www-data')
44         else:
45             run('hg pull')
```

configura o projeto no ambiente escolhido



```
1 from __future__ import with_statement
2 import datetime
3 from fabric.api import cd, env, sudo, local, prompt, put, run
4 from fabric.context_managers import settings
5 from fabric.colors import blue, red
6 import user
7
8 global repo_path
9
10 def dev():
11     global repo_path
12     repo_path = '/var/www/site-rc/'
13     env.user = user.name
14     env.hosts = ['192.168.1.100']
15
16 def prod():
17     global repo_path
18     repo_path = '~/domains/rccomunicacao.com.br/html/site-rc/'
19     env.user = 'rccom.com.br'
20     env.hosts = ['200.106.107.46']
21
22 def config():
23     _printOut('Creating repo on: '+str(env.hosts))
24     with cd('/var/www/'):
25         sudo('hg clone ssh://hg@bitbucket.org/rccomunicacao/site-rc', user='www-data')
26
27 def update(branch='default'):
28     _printOut('Updating server on: '+str(env.hosts))
29     _push_changes()
30     update_server(branch)
31
32 def _push_changes():
33     _printOut('Pushing local changes to repo')
34     with settings(warn_only=True):
35         local('hg push')
36
37 def update_server(branch):
38     global repo_path
39     _printOut('Uploading to dev server on :'+str(env.hosts))
40     with cd(repo_path):
41         if env.hosts == ['192.168.1.100']:
42             sudo('hg pull', user='www-data')
43             sudo('hg up '+branch, user='www-data')
44         else:
45             run('hg pull')
```

atualiza o projeto no
ambiente escolhido

atualizar o projeto no ambiente de **desenvolvimento**

```
$fab dev update
```

atualizar o projeto no ambiente de **desenvolvimento**

```
$fab dev update
```

atualizar o projeto no ambiente de **produção**

```
$fab prod update
```

Participe ativamente da
COMUNIDADE

BrazilJS

BrazilJS | Eventos | Projetos

 Like **1.3k** Tweetar **171**

BrazilJS: unidos crescemos

Não levamos apenas conteúdo para as pessoas, nós queremos uni-las.

Fique por dentro de algumas das nossas iniciativas!



comunidade

Mantenha-se antenado no que somos, como pensamos e o que



eventos

Confira os próximos eventos de desenvolvimento front-end que



podcast

Trazendo novidades, entrevistas e multiplicando conhecimento



weekly

Seleção semanal que reúne as melhores novidades sobre

<http://braziljs.org/>

BeagaJS

The image is a screenshot of the BeagaJS Facebook group page. The top navigation bar includes the Facebook logo, a search bar, and the user's name 'Marios Carmo' with options for 'Página Inicial' and settings. The left sidebar shows the user's profile and a list of favorite items and groups. The main content area features the group's cover photo, tabs for 'Sobre', 'Eventos', 'Fotos', and 'Arquivos', and a post by Éder Frances Oliveira about a JavaScript course. The right sidebar contains sponsored ads for real estate, a restaurant, and online courses.

facebook Pesquise pessoas, locais e coisas Marios Carmo Página Inicial

BeagaJS Sobre Eventos Fotos Arquivos Notificações

269 membros (8 novos) · Convidar por e-mail

Publicar Foto/Vídeo Perguntar Arquivo

Escreva alguma coisa.

PUBLICAÇÕES FIXADAS

Éder Frances Oliveira
Pessoal, inscrições para o curso: <https://docs.google.com/forms/d/1pRTbdgjFh87uH7cimZkori8H9zO9N3u7jCCrqqjICH0/viewform>
Ele é presencial, bem provável que não tenhamos gravação ou transmissão online dele. Limite de 20 pessoas.

Inscrição para o Curso de Javascript
[docs.google.com](https://docs.google.com/forms/d/1pRTbdgjFh87uH7cimZkori8H9zO9N3u7jCCrqqjICH0/viewform)

Curtir · Comentar · Seguir publicação · Compartilhar · 7 38 · 8 de março às 09:24

PUBLICAÇÕES RECENTES

Beto Muniz

Package Managers: An Introductory Guide For The Uninitiated Front-End Developer
tech.pro

Guide Outline Purpose and Intended Reader A Note to Command Line Newcomers A Note To Windows Users What is a Package Manager? What is npm? Installing...

Curtir · Comentar · Seguir publicação · Compartilhar · há 20 horas

Patrocinado Criar anúncio

ANDAR CORRIDO – Aluguel
investbensimoveis.com.br

Conheça nossas opções de 270m² a 540m² no bairro Funcionários para a sua empresa.

Ofertas – Pedida de Hoje

Cupons de descontos gratuitos para porções e cervejas nos melhores bares. Cadastre-se já!

Diego Rodriguez e Frank Martins curtiram Pedida de Hoje.

Cursos OnLine
ead360.com

Vídeo aulas demonstrativas em nosso blog. Web Design, Design Gráfico, 3D e Edição de vídeo

Comunicação Digital
Fique por dentro do

<http://www.facebook.com/groups/beagajs/>

ZOFE

[Home](#) [Contato](#) [Sobre](#) [Busca](#)

ZONE OF FRONT-ENDERS

PODCAST SOBRE DESENVOLVIMENTO WEB, FRONT-END E AFINS

17/03/13

ZOFE #6: O que você fez hoje?

Como foi o dia do Daniel Filho? E o do Zeno Rocha? Mais importante ainda, queremos saber **como foi o SEU dia!**

Diga como foi seu dia profissional no comentário deste post, pode ser que, sei lá. De repente, você pode ganhar um botom do ZOFE, ou um adesivo. OU OS DOIS! (Vai que, né?)

[Continue lendo →](#)

<http://zofe.com.br/>



OBRIGADO

@marloscarmo