

Teaching Exam

Subject – Computer Science

Topic – Computer Network



Lecture No.- 06

By- Rahul Sir

Topics to be Covered



Topic

1:- TOPOLOGY-RING , BUS, TREE ,HYBRID ✓

2:- OSI MODEL ✓

3:- Types of Layers ✓


4:- Detail Explain of Each Layer ✓

5:- Application, Advantage and Disadvantage of OSI MODEL ✓

6:- TCP VS OSI ✓

Bus Topology

Bus Topology is a network type in which every computer and network device is connected to a single cable. It is bi-directional. It is a multi-point connection and a non-robust topology because if the backbone fails the topology crashes. In Bus Topology, various MAC (Media Access Control) protocols are followed by LAN ethernet connections like TDMA, Pure Aloha, CDMA, Slotted Aloha, etc.

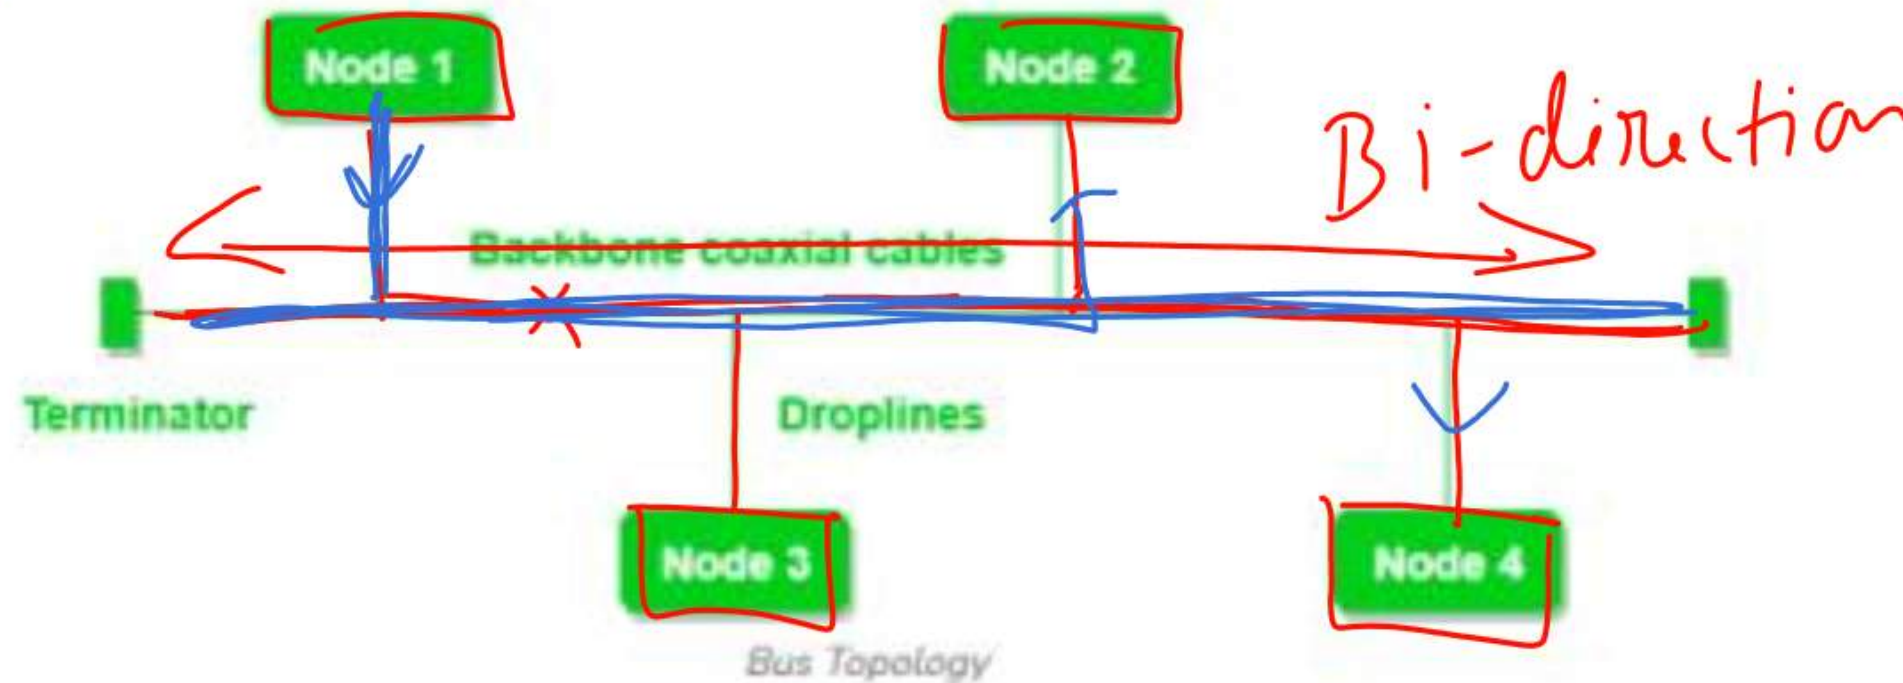


Advantages of Bus Topology

- If N devices are connected to each other in a bus topology, then the number of cables required to connect them is 1, known as backbone cable, and N drop lines are required.
- Coaxial or twisted pair cables are mainly used in bus-based networks that support up to 10 Mbps.
- The cost of the cable is less compared to other topologies, but it is used to build small networks.
- Bus topology is familiar technology as installation and troubleshooting techniques are well known.
- CSMA is the most common method for this type of topology.

Disadvantages of Bus Topology

- A bus topology is quite simpler, but still, it requires a lot of cabling.
- If the common cable fails, then the whole system will crash down.
- If the network traffic is heavy, it increases collisions in the network. To avoid this, various protocols are used in the MAC layer known as Pure Aloha, Slotted Aloha, CSMA/CD, etc.
- Adding new devices to the network would slow down networks.
- Security is very low.

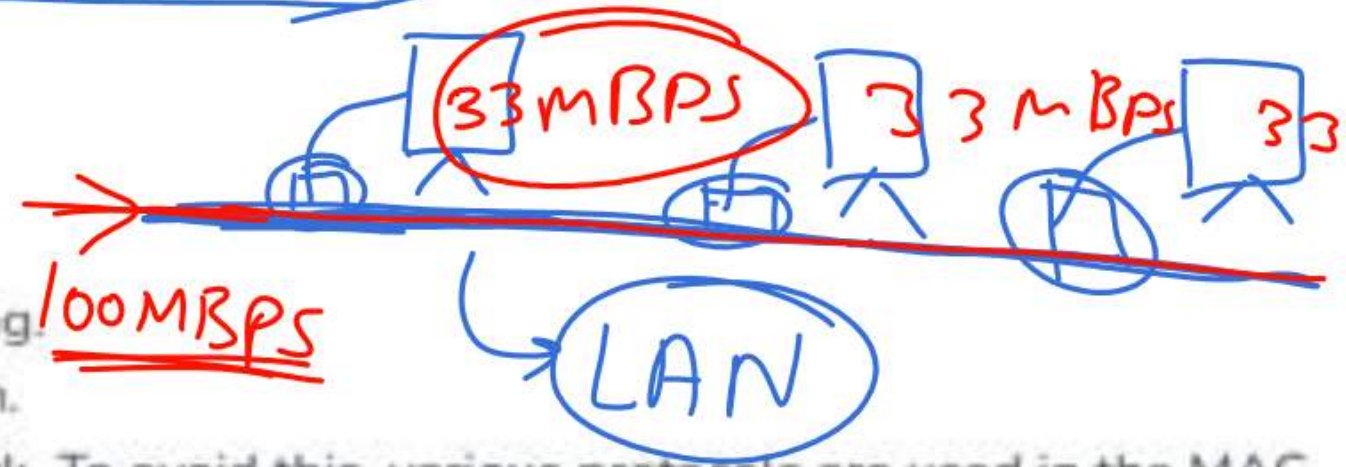


DLL ← (Data Link Layer)
(Medium Access Control)

A common example of bus topology is the Ethernet LAN, where all devices are connected to a single coaxial cable or twisted pair cable. This topology is also used in cable television networks.

Ring Topology

In a Ring Topology, it forms a ring connecting devices with exactly two neighboring devices. A number of repeaters are used for Ring topology with a large number of nodes, because if someone wants to send some data to the last node in the ring topology with 100 nodes, then the data will have to pass through 99 nodes to reach the 100th node. Hence to prevent data loss repeaters are used in the network.

The data flows in one direction, i.e. it is unidirectional, but it can be made bidirectional by having 2 connections between each Network Node, it is called Dual Ring Topology. In-Ring Topology, the Token Ring Passing protocol is used by the workstations to transmit the data.

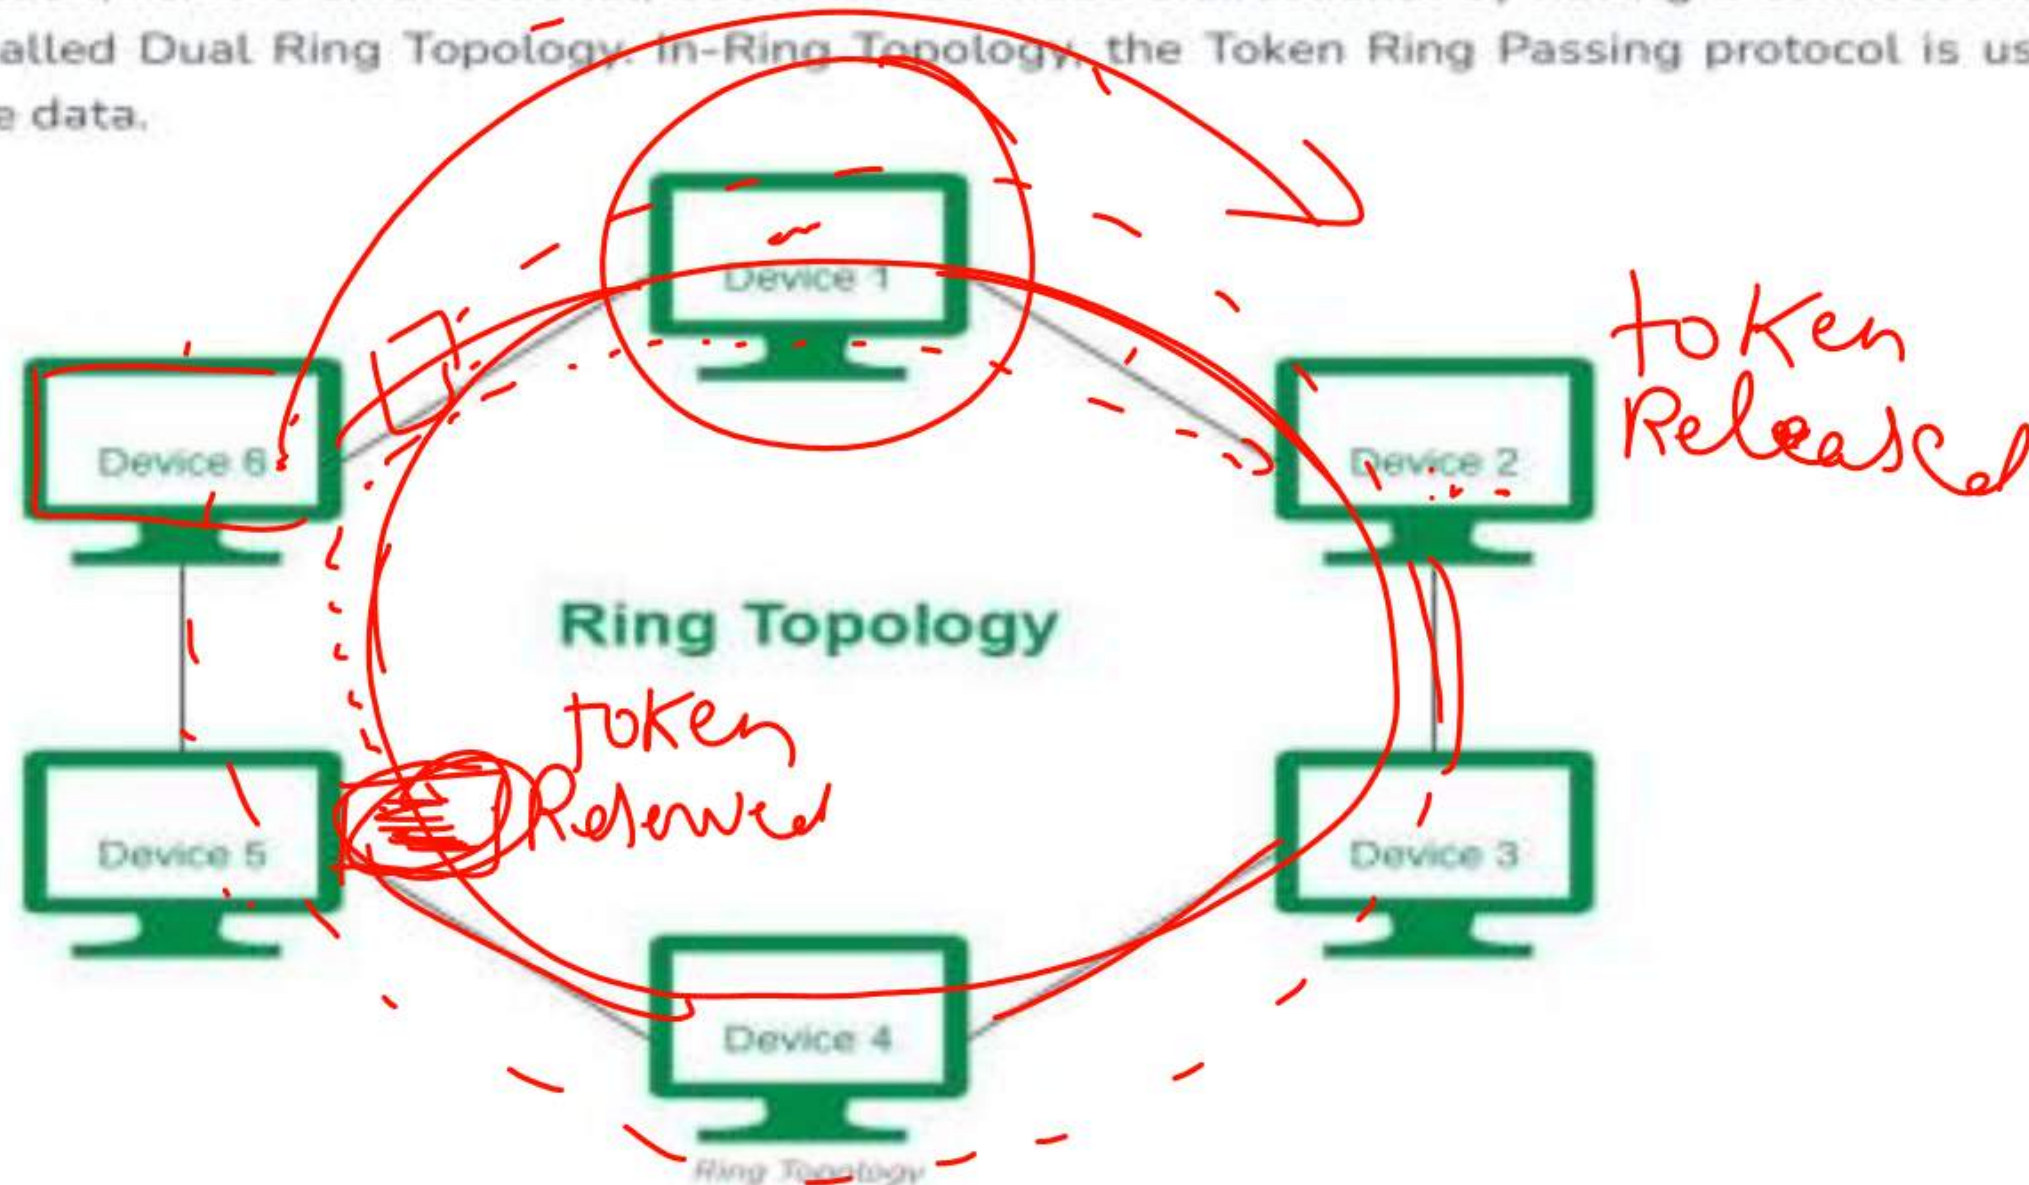

The most common access method of ring topology is token passing.

The most common access method of ring topology is token passing.


- Token passing: It is a network access method in which a token is passed from one node to another node.
- Token: It is a frame that circulates around the network.

Operations of Ring Topology

- One station is known as a **monitor** station which takes all the responsibility for performing the operations.
- To transmit the data, the station has to hold the token. After the transmission is done, the token is to be released for other stations to use.
- When no station is transmitting the data, then the token will circulate in the ring.
- There are two types of token release techniques: **Early token release** releases the token just after transmitting the data and **Delayed token release** releases the token after the acknowledgment is received from the receiver.

Advantages of Ring Topology

- The data transmission is high-speed.
- The possibility of collision is minimum in this type of topology.
- Cheap to install and expand.
- It is less costly than a star topology.

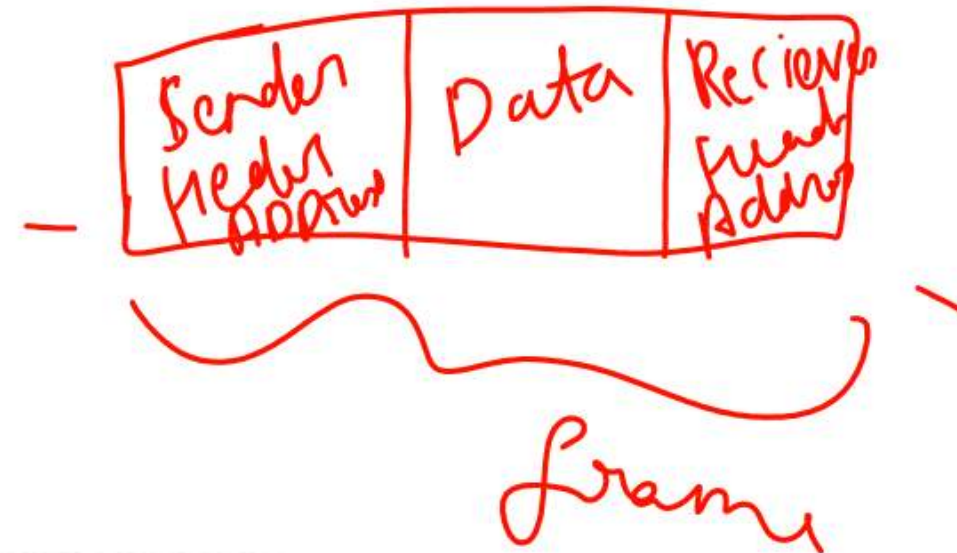


Disadvantages of Ring Topology

- The failure of a single node in the network can cause the entire network to fail.
- Troubleshooting is difficult in this topology.
- The addition of stations in between or the removal of stations can disturb the whole topology.
- Less secure.

Tree Topology

Tree topology is the variation of the Star topology. This topology has a hierarchical flow of data. In Tree Topology, protocols like DHCP and SAC (Standard Automatic Configuration) are used.

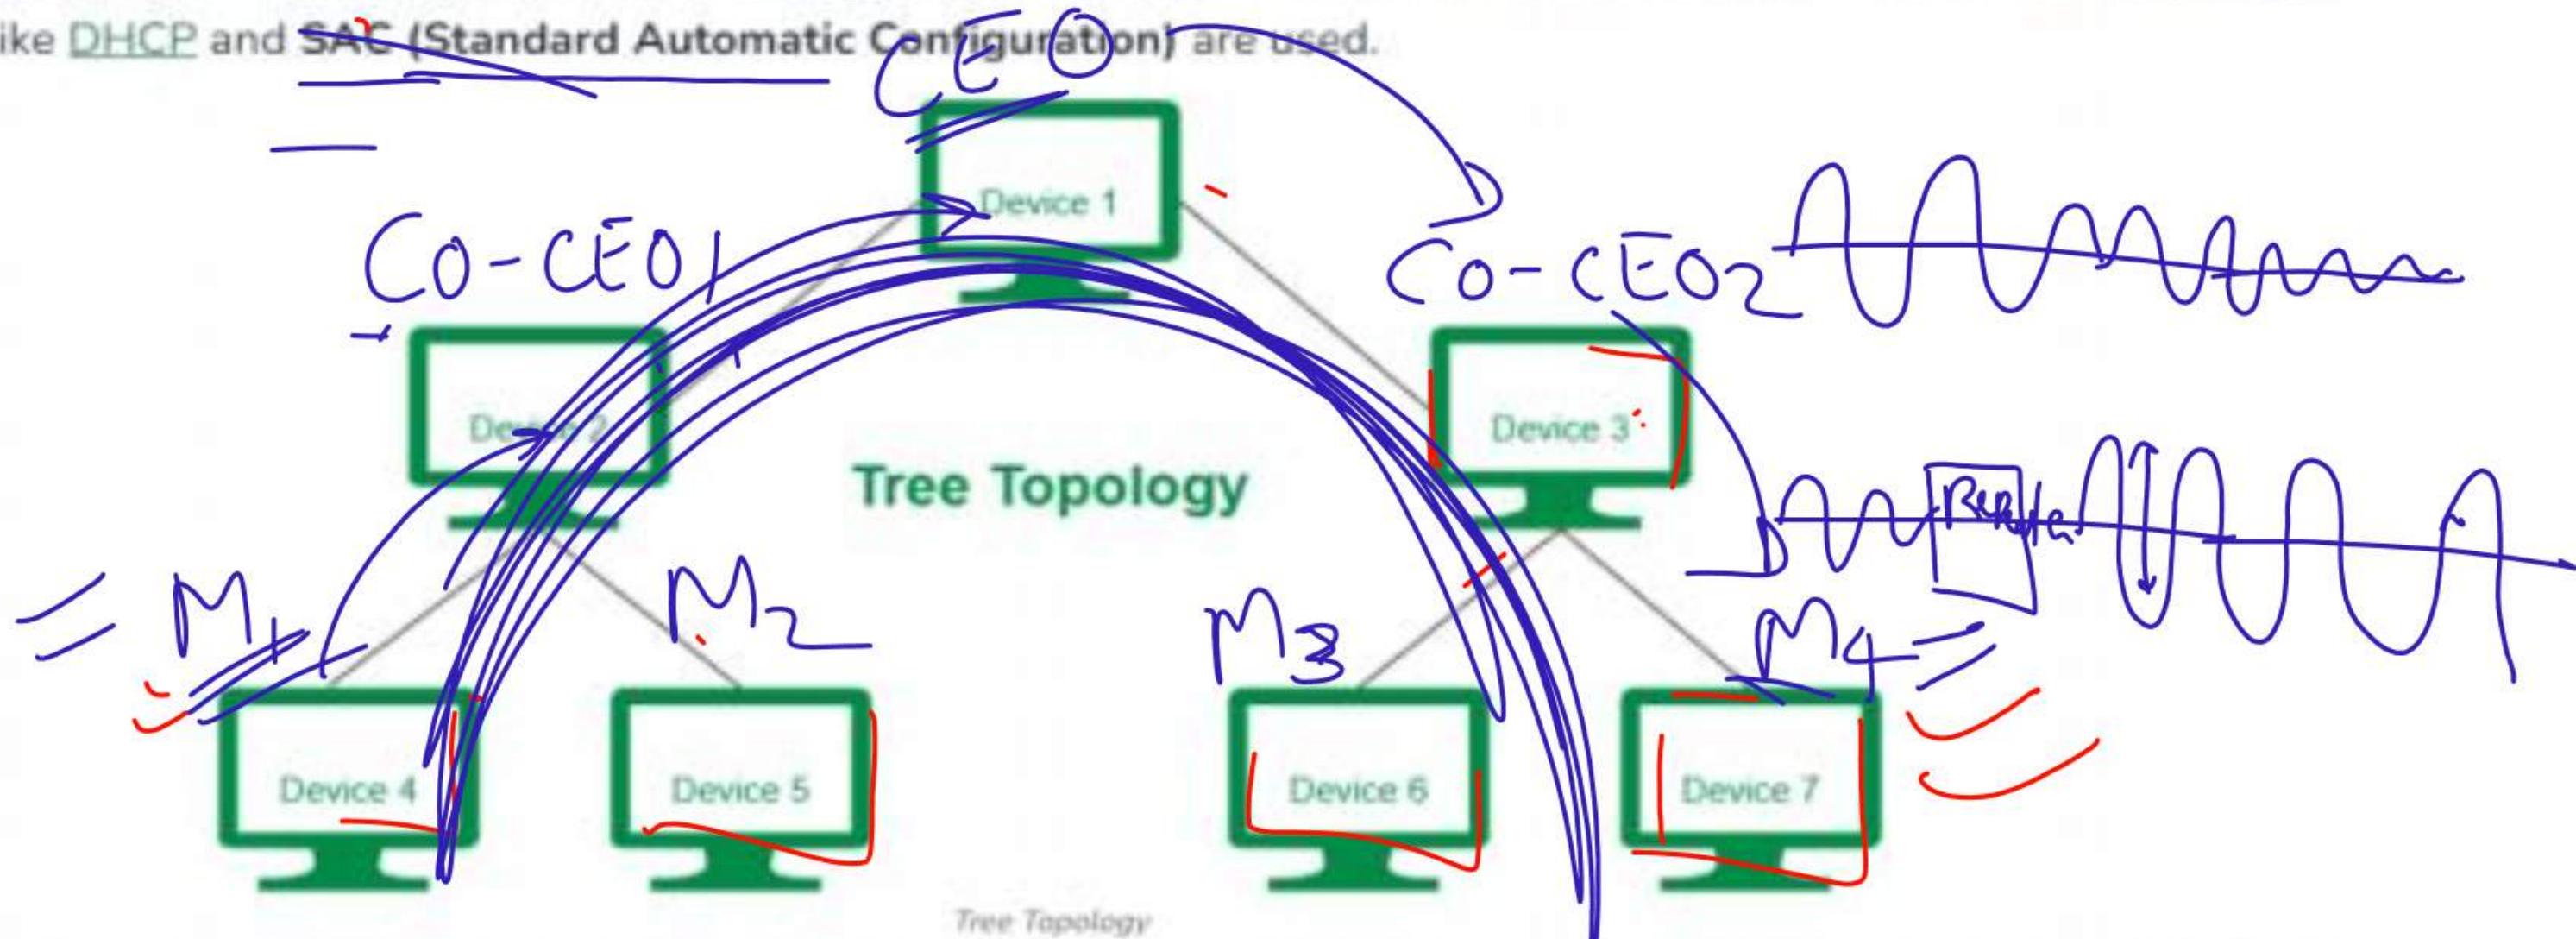

In tree topology, the various secondary hubs are connected to the central hub which contains the repeater. This data flow from top to bottom i.e. from the central hub to the secondary and then to the devices or from bottom to top i.e. devices to the secondary hub and then to the central hub. It is a multi-point connection and a non-robust topology because if the backbone fails the topology crashes.

Advantages of Tree Topology

- It allows more devices to be attached to a single central hub thus it decreases the distance that is traveled by the signal to come to the devices.
- It allows the network to get isolated and also prioritize from different computers.
- We can add new devices to the existing network.
- Error detection and error correction are very easy in a tree topology.


Disadvantages of Tree Topology

- If the central hub gets fails the entire system fails.
- The cost is high because of the cabling.
- If new devices are added, it becomes difficult to reconfigure.

A common example of a tree topology is the hierarchy in a large organization. At the top of the tree is the CEO, who is connected to the different departments or divisions (child nodes) of the company. Each department has its own hierarchy, with managers overseeing different teams (grandchild nodes). The team members (leaf nodes) are at the bottom of the hierarchy, connected to their respective managers and departments.

Hybrid Topology

Hybrid Topology is the combination of all the various types of topologies we have studied above. Hybrid Topology is used when the nodes are free to take any form. It means these can be individuals such as Ring or Star topology or can be a combination of various types of topologies seen above. Each individual topology uses the protocol that has been discussed earlier.

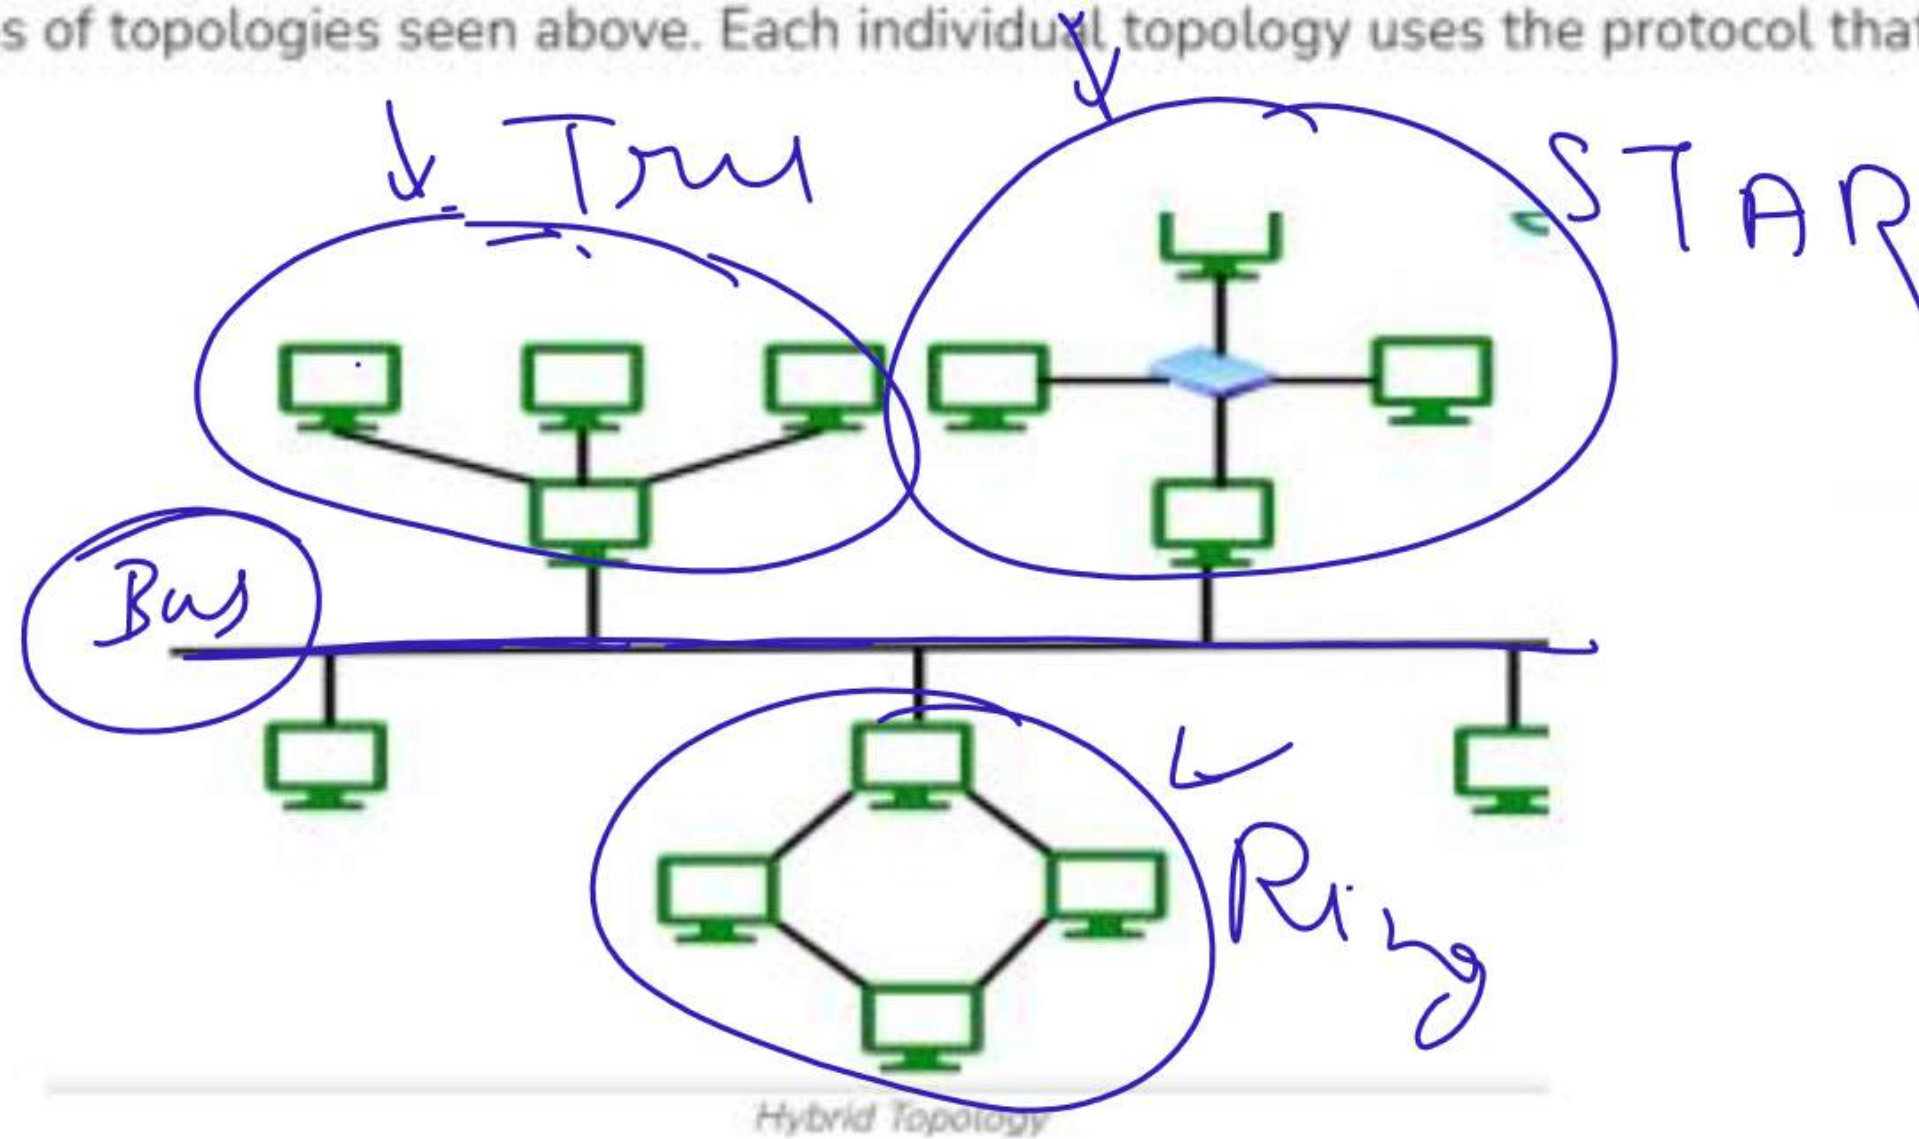

The above figure shows the structure of the Hybrid topology. As seen it contains a combination of all different types of networks.

Advantages of Hybrid Topology

- This topology is very flexible.
- The size of the network can be easily expanded by **adding new devices**.

Disadvantages of Hybrid Topology

- It is challenging to design the architecture of the Hybrid Network.
- Hubs used in this topology are **very expensive**.
- The infrastructure cost is very high as a hybrid network **requires a lot of cabling and network devices**.

A common example of a hybrid topology is a university campus network. The network may have a backbone of a star topology, with each building connected to the backbone through a switch or router. Within each building, there may be a bus or ring topology connecting the different rooms and offices. The wireless access points also create a mesh topology for wireless devices. This hybrid topology allows for efficient communication between different buildings while providing flexibility and redundancy within each building.

Why is Network Topology Important?


Network Topology is important because it defines how devices are connected and how they communicate in the network.

- Here are some points that defines why network topology is important.
 - Network Performance: Upon choosing the appropriate topology as per requirement, it helps in running the network easily and hence increases network performance.
 - Network Reliability: Some topologies like Star, Mesh are reliable as if one connection fails, they provide an alternative for that connection, hence it works as a backup.
 - Network Expansion : Choosing correct topology helps in easier expansion of Network as it helps in adding more devices to the network without disrupting the actual network. (Hybrid)
 - Network Security: Network Topology helps in understanding how devices are connected and hence provides a better security to the network. Ring

Conclusion

In conclusion, network topologies play a crucial role in determining the efficiency and reliability of a computer network. Each topology, whether it's bus, star, ring, mesh, or tree, offers unique benefits and potential drawbacks. By understanding these different arrangements, network designers can choose the most appropriate topology to meet the specific needs of their systems, ensuring optimal performance and connectivity.

The **OSI (Open Systems Interconnection)** Model is a set of rules that explains how different computer systems communicate over a network. OSI Model was developed by the **International Organization for Standardization (ISO)**. The OSI Model consists of 7 layers and each layer has specific functions and responsibilities. This layered approach makes it easier for different devices and technologies to work together. OSI Model provides a clear structure for data transmission and managing network issues. The OSI Model is widely used as a reference to understand how network systems function.

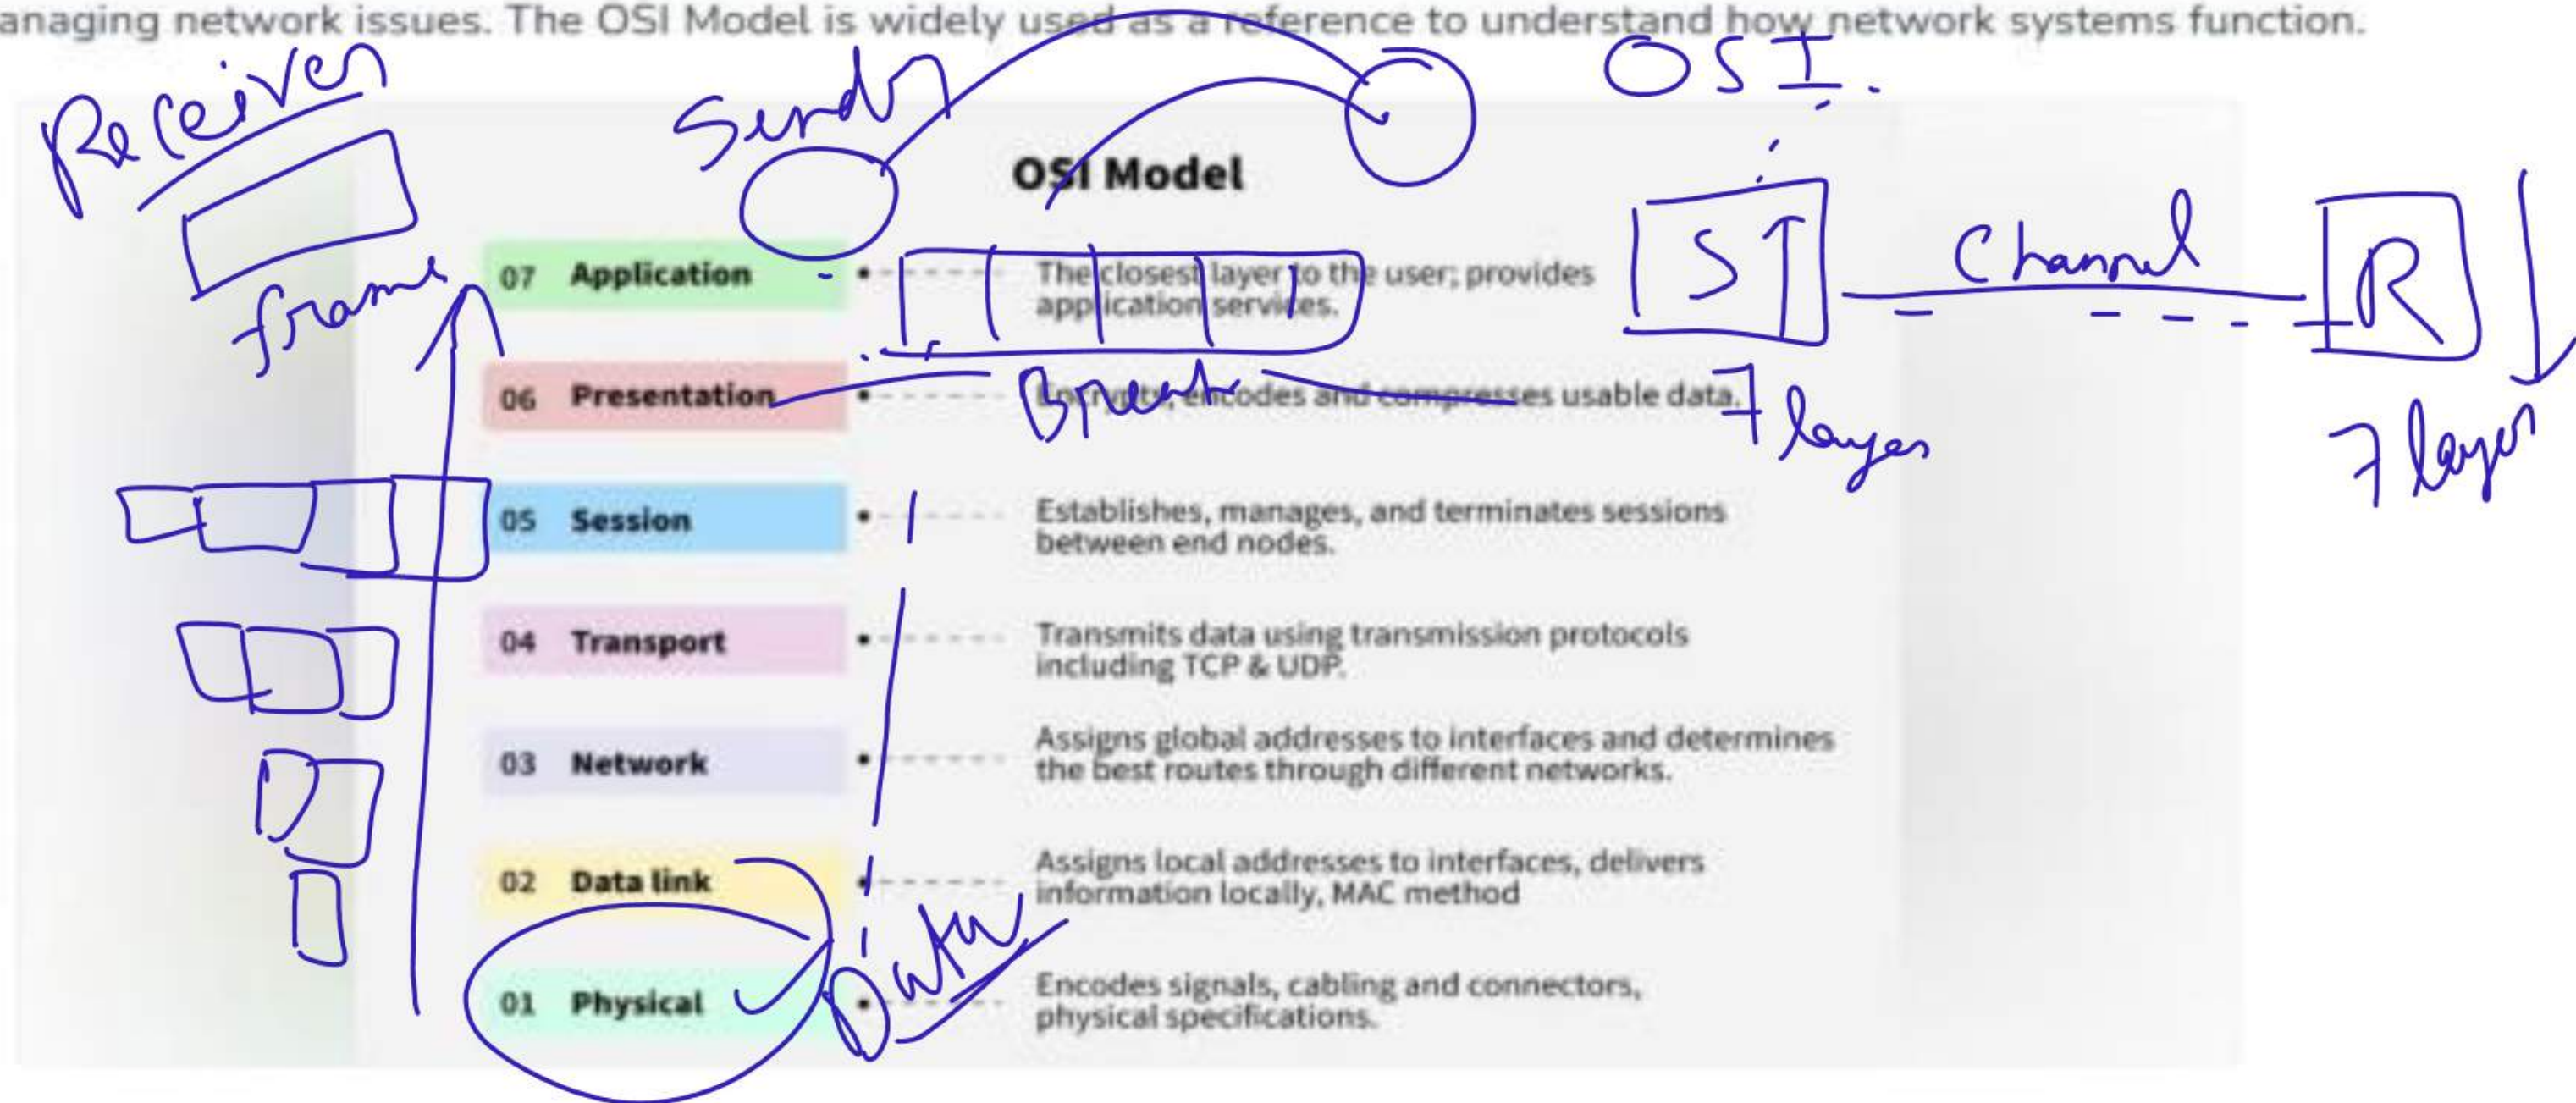

Layers of the OSI Model


- There are 7 layers in the OSI Model and each layer has its specific role in handling data. All the layers are mentioned

Data flows through the OSI model in a step-by-step process:

- **Application Layer:** Applications create the data.
- **Presentation Layer:** Data is formatted and encrypted.
- **Session Layer:** Connections are established and managed.
- **Transport Layer:** Data is broken into segments for reliable delivery.
- **Network Layer:** Segments are packaged into packets and routed.
- **Data Link Layer:** Packets are framed and sent to the next device.
- **Physical Layer:** Frames are converted into bits and transmitted physically.

Layer 1: Physical Layer

The lowest layer of the OSI reference model is the **Physical Layer**. It is responsible for the actual physical connection between the devices. The physical layer contains information in the form of **bits**. Physical Layer is responsible for transmitting individual bits from one node to the next. When receiving data, this layer will get the signal received and convert it into 0s and 1s and send them to the Data Link layer, which will put the frame back together. Common physical layer devices are Hub, Repeater, Modem, and Cables.

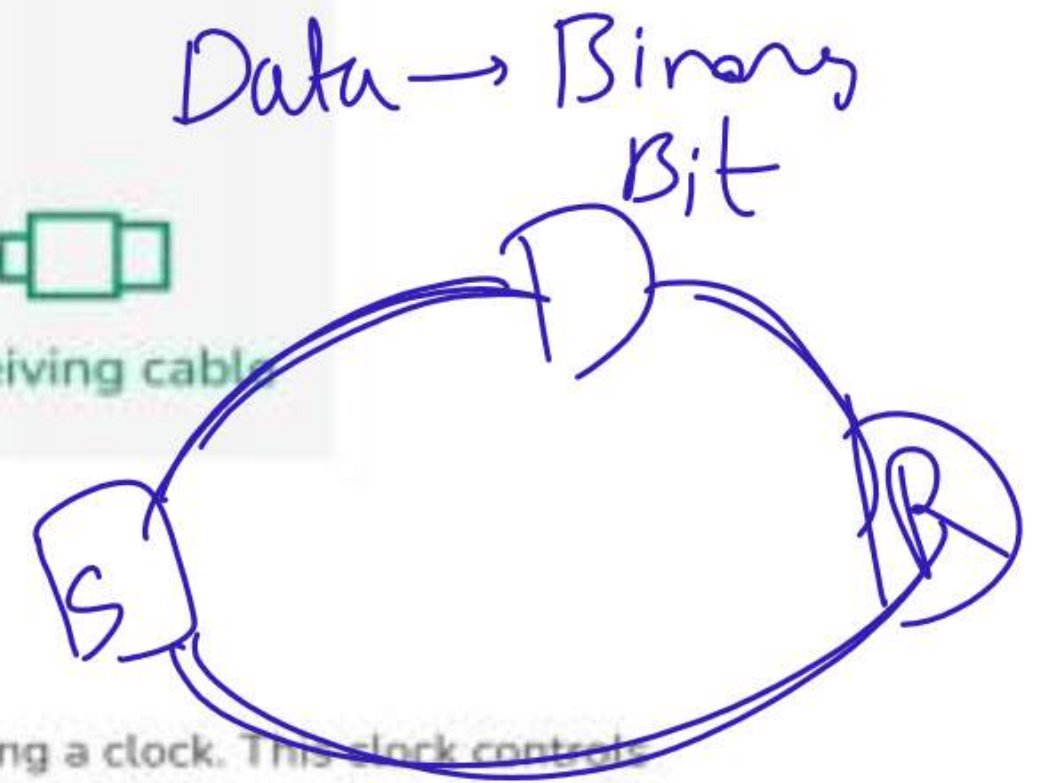

Functions of the Physical Layer

- Bit Synchronization: The physical layer provides the synchronization of the bits by providing a clock. This clock controls both sender and receiver thus providing synchronization at the bit level.
- Bit Rate Control: The Physical layer also defines the transmission rate i.e. the number of bits sent per second.
- Physical Topologies: Physical layer specifies how the different devices/nodes are arranged in a network i.e. bus topology, star topology, or mesh topology.
- Transmission Mode: Physical layer also defines how the data flows between the two connected devices. The various transmission modes possible are Simplex, half-duplex and full duplex.

Topic- OSI Model-> Layer-2

Layer 2: Data Link Layer (DLL)

The data link layer is responsible for the node-to-node delivery of the message. The main function of this layer is to make sure data transfer is error-free from one node to another, over the physical layer. When a packet arrives in a network, it is the responsibility of the DLL to transmit it to the Host using its MAC address. Packet in the Data Link layer is referred to as

- Frame. Switches and Bridges are common Data Link Layer devices.

The Data Link Layer is divided into two sublayers:

- Logical Link Control
- Media Access Control



Physical Layer → DLL

Binary Bit → frames


The packet received from the Network layer is further divided into frames depending on the frame size of the NIC (Network Interface Card). DLL also encapsulates Sender and Receiver's MAC address in the header.

Functions of the Data Link Layer

- **Framing:** Framing is a function of the data link layer. It provides a way for a sender to transmit a set of bits that are meaningful to the receiver. This can be accomplished by attaching special bit patterns to the beginning and end of the frame.
- **Physical Addressing:** After creating frames, the Data link layer adds physical addresses (MAC addresses) of the sender and/or receiver in the header of each frame.
- **Error Control:** The data link layer provides the mechanism of error control in which it detects and retransmits damaged or lost frames.
- **Flow Control:** The data rate must be constant on both sides else the data may get corrupted thus, flow control coordinates the amount of data that can be sent before receiving an acknowledgment.
- **Access Control:** When a single communication channel is shared by multiple devices, the MAC sub-layer of the data link layer helps to determine which device has control over the channel at a given time.

MAC Address → Device Address

Error Check → Ex → Check Sum Protocol

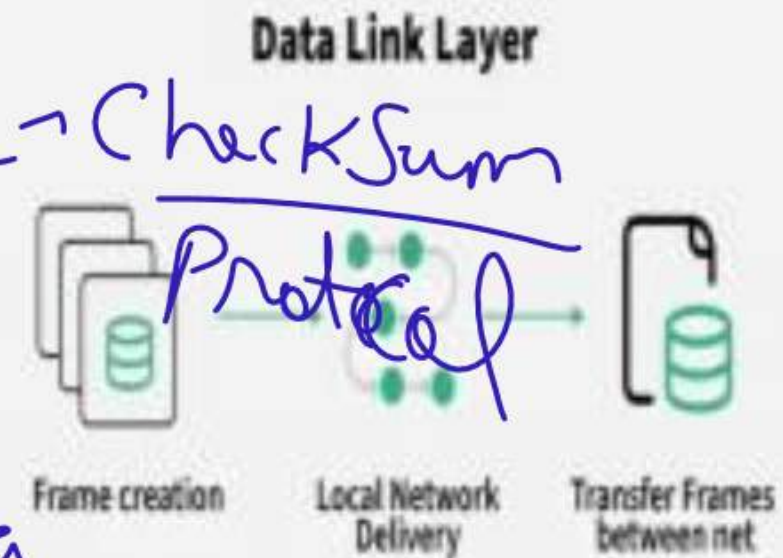


Data
MAC Address

Layer 3: Network Layer

The network layer works for the transmission of data from one host to the other located in different networks. It also takes care of packet routing i.e. selection of the shortest path to transmit the packet, from the number of routes available. The sender and receiver's IP address are placed in the header by the network layer. Segment in the Network layer is referred to as Packet. Network layer is implemented by networking devices such as routers and switches.

Functions of the Network Layer

- **Routing:** The network layer protocols determine which route is suitable from source to destination. This function of the network layer is known as routing.
- **Logical Addressing:** To identify each device inter-network uniquely, the network layer defines an addressing scheme. The sender and receiver's IP addresses are placed in the header by the network layer. Such an address distinguishes each device uniquely and universally.

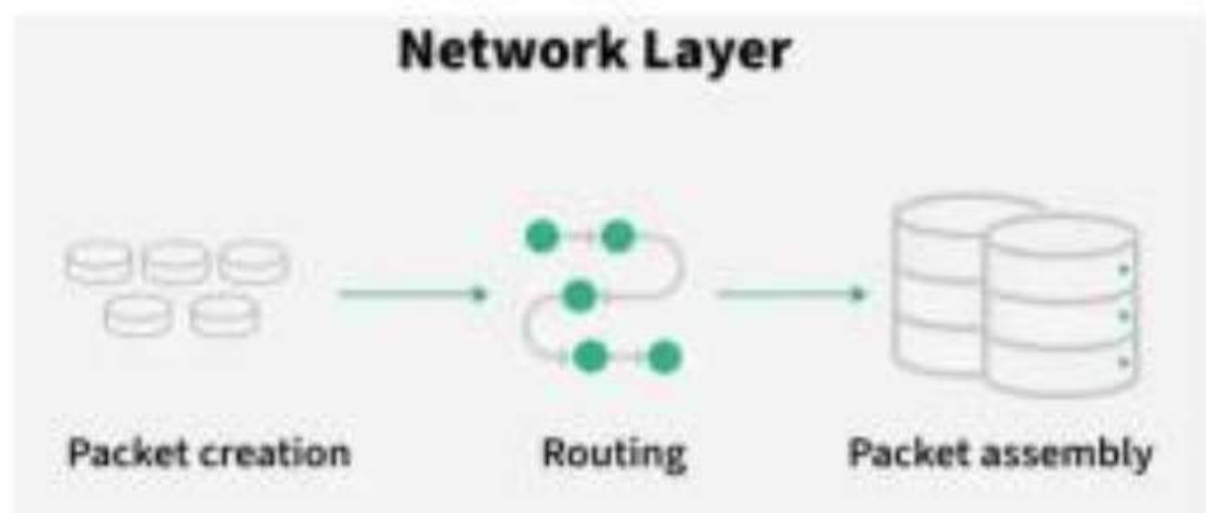

Layer 4: Transport Layer

The transport layer provides services to the application layer and takes services from the network layer. The data in the transport layer is referred to as **Segments**. It is responsible for the end-to-end delivery of the complete message. The transport layer also provides the acknowledgment of the successful data transmission and re-transmits the data if an error is found. Protocols used in Transport Layer are [TCP](#), [UDP](#), [NetBIOS](#), [PPTP](#).


At the sender's side, the transport layer receives the formatted data from the upper layers, performs **Segmentation**, and also implements **Flow and error control** to ensure proper data transmission. It also adds Source and Destination [port number](#) in its header and forwards the segmented data to the Network Layer.

- Generally, this destination port number is configured, either by default or manually. For example, when a web application requests a web server, it typically uses port number 80, because this is the default port assigned to web applications. Many applications have default ports assigned.

At the Receiver's side, Transport Layer reads the port number from its header and forwards the Data which it has received to the respective application. It also performs sequencing and reassembling of the segmented data.

Functions of the Transport Layer

- **Segmentation and Reassembly:** This layer accepts the message from the (session) layer and breaks the message into smaller units. Each of the segments produced has a header associated with it. The transport layer at the destination station reassembles the message.
- **Service Point Addressing:** To deliver the message to the correct process, the transport layer header includes a type of address called service point address or port address. Thus, by specifying this address, the transport layer makes sure that the message is delivered to the correct process.

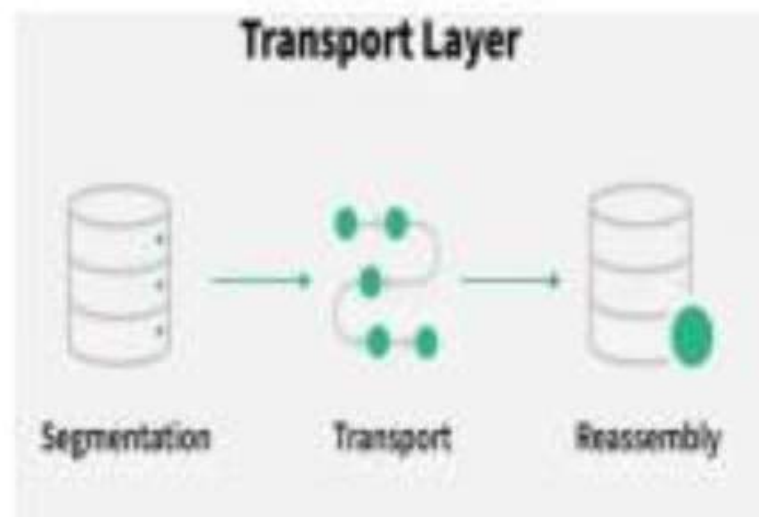

Layer 5: Session Layer


Session Layer in the OSI Model is responsible for the establishment of connections, management of connections, terminations of sessions between two devices. It also provides authentication and security. Protocols used in the Session Layer are NetBIOS, PPTP.

Functions of the Session Layer

- **Session Establishment, Maintenance, and Termination:** The layer allows the two processes to establish, use, and terminate a connection.
- **Synchronization:** This layer allows a process to add checkpoints that are considered synchronization points in the data. These synchronization points help to identify the error so that the data is re-synchronized properly, and ends of the messages are not cut prematurely, and data loss is avoided.
- **Dialog Controller:** The session layer allows two systems to start communication with each other in half-duplex or full duplex.

Example

Let us consider a scenario where a user wants to send a message through some Messenger application running in their browser. The "**Messenger**" here acts as the application layer which provides the user with an interface to create the data. This message or so-called **Data** is compressed, optionally encrypted (if the data is sensitive), and converted into bits (0's and 1's) so that it can be transmitted.

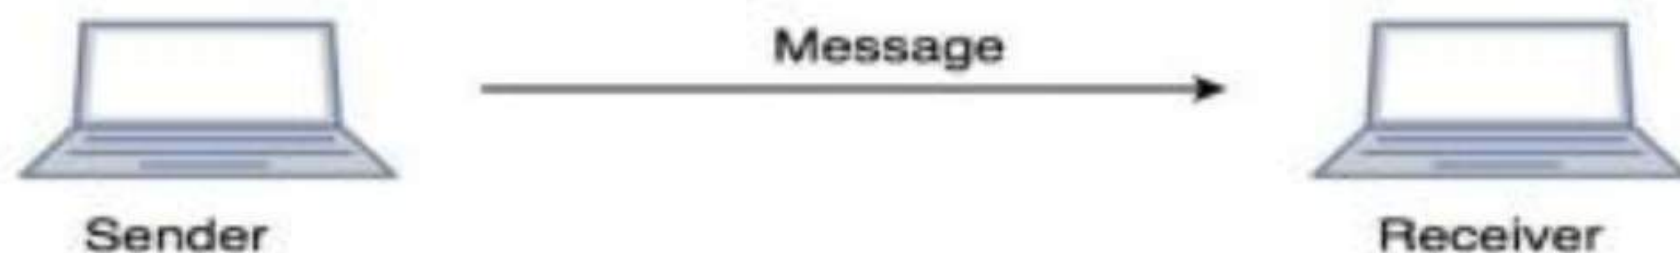

Session Layer



Session of Communication

Layer 6: Presentation Layer

The presentation layer is also called the **Translation layer**. The data from the application layer is extracted here and manipulated as per the required format to transmit over the network. Protocols used in the Presentation Layer are [TLS/SSL](#) (Transport Layer Security / Secure Sockets Layer), [JPEG](#), [MPEG](#), [GIF](#), are standards or formats used for encoding data, which is part of the presentation layer's role.

Functions of the Presentation Layer

- **Translation:** For example, [ASCII to EBCDIC](#).
- **Encryption/ Decryption:** Data encryption translates the data into another form or code. The encrypted data is known as the ciphertext, and the decrypted data is known as plain text. A key value is used for encrypting as well as decrypting data.
- **Compression:** Reduces the number of bits that need to be transmitted on the network.

Presentation Layer



Layer 7: Application Layer

At the very top of the OSI Reference Model stack of layers, we find the Application layer which is implemented by the network applications. These applications produce the data to be transferred over the network. This layer also serves as a window for the application services to access the network and for displaying the received information to the user. Protocols used in the Application layer are SMTP, FTP, DNS, etc.




Functions of the Application Layer

The main functions of the application layer are given below.

- **Network Virtual Terminal (NVT):** It allows a user to log on to a remote host.
- **File Transfer Access and Management (FTAM):** This application allows a user to access files in a remote host, retrieve files in a remote host, and manage or control files from a remote computer.
- **Mail Services:** Provide email service.
- **Directory Services:** This application provides distributed database sources and access for global information about various objects and services.

Topic- Flow of -> OSI Model

PH: Presentation Header

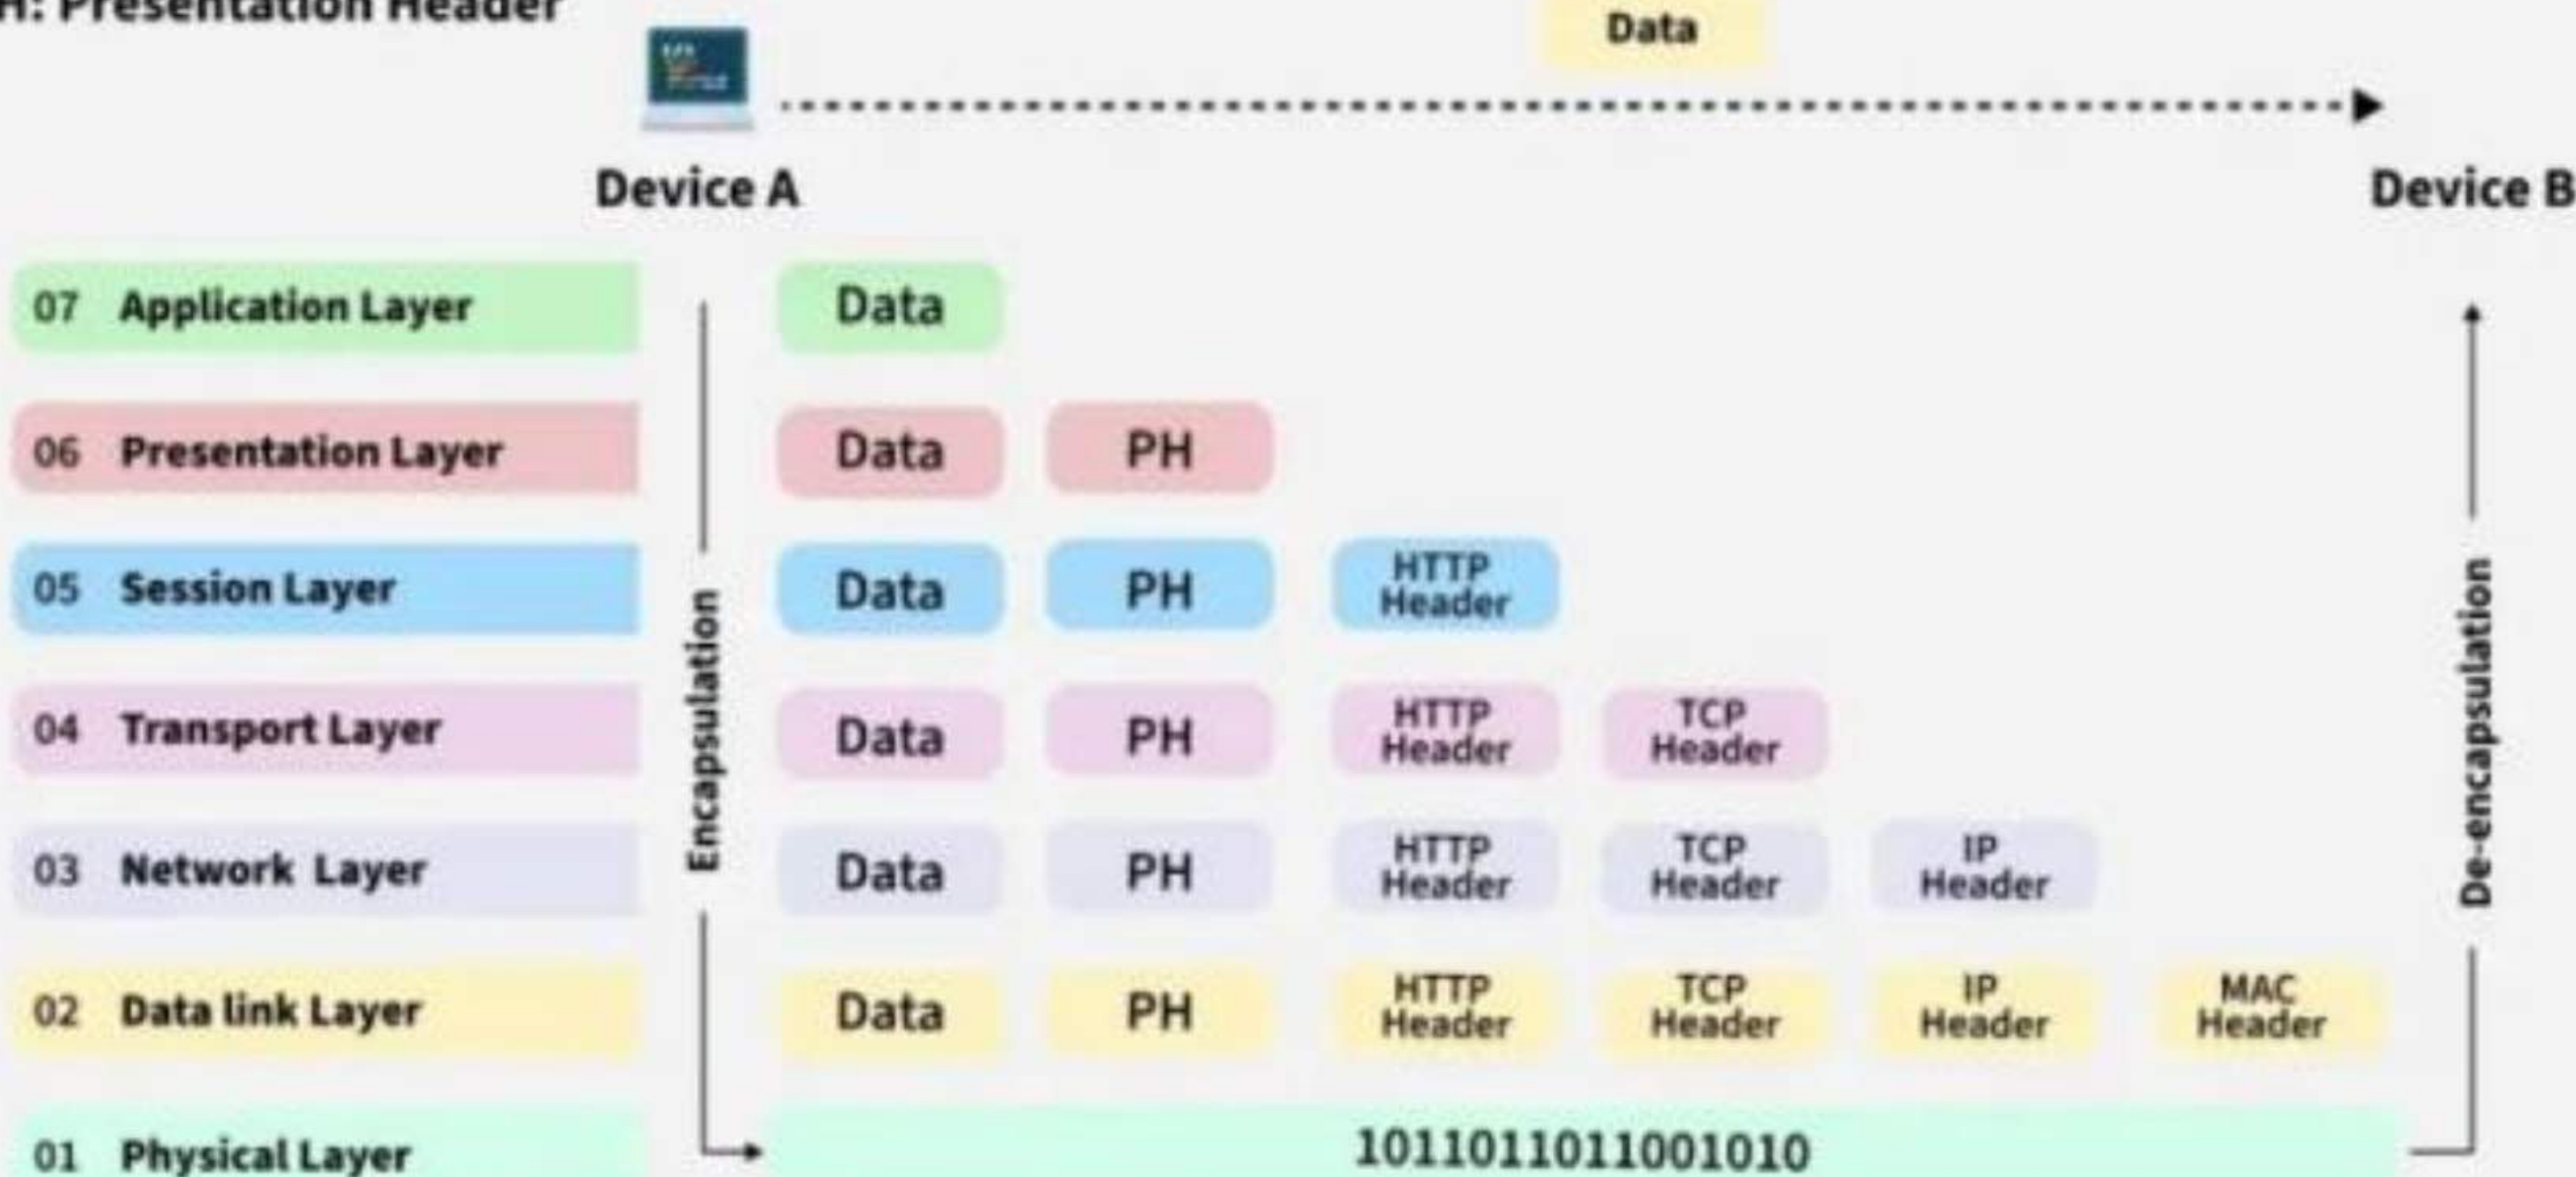

OSI Model

Advantages of OSI Model

The OSI Model defines the communication of a computing system into 7 different layers. Its advantages include:

- It divides network communication into 7 layers which makes it easier to understand and troubleshoot.
- It standardizes network communications, as each layer has fixed functions and protocols.
- Diagnosing network problems is easier with the **OSI model**.
- It is easier to improve with advancements as each layer can get updates separately.

Disadvantages of OSI Model

- The OSI Model has seven layers, which can be complicated and hard to understand for beginners.
- In real-life networking, most systems use a simpler model called the Internet protocol suite (TCP/IP), so the OSI Model is not always directly applicable.
- Each layer in the OSI Model adds its own set of rules and operations, which can make the process more time-consuming and less efficient.
- The OSI Model is more of a theoretical framework, meaning it's great for understanding concepts but not always practical for implementation.

THANK YOU