

Clock

April 9, 2017

This block doesn't accept any input signal. It outputs one signal that corresponds to a sequence of Dirac's delta functions with a user defined *period*.

Input Parameters

- period{ 0.0 };
- samplingPeriod{ 0.0 };

Methods

Clock()

Clock(vector<Signal *> &InputSig, vector<Signal *> &OutputSig) :Block(InputSig, OutputSig)

void initialize(void)

bool runBlock(void)

void setClockPeriod(double per)

void setSamplingPeriod(double sPeriod)

Functional description

Input Signals

Number: 0

Output Signals

Number: 1

Type: Sequence of Dirac's delta functions. (TimeContinuousAmplitudeContinuousReal)

Examples

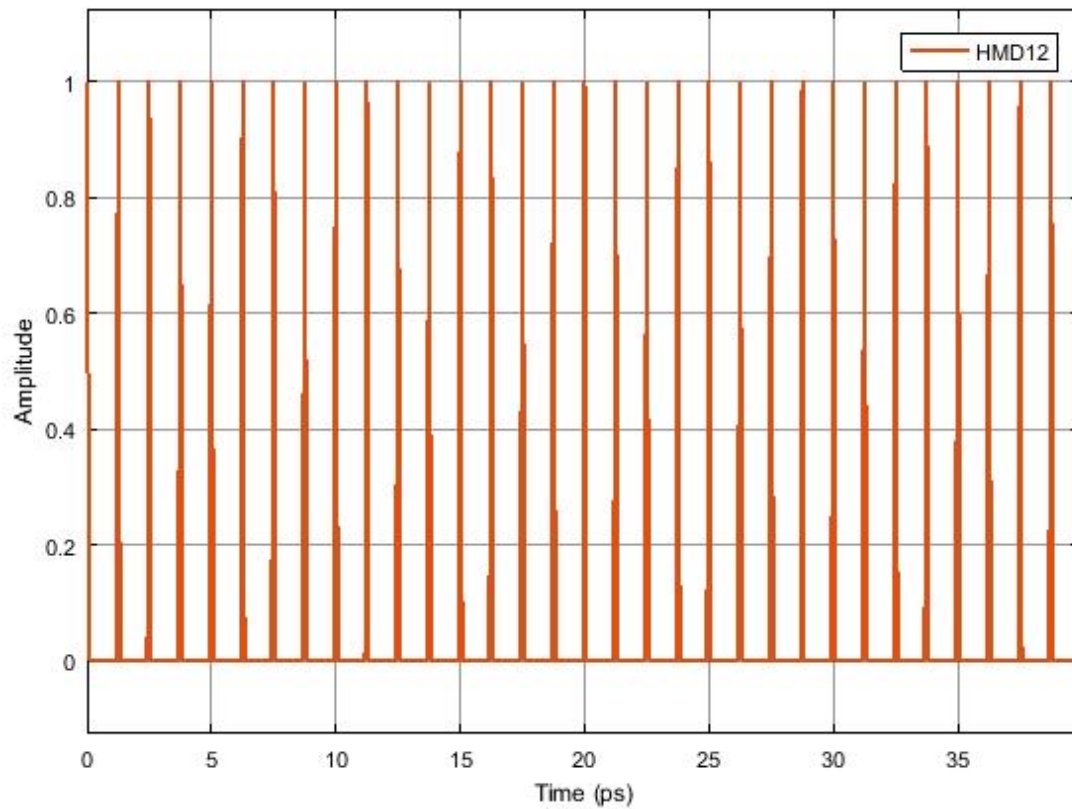


Figure 1: Example of the output signal of the clock

Suggestions for future improvement