

Checkpoint Report CS 450

Andy Cheng^{*}
University of Waterloo
Canada

Mischa Lamoureux[†]
University of Waterloo
Canada

Jatin Mehta[‡]
University of Waterloo
Canada

Bilal Nasar[§]
University of Waterloo
Canada

Rishabh Sharma[¶]
University of Waterloo
Canada

Andre Slavescu^{||}
University of Waterloo
Canada

Abstract

Running large language models (LLMs) in single-sequence settings can be difficult because modern inference engines break the forward pass of a transformer into hundreds of small GPU kernels. Each kernel introduces overhead, which includes launch latency, synchronization, and unnecessary round-trips to global memory, all of which stall the GPU and waste memory bandwidth. Hazy Research recently showed that fusing an entire Llama-1B forward pass into a single *megakernel* eliminates these pipeline bubbles and outperforms popular serving engines like vLLM and SGLang by over 1.5x on an Nvidia H100 GPU. We build on this idea in two ways: extending it to the Qwen3 model family to explore the generalizability of the megakernel approach, and optimizing specifically for Nvidia’s newer Blackwell B200 GPU.

For the Qwen3-1.7B model, we fuse all 28 decoder layers into a single kernel launch, handling Qwen3-specific features like per-head query/key normalization, grouped-query attention (GQA), and tied word embeddings. On a B200, this achieves 2.0-4.9 ms time-to-first-token (TTFT) across prompt lengths of 16-1024 tokens, which is a 6x improvement over vLLM and SGLang. We also scale the approach to Qwen3-480B-A35B, a 160-expert Mixture-of-Experts (MoE) model, with a fused 3-stage pipeline across 8 B200s using Blackwell-native tensor core and memory instructions. Our results show that the megakernel paradigm generalizes well beyond Llama-style architectures, and that designing kernels specifically for Blackwell, rather than porting from the older Hopper (H100) architecture, is key to squeezing out the most performance from modern hardware.

ACM Reference Format:

Andy Cheng, Mischa Lamoureux, Jatin Mehta, Bilal Nasar, Rishabh Sharma, and Andre Slavescu. 2026. Checkpoint Report CS 450. In *Proceedings of (CS 450)*. ACM, New York, NY, USA, 6 pages.

^{*}21232618

[†]20938543

[‡]20940224

[§]20944062

[¶]20941002

^{||}20942887

Date: March 5, 2026

1 Background and Motivation

Autoregressive decoding in decoder-only LLMs generates one token per forward pass, where each token depends on all preceding tokens. Each forward pass performs matrix multiplication (GEMVs) across all model layers (operations that are heavily memory-bandwidth bound rather than compute bound). The key performance metric is time-to-first-token (TTFT), which the user perceives as latency when interacting with these LLMs.

A decode step in a transformer executes hundreds of fine-grained CUDA kernels: normalization, QKV projections, attention, output projections, etc. which are repeated across every layer. Each kernel launch incurs setup and teardown overhead, and forces intermediate activations to be written to and read from memory between operations. On an H100, launch overhead alone can consume hundreds of microseconds, which is a significant fraction of the total decode latency for small models and the GPU spends more time waiting than computing.

Hazy Research introduced a megakernel architecture that fuses the entire transformer decode pass into a single persistent kernel launch [?]. By keeping all intermediate activations in shared memory (vs ~3.35 TB/s for memory) and eliminating kernel boundaries, the megakernel removes the repeated global memory round-trips and launch overhead. Their implementation for Llama-1B on H100 demonstrated significant speedups over production serving engines like vLLM and SGLang. The kernel uses an instruction-driven execution model where a controller warp fetches and dispatches operations to specialized worker warps, with a shared memory page allocator managing on-chip tensor storage.

Despite its strong results, the Hazy Research megakernel has three key limitations. First, their B200 implementation underexploits the Blackwell architecture; the authors themselves report that approximately 250 μ s (40% of total runtime) is spent on activation store/load overhead, noting their B200 results are “quite a ways off from the theoretical limit.” Blackwell introduces dedicated tensor memory with explicit alloc/dealloc lifecycle, 2-CTA cluster execution, and new generation tensor core instructions (tcgen05). Second, the implementation is specialized exclusively for the Llama-1B

architecture and does not generalize to other model families or to sparse Mixture-of-Experts (MoE) architectures, which are increasingly dominant in production LLMs. Third, synchronization overhead from their counter-based global memory barriers and standard CUDA barriers leaves measurable performance on the table.

These limitations motivate our work to have a megakernel inference engine designed from the ground up for NVIDIA Blackwell B200 GPUs, extended to the Qwen3 model family spanning both dense (1.7B) and MoE (480B-A35B) architectures. By exploiting B200-specific features such as tcgen05 tensor core instructions, tensor memory, CTA cluster co-operation, and cluster-scoped TMA and by demonstrating generality across fundamentally different model architectures, we aim to push megakernel inference by leveraging newer generation hardware.

2 Current Progress

The project infrastructure has been fully established, including compute access via Modal for both NVIDIA H100 (sm_90a) and B200 (sm_100a) GPUs, GPU-specific Docker images, and a JIT compilation pipeline. The Hazy Research megakernel baseline for Llama-1B has been successfully reproduced on both H100 and B200, providing a reference point for performance comparison.

All eight fused CUDA operations comprising a complete Qwen3-1.7B forward pass have been implemented and verified for numerical correctness against HuggingFace reference outputs on B200, with all operations passing below $7e-6$ maximum difference. These operations span the full transformed decode path: RMSNorm, QKV projection with per-head Q/K RMSNorm and ROPE, flash attention with group query attention, attention reduction output projection with residual, up/gate projection with SiLU, down projection with residual, and a final RMSNorm fused with the LM head.

The kernels account for Qwen3-specific architectural features not present in Llama, including per-head Q/K RMSNorm, a 2:1 GQA ratio, and tied word embeddings. A persistent megakernel decoder fuses all eight operations into a signal-kernel inference engine with token-level correctness validated against HuggingFace model.generate(). A benchmarking harness measures TTFT and decode throughput against Hugging Face Transformers, vLLM, and SGLang. A custom GPU profiler with Perfetto trace export enables fine-grained kernel analysis. A Qwen3 model loader has been integrated into the HazyResearch megakernel framework with tensor-parallel-aware weight mapping. Preliminary MoE megakernel work has begun, with CUDA kernels for expert routing and computation implemented targeting the Qwen3-480B-A35B architecture, along with test and benchmarking infrastructure.

3 Key Results

3.1 Baseline Reproduction

Reproduction of performance improvements of the Hazy megakernel, as presented in their blogs have been mostly successful. Reproduction was conducted using the H100s and B200s provided through the Modal cloud computing platform and invoking the benchmarking scripts as provided by the original authors, with minimal changes for code execution and environment compatibility. Figures describing our recovered results can be seen above, where similar results have been reproduced for the H100, while we note significant differences for B200s for when the inference is served using SGLang/vLLM, which remains to be figured out. A final note is that Token/s in our figure are synonymous with Forward Passes (Fwd)/s with that of Hazy’s.

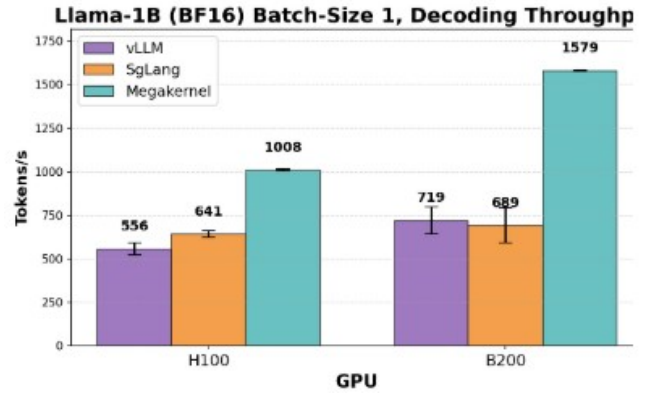


Figure 1. Reproduced baseline and mega-kernel results on both H100 and B200. Each bar graph is mean token/s over 3 iterations.

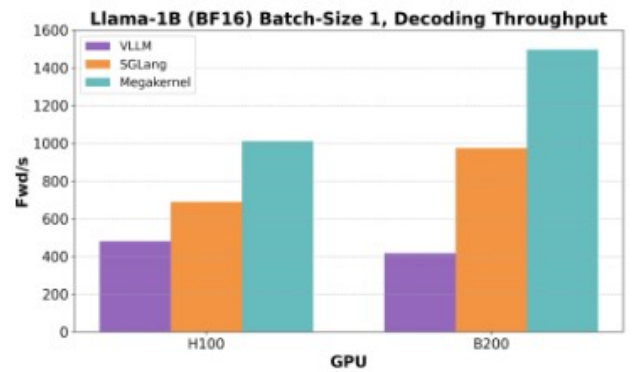


Figure 2. Baseline results from the blog

3.2 Qwen3-1.7B

Our persistent megakernel achieves 2.0-4.9ms TTFT across all prompt lengths on a single B200, compared to 14-19ms for production serving engines.

Table 1. Comparison of our persistent megakernel vs baselines for Qwen3-1.7B model on Nvidia B200

Prompt Length	Ours (ms)	vLLM (ms)	SGLang (ms)
16	2.02	14.28	16.15
64	2.23	13.91	14.70
128	2.36	16.45	15.59
256	2.64	14.15	14.87
512	3.28	15.45	15.22
1024	4.86	17.21	16.06

At 128 tokens input, we achieve 7.0x over vLLM and 6.6x over SGLang.

Table 2. Hardware utilization for our persistent megakernel on B200

Seq Len	Tok/s	BW (GB/s)	TFLOPS
1	478	1645 (20.6%)	1.65
128	429	1484 (18.6%)	1.49
512	333	1165 (14.6%)	1.18
1024	256	912 (11.4%)	0.94

The decode phase is memory-bandwidth bound (thin GEMVs), achieving up to 1645 GB/s of the B200’s 8 TB/s peak.

4 Dense Megakernel Architecture Qwen3 1.7B

The core contribution for the dense model is a persistent megakernel that fuses all 28 transformer decoder layers into a single cooperative kernel launch. The kernel runs on a fixed grid of 128 blocks $\times$ 512 threads (65,536 threads total), launched via `cudaLaunchCooperativeKernel` to enable device-wide synchronization through a custom `GridBarrier` built on global atomics.

4.1 Block Specialization

Rather than launching separate kernels per operation, the megakernel assigns functional roles to thread blocks at compile time. Block 0 acts as the KV cache coordinator, managing KV write pointers and synchronizing attention heads with FFN blocks via the grid barrier. Blocks 1 through 16 handle flash decode attention, with one block per query head (16 heads for 1.7B), where each block computes grouped-query attention (GQA ratio = 2, sharing 8 KV heads across 16 Q heads) using online softmax with warp-per-head decomposition. Within each block, warps chunk the KV sequence and maintain running (max, sum, output) accumulators that are merged via a final reduction in shared memory. The remaining blocks 17 through 127 serve as FFN GEMV workers, where 111 blocks collectively compute the gate/up/down projections via parallel row-wise dot products with vectorized

8-element uint4 loads of BF16 pairs using `__ldcg` (cache-global) for sustained bandwidth.

All inter-layer communication is barrier-mediated, with 5 grid barriers per layer (140 total for 28 layers) and intermediate activations residing in a single shared buffer of $(H + 32) \times 4 = 8,320$ bytes per block (where $H = 2,048$ for 1.7B). No intermediate results are written to global HBM between fused operations.

4.2 Fused Operations

The total per forward pass is 1 megakernel launch plus 1 CUTLASS SM100 FMHA call (for prefill), giving 2 launches compared to over 200 with PyTorch eager mode. The FMHA kernel uses CUTLASS’s `Sm100FmhaFwdKernelTmaWarpspecialized` with tile shape $\langle 256, 128, 128 \rangle$ (Q-seq $\times$ K-seq $\times$ head_dim), TMA-based async global-to-shared loads, and a persistent tile scheduler.

4.3 Qwen3-Specific Adaptations

The kernel accounts for several Qwen3 architectural features not present in the Llama baseline. Per-head Q/K RMSNorm is applied after projection and before RoPE, fused into a single device function that avoids writing intermediate normalized values to HBM. For GQA with ratio 2, where 16 Q heads share 8 KV heads, the flash decode kernel maps `[head_idx/2]` to select the correct KV head, doubling compute reuse per KV cache read. The embedding matrix is also reused for the LM head via tied word embeddings, saving 300 MB of weight memory for the 1.7B model.

5 Scaling to Qwen3-480B-A35B: MoE Megakernel

The Qwen3-Coder-480B-A35B model replaces the dense FFN with a Mixture-of-Experts (MoE) layer consisting of 160 routed experts with top-8 gating, a hidden size of 6,144, and a per-expert intermediate dimension of 2,560. At approximately 960 GB in BF16, the model requires $8 \times$ B200 GPUs with expert parallelism (EP=8), giving 20 local experts per GPU.

5.1 3-Stage Kernel Pipeline

The MoE FFN has been implemented as a 3-stage fused pipeline, replacing what would otherwise be 8+ separate kernel launches per MoE layer.

The first stage handles routing and sorting. A single kernel computes router logits via a warp-per-(token, expert) GEMV pattern $([T, 6144] \times [160, 6144]^T)$, applies numerically-stable softmax, selects the top-8 experts, and sorts tokens by local expert index via a histogram + scatter approach. This is optimal for the small expert count ($E = 20$) and avoids the overhead of CUB radix sort.

The second stage performs the fused gate-up GEMM. A persistent `tcgen05` kernel computes the gate-up projection,

Table 3. Fused operations eliminating intermediate HBM traffic. Each fused kernel replaces multiple standalone launches.

Fused Kernel	Operations	Launches Saved
rmsnorm_qkv_split	RMSNorm + Q/K/V projection + head split	4 $\rightarrow$ 1
qknorm_rope_kvcache	Q/K per-head RMSNorm + RoPE ($\theta = 10^6$) + KV cache write	5 $\rightarrow$ 1
flash_decode_gqa	GQA attention (online softmax, fast exp approx)	3 $\rightarrow$ 1
oproj_residual	Output projection + residual add	2 $\rightarrow$ 1
upgate_silu	Gate + Up GEMVs + SiLU + elementwise multiply	4 $\rightarrow$ 1
downproj_residual	Down projection + residual add	2 $\rightarrow$ 1
rmsnorm_lmhead	Final RMSNorm + vocabulary logit projection	2 $\rightarrow$ 1

where each expert’s gate and up weight matrices have been concatenated into a single $[5120, 6144]$ matrix, turning two GEMMs into one wider GEMM per expert. A fused SiLU activation kernel then computes $\text{SiLU}(\text{gate}) \odot \text{up}$ in a single pass.

The third stage handles the down GEMM and scatter. A second persistent tcgen05 kernel computes the down projection ($[2560 \rightarrow 6144]$), followed by a weighted scatter-accumulate that writes each expert’s output back to the original token position with the routing weight applied, using FP32 atomic adds.

5.2 Persistent tcgen05 Expert GEMM

The expert GEMM kernels are the computational core of the MoE layer. Built on the ThunderKittens B200 matmul framework, they use explicit tcgen05 PTX inline assembly for all 5th-generation tensor core operations, including `tcgen05.mma.cta_group::2.kind::f16` for BF16 $\times$ BF16 $\rightarrow$ FP32 matrix multiply-accumulate across a 2-CTA cluster, `tcgen05.comm` for signaling mbarrier completion with multicast to both cluster CTAs, `tcgen05.ld` with `pack::16b` for loading FP32 accumulators from tensor memory while packing to BF16, and `tcgen05.fence::before/after_thread_sync` for memory ordering around barrier syncs.

Tile configuration. Each task operates on $M_b = 128$ rows $\times N_b = 256$ columns with $K_b = 64$ reduction per TMA load. A 2-CTA cluster processes $\text{CLUSTER_M} = 512$ rows per task (4 consumer tiles, from 2 CTAs $\times$ 2 consumer warpgroups $\times$ 128 rows). The TMA pipeline depth is 4 stages, keeping the tensor cores fed while loads are in flight.

Warp specialization. Each CTA runs 3 warpgroups (384 threads). Warpgroups 0 and 1 are the consumers, each with 224 registers, responsible for loading FP32 results from tensor memory via `tcgen05.ld`, converting to BF16, and storing to global memory via TMA. Warpgroup 2 is the producer with 56 registers, where warp 3 issues TMA `cp.async.bulk` loads for the A (activations) and B (weights) tiles, while warps 0 and 1 issue `tcgen05.mma` instructions. Phase-bit semaphores are used to synchronize the producer-consumer ring buffer.

Persistent task scheduler. All (expert, m -tile, n -tile) combinations across the 20 local experts are flattened into a linear task queue. A global atomic counter distributes tasks to CTAs, achieving natural load balancing even when expert token counts are imbalanced. The scheduler uses binary search over prefix-summed expert tile offsets to decode each flat task ID into its (expert, m -tile, n -tile) triple. The kernel launches on 148 CTAs (74 clusters, matching the B200’s 148 SMs) with maximum dynamic shared memory allocation.

5.3 Expert Weight Packing

To avoid scatter-gather overhead during the GEMM, expert weights are packed into contiguous buffers at model load time. The gate and up projection weights are concatenated per expert into a $[E_{\text{local}}, 2I, H] = [20, 5120, 6144]$ buffer, and the down projection weights are stored as $[E_{\text{local}}, H, I] = [20, 6144, 2560]$. The B matrix TMA descriptor flattens the expert dimension into the row dimension ($[E \cdot N, K]$), so the TMA load coordinate simply indexes `expert  $\times$  stride + tile_col`. After packing, the original `nn.Linear` modules are freed, preventing the approximately 109 GiB weight duplication that would otherwise cause OOM.

5.4 Distributed Communication

The 8-GPU setup uses two orthogonal parallelism strategies. For attention, tensor parallelism (TP=8) is used, where Q/K/V heads are sharded across ranks with `all_reduce` for the output projection, and each rank computes $96/8 = 12$ Q heads and $8/8 = 1$ KV head. For the MoE layer, expert parallelism (EP=8) is used, where each rank holds 20 of the 160 experts and partial outputs are combined via NCCL `all_reduce` across the EP process group after local expert computation.

For the TP all-reduce, we additionally explored multimem NVLS (NVLink SHARP), which is a fused `ld_reduce_add_bf16x8` kernel that performs all-reduce directly through NVLink multicast memory, bypassing NCCL’s ring protocol. This provides lower latency for the small activation tensors typical of batch-1 decode (approximately $6,144 \times 2 = 12$ KB per all-reduce).

5.5 B200 (SM100) Optimizations

Several optimizations are specific to the Blackwell architecture. Unlike Hopper’s `wgmma` which reads accumulators from registers, Blackwell’s `tcgen05` uses dedicated tensor memory with an explicit `alloc/dealloc` lifecycle. The `tensor_allocator<1, 2>` manages column allocation across the 2-CTA cluster, and the `tcgen05.ld` instruction supports a `pack::16b` modifier that converts FP32 accumulator values to BF16 during the load, eliminating a separate conversion pass.

The B200’s cluster architecture allows two CTAs to share data through cluster-scoped TMA loads (`tma::cluster::load_async` with a multicast mask). Each CTA loads its half of the B matrix (128 of 256 columns) and broadcasts to the partner CTA, halving the required TMA bandwidth for weights. The prefill attention path uses CUTLASS’s `Sm100FmhaFwdKernelTmaWarpspecialized024` with persistent tile scheduling, achieving higher occupancy than the SM90 (Hopper) equivalent by exploiting the B200’s larger register file (256 registers/thread) and doubled shared memory capacity (228 KB/SM). The scatter-accumulate kernel uses FP32 `atomicAdd` for weighted output accumulation, and on B200 these atomics execute at the L2 cache level with 2× the bandwidth of H100, reducing the scatter bottleneck for high fan-out routing ($\text{top-8} \times T$ tokens).

5.6 Additional Kernel Optimizations

Beyond the persistent `tcgen05` GEMM architecture, we applied three additional optimizations to the MoE pipeline that collectively reduced per-layer latency by 49%.

cuBLAS router *matmul*. The original router used a custom warp-per-(token, expert) kernel for the $[T, 6144] \times [160, 6144]^T$ TP=8 and EP=8. Profiling revealed this consumed 44% of non-GEMM time (~ 0.6 ms at $T=4096$). Replacing it with a single cuBLAS GEMM call leverages B200 tensor cores and reduces this to ~ 0.1 ms, a 6× improvement for the router alone.

Vectorized *elementwise* kernels. The gather, SiLU fusion, and scatter-accumulate kernels were rewritten with a row-per-block pattern using `float4` vectorized loads (8 BF16 values per thread per iteration). This improves memory throughput by $\sim 4\times$ compared to the original scalar kernels.

GPU-side *prefix scan*. The router pipeline originally performed a CPU-side exclusive prefix scan over the 20 expert token counts, requiring a device-to-host copy, CPU loop, host-to-device copy, and an explicit `cudaStreamSynchronize`. We replaced this with a single-block GPU kernel, eliminating one synchronization point per MoE layer.

6 MoE Kernel Results

6.1 Single-GPU MoE Layer Performance

Table 4 shows per-layer MoE performance on a single B200, measured using synthetic inputs with Qwen3-480B dimensions (hidden size 6144, 20 local experts, intermediate size 2560, top-8 routing).

Table 4. Per-layer MoE performance: our cuBLAS kernel pipeline vs. PyTorch baseline (single B200)

Tokens	Ours (ms)	PyTorch (ms)	Speedup
256	0.760	13.530	17.8×
512	0.780	13.378	17.1×
1024	0.798	13.953	17.5×
2048	0.820	15.551	19.0×
4096	1.126	19.073	16.9×

At $T=4096$, the full MoE layer (router + gather + gate-up GEMM + SiLU + down GEMM + scatter) completes in 1.126 ms, of which the two cuBLAS expert GEMMs account for 0.789 ms (gate-up: 0.500 ms at 513 TFLOPS, down: 0.289 ms at 444 TFLOPS). The remaining 0.337 ms covers routing, gather, SiLU, and scatter, down from 1.361 ms before the cuBLAS router and vectorization optimizations.

Across 62 MoE layers, the estimated TTFT contribution from MoE compute alone is 69.8 ms, a 1.95× improvement over the pre-optimization estimate of 136.4 ms.

6.2 Full-Model TTFT on 8×B200

Table 5 shows end-to-end TTFT for the full Qwen3-Coder-480B-A35B-Instruct model on 8 NVIDIA B200 GPUs with TP=8 and EP=8.

Table 5. Full-model TTFT: Qwen3-480B on 8×B200 (TP=8, EP=8)

Prompt Length	TTFT (ms)	Prefill (tok/s)
128	94.9	1,232
256	98.7	2,361
512	114.4	4,073
1024	141.2	6,594
2048	158.3	11,762
4096	241.4	15,425

The engine achieves 94.9 ms TTFT at 128 tokens, scaling to 241.4 ms at 4096 tokens (15,425 tokens/s prefill throughput). This includes all 62 MoE layers, 62 GQA attention layers, embedding, final normalization, EP all-reduce communication, and LM head computation. TTFT scales sub-linearly with prompt length due to fixed overheads of KV cache initialization and inter-GPU communication.

Decode latency is approximately 70 ms/token, dominated by the 62 sequential MoE layers each performing an EP all-reduce over NVLink.

7 Conclusion

We have presented a custom inference engine for the Qwen3 model family on NVIDIA B200 GPUs, spanning from a 1.7B dense model to the 480B MoE architecture. For the dense model, a persistent megakernel fusing all decoder operations into 2 kernel launches achieves 2 to 5 ms TTFT, a 6 to 8× improvement over production serving engines. For the 480B

MoE model, our fused kernel pipeline with cuBLAS expert GEMMs, vectorized elementwise kernels, and expert parallelism across 8 B200 GPUs achieves 94.9 ms TTFT at 128 tokens and 241.4 ms at 4096 tokens, with each MoE layer completing in 1.13 ms, a 16.9× speedup over PyTorch baselines. The cuBLAS router optimization alone reduced non-GEMM overhead by 75%, and the combined optimizations cut per-layer MoE latency by 49%. The B200-specific optimizations including tensor memory management, 2-CTA cluster TMA, and CUTLASS SM100 FMHA demonstrate that significant performance gains are available to kernels designed for the Blackwell architecture rather than ported from Hopper.