



INSTITUTE OF COGNITIVE SCIENCE
INTUIT DATA ENGINEERING AND ANALYTICS

Bachelor's Thesis

Enhanced A/B Testing

Andrea Suckro

June 10, 2015

First supervisor: Prof. Dr. Frank Jäkel
Second supervisor: Mita Mahadevan

Enhanced A/B Testing

basic ab testing what this thesis adds to the framework how this is used in costumer ...

Contents

| | | |
|----------|---|-----------|
| 1 | Introduction | 4 |
| 1.1 | Terminology | 4 |
| 2 | General Theory | 5 |
| 2.1 | Basic Assumptions and Setup | 5 |
| 2.2 | Best Bucket | 5 |
| 2.2.1 | Analytic | 6 |
| 2.2.2 | Approximation | 7 |
| 2.2.3 | Sampling | 7 |
| 2.2.4 | n Buckets | 7 |
| 2.3 | Best Assignment | 8 |
| 2.3.1 | Uniform | 8 |
| 2.3.2 | Random | 8 |
| 2.3.3 | Entropy | 8 |
| 3 | Classic AB-Testing | 9 |
| 3.1 | | 9 |
| 3.2 | Data analysis | 9 |
| 3.3 | Data representation | 9 |
| 4 | Bandit AB-Testing | 10 |
| 4.1 | Basic Idea | 10 |
| 4.1.1 | Bandit Algorithms in general | 10 |
| 4.1.2 | Reformulating AB-Testing to Bandits | 10 |
| 5 | Discussion | 11 |
| | Appendices | I |

Chapter 1

Introduction

Motivation for the project. General motivation for automated tests in the field of software development. hope for an objective criterion to make business decisions. can be applied to design measured in clickrates, can be internal process , can be ... anything that can be measured. intuit has an own framework to conduct test scenarios called abntest. it is a webservice that can be easily integrated by any product and uses http requests to measure the characteristic numbers for a test scenario.

1.1 Terminology

certain terms will reoccur throughout the thesis and will be explained here. Test: Bucket: Action: A user that is assigned to a bucket may perform an action that is measured. For example - the clicking on a specific button may trigger the recording of this action. Sampling Rate: The sampling rate determines what percentage of all the users participate in the test. This decision takes place before each user is assigned to a bucket.

Chapter 2

General Theory

2.1 Basic Assumptions and Setup

A test is set up with at least two buckets and a sampling rate that determines what percentage of all possible users should participate in the testing. If for a new user was decided that she takes part in the test the next part is assigning her to a bucket. Later in this chapter different mechanisms for this step will be discussed and evaluated. Now certain actions of the users are recorded.


One is generating actions with a probability q_1 the other generates them with a probability q_2 . The prior distribution for all q is a Beta distribution, which is a convenient choice because it is a prior distribution for binomial proportions (the Beta distribution is the conjugate family for the binomial likelihood). We also assume no prior knowledge when creating the test case (uninformative prior $Beta(1, 1)$). N_1 customers get assigned to Bucket 1 and N_2 to Bucket 2. They generate k_1 and k_2 actions. The posterior distributions for each individual case is:

$$q = f(k|N) \propto f(N|k)f(k)$$
$$q_1 = Beta(k_1 + \alpha, N_1 - k_1 + \beta) = \frac{x^{k_1 + \alpha - 1}(1 - x)^{N_1 - k_1 + \beta - 1}}{B(k_1 + \alpha, N_1 - k_1 + \beta)}$$
$$q_2 = Beta(k_2 + \alpha, N_2 - k_2 + \beta) = \frac{x^{k_2 + \alpha - 1}(1 - x)^{N_2 - k_2 + \beta - 1}}{B(k_2 + \alpha, N_2 - k_2 + \beta)}$$

So each new assignment and each new event would directly alter the distributions parameters. *Questions: What is with returning users? Or users with a high action rate? Is every user a new one?* What is the posterior for $P(q_1 > q_2 | k_1, N_1, k_2, N_2)$ - that Bucket 1 performs better than Bucket 2 given the collected data? There are in principal two different ways to get an answer.

2.2 Best Bucket

Finding the best Bucket among the other test scenarios can be achieved in several ways. It follows a set of methods. Each will be explained first for the simple case with two Buckets and then expanded to the general setting with n different cases.

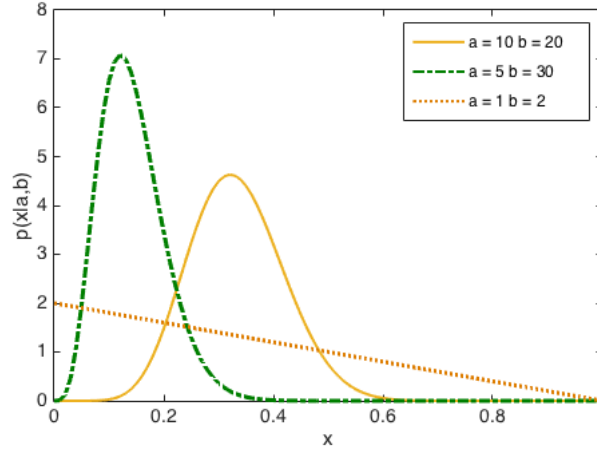

2.2.1 Analytic

In general for two random variables X, Y with corresponding probability density function f_X, f_Y and cumulative density function F_X, F_Y it holds:

$$\begin{aligned}
 P(X \geq Y) &= \iint_{[x \geq y]} f_X(x) f_Y(y) dy dx \\
 &= \int_{-\infty}^x f_X(x) f_Y(y) dy dx \\
 &= \int_{-\infty}^{\infty} f_X(x) F_Y(x) dx
 \end{aligned}$$

In our case with the two given buckets and the Beta Distribution that has only non-zero values in the range from 0 to 1 this formula resolves to:

$$P(q1 \geq q2) = \int_0^1 \text{Beta}_{q1}(k1, N1 - k1) I_{q2}(k2, N2 - k2) dx$$

Where I_{q2} is the regularized incomplete beta function. In the paper "Numerical Computation of Stochastic Inequality Probabilities" the author John D. Cook uses symmetries of the distribution to arrive at a set of equations that can be used to calculate the problem recursively.

$$\begin{aligned}
 g(k1, N1, k2, N2) &= P(X > Y) \\
 h(k1, N1, k2, N2) &= \frac{B(k1 + k2, N1 + N2)}{B(k1, N1) B(k2, N2)}
 \end{aligned}$$

From that one could calculate a base case for a small sample and then continue with:

$$\begin{aligned} g(k1 + 1, N1, k2, N2) &= g(k1, N1, k2, N2) + h(k1, N1, k2, N2)/k1 \\ g(k1, N1 + 1, k2, N2) &= g(k1, N1, k2, N2) - h(k1, N1, k2, N2)/N1 \\ g(k1, N1, k2 + 1, N2) &= g(k1, N1, k2, N2) - h(k1, N1, k2, N2)/k2 \\ g(k1, N1, k2, N2 + 1) &= g(k1, N1, k2, N2) + h(k1, N1, k2, N2)/N2 \end{aligned}$$

2.2.2 Approximation

For *sufficient large* samples one could again approximate the Beta Distribution with a normal distribution. This means that the following equation should be fulfilled for $B(k, N)$:

$$\frac{k+1}{k-1} \approx 0, \frac{N+1}{N-1} \approx 0$$

The Gaussian Distribution to a given Beta Distribution has the following shape:

$$B(k, N) \approx N \left(\frac{k}{k+N}, \sqrt{\frac{kN}{(k+N)^2(k+N+1)}} \right)$$

The inequality for this case then could be solved by:

$$\begin{aligned} P(X > Y) &= P(0 > Y - X) \\ &= P(0 > \mu_Y - \mu_X + (\sigma_X^2 + \sigma_Y^2)^{\frac{1}{2}} Z) \\ &= P \left(Z < \frac{\mu_X - \mu_Y}{(\sigma_X^2 + \sigma_Y^2)^{\frac{1}{2}}} \right) \\ &= \Phi \left(\frac{\mu_X - \mu_Y}{(\sigma_X^2 + \sigma_Y^2)^{\frac{1}{2}}} \right) \end{aligned}$$

I am not sure if this is really a smart way to do it but what would be maybe interesting is finding out which of the possibilities is the fastest for growing N .

2.2.3 Sampling

One could also sample from the different distributions and take the mean of the of the samples to determine the best distribution. The mean of a Beta distribution $B(k, N)$ is given by:

$$E[X] = \frac{k}{k+N}$$

Open question here: how exactly is the sample size related to the accuracy of the estimate?

2.2.4 n Buckets

The generalization would again depend on the chosen method to evaluate the inequality.

Analytic

I found examples for 3 Beta distributed random variables. But basically any formula would calculate the probability that one variable is greater than the others which results in $n - 1$ equations to solve the problem for n buckets. The same number of equations would occur if we would compute the inequality pairwise with the already presented formula.

Sampling

Additional Buckets would not change the underlying computation but would result in additional draws and new means to compare.

2.3 Best Assignment

It is not obvious what the best strategy is to assign a new user to a specific bucket. I will try to compare several intuitive approaches in this section. Interesting cases for the different strategies are: How fast does each strategy converge? What happens if there is no clear winner?

2.3.1 Uniform**2.3.2 Random****2.3.3 Entropy**

The best assignment for a not yet tracked user would be a bucket that minimizes the entropy over the different buckets. The entropy of $P(q1 \geq q2)$ is given by:

$$\begin{aligned} h(q) &= \int_X f(x) \log f(x) dx \\ &= \int_0^1 P(q1 \geq q2) \log P(q1 \geq q2) dx \end{aligned}$$

We will use 2 as the basis for the logarithm - results shown in bits.

Chapter 3

Classic AB-Testing

3.1

Exploration and Exploitation in one.

3.2 Data analysis

3.3 Data representation

Chapter 4

Bandit AB-Testing

4.1 Basic Idea

The previous chapter dealt with optimization concerning classical AB-Testing. The following will describe a fundamentally different approach in which there is no separation between the exploration and the exploitation phase. Basically this means that we want to already maximize our profit while gaining information about the other buckets. When combining exploration and exploitation one has to choose on each step if a known good bucket should be used again or if one invests in other unknown buckets to gain more information about their reward function. This balancing is at the core of the now described algorithms.

4.1.1 Bandit Algorithms in general

Bandit algorithms originate from Machine Learning where they serve learning agents to show sensible behavior while exploring the environment. In each time step an agent is forced to make a choice among several actions. An action will lead to a reward. The reward function for any action is not known from the beginning and the agent can only estimate the true reward function of any action by trying this action. The objective is of course to maximize the received reward over the whole experiment. The name of this class of algorithms stems from their relation to the casino slot machines. Each action can be imagined as one lever in a row of many one-armed bandits. Each machine has a hidden reward function and a player wants to maximize their earned money at the end of the evening.

4.1.2 Reformulating AB-Testing to Bandits

The scenario is not that different. We have a test scenario as described in the previous chapter. Each new user is our chance to either explore or exploit what we know about the buckets of the test. Each assignment becomes the pull on the lever. We do not know when or if at all the user's behavior will lead to the recording of an action. We will have to assign users before getting the feedback of our previous assignments which leads to a class of bandit algorithms that is concerned with delayed feedback.

Chapter 5

Discussion

Hier schreiben dass die normalen AB-Tests schneller signifikante Ergebnisse liefern. Unterschied zwischen dem was man untersucht. Nicht reiner Gewinnnutzen.

List of Figures

Declaration of Authorship

I hereby certify that the work presented here is, to the best of my knowledge and belief, original and the result of my own investigations, except as acknowledged, and has not been submitted, either in part or whole, for a degree at this or any other university.

Osnabrück, June 10, 2015

