2025

Enhanced Gateway API

CARD NOT PRESENT TRANSACTIONS

KOUROSH TARI

EPS - CONFIDENTIAL

Enhanced Gateway API Documentation

Introduction

Enhanced Gateway provides an API for developers to integrate into our gateway and run transactions.

This document explains and outlines the transaction types supported by Enhanced Gateway (EG) and other details you need to know to complete a successful integration.

Card-Not-Present Transactions

These are transactions that you use an online form to perform. Think of them as online payments and eCommerce payments.

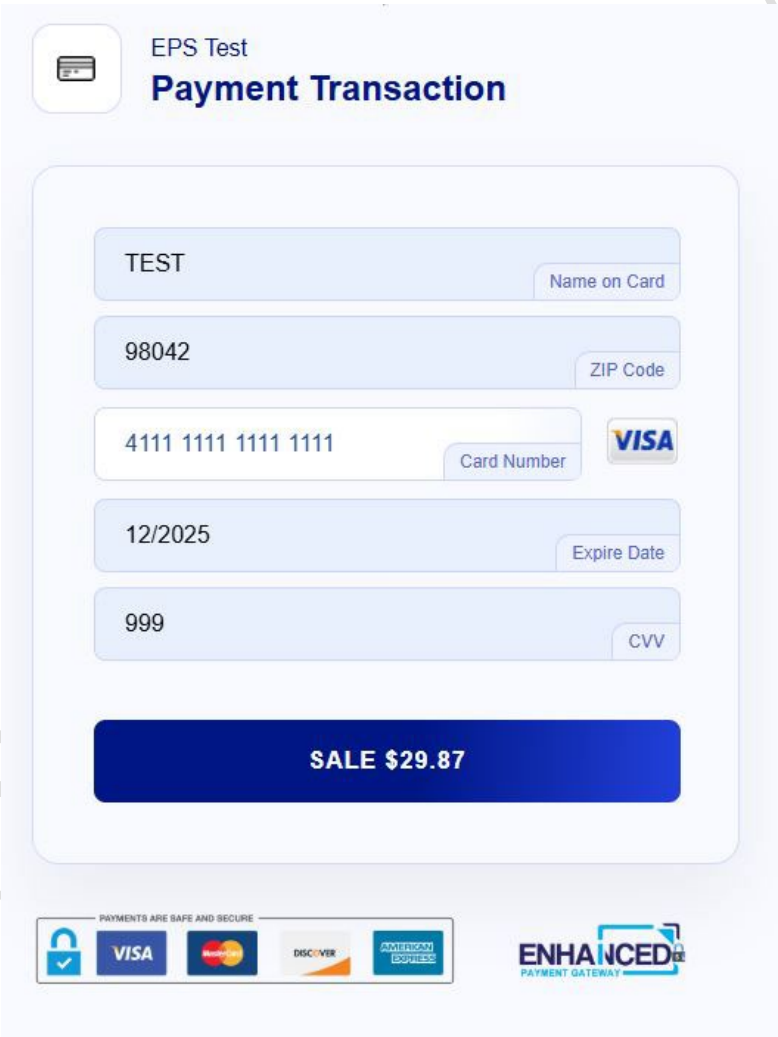

When you request a transaction of this kind, our safe, secure, and PCI Compliant platform generates a hosted form. Your end-users (customers) can safely enter their credit card information and make secure payments.

To use our API, you will need an active account number from our gateway and a valid and active API key.

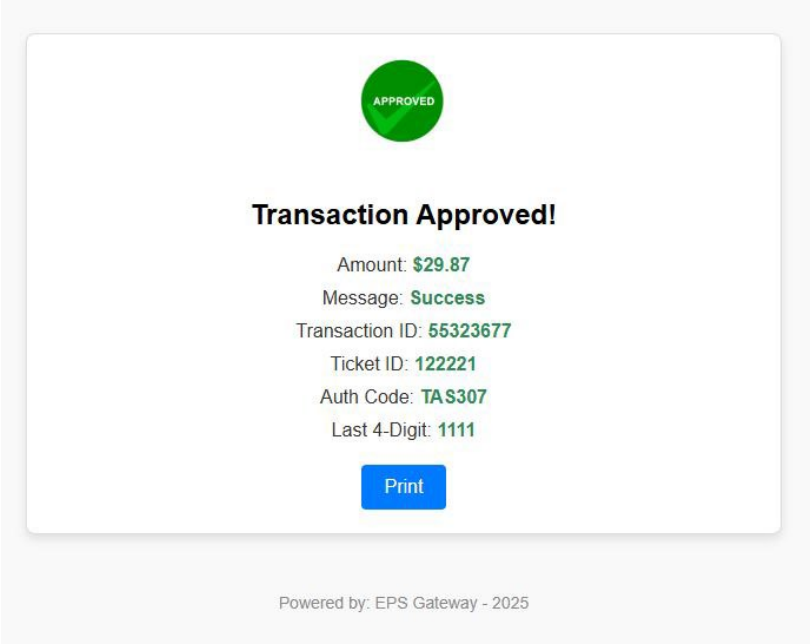

Transaction Groups

We classify card-not-present transactions into two groups:

- - Transactions that require a PTK (Payment Transaction Key):

  CreditSale
  CreditAuth
  CardToken
  CreditReturn
- - CreditSale
- - CreditAuth
- - CardToken
- - CreditReturn
- - Transactions that do not require a PTK:

  CreditAdjust
  CreditCapture (performed after a CreditAuth to capture the authorized amount)
  CreditVoid (cancels a previously performed transaction such as CreditSale, CreditAuth, CreditCapture, or CreditReturn)
  CreditSale with Token
  CreditReturn with Token
- - CreditAdjust
- - CreditCapture (performed after a CreditAuth to capture the authorized amount)
- - CreditVoid (cancels a previously performed transaction such as CreditSale, CreditAuth, CreditCapture, or CreditReturn)
- - CreditSale with Token

EPS - CONFIDENTIAL

- - CreditReturn with Token
- - CreditSale
- - CreditAuth
- - CardToken
- - CreditReturn
- - CreditAdjust
- - CreditCapture (performed after a CreditAuth to capture the authorized amount)
- - CreditVoid (cancels a previously performed transaction such as CreditSale, CreditAuth, CreditCapture, or CreditReturn)
- - CreditSale with Token
- - CreditReturn with Token

Generate Payment Transaction Key (PTK)

Endpoint

POST https://postransactions.com/cnp/getptk.php

Request Headers

Header	Type	Required	Description
apikey	string	Yes	The API key for authenticating the request.

Request Body

Parameter	Type	Required	Description
account	string	Yes	The account associated with the transaction.
transactionid	string	No	The transaction ID (required for creditreturn).
method	string	Yes	The transaction method. Must be one of creditauth, creditsale, cardtoken, or creditreturn.
amount	float	Yes	The transaction amount. Must be greater than or equal to 0.

Sample Request

```
curl -X POST https://postransactions.com/cnp/getptk.php \
-H "Content-Type: application/json" \
-H "apikey: YOUR_API_KEY" \
```

EPS - CONFIDENTIAL

```
-d '{
  "account": "123456789",
  "transactionid": "tx123",
  "method": "creditsale",
  "amount": 100.50,
  "ticketid": "TICK12345",
  "userid": "USER001",
  "paysource": "INTERNET",
  "address": "123 Main Street",
  "zip": "12345",
  "notes": "Payment for invoice #567",
  "tip": 10.00,
  "surcharge": 5.00,
  "responseurl": "https://yourapp.com/response",
  "successurl": "https://yourapp.com/success",
  "failureurl": "https://yourapp.com/failure"
}'
```

Response

```
{
  "success": true,
  "status": 200,
  "message": "PTK generated successfully.",
  "data": {
    "state": "ACTIVE",
    "ptk": "abc123XYZ456"
  }
}

{
  "success": false,
  "status": 422,
  "message": "Card Source is missing!",
  "data": {
    "state": "FAILED",
    "ptk": null
  }
}
```

Get Public API for Merchant Details

Endpoint

POST https://postransactions.com/merchants/merchantdetails

EPS - CONFIDENTIAL

Request Body

Parameter	Type	Required	Description
account	string	Yes	The account number to retrieve merchant details.

Sample Request

```
curl -X POST https://postransactions.com/merchants/merchantdetails \
-H "Content-Type: application/json" \
-d '{
  "account": "1502122693"
}'
```

Response

```
{
  "success": true,
  "status": 200,
  "apikey": "md5apikeyvalue",
  "email": "merchant@example.com",
  "business": "Merchant Business Name",
  "username": "merchantuser",
  "cellphone": "1234567890",
  "authentication": "2FA",
  "account": "1502122693",
  "message": "A valid account and API key was found"
}

{
  "success": false,
  "status": 422,
  "message": "An active account was NOT found!",
  "OptionName": null,
  "OptionValue": null
}
```

Error Codes

Code	Message	Description
422	Account number is required	The account number parameter was missing in the request body.
422	An active account was NOT found!	The account provided is not valid or not active.

EPS - CONFIDENTIAL

Run CreditSale Transaction

Step 1: Generate PTK

Refer to the Generate Payment Transaction Key (PTK) section to create a PTK. Use the generated PTK for the next step.

Step 2: Load Secure Payment Form

GET https://postransactions.com/cnp/cnp?ptk=YOUR_PTK

The PTK is valid for only 15 minutes. Ensure the secure payment form is loaded within this timeframe.

Sample Request

curl -X GET "https://postransactions.com/cnp/cnp?ptk=6Zsmyst3ggcb"

Expected Behavior

The endpoint loads a secure payment form for processing a CreditSale transaction.

Sample Response


```
{
  "TransactionResult": true,
  "PTK": "abc123XYZ456",
  "ResponseMsg": "Approved",
  "ApprovedAmount": 100.50,
  "TransactionID": "1234567890",
  "AuthCode": "654321",
  "Token": "token1234",
  "CardType": "VISA",
  "AccountNum": "**** **** **** 1234",
  "ExpDate": "12/25",
  "TicketId": "TICK12345",
  "UserId": "USER001",
  "ResponseCode": "00",
  "HostCode": "ABCDEF12345",
  "TaskID": "task9876",
  "Timestamp": "2025-01-27T15:30:00Z",
  "AvsResponse": "Y",
  "CvResponse": "M",
  "CommercialCard": true,
  "FirstName": "John",
  "LastName": "Doe",
  "BusinessId": "123456789",
  "UniqueID": "unique1234",
  "IPAddress": "192.168.1.1",
  "TransType": "SALE",
  "Method": "creditsale",
```


EPS - CONFIDENTIAL

"PaySource": "INTERNET",
"CustomerReceipt": "Thank you for your payment.",
"MerchantReceipt": "Payment received.",
"ExtField1": "extra1",
"ExtField2": "extra2",
"ExtField3": "extra3",
"Surcharge": 2.50,
"Notes": "Payment for invoice #567",
"CustomerName": "John Doe",
"TipAmount": 10.00
}

Run CreditAuth Transaction

Step 1: Generate PTK

Refer to the Generate Payment Transaction Key (PTK) section to create a PTK. Use the generated PTK for the next step.

Step 2: Load Secure Payment Form

GET https://postransactions.com/cnp/cnp?ptk=YOUR_PTK

The PTK is valid for only 15 minutes. Ensure the secure payment form is loaded within this timeframe.

Sample Request

curl -X GET "https://postransactions.com/cnp/cnp?ptk=abcd1234PTK"

Sample Response

{
"TransactionResult": true,
"PTK": "abcd1234PTK",
"ResponseMsg": "Authorization Successful",
"ApprovedAmount": 150.00,
"TransactionID": "9876543210",
"AuthCode": "ABC123",
"Token": "token5678",
"CardType": "MASTERCARD",
"AccountNum": "**** **** **** 5678",
"ExpDate": "01/26",
"TicketId": "TICK98765",
"UserId": "USER002",
"ResponseCode": "00",
"HostCode": "HOSTCODE123",
"TaskID": "task54321",
"Timestamp": "2025-01-27T18:00:00Z",
"AvsResponse": "Y",

EPS - CONFIDENTIAL

```
  "CvResponse": "M",
  "CommercialCard": false,
  "FirstName": "Jane",
  "LastName": "Doe",
  "BusinessId": "987654321",
  "UniqueID": "unique5678",
  "IPAddress": "10.0.0.1",
  "TransType": "AUTH",
  "Method": "creditauth",
  "PaySource": "PHONE",
  "CustomerReceipt": "Your authorization is confirmed.",
  "MerchantReceipt": "Authorization recorded.",
  "ExtField1": "field1",
  "ExtField2": "field2",
  "ExtField3": "field3",
  "Surcharge": 0.00,
  "Notes": "Authorization for invoice #789",
  "CustomerName": "Jane Doe",
  "TipAmount": 0.00
}
```


Run CreditReturn Transaction

Step 1: Generate PTK

Refer to the Generate Payment Transaction Key (PTK) section to create a PTK. Use the generated PTK for the next step.

Step 2: Load Secure Payment Form

GET https://postransactions.com/cnp/cnp?ptk=YOUR_PTK

The PTK is valid for only 15 minutes. Ensure the secure payment form is loaded within this timeframe.

Sample Request

curl -X GET "https://postransactions.com/cnp/cnp?ptk=returnPTK123"

Sample Response


```
{
  "TransactionResult": true,
  "PTK": "returnPTK123",
  "ResponseMsg": "Return Successful",
  "ApprovedAmount": 50.00,
  "TransactionID": "5432109876",
  "AuthCode": "RET567",
  "Token": "token4321",
  "CardType": "DISCOVER",
```


EPS - CONFIDENTIAL

```
  "AccountNum": "**** **** **** 4321",
  "ExpDate": "03/27",
  "TicketId": "RET78901",
  "UserId": "USER003",
  "ResponseCode": "00",
  "HostCode": "RET123HOST",
  "TaskID": "task12345",
  "Timestamp": "2025-01-27T20:00:00Z",
  "AvsResponse": "Y",
  "CvResponse": "P",
  "CommercialCard": false,
  "FirstName": "Sam",
  "LastName": "Smith",
  "BusinessId": "654321987",
  "UniqueID": "unique9876",
  "IPAddress": "10.0.0.2",
  "TransType": "RETURN",
  "Method": "creditreturn",
  "PaySource": "INTERNET",
  "CustomerReceipt": "Your return has been processed.",
  "MerchantReceipt": "Return transaction recorded.",
  "ExtField1": "fieldX",
  "ExtField2": "fieldY",
  "ExtField3": "fieldZ",
  "Surcharge": 0.00,
  "Notes": "Return for invoice #123",
  "CustomerName": "Sam Smith",
  "TipAmount": 0.00
}
```


Run CardToken Transaction

Step 1: Generate PTK

Refer to the Generate Payment Transaction Key (PTK) section to create a PTK with the method=cardtoken. Use the generated PTK for the next step.

Step 2: Load Secure Payment Form

GET https://postransactions.com/cnp/cnp?ptk=YOUR_PTK

The PTK is valid for only 15 minutes. Ensure the secure payment form is loaded within this timeframe.

Sample Request

curl -X GET "https://postransactions.com/cnp/cnp?ptk=tokenPTK123"

EPS - CONFIDENTIAL

Sample Response


```
{
  "TransactionResult": true,
  "PTK": "tokenPTK123",
  "ResponseMsg": "Tokenization Successful",
  "TransactionID": "7654321098",
  "AuthCode": "TOKEN123",
  "Token": "encryptedToken123",
  "CardType": "VISA",
  "AccountNum": "**** **** **** 5678",
  "ExpDate": "04/28",
  "TicketId": "TOKEN98765",
  "UserId": "USER004",
  "ResponseCode": "00",
  "HostCode": "TOKENHOST567",
  "TaskID": "task98765",
  "Timestamp": "2025-01-27T22:00:00Z",
  "AvsResponse": "Y",
  "CvResponse": "M",
  "CommercialCard": false,
  "FirstName": "Alice",
  "LastName": "Johnson",
  "BusinessId": "987654321",
  "UniqueID": "uniqueToken8765",
  "IPAddress": "10.0.0.3",
  "TransType": "CARDTOKEN",
  "Method": "cardtoken",
  "PaySource": "MANUAL",
  "CustomerReceipt": "Your card has been tokenized successfully.",
  "MerchantReceipt": "Card tokenization completed.",
  "ExtField1": "fieldAlpha",
  "ExtField2": "fieldBeta",
  "ExtField3": "fieldGamma"
}
```


EPS - CONFIDENTIAL

Direct Transactions (Non-PTK)

Endpoint

POST https://postransactions.com/cnp/request.php

Description

This endpoint handles direct transactions that do not require a PTK. Examples include CreditAdjust, CreditCapture, CreditVoid, CreditSale w/Token, and CreditReturn w/Token.

Supported Methods

- - closebatch: Closes the current batch for the merchant.
- - getbatch: Retrieves batch totals and transaction counts.
- - creditcapture: Captures funds from a previously authorized transaction.
- - creditvoid: Voids a previously processed transaction.
- - creditreturn: Processes a return transaction with or without a token.
- - creditsale: Executes a sale transaction using card token or card details.
- - creditauth: Authorizes funds for a transaction without capturing them.
- - creditadjust: Adjusts the tip amount for a transaction.
- - cardtoken: Retrieves a tokenized version of the card data.
- - payrequest: Creates a payment request link for customers.

Request Headers

Header	Type	Required	Description
apikey	string	Yes	The API key for authenticating the request.

Request Body

The request body varies depending on the method. Below are the common and method-specific parameters:

Parameter	Type	Required	Description
method	string	Yes	The transaction method (e.g., creditsale).
account	string	Yes	The merchant account number.
ticketid	string	Yes	Transaction reference ID (maximum 15 characters).
userid	string	Yes	Operator ID for the transaction.
responseurl	string	No	URL for posting transaction response.
extfield1	string	No	Custom extra field 1.
extfield2	string	No	Custom extra field 2.
extfield3	string	No	Custom extra field 3.

```
curl -X POST https://postransactions.com/cnp/request.php \
-H "Content-Type: application/json" \
-H "apikey: YOUR_API_KEY" \
-d '{
  "method": "creditsale",
  "account": "123456789",
  "ticketid": "TICK12345",
```

EPS - CONFIDENTIAL

```
  "userid": "USER001",
  "amount": 100.50,
  "paysource": "INTERNET",
  "token": "encryptedCardToken123",
  "expirationdate": "1225",
  "responseurl": "https://yourapp.com/response",
  "extfield1": "Custom1",
  "extfield2": "Custom2",
  "extfield3": "Custom3"
}'
```


Response


```
{
  "TransactionResult": true,
  "ResponseMsg": "Transaction Approved",
  "ResponseCode": "00",
  "TransactionID": "987654321",
  "ApprovedAmount": 100.50,
  "AuthCode": "123456",
  "CardType": "VISA",
  "AccountNum": "**** **** **** 1234",
  "Timestamp": "2025-01-27T12:00:00Z",
  "CustomerReceipt": "Customer receipt text...",
  "MerchantReceipt": "Merchant receipt text..."
}
```


Error Codes

Code	Message	Description
422	API KEY missing	The apikey header is not provided.
422	Invalid Method	The method parameter is invalid.
422	Invalid account!	The provided account is not valid.
400	Malformed Request	The request body is missing required fields.

EPS - CONFIDENTIAL