



FIREMAN COURSE MANUAL

Document Information

Last Updated: 14 MAY 2026

CONTENTS

Introduction to FiReMan (File & Resource Management)	2
Introduction	3
Software Components	3
Agile Items	3
Test Set	5
Supported Products	5
Product Test Spec	5
Debug Guide	5
Debug Station Type	6
Debug Station Spec	6
Test Procedure	6
Ref Test Image	7
Test Kit	7
Test Kit Spec	8
Test Equipment	9
Test Equipment Spec	9
Station Type	9
Test Station Spec	10
Test Image	10
Server Share	10
Test Code	11
Test Station	12
Test Station Base	12
Exercise 1	12
Engineering Change Order	17
Lifecycle Phase	17
Preliminary	17
Prototype	17
Active	17
Discontinued	17
Approvers and Observers	17
Change History	18
Exercise 2	18
Exercise 3	20
FiReMan Change Order	21

INTRODUCTION TO FIREMAN (FILE & RESOURCE MANAGEMENT)

INTRODUCTION

FiReMan provides the test development team with a structure to use when creating a test system. Using FiReMan organizes all the parts and information used to create a test system in a single location.

FiReMan also manages test systems that are used by manufacturing. Consolidating all the information used to create a test system in a single location helps the Manufacturing team recreate test systems as they are needed.

SOFTWARE COMPONENTS

FiReMan uses three software programs.

Agile

- Stores documents for procedures, user guides, and specifications.
- Provides a way for users to create and manage part numbers and the relationship between different part numbers.
- Provides a way for users to create and approve change orders.

Perforce

- Stores test code and test frameworks.

Microsoft Outlook

- Email system for NI.

AGILE ITEMS

Agile items identify parts of a test system. Each Agile item gets a unique part number.

Identifying all the parts of a test system allows for easier use of equipment between different product groups and helps the support team repair broken equipment.

There is a structure to how individual Agile items relate to each other. The structure allows for an entire test system to be identified if you know only one part. The following figure shows the relationship between Agile Items.

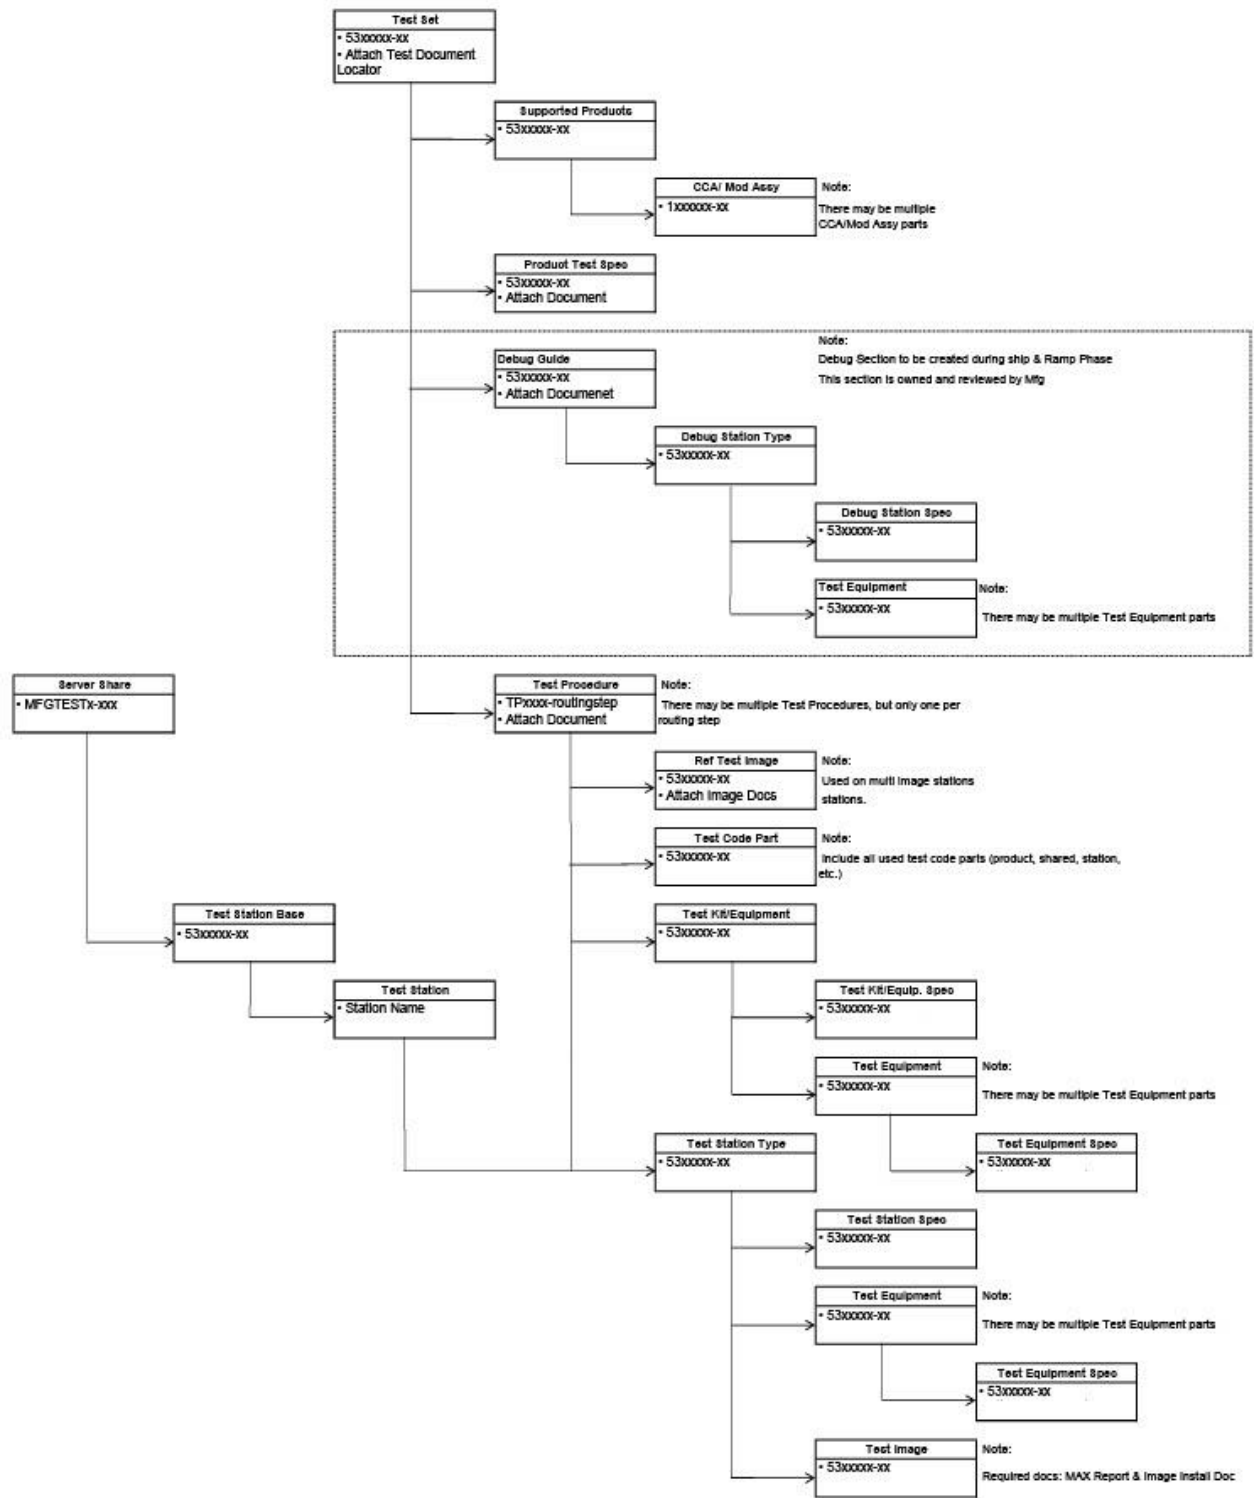


Figure 1:FiReMan Flow Chart

****STOP!!** Before creating any new parts, do a search in ECHO and verify the Manufacturer's part does not already exist!!

TEST SET

Identifies a complete BOM used to test a device.

- **Agile Part Type:** Mfg Test Set
- **Part Number Schema:** 53xxxxx-xx or 54xxxxx-xx
 - **Example:** 531934A-01
- **Item Description Schema:** Test Set for *Device/Family, Additional Information*
 - **Example:** Test Set for PXI-5690, RF
- **Attachment:** [Test Document Locator](#)
 - **File Description:** TDL for *Device/Family, Additional Information*

Note: Products can share a Test Set if they share all the Test Procedures, Debug Guide, Product Test Specification etc.

SUPPORTED PRODUCTS

Connects the Test Set to NI devices.

- **Agile Part Type:** Mfg Test Set
- **Part Number Schema:** 53xxxxx-xx or 54xxxxx-xx
 - **Example:** 531934A-01
- **Item Description Schema:** Supported Products for *Device/Family, Additional Information*
 - **Example:** Supported Products for sbRIO

PRODUCT TEST SPEC

Defines how a product is tested. Attach documents directly in Agile.

- **Agile Part Type:** Mfg Test Documentation
- **Part Number Schema:** 53xxxxx-xx or 54xxxxx-xx
 - **Example:** 533840C-01
- **Item Description Schema:** Product Test Specification for *Device/Family, Additional Information*
 - **Example:** Product Test Specification for SCXI-1120
- **Attachment:**
 - **File Description:** Product Test Specification for *Device/Family, Additional Information, Language*

Note: For source documents that are used to create a PDF file, add “ , *Source*” before “ , *Language*” to the file description.

Tip: The file description matches the item description with the document language added to the end.

DEBUG GUIDE

Defines the troubleshooting guide for a product. Attach documents directly in Agile.

- **Agile Part Type:** Mfg Test Debug Guide
- **Part Number Schema:** 53xxxxx-xx or 54xxxxx-xx
 - **Example:** 533840C-01
- **Item Description Schema:** Debug Guide for *Device/Family, Additional Information*
 - **Example:** Debug Guide for SCXI-1120
- **Attachment:**
 - **File Description—** Debug Guide for *Device/Family, Additional Information, Language*

Note: For source documents that are used to create a PDF file, add “, *Source*” before “, *Language*” to the file description.

Tip: The file description matches the item description with the document language added to the end.

DEBUG STATION TYPE

Defines all test equipment in a Debug station setup. A station type is not an actual test station, but a BOM of all equipment needed to create a test station.

- **Agile Part Type:** Mfg Test Station Type
- **Part Number Schema:** 53xxxxx-xx or 54xxxxx-xx
 - **Example:** 534301B-00
- **Item Description Schema:** Debug Station Type for *Device/Family/Routing, Additional Information*

Example: Debug Station Type for Serial

DEBUG STATION SPEC

Defines the test station hardware. Attach documents directly in Agile.

- **Agile Part Type:** Mfg Test Documentation
- **Part Number Schema:** 53xxxxx-xx or 54xxxxx-xx
 - **Example:** 532554B-01
- **Item Description Schema:** Debug Station Specification for *Device/Family, Additional Information*
 - **Example:** Debug Station Specification for USB M Series
- **Attachment:**
 - **File Description:** Debug Station Specification for *Device/Family/Routing, Additional Information, Language*

Note: For source documents that are used to create a PDF file, add “, *Source*” before “, *Language*” to the file description.

Tip: The file description matches the item description with the document language added to the end.

TEST PROCEDURE

Defines the instructions for testing a product. Attach documents directly in Agile.

- **Agile Part Type:** Mfg Test Procedure
- **Part Number Schema:** TPxxxx-*Routing Step*
 - **Example:** TP1377-FVT, TP1367-HIPOT, TP1354-BURN, TP1273-IFT, TP1919-SNAPP, TP1370-INSP
- **Item Description Schema:** Test Procedure for *Device/Family, Routing Step, Additional Information*
 - **Example:** Test Procedure for PXI-2530, SNAPP
- **Attachment:**
 - **File Description:** Test Procedure for *Device/Family, Routing Step, Additional Information, Language*

Note: For source documents that are used to create a PDF file, add “ , *Source*” before “ , *Language*” to the file description.

Tip: The file description matches the item description with the document language added to the end.

REF TEST IMAGE

Defines an image file used for multi-image test stations.

- **Agile Part Type:** Mfg Test Disk Image
- **Part Number Schema:** 53xxxxx-xx or 54xxxxx-xx
 - **Example:** 535504A-01
- **Item Description Schema:** REF (HOST || DUT) TEST IMAGE FOR [IMAGE APPROPRIATE DESCRIPTION], [TARGET SYSTEM], [WINDOWS VERSION]
 - **Examples:**
 - REF HOST TEST IMAGE FOR NEXT-GEN CHASSIS, PXIE-8880, WIN10 LTSC 2019
 - REF DUT TEST IMAGE FOR VCSEL MU (PXIE-4133), PXIE-8861, WIN10 LTSC 2019
- **Attachment:**
 - **MAX Report**
 - **Software Install Document**
 - **Image Release Checklist**

Notes:

- The Agile Item Description is validated within the Image Release Checklist using the following Regular Expressions:
 - Valid WIN10 LTSC 2019 Agile Description:
 - `^(?:REF )?(?:HOST|DUT) TEST IMAGE FOR (?:., ){2,}WIN10 LTSC 2019$`
 - Valid Non-WIN10 LTSC 2019 Agile Description:
 - `^(?:REF )?(?:HOST|DUT) TEST IMAGE FOR (?:., ){2,}WIN\d{1,2}.*$`
- This type of image is for multi-image test stations only. The image is called out in the test procedure, but the station type should still contain a base image.

TEST KIT

Defines a group of test equipment used to test a device/family. All test equipment contained in a test kit must have an NI or FiReMan part number and be released.

- **Agile Part Type:** Mfg Test Kit
- **Part Number Schema:** 53xxxxx-xx or 54xxxxx-xx
 - **Example:** 536583A-50
- **Item Description Schema:** Test Kit for *Device/Family, Routing Step, Additional Information*
 - **Example:** Test Kit for USB-8451, FVT

Note: You can leave the routing step off the item description if the test kit includes equipment for multiple routing steps.

TEST KIT SPEC

Defines the test kit hardware. Attach documents directly in Agile.

- **Agile Part Type:** Mfg Test Documentation
- **Part Number Schema:** 53xxxxx-xx or 54xxxxx-xx
 - **Example:** 531578A-01
- **Item Description Schema:** Test Kit Specification for *Device/Family, Routing Step, Additional Information*
 - **Example:** Test Kit Specification for USB-8451
- **Attachment:**
 - **File Description:** Test Kit Specification for *Device/Family, Routing Step, Additional Information, Language*

Note: For source documents that are used to create a PDF file, add “ , *Source*” before “ , *Language*” to the file description.

Tip: The file description matches the item description with the document language added to the end.

TEST EQUIPMENT

Defines test equipment that has no existing part number. Enter manufacturer and purchasing information in the Additional Information/Specs field on the Page Two tab.

- **Agile Part Type:** Mfg Test Equipment
- **Part Number Schema:** 53xxxxx-xx or 54xxxxx-xx
 - **Example:** 531124A-01
- **Item Description Schema:** TE, *Equipment Description, Additional Information*
 - **Example:** Test Equipment, DMM, 6 ½, Agilent 34401

Note: All FiReMan test equipment uses the 53xxxxx-xx part number schema. Test equipment using the 16xxxxx-xx part number schema cannot be released using the FiReMan process. Test equipment with a 16xxxxx-xx part number contains an NI fabricated PCB and must be released through the hardware group.

TEST EQUIPMENT SPEC

Defines the test equipment hardware. Attach documents directly in Agile.

- **Agile Part Type:** Mfg Test Documentation
- **Part Number Schema:** 53xxxxx-xx or 54xxxxx-xx
 - **Example:** 531578A-01
- **Item Description Schema:** Test Equipment Specification for *Device/Family, Routing Step, Additional Information*
 - **Example:** Test Equipment Specification for USB-8451
- **Attachment:**
 - **File Description:** Test Equipment Specification for *Device/Family, Routing Step, Additional Information, Language*

Note: For source documents that are used to create a PDF file, add “ , *Source*” before “ , *Language*” to the file description.

Tip: The file description matches the item description with the document language added to the end.

STATION TYPE

Defines all test equipment in a test station. A station type is not an actual test station, but a BOM of all equipment needed to create a test station.

- **Agile Part Type:** Mfg Test Station Type
- **Part Number Schema:** 53xxxxx-xx or 54xxxxx-xx
 - **Example:** 534301B-00
- **Item Description Schema:** Station Type for *Device/Family/Routing, Additional Information*
 - **Example:** Station Type for Serial

TEST STATION SPEC

Defines the test station hardware. Attach documents directly in Agile.

- **Agile Part Type:** Mfg Test Documentation
- **Part Number Schema:** 53xxxxx-xx or 54xxxxx-xx
 - **Example:** 532554B-01
- **Item Description Schema:** Test Station Specification for *Device/Family, Additional Information*
 - **Example:** Test Station Specification for USB M Series
- **Attachment:**
 - **File Description:** Test Station Specification for *Device/Family/Routing, Additional Information, Language*

Note: For source documents that are used to create a PDF file, add “ , *Source*” before “ , *Language*” to the file description.

Tip: The file description matches the item description with the document language added to the end.

TEST IMAGE

Defines image files for a test station.

- **Agile Part Type:** Mfg Test Disk Image
- **Part Number Schema:** 53xxxxx-xx or 54xxxxx-xx
 - **Example:** 530512E-01
- **Item Description Schema:** (HOST || DUT) TEST IMAGE FOR [IMAGE APPROPRIATE DESCRIPTION], [TARGET SYSTEM], [WINDOWS VERSION]
 - **Examples:**
 - HOST TEST IMAGE FOR MXIE CONTROLLERS, PXIE-8105, WINXP 32-BIT
 - DUT TEST IMAGE FOR PXI-1042Q CHASSIS, PXIE-8130, WIN7 32-BIT
- **Attachment:**
 - **MAX Report**
 - **Software Install Document**
 - **Image Release Checklist**
- **Notes:**
 - The Agile Item Description is validated within the Image Release Checklist using the following Regular Expressions:
 - Valid WIN10 LTSC 2019 Agile Description:
 - `^(?:REF )?(?:HOST|DUT) TEST IMAGE FOR (?:.*, ){2,}WIN10 LTSC 2019$`
 - Valid Non-WIN10 LTSC 2019 Agile Description:
 - `^(?:REF )?(?:HOST|DUT) TEST IMAGE FOR (?:.*, ){2,}WIN\d{1,2}.*$`

SERVER SHARE

Defines shared servers on manufacturing servers.

- **Agile Part Type:** Mfg Server Share
- **Part Number Schema:** MFGTESTx-Location
 - **Example:** MFGTESTA-NIC, MFGTESTB-NIH, MFGTESTA-NIJ
- **Item Description Schema:** Server Name, Share Name, Description – Location
 - **Example:** Ntmanbo, MFGTESTA-NIJ, MFG Production Server Share – NIJ

Note: The Test Frameworks team creates all server shares.

TEST CODE

Defines a part that is used to roll out test code.

- **Agile Part Type:** Mfg Test Code
- **Part Number Schema:** 53xxxxx-xx or 54xxxxx-xx
 - **Example:** 537159A-01
- **Item Description Schema:** TEST CODE FOR *Server path (separated by commas)*
 - **Example:** TEST CODE FOR BN, PRODUCTS, CFP CONTROLLERS

Note: All Test Code parts used to test a product at an op. sequence should be included on the BOM of the Test Procedure for that op sequence (e.g. Station Code, Shared Test Code, Product Test Code, JTAG Code, etc.).

TEST STATION

Defines a computer (PC, PXI controller) that tests a specific device/family. Test Station is the only FiReMan item that defines a physical instance of an item.

- **Agile Part Type:** Mfg Test Station
- **Part Number Schema:** [Refer to the station naming guidance](#)
 - **Example:** CRIO0101105NIH, CONT0301104NIH, CONT30110CSC
- **Item Description Schema:** Test Station for *Device/Family/Routing, Motherboard, OS/Multi-Image*
 - **Example:** TEST STATION FOR CRIO, CRIO MODULES, 8109, WIN7
 - **Example:** TEST STATION FOR VST, MODULE RF, PXI-8133, MULTI-IMAGE

TEST STATION BASE

Defines a container part used in the BOM of the server share. All test stations should be added to the test station base.

- **Agile Part Type:** Mfg Test Station Base
- **Part Number Schema:** 53xxxxx-xx or 54xxxxx-xx
 - **Example:** 537358A-01, 537358A-02, 537358A-03, 537358A-04
- **Item Description Schema:** TEST STATION BASE FOR *Server Share – Location*
 - **Example:** TEST STATION BASE FOR MFGTESTA-NIC, TEST STATION BASE FOR MFGTESTA-NIH

Note: The Test Frameworks team creates all test station bases.

EXERCISE 1

Objective: Create a part number in Agile.

1. Click **Create New** -> **Items** -> **Parts** to open the Create New dialog box
2. Select **Mfg <part type>** from the Type control
3. Click the **Number 123** button to create a new part number, but we strongly encourage the use of an existing part number base with a new dash number (see note)

Note: You can type any part number in the Number text box. This is useful for grouping projects under a base part number with varying dash numbers (531946A-01, 531946A-02), and encouraged to keep unique base number generation low (a limited number exist). This can also be used for Test Procedures (TP1050-FVT and TP1050-HIPOT), or for letter revisions (530457A-01 and 530457B-01) etc.

4. Add the dash number (-01, -02, -03 etc.) to the part number in the Number text box
5. Click Save on the Create New dialog box to open the dialog box for the part number created
6. Click in the Product Line box and choose the appropriate product line
7. Select **Each** or **Foot** from the Unit of Measure control, whichever is appropriate
8. Enter the description in the Description text box. The following figure shows a completed Title Block

The screenshot displays the 'Part Number Creation Page 1' interface. At the top, the part number '532337A-01' is shown in the title bar, followed by 'Mfg Test Station Type • STATION TYPE FOR DEMONSTRATION' and 'Preliminary Unincorporated'. Below this, there are controls for 'Site' (set to 'ALL'), 'Rev' (set to 'Introductory'), and 'Effective From' (set to '... to ...'). There are also buttons for 'Navigator' and 'Actions'. A horizontal tab bar contains 'Title Block' (selected), 'Changes', 'BOM', 'Manufacturers', 'Compliance', 'Relationships', 'Where Used', 'Attachments', and 'History'. The main content area is titled 'Page Two | DESIGN SELECTION' and contains the following fields:

- Number: 532337A-01
- Part Type: Mfg Test Station Type
- Lifecycle Phase: Preliminary
- Description: STATION TYPE FOR DEMONSTRATION
- Unit of Measure: Each
- Size: ...
- Product Line: Mfg Test Engineering-Legacy
- Rev Incorp Date:
- Rev Release Date:
- Compliance Calculated Date:
- Overall Compliance:
- Shippable Item: No
- Exclude from Rollup: Yes
- Mass:
- Base Model:

Figure 2: Part Number Creation Page 1

9. Go to the **Page Two/DESIGN** section

10. Using the guidelines detailed below, make an appropriate selection from the Inventory Category and Oracle Template pull-down menus.

Part Type	Part Description	Inventory Category	Oracle Template
Mfg Test Documentation, Mfg Test Install Doc, Mfg Test Procedure, Mfg Test Disk Image, Mfg Test Station Type	Documentation, Ref. Image Station Type	Reference	Reference Item
Mfg Test Station	Test Station	Test Asset In House Assy	Test Asset
Mfg Test Equipment	ITA, Fixture	Test Asset In House Assy	Test Asset
	Connector/Pin/Backshell, VPC Module, Pogo Pins/Sockets	Connector	Test Asset Purchased Item
	3 rd -party Machined Part	Metal Fab	
	Nut, Bolt, Washer, Standoff, Screw, ZipTies, Solder Sleeves,	Hardware	
	Spoiled Cable, Wire, Heatshrink, Expandable Sleeving, Tinned Copper Wire	Raw Cable	
	Finished goods that are used without modification (Wireless Access Point, Hubs, etc...)	Test Equipment Off The Shelf Material	
	Serialized 3 rd -party Instrument (Fluke Calibrator, Keithley, etc...)	Test Equipment Off The Shelf Material	Test Asset Purchased Serial
	Cable Built In-House	Test Asset In House Assy	Test Asset Subassembly
	Custom CCA's (Ex. ITA/Fixture EEPROM's)	Module	

11. Enter the name of the Test Engineer in the Electrical Engineer text box.
12. Enter any extra information in the Additional Information/Specs text box. The following figure shows Page Two. The fields highlighted in the red box will need to be populated (Some examples are shown in the table above).

539555A-09
539555A-09
Mfg Test Equipment • FIREMAN EXAMPLE PART
Preliminary
Unincorporated

Site: ALL Rev: Introductory Effective From: ... to ... Navigator Actions

Title Block Changes BOM Manufacturers Compliance Relationships Where Used Attachments History

Page Two | DESIGN SELECTION | Page Three

Page Two

Inventory Category:

Oracle Template:

Copy From PN:

R&D Support Provided By: Product Development Group

Sourced From:

Customer Facing:

RoHS Compliant?: N/A

PGCR2: Missing Info

REACH:

Packaging Media:

UL/Safety Critical:

Part Classification:

Figure 3: Part Number Creation Page 2

13. Click **Save**
14. Click on the **Manufacturers** tab.
15. Click **Add** and then click **Create to add** (marked with a red arrow in the figure below)

539555A-09
539555A-09
Mfg Test Equipment • FIREMAN EXAMPLE PART
Preliminary
Unincorporated

Site: ALL Rev: Introductory Effective From: ... to ... Navigator Actions

Title Block Changes BOM Manufacturers Compliance Relationships Where Used Attachments History

Manufacturers

Views: Base View * Personalize

Add Remove More Save Cancel

2* Mfr. Name	3* Mfr. Part Number	RoHS Compliant?	PGC RoHS	I/Mfr Status	PSP Status	Mfr. Part Status	MaxReflowTemp(C MaxWaveTemp(C) JESD97

Create to add

Figure 4: Manufacturer's Tab

16. In the pop-up window that appears, fill in the required part information as shown with an asterisk in the figure below. Do not list the distributor or distributor's part number, these fields are for information about manufacturers only.

Note Manufacturer Name can be entered directly or searched for using the search button. If manufacturer does not exist, please contact change control management.

The screenshot shows a web browser window with the URL `agile.natinst.com/Agile/PCMServlet#`. The page title is "Create New" with a subtitle "Mfg Test Equipment • 539555A-09". A yellow banner contains the instruction: "Select the type of Manufacturer Parts to create and complete all required fields. [Help Link](#)".

The form includes the following fields:

- * Type: A dropdown menu currently set to "Manufacturer Part".
- * Manufacturer Name: A text input field with a search icon and a help icon to its right.
- * Number: A text input field.
- Add for Site: A dropdown menu currently set to "Common".

At the bottom right, there are two buttons: "Add" (with a checkmark icon) and "Cancel" (with an 'X' icon).

Figure 5: Add Manufacturer

ENGINEERING CHANGE ORDER

An Engineering Change Order (ECO) allows users to update Agile items. ECOs are used to enforce an approval chain, notify employees of the change, track changes made to items, and update the Lifecycle Phases of items.

LIFECYCLE PHASE

Every Agile item has a Lifecycle Phase. Each Lifecycle Phase helps to identify where and when an item is used.

The four main Lifecycle Phases used in FiReMan are preliminary, prototype, active, and discontinued.

PRELIMINARY

- Development items not ready to be used
- Changes can be made without an ECO

PROTOTYPE

- Development items not ready to be released, but ready to be linked to the structure tree
- Changes are made with an ECO

ACTIVE

- Items ready to be released
- Changes are made with an ECO

DISCONTINUED

- Items out of date, which may still be used, but shouldn't be purchased/built for future test solutions
- An ECO is needed to discontinue items

APPROVERS AND OBSERVERS

Approvers verify and sign off on the ECO. Every ECO should include the following approvers.

- Test Engineer
- Tech Lead
- R&D Hardware Engineer (for limit changes on FCOs)

Observers are added to an ECO to notify them that a change has been made. Every ECO should include the following observers.

- Mfg Test Support - <site affected> (NIC, NIH, PEN, SHA)

Note: The Change Analyst adds the manufacturing test support engineers to each ECO. If you have questions about who should be added as approvers and observers, ask the Change Analyst.

CHANGE HISTORY

You can check the change history for an item by viewing the Changes tab in Agile. All the changes for that item are listed with a description of the change and the approval date.

Changes that have yet to be implemented are under Pending Changes. Implemented changes are under Change History.

EXERCISE 2

Objective: Create an ECO in Agile.

1. Click **Create New -> Changes -> Change Orders** to open the Create New dialog box
2. Select **ECO** from the Type control
3. Click the **123** button to create a new part number
4. Click **Save** to create and open the Cover Page for the number
5. Select **Test Eng Change Analyst** from the Change Analyst pull-down menu
6. Fill in the Product Line(s) field
7. Enter a description of the change in the Summary of What Changed text box
8. Enter a reason for the change in the Reason Why the Change is needed text box
9. In the Additional Info section enter approvers and observers in the Additional Information field (the Change Analyst will add the default for the product line if no notes are added)

Note: When listing more than one approver or observer, separate names using a semi-colon

10. Click the **Save** button

Number: 123716 Status: Unassigned Change Type: ECO Rework?: Summary of What Changed: Creating ECO for testing Reason Why Change is Needed: Demo Change Code: Workflow: Change Analyst: Test Eng Change Analysts Originator: Michael Keigher Date Originated: 10/27/2015 02:51:08 PM CDT Date Released: Final Complete Date: Product Line(s): PXI(e) EC AUS - NPI
Additional Info Arapaho (NIC) Implementation: Fionn (NI) Implementation: Engineer Originating the ECO: Additional Information: Please add approver: Michael Keigher Priority:: Autoimplement on Site:
Costing/Logistics Bonded Inventory Check: Costing Type: Normal Scrap Cost Center(s): Rework Cost Center(s): Manufacturing - 1090 Cost Details: Total Scrap Cost Est.: Total Rework Cost Est.: Total Cost Est.:

Figure 6: ECO Cover Page

11. Click the Affected Items tab
12. Click the **Add** button
13. Enter the desired part number in the input field, repeat as needed
14. Enter the new revision number in the New Rev field (001 for never been released parts)
15. Select the appropriate lifecycle from the New Lifecycle pull-down menu
16. Click in the Effective Date field and click the **Launch Calendar** button, choose today's date

Affected Items

AddRemoveBulk Change ▾More ▾

  Item Number	   UOM	Old Rev	Old Lifecycle	New Rev	New Lifecycle	Effective Date	Description
532337A-01	Each			001	Prerelease	10/27/2015 12:	STATION TYPE FOR DEMONSTRATION

0 of 1 rows selected

Title BlockBOMManufacturersAttachment

Please select one row to perform Redline actions.

Figure 7: Affected Items

- Click the Cover Page tab
- Select FiReMan Assets w/ Rollout and Oracle Integration from the Workflow pull-down menu

Note: Agile automatically populates the Workflow pull-down menu based on affected parts. FiReMan Assets w/ Rollout and Oracle Integration is used for ECOs affecting test kits or disk images.

- Click the **Next Status** button (or use the Workflow tab and click the next status)
- Click **Finish** perform a release audit, and display any errors or warnings, if none are found it will move to submitted

EXERCISE 3

Objective: To redline the BOM of an Agile item in an ECO.

- Click the Affected Items tab
- Highlight the item by clicking the box to the left of the item
- Click the **BOM** tab on the bottom portion of the ECO
- Click the **Add** button
- Enter the desired child part number and press enter
- Double click the Qty field to update to the appropriate number
- Repeat steps 4 through 7 for each item you want to add to the BOM
- Click **Save**

Cover PageAffected ItemsWorkflowAttachmentsHistory

Affected Items

Views:Base ViewPersonalize

AddRemoveBulk ChangeMore

Item NumberUOMOld RevOld LifecycleNew RevNew LifecycleEffective DateDescriptionOn Order

532337A-01Each001Prerelease10/27/2015 12:00:00STATION TYPE FOR DEMONSTRATION--

1 of 1 rows selected

Title BlockBOMManufacturersAttachments

Redlines for 532337A-01

Views:Base ViewPersonalize

AddRemoveUndo RedlinesMore

Item NumberQtyOpSeqItem DescriptionRef DesLifecycle PhaseDesign GuidanceMaturity ScaleRoHS Compliant? REACHPGCR2Excl Item from TypeEngineerFind NumOptional

532337A-2011TE, DEMONSTRATION PRODUCT LINEPreliminaryYesMfg Test E0No

Tip: To delete an item from the BOM, click the tab to the left of the item to highlight that item and click **Remove**

FIREMAN CHANGE ORDER

A FiReMan Change Order (FCO) allows users to update test files including test code and test frameworks. FCOs notify employees of the change, track the changes made to an item, and control changes and updates.

Refer to the FiReMan -FCO User's Guide wiki for detailed instructions on creating and filing FCOs:

https://ni.visualstudio.com/DevCentral/_wiki/wikis/AppCentral.wiki/38629/FiReMan-FCOs