SECI 1013 - DISCRETE STRUCTURE

SECTION 02

SEM I 2023/2024

ASSIGNMENT 4

LECTURER: DR NOORFA HASZLINNA BINTI MUSTAFFA

NAME	MATRIC NUMBER
NUR FIRZANA BINTI BADRUS HISHAM	A23CS0156
DAMIYA AINA BINTI BASIR ABD SHAMMAD	A23CS0220
NURUL ADRIANA BINTI KAMAL JEFRI	A23CS0258

1. not same edge more than once

a) construct the route for the security guard to patrol the entire neighbourhood starting from the guard house, labelled A
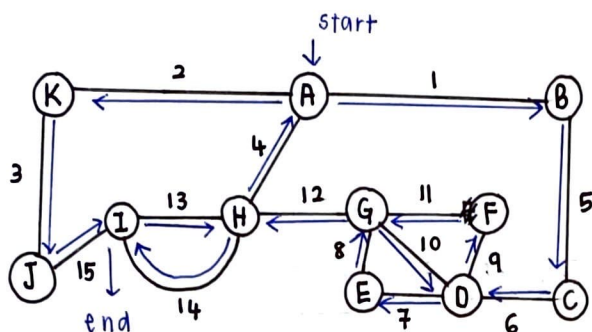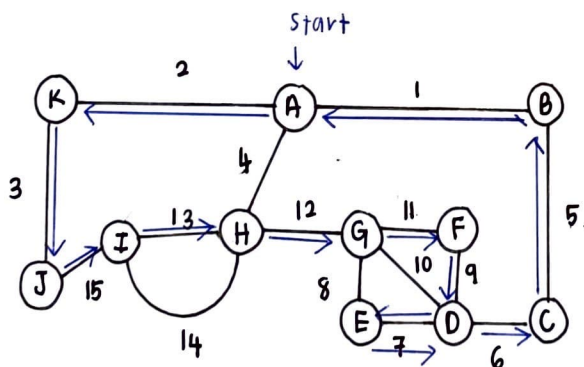

start

~~A,1,B,5,C,6,D,9,F,11,G,10,D,7,E,8,G,12,H,4,A,2,K,3,J,15,~~

(A,1,B,5,C,6,D,9,F,11,G,10,D,7,E,8,G,12,H,14,I,13,H,4,A,2,K,3,J,15,I)

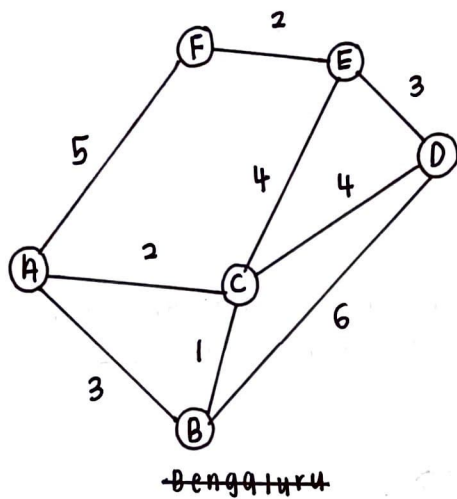No, the guard will not go back to the guard house A because :

- it is Euler trail (it start with A but end with I)
- there is odd degree on vertex I

b) It is not possible because :

- Vertex D is visited twice
- (A,2,K,3,J,15,I,13,H,12,G,11,F,9,D,7,E,7,D,6,C,5,B,1,A)

start

2.

A : Mumbai
B : Bengaluru
C : Hyderbad
D : Kolkata
E : Lucknow
F : New Delhi.

a)

S	N	L(B)	L(A)	L(C)	L(D)	L(E)	L(F)
{∅}	{B,A,C,D,E,F}	∅	∞	∞	∞	∞	∞
{∅,B}	{A,C,D,E,F}		3	1	6	∞	∞
{∅,B,C}	{A,D,E,F}		3		5	5	∞
{∅,B,C,A}	{D,E,F}				5	5	8
{∅,B,C,A,D}	{E,F}					5	8
{∅,B,C,A,D,E}	{F}						7
{∅,B,C,A,D,E,F}	{∅}						7

B ← C ← E ← F

b) shortest path

B ⟶ C ⟶ E ⟶ F

minimum hours to travel :

= 1 + 4 + 2

= 7 hours ✱
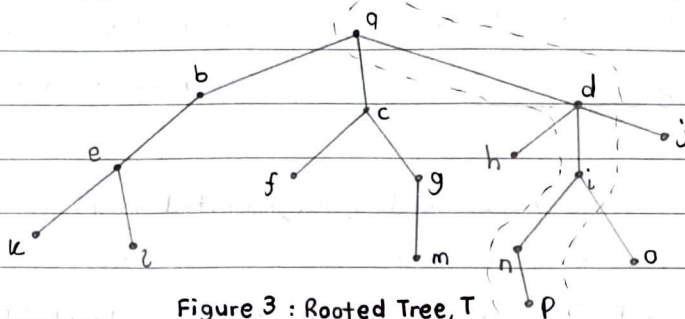
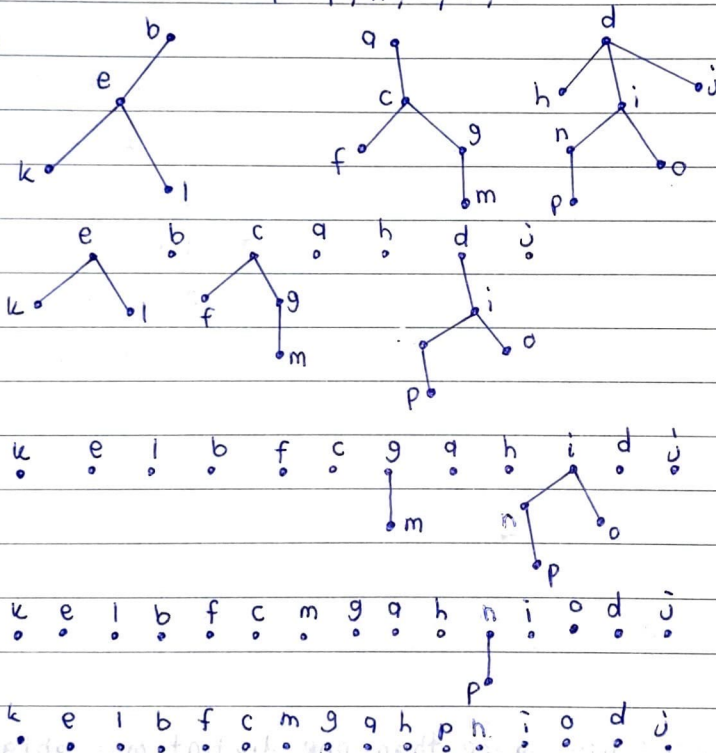3. Consider the rooted tree T shown in Figure 3.

Figure 3 : Rooted Tree, T

a) What are the ancestors of p?
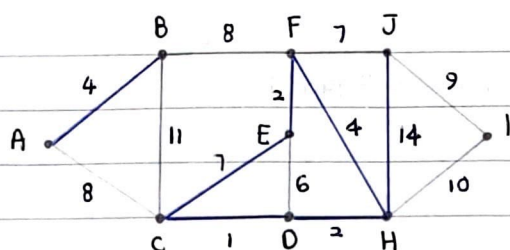
left-root-right

b) Perform inorder traversal.

a) Ancestor of node p : p, n, i, d, a

b)

∴ k, e, l, b, f, c, m, g, a, h, p, n, i, o, d, j

4.

E = length of path in meters

Cost = RM100/meter

Find minimum network needed.

a) Explain why the staff's work which is highlighted is incorrect.

Because it formed a circuit and some path are not connected.

b) Help the staff to find the correct minimum network using Kruskal's algorithm and states its length and total cost.
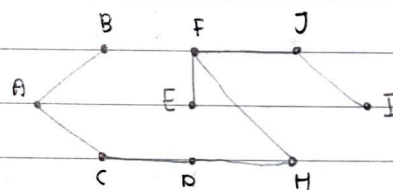
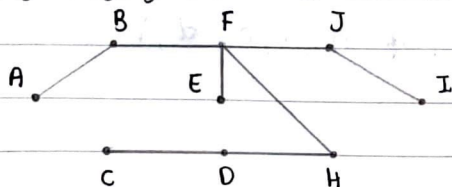|	Edge	Weight	Circuit	Select	
	CD	1	no	yes	✓
	DH	2	no	yes	✓
	FE	2	no	yes	✓
	HF	4	ho	yes	✓
	AB	4	no	yes	✓
	ED	6	yes	no	
✓	EC	7	yes	no	
	FJ	7	no	yes	✓
✓	BF	8	yes	no	
	AC	8	no	yes	✓
	JI	9	no	yes	✓
	IH	10	yes	ho	
	BC	11	yes	no	
	JH	14	yes	no	

$V = 9$

$E = 9-1 = 8$

minimum network
$$= 1 + 2 + 2 + 4 + 4 + 7 + 8 + 9$$
$$= 37$$

Total cost
$$= 100 \times 37$$
$$= RM\ 3700.00$$

= 37 m

c) Is there any possibility, more than one distint MST obtained? If yes, justify your answer and show the network.

= 37 m

5. Construct a state transition diagram of a DFA that accepts all strings over $\{a, b, c\}$ that begin with a, contain exactly two b's and end with c.
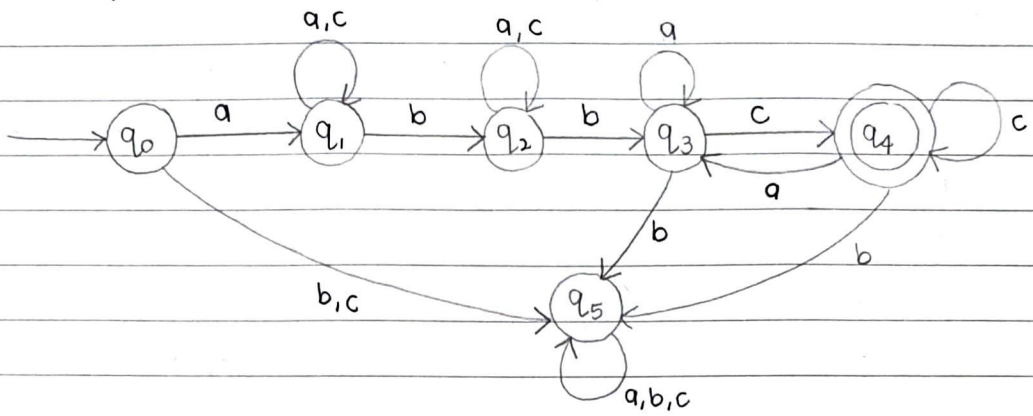
	a	b	c
q_0	q_1	q_5	q_5
q_1	q_1	q_2	q_1
q_2	q_2	q_3	q_2
q_3	q_3	q_5	q_4
q_4	q_3	q_5	q_4
q_5	q_5	q_5	q_5

(6) let $M = \{S, I, w, f_s, F\}$ be the DFA such that $F = \{x, z\}$ and f_s is defined as in

TABLE 1

State	f_s	
	0	1
v	v	y
w	v	y
x	w	x
y	z	x
z	z	w

a] write the set of states and initial state for DFA machine m.

set of states $S = \{v, w, x, y, z\}$

initial state $= \{w\}$
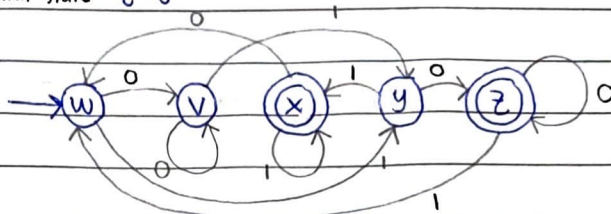
b] determine an input string with length 4 and start with 0 that will be accepted by the machine. Show the sequence of transition of each state for the input string.

$$w \xrightarrow{0} v \xrightarrow{1} y \xrightarrow{1} x \xrightarrow{1} x$$

$$[0111]$$

end at x/z start at v

---

(7) there is a **3**-story elevator that can go to ground floor, floor 1 and floor 2, and there are buttons for each floor. The initial state is the ground floor. The inputs to the elevator are the buttons for the ground, first, and second floor. If the elevator is on the floor 1 and the button for:

- **floor 1** is pressed, nothing happens, and the elevator remains on floor 1.
- **floor 2** is pressed, the elevator goes up until it has reached floor 2.
- **ground floor** is pressed, the elevator goes down until it has reached ground floor.

this situation also applies for elevator that is on floor 2 or ground floor. The FSM has 3 inputs which is for button ground floor is "0", button first is "1", and button second floor is "2". Design the FSM which controls the operation of an elevator in a 3-story building using the transition table.

use $M = \{S, I, O, q_0, f_s, f_o\}$

$I = \{0, 1, 2\}$ — button

$S = \{gf, f1, f2\}$ — floor

$q_0 = gf$ — initial state

let a = remain, b = goes up } goes down = c,

$O = \{a, b, c\}$ — output

	0	1	2	0	1	2
gf	gf	f1	f2	a	b	b
f1	gf	f1	f2	c	a	b
f2	gf	f1	f2	c	c	a