

WEB SERVICES

Commands manual
for 3rd generation fiscal devices

CUSTOM

CUSTOM S.p.A.
Via Berettine 2/B
43010 Fontevivo (PARMA) - Italy
Tel. : +39 0521-680111
Fax : +39 0521-610701
[http: www.custom.biz](http://www.custom.biz)

Customer Service Department:
www.custom4u.it

© 2025 CUSTOM S.p.A. – Italy.

All rights reserved. Total or partial reproduction of this manual in whatever form, whether by printed or electronic means, is forbidden. While guaranteeing that the information contained in it has been carefully checked, CUSTOM S.p.A. and other entities utilized in the realization of this manual bear no responsibility for how the manual is used.

Information regarding any errors found in it or suggestions on how it could be improved are appreciated. Since products are subject to continuous check and improvement, CUSTOM S.p.A. reserves the right to make changes in information contained in this manual without prior notification.

The pre-installed multimedia contents are protected from Copyright CUSTOM S.p.A. Other company and product names mentioned herein may be trademarks of their respective companies. Mention of third-party products is for informational purposes only and constitutes neither an endorsement nor a recommendation. CUSTOM S.p.A. assumes no responsibility with regard to the performance or use of these products.

TABLE OF CONTENTS

DOCUMENT REVISIONS

INTRODUCTION

Request file	14
Fiscal receipt	15
<printerFiscalReceipt>	
Non-fiscal receipt	17
<printerNotFiscal>	
Report	18
<printerFiscalReport>	
Command	19
<printerCommand>	
Fiscal document	21
<printerFiscalDocument>	
Response file	25

MODEL IDENTIFICATION

NON-COMPLIANT STRUCTURES

XML TAGS

beginFiscalDocument	33
Opening the tax document (fiscal invoice or credit note)	
beginFiscalReceipt	34
Opening the fiscal receipt	

beginNotFiscal	35
Opening the non-fiscal receipt	
beginRtDocAnnulment	36
Opening the telematic annulment document	
beginRtDocAnnulmentSpecial	37
Annulment of a receipt not present on the device	
beginRtDocRefund	38
Opening the telematic return document	
beginRtDocRefundSpecial	39
Returning a receipt of a different device	
beginTraining	40
Enabling the training mode	
clearText	41
Deleting the display content	
conFwUpgrade	42
Confirming or rejecting firmware upload request	
deleteBitmap	43
Deleting a bitmap from terminal	
deleteDematerialized	44
Deleting the file indicated in the "file" attribute	
dematerializedOn	45
Setting the next fiscal receipt as dematerialized	
dematerializedOff	46
Disabling a previous dematerialized receipt command	
directIO	47
Sending CUSTOM protocol command	
displayText	48
Writing text on the display	
endFiscalReceipt	49
End of a receipt or a fiscal document	
endFiscalReceiptCut	50
Closing a fiscal receipt or a fiscal document and performs the paper cut	
endNotFiscal	51
Closing a non-fiscal receipt	
endTraining	52
Disabling training mode	
exportLottTickets	53
Exporting of unsent lottery files	

feed	54
Paper feed	
fixedLines	55
Adding fixed lines to the receipt	
forceDematerialized	56
Forcing the conversion of dematerialized receipts	
getBusyStatus	57
Checking the busy status of the device	
getCurrentAtecoCode	59
Reading the active ATECO code for the current receipt	
getDailyTotals	60
Reading daily counters and VAT totalizers	
getDateTime	62
Getting date and time	
getDematerialized	63
Acquiring the number of dematerialized receipts to be processed	
getDocumentFromEj	64
Getting a document from EJ	
getFullRTStatus	65
Getting the extended machine state from XML	
getHeaderLine	67
Getting the requested header line	
getHeaderLineCount	68
Getting the header lines number	
getInfo	69
Getting the printed information	
getRecTotal	70
Getting receipt totals	
getVatRate	71
Getting a VAT value from the VAT table	
getVatTotalsOnDemand	72
Getting VAT totals in a single XML command	
getZReports	75
Getting links to download the Z Report XML files	
getZTransmissionID	76
Getting the status and the transmission ID of the Z report	
loadBitmap	77
Loading an image on the device	

<code>openDrawer</code>	78
Opening the cash drawer	
<code>partialCut</code>	79
Receipt ejection with partial cutting	
<code>printBarCode</code>	80
Printing a barcode	
<code>printBarCodeTrailer</code>	81
Printing a barcode at the bottom of the receipt	
<code>printBitmapTrailer</code>	82
Printing a graphic image at the bottom of the receipt	
<code>printDuplicateReceipt</code>	83
Printing a copy of the receipt or of the fiscal document	
<code>printGraphicCoupon</code>	84
Printing a graphic image	
<code>printNormal</code>	85
Printing a line of text on fiscal receipt	
<code>printNotFiscalHeader</code>	86
Printing the header of the non-fiscal receipt	
<code>printRecAdvancePayments</code>	87
Printing of the deposit amount previously paid	
<code>printRecGift</code>	88
Gift	
<code>printRecItem</code>	89
Item sale	
<code>printRecItemAdjustment</code>	90
Discount/markup on item	
<code>printRecItemAdjustmentVoid</code>	91
Item discount/markup void	
<code>printRecItemVoid</code>	92
Item sale void	
<code>printRecMessage</code>	93
Adding a line or a description	
<code>printRecRefund</code>	94
Goods return	
<code>printRecRefundVoid</code>	95
Cancelling return of goods	
<code>printRecSubtotal</code>	96
Printing subtotal	

<code>printRecSubtotalAdjustment</code>	97
Discount/markup on subtotal	
<code>printRecSubtotalAdjustVoid</code>	98
Discount/markup on subtotal void	
<code>printRecTotal</code>	99
Payments	
<code>printRecVoid</code>	100
Fiscal receipt void	
<code>printRowTrailer</code>	101
Printing a line of text at the bottom of the receipt (trailer)	
<code>printTotalRoundingMarkup</code>	102
Rounding of the total performed by command and not automatically by the device	
<code>printXReport</code>	103
X Report	
<code>printXZReport</code>	104
X Report and Z Report	
<code>printZReport</code>	105
Z Report	
<code>progSingleAtecoCode</code>	106
Writing of an ATECO code in the programming slots	
<code>queryPrinterStatus</code>	107
Getting the printer status	
<code>readSingleAtecoCode</code>	110
Reading of a programmed ATECO code	
<code>resetPrinter</code>	111
Fiscal receipt reset	
<code>setCurrentAtecoCode</code>	112
Setting the ATECO code for the current receipt	
<code>setDateTime</code>	113
Setting date and time	
<code>setHeaderLine</code>	114
Setting header lines	
<code>setLotteryCode</code>	115
Setting lottery code in the receipt	
<code>setVatRate</code>	116
Setting VAT rate values	

EXAMPLES

Commands 117

Fiscal document 117

Fiscal receipt 119

Non-fiscal receipt 120

Report 121



DOCUMENT REVISIONS

REV.	DATE	DESCRIPTION
1.00	27/03/2023	First issue.
1.10	04/05/2023	Added following new commands: dematerializedOn, dematerializedOff, getDematerialized, deleteDematerialized, forceDematerialized, fixedLines, getBusyStatus. Some minor improvements.
1.20	02/08/2023	Added device model KUBEX-N RT. Fixed errors in: getDailyTotals, progSingleAtecoCode, fixedLines. Some minor improvements.
1.30	27/08/2024	Fixed errors in Response file. Some minor improvements. Updated the models list in Model Identification table.
2.00	10/11/2025	New graphic layout. Added following new commands: getFullRTStatus, getVatTotalsOnDemand, lastRawCommand (directIO command update). "Response file" paragraph updated.





INTRODUCTION

The fiscal XML protocol is a set of commands that defines the main fiscal functions in the XML language. It allows you to manage different types of documents, such as receipt, invoice, credit note and non-fiscal document, some reports and also device diagnostics. A request is made to the Internet resource by calling the `GetResponse` method on the `WebRequest`. The `GetResponse` method constructs the protocol-specific request from the `WebRequest` properties, establishes the TCP socket connection to the server, and sends the request. For requests that send data to the server, such as HTTP Post requests, the `WebRequest.GetResponseStream` method provides a network stream to send the data to.

The following example shows how to send data to a web server and read the data in its response:

```
// Creating a request using a URL that can receive a post.
WebRequest request = WebRequest.Create("http://" + textBoxIP.Text + "/xml/printer.htm");

// Setting the Method property of the request to POST.
request.Method = "POST";

// Creating POST data and converting it to a byte array.
string postData = "This is a test that posts this string to a Web server.";
byte[] byteArray = Encoding.UTF8.GetBytes(postData);

// Setting the ContentType property of the WebRequest.
request.ContentType = "text/plain";

// Setting the ContentLength property of the WebRequest.
request.ContentLength = byteArray.Length;

// Getting the flow of requests.
Stream dataStream = request.GetRequestStream();

// Writing data to the request stream.
dataStream.Write(byteArray, 0, byteArray.Length);

// Close the Stream object.
dataStream.Close();

// Get the answer.
WebResponse response = request.GetResponse();
```

Acronyms

The following table shows an exhaustive list of terms and their respective acronyms useful for a correct understanding of the contents presented in this document.

TERMS	ACRONYM
Telematic cash register	TCR
Electronic journal	EJ
Fiscal memory	FM



Request file

The XML structure of the request file must start with one of the following root elements.

ROOT ITEMS TAG NAME	
printerFiscalReceipt	Fiscal receipt
printerFiscalReport	Report
Daily closure (X and Z reports) printerNotFiscal	Non-fiscal receipt
printerFiscalDocument	Fiscal document (fiscal invoice, credit note)
printerCommand	Command

Root elements have only tags with no attributes.

The last line of the file must contain the close statement of the root element. For example: </printerFiscalReceipt>.

Each root element type can take advantage of a set of tag sub-elements, some of which are required to build a valid request file, as following explained.



Fiscal receipt

<printerFiscalReceipt>

SUB ELEMENTS TAG	DESCRIPTIONS
"beginFiscalReceipt"	Opening the fiscal receipt
"beginRtDocRefund"	Opening the telematic return document
"beginRtDocAnnulment"	Opening the telematic cancellation document
"beginRtDocRefundSpecial"	Returning of a receipt not present on the device
"beginRtDocAnnulmentSpecial"	Canceling a receipt not present on the device
"clearText"	Removing text from display
"dematerializedOn"	Setting the next fiscal receipt as dematerialized
"dematerializedOff"	Disabling a previous dematerialized receipt command
"directIO"	Sending CUSTOM protocol command
"displayText"	Writing text on display
"endFiscalReceipt"	End of fiscal receipt or fiscal document
"endFiscalReceiptCut"	End of fiscal receipt or fiscal document with cutting
"feed"	Paper feed
"fixedLines"	Adding fixed lines to the receipt
"getCurrentAtecoCode"	Reading the active ATECO code for the current receipt
"getRecTotal"	Acquiring the total of the fiscal receipt
"openDrawer"	Cash drawer opening
"partialCut"	Receipt ejection with partial cutting
"printBarCode"	Printing the barcode
"printBarCodeTrailer"	Printing barcode at the bottom of the receipt
"printBitmapTrailer"	Printing graphic image at the bottom of the receipt
"printDuplicateReceipt"	Fiscal receipt copy
"printGraphicCoupon"	Printing graphic image
"printRecAdvancePayments"	Amount of the deposit previously paid
"printRecGift"	Gift
"printRecItem"	Sale of items
"printRecItemAdjustment"	Discount/markup on item
"printRecItemAdjustmentVoid"	Cancellation of discount/markup on item



SUB ELEMENTS TAG	DESCRIPTIONS
"printRecItemVoid"	Cancellation of the sale of articles
"printRecMessage"	Additional description line
"printRecRefund"	Goods return
"printRecRefundVoid"	Goods return cancellation
"printRecSubtotal"	Printing subtotal
"printRecSubtotalAdjustment"	Discount/markup on subtotal
"printRecSubtotalAdjustVoid"	Cancellation of discount/markup on subtotal
"printRecTotal"	Payment
"printRecVoid"	Fiscal receipt cancellation
"printRowTrailer"	Printing text at the bottom of the receipt
"printTotalRoundingMarkup"	Rounding of the total done by the command and not automatically by the device
"setCurrentAtecoCode"	Setting the ATECO code for the current receipt
"setLotteryCode"	Entering the lottery code in the receipt

STRUCTURE

- The fiscal receipt must have the following structure:

```
<printerFiscalReceipt>  
  <beginFiscalReceipt></beginFiscalReceipt>  
    Sale(s)  
    Payment(s)  
  <endFiscalReceipt></endFiscalReceipt>  
</printerFiscalReceipt>
```

or

```
<printerFiscalReceipt>  
  <beginFiscalReceipt></beginFiscalReceipt>  
    Sale(s)  
    Payment(s)  
  <endFiscalReceiptCut></endFiscalReceiptCut>  
</printerFiscalReceipt>
```

- Each fiscal receipt must satisfy the following conditions:

1. must be opened with beginFiscalReceipt, beginRTDocRefund or beginRtDocAnnulment tag subelement
2. must include at least one sales line
3. the total amount of the receipt cannot be negative
4. must be closed with the endFiscalReceipt or endFiscalReceipCut tag subelement

- Replies are sent by the fiscal device after "endFiscalReceipt" or "endFiscalReceiptCut" have been processed.
- See example on page 119.



Non-fiscal receipt

<printerNotFiscal>

SUB ELEMENTS TAG	DESCRIPTIONS
"beginNotFiscal"	Opening the non-fiscal receipt
"clearText"	Removing text from display
"directIO"	Sending CUSTOM protocol command
"displayText"	Writing text on display
"endNotFiscal"	End of the non-fiscal receipt
"feed"	Paper feed
"openDrawer"	Cash drawer opening
"printBarCode"	Printing the barcode
"printGraphicCoupon"	Printing graphic image
"printNormal"	Writing line of text
"printNotFiscalHeader"	Printing receipt header

STRUCTURE

- The non-fiscal receipt must have the following structure:

```
<printerNotFiscal>  
  <beginNotFiscal></beginNotFiscal>  
    Text  
    barcode, direct IO, logos (optionals)  
  <endNotFiscal></endNotFiscal>  
</printerNotFiscal>
```

- A non-fiscal receipt must be opened with the beginNotFiscal tag subelement and must be closed with the endNotFiscal tag subelement.
- Responses are sent to the fiscal device after "endNotFiscal" has been processed.
- See example on page 120.



Report

<printerFiscalReport>

SUB ELEMENTS TAG	DESCRIPTIONS
"clearText"	Removing text from display
"directIO"	Sending CUSTOM protocol command
"displayText"	Writing text on display
"feed"	Paper feed
"getZTransmissionID"	Getting the status and transmission ID of a Z report
"openDrawer"	Cash drawer opening
"printXReport"	X Report
"printXZReport"	X Report and Z report
"printZReport"	Z Report

STRUCTURE

- It must respect the following structure.
- To print a daily fiscal closing (Z report), a daily report (X report) or both one after the other:

```
<printerFiscalReport>  
  <Print Report>  
</printerFiscalReport>
```

- The command response comes immediately.
- Only one tag sub-element can be used for each request.
- See example on page 121.



Command

<printerCommand>

SUB ELEMENTS TAG	DESCRIPTIONS
"clearText"	Removing text from display
"conFwUpgrade"	Confirm or reject firmware upload request
"deleteBitmap"	Deleting a bitmap from the terminal
"deleteDematerialized"	Deleting the file indicated in the "file" attribute
"dematerializedOn"	Setting the next fiscal receipt as dematerialized
"dematerializedOff"	Disabling a previous dematerialized receipt command
"directIO"	Sending CUSTOM protocol command
"displayText"	Writing text on display
"exportLottTickets"	Exporting unsent lottery files
"feed"	Paper feed
"forceDematerialized"	Forcing the conversion of dematerialized receipts
"getBusyStatus"	Checking the busy status of the device
"getCurrentAtecoCode"	Reading of the active ATECO code for the current receipt
"getDailyTotals"	Reading of daily counters and VAT totalizers
"getDateTime"	Getting date and time
"getDematerialized"	Acquiring the number of dematerialized receipts to be processed
"getDocumentFromEj"	Getting a document from the EJ
"getFullRTStatus"	Getting the extended machine state from XML
"getHeaderLine"	Getting requested header lines
"getHeaderLineCount"	Getting number of header lines
"getInfo"	Getting device information
"getVatRate"	Getting single value of the VAT table
"getVatTotalsOnDemand"	Getting VAT totals in a single XML command
"getZReports"	Acquiring links to download the Z Report XML files
"loadBitmap"	Loading an image on the printer after transformation (decoding) in 64 format using a suitable decoder
"openDrawer"	Cash drawer opening
"progSingleAtecoCode"	Writing of an ATECO code in the programming slots
"queryPrinterStatus"	Getting printer status



SUB ELEMENTS TAG	DESCRIPTIONS
"readSingleAtecoCode"	Reading of a programmed ATECO code
"resetPrinter"	Fiscal receipt reset
"setCurrentAtecoCode"	Setting the ATECO code for the current receipt
"setDateTime"	Setting date and time
"setHeaderLine"	Setting number of header lines
"setVatRate"	Setting the values of the VAT table

STRUCTURE

- The following structure allows you to extract diagnostic/administrative information from the fiscal device as well as perform a reset.

```
<printerCommand>  
    command  
</printerCommand>
```

- The command response comes immediately.
- Only one tag sub-element can be used for each request.
- See example on page 117.



Fiscal document

<printerFiscalDocument>

The XML structure depends on the type of document: fiscal invoice and credit note.

Fiscal invoice

SUB ELEMENTS TAG	DESCRIPTIONS
"beginFiscalDocument"	Fiscal invoice opening
"clearText"	Removing text from display
"directIO"	Sending CUSTOM protocol command
"displayText"	Writing text on the display
"endFiscalReceipt"	End of fiscal receipt or fiscal document
"endFiscalReceiptCut"	End of fiscal receipt or fiscal document with cutting
"feed"	Paper feed
"getCurrentAtecoCode"	Reading the active ATECO code for the current receipt
"getRecTotal"	Getting the total of the fiscal receipt
"openDrawer"	Cash drawer opening
"printBarCode"	Printing the barcode
"printBarCodeTrailer"	Printing a barcode at the bottom of the receipt
"printDuplicateReceipt"	Fiscal receipt copy
"printRecItem"	Items sold
"printRecItemAdjustment"	Discount/markup on item
"printRecItemAdjustmentVoid"	Cancellation of discount/markup on item
"printRecItemVoid"	Cancellation of sold items
"printRecMessage"	Additional line or description
"printRecRefund"	Goods return
"printRecRefundVoid"	Cancellation of goods return
"printRecSubtotal"	Printing subtotal
"printRecSubtotalAdjustment"	Discount/markup on subtotal
"printRecSubtotalAdjustVoid"	Cancellation of discount/markup on subtotal
"printRecTotal"	Payment
"printRecVoid"	Fiscal receipt cancellation
"printRowTrailer"	Printing graphic image



SUB ELEMENTS TAG	DESCRIPTIONS
"printTotalRoundingMarkup"	Rounding of the total done by the command and not automatically by the device
"setCurrentAtecoCode"	Setting the ATECO code for the current receipt

STRUCTURE

```
<printerFiscalDocument>  
  <beginFiscalDocument documentType="" documentNumber=""></beginFiscalDocument>  
    Sale(s)  
    Payment(s)  
  <endFiscalReceiptCut></endFiscalReceiptCut>  
</printerFiscalDocument>
```

- The fiscal invoice must be opened with the "beginFiscalDocument" tag sub-element and must be closed with the "endFiscalReceipt" or "endFiscalReceiptCut" tag sub-element.
- Responses are sent from the fiscal device after "endFiscalReceipt" or "endFiscalReceiptCut" have been processed.
- See example on page 117.



Credit note

SUB ELEMENTS TAG	DESCRIPTIONS
"beginFiscalDocument"	Fiscal invoice opening
"clearText"	Removing text from display
"directIO"	Sending CUSTOM protocol command
"displayText"	Writing text on the display
"endFiscalReceipt"	End of fiscal receipt or fiscal document
"endFiscalReceiptCut"	End of fiscal receipt or fiscal document with cutting
"feed"	Paper feed
"getCurrentAtecoCode"	Reading the active ATECO code for the current receipt
"getRecTotal"	Getting the total of the fiscal receipt
"openDrawer"	Cash drawer opening
"printBarCode"	Printing the barcode
"printDuplicateReceipt"	Fiscal receipt copy
"printRecItem"	Items sold
"printRecItemAdjustment"	Discount/markup on item
"printRecItemAdjustmentVoid"	Cancellation of discount/markup on item
"printRecItemVoid"	Cancellation of sold items
"printRecMessage"	Additional line or description
"printRecRefund"	Goods return
"printRecRefundVoid"	Cancellation of goods return
"printRecSubtotal"	Printing subtotal
"printRecSubtotalAdjustment"	Discount/markup on subtotal
"printRecSubtotalAdjustVoid"	Cancellation of discount/markup on subtotal
"printRecTotal"	Payment
"printRecVoid"	Fiscal receipt cancellation
"printRowTrailer"	Printing graphic image
"printTotalRoundingMarkup"	Rounding of the total done by the command and not automatically by the device
"setCurrentAtecoCode"	Setting the ATECO code for the current receipt



STRUCTURE

```
<printerFiscalDocument>  
  <beginFiscalDocument documentType="" documentNumber=""></beginFiscalDocument>  
    Sale(s)  
    Payment(s)  
  <endFiscalReceiptCut></endFiscalReceiptCut>  
</printerFiscalDocument>
```

- The fiscal invoice must be opened with the "beginFiscalDocument" tag sub-element and must be closed with the "endFiscalReceipt" or "endFiscalReceiptCut" tag sub-element.
- Responses are sent from the fiscal device after "endFiscalReceipt" or "endFiscalReceiptCut" have been processed.
- See example on page 117.



Response file

Responses always contain the following default structure; each XML node in the request can contain an extra attribute `IdCmd` = "max. 36-byte alphanumeric ID"; if the `IdCmd` attribute is used at least once, all subsequent responses will always have the `lastIdCmd` node with the last alphanumeric value indicated and the last value of the command string in the tag field.

STRUCTURE

```
<?xml version="1.0" encoding="utf-8"?>
<response success="" status="">
  <addInfo>
    <elementList>Tag1 value</elementList>
    <lastDocument>Tag2 value</lastDocument>
    <vatTotals>Tag3 value</vatTotals>
    <lastIdCmd IdCmd=""> Tag9 value</lastIdCmd>
    <responseBuf>Tag7 value</responseBuf>
    <lastCommand>Tag4 value</lastCommand>
    <lastRawCommand>Tag5</lastRawCommand>
    <dateTime>Tag8 value</dateTime>
    <printerStatus>Tag6 value</printerStatus>
    <fpStatus>Tag13 value</fpStatus>
    <receiptStep>Tag14 value</receiptStep>
    <nClose>Tag10 value</nClose>
    <fiscalDoc>Tag11 value</fiscalDoc>
    <notFiscalDoc>Tag12 value</notFiscalDoc>
  </addInfo>
</response>
```

NOTE:

For the "[queryPrinterStatus](#)" command only the structure introduces two more attributes (`cpuRel` and `mfStatus`, see page 107).

Where:

TAG	SEQUENCE	DESCRIPTION
response	OPEN TAG	
success	ATTRIBUTE 1	True/false if the error occurred/not occurred
status	ATTRIBUTE 2	Error code if present, otherwise 0
addInfo	OPEN SUB-TAG	
elementList	OPEN SUB-TAG1	
	TAG1 VALUE	e.g. lastCommand, printerStatus
/elementList	CLOSE SUB-TAG1	It contains all the elements that will be present in the response



lastDocument	OPEN SUB TAG2	
	TAG2 VALUE	Shows the last receipt processed. Where: ▪ <number> = receipt number ▪ <dateTime> = date and time in format yyyy-mm-ddThh:mm:ss ▪ <total> = receipt total ▪ <flagDocCanc> = 0: receipt closed correctly 1: receipt cancelled It is present only in response to the command <code>getVatTotalsOnDemand</code>.
vatTotals	OPEN SUB TAG3	
	TAG3 VALUE	Shows all the VATs. Where: ▪ <rate> = percentage of required VAT index ▪ <gross> = total gross amount for required VAT index ▪ <taxable> = total taxable amount for required VAT index ▪ <tax> = total tax amount for required VAT index It is present only in response to the command <code>getVatTotalsOnDemand</code>.
/vatTotals	CLOSE SUB-TAG3	
lastCommand	OPEN SUB-TAG4	
	TAG4 VALUE	Tag of the last command processed
/lastCommand	CLOSE SUB-TAG4	
lastRawCommand	OPEN SUB TAG5	
	TAG5 VALUE	Shows the last directIO command processed. It is present only if the command sent is of "directIO" type.
/lastRawCommand	CLOSE SUB-TAG5	
printerStatus	OPEN SUB-TAG6	
	TAG6 VALUE	S1S2S3S4S5 where: S1 = paper compartment cover open [0/1] S2 = end of paper [0/1] S3 = near end paper [0/1] S4 = EJ full [0/1] S5 = EJ almost full [0/1]
/printerStatus	CLOSE SUB-TAG6	
responseBuf	OPEN SUB TAG7	
	TAG7 VALUE	Response of the last command processed, if any (e.g. "beginRtDocRefund")
/responseBuf	CLOSE SUB-TAG7	



dateTime	OPEN SUB TAG8	
	TAG8 VALUE	Current date and time
/dateTime	CLOSE SUB TAG8	
lastIdCmd	OPEN SUB TAG9	IdCmd = last ID sent
	TAG9 VALUE	Last command sent
/lastIdCmd	CLOSE SUB TAG9	
nClose	OPEN SUB TAG10	IdCmd = last ID sent
	TAG10 VALUE	Zeros number in the receipt, if any
/nClose	CLOSE SUB TAG10	
fiscalDoc	OPEN SUB TAG11	
	TAG11 VALUE	Fiscal receipt number, if any
/fiscalDoc	CLOSE SUB TAG11	
notFiscalDoc	OPEN SUB TAG12	
	TAG12 VALUE	Non-fiscal receipt number, if any
/notFiscalDoc	CLOSE SUB TAG12	
fpStatus	OPEN SUB TAG13	
	TAG13 VALUE	X1X2X3 where: 000 = no receipt in progress 100 = fiscal receipt open 010 = non-fiscal receipt open 001 = invoice open
/fpStatus	CLOSE SUB TAG13	
receiptStep	OPEN SUB TAG14	
	TAG14 VALUE	Indicate the steps of the receipt: 0 = sale concluded 1 = sale in progress 2 = payments in progress 3 = print of the remainder 4 = print fixed line (optional) 5 = closing done 6 = print courtesy message (optional) 7 = eject done 8 = non-fiscal receipt open
/receiptStep	CLOSE SUB TAG14	
/addInfo	CLOSE SUB-TAG	
/response	CLOSE TAG	



For example, in case of no errors:

```
<?xml version="1.0" encoding="utf-8"?>
<response success="true" status= 0>
  <addInfo>
    <elementList>lastCommand,printerStatus</elementList>
    <lastCommand>endFiscalReceipt</lastCommand>
    <printerStatus>00000</printerStatus>
  </addInfo>
</response>
```



MODEL IDENTIFICATION

3 rd GENERATION DEVICES
JSMART RT
JSMART-N RT
BIG PLUS RT
BIG PLUS-N RT
K3-F RT
K3-N RT
Q3X-F RT
Q3X-N RT
KUBEX-F RT
KUBEX-N RT
VKP80III-F RT
P3-N RT
FUSION-K
FUSION-N
EDGE-N / EDGE-N+





NON-COMPLIANT STRUCTURES

Failure to comply with the structure can have unexpected results. The common mistakes are:

`</endFiscalReceipt>` missing: the receipt keeps open and the receipt must be cancelled.

No payment in the fiscal receipt: "endFiscalReceipt" will return an error in the response file.

`</printerFiscalReceipt>` missing: a parser error is returned immediately.

Bad attribute value: device processes and prints up to the sub-element with the error, after which the device will return an error in the response file.





XML TAGS

beginFiscalDocument

Opening the tax document (fiscal invoice or credit note)

Command:

```
<beginFiscalDocument documentType="" documentNumber=""> </beginFiscalDocument>
```

Where:

TAG	SEQUENCE	DESCRIPTION
beginFiscalDocument	OPEN TAG	
documentType	ATTRIBUTE 1	Document type: directInvoice = to open a fiscal invoice notacredito = to open a credit note
documentNumber	ATTRIBUTE 2	Document number: From 0 to 99999. (only for "Fiscal invoice")
/beginFiscalDocument	CLOSE TAG	

The attributes vary according to the type of document requested.
Attributes referring to a document type other than the selected one are simply ignored.



beginFiscalReceipt

Opening the fiscal receipt

Command:

<beginFiscalReceipt></beginFiscalReceipt>

Where:

TAG	SEQUENCE	DESCRIPTION
beginFiscalReceipt	OPEN TAG	
/beginFiscalReceipt	CLOSE TAG	

- It is mandatory to open a fiscal receipt.



beginNotFiscal

Opening the non-fiscal receipt

Command:

```
<beginNotFiscal></beginNotFiscal>
```

Where:

TAG	SEQUENCE	DESCRIPTION
beginNotFiscal	OPEN TAG	
/beginNotFiscal	CLOSE TAG	

- It is mandatory to open a fiscal receipt.



beginRtDocAnnulment

Opening the telematic annulment document

Command:

```
<beginRtDocAnnulment docRefZ="" docRefNumber="" docDate="" printPreview="" fiscalSerial="" checkOnly="" codLottery="">
</beginRtDocAnnulment
```

Where:

TAG	SEQUENCE	DESCRIPTION
beginRtDocAnnulment	OPEN TAG	
docRefZ	ATTRIBUTE 1	Z number of the desired document (from 1 to 9999)
docRefNumber	ATTRIBUTE 2	Number of the desired document (from 1 to 9999)
docDate	ATTRIBUTE 3	Date of desired document (DDMMYY)
printPreview	ATTRIBUTE 4	Enable ("1") or disable ("0") the preview (optional)
fiscalSerial	ATTRIBUTE 5	Serial number of the desired document (optional)
checkOnly	ATTRIBUTE 6	When set to 1 it checks if the operation is possible
codLottery	ATTRIBUTE 7	Allows to enter the lottery code
/beginRtDocAnnulment	CLOSE TAG	

The response in the "responseBuf" node is formatted as follows:

CONTENT	LENGTH	NOTES
Result	1 byte	0 = document not found 1 = document found 2 = operation not allowed



beginRtDocAnnulmentSpecial

Annulment of a receipt not present on the device

Command:

```
<beginRtDocAnnulmentSpecial service="" docDate=""></beginRtDocAnnulmentSpecial>
```

Where:

TAG	SEQUENCE	DESCRIPTION
beginRtDocAnnulmentSpecial	OPEN TAG	
service	ATTRIBUTE 1	POS (EFTPOS ticket) VR (empty to return) ND (not declared)
docDate	ATTRIBUTE 2	Document date (DDMMYY)
/beginRtDocAnnulmentSpecial	CLOSE TAG	



beginRtDocRefund

Opening the telematic return document

Command:

```
<beginRtDocRefund docRefZ="" docRefNumber="" docDate="" printPreview="" fiscalSerial="" checkOnly="" codLottery="">
</beginRtDocRefund>
```

Where:

TAG	SEQUENCE	DESCRIPTION
beginRtDocRefund	OPEN TAG	
docRefZ	ATTRIBUTE 1	Z number of the desired document (from 1 to 9999)
docRefNumber	ATTRIBUTE 2	Number of the desired document (from 1 to 9999)
docDate	ATTRIBUTE 3	Date of desired document (DDMMYY)
printPreview	ATTRIBUTE 4	Enable ("1") or disable ("0") the preview (optional)
fiscalSerial	ATTRIBUTE 5	Serial number of the desired document (optional)
checkOnly	ATTRIBUTE 6	When set to 1 it checks if the operation is possible
codLottery	ATTRIBUTE 7	Allows to enter the lottery code
/beginRtDocRefund	CLOSE TAG	

The response in the "responseBuf" node is formatted as follows:

CONTENT	LENGTH	NOTES
Result	1 byte	0 = document not found; 1 = document found; 2 = operation not allowed

Unlike the others, this command has the extra "ejDocVat" node in response structured as follows:

```
<ejDocVat>
  <vat1>
    <rate>2300</rate>
    <gross>000000900</gross>
    <taxable>000000732</taxable>
    <tax>000000168</tax>
  </vat1>
  <vat2>
    <rate>1000</rate>
    <gross>000000000</gross>
    <taxable>000000000</taxable>
    <tax>000000000</tax>
  </vat2>
</ejDocVat>
```

VAT percentage (2 integers with 2 decimals)
gross total amount
total taxable amount
total taxes amount



beginRtDocRefundSpecial

Returning a receipt of a different device

Command:

```
<beginRtDocRefundSpecial service="" docDate=""></beginRtDocRefundSpecial>
```

Where:

TAG	SEQUENCE	DESCRIPTION
beginRtDocRefundSpecial	OPEN TAG	
service	ATTRIBUTE 1	POS (EFTPOS ticket) VR (empty to return) ND (not declared)
docDate	ATTRIBUTE 2	Document date (DDMMYY)
/beginRtDocRefundSpecial	CLOSE TAG	



beginTraining

Enabling the training mode

Command:

```
<beginTraining></beginTraining>
```

Where:

TAG	SEQUENCE	DESCRIPTION
beginTraining	OPEN TAG	
/beginTraining	CLOSE TAG	

- The device must never have been activated to use this command.
- Enable training mode on the device.
- Access to learning mode is only possible after a fiscal zeroset.



clearText

Deleting the display content

Command:

<clearText></clearText>

Where:

TAG	SEQUENCE	DESCRIPTION
clearText	OPEN TAG	
/clearText	CLOSE TAG	

- Delete display content.
- This command can be used both inside and outside a fiscal receipt (or a fiscal document or a non-fiscal receipt).



conFwUpgrade

Confirming or rejecting firmware upload request

This command can also be used when FPU mode is not active.

Command:

```
<conFwUpgrade confType = ""></conFwUpgrade>
```

Where:

TAG	SEQUENCE	DESCRIPTION
conFwUpgrade	OPEN TAG	
confType	ATTRIBUTE 1	1 = Confirm 0 = Reject
/conFwUpgrade	CLOSE TAG	



deleteBitmap

Deleting a bitmap from terminal

Command:

```
<deleteBitmap icoNumber=""></deleteBitmap>
```

Where:

TAG	SEQUENCE	DESCRIPTION
deleteBitmap	OPEN TAG	
icoNumber	ATTRIBUTE 1	Bitmap index, from 0 to 25
/deleteBitmap	CLOSE TAG	



deleteDematerialized

Deleting the file indicated in the "file" attribute

Delete the file indicated in the "file" attribute (use the same name returned by the "getDematerialized" command). This command can also be used when FPU mode is not active.

Command:

```
<deleteDematerialized file=""></deleteDematerialized>
```

Where:

TAG	SEQUENCE	DESCRIPTION
deleteDematerialized	OPEN TAG	
file	ATTRIBUTE 1	Filename returned by the "getDematerialized" command
/deleteDematerialized	CLOSE TAG	



dematerializedOn

Setting the next fiscal receipt as dematerialized

Command:

```
<dematerializedOn description=""></dematerializedOn>
```

Where:

TAG	SEQUENCE	DESCRIPTION
dematerializedOn	OPEN TAG	
description (optional)	ATTRIBUTE 1	If present, the content of this attribute will be included in the field receiver of the XML contained in the PDF
/dematerializedOn	CLOSE TAG	



dematerializedOff

Disabling a previous dematerialized receipt command

Command:

<dematerializedOff></dematerializedOff>

Where:

TAG	SEQUENCE	DESCRIPTION
dematerializedOff	OPEN TAG	
/dematerializedOff	CLOSE TAG	



directIO

Sending CUSTOM protocol command

Command:

```
<directIO command="" data=""></directIO>
```

Where:

TAG	SEQUENCE	DESCRIPTION
directIO	OPEN TAG	
command	ATTRIBUTE 1	Command ID (4 bytes)
data	ATTRIBUTE 2	Command parameters, its length depends on the command
/directIO	CLOSE TAG	

- It sends the CUSTOM protocol command directly to the fiscal device (see the "Communication protocol for fiscal products" manual).

Example 1= PARTIAL CUT
<directIO command="3013"></directIO>

Example 2= PRINT GRAPHIC IMAGE
<directIO command="3017" data="121"></directIO>

Example 3= BARCODE PRINT
<directIO command="3021" data="1200131234567890123"></directIO>

- Future improvements: directIO can be extended to other commands with CUSTOM protocol.



displayText

Writing text on the display

Command:

```
<displayText data=""></displayText>
```

Where:

TAG	SEQUENCE	DESCRIPTION
displayText	OPEN TAG	
data	ATTRIBUTE 1	Attribute data contains 40 characters, 20 for first line display, the other 20 for second line display
/displayText	CLOSE TAG	

- Send text messages to customer display.
- This command can be used both inside and outside a fiscal receipt (or a fiscal document or a non-fiscal receipt).



endFiscalReceipt

End of a receipt or a fiscal document

Command:

```
<endFiscalReceipt paymentDetails="" roundingDetails=""></endFiscalReceipt>
```

Where:

TAG	SEQUENCE	DESCRIPTION
endFiscalReceipt	OPEN TAG	
paymentDetails (optional)	ATTRIBUTE 1	Options: 0 = none 1 = minimum 2 = full
roundingDetails (optional)	ATTRIBUTE 2	Options: 0 = extended info disabled 1 = extended info enabled
/endFiscalReceipt	CLOSE TAG	

- The "endFiscalReceipt" or "endFiscalReceiptCut" instructions are mandatory to close a fiscal receipt or fiscal document.



endFiscalReceiptCut

Closing a fiscal receipt or a fiscal document and performs the paper cut

Command:

```
<endFiscalReceiptCut paymentDetails=""></endFiscalReceiptCut>
```

Where:

TAG	SEQUENCE	DESCRIPTION
endFiscalReceiptCut	OPEN TAG	
paymentDetails	ATTRIBUTE 1	Options: 0 = none 1 = minimum 2 = full
/endFiscalReceiptCut	CLOSE TAG	

- Closing a receipt or a fiscal document with a partial cut.
- The "endFiscalReceipt" or "endFiscalReceiptCut" instructions are mandatory to close a fiscal receipt or fiscal document.



endNotFiscal

Closing a non-fiscal receipt

Command:

<endNotFiscal></endNotFiscal>

Where:

TAG	SEQUENCE	DESCRIPTION
endNotFiscal	OPEN TAG	
/endNotFiscal	CLOSE TAG	

- It is mandatory to close a non-fiscal receipt with paper cut.



endTraining

Disabling training mode

Command:

<endTraining></endTraining>

Where:

TAG	SEQUENCE	DESCRIPTION
endTraining	OPEN TAG	
/endTraining	CLOSE TAG	

- Disabling training mode on the device.



exportLottTickets

Exporting of unsent lottery files

Command:

```
<exportLottTickets fromZ="" toZ="" fromNum="" toNum=""></exportLottTickets>
```

Where:

TAG	SEQUENCE	DESCRIPTION
exportLottTickets	OPEN TAG	
fromZ	ATTRIBUTE 1	Zeroset number of start of export
toZ	ATTRIBUTE 2	Zeroset number of end of export
fromNum	ATTRIBUTE 3	Receipt number of start of export
toNum	ATTRIBUTE 4	Receipt number of end of export
/exportLottTickets	CLOSE TAG	



feed

Paper feed

Command:

<feed rows=""></feed>

Where:

TAG	SEQUENCE	DESCRIPTION
feed	OPEN TAG	
rows	ATTRIBUTE 1	Lines number (1 - 9)
/feed	CLOSE TAG	



fixedLines

Adding fixed lines to the receipt

This command adds fixed lines to the receipt.

The text taken from the description will be formatted according to the indicated pitch.

Command:

```
<fixedLines description="" pitch="" extra_pitch=""></fixedLines>
```

Where:

TAG	SEQUENCE	DESCRIPTION
fixedLines	OPEN TAG	
description	ATTRIBUTE 1	Description field
pitch	ATTRIBUTE 2	Various attributes (see table below)
extra_pitch	ATTRIBUTE 3	Used to set the pitch when using the tax credit
/fixedLines	CLOSE TAG	

- Tax credit pitches (from Q to X) need the extra_pitch attribute (do not use for others).

CONTENT	LENGTH	NOTES
DESCRIPTION	0-44 bytes	Description text
PITCH	1 byte	1 = (normal) 2 = (bold) 3 = (42 characters) 4 = (double height) 5 = (double width) 6 = (italic) 7 = (normal / double height / 42 characters) 8 = (bold / 42 characters) 9 = (bold / double height / 42 characters) B = (customer fiscal code/VAT number) C = (customer description, used only if PITCH B is not present) Q = (date and time for CREDITO D'IMPOSTA; printed both on the receipt and on the EJ) R = (amount for CREDITO D'IMPOSTA; printed both on the receipt and on the EJ) S = (STAN for CREDITO D'IMPOSTA; printed both on the receipt and on the EJ) T = (date and time for CREDITO D'IMPOSTA; printed only on the EJ) U = (amount for CREDITO D'IMPOSTA; printed only on the EJ) V = (STAN for CREDITO D'IMPOSTA; printed only on the EJ) X = (generic text for CREDITO D'IMPOSTA; printed both on the receipt and on the EJ) Z = (half height)
EXTRA_PITCH	1 byte	Data present only if the previous pitch is between Q and X; it can take on any value of the previous pitch except for the interval Q-X.



forceDematerialized

Forcing the conversion of dematerialized receipts

This command forces background conversion of dematerialized receipts that may have been suspended in TODO as BIN files. This command can also be used when FPU mode is not active.

Command:

```
<forceDematerialized></forceDematerialized>
```

Where:

TAG	SEQUENCE	DESCRIPTION
forceDematerialized	OPEN TAG	
/forceDematerialized	CLOSE TAG	



getBusyStatus

Checking the busy status of the device

Command:

```
<getBusyStatus></getBusyStatus>
```

Where:

TAG	SEQUENCE	DESCRIPTION
getBusyStatus	OPEN TAG	
/getBusyStatus	CLOSE TAG	

The response in the "responseBuf" node is formatted as follows:

CONTENT	LENGTH	NOTES
F_BUSY_01	1 byte	0 = not busy, 1 = busy in FM/EJ XML export process
F_BUSY_02	1 byte	0 = not busy, 1 = busy in lottery ticket export process
F_BUSY_03	1 byte	0 = not busy, 1 = busy in lottery ticket searching process
F_BUSY_04	1 byte	0 = not busy, 1 = busy updating the ticket memory after the telematic return or annulment procedure
F_BUSY_05	1 byte	0 = not busy, 1 = busy in the process of saving the PDF file
F_BUSY_06	1 byte	0 = not busy, 1 = busy in the process of Z backup
F_BUSY_07	1 byte	0 = not busy, 1 = busy in PDF file not in fiscal copy
F_BUSY_08	1 byte	Not used
F_BUSY_09	1 byte	Not used
F_BUSY_10	1 byte	Not used
F_BUSY_11	1 byte	Not used
F_BUSY_12	1 byte	Not used
F_BUSY_13	1 byte	Not used



F_BUSY_14	1 byte	Not used
F_BUSY_15	1 byte	Not used
F_BUSY_16	1 byte	Not used



getCurrentAtecoCode

Reading the active ATECO code for the current receipt

Command:

```
<getCurrentAtecoCode></getCurrentAtecoCode>
```

Where:

TAG	SEQUENCE	DESCRIPTION
getCurrentAtecoCode	OPEN TAG	
/getCurrentAtecoCode	CLOSE TAG	

- ResponseBuf: 1 byte of slot, 2 bytes of length, 6 bytes of ATECO code



getDailyTotals

Reading daily counters and VAT totalizers

Command:

```
<getDailyTotals></getDailyTotals>
```

Where:

TAG	SEQUENCE	DESCRIPTION
getDailyTotals	OPEN TAG	
/getDailyTotals	CLOSE TAG	

Unlike the other commands with data in response, the response to this command does not have the "responseBuf" node; instead the "dailyTotals" node is used, structured as follows:

<pre><dailyTotals> <receiptsNum>0000</receiptsNum> <receiptsTot>000000000</receiptsTot> <creditNoteNum>0000</creditNoteNum> <creditNoteTot>000000000</creditNoteTot> <canceledReceipsNum>0000</canceledReceipsNum> <canceledReceipsTot>000000000</canceledReceipsTot> <foundationDiscountNum>0000</foundationDiscountNum> <foundationDiscountTot>000000000</foundationDiscountTot> <telematicCancelRecNum>0000</telematicCancelRecNum> <telematicCancelRecTot>000000000</telematicCancelRecTot> <telematicRefundRecNum>0000</telematicRefundRecNum> <telematicRefundRecTot>000000000</telematicRefundRecTot> <vatSalesTickets> <vat1> <rate>2200</rate> <gross>000000000</gross> <taxable>000000000</taxable> <tax>000000000</tax> </vat1> <vat2> <rate>1000</rate> <gross>000000000</gross> <taxable>000000000</taxable> <tax>000000000</tax> </vat2> ... </vatSalesTickets> <vatInvoices> <vat1> <rate>2200</rate> <gross>000000000</gross> <taxable>000000000</taxable> <tax>000000000</tax> </vat1> ... </vatInvoices></pre>	receipt number receipt total credit note number credit note total number of canceled receipts total canceled receipts reserved reserved number of canceled telematic receipts total of canceled telematic receipts number of telematic return receipts total telematic return receipts daily sales tickets VAT VAT percentage (2 integers and 2 decimals) Gross total amount Total taxable amount Total tax amount VAT daily invoices
--	---



```
<vatRefundTickets>
  <vat1>
    <rate>2200</rate>
    <gross>000000000</gross>

    <taxable>000000000</taxable>
    <tax>000000000</tax>
  </vat1>
  ...
</vatRefundTickets>
<vatCanceledTickets>
  <vat1>
    <rate>2300</rate>
    <gross>000000000</gross>
    <taxable>000000000</taxable>
    <tax>000000000</tax>
  </vat1>
  ...
</vatCanceledTickets>
</dailyTotals>
```

VAT daily return receipts

VAT canceled daily receipts



getDateTime

Getting date and time

This command can also be used when FPU mode is not active.

Command:

<getDateTime></getDateTime>

Where:

TAG	SEQUENCE	DESCRIPTION
getDateTime	OPEN TAG	
/getDateTime	CLOSE TAG	

The response in the "responseBuf" node is formatted as follows:

CONTENT	LENGTH	NOTES
DD	2 bytes	DD = day
MM	2 bytes	MM = month
YY	2 bytes	YY = year
hh	2 bytes	hh = hours
mm	2 bytes	mm = minutes
ss	2 bytes	ss = seconds



getDematerialized

Acquiring the number of dematerialized receipts to be processed

This command acquires the number of dematerialized receipts to be processed, the dematerialized receipts already processed and the link to the first dematerialized receipt present in the device.
This command can also be used when FPU mode is not active.

Command:

```
<getDematerialized></getDematerialized>
```

Where:

TAG	SEQUENCE	DESCRIPTION
getDematerialized	OPEN TAG	
/getDematerialized	CLOSE TAG	

Unlike the other commands, the response to this command does not have the "addInfo" node; instead a node list with printer information is used:

```
<?xml version="1.0" encoding="utf-8"?>
<dematerializedResp success="true" status="0">
  <todoCount>0</todoCount>          number of PDF documents still to be processed
  <readyCount>7</readyCount>        number of PDF documents processed
  <pdfLink>PDFEX/20211203_Z0043_N0001_STITE440402.pdf</pdfLink>  link to the first PDF file
</dematerializedResp>
```



getDocumentFromEj

Getting a document from EJ

This command can also be used when FPU mode is not active.

Command:

```
<getDocumentFromEj zNum="" docNum="" docType=""></getDocumentFromEj>
```

Where:

TAG	SEQUENCE	DESCRIPTION
getDocumentFromEj	OPEN TAG	
zNum	ATTRIBUTE 1	Reference Z number of the requested document
docNum	ATTRIBUTE 2	Number of the document to get
docType	ATTRIBUTE 3	Document type to get: 1 = Fiscal receipt / sales receipt / canceled receipt 4 = Invoice / simplified invoice 7 = Fiscal zeroset (omit docNum attribute) 18 = Annulment document 19 = Return document
/getDocumentFromEj	CLOSE TAG	

- The response in the "responseBuf" node is formatted as follows:
- 1 byte for document search result ("0" = not found, "1" = found)
 - N. bytes of requested document content



getFullRTStatus

Getting the extended machine state from XML

Command:

```
<getFullRTStatus></getFullRTStatus>
```

Where:

TAG	SEQUENCE	DESCRIPTION
getFullRTStatus	OPEN TAG	
/getFullRTStatus	CLOSE TAG	

The response in the "responseBuf" node is formatted as follows:

CONTENT	LENGTH	NOTES
batteryStatus	1 byte	In the format aaaaa bbbb c, where: - aaaaa = supplied power in millivolts - bbbb = charge of retain memory battery in millivolts - c = power supply status; it can be: 0: KO 1: low 2: charged 3: full charged - C: charging (battery charged connected) - P: charged (battery charged connected) - V: directly connected to power supply
drawerStatus	1 byte	Cash drawer status: 0 = closed 1 = open
paperCover	2 bytes	Paper compartment cover status: 00 = closed paper cover - present paper 10 = open paper cover - present paper 01 = closed paper cover - missing paper 11 = open paper cover - missing paper
openDocument	2 bytes	Document type/status: 00 = non-fiscal receipt correctly closed 01 = non-fiscal receipt canceled 10 = fiscal receipt correctly closed 11 = fiscal receipt canceled 20 = invoice correctly closed 21 = invoice canceled 30 = credit note correctly closed 31 = credit note canceled



Example:

```
<getFullRTStatus></getFullRTStatus>

<?xml version="1.0" encoding="utf-8"?>
<response success="true" status="0">
  <addInfo>
    <elementList>getFullRTStatus, lastCommand, dateTime, printerStatus, fpStatus, receiptStep</elementList>
    <getFullRTStatus>
      <batteryStatus>24379|03059|V</batteryStatus>
      <drawerStatus>0</drawerStatus>
      <paperCover>00</paperCover>
      <openDocument>00</openDocument>
    </getFullRTStatus>
    <lastCommand>getFullRTStatus</lastCommand>
    <dateTime>2025-10-17T10:00:45</dateTime>
    <printerStatus>00000</printerStatus>
    <fpStatus>000</fpStatus>
    <receiptStep>0</receiptStep>
  </addInfo>
</response>
```



getHeaderLine

Getting the requested header line

Command:

```
<getHeaderLine rowNum=""></getHeaderLine>
```

Where:

TAG	SEQUENCE	DESCRIPTION
getHeaderLine	OPEN TAG	
rowNum	ATTRIBUTE 1	Row number (from 1 to getHeaderLineCount)
/getHeaderLine	CLOSE TAG	

The response in the "responseBuf" node is formatted as follows:

CONTENT	LENGTH	NOTES
ROWNUM	1 byte	ROWNUM = requested row number
TYPE	1 byte	TYPE = font type
LEN	2 bytes	LEN = text length
TEXT	LEN bytes	TEXT = header line text



getHeaderLineCount

Getting the header lines number

Command:

```
<getHeaderLineCount></getHeaderLineCount>
```

Where:

TAG	SEQUENCE	DESCRIPTION
getHeaderLineCount	OPEN TAG	
/getHeaderLineCount	CLOSE TAG	

The response in the "responseBuf" node is formatted as follows:

CONTENT	LENGTH	NOTES
ROWS	1 byte	ROWS = max. number of lines in the header



getInfo

Getting the printed information

This command can also be used when FPU mode is not active.

Command:

```
<getInfo></getInfo>
```

Where:

TAG	SEQUENCE	DESCRIPTION
getInfo	OPEN TAG	
/getInfo	CLOSE TAG	

Unlike the other commands, the response to this command does not have the "addInfo" node; instead a node list with printer information is used:

```
<?xml version="1.0" encoding="utf-8"?>
<infoResp success="true" status="0">
  <serialNumber>STMTE770207</serialNumber>
  <fiscalized>SI</fiscalized>
  <fpuState>IN SERVIZIO</fpuState>
  <hwInitExhausted>NO</hwInitExhausted>
  <hwInitNumber>55</hwInitNumber>
  <fmPresent>SI</fmPresent>
  <mfExhausted>NO</mfExhausted>
  <zSetNumber>142</zSetNumber>
  <ejPresent>SI</ejPresent>
  <ejFull>NO</ejFull>
  <ejFilling>0.394%</ejFilling>
  <simulation>NO</simulation>
  <demoMode>NO</demoMode>
  <vatSplit>NO</vatSplit>
  <privatekey>SI</privatekey>
  <certificate>SI</certificate>
  <certValidFrom>26/02/2019</certValidFrom>
  <certValidTo>26/02/2022</certValidTo>
  <certExpired>NO</certExpired>
  <dateProg>--/--/----</dateProg>
  <minWaste>1</minWaste>
  <maxWaste>3</maxWaste>
  <delaysNum>5</delaysNum>
  <advancesNum>10</advancesNum>
  <timeSync>NO</timeSync>
  <vatNumberDealer>02498250345</vatNumberDealer>
  <pointOfSaleNum>1</pointOfSaleNum>
  <vatNumberRetailer>02498250345</vatNumberRetailer>
  <retailerDescription>CUSTOM</retailerDescription>
  <retailerPostalCode>---</retailerPostalCode>
</infoResp>
```

optionals
optionals
optionals
optionals



getRecTotal

Getting receipt totals

Command:

```
<getRecTotal rounding=""></getRecTotal>
```

Where:

TAG	SEQUENCE	DESCRIPTION
getRecTotal	OPEN TAG	
rounding (optional)	ATTRIBUTE 1	Options: 1 = subtotal value & subtotal value with rounding
/getRecTotal	CLOSE TAG	

The response in the "responseBuf" node is formatted as follows:

CONTENT	LENGTH	NOTES
MARK UP	9 bytes	MARK UP: total markups
DISCOUNT	9 bytes	DISCOUNT: total discounts
CORRECTION	9 bytes	CORRECTION: total corrections
RETURNS	9 bytes	RETURNS: total returns
SIGN SBT	1 byte	SIGN SBT: subtotal sign (+ or -)
SBT	9 bytes	SBT = subtotal
SIGN CHANGE	1 byte	SIGN CHANGE: + or - (if "-" = change)
CHANGE	9 bytes	CHANGE: change
N TCK	4 bytes	N TCK: number of ticket
FISCAL	1 byte	FISCAL: 0=non-fiscal, 1=fiscal

If "rounding=1" the response is as follows:

CONTENT	LENGTH	NOTES
SIGN SBT	1 byte	SIGN SBT: subtotal sign (+ or -)
SBT	9 bytes	SBT = subtotal
SIGN SBT+R	1 byte	SIGN SBT+R: sign for subtotal with rounding (+ or -)
SBT+R	9 bytes	SBT+R = subtotal with rounding (amount)



getVatRate

Getting a VAT value from the VAT table

This command can also be used when FPU mode is not active.

Command:

```
<getVatRate numVat=""></getVatRate>
```

Where:

TAG	SEQUENCE	DESCRIPTION
getVatRate	OPEN TAG	
numVat	ATTRIBUTE 1	VAT rate index
/getVatRate	CLOSE TAG	

The response in the "responseBuf" node is formatted as follows:

CONTENT	LENGTH	NOTES
VATIDX	2 bytes	VATIDX = VAT rate index requested
VALUE	4 bytes	VALUE = VAT rate value (4 bytes: 2 integers and 2 decimals)
EXCODE	1 byte	EXCODE = exempt code
PROGFLAG	1 byte	PROGFLAG: 0 = if the VAT slot is not programmable 1 = if the VAT slot is programmable
DESC	25 bytes	DESC = VAT rate description



getVatTotalsOnDemand

Getting VAT totals in a single XML command

Command:

```
<getVatTotalsOnDemand vatgroup="xx" doctype="yy"></getVatTotalsOnDemand>
```

Where:

TAG	SEQUENCE	DESCRIPTION
getVatTotalsOnDemand	OPEN TAG	
vatgroup	ATTRIBUTE 1	VAT group: 0 = it is used to read the VAT values of the day 1 = it is used to read the VAT values of the period 2 = it is only used after sending a query command for a return with parameter checkOnly="1" to find out how much VAT can be returned Example: <pre><?xml version="1.0" encoding="utf-8"?> <printerFiscalReceipt> <beginRtDocRefund docRefZ="zzzz" docRefNumber="nnnn" docDate="ggmmaa" checkOnly="1" /> </printerFiscalReceipt> <printerCommand> <getVatTotalsOnDemand vatgroup="2" doctype="0"/> </printerCommand></pre> where: docRefZ="zzzz" is the number of fiscal closing; docRefNumber="nnnn" is the fiscal document number; docDate="ggmmaa" is the fiscal document date. 3 = it is used to read the VAT values inside the receipt
doctype	ATTRIBUTE 2	Document type: 0 = sales 1 = invoices 2 = refunded documents 3 = cancelled documents
/getVatTotalsOnDemand	CLOSE TAG	



Example:

```
<getVatTotalsOnDemand vatgroup="0" doctype="0"></getVatTotalsOnDemand>
```

```
<?xml version="1.0" encoding="utf-8"?>
```

```
<response success="true" status="0">
```

```
  <addInfo>
```

```
    <elementList>getVatTotalsOnDemand, lastCommand, dateTime, printerStatus, fpStatus, receiptStep</elementList>
```

```
    <getVatTotalsOnDemand vatgroup="0" doctype="0">
```

```
      <lastDocument>
```

```
        <number>1</number>
```

```
        <dateTime>2024-10-15T09:28:00</dateTime>
```

```
        <total>10.00</total>
```

```
        <flagDocCanc>0</flagDocCanc>
```

```
      </lastDocument>
```

```
    <vatTotals>
```

```
      <vat1>
```

```
        <rate>22.00</rate>
```

```
        <gross>3.00</gross>
```

```
        <taxable>2.46</taxable>
```

```
        <tax>0.54</tax>
```

```
      </vat1>
```

```
      <vat2>
```

```
        <rate>10.00</rate>
```

```
        <gross>2.00</gross>
```

```
        <taxable>1.82</taxable>
```

```
        <tax>0.18</tax>
```

```
      </vat2>
```

```
      <vat3>
```

```
        <rate>4.00</rate>
```

```
        <gross>3.00</gross>
```

```
        <taxable>2.88</taxable>
```

```
        <tax>0.12</tax>
```

```
      </vat3>
```

```
      <vat4>
```

```
        <rate>0.00</rate>
```

```
        <gross>0.00</gross>
```

```
        <taxable>0.00</taxable>
```

```
        <tax>0.00</tax>
```

```
      </vat4>
```

```
      <vat5>
```

```
        <rate>0.00</rate>
```

```
        <gross>0.00</gross>
```

```
        <taxable>0.00</taxable>
```

```
        <tax>0.00</tax>
```

```
      </vat5>
```

```
      <vat6>
```

```
        <rate>0.00</rate>
```

```
        <gross>0.00</gross>
```

```
        <taxable>0.00</taxable>
```

```
        <tax>0.00</tax>
```

```
      </vat6>
```

```
      <vat7>
```

```
        <rate>0.00</rate>
```

```
        <gross>0.00</gross>
```

```
        <taxable>0.00</taxable>
```

```
        <tax>0.00</tax>
```

```
    </vat7>
```



```
<vat8>
    <rate>0.00</rate>
    <gross>0.00</gross>
    <taxable>0.00</taxable>
    <tax>0.00</tax>
</vat8>
<vat9>
    <rate>0.00</rate>
    <gross>0.00</gross>
    <taxable>0.00</taxable>
    <tax>0.00</tax>
</vat9>
<vat10>
    <rate>0.00</rate>
    <gross>0.00</gross>
    <taxable>0.00</taxable>
    <tax>0.00</tax>
</vat10>
<vat11>
    <rate>0.00</rate>
    <gross>0.00</gross>
    <taxable>0.00</taxable>
    <tax>0.00</tax>
</vat11>
<vat12>
    <rate>0.00</rate>
    <gross>0.00</gross>
    <taxable>0.00</taxable>
    <tax>0.00</tax>
</vat12>
</vatTotals>
</getVatTotalsOnDemand>
<lastCommand>getVatTotalsOnDemand</lastCommand>
<dateTime>2024-10-15T09:28:15</dateTime>
<printerStatus>00000</printerStatus>
<fpStatus>000</fpStatus>
<receiptStep>0</receiptStep>
</addInfo>
</response>
```



getZReports

Getting links to download the Z Report XML files

This command can also be used when FPU mode is not active.

Command:

```
<getZReports date=""></getZReports>
```

Where:

TAG	SEQUENCE	DESCRIPTION
getZReports date	OPEN TAG	
date	ATTRIBUTE 1	Z report date (YYYYMMDD)
/getZReports date	CLOSE TAG	

Unlike the other commands, the response to this command does not have the "addInfo" node; the response is formatted as follows:

```
<?xml version="1.0" encoding="utf-8"?>
<zReportsResp success="true" status="0">
  <zReportExp>CORRISPETTIVIEX/201909251046_Z0145.xml</zReportExp>      exported reports
  <zReportNoResp>CORRISPETTIVINO/201909251043_Z0144.xml</zReportNoResp>  unanswered reports
  <zReportFail>CORRISPETTIVIKO/201909251039_Z0143.xml</zReportFail>      report KO
  <zReport>CORRISPETTIVIOK/Z0101_Z0125/201909251038_Z0142.xml</zReport>  report OK
</zReportsResp>
```



getZTransmissionID

Getting the status and the transmission ID of the Z report

This command can also be used when FPU mode is not active.

Command:

```
<getZTransmissionID zNum=""></getZTransmissionID>
```

Where:

TAG	SEQUENCE	DESCRIPTION
getZTransmissionID	OPEN TAG	
zNum	ATTRIBUTE 1	Desired document Z number, from 1 to 9999
/getZTransmissionID	CLOSE TAG	

Unlike the others, this command has the extra "ZTransmission" node in response structured as follows:

```
<ZTransmission>
  <docStatus></docStatus>      Z transmission status (sending OK, sending failed, no response from host, sending PC)
  <ZId>1234567</ZId>          Z transmission ID
</ZTransmission>
```



loadBitmap

Loading an image on the device

This command allows the loading an image on the device after transformation (decoding) in 64 format using a suitable decoder. This command can also be used when FPU mode is not active.

Command:

```
<loadBitmap icoNumber="">base64 bitmap data</loadBitmap>
```

Where:

TAG	SEQUENCE	DESCRIPTION
loadBitmap	OPEN TAG	
icoNumber	ATTRIBUTE 1	Bitmap number, from 0 to 25
/loadBitmap	CLOSE TAG	



openDrawer

Opening the cash drawer

This command can also be used when FPU mode is not active.

Command:

```
<openDrawer num=""></openDrawer>
```

Where:

TAG	SEQUENCE	DESCRIPTION
openDrawer	OPEN TAG	
num (optional)	ATTRIBUTE 1	Number of cash drawer (1 or 2)
/openDrawer	CLOSE TAG	

- Open the cash drawer.
- This command can be used both inside and outside a fiscal receipt (or a fiscal document or a non-fiscal receipt).



partialCut

Receipt ejection with partial cutting

Command:

<partialCut></partialCut>

Where:

TAG	SEQUENCE	DESCRIPTION
partialCut	OPEN TAG	
/partialCut	CLOSE TAG	



printBarcode

Printing a barcode

Command:

```
<printBarcode hRIPosition="" codeType="" code="" barCodeHeigth=""></printBarcode>
```

Where:

TAG	SEQUENCE	DESCRIPTION
printBarcode	OPEN TAG	
hRIPosition	ATTRIBUTE 1	Select to print the alphanumeric representation of the barcode (hRI) or to disable it as follows: 0 = disabled 2 = under the barcode (This attribute is not used with QR Codes).
codeType	ATTRIBUTE 2	Barcode type: 1 = EAN 13 2 = EAN 8 3 = CODE 39 4 = CODE 128 5 = ITF 12/5 6 = QRCODE 7 = GS1-DATABAR 8 = PDF417
code	ATTRIBUTE 3	Numeric code of the barcode or alphanumeric code of the QR Code
barCodeHeigth	ATTRIBUTE 4	Barcode height, from 1 to 9 (optional)
/printBarcode	CLOSE TAG	

- Printing of a barcode or a QR Code.

NOTES:

The character set and length of the string are defined by the standards for each barcode system.

According to the CODE128 standard, one of the following character sets must be specified:

- CODE A. To select CODE A, the first two characters of the "code" attribute must be "{A"
- CODE B. To select CODE B, the first two characters of the "code" attribute must be "{B"
- CODE C. To select CODE C, the first two characters of the "code" attribute must be "{C"

When using CODE128, note that these first two characters are not part of the barcode itself and are therefore not printed. They are there only to select the character set.



printBarcodeTrailer

Printing a barcode at the bottom of the receipt

Command:

```
<printBarcodeTrailer hRIPosition="" codeType="" code="" barCodeHeigth=""></printBarcodeTrailer>
```

Where:

TAG	SEQUENCE	DESCRIPTION
printBarcodeTrailer	OPEN TAG	
hRIPosition	ATTRIBUTE 1	Select to print the alphanumeric representation of the barcode (hRI) or to disable it as follows: 0 = disabled 2 = under the barcode (This attribute is not used with QR Codes).
codeType	ATTRIBUTE 2	Barcode type: 1 = EAN 13 2 = EAN 8 3 = CODE 39 4 = CODE 128 5 = ITF I2/5 6 = QRCODE 7 = GS1-DATABAR 8 = PDF417
code	ATTRIBUTE 3	Numeric code of the barcode or alphanumeric code of the QR Code
barCodeHeigth	ATTRIBUTE 4	Barcode height, from 1 to 9 (optional)
/printBarcodeTrailer	CLOSE TAG	

- Printing of a barcode or a QR Code.

NOTES:

The character set and length of the string are defined by the standards for each barcode system.

According to the CODE128 standard, one of the following character sets must be specified:

- CODE A. To select CODE A, the first two characters of the "code" attribute must be "{A"
- CODE B. To select CODE B, the first two characters of the "code" attribute must be "{B"
- CODE C. To select CODE C, the first two characters of the "code" attribute must be "{C"

When using CODE128, note that these first two characters are not part of the barcode itself and are therefore not printed. They are there only to select the character set.



printBitmapTrailer

Printing a graphic image at the bottom of the receipt

Command:

```
<printBitmapTrailer icoNumber=""></printBitmapTrailer>
```

Where:

TAG	SEQUENCE	DESCRIPTION
printBitmapTrailer	OPEN TAG	
icoNumber	ATTRIBUTE 1	Bitmap number (from 1 to 25)
/printBitmapTrailer	CLOSE TAG	



printDuplicateReceipt

Printing a copy of the receipt or of the fiscal document

Command:

```
<printDuplicateReceipt></printDuplicateReceipt>
```

Where:

TAG	SEQUENCE	DESCRIPTION
printDuplicateReceip	OPEN TAG	
/printDuplicateReceip	CLOSE TAG	

- Reprinting of the last fiscal receipt.
- Since the original receipts cannot be reprinted in the same format by law, the copies are actually non-fiscal receipts containing the EJ part that includes the receipt lines.



printGraphicCoupon

Printing a graphic image

Command:

```
<printGraphicCoupon data=""></printGraphicCoupon>
```

Where:

TAG	SEQUENCE	DESCRIPTION
printGraphicCoupon	OPEN TAG	
data	ATTRIBUTE 1	XYZ: coupon number (from 001 to 025)
/printGraphicCoupon	CLOSE TAG	



printNormal

Printing a line of text on fiscal receipt

Command:

```
<printNormal font="" data=""></printNormal>
```

Where:

TAG	SEQUENCE	DESCRIPTION
printNormal	OPEN TAG	
font	ATTRIBUTE 1	Font type: 1 = normal 2 = bold 3 = length 42 characters 4 = double height 5 = double width 6 = italic (only for 80 mm paper) 8 = bold / 42 characters A = length 32, reverse B = length 66 C = length 66, reverse D = length 60 Z = half height
data	ATTRIBUTE 2	Text to print (max. 66 characters)
/printNormal	CLOSE TAG	

- Printing of a line of text on fiscal receipt.



printNotFiscalHeader

Printing the header of the non-fiscal receipt

Command:

<printNotFiscalHeader></printNotFiscalHeader>

Where:

TAG	SEQUENCE	DESCRIPTION
printNotFiscalHeader	OPEN TAG	
/printNotFiscalHeader	CLOSE TAG	



printRecAdvancePayments

Printing of the deposit amount previously paid

Command:

```
<printRecAdvancePayments amount=""></printRecAdvancePayments>
```

Where:

TAG	SEQUENCE	DESCRIPTION
printRecAdvancePayments	OPEN TAG	
amount	ATTRIBUTE 1	Price, from 0.00 to 99999999.99. The price must be set without decimal or thousands separator.
/printRecAdvancePayments	CLOSE TAG	

- Printing of the amount line relating to the deposit that was previously paid.



printRecGift

Gift

Command:

<printRecGift></printRecGift>

Where:

TAG	SEQUENCE	DESCRIPTION
printRecGift	OPEN TAG	
/printRecGift	CLOSE TAG	

- The previous sale done is transformed into a gift.



printRecItem

Item sale

Command:

```
<printRecItem description="" unitPrice="" department="" idVat="" quantity=""></printRecItem>
```

Where:

TAG	SEQUENCE	DESCRIPTION
printRecItem	OPEN TAG	
description	ATTRIBUTE 1	Item description (max. 22 characters). Descriptions exceeding the limits will be truncated.
unitPrice	ATTRIBUTE 2	Price, from 0.00 to 99999999.99. The price must be set without decimal or thousands separator.
department	ATTRIBUTE 3	Department ID number, 001 to 999 (optional)
idVat	ATTRIBUTE 4	VAT index (see note below)
quantity	ATTRIBUTE 5	Item quantity (see note below)
/printRecItem	CLOSE TAG	

- Printing of the items sold of a department on the fiscal receipt.

NOTE:

If the use of quantity is needed, the use of the idVat tag is mandatory.



printRecItemAdjustment

Discount/markup on item

Command:

```
<printRecItemAdjustment adjustmentType="" description="" amount="" department="" idVat=""></printRecItemAdjustment>
```

Where:

TAG	SEQUENCE	DESCRIPTION
printRecItemAdjustment	OPEN TAG	
adjustmentType	ATTRIBUTE 1	Discount/markup operation to be performed: 2 = value of the markup on the department 3 = value of department discount Other values are not allowed.
description	ATTRIBUTE 2	Item description (max. 22 characters). Descriptions exceeding the limits will be truncated.
amount	ATTRIBUTE 3	Price, from 0.00 to 99999999.99. The price must be set without decimal or thousands separator.
department	ATTRIBUTE 4	Department ID number, 001 to 999 (optional). (If omitted, the modification is performed on the subtotal).
idVat	ATTRIBUTE 5	VAT index (optional)
/printRecItemAdjustment	CLOSE TAG	

- The discount or markup is applied to the item sold with the previous operation.



printRecItemAdjustmentVoid

Item discount/markup void

Command:

```
<printRecItemAdjustmentVoid></printRecItemAdjustmentVoid>
```

Where:

TAG	SEQUENCE	DESCRIPTION
printRecItemAdjustmentVoid	OPEN TAG	
/printRecItemAdjustmentVoid	CLOSE TAG	

- Undoing of the last discount operation performed.
- A "printRecItemAdjustment" element must precede this.



printRecItemVoid

Item sale void

Command:

```
<printRecItemVoid description="" unitPrice="" department="" idVat="" quantity=""></printRecItemVoid>
```

Where:

TAG	SEQUENCE	DESCRIPTION
printRecItemVoid	OPEN TAG	
description	ATTRIBUTE 1	Item description (max. 22 characters). Descriptions exceeding the limits will be truncated.
unitPrice	ATTRIBUTE 2	Price, from 0.00 to 99999999.99. The price must be set without decimal or thousands separator.
department	ATTRIBUTE 3	Department ID number, 001 to 999 (optional)
idVat	ATTRIBUTE 4	VAT index (optional)
quantity	ATTRIBUTE 5	Item quantity (optional)
/printRecItemVoid	CLOSE TAG	

- Annulment of a previous sale transaction.



printRecMessage

Adding a line or a description

Command:

```
<printRecMessage messageType="" font="" message=""></printRecMessage>
```

Where:

TAG	SEQUENCE	DESCRIPTION
printRecMessage	OPEN TAG	
messageType	ATTRIBUTE 1	Type of line to print: 1 = additional descriptive line (sales body) 2 = additional line in payments 3 = line fixed after payment 4 = courtesy line
font	ATTRIBUTE 2	Font type: 1 = normal 2 = bold 3 = length 42 characters 4 = double height 5 = double width 6 = italic 7 = length 42, double height 8 = length 42, bold 9 = length 42, bold, double height C = normal, used for printing the customer in the fiscal invoice (see example on page 117). P = normal, used to print the return slip number in a credit note (see example from page 117 to page 119).
message	ATTRIBUTE 3	Line of text to be printed (max. 42 characters). The maximum length is set according to the "font" attribute. Additional characters will be truncated.
/printRecMessage	CLOSE TAG	



printRecRefund

Goods return

Command:

```
<printRecRefund description="" unitPrice="" department="" idVat="" quantity=""></printRecRefund>
```

Where:

TAG	SEQUENCE	DESCRIPTION
printRecRefund	OPEN TAG	
description	ATTRIBUTE 1	Item description (max. 22 characters). Descriptions exceeding the limits will be truncated.
unitPrice	ATTRIBUTE 2	Price, from 0.00 to 99999999.99. The price must be set without decimal or thousands separator.
department	ATTRIBUTE 3	Department ID number, 01 to 99 (optional)
idVat	ATTRIBUTE 4	VAT index (optional)
quantity	ATTRIBUTE 5	Item quantity (optional)
/printRecItemAdjustment	CLOSE TAG	

- Printing a goods return.

NOTE:
The fiscal receipt cannot be closed if the subtotal is negative.



printRecRefundVoid

Cancelling return of goods

Command:

<printRecRefundVoid></printRecRefundVoid>

Where:

TAG	SEQUENCE	DESCRIPTION
printRecRefundVoid	OPEN TAG	
/printRecRefundVoid	CLOSE TAG	

- Cancelling of the last goods return operation.
- An element "printRecRefund" must necessarily precede this.



printRecSubtotal

Printing subtotal

Command:

<printRecSubtotal></printRecSubtotal>

Where:

TAG	SEQUENCE	DESCRIPTION
printRecSubtotal	OPEN TAG	
/printRecSubtotal	CLOSE TAG	

- Printing of the current subtotal of the fiscal receipt.



printRecSubtotalAdjustment

Discount/markup on subtotal

Command:

```
<printRecSubtotalAdjustment adjustmentType="" description="" amount="" idVat="" quantity=""></printRecSubtotalAdjustment>
```

Where:

TAG	SEQUENCE	DESCRIPTION
printRecSubtotalAdjustment	OPEN TAG	
adjustmentType	ATTRIBUTE 1	Discount/increase operation to be performed: 2 = value of the increase on the subtotal 3 = value of the discount on the subtotal Other values are not allowed.
description	ATTRIBUTE 2	Item description (max. 22 characters). Descriptions exceeding the limits will be truncated.
amount	ATTRIBUTE 3	Price, from 0.00 to 99999999.99. The price must be set without decimal or thousands separator.
idVat	ATTRIBUTE 4	VAT index (optional)
quantity	ATTRIBUTE 5	Item quantity (optional)
/printRecSubtotalAdjustment	CLOSE TAG	

- Applying of a subtotal discount/markup of the receipt.
- Discounts/markups are applied automatically and pro rata to each department, based on the individual department total for this particular fiscal receipt.



printRecSubtotalAdjustVoid

Discount/markup on subtotal void

Command:

<printRecSubtotalAdjustVoid></printRecSubtotalAdjustVoid>

Where:

TAG	SEQUENCE	DESCRIPTION
printRecSubtotalAdjustVoid	OPEN TAG	
/printRecSubtotalAdjustVoid	CLOSE TAG	

- Cancelling of the last subtotal discount/markup.
- The element "printRecSubtotalAdjustment" must necessarily precede this.



printRecTotal

Payments

Command:

```
<printRecTotal description="" payment="" paymentType="" paymentQty=""></printRecTotal>
```

Where:

TAG	SEQUENCE	DESCRIPTION
printRecTotal	OPEN TAG	
description	ATTRIBUTE 1	Item description (max. 22 characters). Descriptions exceeding the limits will be truncated.
payment	ATTRIBUTE 2	Price, from 0.00 to 99999999.99. The price must be set without decimal or thousands separator.
paymentType	ATTRIBUTE 3	Type of payment (from 1 to 30, based on database programming on the printer).
paymentQty	ATTRIBUTE 4	Quantity in relation to the payment, from 0 to 99 (optional).
/printRecTotal	CLOSE TAG	

- Performing of a payment.
- It is possible to use multiple "printRecTotal" lines for mixed payments.



printRecVoid

Fiscal receipt void

Command:

```
<printRecVoid description =""></printRecVoid>
```

Where:

TAG	SEQUENCE	DESCRIPTION
printRecVoid	OPEN TAG	
description	ATTRIBUTE 1	Item description (max. 22 characters). Descriptions exceeding the limits will be truncated.
/printRecVoid	CLOSE TAG	

- Cancelling of the current tax receipt.

NOTE:
To completely close the transaction and perform the receipt cut, the "printRecVoid" command must be followed by the command "endFiscalReceiptCut".



printRowTrailer

Printing a line of text at the bottom of the receipt (trailer)

Command:

```
<printRowTrailer font="" line=""></printRowTrailer>
```

Where:

TAG	SEQUENCE	DESCRIPTION
printRowTrailer	OPEN TAG	
font	ATTRIBUTE 1	Font type: 1 = normal 2 = bold 3 = length 42 characters 4 = double height 5 = double width 6 = italic 7 = normal / double height / 42 characters 8 = bold / 42 characters 9 = bold / double height / 42 characters A = inverse B = 66 characters C = 66 reverse characters D = 60 characters Z = half height
line	ATTRIBUTE 2	Line of text to print. The maximum length is set according to the "font" attribute.
/printRowTrailer	CLOSE TAG	



printTotalRoundingMarkup

Rounding of the total performed by command and not automatically by the device

Command:

```
<printTotalRoundingMarkup amount="">/printTotalRoundingMarkup</pre>

---


```

Where:

TAG	SEQUENCE	DESCRIPTION
printTotalRoundingMarkup	OPEN TAG	
amount	ATTRIBUTE 1	Rounding off in cents
/printTotalRoundingMarkup	CLOSE TAG	



printXReport

X Report

Command:

```
<printXReport></printXReport>
```

Where:

TAG	SEQUENCE	DESCRIPTION
printXReport	OPEN TAG	
/printXReport	CLOSE TAG	

- Printing of the daily reading report (X Report).



printXZReport

X Report and Z Report

Command:

```
<printXZReport description=" "></printXZReport>
```

Where:

TAG	SEQUENCE	DESCRIPTION
printXZReport	OPEN TAG	
description (optional)	ATTRIBUTE 1	Line of text that may be printed after the fiscal zeroset
/printXZReport	CLOSE TAG	

- Printing of the daily reading report (X Report) followed by daily zeroset (Z report).



printZReport

Z Report

Command:

```
<printZReport description=""></printZReport>
```

Where:

TAG	SEQUENCE	DESCRIPTION
printZReport	OPEN TAG	
description	ATTRIBUTE 1	Line of text that may be printed after the fiscal zeroset
/printZReport	CLOSE TAG	

- Printing of the daily fiscal zeroset (Z report).



progSingleAtecoCode

Writing of an ATECO code in the programming slots

Command:

```
<progSingleAtecoCode slot="" code=""/></progSingleAtecoCode>
```

Where:

TAG	SEQUENCE	DESCRIPTION
progSingleAtecoCode	OPEN TAG	
slot	ATTRIBUTE 1	Slot number to write (from 1 to 3)
code	ATTRIBUTE 2	ATECO code to write (6 bytes)
/progSingleAtecoCode	CLOSE TAG	



queryPrinterStatus

Getting the printer status

Command:

```
<queryPrinterStatus></queryPrinterStatus>
```

Where:

TAG	SEQUENCE	DESCRIPTION
queryPrinterStatus	OPEN TAG	
/queryPrinterStatus	CLOSE TAG	

- It allows you to get the status of the device.

Response to queryPrinterStatus in request file (exceptional case)

```
<?xml version="1.0" encoding="utf-8"?>
<response success="" status="">
  <addInfo>
    <elementList>Tag1 value</elementList>
    <lastCommand>Tag2 value</lastCommand>
    <printerStatus>Tag4 value</printerStatus>
    <fpStatus>Tag5 value</fpStatus>
    <cpuRel> Tag7 value </cpuRel>
    <mfStatus> Tag8 value </mfStatus>
  </addInfo>
</response>
```

where:

TAG	SEQUENCE	DESCRIPTION
response	OPEN TAG	
success	ATTRIBUTE 1	True/false if the error occurred/not occurred
status	ATTRIBUTE 2	Error code if present, otherwise 0
addInfo	OPEN SUB-TAG	
elementList	OPEN SUB-TAG1	e.g. lastCommand, dateTime, printerStatus
	TAG1 VALUE	
/elementList	CLOSE SUB-TAG1	
lastCommand	OPEN SUB-TAG2	Tag of the last command processed
	TAG2 VALUE	



/lastCommand	CLOSE SUB-TAG2	
dateTime	OPEN SUB-TAG3	
	TAG3 VALUE	Current date and time
/dateTime	CLOSE SUB-TAG3	
printerStatus	OPEN SUB-TAG4	
	TAG4 VALUE	S1S2S3S4S5 where: S1 = paper compartment cover open [0/1] S2 = end of paper [0/1] S3 = near end paper [0/1] S4 = EJ full [0/1] S5 = EJ almost full [0/1]
/printerStatus	CLOSE SUB-TAG4	
fpStatus	OPEN SUB-TAG5	
	TAG5 VALUE	X1X2X3 where: 000 = no receipt in progress 100 = fiscal receipt open 010 = non-fiscal receipt open 001 = invoice open
/fpStatus	CLOSE SUB-TAG5	
receiptStep	OPEN SUB-TAG6	
	TAG6 VALUE	Indicate the steps of the receipt: 0 = sale concluded 1 = sale in progress 2 = payments in progress 3 = print of the remainder 4 = print fixed line (optional) 5 = closing done 6 = print courtesy message (optional) 7 = eject done 8 = non-fiscal receipt open
/receiptStep	CLOSE SUB-TAG6	
cpuRel	OPEN SUB-TAG7	
	TAG7 VALUE	Firmware version
/cpuRel	CLOSE SUB-TAG7	
mfStatus	OPEN SUB-TAG8	
	TAG8 VALUE	Status of the fiscal memory (OK, full, not present)
/mfStatus	CLOSE SUB-TAG8	
/addInfo	CLOSE SUB-TAG	
/response	CLOSE TAG	



For example:

```
<?xml version="1.0" encoding="utf-8"?>
<response success="TRUE" status="0">
  <addInfo>
    <elementList>lastCommand,cpuRel,mfStatus,fpStatus,printerStatus</elementList>
    <lastCommand>queryPrinterStatus</lastCommand>
    <cpuRel>BIG II TOUCH Rel. 1.59n</cpuRel>
    <mfStatus>MF OK</mfStatus>
    <fpStatus>000</fpStatus>
    <printerStatus>00000</printerStatus>
  </addInfo>
</response>
```



readSingleAtecoCode

Reading of a programmed ATECO code

Command:

```
<readSingleAtecoCode slot=""></readSingleAtecoCode>
```

Where:

TAG	SEQUENCE	DESCRIPTION
readSingleAtecoCode	OPEN TAG	
slot	ATTRIBUTE 1	Slot number to read (from 1 to 3)
/readSingleAtecoCode	CLOSE TAG	

- ResponseBuf: 1 byte of slot, 2 bytes of length, 6 bytes of ATECO code.



resetPrinter

Fiscal receipt reset

Command:

```
<resetPrinter></resetPrinter>
```

Where:

TAG	SEQUENCE	DESCRIPTION
resetPrinter	OPEN TAG	
/resetPrinter	CLOSE TAG	

- Automatically cancel any open fiscal receipt, fiscal document or non-fiscal receipt.



setCurrentAtecoCode

Setting the ATECO code for the current receipt

Command:

```
<setCurrentAtecoCode slot=""></setCurrentAtecoCode>
```

Where:

TAG	SEQUENCE	DESCRIPTION
setCurrentAtecoCode	OPEN TAG	
slot	ATTRIBUTE 1	Slot number to write (from 1 to 3)
/getCurrentAtecoCod	CLOSE TAG	



setDateTime

Setting date and time

This command can also be used when FPU mode is not active.

Command:

```
<setDateTime date=""></setDateTime>
```

Where:

TAG	SEQUENCE	DESCRIPTION
setDateTime	OPEN TAG	
date	ATTRIBUTE 1	Date and time (DDMMYYhhmm)
/setDateTime	CLOSE TAG	



setHeaderLine

Setting header lines

Command:

```
<setHeaderLine description="" rowNum="" type=""></setHeaderLine>
```

Where:

TAG	SEQUENCE	DESCRIPTION
setHeaderLine	OPEN TAG	
description	ATTRIBUTE 1	Header text
rowNum	ATTRIBUTE 2	Row number (from 1 to getHeaderLineCount)
type	ATTRIBUTE 3	Type: 1 = normal 2 = bold 3 = 42 characters 4 = double height 5 = double width 6 = italic l = icon number
/setHeaderLine	CLOSE TAG	



setLotteryCode

Setting lottery code in the receipt

Command:

```
<setLotteryCode code=""></setLotteryCode>
```

Where:

TAG	SEQUENCE	DESCRIPTION
setLotteryCode	OPEN TAG	
code	ATTRIBUTE 1	Lottery code
/setLotteryCode	CLOSE TAG	



setVatRate

Setting VAT rate values

Command:

```
<setVatRate numVat="" vatRate=""></setVatRate>
```

Where:

TAG	SEQUENCE	DESCRIPTION
setVatRate	OPEN TAG	
numVat	ATTRIBUTE 1	VAT rate index
vatRate	ATTRIBUTE 2	VAT rate value (4 bytes: 2 integers and 2 decimals)
/setVatRate	CLOSE TAG	



EXAMPLES

Commands

```
<?xml version="1.0" encoding="utf-8"?>
<printerCommand>
  <queryPrinterStatus></queryPrinterStatus>
</printerCommand>
```

Fiscal document

▪ Example 1: INVOICE

```
<?xml version="1.0" encoding="utf-8"?>
<printerFiscalDocument>
  <beginFiscalDocument documentType="directInvoice" documentNumber="0"></beginFiscalDocument>
  <displayText data="Message F On customer display "></displayText>
  <printRecItem description="PANINO" unitPrice="350" department="1"></printRecItem>
  <printRecSubtotalAdjustment adjustmentType="2" description="maggio subt" amount="50"></printRecSubtotalAdjustment>
  <printRecSubtotal></printRecSubtotal>
  <printRecTotal description="Payment in Cash" payment="600" paymentType="1"></printRecTotal>
  <printRecTotal description="Payment 4" payment="400" paymentType="4"></printRecTotal>
  <endFiscalReceiptCut></endFiscalReceiptCut>
</printerFiscalDocument>
```

▪ Example 2: INVOICE

```
<?xml version="1.0" encoding="utf-8"?>
<printerFiscalDocument>
  <beginFiscalDocument documentType="directInvoice" documentNumber="0"></beginFiscalDocument>
  <printRecItem description="PANINO" unitPrice="350" department="1"></printRecItem>
  <printRecMessage message="Additional Row 1 3002" messageType="1" font="1"></printRecMessage>
  <printRecSubtotalAdjustment adjustmentType="2" description="maggio subt" amount="50"></printRecSubtotalAdjustment>
  <printRecMessage message="CLIENTE CON 3010" messageType="3" font="C"></printRecMessage>
  <printRecMessage message="cliente CON 3010" messageType="3" font="C"></printRecMessage>
  <printRecMessage message="CLIENTE CON 3010" messageType="3" font="C"></printRecMessage>
  <printRecMessage message="cliente CON 3010" messageType="3" font="C"></printRecMessage>
  <printRecTotal description="Payment in Cash" payment="600" paymentType="1"></printRecTotal>
  <printRecTotal description="Payment 4" payment="400" paymentType="4"></printRecTotal>
  <endFiscalReceiptCut></endFiscalReceiptCut>
</printerFiscalDocument>
```



- Example 3: CREDIT NOTE

```
<?xml version="1.0" encoding="utf-8"?>
<printerFiscalDocument>
<beginFiscalDocument documentType="notacredito"></beginFiscalDocument>
<printRecMessage message="Additional Row 1 3002" messageType="1" font="1"></printRecMessage>
<printRecItem description="PANINO" unitPrice="350" department ="1"></printRecItem>
<printRecSubtotalAdjustment adjustmentType="2" description="maggio subt" amount="50"></printRecSubtotalAdjustment>
<printRecTotal description="Payment in Cash" payment="350" paymentType ="1"></printRecTotal>
<printRecMessage message="123456789012" messageType="3" font="P"></printRecMessage>
<endFiscalReceiptCut></endFiscalReceiptCut>
</printerFiscalDocument>
```



Fiscal receipt

```
<?xml version="1.0" encoding="utf-8"?>
<printerFiscalReceipt>
<beginFiscalReceipt></beginFiscalReceipt>
<displayText data="Message 1 On customer display "></displayText>
<printRecItem description="PANINO" unitPrice="350" department ="1"></printRecItem>
<printRecItem description="PIZZA" unitPrice="450" department ="2"></printRecItem>
<printRecSubtotalAdjustment adjustmentType="2" description="maggio subt" amount="50"></printRecSubtotalAdjustment>
<printRecSubtotal></printRecSubtotal>
<printRecTotal description="Payment in Cash" payment="600" paymentType ="1"></printRecTotal>
<printRecMessage message="Additional Row 1 3008" messageType="2" font="1"></printRecMessage>
<printRecMessage message="Additional Row 2 3008" messageType="2" font="1"></printRecMessage>
<printRecTotal description="Payment 4" payment="400" paymentType ="4"></printRecTotal>
<printRecMessage message="Additional Row 1 3010" messageType="3" font="1"></printRecMessage>
<printRecMessage message="Additional Row 2 3010" messageType="3" font="1"></printRecMessage>
<displayText data="Message 2 On customer display"></displayText>
<endFiscalReceiptCut></endFiscalReceiptCut>
</printerFiscalReceipt>
```



Non-fiscal receipt

```
<?xml version="1.0" encoding="utf-8"?>
<printerNotFiscal>
<beginNotFiscal></beginNotFiscal>
<printNormal font="1" data="Not Fiscal receipt row 1"></printNormal>
<printNormal font="1" data="Not Fiscal receipt row 2"></printNormal>
<printNormal font="1" data="Not Fiscal receipt row 3"></printNormal>
<printBarCode hRIPosition="2" codeType="1" code ="1234567890123"></printBarCode>
<printGraphicCoupon data="121"></printGraphicCoupon>
<endNotFiscal></endNotFiscal>
</printerNotFiscal>
```




Report

Example 1: FISCAL ZEROSET

```
<?xml version="1.0" encoding="utf-8"?>  
<printerFiscalReport>  
<printZReport description=""></printZReport>  
</printerFiscalReport>
```





CUSTOM S.p.A.

World Headquarters

Via Berettine, 2/B - 43010 Fontevivo, Parma

ITALY

Tel. +39 0521 680111 - Fax +39 0521 610701

info@custom.biz - www.custom.biz

All rights reserved

www.custom.biz

STATUS REPORT GUIDE

1 REPORT CHANGES


REV.	DATE	DESCRIPTION
1.00	10/04/2019	First issue.
1.10	02/09/2019	Added serious bug list. Some minor corrections.
1.20	25/08/2020	Added lottery errors.
1.30	15/11/2002	Added error 78.
1.40	19/05/2023	Added error 46.
1.50	23/08/2024	General revision of the document and some minor corrections. Deleted obsolete errors.
2.00	19/09/2025	New graphic layout.

2 ERROR CODES SHOWN ON THE DISPLAY

The following table shows a list of serious error codes that can appear on the display and a brief description of the problem, as well as any action to be taken to solve the problem.

Since these are serious errors, it is almost always recommended to contact Technical Assistance in order to solve the problem.

NOTE:
Not all the errors listed below may be available. They depend on the type of device you are using and on the type of peripherals connected.

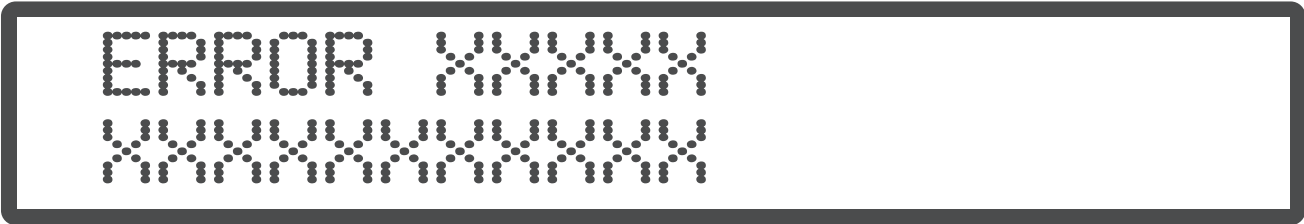

CODE	DESCRIPTION / ERROR EXPLANATION
01	CORRUPTED RAM. Corrupted RAM memory. Contact the technical service.
02	CLOCK READING Error in clock reading. Restart the device. If the error persists, contact the technical service.
05	PRINTER DISCONNECTED Printing mechanism disconnected. Contact the technical service.
06	INTERNAL DISK ERROR Corrupted internal disk. Restart the device. If the error persists, contact the technical service.
07	FM WRITING ERROR Writing error in fiscal memory. Restart the device. If the error persists, contact the technical service.
09	TPM/CRYPTO CHIP ERROR Crypto chip error. Contact the technical service.
11	DIFFERENT SERIAL NO. Serial number in fiscal memory is different than serial number in RAM memory. Restart the device. If the error persists, contact the technical service.
13	FM DISCONNECTION Disconnected fiscal memory. Contact the technical service.

CODE	DESCRIPTION / ERROR EXPLANATION
14	FM NOT COMPATIBLE Fiscal memory is not compatible. Contact the technical service.
17	FISC. REC. WRITING Fiscalization record writing error. Contact the technical service.
19	VAT WRITING INTO FM Error writing VAT in the fiscal memory. Contact the technical service.
20	ZEROSET. REC. WRIT. Error writing zeroset record in fiscal memory. Restart the device. If the error persists, contact the technical service.
21	FISCAL MEMORY FULL There is no enough space in fiscal memory to write the record. Restart the device. If the error persists, contact the technical service.
23	FM SERIAL NO. Serial number in fiscal memory is not matching. Restart the device. If the error persists, contact the technical service.
26	EJ WRITING ERROR EJ writing error. Check if the electronic journal is correctly inserted. If the error persists, contact the technical service.
27	DATABASE READ/WRITE ERROR (Only valid for 2nd and 4th generation devices). Database read or write error. If the error persists, contact technical support.
28	FM WRITING ERROR Fiscal memory writing error. Contact the technical service.
32	EJ DISCONNECTION Electronic journal error because it is disconnected. Check if the electronic journal is correctly inserted. If the error persists, contact the technical service.
33	EJ FAILURE Electronic journal error because it is damaged/broken. Check if the electronic journal is correctly inserted. If the error persists, contact the technical service.
35	UNSUCCESSFUL TRANSFER File transfer on external MMC/SD card error. Retry to perform the file(s) transfer. If the error persists, contact the technical service.
36	MEMORIES READ/WRITE ERROR (Only valid for 2nd and 4th generation devices). Electronic journal or fiscal memory read or write error. If error persists, contact technical support.

CODE	DESCRIPTION / ERROR EXPLANATION
37	NOR FILES WRONG SIZE A RESET 3 procedure is being attempted with not compatible data because of the NOR files length different than the one expected. Perform a RESET 1 procedure.
46	CHANGE NOT ALLOWED It is not possible to give the change for the chosen form of payment.

3 PROTOCOL ERROR CODES

The following table shows a list of error codes, a brief description of the problem and eventually any action that can be taken to solve the problem.

The message mentioned in the “Description” column does not necessarily reflect the message that is shown on the terminal (when available) but it is a brief explanation referring to the error code returned.

NOTE:
Not all the errors listed below may be available. They depend on the type of device you are using and on the type of peripherals connected.

CODE	DESCRIPTION / ERROR EXPLANATION
0	ERROR <error code> UNKNOWN (Only valid for 2nd and 4th generation devices). An unknown error has been generated. Contact the customer support.
1	NOT PRESENT (Only valid for 2nd and 4th generation devices). File or archive not present.
2	FISCAL MEMORY RX ERROR (Only valid for 2nd and 4th generation devices). There was an error in reading the fiscal memory data. Technical service is required.
3	INVALID VALUE The data input is not correct, delete it and retry.
4	ERROR OF INTERNAL CODE If the requested operation is not executed, retry. If the problem persists, contact the technical service. In the case of device with battery, it can occurs when the battery is low. Connect the device to the network and recharge it.
5	OPERATION NOT POSSIBLE The operation executed is not correct, close the documents in progress a retry.
6	ERROR WRITING LOGOTYPE IN FISCAL MEMORY (Only valid for 2nd and 4th generation devices). It is not possible to write the fiscal logotype on fiscal memory.
7	ERROR ON TOTAL DESCRIPTION It has been sent the wording total in a sale.
8	ALREADY DONE It is impossible to execute it again.

CODE	DESCRIPTION / ERROR EXPLANATION
9	DOCUMENT TOTAL OVERFLOW The amount exceed the maximum value on receipt total (€ 9999999,99).
10	DAILY TOTAL OVERFLOW The amount exceed the maximum value on daily total (€ 9999999,99).
11	ERROR IN AMOUNT The price/amount is not correct.
12	INVALID DATE A date was entered that is not valid for the one stored on the device.
13	INVALID DATE/TIME A not valid date/time has been inserted. Correct it and re-set it.
14	DIFFERENT DATE A data different from the one stored has been inserted. Correct it and re-set it.
16	PAPER END Error because of paper end. Replace paper.
17	SLIP PRINTER Error in slip printer.
18	BUSINESS NAME MISSING Document heading is missing.
19	FISCAL MEMORY ZEROSET NOT POSSIBLE (Only valid for 2nd and 4th generation devices.) The zeroset could not be written to fiscal memory.
20	Reserved.
21	OPEN DOCUMENT A remote terminal is sending a document. Wait for the end of current operation.
22	WRONG DATES In the request has been inserted a not suitable date.
23	NEGATIVE TOTAL The total of the receipt is negative, add amounts or cancel.

CODE	DESCRIPTION / ERROR EXPLANATION
24	ERROR IN COMMAND LENGTH An incorrect or unsupported length command was sent.
25	PAYMENT NOT COMPLETED A not completed payment was sent.
26	PROCEDURE ABORTED BY USER The procedure was interrupted by the user.
27	DB ENGINE COD. <error code> Generic database error (an internal subcode is displayed that defines the type of SQLite error). Contact technical service.
28	NOT PROGRAMMED VAT Set the VAT rate.
29	NEGATIVE VAT A negative VAT rate has been set.
30	EJ FULL The electronic journal (EJ) is full. Replace it.
31	EJ NEARLY FULL The electronic journal (EJ) is nearly full. Replace it as soon as possible.
32	EJ INITIALIZATION NOT POSSIBLE The new EJ could not be initialized. Replace it with another and contact the technical service.
33	EJ NOT PRESENT The EJ is missing, insert it into the device.
34	WRONG EJ DATA (Only valid for 2nd and 4th generation devices). Attempt to write to EJ failed.
35	FISCAL MEMORY WAS DISCONNECTED (Only valid for 2nd and 4th generation devices). The fiscal memory has been disconnected. Contact the technical service.
36	MEMORIES READ/WRITE ERROR (Only valid for 2nd and 4th generation devices). Electronic journal or fiscal memory read or write error. If error persists, contact technical support.

CODE	DESCRIPTION / ERROR EXPLANATION
37	COVER OPEN ON DUMP The paper cover has been opened during the printing of a fiscal report.
38	SD/MMC NOT IDENTIFIED Electronic journal not approved. Contact the authorized dealer.
39	SD/MMC WITH PASSWORD SD/MMC inserted is not usable because protected with password. Use one not protected.
40	EJ DATA NOT FOUND (Only valid for 2nd and 4th generation devices). The data searched on the electronic journal has not been found.
41	WRONG EJ It has been inserted an electronic journal not associated with the device. Insert the correct electronic journal.
43	EJ CLONED (Only valid for 2nd and 4th generation devices). The electronic journal has been copied/cloned.
44	UPGRADE REQUIRED A firmware update is ready and needs confirmation.
46	CHANGE NOT ALLOWED It is not possible to give the change for the chosen form of payment.
47	NOT FISCALIZED The device is not fiscalized. Perform a fiscalization procedure.
48	BUSY CONTROL BOX Busy control box error. Restart the control box.
49	WRONG CONTROL BOX SERIAL NUMBER Invalid serial number for control box.
50	CB/FM NOT FOUND The control box or the fiscal memory disconnection as been detected. Contact the technical service.
51	FISCAL MEMORY FULL The fiscal memory is full. Contact the technical service.

CODE	DESCRIPTION / ERROR EXPLANATION
52	HWINIT JUMPER INSERTED Hardware Init. jumper inserted. Contact the technical service.
53	DEVICE ALREADY SERIALIZED Attempt to serialize a fiscal memory already serialized.
54	FISCAL CLOSURE NECESSARY The fiscal closure (fiscal zeroset) is needed.
55	TRAINING MODE ENABLED The training mode is enabled.
56	DISPLAY NOT FOUND (it is emitted a beep every 3 seconds) The customer display is not connected.
57	DATE/TIME NOT SET Date/time has not been inserted.
58	Reserved.
59	DEVICE NOT FISCALIZED/ACTIVATED Device not fiscalized/activated because already fiscalized.
60	DEVICE NOT SERIALIZED The device has not been serialized. Contact the technical service.
61	24H FROM LAST CLOSURE 24 hours have passed since the last fiscal closure. Perform a fiscal closure.
62	RECEIVING DATA IN PROGRESS Remote data reception with open receipt; close the receipt from the keyboard. The receipt in memory will be printed when the current keyboard transaction is closed.
63	TRANSACTION FAILED Transaction failed on EFT-POS.
64	COVER OPEN Make sure the paper cover is closed.
65	HEAD POWER ERROR High voltage on print head. Contact the technical service.

CODE	DESCRIPTION / ERROR EXPLANATION
66	HEAD TEMPERATURE ERROR High temperature on thermal head. Contact the technical service.
67	CUTTER ERROR Cutter error. Contact the technical service.
68	HEAD DISCONNECTED Contact the technical service.
69	SD/MMC WRONG LENGTH (Only valid for 2nd and 4th generation devices). Card capacity (EJ) not supported. Replace with a card (EJ) of proper capacity.
70	24H EXCEEDED More than 24 hours have passed since the first sale. Perform a fiscal closure.
71	2ND Z REPORT NOT ALLOWED A second fiscal reset is not allowed. Perform at least one sale.
72	HWINIT REQUIRED A hardware init is required. Perform a hardware initialization.
73	TECHNICAL ASSISTANCE Periodic verification expired, device blocked. The technical assistance is required. Contact the technical assistance.
74	RX TIMEOUT Time out in receiving task.
75	DEVICE BUSY The device is busy consolidating a return or a cancellation.
76	DEVICE BUSY The device is busy consolidating a dematerialized receipt.
77	DECOMMISSIONED DEVICE (Only valid for 2nd and 4th generation devices). Decommissioned device.
78	INVALID FW LICENSE Unable to proceed without first purchasing the license.
81	NOT SERIALIZED The serial number is missing.

CODE	DESCRIPTION / ERROR EXPLANATION
82	NOT ACTIVATED It is required an activation.
83	DEVICE NOT REGISTERED The device has not yet been registered.
84	CERTIFICATE EXPIRED The device SSL certificate has expired.
85	PERFORM ZEROSET AFTER HWINIT It is necessary a fiscal zeroset after a hardware init.
86	NO ENTRY FOUND File search failed.
87	FILE OPENED A file is still open.
88	NO FILE OPENED No any file is open.
89	GENERIC ERROR Generic file system error.
90	END OF FILE The end of the file has been reached.
91	DISK FULL The requested volume is full.
92	INVALID PARAMETER There is an error in the command.
93	WRITE ONLY The file is write only.
94	READ ONLY The file is read only.
95	READ ERROR There is an error in file reading.

CODE	DESCRIPTION / ERROR EXPLANATION
96	WRITE ERROR There is an error in file writing.
97	PLEASE WAIT
98	BUSY Error available as an echo only from the CUSTOM protocol. The device is busy while processing a keyboard operation. End the operation and return to the standby status.
99	ECR Error available as an echo only from the CUSTOM protocol. Generic error of the management engine (refer to command 1015, see CUSTOM protocol manual cod. 77100000030300).
100	ERROR <error code> UNKNOWN An unknown error has been generated. Contact the technical assistance.
101	MEMORY FULL The memory available for storing transient operations is exhausted. It is necessary to carry out the relative zeroing (for example, clearing the settlements by financial clearing).
102	MAX AMOUNT PASSED The price entered on the flight is higher than the maximum price set for that department.
103	<line>-<column> NOT LINKED A key has been pressed that has no function.
104	KEYBOARD NOT SELECTED A keyboard has not been selected.
105	WRONG COMMUNICATION Check the network configuration parameters.
106	LOW BATTERY Leave the device on for 24 hours. If the problem persists, contact the technical support.
107	UPGRADE FAILED The specified file upgrade failed. Check that the files used are the correct ones.
108	MINIMUM AMOUNT NOT REACHED The input price "on the go" is lower than the minimum. value set for the department.
109	COUNTERS NOT RESET It was not possible to reset the corresponding counter. The reset is incomplete.

CODE	DESCRIPTION / ERROR EXPLANATION
110	CONTROL BOX NOT SET Control box not configured. Configure the control box.
111	DRAM MEMORY FULL The memory is full. Restart the control box.
112	USER NOT RECOGNIZED, CHECK USER NAME Communication problem with the fiscal portal. Check the connection parameters to the fiscal portal.
113	WRONG FTP PASSWORD, CHECK PASSWORD Communication problem with the fiscal portal. Check the connection parameters to the fiscal portal.
114	FILE UNAVAILABLE, CHECK SERVER DIR The file searched on the fiscal portal does not exist.
115	XML SYNTAX ERROR, CHECK FILE XML Communication error with the portal due to incorrect syntax of the XML file.
117	FUNCTION NOT ALLOWED The requested function is not allowed at this moment.
118	WRONG SETTING The entered quantity exceeds 65535,99 units.
121	WRONG DISCOUNT The entered discount is bigger than 100%.
122	VALUE NOT ALLOWED The entered value is not included between the minimum and the maximum value available for that parameter.
123	WRONG PASSWORD The password was not entered correctly (incorrect password or different password).
124	WRONG VAT RATE The selected VAT rate is incorrect.
125	WRONG OBEX COMMAND Modem transmission error.
126	INVALID FILE SIZE, CONTROL JAD/JAR FILE Error in the file size used to update the modem.

CODE	DESCRIPTION / ERROR EXPLANATION
127	WRONG AT COMMAND Modem communication error.
128	MODEM COMMUNICATION ERROR Modem communication error.
129	WRONG PROTOCOL CHECKSUM Modem communication error.
130	WRONG PROTOCOL COMMAND Modem communication error.
131	WRONG PROTOCOL PARAMETER Modem communication error.
132	DEFERRED INVOICE REQUIRED The deferred invoice is required.
133	TICKET INVOICE REQUIRED The ticked invoice is required.
134	CLOSE DOCUMENT Document closure is required.
135	COLLECT CREDITS It has been given credit to a customer who needs to be deleted. It will not be possible to delete it until the remaining credit is collected and cleared.
136	NOT ENOUGH CASH The amount of cash available is not enough for the requested operation.
137	INVALID PAYMENT The selected payment type is not allowed to complete the current transaction.
138	QUANTITY NOT SPECIFIED An attempt was made to enter a Department / PLU without specifying the quantity. You need to do this consistently with what is programmed for that department or for the department to which that PLU is connected.
139	MISSING DESCRIPTION The description is missing.
140	OPERATOR ALREADY SET In single ticket mode it is not allowed to set the operator for more than one time in a document. In shift mode it is not allowed to set the operator for more than one time in a shift.

CODE	DESCRIPTION / ERROR EXPLANATION
141	PAYMENT AMOUNT TOO BIG The amount entered is higher than the maximum amount programmed for that payment.
142	CHANGE TOO BIG The change calculated exceeds the maximum value programmed for that payment.
143	CUSTOMER CREDIT TOO BIG The credit that you tried to grant is higher than the maximum amount set for that customer.
144	PAYMENT NOT PRESENT The specified payment is not present.
145	PAYMENT ALREADY PRESENT The payment method is already present.
146	MODIFIER NOT PRESENT The specified modifier is not present.
147	MODIFIER ALREADY PRESENT The modifier is already present.
148	DEPARTMENT NOT PRESENT The requested department is not available because it does not exist or it has been deleted.
149	DEPARTMENT ALREADY PRESENT The department is already present.
150	PLU NOT PRESENT The requested PLU is not available because it does not exist or it has been deleted.
151	PLU ALREADY PRESENT The PLU is already present.
152	OPERATOR NOT PRESENT The requested operator is not available because it does not exist or it has been deleted.
153	OPERATOR ALREADY PRESENT The operator is already present.
154	CUSTOMER NOT PRESENT The requested customer is not available because it does not exist or it has been deleted.
155	CUSTOMER ALREADY PRESENT The customer is already present.

CODE	DESCRIPTION / ERROR EXPLANATION
156	NO CORPORATE RATES No agreement related to the company selected.
157	CORPORATE RATE NOT PRESENT The corporate rate is not present.
158	CORPORATE RATE ALREADY PRESENT The corporate rate is already present.
159	CORPORATE NOT PRESENT The corporate is not present.
160	CORPORATE ALREADY PRESENT The corporate is already present.
161	PREBILL <prebill number> NOT AVAILABLE The requested pre-bill is not related to any pre-bill stored.
162	Reserved.
163	Reserved.
164	TABLE FULL The number of strokes input for the table has reached the max. value of strokes for each document (150). Close the table.
165	TABLE EMPTY No any stroke has been input for the requested table.
166	CLOSE TABLE Before executing the requested operation close the table.
167	Reserved.
168	Reserved.
169	Reserved.
170	CONNECTION ERROR Error in GPRS connection: check access point parameters.

CODE	DESCRIPTION / ERROR EXPLANATION
171	FTP SERVER ERROR Error in FTP connection to server: check FTP parameters.
172	FILE WRITING ERROR Error writing file to FTP server: check the FTP connection with the server.
173	SIM CARD ERROR SIM card error: check if the SIM card is present and if it is inserted correctly in the modem.
174	FTP CHDIR ERROR, CHECK ID SERIAL FTP connection error: check transfer folder name on the server.
175	WRONG XML FILE SIZE Wrong dimension of Z file: check Z XML file on flash-disk.
176	INSERT PIN The SIM card requires a PIN code.
177	WRONG JAD FILE SIZE Wrong dimension of JAD file: check it on flash-disk.
178	ERROR SELECTED OPERATOR Error in the SIM card operator selection.
179	ERROR FTP OPEN CONNECTION Error in FTP connection: the connection has been already opened.
180	INVALID EVENT The ticket is not assigned to any valid event.
181	MAXIMUM CAPACITY REACHED The maximum capacity has been reached.
182	ERROR FTP FILE TRANSFER Error in transferring file from FTP server to printer.
183	ERROR MODEM BUSY Busy modem: serial communication busy with another command.
184	WRONG ACK CODE Error in the received ACK file.

CODE	DESCRIPTION / ERROR EXPLANATION
185	ERROR SENDING Z REPORT Error in sending Z report.
186	EFD SERIAL NUMBER NOT SET The serial number parameter is not correctly set in the modem database.
187	FTP CONNECTION NOT OPEN Failure during the opening of the FTP connection.
188	ERROR FTP FILE DELETE Error deleting file on FTP server.
189	MANDATORY CUSTOMER Declare the customer before closing the document.
190	PAID OUT TOO HIGH The paid out amount is too high.
191	FUNCTION NOT ACTIVATED The function you are trying to use must be enabled from the appropriate menu item.
192	MEMORY FULL, PERFORM FINANCIAL CLOSURE The memory has reached its maximum capacity. Perform a financial zeroset.
193	ERROR SAVING Z REPORT Error saving the last fiscal reset on the flash-disk.
194	MISSING CONFIRMATION Repeat the synchronization operation.
195	FTP I/O ERROR Check the FTP connection parameters.
196	WRONG EXTENDED COMMAND Check the general configuration.
197	CUSTOMER CODE MISSING Enter the customer code in the registration parameters.
198	INSERT VRN Error in entering the business license number (VAT Registration Number, VRN).

CODE	DESCRIPTION / ERROR EXPLANATION
199	INSERT TAX OFFICE An invalid VAT rate has been entered.
200	INSERT REG DATE An invalid registration date has been entered.
201	INVALID CUSTOMER CODE Check the customer code in the registration parameters.
202	INVALID SERIAL NUMBER Check the serial number.
203	LICENSE ACTIVE Check if the device has already been registered before.
204	NO LICENSE AVAILABLE Exhausted the number of licenses available for new devices.
205	REGISTRATION ERROR Contact the technical assistance.
206	BATTERY EXHAUST The device needs to be connected to the mains and it needs to be recharged.
207	INSERT TIN The entry of the technician identification is required (Technical Identification Number, TIN).
208	ACK FILE NOT RECEIVED The day's data could not be sent to the Revenue Authority.
209	ANSWER HTTP SERVER ERROR Check the network configuration parameters or the configuration parameters of the Secure Ticket service.
210	CRYPTOGRAPHY ERROR Error in cryptography operation.
211	MMC DOWNLOAD ERROR Check the Ethernet configuration parameters or the configuration parameters of the Secure Ticket service.
212	ERROR DURING FISCAL INITIALIZATION An error occurred during fiscal initialization.

CODE	DESCRIPTION / ERROR EXPLANATION
213	DEVICE BUSY IN TELEMATIC OPERATIONS The device is busy during the execution of telematic operations.
214	PERIOD OF INACTIVITY PENDING A daily fiscal closure must be performed.
215	INCORRECT VAT CODE The VAT code entered is incorrect.
216	TAMPER OPEN The device has been opened / manipulated. Contact the technical assistance.
217	BUSY DURING XML EXPORT The device is busy during the export of the XML file.
218	EXPORT LOTTERY FILE IN PROGRESS... The device is exporting the receipt lottery XML file.
219	WRONG PROTOCOL An attempt is made to send an XML file to the device but the communication protocol set is incorrect.
220	WRONG FPU MODE An attempt is made to send an XML file to the device but it is not in the correct mode (FPU mode).
221	LOTTERY SEARCH IN PROGRESS... The device is busy executing a report that provides for the search and extraction of a number of receipts from the lottery database.
222	WRONG ECR STATUS The device can not process the commands because it is in a wrong status.
223	NOT POSSIBLE TO ACCESS TO FM OR EJ It is not possible to access to the fiscal memory or to electronic journal contents since the operator does not own the permissions.
230	EEPROM WRITE ERROR (Only valid for 2nd and 4th generation devices). Error writing to EEPROM.
231	TIME SLOT NOT ALLOWED FOR SENDING (Valid only for 2nd and 4th generation devices). The sending is in the time slot in which the Revenue Agency server is not available.
232	SCALE NOT PRESENT (Only valid for 2nd and 4th generation devices). Scale not present, not connected or switched off.

CODE	DESCRIPTION / ERROR EXPLANATION
233	WEIGHT IS ZERO (Only valid for 2nd and 4th generation devices). The weight detected and communicated by the scale is zero.
235	ETHERNET SERVICE ERROR (Only valid for 2nd and 4th generation devices). The Ethernet service did not start correctly.
236	UNAUTHORIZED MIGRATION (Only valid for 2nd and 4th generation devices). The device migration was not authorized.
240	REMOTE.DB FILE NOT PRESENT (Only valid for 2nd and 4th generation devices). The remote.db file is not present or accessible.
242	SIGNATURE ERROR IN UPGRADE FILE (Only valid for 2nd and 4th generation devices). There is a signature error in the upgrade file.
243	SIGNATURE MISSING IN UPGRADE FILE (Only valid for 2nd and 4th generation devices). The signature is missing in the upgrade file.
244	MISSING CERTIFICATE (Only valid for 2nd and 4th generation devices). The certificate is not present in the fiscal memory.
245	INVALID XML (Only valid for 2nd and 4th generation devices). Invalid XML document.
248	MIGRATION ALREADY DONE (Only valid for 2nd and 4th generation devices). The device has already been migrated.
249	ACK ERROR MESSAGE (Only valid for 2nd and 4th generation devices). Error in response to the requested Ethernet service.
250	DEVICE ALREADY ACTIVATED (Only valid for 2nd and 4th generation devices). The device has already been activated.

CODE	DESCRIPTION / ERROR EXPLANATION
253	MISSING PRIVATE KEY (Only valid for 2nd and 4th generation devices). The private key is not present.
254	CSR CREATION ERROR (Only valid for 2nd and 4th generation devices). Error creating the signed certificate request (CSR) of the device.
255	INVALID XML RESPONSE (Only valid for 2nd and 4th generation devices). Error creating XML response object.

