



ARMIS API GUIDE V4.5

Armis Centrix™

March 23, 2026

Table of contents

1 Overview	20
2 Basic instructions and best practices	20
2.1 Obtaining your authorization token	20
2.1.1 Example	21
2.2 Simultaneous connections	21
2.3 API rate limiting	21
2.3.1 Best practices to avoid rate-limited errors	22
2.4 Paging through large amounts of data	22
2.5 Getting large device data sets	22
2.5.1 Example—Retrieve the first 100 devices	22
2.5.2 Example—Get the next 100 devices	23
2.6 Iterating through devices or alerts by time	24
2.6.1 Example	24
2.7 Searching for devices or alerts by time	26
2.7.1 Example—Devices	26
2.7.2 Example—Alerts by time	27
3 Access token	28
3.1 Returning a temporary access token	28
3.1.1 Permissions required	28
3.1.2 URI parameters	28
3.1.3 Example	28
3.1.4 Responses	28
4 Alerts	29
4.1 Updating alerts with the Armis Centrix™ status	29
4.1.1 Permissions required	29
4.1.2 URI parameters	29
4.1.3 Example—Setting the alert status to “UNHANDLED”	29
4.1.4 Example—Setting the alert status to “SUPPRESSED”	30
4.1.5 Example—Setting the alert status to “RESOLVED”	31
4.1.6 Responses	31

5 ARP	32
5.1 Uploading an ARP table	32
5.1.1 Permissions required	32
5.1.2 URI parameters	32
5.1.3 Example	32
5.1.4 Responses	33
6 Boundaries	34
6.1 Returning all boundaries information	34
6.1.1 Permissions required	34
6.1.2 URI parameters	34
6.1.3 Example	34
6.1.4 Response parameters	36
6.1.5 Responses	36
6.2 Getting a boundary by ID	36
6.2.1 Permissions required	36
6.2.2 URI parameters	36
6.2.3 Example	37
6.2.4 Response parameters	37
6.2.5 Responses	37
6.3 Creating a new boundary	38
6.3.1 Permissions required	38
6.3.2 URI parameters	38
6.3.3 Example	38
6.3.4 Responses	38
6.4 Deleting a boundary	38
6.4.1 Permissions required	38
6.4.2 URI parameters	39
6.4.3 Responses	39
6.5 Updating a boundary	39
6.5.1 URI parameters	39
6.5.2 Example	39
6.5.3 Responses	40
7 Business applications	41
7.1 Bulk operation associating devices to business applications	41

7.1.1 Permissions required	41
7.1.2 URI parameters	41
7.1.3 Example	41
7.1.4 Responses	41
7.2 Bulk operation on business applications	41
7.2.1 Permissions required	42
7.2.2 URI parameters	42
7.2.3 Example	42
7.2.4 Responses	42
7.3 Getting business application by ID	42
7.3.1 Permissions required	43
7.3.2 URI parameters	43
7.3.3 Example	43
7.3.4 Response parameters	44
7.3.5 Responses	44
8 Certificate	45
8.1 Returning the tenant's root CA certificate (PEM file)	45
8.1.1 Permissions required	45
8.1.2 URI parameters	45
8.1.3 Responses	45
9 Collectors	46
9.1 Creating a new collector	46
9.1.1 Permissions required	46
9.1.2 URI parameters	46
9.1.3 Example	46
9.1.4 Responses	46
9.2 Returning existing collectors	46
9.2.1 Permissions required	46
9.2.2 URI parameters	47
9.2.3 Example	47
9.2.4 Responses	47
9.3 Deleting a collector	47
9.3.1 Permissions required	47
9.3.2 URI parameters	48

9.3.3 Responses	48
9.4 Updating the collector's name	48
9.4.1 Permissions required	48
9.4.2 URI parameters	48
9.4.3 Example	48
9.4.4 Responses	49
9.5 Updating the collector's password	49
9.5.1 Permissions required	49
9.5.2 URI parameters	49
9.5.3 Example	49
9.5.4 Responses	50
9.6 Returning image URL collectors	50
9.6.1 Permissions required	50
9.6.2 URI parameters	50
9.6.3 Responses	50
9.7 Getting collector by ID	50
9.7.1 Permissions required	50
9.7.2 URI parameters	51
9.7.3 Example	51
9.7.4 Responses	51
9.8 Retrieving a list of supported collector versions	52
9.8.1 Permissions required	52
9.8.2 URI parameters	52
9.8.3 Example (JSON)	52
9.8.4 Responses	52
9.9 Updating the software update policy for multiple collectors	52
9.9.1 Permissions required	53
9.9.2 URI parameters	53
9.9.3 Example (JSON Payload)	53
9.9.4 Example (Request Body Schema)	53
9.9.5 Responses	54
9.10 Triggering a software update for the specified collector	54
9.10.1 Permissions required	55
9.10.2 URI parameters	55

9.10.3 Example	55
9.10.4 Response parameters	55
9.10.5 Responses	55
9.11 Triggering a software update to the previous version	55
9.11.1 Permissions required	56
9.11.2 URI parameters	56
9.11.3 Responses	56
10 Dashboards	57
10.1 Getting existing dashboards	57
10.1.1 Permissions required	57
10.1.2 URI parameters	57
10.1.3 Responses	57
10.2 Getting an existing dashboard by ID	57
10.2.1 Permissions required	57
10.2.2 URI parameters	57
10.2.3 Responses	58
10.3 Creating a new dashboard	58
10.3.1 Permissions required	58
10.3.2 URI parameters	58
10.3.3 Example	59
10.3.4 Responses	59
10.4 Delete dashboard by ID	59
10.4.1 Permissions required	59
10.4.2 URI parameters	59
10.4.3 Responses	60
10.5 Share dashboard by ID	60
10.5.1 Permissions required	60
10.5.2 URI parameters	60
10.5.3 Responses	61
11 Dashlets	62
11.1 Delete dashlet by ID	62
11.1.1 Permissions required	62
11.1.2 URI parameters	62
11.1.3 Responses	63

12 Devices	64
12.1 Returning device information for a given identifier	64
12.1.1 Permissions required	64
12.1.2 URI parameters	64
12.1.3 Example	64
12.1.4 Response parameters	66
12.1.5 Responses	68
12.2 Lists devices deleted within a specified time range	68
12.2.1 URI parameters	68
12.2.2 Responses	69
12.3 Returns information about devices that were merged within a specified time range	69
12.3.1 URI parameters	69
12.3.2 Responses	70
12.3.3 URI parameters	70
12.4 Updating one or more of the device's attributes	70
12.4.1 Permissions required	70
12.4.2 URI parameters	71
12.4.3 Example	71
12.4.4 Responses	71
12.5 Delete device by ID	71
12.5.1 Permissions required	72
12.5.2 URI parameters	72
12.5.3 Responses	72
12.6 Update a devices Purdue level	72
12.6.1 Permissions required	72
12.6.2 URI parameters	72
12.6.3 Example	73
12.6.4 Responses	73
12.7 Bulk operations on a device	73
12.7.1 Permissions required	73
12.7.2 Example	74
12.7.3 Responses	74
12.7.4 URI parameters	74
12.8 Updating a custom property on an Armis device	74

12.8.1 Permissions required	75
12.8.2 URI parameters	75
12.8.3 Examples	75
12.8.4 Responses	76
12.9 Returning supported keys for CSV data mapping	76
12.9.1 Permissions required	76
12.9.2 URI parameters	76
12.9.3 Responses	77
12.10 Uploading a CSV file with device data	77
12.10.1 Permissions required	77
12.10.2 URI parameters	77
12.10.3 Responses	77
12.11 Adding applications to a device	78
12.11.1 Permissions required	78
12.11.2 URI parameters	78
12.11.3 Example	78
12.12 Setting a tag on an Armis device	78
12.12.1 Permissions required	78
12.12.2 URI parameters	79
12.12.3 Example	79
12.12.4 Responses	79
12.13 Removing a tag from an Armis device	80
12.13.1 Permissions required	80
12.13.2 URI parameters	80
12.13.3 Permissions required	80
12.13.4 Example	80
12.13.5 Responses	81
13 Device applications	82
13.1 Get device applications	82
13.1.1 Permissions required	82
13.1.2 URI parameters	82
13.1.3 Example	83
13.1.4 Response parameters	85
13.1.5 Responses	85

13.2 Bulk operation on device applications	85
13.2.1 Permissions required	85
13.2.2 URI parameters	85
13.2.3 Example	86
13.2.4 Responses	86
14 Device boundaries	87
14.1 Bulk operation on device boundaries	87
14.1.1 Permissions required	87
14.1.2 URI parameters	87
14.1.3 Example	87
14.1.4 Responses	88
15 Device properties	89
15.1 Bulk operation on device properties	89
15.1.1 Permissions required	89
15.1.2 URI parameters	89
15.1.3 Example	89
15.1.4 Responses	89
16 Devices tags	90
16.1 Setting the status for a given set of tags and devices	90
16.1.1 Permissions required	90
16.1.2 URI parameters	90
16.1.3 Example	90
16.1.4 Responses	90
17 Integrations	91
17.1 Returning existing integrations	91
17.1.1 Permissions required	91
17.1.2 URI parameters	91
17.1.3 Examples	91
17.1.4 Response parameters	93
17.1.5 Responses	93
17.2 Getting the integration by ID	94
17.2.1 Permissions required	94
17.2.2 URI parameters	94
17.2.3 Example	95

17.2.4 Response parameters	96
17.2.5 Responses	96
17.3 Creating a new integration	96
17.3.1 Permissions required	96
17.3.2 URI parameters	97
17.3.3 Example	97
17.3.4 Responses	97
17.4 Deleting an integration	97
17.4.1 Permissions required	97
17.4.2 URI parameters	97
17.4.3 Responses	98
17.5 Updating the parameters of an integration by ID	98
17.5.1 Permissions required	98
17.5.2 URI parameters	98
17.5.3 Example	98
17.5.4 Responses	98
18 Policies	99
18.1 Getting all policies	99
18.1.1 Permissions required	99
18.1.2 URI parameters	99
18.1.3 Example	99
18.1.4 Response parameters	101
18.1.5 Responses	101
18.2 Getting policy by ID	101
18.2.1 Permissions required	101
18.2.2 URI parameters	101
18.2.3 Response parameters	102
18.2.4 Responses	102
18.3 Creating a new policy	103
18.3.1 Permissions required	103
18.3.2 URI parameters	103
18.3.3 Example	103
18.3.4 Response parameters	104
18.3.5 Responses	104

18.4 Deleting a policy by ID	105
18.4.1 Permissions required	105
18.4.2 URI parameters	105
18.4.3 Example	105
18.4.4 Responses	106
18.4.5 Example—Creating an Activity policy	106
18.4.6 Example—Creating a Device policy	108
18.4.7 Example—Creating an IP Connection policy	110
18.5 Updating a policy	111
18.5.1 Permissions required	111
18.5.2 URI parameters	112
18.5.3 Examples	112
18.5.4 Response parameters	114
18.5.5 Responses	115
19 Reports	116
19.1 Creating a new report	116
19.1.1 Permissions required	116
19.1.2 URI parameters	116
19.1.3 Example	117
19.1.4 Responses	117
19.2 Updating a report	117
19.2.1 Permissions required	118
19.2.2 URI parameters	118
19.2.3 Example	118
19.2.4 Responses	119
19.3 Deleting a report by ID	119
19.3.1 Permissions required	119
19.3.2 URI parameters	119
19.3.3 Responses	120
19.4 Getting report details by ID	120
19.4.1 Permissions required	120
19.4.2 URI parameters	120
19.4.3 Example	120
19.4.4 Responses	121

19.5	Getting all report details	121
19.5.1	Permissions required	121
19.5.2	URI parameters	121
19.5.3	Responses	122
19.6	Getting the latest report by ID	122
19.6.1	Permissions required	122
19.6.2	URI parameters	123
19.6.3	Responses	123
19.7	Sending a request to run a report by ID	123
19.7.1	Permissions required	124
19.7.2	URI parameters	124
19.7.3	Responses	124
19.8	System Reports	124
19.8.1	Creating a new system report	124
19.8.1.1	Permissions required	125
19.8.1.2	Request body	125
19.8.1.3	Example	125
19.8.1.4	Responses	126
19.8.2	Enabling or disabling a system report	126
19.8.2.1	Permissions required	126
19.8.2.2	URI parameters	127
19.8.2.3	Request body	127
19.8.2.4	Example	127
19.8.2.5	Responses	128
19.8.3	Getting system report results	128
19.8.3.1	Permissions required	128
19.8.3.2	URI parameters	129
19.8.3.3	Responses	129
20	Risk Factors	132
20.1	Getting Risk Factor matches by device IDs	132
20.1.1	Permissions required	132
20.1.2	URI parameters	132
20.1.3	Example	133
20.1.4	Responses	134

21 Roles	135
21.1 Getting details of all roles	135
21.1.1 Permissions required	135
21.1.2 URI parameters	135
21.1.3 Responses	135
21.2 Creating a new role	135
21.2.1 Permissions required	135
21.2.2 URI parameters	135
21.2.3 Example	136
21.2.4 Responses	140
21.3 Deleting a role	141
21.3.1 Permissions required	141
21.3.2 URI parameters	141
21.3.3 Responses	141
21.4 Get role details	141
21.4.1 Permissions required	141
21.4.2 URI parameters	141
21.4.3 Responses	142
21.5 Update role privileges	142
21.5.1 Permissions required	142
21.5.2 URI parameters	142
21.5.3 Example	142
21.5.4 Responses	146
22 Search	147
22.1 Return search result for given ASQ search string	147
22.1.1 Permissions required	147
22.1.2 URI parameters	147
22.1.3 Responses	148
22.1.4 Searches types	149
22.1.4.1 activity	150
22.1.4.1.1 Example	150
22.1.4.1.2 Response parameters	150
22.1.4.2 alerts	152
22.1.4.2.1 Examples	152

22.1.4.2.2 Response parameters	156
22.1.4.3 auditlog	157
22.1.4.3.1 Parameters	157
22.1.4.3.2 Response parameters	158
22.1.4.4 applications	159
22.1.4.4.1 Examples	159
22.1.4.4.2 Response parameters	160
22.1.4.5 businessApplications	160
22.1.4.5.1 Example	160
22.1.4.5.2 Response parameters	162
22.1.4.6 connections	163
22.1.4.6.1 Example	163
22.1.4.6.2 Response parameters	164
22.1.4.7 devices	166
22.1.4.7.1 Examples	166
22.1.4.7.2 Response parameters	169
22.1.4.8 operatingSystems	171
22.1.4.8.1 Example	171
22.1.4.8.2 Response parameters	172
22.1.4.9 riskFactors	173
22.1.4.9.1 Example	173
22.1.4.9.2 Response parameters	175
22.1.4.10 services	175
22.1.4.10.1 Example	176
22.1.4.10.2 Response parameters	176
22.1.4.11 traffic	178
22.1.4.11.1 Example	178
22.1.4.11.2 Response parameters	178
22.1.4.12 users	180
22.1.4.12.1 Example	180
22.1.4.12.2 Response parameters	181
22.1.4.13 vulnerabilities	182
22.1.4.13.1 Example	182
22.1.4.13.2 Response parameters	183

22.1.5 orderBy function	184
22.1.5.1 Examples	186
23 Sites	188
23.1 Returning all sites information	188
23.1.1 Permissions required	188
23.1.2 URI parameters	188
23.1.3 Example	189
23.1.4 Responses	190
23.2 Creating a new site	190
23.2.1 Permissions required	190
23.2.2 URI parameters	190
23.2.3 Example	190
23.2.4 Responses	191
23.3 Deleting a site	191
23.3.1 Permissions required	191
23.3.2 URI parameters	191
23.3.3 Responses	191
23.4 Getting a site by ID	192
23.4.1 Permissions required	192
23.4.2 URI parameters	192
23.4.3 Example	192
23.4.4 Responses	192
23.5 Updating a site	193
23.5.1 Permissions required	193
23.5.2 URI parameters	193
23.5.3 Example	193
23.5.4 Responses	193
23.6 Getting all integration IDs of the site	194
23.6.1 Permissions required	194
23.6.2 URI parameters	194
23.6.3 Example	194
23.6.4 Responses	194
23.7 Adding a new integration ID to the site	195
23.7.1 Permissions required	195

23.7.2	URI parameters	195
23.7.3	Example	195
23.7.4	Responses	195
23.8	Deleting an integration ID from the site	195
23.8.1	Permissions required	195
23.8.2	URI parameters	196
23.8.3	Responses	196
23.9	Getting all network equipment device IDs of the site	196
23.9.1	Permissions required	196
23.9.2	URI parameters	196
23.9.3	Example	197
23.9.4	Responses	197
23.10	Adding a new network device ID to the site	197
23.10.1	Permissions required	197
23.10.2	URI parameters	198
23.10.3	Example	198
23.10.4	Example	198
23.10.5	Responses	199
23.11	Deleting a network device ID from the site	199
23.11.1	Permissions required	199
23.11.2	URI parameters	199
23.11.3	Responses	200
24	User Asset Properties	201
24.1	Bulk operations on user asset properties	201
24.1.1	Permissions required	201
24.1.2	URI parameters	201
24.1.3	Example	201
24.1.4	Responses	202
25	Users	203
25.1	Returning existing accounts	203
25.1.1	Permissions required	203
25.1.2	URI parameters	203
25.1.3	Examples	203
25.1.4	Responses	204

25.2 Creating a new account	204
25.2.1 Permissions required	204
25.2.2 URI parameters	205
25.2.3 Example	205
25.2.4 Responses	205
25.3 Deleting a user	206
25.3.1 Permissions required	206
25.3.2 URI parameters	206
25.3.3 Responses	206
25.4 Getting a user by ID or email	206
25.4.1 Permissions required	206
25.4.2 URI parameters	206
25.4.3 Responses	207
25.5 Editing a user	207
25.5.1 Permissions required	207
25.5.2 URI parameters	207
25.5.3 Example	207
25.5.4 Responses	208
26 Vulnerability	209
26.1 Getting CVE-on-asset matches according to CVE or device IDs	209
26.1.1 Permissions required	209
26.1.2 URI parameters	209
26.1.3 Example	210
26.1.4 Responses	211
26.2 Get vulnerabilities matches by filters	211
26.2.1 Permissions required	211
26.2.2 URI parameters	211
26.2.3 Responses	212
26.3 Setting the status of CVE-on-asset matches according to CVE or device IDs	212
26.3.1 Permissions required	212
26.3.2 URI parameters	212
26.3.3 Responses	213

Armris API Guide

Document history

Version	Date	Change
4.5	March 22, 2026	Add a new endpoint for bulk risk factors <code>GET /api/v1/risk-factor-matches</code>
4.4	March 18, 2026	- Added new URI parameter to Devices section: <code>includeNetworkInterfaces</code>. - Removed note in Devices and Search sections: To get network Interface data, enter <code>networkInterface</code> in the fields text box.
4.3	February 23, 2026	Added new cursor field to search endpoint.
4.2	February 10, 2026	- Added <code>/api/v1/devices/deleted/</code> to identify deleted devices, and <code>/api/v1/devices/merged/</code> to map merged-non active device IDs to their current active counterparts to prevent data gaps during asset transitions. - Support for Serial Number as a primary identifier in the <code>/api/v1/devices/_bulk/</code> - Endpoints that are specific to the maintenance and technical versions of the collectors: <code>/api/v1/collectors/available-versions/</code> <code>/api/v1/collectors/software-update/_bulk/</code> <code>/api/v1/collectors/{collector_id}/software-update/</code> <code>/api/v1/collectors/{collector_id}/software-update/rollback/</code>
4.1	October 15, 2025	Updated note as follows: You can search for any Armris Search Query (ASQ) property using the fields box in Swagger.in. Enter property names in camelCase, as they appear in the ASQ.
4.0	September 9, 2025	- Added examples for <code>auditLog</code>. - Renamed <code>{org_name}</code> in some calls to <code><armis.instance></code>.
3.8	September 1, 2025	Added a new password-settings for collectors API call and add purdue level.
3.7	July 14, 2025	Added new system reports.

Version	Date	Change
		A new type called <code>auditLog</code> under the Search endpoint.
3.6	May 27, 2025	Document <code>networkInterface</code> for the fields text box to get network interfaces in the <code>/api/v1/devices</code> and <code>/api/v1/devices</code>.
3.5	April 29, 2025	IPv6 should be a list item.
3.4	April 3, 2025	- Added Tier support to <code>/api/v1/search/</code> for device ASQs and <code>/api/v1/devices/</code> - Added <code>deploymentType</code> to <code>/api/v1/collectors/_image/</code>
3.3	March 16, 2025	Added new <code>lastAlertUpdateTime</code> parameter
3.2	February 16, 2025	Added a note that the GET <code>/api/v1/report-results/{report_id}/</code> endpoint needs to be scheduled an run before using this endpoint.
3.1	January, 2025	Formatting and minor updates.

1 Overview

This guide describes the Armis API, which the Armis Centrix™ platform provides. You can use the Armis API to simplify the retrieval and uploading of data. This guide is intended to enable technical teams to quickly get up to speed with the Armis API and to realize proof of value as fast as possible.

Armis recommends using a tool such as Postman or Paw to quickly develop and test the Armis API. This will enable the developer to quickly debug requests to and responses from the API. These calls can then be implemented in your platform of choice.

For more information on the Armis Centrix™ platform, refer to the *Armis user guide*.

NOTE: The name *Armis Query Language (AQL)* was changed to *Armis Standard Query (ASQ)*. However, the API continues to use **aql** throughout.

2 Basic instructions and best practices

2.1 Obtaining your authorization token


The authorization token is used for authentication of the Armis API.

To obtain your secret key from the Armis console:

- Go to **Settings > API Management**.

If the secret key has not already been created, do the following:

1. Click **Create** to create the secret key.
2. Click **Show** to access the secret key. The following dialog is displayed, from which you can copy your secret key.

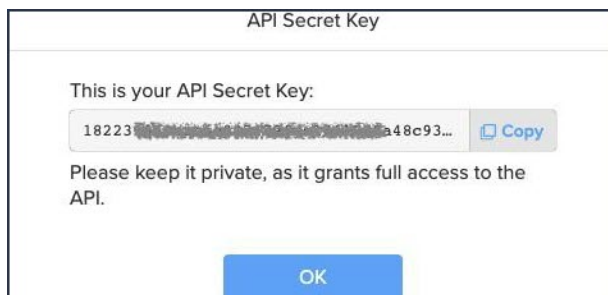

3. Once you have obtained the secret key, perform a call to the Armis API to obtain the authentication token. This can be performed as a simple REST query.

NOTE: The Python examples in this document do not include import requests.

The following are examples:

cURL

```
curl -X 'POST' \
  'https://<armis-instance>.armis.com/api/v1/access_token/' \
  -H 'accept: application/json' \
  -H 'Content-Type: application/x-www-form-urlencoded' \
  -d 'secret_key=353dfd76501e8650869b066b37463c7275122c39...'
```

2.1.1 Example

This will generate a response payload as follows in JSON format:

```
{
  "data": {
    "access_token": "e9a237ea027ff6096b1225b9c2a9bbe3ca...",
    "expiration_utc": "2021-06-14T22:30:45.373426+00:00"
  },
  "success": true
}
```

Here, the `access_token` is your authentication token to be used in subsequent Armis API calls.

NOTE: The authentication token has a lifetime of 15 minutes, so if an API call fails, a new authentication token may need to be obtained. Check the return code of the API call. If the access token is invalid, the call will result in an HTTP status of *402 Unauthorized*, and the response payload will be as follows:

```
{
  "message": "Invalid access token.",
  "success": false
}
```

2.2 Simultaneous connections

Armis recommends no more than eight simultaneous connections to the Armis API.

2.3 API rate limiting

Armis APIs are rate-limited to ensure platform stability and availability. However, your application should be built to handle limits gracefully.

The HTTP 429 status code, “Too Many Requests,” indicates that an app has sent too many requests in a given timeframe. This is part of our rate-limiting mechanism to ensure fair usage and protect our systems from abuse or unintentional overload. To avoid this error, the rate of requests needs to be slowed down.

2.3.1 Best practices to avoid rate-limited errors

Designing your app with best practices in mind is the best way to avoid rate-limited errors. Consider the following best practices when designing your app:

- Your code should stop making additional API requests until enough time has passed to retry. The recommended backoff time is *five seconds*.
- Ensure your app implements exponential backoff or similar retry mechanisms to avoid overloading the system.
- Optimize your code by filtering API queries to fetch only necessary data.
- Consider using the APIs batching capabilities. You could, for example, fetch many entities in one API call instead of a single entity by ID.
- Use caching for data that your app uses often.

2.4 Paging through large amounts of data

To page through large amounts of data, a simple modification to the Armis API REST calls is all that is required to implement this functionality. We will demonstrate this for device data, but the principle is the same for all REST calls to the Armis API.

2.5 Getting large device data sets

The following query shows how to get large amounts of device information from Armis Centrix™. Let's assume that we want to use a page size of 100, then our initial call to the API will look like this (to retrieve the first 100 devices):

cURL

```
curl "https://<armis-  
instance>.armis.com/api/v1/search/?aql=in:device&length=100"  
-H 'Authorization: <access-token>'
```

Python

```
response = requests.get(  
url="https://<armis-instance>.armis.com/api/v1/search/",  
    params={"aql": "in:devices ",  
            "length": "100"},  
    headers={"Authorization": <access-token>})
```

2.5.1 Example—Retrieve the first 100 devices

The response will be a JSON array of devices similar to this:

```
{
  "data": {
    "count": 100,
    "next": 100,
    "prev": null,
    "results": [
      ... (100 device entries)
    ],
    "total": 4415
  },
  "success": true
}
```

The key point here is that the **“length=100”** attribute is used to define the length of the “page” that you want to use.

However, we only retrieved the first 100 devices in the list. To get the next 100 devices in the list, we would then make the following call to the API:

cURL

```
curl "https://<armis-
instance>.armis.com/api/v1/search/?aql=in:device&length=100&from=100" -H
'Authorization: <access-token>'
```

Python

```
response = requests.get(
url="https://<armis-instance>.armis.com/api/v1/search/",
    params={"aql": "in:devices ",
            "length": "100"},
            "from": "100"},
    headers={"Authorization": <access-token>})
```

2.5.2 Example—Get the next 100 devices

The response will be a JSON array of devices similar to this:

```
{
  "data": {
    "count": 100,
    "next": 200,
    "prev": null,
    "results": [
      ... (100 device entries)
    ],
    "total": 4415
  },
  "success": true
}
```

There are two key points to take away from this invocation. The first is that we have added the **"from"="100"** parameter to the API call. This indicates where to start the retrieval of the next set of devices, that is, where the next page starts. The second point to notice is that we have the **"next": 200** value in the response from the API call. This indicates where to start the next API invocation with our chosen page size of 100.

The recommended procedure is to note the total number of device entries in Armis Centrix™ from the initial call to the API, then simply iterate through the appropriate number of pages (with your selected page size) until all of the device information has been retrieved.

NOTES:

- The Armis API has a maximum page size of 5,000.
- Calculating the total number of records, which happens when the query is executed can take time. For time sensitive queries, filtering by time precludes iterating through all of the records in the result set and can significantly speed up query response.

2.6 Iterating through devices or alerts by time

In the case of finding devices or alerts over a specific time period, it is useful to specify the desired time frame and order the results accordingly.

2.6.1 Example

The following example illustrates how to get all devices seen over the last 7 days, and the results are ordered by the device ID (`id`). This is important because you do not want to miss any devices because the default sort order is by `lastSeen`, which can result in different results.

cURL

```
curl "https://<armis-instance>.armis.com/api/v1/search/?
aql=in:devices&timeFrame=7%20Days&
orderBy=id" -H 'Authorization: <access-token>'
```

Python

```
response = requests.get(    url="https://<armis-
instance>.armis.com/api/v1/search/",
    params={"aql": "in:devices ",
            "timeFrame": "7 Days",
            "orderBy": "id" },
    headers={"Authorization": <access-token>})
```

The response will be a JSON array of devices similar to this:


```
{
  "data": {
    "count": 10,
    "next": 10,
    "prev": null,
    "results": [
      ... (n device entries ordered by the "id" field)
    ],
    "total": 4415
  },
  "success": true
}
```

NOTE: Iterating over a set of results is the recommended best practice to `orderBy` a fixed parameter, for example `id` (device ID), to not to miss data between pages. This is because the default order is by `lastSeen`, so results can change.

2.7 Searching for devices or alerts by time

In the case of finding devices or alerts that have been either `lastSeen` (in the case of devices) or `time` (in the case of an alert), it is useful to specify the desired time frame in general using `before:YYYY-MM-DDTHH:MM:SS` and `after:YYYY-MM-DDTHH:MM:SS`.

For more information of searching for devices, see [devices](#)

2.7.1 Example—Devices

The following example shows how to get all devices seen on and after 2022-03-10.

NOTE: The device search endpoint only supports the `after:` clause and is based on the **date** portion and is compared against the `lastSeen` value for the device.

The ASQ is: `in:devices after:2022-03-10`

cURL

```
curl "https://<armis-  
instance>.armis.com/api/v1/search/?aql=in%3Adevices%20after%3A2022-03-10"  
-H 'Authorization: <access-token>'
```

Python

```
response = requests.get(    url="https://<armis-  
instance>.armis.com/api/v1/search/",  
    params={"aql": "in:devices after:2022-03-10"},  
    headers={"Authorization": <access-token>})
```

2.7.2 Example—Alerts by time

The following example illustrates how to get all alerts seen between the after: 2022-03- 11T14:00:00 and the before: 2022-03-16T14:00:00.

NOTE: The alerts search endpoint supports both the `before:` and `after:` clauses and is based on the **full *datetime*** specified and is compared against the `time` value for the alert.

The ASQ is: `in:alerts after:2022-03-11T14:00:00 before:2022-03- 16T14:00:00`

cURL

```
curl "https://<armis-instance>.armis.com/api/v1/search/?aql=
in%3Aalerts%20after%3A2022-03-11T14%3A00%3A00%20before%3A2022-03-
16T14%3A00%3A00" -H 'Authorization: <access-token>'
```

Python

```
response = requests.get(    url="https://<armis-
instance>.armis.com/api/v1/search/",
    params={"aql": "in:alerts after:2022-03-11T14:00:00 before:2022-03-
16T14:00:00"},
    headers={"Authorization": <access-token>})
```

3 Access token

3.1 Returning a temporary access token

POST /api/v1/access_token/

3.1.1 Permissions required

- NONE

3.1.2 URI parameters

Name	Type	Description
secret-key	string (formData)	Secret key.

3.1.3 Example

The response will be a JSON array of alerts similar to this:

```
{
  "data": {
    "access_token": "85c5eb5d4fb647bc91a1db46824aac3a83a86117...",
    "expiration_utc": "2023-10-11T09:49:00.818613+00:00"
  },
  "success": true
}
```

3.1.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request, please check the arguments you passed.

4 Alerts

For more information about alerts, see the Armis user guide.

4.1 Updating alerts with the Armis Centrix™ status

PATCH /api/v1/alerts/{alert_id}/

To update a specific alert, the `alertId` is required. It is the unique numeric identifier of the alert in Armis Centrix™. Only individual alerts can be updated with this method and the update is performed using the HTTP PATCH call.

4.1.1 Permissions required

- Alert > Manage > Resolve
- Alert > Manage > Suppress

4.1.2 URI parameters

Name	Type	Description
alert_id	(path)	The ID of the designated alert
* Required		
status	string (formData)	The status of the designated alert
* Required		Available values : UNHANDLED, SUPPRESSED, RESOLVED

There are three states that can be attributed to an Armis alert:

- UNHANDLED
- SUPPRESSED
- RESOLVED

4.1.3 Example—Setting the alert status to “UNHANDLED”

cURL

```
curl -X "PATCH" "https://<armis-instance>.armis.com/api/v1/alerts/<alertId>/"
-H 'Authorization: <access-token>'
-H 'Content-Type: application/x-www-form-urlencoded'
-d "status=UNHANDLED"
```

Python

```
response = requests.patch(
    url="https://<armis-instance>.armis.com/api/v1/alerts/<alertId>",
    headers={"Authorization": <access-token>,
             "Content-Type": "application/x-www-form-urlencoded;
charset=utf-8"},
    data = {"status": "UNHANDLED"})
```

If the call is successful, it will return the following:

```
{
  "success": true
}
```

If the alert was already in the UNHANDLED state, it will return the following:

```
{
  "message": "Nothing to change",
  "success": false
}
```

4.1.4 Example—Setting the alert status to “SUPPRESSED”

cURL

```
curl -X "PATCH" "https://<armis-instance>.armis.com/api/v1/alerts/<alertId>"
-H 'Authorization: <access-token>'
-H 'Content-Type: application/x-www-form-urlencoded'
-d "status=SUPPRESSED"
```

Python

```
response = requests.patch(url="https://<armis-
instance>.armis.com/api/v1/alerts/<alertId>",
headers={"Authorization": <access-token>,
         "Content-Type": "application/x-www-form-urlencoded;
charset=utf-8"},
data = {"status": "SUPPRESSED"})
```

If the call is successful, it will return the following:

```
{
  "success": true
}
```

If the alert was already in the SUPPRESSED state, it will return the following:

```
{
  "message": "Nothing to change",
  "success": false
}
```

4.1.5 Example—Setting the alert status to “RESOLVED”

cURL

```
curl -X "PATCH" "https://<armis-instance>.armis.com/api/v1/alerts/<alertId>/"
-H 'Authorization: <access-token>'
-H 'Content-Type: application/x-www-form-urlencoded'
-d "status=RESOLVED"
```

Python

```
response = requests.patch(
url="https://<armis-instance>.armis.com/api/v1/alerts/<alertId>",
headers={"Authorization": <access-token>,
        "Content-Type": "application/x-www-form-urlencoded;
charset=utf-8"},
data = {"status": "RESOLVED"})
```

If the call is successful, it will return the following:

```
{
  "success": true
}
```

If the alert was already in the RESOLVED state, it will return the following:

```
{
  "message": "Nothing to change",
  "success": false
}
```

4.1.6 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Nothing to change.
404	Unknown alert.

5 ARP

5.1 Uploading an ARP table

POST /api/v1/arp/

5.1.1 Permissions required

- **Device > Manage**

5.1.2 URI parameters

Name	Type	Description
arp * Required	file	CSV File encoded in UTF-8.
integrationGroupId	integer	Default value: 0
expiration * Required	number (\$float)	Expiration for ARP table in days.

5.1.3 Example

To upload an ARP table into the Armis platform, the following example uses Python:

Python

```
arp_table_data = []

expiration = 1

arp_table_data.append(["10.100.100.1", "11:22:33:44:55:66"])

stream = io.StringIO()
writer = csv.writer(stream, skipinitialspace=True)
writer.writerow(["ip", "mac"])

i = 0
for i in range(len(arp_table_data)):
    writer.writerow(arp_table_data[i])
stream.seek(0)

response = requests.post(
    url="https://<armis-instance>.armis.com/api/v1/arp/",
    params={"expiration": expiration},
    headers={"Authorization": <access-token>},
    files = {"arp": stream})
```

The response is a JSON array of devices similar to this (if successful):


```
{ "success": true }
```

5.1.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
401	Authorization information is missing or invalid. Name—Authorization Description—The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type—string

6 Boundaries

6.1 Returning all boundaries information

GET /api/v1/boundaries/

Pagination is supported.

6.1.1 Permissions required

- **Settings > Boundary > Read**

6.1.2 URI parameters

Name	Type	Description
from	integer (query)	Paging from.
length	integer (query)	Paging length.
affectedSites	(query)	Filter by affected sites. If omitted, all boundaries will be returned.
includeTotal	bool (query)	Return total count, default False.
fields	(query)	Fields to show. If omitted, returns a default subset of fields.

6.1.3 Example

The response will be a JSON array of devices similar to this:

```

{
  "data": {
    "boundaries": [
      {
        "affectedSites": "",
        "id": 3,
        "name": "Off Network",
        "ruleAql": null
      },
      {
        "affectedSites": "",
        "id": 4,
        "name": "network1",
        "ruleAql": {
          "and": [
            "category:Computers"
          ]
        }
      },
      {
        "affectedSites": "",
        "id": 6,
        "name": "new boundary - test when it fails",
        "ruleAql": {
          "and": [
            "type:\"Access Points\""
          ]
        }
      },
      {
        "affectedSites": "Meraki,switch",
        "id": 7,
        "name": "asdf",
        "ruleAql": {
          "and": [
            "name:rule1"
          ]
        }
      }
    ],
    "count": 4,
    "next": 7,
    "prev": 3
  },
  "success": true
}

```

6.1.4 Response parameters

Name	Type	Description
affectedSites	string	Specific sites affected by the boundary logic. E.g., Meraki, Switch, Site A, Site B.
id	integer	The ID assigned to the boundary.
name	string	The boundary's name. E.g., Corporate, Guest, Off Network.
ruleAql	JSON	The rule ASQ parameters.

6.1.5 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.

6.2 Getting a boundary by ID

GET `/api/v1/boundaries/{boundary_id}/`

6.2.1 Permissions required

- **Settings > Boundary > Read**

6.2.2 URI parameters

Name	Type	Description
boundary_id	(path)	The boundary ID in the Armis system.
* Required		
fields	(query)	Fields to show. If omitted, returns a default subset of fields.

6.2.3 Example

```
{
  "data": {
    "affectedSites": "",
    "id": 1,
    "name": "Corporate",
    "ruleAql": {
      "or": [
        "broadcastSsid:Sky,Arm",
        "lastConnectedSsid:Sky,Arm"
      ]
    }
  },
  "success": true
}
```

6.2.4 Response parameters

Name	Type	Description
affectedSites	string	Specific sites affected by the boundary logic. E.g., Meraki, Switch, Site A, Site B.
id	integer	The ID assigned to the boundary.
name	string	The boundary's name. E.g., Corporate, Guest, Off Network.
ruleAql	JSON	The rule ASQ parameters.

6.2.5 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.
404	Unknown boundary.

6.3 Creating a new boundary

POST /api/v1/boundaries/

6.3.1 Permissions required

- **Settings > Boundary > Manage > Create**

6.3.2 URI parameters

Name	Type	Description
site object	(body)	JSON describing the boundary.

6.3.3 Example

```
{
  "affectedSites": "siteA, siteB",
  "name": "my boundary name",
  "ruleAql": {
    "or": [
      "type:ACCESS_POINT"
    ]
  }
}
```

6.3.4 Responses

This API call has the following HTTP status codes:

Code	Description
201	Request accepted and sent for further processing.
400	Bad request.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.

6.4 Deleting a boundary

DELETE /api/v1/boundaries/{boundary_id}/

6.4.1 Permissions required

- **Settings > Boundary > Manage > Delete**

6.4.2 URI parameters

Name	Type	Description
boundary_id	(path)	The boundary ID in the Armis system.
* Required		

6.4.3 Responses

This API call has the following HTTP status codes:

Code	Description
204	The entity deleted successfully.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.
404	Unknown boundary.

6.5 Updating a boundary

PATCH `/api/v1/boundaries/{boundary_id}/`

6.5.1 URI parameters

Name	Type	Description
boundary_id	(path)	The boundary ID in the Armis system.
* Required		
site	object (body)	JSON describing the boundary.

6.5.2 Example

```
{
  "affectedSites": "siteA, siteB",
  "name": "my boundary name",
  "ruleAql": {
    "or": [
      "type:ACCESS_POINT"
    ]
  }
}
```

6.5.3 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.
404	Unknown boundary.

7 Business applications

7.1 Bulk operation associating devices to business applications

POST /api/v1/business-application-device-associations/_bulk/

7.1.1 Permissions required

- Business Applications > Manage > Upsert

7.1.2 URI parameters

Name	Type	Description
body	array[object] (body)	

7.1.3 Example

```
[
  {
    "upsert": {
      "businessApplicationId": 0,
      "deviceId": 0
    }
  }
]
```

7.1.4 Responses

This API call has the following HTTP status codes:

Code	Description
207	Each item in the request has been processed on its own. Response indicates status of each individual item.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.

7.2 Bulk operation on business applications

POST /api/v1/business-applications/_bulk/

7.2.1 Permissions required

- Business Applications > Manage > Upsert

7.2.2 URI parameters

Name	Type	Description
body	array[object]	

7.2.3 Example

```
[
  {
    "upsert": {
      "businessCriticality": "CRITICAL",
      "businessOwnerFullName": "Iorek B",
      "businessUnit": "",
      "description": "Database application to store our users",
      "environmentName": "Env1",
      "identifier": "aaa",
      "installationType": "SAAS",
      "name": "My_app",
      "source": "SERVICENOW",
      "type": "HOMEGROWN"
    }
  }
]
```

7.2.4 Responses

This API call has the following HTTP status codes:

Code	Description
207	Each item in the request has been processed on its own. Response indicates status of each individual item.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.

7.3 Getting business application by ID

GET `/api/v1/business-applications/`

7.3.1 Permissions required

- Business Applications > Read

7.3.2 URI parameters

Name	Type	Description
business_application_id	Type: (path)	Armris Business Application ID.
* Required		

7.3.3 Example

```
{
  "data": [
    {
      "businessCriticality": "Critical",
      "businessOwner": "John",
      "businessUnit": null,
      "description": "Database application to store our users",
      "deviceIds": [
        2145,
        10,
        1,
        3,
        2
      ],
      "firstSeen": "2023-05-09T08:32:05.223649+00:00",
      "id": 6,
      "installationType": "SAAS",
      "lastSeen": "2023-10-15T20:51:59.585671+00:00",
      "name": "test business app",
      "operationalStatus": null,
      "type": "Homegrown"
    }
  ],
  "success": true
}
```

7.3.4 Response parameters

Name	Type	Description
businessCriticality	string	Describes how critical the business application is. Allowed values: Critical, High, Medium, Low. Mandatory.
businessOwner	string	Describes the Business Owner. Mandatory.
businessUnit	string	Describes the Business Unit.
description	string	A short description for the business application.
deviceIds	list	Device IDs.
firstSeen	timestamp	When the business application was first used.
id	integer	The ID assigned to the business application.
installationType	string	E.g., None, On-Premise, Cloud.
lastSeen	timestamp	When the business application was last used.
name	string	The name of the business application. Mandatory.
operationalStatus	string	Allowed values: Ready or Retired state
type	Enum	The application type. Allowed values: Commercial off the shelf, Homegrown

7.3.5 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.
404	Unknown integration.

8 Certificate

8.1 Returning the tenant's root CA certificate (PEM file)

GET /api/v1/certificates/root_ca/

8.1.1 Permissions required

- Settings

8.1.2 URI parameters

None.

8.1.3 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.

9 Collectors

9.1 Creating a new collector

POST /api/v1/collectors/

9.1.1 Permissions required

- **Settings > Collector > Manage**

9.1.2 URI parameters

Name	Type	Description
formData	(body)	

9.1.3 Example

```
{
  "deploymentType": "OVA",
  "name": "My Collector"
}
```

9.1.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.

9.2 Returning existing collectors

GET /api/v1/collectors/

9.2.1 Permissions required

- **Settings > Collector > Read**

9.2.2 URI parameters

None.

9.2.3 Example

```
{
  "data": {
    "collectors": [
      {
        "clusterId": 0,
        "collectorNumber": 8100,
        "defaultGateway": "",
        "ipAddress": "",
        "lastSeen": "2023-10-17T14:28:13.360402+00:00",
        "macAddress": "",
        "name": "Armris Virtual Collector 8100",
        "status": "Active",
        "subnet": "",
        "type": "VM"
      }
    ],
    "count": 1,
    "next": null,
    "prev": null,
    "total": 1
  },
  "success": true
}
```

9.2.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.

9.3 Deleting a collector

DELETE /api/v1/collectors/{collector_id}/

9.3.1 Permissions required

- **Settings > Collector > Manage**

9.3.2 URI parameters

Name	Type	Description
collector_id	(path)	Armish collector ID.
* Required		

9.3.3 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Collector deletion error.
401	Unauthorized Collector ID.
404	Unknown Collector ID.

9.4 Updating the collector's name

PATCH /api/v1/collectors/{collector_id}/

9.4.1 Permissions required

- **Settings > Collector > Manage**

9.4.2 URI parameters

Name	Type	Description
collector_id	(path)	Armish collector ID.
* Required		
formData	(body)	

9.4.3 Example

```
{
  "deploymentType": "OVA",
  "name": "My Collector"
}
```


9.4.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.
404	Unknown Collector.

9.5 Updating the collector's password

PATCH `/api/v1/collectors/{collector_id}/password-settings`

9.5.1 Permissions required

- **Settings > Collector > Manage**

9.5.2 URI parameters

Name	Type	Description
collector_id	(path)	Armris collector ID. * Required
formData	(body)	

9.5.3 Example

```
{
  "password": "Password123!",
  "password_expiration_policy_months": 3
}
```

9.5.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.
404	Unknown Collector.

9.6 Returning image URL collectors

GET `/api/v1/collectors/_image/`

9.6.1 Permissions required

- **Settings > Collector > Read**

9.6.2 URI parameters

Name	Type	Description
deploymentType	string: (query)	The deployment type of the collector. The values in the drop-down menu may change depending on the tenant. Examples, OVA, QCOW2, VHD, VHDX.

None.

9.6.3 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.

9.7 Getting collector by ID

GET `/api/v1/collectors/{collector_id}/`

9.7.1 Permissions required

- **Settings > Collector > Read**

9.7.2 URI parameters

Name	Type	Description
collector_id	(path)	Armis collector ID.
* Required		

9.7.3 Example

```
{
  "data": {
    "clusterId": 0,
    "collectorNumber": 8153,
    "defaultGateway": "",
    "ipAddress": "",
    "lastSeen": "2023-10-17T14:37:13.147483+00:00",
    "macAddress": "",
    "name": "Armis Virtual Collector 8153",
    "status": "Active",
    "subnet": "",
    "type": "VM"
  },
  "success": true
}
```

9.7.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.
404	Unknown Collector.

The following endpoints are specific to the maintenance and technical versions of the collectors:

[Retrieving a list of supported collector versions](#)

[Updating the software update policy for multiple collectors](#)

[Triggering a software update for the specified collector](#)

[Triggering a software update to the previous version](#)

9.8 Retrieving a list of supported collector versions

Retrieves a list of supported collector versions currently available for manual installation. It matches the UI logic and includes the last 6 months of versions, two major versions, and all intermediate minor (patch) versions. These values are required parameters for the Manual Update endpoint.

GET /api/v1/collectors/available-versions/

9.8.1 Permissions required

- Settings > Collector > Read

9.8.2 URI parameters

none

9.8.3 Example (JSON)

```
{
  "versions": [
    {
      "id": 1234,
      "branch": "R-26.0-S223",
      "build_id": "33"
    },
    {
      "id": 5678,
      "branch": "R-26.0-S222",
      "build_id": "12"
    }
  ]
}
```

9.8.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.

9.9 Updating the software update policy for multiple collectors

Updates the software update policy for multiple collectors in a single request. This is used to standardize update modes (Automatic, Manual, or Disabled) or to trigger a specific version upgrade

for a group of collectors. For collectors currently offline, the policy is queued and automatically applied upon the next reconnection.

PATCH /api/v1/collectors/software-update/_bulk/

9.9.1 Permissions required

- **Settings > Collector > Manage**

9.9.2 URI parameters

Name	Type	Description
formData	(body)	See the following example.

9.9.3 Example (JSON Payload)

```
{
  "collectorIds": [
    "8153",
    "8154"
  ],
  "updateState": "MANUAL",
  "versionId": 1234
}
```

9.9.4 Example (Request Body Schema)

```
{
  "type": "object",
  "properties": {
    "collector_ids": {
      "type": "array",
      "items": { "type": "string" },
      "description": "List of unique Collector IDs."
    },
    "update_state": {
      "type": "string",
      "enum": ["AUTOMATIC", "DISABLED", "MANUAL"],
      "description": "The update policy for the collector."
    },
    "version": {
      "type": "integer",
      "description": "Required for MANUAL state. Must be a valid version string."
    }
  },
  "required": ["collector_ids", "update_state"]
}
```

9.9.5 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.
404	Unknown Collector.

9.10 Triggering a software update for the specified collector

Updates the software update configuration for a specific collector. Use this endpoint to toggle between Automatic, Disabled and Manual update modes.

- **AUTOMATIC**—Updates the collector automatically to the latest version upon release. Updates are managed and deployed by Armis.
- **DISABLED**—Pauses all updates. The collector will remain on its current version until a different mode is selected.
- **MANUAL**—Enables manual version selection. The update process initiates immediately once a version is specified.

The update starts immediately. The update progress can be monitored via the collector status or system audit logs.

NOTES:

- To roll back a collector, manually select the previous version listed in the collector's metadata.
- For single collector GET requests, the API includes a `previous_version` field to facilitate rollback decisions.
- Every successful state change trigger an Audit Log entry containing:
 - Actor—User ID or API Key.
 - Target—Collector ID(s).
 - Action—Change of `update_state` or version.
 - Timestamp—UTC execution time

PATCH /api/v1/collectors/{collector_id}/software-update/

9.10.1 Permissions required

- **Settings > Collector > Manage**

9.10.2 URI parameters

Name	Type	Description
formData	(body)	See the following example.

9.10.3 Example

```
{
  "updateState": "MANUAL",
  "versionId": 1234
}
```

9.10.4 Response parameters

Name	Type	Description
update_State	string	Must be AUTOMATIC, DISABLED, or MANUAL
versionId	string	Required if state is MANUAL. Can be a version from the "Available Versions" list or a specific known valid string.

9.10.5 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.
404	Unknown Collector.

9.11 Triggering a software update to the previous version

POST /api/v1/collectors/{collector_id}/software-update/rollback/

9.11.1 Permissions required

- Settings > Collector > Manage

9.11.2 URI parameters

Name	Type	Description
collector_id (required)	(path)	Armris collector ID.

9.11.3 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.
404	Unknown collector.

10 Dashboards

The Dashboards API endpoints enable you to retrieve and create dashboards.

For more information about Armis dashboards, see [Dashboards](#) in the Armis user guide.

10.1 Getting existing dashboards

GET /api/v1/dashboards/

10.1.1 Permissions required

- NONE

Retrieves existing dashboards and the type-value of each: `Main—VMS`, which relates to Armis Centrix™ for Vulnerability Prioritization and Remediation (ViPR).

10.1.2 URI parameters

Name	Type	Description
type	string (query)	The type of the dashboard.

10.1.3 Responses

This API call has the following HTTP status code:

Code	Description
200	OK.

10.2 Getting an existing dashboard by ID

GET /api/v1/dashboards/{dashboard_id}/

Returns existing dashboard by the Armis dashboard ID.

10.2.1 Permissions required

- NONE

10.2.2 URI parameters

Name	Type	Description
dashboard	(path)	Armis dashboard ID.
* Required		

10.2.3 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.
404	Dashboard not found.

10.3 Creating a new dashboard

POST `/api/v1/dashboards/`

10.3.1 Permissions required

- NONE

10.3.2 URI parameters

Name	Type	Description
body *required	object (body)	

10.3.3 Example

```
{
  "dashboard": {
    "ownerId": 0,
    "title": "My Dashboard"
  },
  "dashlets": [
    {
      "dashlet": {
        "visualizationConfig": {
          "aggregateBy": "COUNT_DISTINCT_DEVICES",
          "groupBy": "DEVICE_TYPE",
          "type": "COLUMN"
        }
      },
      "searchString": "in:devices",
      "title": "My Dashlet"
    }
  ]
}
```

10.3.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request, please check the arguments you passed.

10.4 Delete dashboard by ID

DELETE /api/v1/dashboards/{dashboard_id}/

10.4.1 Permissions required

- NONE

10.4.2 URI parameters

Name	Type	Description
dashboard_id	integer(path)	Armris dashboard ID. *required

10.4.3 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.
404	Dashboard not found.

10.5 Share dashboard by ID

PATCH `/api/v1/dashboards/{dashboard_id}/`

10.5.1 Permissions required

- NONE

10.5.2 URI parameters

Name	Type	Description
dashboard_id *required	integer (path)	Armris dashboard ID.
user_id	integer (query)	Armris user ID.
role_id	integer (query)	The role ID in the Armris system.
dashboard_permission * required	string (query)	Armris shared users dashboard permission: Viewer or Editor

10.5.3 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.
404	Dashboard not found.

11 Dashlets

Query
JSON

Code	Description
200	OK.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.
404	Dashlet not found.

11.1 Delete dashlet by ID

DELETE `/api/v1/dashlets/{dashlet_id}/`

11.1.1 Permissions required

- NONE

11.1.2 URI parameters

Name	Type	Description
<code>dashlet_id</code>	(path)	Armish dashlet ID.
*required		

11.1.3 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.
404	Dashlet not found.

12 Devices

For information on devices, see the Armis user guide.

12.1 Returning device information for a given identifier

Identifiers include IP address, MAC, Device ID, Tag, Field and Search.

GET /api/v1/devices/

12.1.1 Permissions required

- **Device > Read**

12.1.2 URI parameters

Name	Type	Description
id	integer (query)	The Armis device ID.
ip	string (query)	The IPv4 or IPv6 Address of the devices.
mac	string (query)	The MAC Address of the devices.
search	string (query)	The search string.
tag	string (query)	The tag of the devices.
fields	(query)	Fields to show. If omitted, returns a default subset of fields.
includeNetworkInterfaces	(boolean)	If set to true, network interfaces information will be included for each device.
from	integer (query)	Paging from.
length	integer (query)	Paging length.

12.1.3 Example

The response will be a JSON array of devices similar to this:


```

{
  "data": {
    "count": 1,
    "data": [
      {
        "accessSwitch": null,
        "boundaries": "test1, tag_boundary, test2",
        "businessImpact": "Unassigned",
        "category": "Handhelds",
        "customProperties": {},
        "dataSources": [
          {
            "firstSeen": "2022-09-05T12:48:41.074628+00:00",
            "lastSeen": "2023-10-19T07:31:14+00:00",
            "name": "API",
            "types": [
              "Data Upload"
            ]
          },
          {
            "firstSeen": "2021-07-04T06:40:35.166307+00:00",
            "lastSeen": "2023-10-19T07:31:14+00:00",
            "name": "Armris Smart Scanner",
            "types": [
              "Vulnerability Management"
            ]
          }
        ],
        "firstSeen": "2021-03-25T09:27:29.286706+00:00",
        "id": 1,
        "ipAddress": "10.202.0.122, 1.1.1.1",
        "ipv6": [
          "fe80:3::1ff:fe23:4567:890a",
          "2600:4040:f015:e900:5160:5160:4f0:acd2:1ac7"
        ],
        "lastSeen": "2023-10-19T07:31:14+00:00",
        "macAddress": "00:0C:29:6D:36:75, AA:AA:AA:AA:AA:AA",
        "manufacturer": "Apple",
        "model": "iPhone 6S",
        "name": "mike's iphone",
        "names": "mike's iphone,333,222,111",
        "operatingSystem": "iOS",
        "operatingSystemVersion": "10.3.1",
        "purdueLevel": 4,
        "riskLevel": 10,
        "sensor": {
          "name": "API",
          "type": "API"
        },
        "site": {
          "location": "Ney York, yefet 16",
          "name": "New York"
        },
        "tags": [

```

```

        "ip connection online 151",
        "tag activity offline",
        "tag ip connection online",
        "66666"
    ],
    "type": "Mobile Phones",
    "userIds": [
        67581
    ],
    "visibility": "Full"
  }
],
"next": null,
"prev": null,
"total": 1
},
"success": true
}

```

12.1.4 Response parameters

Name	Type	Description
accessSwitch	string	The name of the access switch.
boundaries	string	Armris boundaries e.g., Off Network
businessImpact	string	Business Impact level.
category	string	The device category: computer, handheld, medical, and so on.
customProperties	JSON	JSON list of custom properties.
dataSources	list	List of data sources.
firstSeen	timestamp	When was the device first seen.
id	integer	Device ID.
ipAddress	string	Device IP address.
ipv6	list	Device IPv6 address.
lastSeen	timestamp	When was the device last seen.
macAddress	string	Device MAC address.
manufacturer	string	Device manufacturer, represented in the Armris console as Brand.
model	string	Device model.
name	string	Device name.
names	string	Device names.

Name	Type	Description
operatingSystem	string	Device operating system.
operatingSystemVersion	string	device operating system version
purdueLevel	string	The Purdue level.
riskLevel	string	Risk level assigned to the device: Low (1-30), Medium (41-70), High (71-90), or Critical (91-100).
sensor	JSON	Last sensor that saw the device name: The sensor name.
site	JSON	Site to which the sensor belongs. - location: The site location. - name site name
tags	list[string]	Attached device tags.
tier	string	Display the tier information.
type	string	Device type.
user	string	Device user.
userIds	list	List of User IDs.
visibility	string	The visibility e.g., Full.

NOTE: The table above lists the default properties. You can search for any Armis Search Query (ASQ) property using the **fields** box in [Swagger.in](https://swagger.io). Enter property names in camelCase, as they appear in the ASQ. In the following example, the property that you are searching for is called `aeTitle` (in the Armis console it's displayed as `AE Title`).

fields

Fields to show. If omitted, returns a default subset of fields.

(query)

aeTitle

The following table shows examples of how to convert device properties to API fields (without spaces and camelCase):

Armis console field	API field (camelcase)
CrowdStrike CID	crowdstrikeCid
SCCM Client Active	sccmClientActive
Aruba ClearPass Endpoint ID	arubaClearpassEndpointId
Intune Registration State	intuneRegistrationState

12.1.5 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request. Missing identifier param, must provide one of <code>id</code> , <code>ip</code> , <code>mac</code> , <code>search</code> , or <code>tag</code> .
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.

12.2 Lists devices deleted within a specified time range

Identifies deleted devices.

GET `/api/v1/devices/deleted/`

12.2.1 URI parameters

Name	Type	Description
<code>fromDate</code>	(query)	Start date for the query, ISO 8601 format, UTC time (Example "2025-01-15T14:30:00Z"). Defaults to 7 days before current time. Must provide <code>toDate</code> if <code>fromDate</code> is provided. Maximum 100 days back.
<code>toDate</code>	(query)	End date for the query, ISO 8601 format, UTC time (Example "2025-01-22T14:30:00Z"). Defaults to current time. Must provide <code>fromDate</code> if <code>toDate</code> is provided.
<code>from</code>	integer (query)	Paging from.
<code>length</code>	integer (query)	Paging length.

12.2.2 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.

12.3 Returns information about devices that were merged within a specified time range

Maps merged-non active device IDs to their current active counterparts to prevent data gaps during asset transitions.

GET `/api/v1/devices/merged/`

12.3.1 URI parameters

Name	Type	Description
fromDate	(query)	Start date for the query, ISO 8601 format, UTC time (Example "2025-01-15T14:30:00Z"). Defaults to 7 days before current time. Must provide toDate if fromDate is provided. Maximum 100 days back.
toDate	(query)	End date for the query, ISO 8601 format, UTC time (Example "2025-01-22T14:30:00Z"). Defaults to current time. Must provide fromDate if toDate is provided.
from	integer (query)	Paging from.
length	integer (query)	Paging length.

12.3.2 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.

12.3.3 URI parameters

Name	Type	Description
id	integer (query)	The Armis device ID.
ip	string (query)	The IPv4 or IPv6 Address of the devices.
mac	string (query)	The MAC Address of the devices.
search	string (query)	The search string.
tag	string (query)	The tag of the devices.
fields	(query)	Fields to show. If omitted, returns a default subset of fields.
from	integer (query)	Paging from.
length	integer (query)	Paging length.

12.4 Updating one or more of the device's attributes

PATCH `/api/v1/devices/{device_id}/`

12.4.1 Permissions required

- **Device > Manage > Edit**

12.4.2 URI parameters

Name	Description
device_id	Armris device ID.
* Required	Type: (path)
device	Armris device.
* Required	Type: object (body)

12.4.3 Example

```
{
  "CATEGORY": "HANDHELD",
  "MODEL": "iPhone 6S",
  "NAME": "Mike's iPhone",
  "OS": "iOS",
  "OS_VERSION": "10.3.1",
  "SITE": "Boston",
  "TYPE": "MOBILE_PHONE"
}
```

12.4.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.
404	Unknown device.

12.5 Delete device by ID

You can delete a single device by its device ID.

DELETE `/api/v1/devices/{device_id}/`

NOTE: In addition, you can delete devices in bulk through an existing endpoint: See **Post** `v1/devices/_bulk/`.

12.5.1 Permissions required

- **Device > Manage > Delete**

12.5.2 URI parameters

Name	Type	Description
device_id	(path)	The Armis device ID.

12.5.3 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request. Missing identifier param, must provide one of <code>id</code> , <code>ip</code> , <code>mac</code> , <code>search</code> , or <code>tag</code> .
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.
404	Device not found.

12.6 Update a devices Purdue level

POST `/api/v1/devices/{device_id}/purdue-level/`

12.6.1 Permissions required

- **Device > Manage > Edit**

12.6.2 URI parameters

Name	Type	Description
device_id	(path)	Armis device ID.
* Required		
body	object (body)	
* Required		

12.6.3 Example

```
{
  "newLevel": 4
}
```

12.6.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.
404	Unknown device.

12.7 Bulk operations on a device

POST `/api/v1/devices/_bulk/`

NOTES:

- You can also delete devices in bulk using this endpoint. Once the device is deleted, the action is recorded in the Audit log. You can delete up to 500 devices.
- This endpoint now supports Serial Number as a primary identifier for device creation. This is for environments where MAC addresses are unavailable or inconsistent, allowing for more flexible integration with external asset management systems. Key benefits are Flexible Onboarding of devices, inventory accuracy and automated workflows. This endpoint supports device creation only. It *does not* support updates. If you provide a serial number that already exists, the API will return an error to prevent duplicates..

12.7.1 Permissions required

Device > Manage > Create

Device > Manage > Edit

12.7.2 Example

```
[
  {
    "upsert": {
      "category": "HANDHELD",
      "id": 1,
      "ipAddress": "1.1.1.1",
      "ipv6": [
        "fe80:3::1ff:fe23:4567:890a",
        "2600:4040:f015:e900:5160:5160:4f0:acd2:1ac7"
      ],
      "lastSeen": "2024-08-05T08:22:47",
      "macAddress": "aa:aa:aa:aa:aa:aa",
      "model": "iPhone 6S",
      "name": "Mike's iPhone",
      "operatingSystem": "iOS",
      "operatingSystemVersion": "10.3.1",
      "site": "Boston",
      "type": "MOBILE_PHONE"
    }
  }
]
```

12.7.3 Responses

This API call has the following HTTP status codes:

Code	Description
207	Each item in the request has been processed on its own. Response indicates status of each individual item.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid.

12.7.4 URI parameters

Name	Type	Description
device_id	(path)	Armris device ID.
* Required		

12.8 Updating a custom property on an Armis device

POST /api/v1/devices/custom-properties/_bulk/

12.8.1 Permissions required

- **Device > Manage > Edit**

12.8.2 URI parameters

Name	Type	Description
body	array[object]	Upsert multiple custom properties for multiple devices in a single operation. This endpoint is highly recommended to be used when a large amount of custom properties should be updated.

12.8.3 Examples

The following are examples for updating custom properties on a device in the Armis Centrix™:

cURL

```
curl -X "POST" "https://<armis-  
instance>.armis.com/api/v1/devices/custom-properties/_bulk/" -H  
'Authorization: <access-token>' -d '${  
  {  
    "upsert": {  
      "key": "<Custom-Property-Name>",  
      "value": "<Custom-Property-Value>",  
      "deviceId": <deviceId>  
    }  
  }  
}]'
```

Python

```
response = requests.post(url="https://<armis-  
instance>.armis.com/api/v1/devices/custom-properties/_bulk/",  
    headers={"Authorization": <access-token>},  
    data=json.dumps([  
        {  
            "upsert": {  
                "key": "<Custom-Property-Name>",  
                "value": "<Custom-Property-Value>",  
                "deviceId": <deviceId>  
            }  
        }  
    ]))
```

If successful, the response will be a JSON like this:

```
[ {"result": {}, "status": 202}]
```

NOTE: This is a bulk API, which allows for updating multiple devices with one API call. The updating or removing of custom properties is done by sending an array of data elements. Two operations are available: upsert and delete.

For example, to update the custom properties of two devices and remove one from a third, the data elements could look like:

```
[
  {
    "delete": {
      "deviceId": 1,
      "key": "location"
    },
    "upsert": {
      "deviceId": 1,
      "key": "location",
      "value": 123445
    }
  }
]
```

NOTE: Delete removes the custom property from the specified device.

12.8.4 Responses

This API call has the following HTTP status code:

Code	Description
207	Each item in the request has been processed on its own. Response indicates status of each individual item.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.

12.9 Returning supported keys for CSV data mapping

GET `/api/v1/devices/csv/`

12.9.1 Permissions required

- Device > Read

12.9.2 URI parameters

None.

12.9.3 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.

12.10 Uploading a CSV file with device data

POST `/api/v1/devices/csv/`

12.10.1 Permissions required

- **Device > Manage > Create**

12.10.2 URI parameters

Name	Type	Description
csv * Required	file	CSV File encoded in UTF-8 with the following columns: <code>device_id</code> , <code>mac</code> , <code>key</code> , <code>value</code> .

12.10.3 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.

12.11 Adding applications to a device

11. POST /api/v1/devices/{device_id}/applications/

If the application exists it updates its last seen time.

12.11.1 Permissions required

- **Device > Manage > Edit**

12.11.2 URI parameters

Name	Type	Description
device_id	(path)	Armis device ID. * Required
applications	(body)	An array of applications.

12.11.3 Example

```
{
  "applications": [
    {
      "name": "Chrome",
      "version": "70.0.3538.77"
    },
    {
      "name": "YouTube"
    }
  ]
}
```

12.12 Setting a tag on an Armis device

POST /api/v1/devices/{device_id}/tags/

12.12.1 Permissions required

- **Device > Manage > Tags**

12.12.2 URI parameters

Name	Type	Description
device_id	(path)	Armris device ID. * Required
tags	object (body)	JSON with format {"tags": ["tag1", "tag2", ...]}

12.12.3 Example

The following are examples of setting a tag on a device in Armris Centrix™:

cURL

```
curl -X "POST" "https://<armis-  
instance>.armis.com/api/v1/devices/<deviceId>/tags/" -H 'Authorization:  
<access-token>' -d '${  
  "tags": [  
    "foo",  
    "bar"  
  ]  
'
```

Python

```
response = requests.post(url="https://<armis-  
instance>.armis.com/api/v1/devices/<deviceId>/tags/",  
    headers={"Authorization": <access-token>},  
    data=json.dumps({  
        "tags": [  
            "foo",  
            "bar"  
        ]  
    }))
```

If successful, the response will be a JSON like this:

```
{  
  "success": true  
}
```

12.12.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid.
404	Unknown device.

12.13 Removing a tag from an Armis device

DELETE /api/v1/devices/{device_id}/tags/

12.13.1 Permissions required

- **Device > Manage > Tags**

12.13.2 URI parameters

Name	Type	Description
device_id	(path)	Armis device ID. * Required
tags	object (body)	JSON with format {"tags": ["tag1", "tag2", ...]}

12.13.3 Permissions required

- **Device > Manage > Tags**

12.13.4 Example

The following are examples for removing a tag from a device in Armis Centrix™:

cURL

```
curl -X "DELETE" "https://<armis-
instance>.armis.com/api/v1/devices/<deviceId>/tags/"
-H 'Authorization: <access-token>' -d '${
    "tags": [
        "foo"
    ]
}'
```


Python

```
response = requests.delete(url="https://<armis-  
instance>.armis.com/api/v1/devices/<deviceId>/tags/",  
                           headers={"Authorization": <access-token>},  
                           data=json.dumps({  
                               "tags": [  
                                   "foo"  
                               ]  
                           }))
```

If successful, the response will be a JSON like this:

```
{  
    "success": true  
}
```

12.13.5 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid.
404	Unknown device.

13 Device applications

13.1 Get device applications

GET /api/v1/device-applications/

13.1.1 Permissions required

- **Device > Read**

13.1.2 URI parameters

Name	Type	Description
device_ids	string (query)	A list of comma-separated Armis Device IDs. If the <code>device_ids</code> are not provided then all the device applications in the environment will be returned, with pagination.
from	integer (query)	Paging from.
length	integer (query)	Paging length.

13.1.3 Example

```

{
  "data": {
    "count": 10,
    "items": [
      {
        "deviceId": 1036,
        "firstSeen": "2023-07-03T11:10:36",
        "lastSeen": "2023-08-24T09:42:57",
        "name": "Microsoft-HTTPAPI",
        "version": "2.0"
      },
      {
        "deviceId": 155,
        "firstSeen": "2023-07-03T11:08:57",
        "lastSeen": "2023-09-18T13:14:14",
        "name": "CertificateService",
        "version": "1"
      },
      {
        "deviceId": 450,
        "firstSeen": "2023-07-03T11:32:24",
        "lastSeen": "2023-10-04T11:04:32",
        "name": "OpenSSH",
        "version": "9.0"
      },
      {
        "deviceId": 23,
        "firstSeen": "2023-07-03T11:10:57",
        "lastSeen": "2024-02-05T07:37:47",
        "name": "CrowdStrike",
        "version": null
      },
      {
        "deviceId": 100,
        "firstSeen": "2023-07-03T11:16:18",
        "lastSeen": "2023-07-06T13:59:50",
        "name": "McAfee",
        "version": null
      },
      {
        "deviceId": 866,
        "firstSeen": "2023-07-03T11:11:21",
        "lastSeen": "2023-07-04T15:12:46",
        "name": "OpenSSH",
        "version": "9.0"
      },
      {
        "deviceId": 206,
        "firstSeen": "2023-07-03T11:10:22",
        "lastSeen": "2024-02-08T11:35:00",
        "name": "Zoom",
        "version": null
      }
    ],
    "next": 12,
  }
}

```

```
    "prev": null
  },
  "success": true
}
```

13.1.4 Response parameters

Name	Type	Description
deviceId	integer	The ID of the Armis device.
firstSeen	timestamp	When was the device application first seen.
lastSeen	timestamp	When was the device application last seen.
name	string	The name of the device application.
version	string	The version of the device application.

13.1.5 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.

13.2 Bulk operation on device applications

POST `/api/v1/device-applications/_bulk/`

13.2.1 Permissions required

- **Device > Manage > Edit**

13.2.2 URI parameters

Name	Type	Description
body * Required	array[object] (body)	

13.2.3 Example

```
[
  {
    "upsert": {
      "deviceId": 1,
      "lastSeen": "2023-10-01T05:52:28",
      "name": "Chrome",
      "version": "80.0.3987.122"
    }
  }
]
```

13.2.4 Responses

This API call has the following HTTP status codes:

Code	Description
207	Each item in the request has been processed on its own. Response indicates status of each individual item.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.

14 Device boundaries

14.1 Bulk operation on device boundaries

POST /api/v1/device-boundaries/_bulk/

14.1.1 Permissions required

- **Device > Manage > Edit**

14.1.2 URI parameters

Name	Type	Description
body	array[object (body)	
* Required		

14.1.3 Example

```
[
  {
    "create": {
      "boundaryName": "Corporate",
      "deviceId": 1
    }
  },
  {
    "delete": {
      "boundaryName": "Guest",
      "deviceId": 2
    }
  }
]
```

14.1.4 Responses

This API call has the following HTTP status codes:

Code	Description
207	Each item in the request has been processed on its own. Response indicates status of each individual item.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.

15 Device properties

15.1 Bulk operation on device properties

POST /api/v1/device-properties/_bulk/

15.1.1 Permissions required

- **Device > Manage > Edit**

15.1.2 URI parameters

Name	Type	Description
body	array[object] (body)	Upsert multiple properties for multiple devices in a single operation. This endpoint is highly recommended to be used when a large amount of properties should be updated.

15.1.3 Example

```
[
  {
    "upsert": {
      "description": "The port that is blocked on the device",
      "deviceId": 1,
      "lastSeen": "2023-10-01T05:52:28",
      "type": "SERIAL_NUMBER",
      "value": 123445
    }
  }
]
```

15.1.4 Responses

This API call has the following HTTP status codes:

Code	Description
207	Each item in the request has been processed on its own. Response indicates status of each individual item.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.

16 Devices tags

16.1 Setting the status for a given set of tags and devices

POST /api/v1/devices_tags/

16.1.1 Permissions required

- **Device > Manage > Tags**

16.1.2 URI parameters

Name	Type	Description
device-tag state	object (body)	The device tag state to set.

16.1.3 Example

```
{
  "ips": [
    "1.1.1.1",
    "2.2.2.2"
  ],
  "macs": [
    "aa:aa:aa:aa:aa:aa",
    "bb:bb:bb:bb:bb:bb"
  ],
  "remove": false,
  "tags": [
    "foo",
    "bar"
  ]
}
```

16.1.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.

17 Integrations

NOTES:

The `/api/v1/integrations/` has been deprecated and replaced by `/api/v2/integrations/`. The main differences are as follows:

- The integration is now named `instance`.
- The integration type is now named `name`.
- The integration Category is now `Types`, and is also now a multi-value key.
- The endpoints no longer support Sensor ID, and now, the API exposes only Collector ID where it's relevant.

17.1 Returning existing integrations

GET `/api/v2/integrations/`

To get the current list of integrations configured in an Armis instance.

17.1.1 Permissions required

- **Settings > Integration > Read**

17.1.2 URI parameters

Name	Type	Description
from	integer (query)	Paging from.
length	integer (query)	Paging length.

17.1.3 Examples

The following REST queries are examples using CURL and Python:

cURL

```
curl "https://<armis-instance>.armis.com/api/v2/integrations/"  
-H 'Authorization: <access-token>'
```

Python

```
response = requests.get(  
    url="https://<armis-instance>.armis.com/api/v2/integrations/",  
    headers={"Authorization": <access-token>})
```

```

{
  "data": {
    "count": 1,
    "integrations": [
      {
        "changeTime": 1703592785455,
        "collectorId": null,
        "creationTime": 1703592785506,
        "enforcementLists": [],
        "id": 11,
        "instance": "crowd 26.12",
        "integrationState": "ACTIVE",
        "lastRunEnd": "2024-01-10T09:47:11.660819+00:00",
        "name": "CrowdStrike",
        "params": {
          "crowdstrike_api_host": "https://api.us-2.crowdstrike.com",
          "crowdstrike_client_id": "fe180695efd34ealbaf79f295138380",
          "crowdstrike_client_secret": "*****",
          "crowdstrike_fetch_applications": false,
          "crowdstrike_fetch_device_cves": true,
          "crowdstrike_fetch_host_groups": true,
          "crowdstrike_fetch_iot_devices": false,
          "crowdstrike_fetch_unmanaged_assets": false,
          "crowdstrike_is_fetch_device_login_history": false,
          "crowdstrike_user_domain_include_list": "",
          "integration_schedule": {
            "allowed_time": {
              "days": [],
              "hours": []
            },
            "interval": {
              "amount": 8,
              "unit": "Hours"
            },
            "timezone": null
          },
          "mark_discovered_devices_as_managed": true
        },
        "statistics": {
          "extraDataForColumns": {
            "maxLimit": null
          },
          "integrationCyclesStatistics": [
            {
              "entity_type": "Devices",
              "post_filter_amount": 7,
              "sent_to_armis_amount": 7,
              "unique_armis_records_amount": 7
            }
          ],
          "lastSuccessfulCycleEnded": "2024-01-10 09:46:35.500033",
          "modificationDate": 1704880031663,
          "statisticsInfo": [],
          "status": "ACTIVE",
          "statusCategory": "Active, Cycle Ended",

```

```

        "statusCreationTime": 1703592797126,
        "statusExtraDetails": "",
        "statusLastChanged": 1703592844913,
        "statusMessage": ""
    }
},
"next": 9,
"prev": 7,
"total": 25
},
"success": true
}

```

17.1.4 Response parameters

Name	Type	Description
count	integer	The number of currently configured integrations.
changeTime	timestamp	A timestamp that indicates when the integration was last modified.
collectorId	integer	The ID of the Armis collector.
creationTime	timestamp	A timestamp that indicates when the integration was created.
enforcementLists	list	Enforcements
id	integer	The ID assigned to the integration.
instance	string	
integrationState	string	E.g., ACTIVE
lastRunEnd	timestamp	
name	string	The integration's name.
params	JSON	The relevant integration parameters. This parameter can be further nested
statistics	JSON	The various statistics related to the integration. This parameter can be further nested.

NOTE: Passwords are not exposed in the integration details fetched by the API. They are replaced with asterisks.

17.1.5 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.

17.2 Getting the integration by ID

GET /api/v2/integrations/{integration_id}/

17.2.1 Permissions required

- Settings > Integration > Read

17.2.2 URI parameters

Name	Type	Description
integration_id	(path)	Armis integration ID.
* Required		

17.2.3 Example

```
{
  "data": [
    {
      "changeTime": 1703592518203,
      "collectorId": null,
      "creationTime": 1703592518205,
      "enforcementLists": [],
      "id": 5,
      "instance": "aws 26.12 second ARN",
      "integrationState": "ACTIVE",
      "lastRunEnd": null,
      "name": "AWS",
      "params": {
        "auto_fetch_regions": true,
        "aws_access_key_id": "",
        "aws_access_key_secret": "",
        "aws_enable_subsidary_accounts": false,
        "aws_organizations_account_arn": "",
        "aws_primary_account_arn": "arn:aws:iam::553099138961:role/armis-aws-
integration-role",
        "aws_roles_to_assume": "",
        "integration_schedule": {
          "allowed_time": {
            "days": [],
            "hours": []
          },
          "interval": {
            "amount": 8,
            "unit": "Hours"
          },
          "timezone": null
        },
        "mark_discovered_devices_as_managed": true,
        "use_assume_role_for_primary_account": true,
        "use_organizations_for_subsidary_accounts": false
      },
      "statistics": null
    }
  ],
  "success": true
}
```

17.2.4 Response parameters

Name	Type	Description
count	integer	The number of currently configured integrations.
changeTime	timestamp	A timestamp that indicates when the integration was last modified.
collectorId	integer	The ID of the Armis collector.
creationTime	timestamp	A timestamp that indicates when the integration was created.
enforcementLists	list	Enforcements
id	integer	The ID assigned to the integration.
instance	string	
integrationState	string	E.g., ACTIVE
lastRunEnd	timestamp	
name	string	The integration's name.
params	JSON	The relevant integration parameters. This parameter can be further nested
statistics	JSON	The various statistics related to the integration. This parameter can be further nested.

17.2.5 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.
404	Unknown Integration.

17.3 Creating a new integration

POST `/api/v2/integrations/`

17.3.1 Permissions required

- **Settings > Integration > Manage**

17.3.2 URI parameters

Name	Type	Description
formData	(body)	

17.3.3 Example

```
{
  "collectorId": 1,
  "instance": "My Integration",
  "name": "SWITCH",
  "params": {
    "sniff_interface": "eth1"
  }
}
```

17.3.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Custom invalid integration error.

17.4 Deleting an integration

DELETE /api/v2/integrations/{integration_id}/

17.4.1 Permissions required

- Settings > Integration > Manage

17.4.2 URI parameters

Name	Type	Description
integration_id	(path)	Armis integration ID.
* Required		

17.4.3 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Integration deletion error.
401	Unauthorized Integration ID.
404	Unknown Integration ID.

17.5 Updating the parameters of an integration by ID

PATCH /api/v2/integrations/{integration_id}/

17.5.1 Permissions required

- Settings > Integration > Manage

17.5.2 URI parameters

Name	Type	Description
integration_id	(path)	Armis integration ID. * Required
Body	(body)	

17.5.3 Example

```
{
  "params": {
    "ip_list": "1.2.3.4, 4.3.2.1"
  }
}
```

17.5.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Custom invalid integration parameter error.
401	User not authorized.
404	Integration not found.

18 Policies

For more information about policies, see the Armis user guide.

18.1 Getting all policies

GET /api/v1/policies/

18.1.1 Permissions required

- Policy > Read

18.1.2 URI parameters

Name	Type	Description
from	integer (query)	Paging from.
length	integer (query)	Paging length.

18.1.3 Example

The following are examples of retrieving all of the policies from Armis Centrix™:

cURL

```
curl "https://<armis-instance>.armis.com/api/v1/policies/" -H  
'Authorization: <access-token>'
```

Python

```
response = requests.get(url="https://<armis-  
instance>.armis.com/api/v1/policies/", headers={"Authorization": <access-  
token>})
```

The response will be a JSON array of policies similar to this:

```
{
  "data": {
    "count": 10,
    "next": 10,
    "policies": [
      {
        "action": {
          "params": {
            "consolidation": {
              "amount": 1,
              "unit": "Minutes"
            },
            "description": "SIEM Test Policy based on DNS queries",
            "severity": "high",
            "type": "Security"
          },
          "type": "alert"
        },
        "id": "69",
        "isEnabled": false,
        "name": "SIEM Test",
        "rules": {
          "and": [
            "protocol:DNS"
          ]
        }
      },
      ...
    ]
  },
  "prev": null,
  "total": 48
},
"success": true
}
```

18.1.4 Response parameters

Name	Type	Description
action	JSON	The type of action and relevant action parameters: • type—(string). A policy action type (Tag, Untag, Alert, Enforce Devices etc.) • params—JSON. The parameters of the action type (may be nested).
id	integer	Armris policy ID.
isEnabled	boolean	The policy state (enabled/disabled).
name	string	The policy name.
rules	JSON	A recursive JSON with the format: {"and" / "or": [AQL string / rules JSON]} .

18.1.5 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK

18.2 Getting policy by ID

GET /api/v1/policies/{policy_id}/

18.2.1 Permissions required

- Policy > Read

18.2.2 URI parameters

Name	Type	Description
policy_id	(path)	The ID of the policy to query.
* Required		

18.2.3 Response parameters

Name	Type	Description
action	JSON	The type of action and relevant action parameters: • type—(string). A policy action type (Tag, Untag, Alert, Enforce Devices etc.) • params—JSON. The parameters of the action type (may be nested).
id	integer	Armris policy ID.
isEnabled	boolean	Default— "false". The policy state (enabled/disabled).
name	string	The policy name.
rules	JSON	A recursive JSON with the format: {"and" / "or": [AQL string / rules JSON]} .

18.2.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK
400	Custom invalid policy parameter error.
404	Unknown policy.

18.3 Creating a new policy

POST /api/v1/policies/

18.3.1 Permissions required

- **Policy > Manage**

18.3.2 URI parameters

Name	Type	Description
body	(body)	

18.3.3 Example

```
{
  "actions": [
    {
      "params": {
        "consolidation": {
          "amount": 1,
          "unit": "Days"
        },
        "severity": "high",
        "type": "Security or Network Performance"
      },
      "type": "alert"
    }
  ],
  "description": "Description (maximal length - 500)",
  "isEnabled": false,
  "labels": [
    "Security"
  ],
  "name": "My Policy",
  "ruleType": "Activity, IP Connection, Device or Vulnerability",
  "rules": {
    "and": [
      "protocol:BMS",
      {
        "or": [
          "content:(iPhone)",
          "content:(Android)"
        ]
      }
    ]
  }
}
```

18.3.4 Response parameters

Name	Type	Description
action	JSON	The type of action and relevant action parameters: • type—(string). A policy action type (Tag, Untag, Alert, Enforce Devices etc.) • params—JSON. The parameters of the action type (may be nested).
isEnabled	boolean	Optional. Default— "false". The policy state (enabled/disabled).
name	string	Mandatory. The policy name.
rules	JSON	Mandatory. A recursive JSON with the format: {"and" / "or": [AQL string / rules JSON]} .

18.3.5 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	An invalid policy was provided.
409	Policy title already exists.

18.4 Deleting a policy by ID

DELETE /api/v1/policies/{policy_id}/

To delete a policy on Armis Centrix™, you only need to send the specific <Policy ID> of the policy.

18.4.1 Permissions required

- Policy > Manage

18.4.2 URI parameters

Name	Type	Description
policy_id	(path)	The ID of the policy to query.
* Required		

18.4.3 Example

The following are examples of deleting a policy on Armis Centrix™:

cURL

```
Curl -X "DELETE" "https://<armis-instance>.armis.com/api/v1/policies/<Policy ID>/" -H 'Authorization: <access-token>'
```

Python

```
response = requests.delete(url="https://<armis-instance>.armis.com/api/v1/policies/<Policy ID>", headers={"Authorization": <access-token>})
```

If the call is successful, it will return the following:

```
{
  "success": true
}
```

If the alert was already in the RESOLVED state, it will return the following:

```
{
  "message": "Failed in deleting policy",
  "success": false
}
```

18.4.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Custom invalid policy parameter error.
404	Unknown policy.

18.4.5 Example—Creating an Activity policy

The following are examples of creating an Activity policy on Armis Centrix™:

cURL

```
curl -X "POST" "https://<armis-instance>.armis.com/api/v1/policies/" \
-H 'Authorization: <access-token> \
-H 'Content-Type: application/json' \
-d '${
  "labels": ["Security"],
  "actions": [
    {
      "type": "alert",
      "params": {
        "consolidation": {
          "amount": 1,
          "unit": "Days"
        },
        "type": "Security",
        "severity": "high"
      }
    }
  ],
  "isEnabled": true,
  "description": "My
Description", "ruleType":
"ACTIVITY",
  "name": "Test ACTIVITY Policy",
  "rules": {
    "and": [
      "protocol:BMS"
    ]
  }
}
```

```

response = requests.post(
    url="https://<armis-instance>.armis.com/api/v1/devices/_bulk/",
    headers={"Authorization": <access-token>,
             "Content-Type": "application/json",},
    data=json.dumps({
        "labels": [
            "Security"
        ],
        "actions": [
            {
                "type": "alert",
                "params": {
                    "consolidation": {
                        "amount": 1,
                        "unit": "Days"
                    },
                    "type": "Security",
                    "severity": "high"
                }
            }
        ],
        "isEnabled": True,
        "description": "My Description",
        "ruleType": "ACTIVITY",
        "name": "Test ACTIVITY Policy",
        "rules": {
            "and": [
                "protocol:BMS"
            ]
        }
    })
)

```

If successful, the response will be a JSON like this:

```

{
  "data": {
    "id": 274
  },
  "success": true
}

```

Where 274 is the ID of the new policy.

18.4.6 Example—Creating a Device policy

The following are examples of creating a Device policy on Armis Centrix™:

cURL

```
curl -X "POST" "https://<armis-instance>.armis.com/api/v1/policies/" \
-H 'Authorization: <access-token> \
-H 'Content-Type: application/json' \
-d '${
    "labels": [
        "Security"
    ],
    "name": "Test DEVICE Policy",
    "ruleType": "DEVICE",
    "description": "My Description",
    "rules": {
        "and": [ "macAddress:(00:00:11:11:22:22)"
        ]
    },
    "actions": [
        {
            "type": "alert",
            "params": {
                "consolidation": {
                    "amount": 1,
                    "unit": "Days"
                },
                "type": "Security",
                "severity": "high"
            }
        }
    ],
    "isEnabled": true
}'
```

```

response = requests.post(
    url="https://<armis-instance>.armis.com/api/v1/devices/_bulk/",
    headers={"Authorization": <access-token>,
             "Content-Type": "application/json",},
    data=json.dumps({
        "labels": [
            "Security"
        ],
        "name": "Test DEVICE Policy",
        "ruleType": "DEVICE",
        "description": "My Description",
        "rules": {
            "and": [
                "macAddress: (00:00:11:11:22:22) "
            ]
        },
        "actions": [
            {
                "type": "alert",
                "params": {
                    "Consolidation" {
                        "amount": 1,
                        "unit": "Days"
                    },
                    "Type": "Security",
                    "severity": "high"
                }
            }
        ],
        "isEnabled": True
    })
)

```

If successful, the response will be a JSON like this:

```

{
  "data": {
    "id": 275
  },
  "success": true
}

```

Where 275 is the ID of the new policy.

18.4.7 Example—Creating an IP Connection policy

The following are examples of creating an IP Connection policy on Armis Centrix™:

cURL

```
curl -X "POST" "https://<armis-instance>.armis.com/api/v1/policies/" \
-H 'Authorization: <access-token> \
-H 'Content-Type: application/json' \
-d $'{
  "labels": [
    "Security"
  ],
  "name": "Test IP_CONNECTION Policy",
  "ruleType": "IP_CONNECTION",
  "description": "My Description",
  "rules": {
    "and": [
      "endpointB:(networkLocation:External)"
    ]
  },
  "actions": [
    {
      "type": "alert",
      "params": {
        "consolidation": {
          "amount": 1,
          "unit": "Days"
        },
        "type": "Security", "severity": "high"
      }
    }
  ],
  "isEnabled": true
}'
```

```

response = requests.post(
    url="https://<armis-instance>.armis.com/api/v1/devices/_bulk/",
    headers={"Authorization": <access-token>,
            "Content-Type": "application/json",},
    data=json.dumps({
        "labels": [ "Security" ],
        "name": "Test IP_CONNECTION Policy",
        "ruleType": "IP_CONNECTION",
        "description": "My Description",
        "rules": {
            "and":
                [ "endpointB:(networkLocation:External)" ]
        },
        "actions": [
            {
                "type": "alert",
                "params": {
                    "consolidation": {
                        "amount": 1, "unit": "Days"
                    },
                    "type": "Security",
                    "severity": "high"
                }
            }
        ],
        "isEnabled": True
    })
)

```

If successful, the response will be a JSON like this:

```

{
  "data": {
    "id": 276
  },
  "success": true
}

```

Where 276 is the ID of the new policy.

18.5 Updating a policy

PATCH /api/v1/policies/{policy_id}/

18.5.1 Permissions required

- Policy > Manage

18.5.2 URI parameters

Name	Type	Description
policy_id	(path)	The ID of the policy to query.
* Required		
Body	(body)	

To update a policy on Armis Centrix™, you only need to send the specific elements that are to be updated for the policy, which is denoted by the <Policy ID>.

18.5.3 Examples

The following are examples of changing the status of a policy to be disabled:

cURL

```
curl -X "POST" "https://<armis-instance>.armis.com/api/v1/policies/<Policy ID>/" \
  -H 'Authorization: <access-token> \
  -H 'Content-Type: application/json' \
  -d '${ "isEnabled": false}'
```

Python

```
response = requests.post(
    url=
    "https://<armis-instance>.armis.com/api/v1/policies/<Policy ID>",
    headers={"Authorization": <access-token>,
             "Content-Type": "application/json",},
    data=json.dumps({"isEnabled": false}))
```


If the call is successful, it will return the following:

```
{
  "data": {
    "id": "<Policy ID>",
    "name": "Test Policy Name",
    "isEnabled": false,
    "rules": {
      "and": [
        "protocol:Bluetooth",
        {
          "or": [
            "content:(iPhone)",
            "content:(Android)"
          ]
        }
      ]
    }
  },
  "action": {
    "params": {
      "consolidation": {
        "amount": 1,
        "unit": "Days"
      },
      "description": "New Test Policy",
      "severity": "high",
      "type": "Security"
    },
    "type": "alert"
  }
},
"success": true
}
```

The following is another example of changing the name of a policy:

cURL

```
curl -X "POST" "https://<armis-instance>.armis.com/api/v1/policies/<Policy ID>/" \
  -H 'Authorization: <access-token> \
  -H 'Content-Type: application/json' \
  -d '${ "name": "New Policy Name" }'
```

Python

```
response = requests.post(
    url=
    "https://<armis-instance>.armis.com/api/v1/policies/<Policy ID>",
    headers={"Authorization": <access-token>,
             "Content-Type": "application/json",},
    data=json.dumps({"name": "New Policy Name"}))
```

```
{
  "data": {
    "id": "<Policy ID>",
    "name": "New Policy Name",
    "isEnabled": false,
    "rules": {
      "and": [
        "protocol:Bluetooth",
      ]
    },
    "action": {
      "params": {
        "consolidation": {
          "amount": 1,
          "unit": "Days"
        },
        "description": "New Test Policy",
        "severity": "high",
        "type": "Security"
      },
      "type": "alert"
    }
  },
  "success": true
}
```

18.5.4 Response parameters

Name	Type	Description
action	JSON	The type of action and relevant action parameters: - type—(string). A policy action type (Tag, Untag, Alert, Enforce Devices etc.) - params—JSON. The parameters of the action type (may be nested).
id	integer	Armris policy ID.
isEnabled	boolean	Default— "false". The policy state (enabled/disabled).
name	string	The policy name.
rules	JSON	A recursive JSON with the format: {"and" / "or": [AQL string / rules JSON]} .

18.5.5 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	An invalid policy was provided.
404	Unknown Policy.
409	Policy title already exists.

19 Reports

The Report API endpoints enable you to create, run, update, or delete a report on a tenant.

For more information about reports, see [Reports](#) in the Armis user guide.

For a list of API report examples, see [API Report Examples](#).

The GET calls retrieve a list of existing reports previously configured on a tenant—to retrieve all reports or retrieve a specific report by its ID.

Additionally, if a report has been set on a tenant as a scheduled report, the API can also be used to obtain a link to download the report via a direct download URL. Upon download, the data within the report will reflect the last run cycle.

NOTE: The report must be scheduled and run at least once before using the GET `/api/v1/report-results/{report_id}/` endpoint.

To get the report result as a file, do the following:

1. Get the file URL from the endpoint using the following request:
`GET /api/v1/report-results/{report_id}/`
2. Download the report file from the URL that is specified in the request.

NOTE: You can also download a report via an email link by sending a request to run the report (see [Sending a request to run a report by ID](#)).

The report file name has the following format:

`report_<UUID>.<extension>`

19.1 Creating a new report

POST `/api/v1/reports/`

NOTE: It may be easier to start by generating a report in the Armis console, before automating the creation of reports using the API.

19.1.1 Permissions required

- Report > Manage > Create

19.1.2 URI parameters

Name	Type	Description
body	(body)	For exported columns and more information on custom reports, see Custom Reports — Overview and API Reference .

19.1.3 Example

```
{
  "asq": "in:devices",
  "reportName": "test",
  "schedule": {
    "email": ["user@armis.com"],
    "repeatAmount": 2,
    "repeatUnit": "Days",
    "reportFileFormat": "csv",
    "timeOfDay": "15:00",
    "timezone": "Asia/Jerusalem",
    "weekdays": ["Monday"]
  }
}
```

NOTE: The available values for `repeatUnit` field are: Days, Weeks, and Months. For Months, you also need to provide a `dayOfMonth` parameter.

19.1.4 Responses

This API call has the following HTTP status codes:

Code	Description
201	Created. Body: <pre>{ "id": 123 }</pre>
400	In case of a failure to create the report. The data may indicate the reason for the failure. Body: <pre>{ "message": "additional information", "success": false }</pre>
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.
409	Report name already exists.

19.2 Updating a report

PATCH `/api/v1/reports/{report_id}/`

19.2.1 Permissions required

- Report > Manage > Edit

19.2.2 URI parameters

Name	Type	Description
report_id	integer (path)	Patch report by ID.
* Required		
body	(body)	

19.2.3 Example

```
{
  "asq": "in:devices",
  "reportName": "New Report Name",
  "schedule": {
    "email": ["user@armis.com"],
    "repeatAmount": 2,
    "repeatUnit": "Days",
    "reportFileFormat": "csv",
    "timeOfDay": "15:00",
    "timezone": "Asia/Jerusalem",
    "weekdays": ["Monday"]
  }
}
```

NOTES:

- To clear a field, pass it with an empty value, and ASQ will replace all existing rules.
- All fields are optional.
- Fields that are not provided will be ignored.

19.2.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK. Body: <pre>{ "data": {"reportId": 123}, "success": true }</pre>
400	Invalid weekday provided in report schedule.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.
404	Report not found. Body: <pre>{ "message": "additional information", "success": false }</pre>

19.3 Deleting a report by ID

DELETE `/api/v1/reports/{report_id}/`

19.3.1 Permissions required

- Report > Manage > Delete

19.3.2 URI parameters

Name	Type	Description
report_id	(path)	The ID of the report to query.
* Required		

19.3.3 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
404	Report not found. The resource does not exist.

19.4 Getting report details by ID

GET /api/v1/reports/{report_id}/

19.4.1 Permissions required

- Report > Read

19.4.2 URI parameters

Name	Type	Description
report_id	(path)	The ID of the report to query.
* Required		

19.4.3 Example

```
{
  "asq": "in:devices timeFrame:\"1 Day\"",
  "reportName": "My Report",
  "schedule": {
    "email": [
      "test@armis.com"
    ],
    "repeatAmount": "2",
    "repeatUnit": "Days",
    "reportFileFormat": "csv",
    "timeOfDay": "15:00",
    "timezone": "Asia/Jerusalem",
    "weekdays": [
      "Monday"
    ]
  }
}
```

NOTE: The available values for `repeatUnit` field are: Days, Weeks, and Months. For Months, you also need to provide a `dayOfMonth` parameter.

19.4.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
404	The report ID could not be found. Body: <pre>{ "message": "additional information", "success": false }</pre>

19.5 Getting all report details

GET /api/v1/reports/

19.5.1 Permissions required

- Report > Read

19.5.2 URI parameters

None.

19.5.3 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK. Body: <pre>{ "total": 282, "items": [{ "asq": "in:devices", "creationTime": "2022-01-01T17:30", "id": 111, "isScheduled": true, "reportName": "ABC", "schedule": { "email": ["user@armis.com"], "repeatAmount": 2, "repeatUnit": "Days", "reportFileFormat": "csv", "timeOfDay": "15:00", "timezone": "Asia/Jerusalem", "weekdays": "Monday" } }, ...] }</pre>
401	Authorization information is missing or invalid. Name—Authorization. Description—The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type—string.

NOTE: The available values for `repeatUnit` field are: Days, Weeks, and Months. For Months, you also need to provide a `dayOfMonth` parameter.

19.6 Getting the latest report by ID

GET `/api/v1/report-results/{report_id}/`

19.6.1 Permissions required

- Report > Read

19.6.2 URI parameters

Name	Type	Description
report_id	(path)	The ID of the report to query.
* Required		

19.6.3 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK. Body: <pre>{ "data": { "creationTime": "2023-01-01T10:10:10", "url": "https://{report download link}" } }</pre>
400	Custom invalid report parameters error. The data may indicate the reason for the failure.
404	The Report ID could not be found. Body: <pre>{ "message": "additional information", "success": false }</pre>

19.7 Sending a request to run a report by ID

POST /api/v1/reports/{report_id}/_run/

Sends a request to run a report that has a schedule. The new report will be sent via email when ready, to the recipients defined in the report-schedule.

This request will have a rate limit of three reports every five hours, per report ID. A rate limit is required to avoid a single report running repeatedly and creating resource problems.

NOTES:

- To get the report ID, see [Getting all report details](#).
- The report or export link will be sent to you by email. It takes time, please be patient.

19.7.1 Permissions required

- [Report > Manage > Edit](#)

19.7.2 URI parameters

Name	Type	Description
report_id	(path)	The ID of the report to query.
* Required		

19.7.3 Responses

This API call has the following HTTP status codes:

Code	Description
202	OK.
401	Unauthorized.
404	The report ID or report schedule could not be found.
429	Too Many Requests. The rate limit has been exceeded. Body: <pre>{ "message": "additional information", "success": false }</pre>

19.8 System Reports

System Report API endpoints enable you to take daily or weekly snapshots of large datasets, including installed applications, risk factors, and vulnerabilities. Reports are based on fixed queries and field sets, ensuring consistent data formats aligned with console data.

New reports are generated daily at 12:00 am GMT. There's no limit on the amount of data exported.

This section includes the following topics:

- [Creating a new system report](#)
- [Enabling or disabling a system report](#)
- [Getting system report results](#)

19.8.1 Creating a new system report

POST /api/v1/reports/

To create a System Report, you must specify the `reportType` as `system-report`. No other parameters such as `schedule` are allowed for this report type.

NOTE: Upon creation of the system report, you can activate the report immediately by setting the `enabled` field to `true`, as described below. If enabled, the report will run for the first time and daily thereafter at 12:00 am GMT. If you do not enable the report during creation, it will not run until it is explicitly activated. You can activate or deactivate an existing report at any time. For details, see [Enabling or disabling a system report](#).

19.8.1.1 Permissions required

● **Report > Manage > Create**

19.8.1.2 Request body

The request body must be a JSON object containing the following fields:

IMPORTANT: Any other field provided in the request body will be considered invalid and will result in a failure to create the report.

Name	Type	Description
asq	string	The predefined query string that determines the dataset for the report. Must be one of the following exact strings: ● <code>in:riskFactors device:(timeFrame:"30 Days")</code> ● <code>in:applications device:(timeFrame:"30 Days")</code> ● <code>in:vulnerabilities device:(timeFrame:"30 Days")</code>
reportName	string	A unique, user-defined name for the report. This free-text name must be unique across all system reports.
reportType	string	The type of report to create. Must be <code>system-report</code> .
enabled	boolean	Indicates whether the report should be activated upon creation. Can be <code>true</code> or <code>false</code> . If not present, defaults to <code>false</code> . If <code>false</code> or not provided, the report will be created but remain inactive until explicitly enabled.

19.8.1.3 Example

```
{
  "asq": "in:riskFactors device:(timeFrame:\"30 Days\")",
  "reportName": "My Report",
  "reportType": "system-report",
  "enabled": true
}
```

19.8.1.4 Responses

This API call has the following HTTP status codes:

Cod e	Description
201	Created. Body: <pre>{"id": 123}</pre>
400	In case of a failure to create the report. The request body contains invalid data, such as a missing required field, an invalid <code>asq</code> value, an incorrect <code>reportType</code> , or any unexpected/invalid fields. The data in the response body will indicate the reason for the failure. Body (Example): <pre>{ "message": "System report should contains only valid asq parameter.", "success": false }</pre>
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.
403	Forbidden. The authenticated user does not have the necessary permissions to create a system report.
409	Report name already exists. A report with the specified <code>reportName</code> already exists. The <code>reportName</code> must be unique.

19.8.2 Enabling or disabling a system report

This endpoint allows you to change the activation status of an existing system report:

PATCH `/api/v1/reports/{report_id}/`

NOTE: An enabled report will generate daily, while a disabled report will not. The `report_id` required for this call is returned when the report is initially created.

19.8.2.1 Permissions required

- Report > Manage > Edit

19.8.2.2 URI parameters

Name	Type	Description
report_id	string	The unique identifier of the report to modify. A report ID is returned in the response when creating a system report. For details, see Creating a new system report .

19.8.2.3 Request body

Name	Type	Description
enabled	boolean	The desired activation status for the report. • <code>true</code>—Enables the system report. • <code>false</code>—Disables the system report.

19.8.2.4 Example

```
{
  "enabled": true
}
```

19.8.2.5 Responses

This API call has the following HTTP status codes:

Cod e	Description
200	OK. The report status was successfully updated. Body: "success": true
400	Bad Request. The request body contains invalid data, such as a missing <code>enabled</code> field, a non-boolean value for <code>enabled</code> , or any unexpected/invalid fields in the request body. The response body will provide details on the validation error. Body (Example): <pre>json { "message": "Invalid 'enabled' value provided. Must be true or false.", "success": false }</pre>
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.
403	Forbidden. The authenticated user does not have the necessary permissions to modify system reports.
404	Not Found. No report with the specified <code>report_id</code> was found.

19.8.3 Getting system report results

Retrieves the results for a specific system report. The response will include one or more links to the report files, which are typically pre-signed URLs for direct download.

GET `/api/v1/report-results/{report_id}/`

19.8.3.1 Permissions required

- **Report > View > Read**
- Full access to all sites and boundaries

For details on the file content and format of System Reports, see [System Reports—File content and format](#).

19.8.3.2 URI parameters

Name	Type	Description
report_id	string	The unique identifier of the report whose results are to be retrieved. A report ID is returned in the response when creating a system report. For details, see Creating a new system report .

19.8.3.3 Responses

The response will include one or more links to the report files, which are typically pre-signed URLs for direct download. For example:

```

{
  "data": {
    "creationTime": "2025-07-13T00:00:01.106103+00:00",
    "urls": [
      "https://armis-bi-output-qa1.s3.amazonaws.com/AthenaWorkgroups/datalake_
query_service_qa1/52673e3a-5f7c-11f0-8be9-9a4468fd8f4f
/20250713_000001_00000_tmprj_283f38d4-2127-41ed-9e10-c6215b2036c2?X-Amz-
Algorithm=AWS4-HMAC-SHA256&X-Amz-Credential=ASIASUVSVYSQ6QVT3
IE2%2F20250713%2Fus-east-1%2Fs3%2Faws4_request&X-Amz-Date=20250713T140938Z&X-
Amz-Expires=86400&X-Amz-SignedHeaders=host&X-Amz-Security-

Token=IQoJb3JpZ2luX2VjEP7%2F%2F%2F%2F%2F%2F%2F%2F%2F%2FwEaCXVzLWVhc3QtMSJIMEYC
IQcv3dxm2HKtjsLb3cb6KCz3oudqj%2FMITtUugbwriXdh1gIhAOsvdb%

2FNkbf1XxkkDe9zGO%2Bwfd9fLKHe4XdqFdXZU6RKrwFCBcQBROMMTgxODM3MDg3OTA1Igw2%2BXY
nQsq%2BcDU2YjMqmqUXgnkYSySsAISTLzPUdrAtdVXNrWCM6KhC8AckSS

QJPTGaYzz6FzOxvOtsu9uOcLP14J5xd2I9gYPVYKaJoD5V5ff8mZ%2Fd14XIRG5aHpVks%2Bjq5sCr
XbEcWw4tp0V1H0OEvl0CFx01yoyWIINMaU2XLoTwfcQof2z2v8xk7wFP0

97xNKxNEYBMVHUC%2FfXZfkDI4Vig4%2B8pTC%2BxB1kqzRcWkJvVxl5FYMid%2B9EJOkj4MV0Ls%2
FKDPgp%2BO5mZaBMJ5w3vj2uECcA8WYq1H1Dlcm%2F8USP7xoyC9ImQn9

hV2tjvzt6FtFDu4TBhyBEaTyLSJ3CBhixY9AJMUzTh%2FhMw%2Be%2B1w05uyN5TVpFqiHcEZ5snDn
G%2FiTiDUuEem4nCSHvW%2B%2FR6FkFUK%2BsfvblgPDVRYnTKgxU%2Fu

XenHFXjFffn6o0KrDv4NmCdZRyrkNW3hNu2zWn098n7tU0sBoDP3YN1szx1YCviOK4e9tKyLLmZ%2B
8wIoOGG6FnVofsa5pg1IuOjyjRluL6hLYUNYXJidBrOciugXdNP9bRK4t

gcfmstEd7YzFwutUaCUqtQ5LxUNE%2Fv%2BjdW3joUyWg1M1%2FFRdClyU6YQmiH3f9VG0uFFg6Vz
4Q3xs9Tq6tqsr81k08DBHUI%2Bd%2F7aTyWyUn2ODJqgoQmNsOuRGD1JV

VvpwcSxDKspnNqpkilFaJe8akK5f2YWQcyqIOkK6D2Hc2APIl7m8WthDDjc0GXbGN%2Bf2mKZbRjGh
pw4ekuX07altzZ0E7aEJV0HMtp3HvruRsyLBWSmaTdrk%2BrRg40xN46V

HNBbwopk5peYtemdkwilwMv3Q%2BsK1%2F9EFVw05VOa4OPOFSA1N4He1skOgZvH0fy8D8n9Baq79Y
iXVTsvi7D1jdxDCh6c7DBjqwATj1MwcDFsUebqVr%2BY3vA4jd3%2BUde

Tk0idCX71I9BblZyleWib%2F3KwlkX%2BcDF2kuWh7t%2BO7d7%2BR9mFya8ni5BgFMtPV96IbhSU3
4dPEjPXFkaFX3YTR7ZG4cEaN2zu0yfEpz4dTfZlCM9o7gTOOjtfsDk2q%

2FGBEiNSNdgbwCgVrMByCn9xcDcfrQpBmh35CMBVBxT2wQMtmP9YFMn4p27tISdCkHB5ST5Wp0rXaX
Y4CG&X-Amz-Signature=a3bf0edf17064bd2e4f0a98e054109209205
1d63576811aacabc3f708921bd9b"
    ]
  },
  "success": true
}

```

This API call has the following HTTP status codes:

Code	Description
200	OK. The report results links were successfully retrieved. The response body contains the <code>creationTime</code> of the report and an array of URLs to the report files. These URLs allow direct download of the report data. IMPORTANT: These URLs are time-limited (e.g., pre-signed S3 URLs) and should be used promptly. See the example above. For details on the file content and format, see System Reports—File content and format.
401	Authorization information is missing or invalid. Name—Authorization. Description—The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type—string.
403	Forbidden. The authenticated user does not have the necessary permissions to view system report results.
404	Not Found. No report with the specified <code>report_id</code> was found, or no report results are available for the requested report.

20 Risk Factors

20.1 Getting Risk Factor matches by device IDs

GET /api/v1/risk-factor-matches/

The Bulk Risk Factor endpoint retrieves risk data mapped directly to specific assets. This endpoint eliminates the need for manual "joins" between device and risk datasets.

This endpoint provides a direct stream from the global risk factor table, enabling the retrieval of risk data. Each record in the response represents an individual risk factor and includes the associated `device_id`.

- **Scalability**—Supports environments with thousands of devices.
- **Efficiency**—Consolidates device identity and risk posture into a single nested JSON structure.

20.1.1 Permissions required

Risk Factor > Read

20.1.2 URI parameters

Name	Type	Description
device_ids	string	Optional. A comma-separated list IDs. e.g., 12345, 67890
from_time	string	Optional. ISO 8601 timestamp. e.g., 2026-02-21T00:00:00Z. Returns only risk factors seen after this time.
limit	integer	Optional. Maximum records per page. The default/maximum is 10,000. Values > 10,000 are automatically capped at the maximum.
cursor	string	Optional. Base64 encoded pagination cursor from a previous response. The cursor contains three fields used for deterministic sorting: <code>last_seen_time</code> (ASC), <code>risk_id</code> (ASC), and <code>category</code> (ASC tiebreaker).

20.1.3 Example

```
{
  "data": {
    "count": 4,
    "items": [
      {
        "category": "behavioural",
        "description": "Unencrypted Traffic: HTTP",
        "device_id": "700",
        "evidence_asq": "in:ipConnections protocol:HTTP",
        "evidence_text": "HTTP IP Connections",
        "first_seen": "2026-02-24T13:44:03Z",
        "group": "INSECURE_TRAFFIC_AND_BEHAVIOR",
        "last_seen": "2026-02-24T13:44:03Z",
        "remediation": "Encrypt Network Traffic",
        "remediation_description": "Identify and disable all unencrypted communication protocols (e.g., HTTP, FTP) on your devices",
        "risk_id": "336420354",
        "score": 2,
        "source": "ARMIS",
        "status": "OPEN",
        "type": "UNENCRYPTED_TRAFFIC"
      },
      {
        "category": "behavioural",
        "description": "SMBv1 traffic detected",
        "device_id": "695",
        "evidence_asq": "in:ipConnections protocol:SMBv1",
        "evidence_text": "SMBv1 IP Connections",
        "first_seen": "2026-02-24T13:47:26.825959Z",
        "group": "INSECURE_TRAFFIC_AND_BEHAVIOR",
        "last_seen": "2026-02-24T13:47:26.825959Z",
        "remediation": "Disable SMBv1 Protocol",
        "remediation_description": "Disable support for the SMBv1 protocol on devices.",
        "risk_id": "336420410",
        "score": 6,
        "source": "ARMIS",
        "status": "OPEN",
        "type": "SMBV1_USAGE"
      },
    ],
    "next_cursor":
    "eyJjYXRlZ29yeSI6ICJiZW5hdmlvdXJhbCI6ICJjYXN0X3NlZW5fdGltZSI6ICJy...=",
  },
  "success": true
}
```

20.1.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request, please check the arguments you passed. Validation Error. Common causes include: ● Non-numeric or malformed <code>device_ids</code>. ● Invalid ISO 8601 format for <code>from_time</code>. ● Limit is non-numeric or ≤ 0. ● Malformed or invalid Base64 cursor.
401	Authorization information is missing or invalid. Name— Authorization. Description— The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type— string.

21 Roles

21.1 Getting details of all roles

GET /api/v1/roles/

21.1.1 Permissions required

- Settings > Users And Roles > Read

21.1.2 URI parameters

None.

21.1.3 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.

21.2 Creating a new role

POST /api/v1/roles/

21.2.1 Permissions required

- Settings > Users and Roles > Manage > Roles > Create

21.2.2 URI parameters

Name	Type	Description
Body * Required	(body)	The role privileges. The set includes PII permissions (in <code>advancedPermissions</code>) and permissions per system entity. Each parameter and its nested options are Boolean. If a parent option is True, all its nested options must be True. If a nested option is False, its parent option cannot be True.

21.2.3 Example


```

{
  "name": "Custom Role",
  "permissions": {
    "advancedPermissions": {
      "all": true,
      "behavioral": {
        "all": true,
        "applicationName": {
          "all": true
        },
        "hostName": {
          "all": true
        },
        "serviceName": {
          "all": true
        }
      },
      "device": {
        "all": true,
        "deviceNames": {
          "all": true
        },
        "ipAddresses": {
          "all": true
        },
        "macAddresses": {
          "all": true
        },
        "phoneNumbers": {
          "all": true
        }
      }
    },
    "alert": {
      "all": true,
      "manage": {
        "all": true,
        "resolve": {

```

```

        "all": true
    },
    "suppress": {
        "all": true
    },
    "whitelistDevices": {
        "all": true
    }
},
"read": {
    "all": true
}
},
"all": true,
"business_applications": {
    "all": true,
    "manage": {
        "all": true,
        "delete": {
            "all": true
        },
        "upsert": {
            "all": true
        }
    },
    "read": {
        "all": true
    }
},
"device": {
    "all": true,
    "manage": {
        "all": true,
        "create": {
            "all": true
        },
        "edit": {
            "all": true
        },
        "enforce": {
            "all": true,

```

```

    },
    "read": {
      "all": true
    }
  },
  "risk_factor": {
    "all": true,
    "manage": {
      "all": true,
      "ignore": {
        "all": true
      },
      "resolve": {
        "all": true
      }
    },
    "read": {
      "all": true
    }
  },
  "settings": {
    "all": true,
    "auditLog": {
      "all": true
    },
    "boundary": {
      "all": true,
      "manage": {
        "all": true,
        "create": {
          "all": true
        },
        "delete": {
          "all": true
        },
        "edit": {
          "all": true
        }
      },
      "read": {
        "all": true
      }
    },
    "businessImpact": {
      "all": true,
      "manage": {
        "all": true
      }
    }
  }
}

```

```

    },
    "user": {
      "all": true,
      "read": {
        "all": true
      }
    },
    "vulnerability": {
      "all": true,
      "manage": {
        "all": true,
        "ignore": {
          "all": true
        },
        "resolve": {
          "all": true
        },
        "write": {
          "all": true
        }
      },
      "read": {
        "all": true
      }
    }
  }
}

```

21.2.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. Name—Authorization. Description—The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type—string.
404	Unknown role.

21.3 Deleting a role

DELETE /api/v1/roles/{role_id}/

21.3.1 Permissions required

- Settings > Users and Roles > Manage > Roles > Delete

21.3.2 URI parameters

Name	Type	Description
role_id	(path)	The role ID in the Armis system.
* Required		

21.3.3 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.
404	Unknown role.

21.4 Get role details

GET /api/v1/roles/{role_id}/

21.4.1 Permissions required

- Settings > Users and Roles > Read

21.4.2 URI parameters

Name	Type	Description
role_id	(path)	The role ID in the Armis system.
* Required		

21.4.3 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
404	Unknown role.

21.5 Update role privileges

PATCH /api/v1/roles/{role_id}/

21.5.1 Permissions required

- Settings > Users and Roles > Manage > Roles > Edit

21.5.2 URI parameters

Name	Type	Description
role_id	(path)	The role ID in the Armis system.
* Required		
body	(body)	The role privileges. The set includes PII permissions (in advancedPermissions) and permissions per system entity. Each parameter and its nested options are Boolean. If a parent option is True, all its nested options must be True. If a nested option is False, its parent option cannot be True.
* Required		

21.5.3 Example

```

{
  "name": "Custom Role",
  "permissions": {
    "advancedPermissions": {
      "all": true,
      "behavioral": {
        "all": true,
        "applicationName": {
          "all": true
        },
        "hostName": {
          "all": true
        },
        "serviceName": {
          "all": true
        }
      },
      "device": {
        "all": true,
        "deviceNames": {
          "all": true
        },
        "ipAddresses": {
          "all": true
        },
        "macAddresses": {
          "all": true
        },
        "phoneNumbers": {
          "all": true
        }
      }
    },
    "alert": {
      "all": true,
      "manage": {
        "all": true,
        "resolve": {

```

```
        "all": true
    },
    "suppress": {
        "all": true
    },
    "whitelistDevices": {
        "all": true
    }
},
"read": {
    "all": true
}
},
"all": true,
"business_applications": {
    "all": true,
    "manage": {
        "all": true,
        "delete": {
            "all": true
        },
        "upsert": {
            "all": true
        }
    },
    "read": {
        "all": true
    }
},
"device": {
    "all": true,
    "manage": {
        "all": true,
        "create": {
            "all": true
        },
        "edit": {
            "all": true
        },
        "enforce": {
            "all": true,
```



```

    },
    "read": {
      "all": true
    }
  },
  "risk_factor": {
    "all": true,
    "manage": {
      "all": true,
      "ignore": {
        "all": true
      },
      "resolve": {
        "all": true
      }
    },
    "read": {
      "all": true
    }
  },
  "settings": {
    "all": true,
    "auditLog": {
      "all": true
    },
    "boundary": {
      "all": true,
      "manage": {
        "all": true,
        "create": {
          "all": true
        },
        "delete": {
          "all": true
        },
        "edit": {
          "all": true
        }
      },
      "read": {
        "all": true
      }
    },
    "businessImpact": {
      "all": true,
      "manage": {
        "all": true
      }
    }
  }
}

```

```

},
  "user": {
    "all": true,
    "read": {
      "all": true
    }
  },
  "vulnerability": {
    "all": true,
    "manage": {
      "all": true,
      "ignore": {
        "all": true
      },
      "resolve": {
        "all": true
      },
      "write": {
        "all": true
      }
    },
    "read": {
      "all": true
    }
  }
}

```

21.5.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.
404	Unknown role.

22 Search

22.1 Return search result for given ASQ search string

GET /api/v1/search/

22.1.1 Permissions required

- NONE

22.1.2 URI parameters

Name	Type	Description
aql *Required	string (query)	The AQL search string
fields	(query)	Fields to show. If omitted, returns a default subset of fields. See Searches types .
from	integer (query)	Paging from
length	integer (query)	Paging length
includeTotal	boolean (query)	If set to "false", the total count will not be calculated.
orderBy	string (query)	Sort order for results, values separated by commas. Default direction is ASC.
tz	string (query)	The time zone to run the query.
cursor	string (query)	Fetches results subsequent to the previous response using a Base64-encoded cursor. Constraints: Supported for Alert entities only. The `from` parameter must be 0.

NOTES:

- Returned fields—All fields will be returned, except for nested entities which will be returned as a list of IDs.
- Optional filters—All filters available for the entity in the ASQ.

22.1.3 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request. Missing <code>aql</code> parameter.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.

22.1.4 Searches types

The following types of searches are supported:

[activity](#)

[alerts](#)

[auditlog](#)

[applications](#)

[businessApplications](#)

[connections](#)

[devices](#)

[operatingSystems](#)

[riskFactors](#)

[services](#)

[traffic](#)

[users](#)

[vulnerabilities](#)

22.1.4.1 activity

GET `https://<armis-instance>.armis.com/api/v1/search/?aql=in:activity`
{optional filters}

22.1.4.1.1 Example

GET `https://<armis-instance>.armis.com/api/v1/search/?aql=in:activity`
`type:"Dns Query"`

```
{
  "data": {
    "results": [
      {
        "activityUUID": "sBEbYGsBAAAAABkzx4s",
        "title": "e0553d490 performed DNS query to domain 'abc-ssl.xyz.com'",
        "content": "Resolved IPs: 152.101.26.236",
        "type": "Dns Query",
        "protocol": "Wifi",
        "sensor": {
          "name": "0c:8d:db:b2:61:3e"
        },
        "time": "2019-03-06T13:08:53.016075+00:0",
        "deviceIds": [1475,1498],
        "connectionIds": [1599, 9804]
      }
    ]
  },
  "success": true
}
```

22.1.4.1.2 Response parameters

Name	Type	Description
activityUUID	string	Activity ID.
content	string	Additional activity information.
connectionIds	list[integer]	List of connection IDs which are related to the activity.
deviceIds	list[integer]	List of devices IDs which are related to the activity.
protocol	string	Protocol used - Network, Wi-Fi etc.
sensor	JSON	Name of sensor that picked up the activity. name sensor name

Name	Type	Description
site	JSON	The sites where the sensor that picked up the connection is located. - location— The site location. - name— The site name.
sites	JSON	The sites where the sensor that picked up the connection is located. This parameter is used for multiple sites and replaces the <code>site</code> parameter. - location— The site location. - name— The site name.
title	string	Activity title.
type	string	Type of activity i.e., First connect, New Device, SSID Beacon Started, etc.
time	timestamp	Activity timestamp.

22.1.4.2 alerts

GET `https://<armis-instance>.armis.com/api/v1/search/?aql=in:alerts`
{optional filters}

22.1.4.2.1 Examples

The following are examples for retrieving all of the alerts from Armis Centrix™:

cURL

```
curl "https://<armis-instance>.armis.com/api/v1/search/?aql=in:alerts" -  
H 'Authorization: <access-token>'
```

Python

```
response = requests.get(url="https://<armis-  
instance>.armis.com/api/v1/search/",  
                        params={"aql": "in:alerts"},  
                        headers={"Authorization": <access-token>})
```


The response will be a JSON array of alerts similar to this:

```
{
  "data": {
    "count": 10,
    "next": 10,
    "prev": null,
    "results": [
      {
        "activityUUIDs": [
          "AHlSvXkBAAAAAE-7NRHb"
        ],
        "alertId": 7,
        "connectionIds": [
          37919,
          37925,
          37926
        ],
        "description": null,
        "deviceIds": [
          151,
          13
        ],
        "severity": "High",
        "status": "Unhandled",
        "time": "2021-05-30T08:19:03.543857+00:00",
        "title": "Krack attack detected",
        "type": "Anomaly Detection"
      },
      ...
    ],
    "total": 24
  },
  "success": true
}
```

An example for Alerts Status that are Unhandled:

GET <https://<armis-instance>.armis.com/api/v1/search/?aql=in:alerts status:Unhandled>

```

{
  "data": {
    "results": [
      {
        "alertId": 600,
        "title": "Restricted Device Connected to the Internet",
        "type": "SYSTEM_POLICY_VIOLATION",
        "time": "2019-03-06T13:08:53.016075+00:0",
        "severity": "Medium",
        "status": "Unhandled",
        "description": "System policy violation alert",
        "deviceIds": [1475,1498],
        "connectionIds": [1599,9804],
        "activityUUIDs": ["CyVdYGsBAAAAAABkjLed","mNVdYGsBAAAAAABkjLZe"]
      }
    ]
  },
  "success": true
}

```

The following example shows how the IP address and MAC address were added to source and destination endpoints for alerts.

```

{
  "data": {
    "count": 1,
    "next": null,
    "prev": null,
    "results": [
      {
        "activityUUIDs": [
          "7Dw-S5EBAAAAAAAFpyh_"
        ],
        "affectedDevicesCount": 1,
        "alertId": 3348149,
        "classification": "Security - Risk",
        "connectionIds": [],
        "description": "The Armis security platform has detected a violation
of a policy and generated an alert.",
        "destinationEndpoints": [
          {
            "id": "2xx.255.255.250",
            "name": "2xx.255.255.250"
          }
        ],
        "deviceIds": [
          1829094
        ],
        "mitreAttackLabels": [
          {
            "matrix": "Enterprise",
            "subTechnique": null,
            "tactic": "TA0043 Reconnaissance",
            "technique": "T1592 Gather Victim Host Information"
          }
        ],
        "policyId": "13485",
        "policyLabels": [
          "general"
        ],
        "policyTitle": "Exclude scanners ",
        "severity": "Medium",
        "sourceEndpoints": [
          {
            "id": 1829094,
            "ip": [
              "10.201.0.125"
            ],
            "macAddress": [
              "xx:0C:29:72:01:1F"
            ],
            "name": "proplus"
          }
        ],
        "status": "Unhandled",
        "statusChangeTime": "2024-08-13T10:10:41+00:00",
        "time": "2024-08-13T10:10:41+00:00",
        "title": "Exclude scanners "
      }
    ]
  }
}

```

```

        "type": "System Policy Violation"
    }
],
    "total": 1
},
    "success": true
}

```

22.1.4.2.2 Response parameters

Name	Type	Description
alertId	integer	ArmIS alert ID.
activityUUIDs	list[string]	List of related activity IDs.
connectionIds	list[integer]	List of IDs of the connections related to the alert
description	string	User-defined alert description.
deviceIds	list[integer]	List of IDs of the devices related to the alert.
lastAlertUpdateTime	timestamp	Timestamp of when the alert was last updated to include the most recent events.
severity	string	Alert severity (Low/Medium/High).
status	string	Alert status i.e., Unhandled/Resolved.
title	string	Alert title.
type	string	Alert type, i.e., System/User Policy Violation, Anomaly Detection, etc.
time	timestamp	Alert timestamp.

22.1.4.3 auditlog

Queries the Armis Centrix™ audit log. This enhances visibility into user actions and system events, which improves monitoring, ensures compliance, and streamlines troubleshooting.

GET `https://<armis-instance>.armis.com/api/v1/search/?aql=in:auditLog {optional filters}`

22.1.4.3.1 Parameters

The `aql` parameter uses Armis Standard Query (ASQ also called AQL or Armis Query Language) to filter the results. The query must start with `in:auditLog`.

You can use the following filters within the `aql` string:

- `timeFrame`—Filters by time range (e.g., "7 Days", "30 Minutes").
- `action`—Filters by the user action (e.g., "Login Attempt", "Add Tag").
- `user`—Filters by the user's name or email (e.g., "John").

Example cURL and Python requests

This example shows how to query the audit log for all actions performed by a user named "John" within the last 7 days.

cURL

```
curl -X 'GET' \
  'https://<armis-instance>.armis.com/api/v1/search/?
aql=in%3AauditLog%20timeFrame%3A%227%20Days%22%20user%3A%22John%22&includeSample=true&includeTotal=true' \
  -H 'accept: application/json'
```

Python

```
response = requests.get(url="https://<armis-
instance>.armis.com/api/v1/search/",
    params={"aql": 'in:auditLog timeFrame:"7 Days" user:"John"',
            "includeSample": "true",
            "includeTotal": "true"
    },
    headers={"Authorization": "<access-token>"})
```

Example JSON response

The response is a JSON object that includes a `data` field containing the query results.

```
{
  "data": {
    "count": 1,
    "next": 10,
    "prev": null,
    "results": [
      {
        "action": "Login Attempt",
        "additionalInfo": {
          "data": "IP: 192.168.1.1, User Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64)",
          "type": "TEXT"
        },
        "id": 10283019,
        "time": "2025-09-18T07:10:16.982717+00:00",
        "timeUtc": "2025-09-18T07:10:16.982717+00:00",
        "trigger": "User Action",
        "user": "John (john.smith123@gmail.com)",
        "userIp": "None"
      }
    ],
    "total": 190
  },
  "success": true
}
```

22.1.4.3.2 Response parameters

Name	Type	Description
ID	integer	The ID assigned to the audit log entry.
time	timestamp	The time the action occurred.
timeUtc	timestamp	The time the action occurred (UTC).
trigger	string	The source or origin that initiated the event. This field indicates what component, service, or action caused the log entry to be created.
action	JSON	The action that occurred.
user	string	The user who performed the action.
userIp	list	A list of IP addresses associated with the user. (e.g., ["192.168.1.1"]).
additionalInfo	string	Additional information.

22.1.4.4 applications

GET `https://<armis-instance>.armis.com/api/v1/search/?aql=in:applications`
{optional filters}

22.1.4.4.1 Examples

The following are examples for retrieving all the applications from Armis Centrix™:

cURL

```
curl "https://<armis-instance>.armis.com/api/v1/search/?aql=in:applications"  
-H 'Authorization: <access-token>'
```

Python

```
response = requests.get(url="https://<armis-  
instance>.armis.com/api/v1/search/",  
    params={"aql": "in:applications"},  
    headers={"Authorization": <access-token>})
```

The response will be a JSON array of devices similar to this:

```
{  
  "data": {  
    "count": 10,  
    "next": 10,  
    "prev": null,  
    "results": [  
      {  
        "devices": 502,  
        "firstSeen": "2020-08-13T09:23:36.147000+00:00",  
        "lastSeen": "2023-01-15T18:19:01+00:00",  
        "name": "Audio MIDI Setup",  
        "version": "3.5"  
      },  
      ...  
    ],  
    "total": 3200  
  },  
  "success": true  
}
```

NOTE: The total number of applications is the value for “total”, in this case 3,200. However, the Armis API defaults to a page size of 10, so there will be only 10 application elements in the results array that is returned. To use a different page size, refer to [Paging through large amounts of data](#).

Additional example for a 7 day period and OpenSSH

GET `https://<armis-instance>.armis.com/api/v1/search/?aql=in:applications`
`timeFrame:"7 Days" name:OpenSSH`

```
{
  "data": {
    "results": [
      {
        "devices": 6,
        "firstSeen": "2020-09-28T18:57:58.731657",
        "lastSeen": "2020-10-05T07:22:33.145168",
        "name": "OpenSSH",
        "version": "7.4p1"
      }
    ]
  },
  "success": true
}
```

22.1.4.4.2 Response parameters

Name	Type	Description
devices	integer	The number of devices that used the application.
firstSeen	timestamp	When the application was first used.
lastSeen	timestamp	When the application was last used.
name	string	Application name e.g., OpenSSH
version	string	The version of the application.

22.1.4.5 businessApplications

GET <https://<armis-instance>.armis.com/api/v1/search/?aql=in:businessApplications> {optional filters}

22.1.4.5.1 Example

GET <https://<armis-instance>.armis.com/api/v1/search/in:businessApplications>


```

{
  "data": {
    "count": 2,
    "next": null,
    "prev": null,
    "results": [
      {
        "businessCriticality": "Critical",
        "businessOwner": "Iorek B",
        "businessUnit": null,
        "description": "Database application to store our users",
        "deviceIds": [
          2145
        ],
        "firstSeen": "2023-05-09T08:32:05.223649+00:00",
        "id": 6,
        "installationType": "SAAS",
        "lastSeen": "2023-05-09T08:32:05.223649+00:00",
        "name": "My_app",
        "operationalStatus": null,
        "type": "Homegrown"
      },
      {
        "businessCriticality": "Critical",
        "businessOwner": "Ariel B",
        "businessUnit": null,
        "description": "Demo of Business Application.",
        "deviceIds": [
          556,
          599,
          378,
          564,
          398,
          1771,
          929,
          1938,
          1099,
          6888
        ],
        "firstSeen": "2023-06-19T12:06:29.081237+00:00",
        "id": 14,
        "installationType": "SAAS",
        "lastSeen": "2023-06-19T12:06:29.081237+00:00",
        "name": "Business Application Demo",
        "operationalStatus": null,
        "type": "Homegrown"
      }
    ],
    "total": 2
  },
  "success": true
}

```

22.1.4.5.2 Response parameters

Name	Type	Description
businessCriticality	string	Describes how critical the business application is. Allowed values: Critical, High, Medium, Low. Mandatory.
businessOwner	string	Describes the Business Owner. Mandatory.
businessUnit	string	Describes the Business Unit.
description	string	A short description for the business application.
deviceIds	list	Device IDs.
firstSeen	timestamp	When the business application was first used.
id	integer	The ID assigned to the business application.
installationType	string	E.g., None, On-Premise, Cloud.
lastSeen	timestamp	When the business application was last used.
name	string	The name of the business application. Mandatory.
operationalStatus	string	Allowed values: Ready or Retired state
type	Enum	The application type. Allowed values: Commercial off the shelf, Homegrown

22.1.4.6 connections

GET `https://<armis-instance>.armis.com/api/v1/search/?aql=in:connections`
{optional filters}

22.1.4.6.1 Example

GET `https://<armis-instance>.armis.com/api/v1/search/?aql=in:connections`
`timeFrame:"7 Days" protocol:Wi-Fi`

```
{
  "data": {
    "results": [
      {
        "band": null,
        "channel": null,
        "dhcpAuthenticationDuration": null,
        "duration": null,
        "endTimeStamp": "2020-10-05T07:52:18.760804",
        "id": 1408,
        "inboundTraffic": 1024,
        "outboundTraffic": 0,
        "protocol": "Wi-Fi",
        "radiusAuthenticationDuration": null,
        "risk": "Medium",
        "rssi": null,
        "sensor": {
          "name": "0c:8d:db:b2:64:66",
          "type": "Access Point"
        },
        "site": {
          "location": "NYU",
          "name": "NYU"
        },
        "snr": null,
        "sourceId": 169,
        "startTimeStamp": "2020-10-05T07:52:18.760804",
        "targetId": 254,
        "title": "Connection between HPE8D8D1E0498F and Skynet",
        "totalAssociationDuration": null,
        "traffic": 1024,
        "wlanAssociationDuration": null
      }
    ]
  },
  "success": true
}
```

22.1.4.6.2 Response parameters

Name	Type	Description
band	string	The frequency at which the connection was established: 2.4GHZ or 5GHZ.
bssid	string	The BSSID of the access point or wireless router.
channel	integer	The channel at which connections were established.
duration	integer	Total duration of the connection.
endTimestamp	timestamp	When the connection was ended.
id	integer	The ID assigned to the connection.
inboundTraffic	integer	The volume of the inbound traffic.
outboundTraffic	integer	The volume of the outbound traffic.
protocol	string	Protocol used (Network, Wi-Fi, etc.)
risk	string	The risk associated with the specific connection.
rsi	integer	The level of the signal strength during the connection. RSSI stands for Received Signal Strength Indicator.
sensor	JSON	The sensor that picked up the connection. ● name— The sensor name. ● type— The sensor type.
site	JSON	The site where the sensor that picked up the connection is located. ● location— The site location. ● name— The site name.
sites	JSON	The sites where the sensor that picked up the connection is located. This parameter is used for multiple sites and replaces the <code>site</code> parameter. ● location— The site location. ● name— The site name.
snr	integer	The SNR (signal-to-noise) ratio expressed in decibels.

Name	Type	Description
sourceId	integer	The ID of the connection source.
ssid	integer	The SSID for the network.
startTimestamp	timestamp	When the connection was started.
targetId	integer	The ID of the connection target.
title	string	The title assigned to the connection by Armis.
traffic	integer	Total traffic that passed during the connection.

22.1.4.7 devices

GET `https://<armis-instance>.armis.com/api/v1/search/?aql=in:devices`
{optional filters}

22.1.4.7.1 Examples

The following are examples of retrieving all the devices from Armis Centrix™:

cURL

```
curl "https://<armis-instance>.armis.com/api/v1/search/?aql=in:devices"  
-H 'Authorization: <access-token>'
```

Python

```
response = requests.get(url="https://<armis-  
instance>.armis.com/api/v1/search/",  
                        params={"aql": "in:devices"},  
                        headers={"Authorization": <access-token>})
```

The response will be a JSON array of devices similar to the following:

```

{
  "data": {
    "count": 10,
    "next": 10,
    "prev": null,
    "results": [
      {
        "accessSwitch": null,
        "boundaries": "Off Network",
        "businessImpact": "Unassigned",
        "category": "Network Equipment",
        "customProperties": {},
        "dataSources": [
          {
            "firstSeen": "2022-04-25T14:56:00+00:00",
            "lastSeen": "2023-01-15T19:14:08+00:00",
            "name": "Meraki",
            "types": [
              "WLC"
            ]
          },
          {
            "firstSeen": "2023-01-09T07:36:32+00:00",
            "lastSeen": "2023-01-15T19:22:40+00:00",
            "name": "Aruba WLC",
            "types": [
              "WLC"
            ]
          }
        ],
        "firstSeen": "2020-01-12T09:35:28+00:00",
        "id": 303239,
        "ipAddress": "",
        "lastSeen": "2022-01-15T19:22:40+00:00",
        "macAddress": "E2:63:22:AC:70:96",
        "manufacturer": null,
        "model": null,
        "name": null,
        "operatingSystem": null,
        "operatingSystemVersion": null,
        "riskLevel": 1,
        "sensor": {
          "name": "a8:46:9d:1c:92:ea",
          "type": "Access Point"
        },
        "site": null,
        "tags": [
          "Access Point"
        ],
        "type": "Access Points",
        "userIds": [],

```

```

    "visibility": "Full"
  },
  {
    "accessSwitch": null,
    "boundaries": "Off Network",
    "businessImpact": "Unassigned",
    "category": "Network Equipment",
    "customProperties": {},
    "dataSources": [
      {
        "firstSeen": "2021-10-19T16:29:52+00:00",
        "lastSeen": "2022-01-15T19:14:08+00:00",
        "name": "Meraki",
        "types": [
          "WLC"
        ]
      },
      {
        "firstSeen": "2021-12-13T09:33:52+00:00",
        "lastSeen": "2021-01-15T19:14:08+00:00",
        "name": "Aruba WLC",
        "types": [
          "WLC"
        ]
      }
    ],
    "firstSeen": "2021-09-14T15:07:39+00:00",
    "id": 983,
    "ipAddress": "",
    "lastSeen": "2023-01-15T19:22:40+00:00",
    "macAddress": "44:48:C1:CD:C9:E0",
    "manufacturer": "Hewlett Packard",
    "model": "Hewlett device",
    "name": "i-a-instant",
    "operatingSystem": null,
    "operatingSystemVersion": null,
    "riskLevel": 2,
    "sensor": {
      "name": "d0:15:66:cf:f9:de",
      "type": "Access Point"
    },
    "site": null,
    "tags": [
      "SSID=i-A-Instant",
      "Off Network",
      "Access Point"
    ],
    "type": "Access Points",
    "userIds": [],
    "visibility": "Full"
  },
  ...
],
"total": 4415

```



```

    },
    "success": true
  }

```

NOTES:

- The total number of devices is the value for “total”, in this case 4415. However, the Armis API defaults to a page size of 10, so there will be only 10 device elements in the results array that is returned. To use a different page size, refer to [Paging through large amounts of data](#).
- You can also add fields as parameters to get additional properties, for example:

```

api/v1/search/?aql=in%3Adevices&fields=carbonBlackDefenseStatus&includeTotal=true

```

The format of the properties needs to be the same as the ASQ format of the field.

22.1.4.7.2 Response parameters

Name	Type	Description
accessSwitch	string	The name of the access switch.
boundaries	string	Armis boundaries e.g., Off Network
businessImpact	string	Business Impact level.
category	string	The device category: computer, handheld, medical, and so on.
customProperties	JSON	JSON list of custom properties.
dataSources	list	List of data sources.
firstSeen	timestamp	When was the device first seen.
id	integer	Device ID.
ipAddress	string	Device IP address.
ipv6	list	Device IPv6 address.
lastSeen	timestamp	when was the device last seen
macAddress	string	Device MAC address.
manufacturer	string	Device manufacturer, represented in the Armis console as Brand.
model	string	Device model.
name	string	Device name.
names	string	Device names.
operatingSystem	string	Device operating system.
operatingSystemVersion	string	device operating system version

Name	Type	Description
purdueLevel	string	The Purdue level.
riskLevel	string	Risk level assigned to the device: Low (1-30), Medium (31-70), High (71-90), or Critical (91-100).
sensor	JSON	Last sensor that saw the device name: The sensor name.
site	JSON	Site to which the sensor belongs. - location: The site location. - name site name
tier	string	Display the tier information for device ASQs
tags	list[string]	Attached device tags.
type	string	Device type.
user	string	Device user.
userIds	list	List of User IDs.
visibility	string	The visibility e.g., Full.

22.1.4.8 operatingSystems

GET https://<armis-instance>.armis.com/api/v1/search/?aql=in:operatingSystems {optional filters}

22.1.4.8.1 Example

GET https://<armis-instance>.armis.com/api/v1/search/?aql=in:operatingSystems

```
{
  "data": {
    "count": 10,
    "next": 10,
    "prev": null,
    "results": [
      {
        "devices": 9,
        "firstSeen": "2023-02-13T12:04:26.626349+00:00",
        "lastSeen": "2023-10-12T08:20:14.149862+00:00",
        "name": "Amazon Linux",
        "version": "2"
      },
      {
        "devices": 2,
        "firstSeen": "2023-05-04T17:37:34.895874+00:00",
        "lastSeen": "2023-10-06T13:59:26+00:00",
        "name": "Amazon Linux",
        "version": "2023"
      },
      {
        "devices": 60,
        "firstSeen": "2023-02-12T16:10:35+00:00",
        "lastSeen": "2023-10-12T11:29:04+00:00",
        "name": "Android",
        "version": ""
      },
      {
        "devices": 2,
        "firstSeen": "2023-02-13T12:14:48.044508+00:00",
        "lastSeen": "2023-10-12T13:33:33.785147+00:00",
        "name": "ArubaOS",
        "version": ""
      }
    ],
    "total": 114
  },
  "success": true
}
```

22.1.4.8.2 Response parameters

Name	Type	Description
devices	integer	The number of devices that run the operating system.
firstSeen	timestamp	When the operating system was first seen.
lastSeen	timestamp	When the operating system was last seen.
name	string	The name of the operating system e.g., iOS, Android
version	string	The version of the operating system.

22.1.4.9 riskFactors

GET `https://<armis-instance>.armis.com/api/v1/search/?aql=in:riskFactors`
{optional filters}

22.1.4.9.1 Example

GET `https://<armis-instance>.armis.com/api/v1/search/?aql=in:riskFactors`

```

{
  "data": {
    "count": 10,
    "next": 10,
    "prev": null,
    "results": [
      {
        "category": "Behavioural",
        "description": "Policy Violation",
        "devices": 6123,
        "group": "Policies",
        "lastSeen": "2023-10-12T13:45:36+00:00",
        "score": "High",
        "status": "Open",
        "type": "Policy Violations"
      },
      {
        "category": "Profile",
        "description": "Device is accepting SMBv1 requests.",
        "devices": 10,
        "group": "Configuration",
        "lastSeen": "2023-10-12T13:34:36.618362+00:00",
        "score": "Medium",
        "status": "Open",
        "type": "SMBv1 Support"
      },
      {
        "category": "Behavioural",
        "description": "Policy Violation",
        "devices": 38,
        "group": "Policies",
        "lastSeen": "2023-10-12T13:32:48+00:00",
        "score": "Medium",
        "status": "Ignored",
        "type": "Policy Violations"
      },
      {
        "category": "Profile",
        "description": "Manufacturer 'VMware' detected",
        "devices": 801,
        "group": "Hardware",
        "lastSeen": "2023-10-12T11:20:39.254261+00:00",
        "score": "Low",
        "status": "Open",
        "type": "Manufacturer Reputation"
      },
      {
        "category": "Profile",
        "description": "Manufacturer 'Apple' detected",
        "devices": 4637,
        "group": "Hardware",
        "lastSeen": "2023-10-12T10:34:52.348939+00:00",
        "score": "Low",
        "status": "Open",
        "type": "Manufacturer Reputation"
      }
    ]
  }
}

```

```

    }
  ],
  "total": 223
},
"success": true
}

```

22.1.4.9.2 Response parameters

Name	Type	Description
category	string	The risk category e.g., Profile.
description	string	Description of a risk factor.
devices	integer	The number of devices on which the risk factor is detected.
group	string	E.g., Policies, Hardware
lastSeen	timestamp	When the risk factor was last detected.
score	string	The score assigned to the risk factor.
status	string	E.g., Open, Ignored.
type	string	The risk factor type.

22.1.4.10 services

GET <https://<armis-instance>.armis.com/api/v1/search/?aql=in:services>
 {optional filters}

22.1.4.10.1 Example

GET <https://<armis-instance>.armis.com/api/v1/search/?aql=in:services>
timeFrame:"7 Days" name:(zoom)

```
{
  "data": {
    "results": [
      {
        "devices": 6,
        "firstSeen": "2020-09-28T19:00:00",
        "hosts": 1,
        "inboundTraffic": 123581783523,
        "jitterMS": 3.77868852459016,
        "lastSeen": "2020-10-04T10:00:00",
        "latency": null,
        "name": "Zoom:8801",
        "outboundTraffic": 59229109610,
        "packetLoss": 0.0879424661632147,
        "packetsCount": 308289341,
        "retransmitCount": 0,
        "traffic": 182810893133
      }
    ]
  },
  "success": true
}
```

22.1.4.10.2 Response parameters

Name	Type	Description
devices	integer	The number of devices that used a network service.
firstSeen	timestamp	When the operating system was first used.
hosts	integer	The number of service hosts.
inboundTraffic	integer	The volume of the inbound traffic.
jitterMS	integer	The deviation from true periodicity of a periodic signal (in milliseconds).
lastSeen	timestamp	When the service was last used.
latency	integer	The time it takes for a data packet to reach its destination (in milliseconds).

Name	Type	Description
name	string	The name of the port used by the service.
outboundTraffic	integer	The volume of the outbound traffic.
packetLoss	integer	The number of packets of data that did not reach their destination.
packetsCount	integer	The number of transmitted packets of data.
retransmitCount	integer	The number of times when packets were resent due to being lost or damaged.
traffic	integer	The total traffic volume.

22.1.4.11 traffic

GET `https://<armis-instance>.armis.com/api/v1/search/?aql=in:traffic`
{optional filters}

22.1.4.11.1 Example

GET `https://<armis-instance>.armis.com/api/v1/search/?aql=in:traffic`
`timeFrame:"7 Days" sensors:"0c:8d:db:b2:61:3e"`

```
{
  "data": {
    "results": [
      {
        "description": "Multicast DNS (mDNS)",
        "devices": 6,
        "firstSeen": "2020-09-28T19:00:00",
        "inboundTraffic": 0,
        "jitterMS": "N/A",
        "lastSeen": "2020-10-04T10:00:00",
        "latency": "N/A",
        "name": "mDNS",
        "outboundTraffic": 82819,
        "packetLoss": "N/A",
        "packetsCount": 220,
        "port": 5353,
        "retransmitCount": 0,
        "traffic": 82819
      }
    ]
  },
  "success": true
}
```

22.1.4.11.2 Response parameters

Name	Type	Description
description	string	The name of a protocol for which the network activity was analyzed.
devices	integer	The number of devices on which the network activity was analyzed.
firstSeen	timestamp	When the protocol was first used.
inboundTraffic	integer	The volume of the inbound traffic.
jitterMS	integer	The deviation from true periodicity of a periodic signal (in milliseconds).
latency	integer	The time it takes for a data packet to reach its destination (in milliseconds).
name	string	The name of the port used by the protocol.

Name	Type	Description
outboundTraffic	integer	The volume of the outbound traffic.
packetLoss	integer	The number of packets of data that did not reach their destination.
packetsCount	integer	The number of transmitted packets of data.
port	integer	The number of the port used by the protocol.
retransmitCount	integer	The number of times when packets were resent due to being lost or damaged.
traffic	integer	The total traffic volume.

22.1.4.12 users

GET https://<armis-instance>.armis.com/api/v1/search/?aql=in:users
{optional filters}

22.1.4.12.1 Example

GET https://<armis-instance>.armis.com/api/v1/search/?aql=in:users

```
{
  "data": {
    "count": 1,
    "next": 9,
    "prev": 7,
    "results": [
      {
        "dataSources": [
          {
            "firstSeen": 1693985737554,
            "hideTimestamps": false,
            "icon": "iconIntegrationTypeDatasourceTrafficInspection",
            "id": 71426,
            "key": "TRAFFIC_INSPECTION",
            "lastSeen": 1695833231539,
            "name": "Traffic Inspection",
            "types": [
              "Traffic Inspection",
              "Data Analysis"
            ]
          }
        ],
        "deviceIds": [
          15037,
          14872
        ],
        "displayName": null,
        "email": null,
        "firstSeen": "2023-09-06T07:35:37.554610+00:00",
        "id": 197078,
        "lastSeen": "2023-09-27T16:47:11.539759+00:00",
        "lastUsedDevice": null,
        "name": "I-ALTIRIS$",
        "phone": null,
        "properties": {
          "domain": "ARMI"
        },
        "username": "I-ALTIRIS$"
      }
    ],
    "total": 5211
  },
  "success": true
}
```

22.1.4.12.2 Response parameters

Name	Type	Description
dataSources	list	This can include the following: firstSeen, hideTimestamps, icon, id, key, lastSeen, name, types.
deviceIds	list	List of devices IDs which are related to the user.
displayName	string	The users display name.
email	string	The users email address.
firstSeen	timestamp	When the user was first seen.
id	integer	The ID assigned to the user.
lastSeen	timestamp	When the user was last seen.
lastUsedDevice	string	The last device used.
name	string	The name.
phone	string	The phone number for the user.
properties	string	Additional properties
username	string	The username.

22.1.4.13 vulnerabilities

GET https://<armis-instance>.armis.com/api/v1/search/?aql=in:vulnerabilities {optional filters}}

22.1.4.13.1 Example

GET https://<armis-instance>.armis.com/api/v1/search/?aql=in:vulnerabilities

```
{
  "affectedDevicesCount": 1,
  "attackComplexity": "Low",
  "attackVector": "Not Defined",
  "availabilityImpact": "High",
  "confidentialityImpact": "None",
  "id": 1,
  "description": "An issue was discovered in certain Apple products.
  iOS before 11.3 is affected. The issue involves the \"Find My
  iPhone\"
  component. It allows physically proximate attackers to bypass the
  iCloud
  password requirement for disabling the \"Find My iPhone\" feature via
  vectors involving a backup restore.",
  "cveUid": "CVE-2018-4172",
  "exploitabilityScore": 0.9,
  "impactScore": 3.6,
  "integrityImpact": "None",
  "privilegesRequired": "None",
  "publishedDate": "2018-03-04T08:26:25.070341",
  "scope": "Unchanged",
  "score": 4.6,
  "severity": "High",
  "status": "Unresolved",
  "userInteraction": "None",
  "vulnerableEntities": [
    {
      "affectedDevicesCount": 1,
      "name": "iOS",
      "version": "11.3",
      "vendor": "Apple"
    }
  ]
}
```

22.1.4.13.2 Response parameters

Name	Type	Description
affectedDevicesCount	integer	The number of devices affected by the vulnerability.
attackComplexity	string	How complicated it is to exploit the discovered vulnerability: <code>None</code> , <code>Low</code> , <code>Medium</code> , <code>High</code> , or <code>Critical</code> .
attackVector	string	What access the attacker needs to exploit the vulnerability: <code>Network</code> , <code>Adjacent Network</code> , <code>Local</code> or <code>Physical</code> .
availabilityImpact	string	Level of impact to the data availability when the vulnerability is successfully exploited on a component: <code>None</code> , <code>Low</code> , <code>Medium</code> , <code>High</code> , or <code>Critical</code> .
confidentialityImpact	string	Level of impact to the data confidentiality when the vulnerability is successfully exploited on a component: <code>None</code> , <code>Low</code> , <code>Medium</code> , <code>High</code> , or <code>Critical</code> .
cveUid	string	ID of the corresponding entry in the CVE system.
cvssScore	string	The CVSS version 3 score.
cvssScoreV4	string	The CVSS version 4 score.
description	string	Vulnerability description.
exploitabilityScore	integer	Probability of the vulnerability to be exploited based on the current state of exploitation techniques or automated exploitation code.
id	integer	Armris vulnerability ID.
impactScore	integer	Numerical representation of the impact of a successful vulnerability exploit on your business: low (1-3), medium (4-7), or high (8-10).
integrityImpact	string	Level of impact to the data integrity when the vulnerability is successfully exploited on a component: <code>None</code> , <code>Low</code> , <code>Medium</code> , <code>High</code> , or <code>Critical</code> .
privilegesRequired	string	Level of privileges the attacker needs to exploit the vulnerability successfully: <code>None</code> , <code>Low</code> , <code>Medium</code> , <code>High</code> , or <code>Critical</code> .
publishedDate	timestamp	Date when the vulnerability was publicly exposed in the CVE system.
qualysScore	string	The Qualys score.

Name	Type	Description
scope	integer	Numerical representation of the vulnerability score calculated by adding exploitabilityScore to impactScore: low (1-3), medium (4-7), or high (8-10).
score	integer	Numerical representation of the vulnerability score calculated by adding exploitabilityScore to impactScore: low (1-3), medium (4-7), or high (8-10).
severity	string	Qualitative representation of the vulnerability severity: None, Low, Medium, High, or Critical.
status	string	Whether the vulnerability is Unresolved or Resolved. Resolved vulnerabilities will be fetched only by an explicit search for status:Resolved or for a specific id.
userInteraction	string	Whether the attacker can perpetrate the attack alone (None) or they must be assisted by another user (Required).
vulnerableEntities	list[JSON]	The entities (operating systems, applications, etc.) affected by the vulnerability - affectedDevicesCount integer: Number of devices affected by the vulnerability - name—string: Name of the vulnerable entity. - version—string: Version of the vulnerable entity. - vendor—string: Vendor of the vulnerable entity.

22.1.5 orderBy function

Sorts the results fetched by the Search API by a variety of keywords in ascending or descending order:

```
orderBy={keyword}:{sorting_order}
```

The following keywords are available:

Type of search	orderBy keywords
in:activity	- protocol - sensor - time (default) - type
in:alerts	- severity - status - time - title - type NOTE: Most commonly, the <code>in:alerts</code> search is used to fetch unhandled alerts starting from the most up-to-date one. Therefore, by default, the search results are ordered first by status, and then by time, which is equivalent to <code>orderBy=status,time:desc</code>.
in:devices	- category - id - firstSeen - ipAddress - lastSeen (default) - macAddress - manufacturer - model - brand - name - osFull - riskLevel - sensor - site - type - user

Type of search orderBy keywords

NOTE: Applying the `osFull` keyword will order the search results by the operating system name (**operatingSystem**) and the operating system version number (`operatingSystemVersion`).

in:vulnerabilities	● affectedDevicesCount ● attackComplexity ● availabilityImpact ● confidentialityImpact ● exploitabilityScore ● impactScore ● integrityImpact ● privilegesRequired ● publishedDate (default) ● score ● severity ● cveUid
--------------------	---

NOTES:

- You can provide more than one keyword delimited by commas.
- By default, the values are sorted in ascending order. To apply descending order, append `:desc` to the keyword.

22.1.5.1 Examples

- To retrieve the complete device inventory, apply the `orderBy` parameter with a fixed property like **id** or **macAddress**. For instance, to fetch the list of devices by ID, use the **Pagination** method to specify a viable page length and the `orderBy=id` argument. Repeat the request while changing the pagination value until reaching the end of the device list. It is recommended to automate this operation with a script.
- The following command will fetch the first five devices with the smallest ID and sort them in ascending order:

```
https://<armis-instance>.armis.com/api/v1/search/?aql=in:devices&length=5&orderBy=id
```

- This command will fetch the first five devices with the largest ID and sort them in descending order:

```
https://<armis-  
instance>.armis.com/api/v1/search/?aql=in:devices&length=5&orderBy=id:desc
```

- The following command will order the first five fetched devices by the manufacturer name in descending order (from Z to A) and by the device ID in ascending order:

```
https://<armis-  
instance>.armis.com/api/v1/search/?aql=in:devices&length=5&orderBy=manufacturer:desc,id
```

23 Sites

23.1 Returning all sites information

GET /api/v1/sites/

23.1.1 Permissions required

- **Settings > Sites and Sensors > Read**

23.1.2 URI parameters

Name	Type	Description
from	integer (query)	Paging from.
length	integer (query)	Paging from.
includeTotal	boolean (query)	Return total count, default False.
fields	(query)	Fields to show. If omitted, returns a default subset of fields.

23.1.3 Example

```
{
  "data": {
    "count": 10,
    "next": 10,
    "prev": 0,
    "sites": [
      {
        "id": "710",
        "integrationIds": [
          "27"
        ],
        "lat": 32.0852999,
        "lng": 34.7817676,
        "location": "Tel_a",
        "name": "Meraki",
        "networkEquipmentDeviceIds": [
          "258",
          "374"
        ]
      },
      {
        "id": "711",
        "integrationIds": [
          "25"
        ],
        "lat": 51.5072178,
        "lng": -0.1275862,
        "location": "London",
        "name": "switch"
      },
      {
        "id": "712",
        "name": "Jane"
      },
      {
        "id": "716",
        "location": "",
        "name": "efwwfe",
        "parentId": "713",
        "tier": "",
        "user": "john1@xyz.com"
      }
    ]
  },
  "success": true
}
```

23.1.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.

23.2 Creating a new site

POST `/api/v1/sites/`

23.2.1 Permissions required

- Settings > Sites and Sensors > Manage > Sites

23.2.2 URI parameters

Name	Type	Description
site	object (body)	JSON describing the site.

23.2.3 Example

```
{
  "location": "my location",
  "name": "my site name",
  "parentId": 1,
  "rule_description": "this is rule description",
  "rule": {
    "or": [
      "type:\\"Access Points\\"
    ]
  },
  "tier": "tier A"
}
```

23.2.4 Responses

This API call has the following HTTP status codes:

Code	Description
201	OK.
400	Bad request.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.

23.3 Deleting a site

DELETE `/api/v1/sites/{site_id}/`

23.3.1 Permissions required

- Settings > Sites and Sensors > Manage > Sites

23.3.2 URI parameters

Name	Type	Description
site_id	(path)	The site ID in the Armis system.
* Required		

23.3.3 Responses

This API call has the following HTTP status codes:

Code	Description
204	OK.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.
404	Unknown site.

23.4 Getting a site by ID

GET /api/v1/sites/{site_id}/

23.4.1 Permissions required

- **Settings > Sites and Sensors > Read**

23.4.2 URI parameters

Name	Type	Description
site_id	(path)	The site ID in the Armis system. * Required
fields	(query)	Fields to show. If omitted, returns a default subset of fields.

23.4.3 Example

```
{
  "data": {
    "id": "711",
    "integrationIds": [
      "25"
    ],
    "lat": 51.5072178,
    "lng": -0.1275862,
    "location": "London",
    "name": "switch"
  },
  "success": true
}
```

23.4.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.
404	Unknown site.

23.5 Updating a site

PATCH /api/v1/sites/{site_id}/

23.5.1 Permissions required

- **Settings > Sites and Sensors > Manage > Sites**

23.5.2 URI parameters

Name	Type	Description
site_id	(path)	The site ID in the Armis system.
* Required		
site	object (body)	

23.5.3 Example

```
{
  "location": "my location",
  "name": "my site name",
  "parentId": 1,
  "rule_description": "this is rule description",
  "rule": {
    "or": [
      "type:\\"Access Points\\"
    ]
  },
  "tier": "tier A"
}
```

23.5.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.
404	Unknown site.

23.6 Getting all integration IDs of the site

GET /api/v1/sites/{site_id}/integrations-ids/

23.6.1 Permissions required

- Settings > Sites and Sensors > Read

23.6.2 URI parameters

Name	Type	Description
site_id	(path)	The site ID in the Armis system.
* Required		

23.6.3 Example

```
{
  "data": {
    "integrationIds": [
      27
    ]
  },
  "success": true
}
```

23.6.4 Responses

This API call has the following HTTP status codes:

Code	Description
204	The entity deleted successfully.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.
404	Unknown site.

23.7 Adding a new integration ID to the site

POST /api/v1/sites/{site_id}/integrations-ids/

23.7.1 Permissions required

- **Settings > Sites and Sensors > Manage > Sites**

23.7.2 URI parameters

Name	Type	Description
site_id	(path)	The site ID in the Armis system.
* Required		
siteIntegrationId	object (body)	Site integration ID.

23.7.3 Example

```
{
  "integrationId": 1
}
```

23.7.4 Responses

This API call has the following HTTP status codes:

Code	Description
400	Bad request, please check the arguments you passed. Example: <pre>{ "message": "string", "success": true }</pre>

23.8 Deleting an integration ID from the site

DELETE /api/v1/sites/{site_id}/integrations-ids/{integration_id}/

23.8.1 Permissions required

- **Settings > Sites and Sensors > Manage > Sites**

23.8.2 URI parameters

Name	Type	Description
site_id	(path)	The site ID in the Armis system.
integration_id	integer (path)	The integration ID in the site to delete.

23.8.3 Responses

This API call has the following HTTP status codes:

Code	Description
204	The entity deleted successfully.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.
404	Unknown site.

23.9 Getting all network equipment device IDs of the site

GET `/api/v1/sites/{site_id}/network-equipment/`

23.9.1 Permissions required

- Settings > Sites and Sensors > Read

23.9.2 URI parameters

Name	Type	Description
site_id	(path)	The site ID in the Armis system.
* Required		

23.9.3 Example

```
{
  "data": {
    "networkEquipmentDeviceIds": [
      235,
      167,
      324,
      437,
      217,
      412,
      373,
      438,
      2801,
      159,
      292,
      413,
      354,
      230,
      223,
      161
    ]
  },
  "success": true
}
```

23.9.4 Responses

This API call has the following HTTP status codes:

Code	Description
204	The entity deleted successfully.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.
404	Unknown site.

23.10 Adding a new network device ID to the site

POST `/api/v1/sites/{site_id}/network-equipment/`

23.10.1 Permissions required

- Settings > Sites and Sensors > Manage > Sites

23.10.2 URI parameters

Name	Type	Description
site_id	(path)	The site Id in the Armis system.
* Required		
networkEquipmentDeviceId	object (body)	Site network Equipment Device ID.

23.10.3 Example

```
{
  "networkEquipmentDeviceId": 1
}
```

23.10.4 Example

```
{
  "data": {
    "networkEquipmentDeviceIds": [
      235,
      167,
      324,
      437,
      217,
      412,
      373,
      438,
      2801,
      159,
      292,
      413,
      354,
      230,
      223,
      161
    ]
  },
  "success": true
}
```

23.10.5 Responses

This API call has the following HTTP status codes:

Code	Description
204	The entity deleted successfully.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.
404	Unknown site.

23.11 Deleting a network device ID from the site

DELETE `/api/v1/sites/{site_id}/network-equipment/{network_equipment_id}/`

23.11.1 Permissions required

- Settings > Sites and Sensors > Manage > Sites

23.11.2 URI parameters

Name	Type	Description
site_id	(path)	The site ID in the Armis system.
* Required		
network_ equipment_id	integer (path)	

23.11.3 Responses

This API call has the following HTTP status codes:

Code	Description
204	The entity deleted successfully.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.
404	Unknown site.

24 User Asset Properties

24.1 Bulk operations on user asset properties

POST /api/v1/user-asset-properties/_bulk/

NOTES:

- The Manage permission was added under Roles and Manage permissions for Users. Only users with this permission can update user properties using this API endpoint.
- To retrieve user data and properties, use the `GET /api/v1/search/` endpoint. See [Search](#).

24.1.1 Permissions required

- User > Manage > Upsert

24.1.2 URI parameters

Name	Type	Description
Body	array [object]	Upsert multiple properties for multiple user assets in a single operation. This endpoint is highly recommended to be used when a large amount of properties should be updated.

24.1.3 Example

```
[
  {
    "upsert": {
      "lastSeen": "2024-09-26T06:50:00",
      "source": "My Source",
      "type": "EMAILS",
      "userId": 1,
      "value": "'temp@temp.com'"
    }
  }
]
```

24.1.4 Responses

This API call has the following HTTP status codes:

Code	Description
207	Each item in the request has been processed on its own. Response indicates the status of each individual item.
400	Bad request, please check the arguments you passed.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.

25 Users

25.1 Returning existing accounts

GET /api/v1/users/

25.1.1 Permissions required

- Settings > Users And Roles > Read

25.1.2 URI parameters

Name	Type	Description
fields	(query)	Fields to show, delimited by commas. If omitted, returns all fields.

25.1.3 Examples

cURL

```
curl "https://<armis-instance>.armis.com/api/v1/users/"  
-H 'Authorization: <access-token>'
```

Python

```
response =  
requests.get(url="https://<armis-instance>.armis.com/api/v1/users/"  
",  
headers={"Authorization": <access-token>})
```

```
{
  "data": {
    "users": [
      {
        "email": "jsmith@acme.com",
        "id": 1,
        "isActive": true,
        "location": null,
        "name": "Acme",
        "phone": null,
        "reportPermissions": "EXPORT",
        "role": "ADMIN",
        "roleAssignment": [
          {
            "name": [
              "Admin"
            ]
          }
        ],
        "title": "",
        "twoFactorAuthentication": false,
        "username": "acme"
      },
      ...
      { // Next user
      }
    ]
  },
  "success": true
}
```

25.1.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.

25.2 Creating a new account

POST /api/v1/users/

25.2.1 Permissions required

- Settings > Users and Roles > Manage > Users > Create

25.2.2 URI parameters

Name	Type	Description
fields	(query)	Fields to show, delimited by commas. If omitted, returns all fields.
formData	(body)	

25.2.3 Example

```
{
  "dashboard_ids_to_clone": [
    "2",
    "6"
  ],
  "email": "jsmith@acme.com",
  "location": "New York, NY, USA",
  "name": "John Smith",
  "phone": "(478) 275-5945",
  "roleAssignment": [
    {
      "boundaries": [
        "Corporate",
        "Guest"
      ],
      "name": [
        "Reporter",
        "Viewer"
      ],
      "sites": [
        "Palo Alto",
        "Tel Aviv"
      ]
    }
  ],
  "title": "Security Analyst",
  "username": "jsmith"
}
```

25.2.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Unknown dashboard type.

25.3 Deleting a user

DELETE /api/v1/users/{user_id_or_email}/

25.3.1 Permissions required

- Settings > Users and Roles > Manage > Users > Delete

25.3.2 URI parameters

Name	Type	Description
user_id_or_email	(path)	ArmIS user ID or email.
* Required		

25.3.3 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK
404	Unknown user.

25.4 Getting a user by ID or email

GET /api/v1/users/{user_id_or_email}/

25.4.1 Permissions required

- Settings > Users and Roles > Read

25.4.2 URI parameters

Name	Type	Description
user_id_or_email	(path)	ArmIS user ID or email.
* Required		
fields	(query)	Fields to show, delimited by commas. If omitted, returns all fields.

25.4.3 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK
404	Unknown user.

25.5 Editing a user

PATCH /api/v1/users/{user_id_or_email}/

25.5.1 Permissions required

- Settings > Users and Roles > Manage > Users > Edit

25.5.2 URI parameters

Name	Type	Description
user_id_or_email	(path)	ArmIS user ID or email. * Required
fields	(query)	Fields to show, delimited by commas. If omitted, returns all fields.
formData	(body)	

25.5.3 Example

```
{
  "email": "jsmith@acme.com",
  "location": "New York, NY, USA",
  "name": "John Smith",
  "phone": "(478) 275-5945",
  "roleAssignment": [
    {
      "name": [
        "Reporter",
        "Viewer"
      ],
      "sites": [
        "Palo Alto",
        "Tel Aviv"
      ]
    }
  ],
  "title": "Security Analyst",
  "username": "jsmith"
}
```

25.5.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Invalid format of field <code>email</code> .
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.
404	Unknown user.

26 vulnerability

The Vulnerability API endpoints enable you to do the following:

- Get CVE-on-asset matches according to CVE or device IDs.
- Set the status (Open, Ignored, Resolved) of CVE-on-asset matches according to CVE or device IDs.

For more information about vulnerabilities, see the Armis user guide and the *ViPR User Guide*.

26.1 Getting CVE-on-asset matches according to CVE or device IDs

GET /api/v1/vulnerability-match/

NOTE: Only Armis Centrix™ for Vulnerability Prioritization and Remediation (AKA ViPR) customers can obtain details of matches.

26.1.1 Permissions required

- **Vulnerability > Read**

26.1.2 URI parameters

Name	Type	Description
device_ids	string (query)	A list of comma-separated Armis Device IDs.
vulnerability_ids	string (query)	A list of comma-separated Armis Vulnerability IDs.
from	integer (query)	Paging from
length	integer (query)	Paging length

26.1.3 Example

```
{
  "advisoryId": null,
  "avmRating": "MEDIUM",
  "confidenceLevel": "High",
  "cveUid": "CVE-2022-32845",
  "deviceId": 1736828,
  "firstDetected": "2022-12-27T15:39:15.787146+00:00",
  "lastDetected": "2022-12-27T15:39:15.787146+00:00",
  "matchCriteriaString": "OS:(iOS 14.4.2) ",
  "recommendedSteps": null,
  "remediationTypes": null,
  "status": "Resolved",
  "statusSource": "AUTO"
},
{
  "advisoryId": null,
  "avmRating": "MEDIUM",
  "confidenceLevel": "High",
  "cveUid": "CVE-2022-32845",
  "deviceId": 49,
  "firstDetected": "2022-11-02T07:41:24.918154+00:00",
  "lastDetected": "2023-01-02T18:58:47.402774+00:00",
  "matchCriteriaString": "OS:(macOS 12.2.1) ",
  "recommendedSteps": null,
  "remediationTypes": null,
  "status": "Resolved",
  "statusSource": "API"
},
{
  "advisoryId": null,
  "avmRating": "CRITICAL",
  "confidenceLevel": "High",
  "cveUid": "CVE-2020-1472",
  "deviceId": 1730667,
  "firstDetected": "2021-03-30T10:53:03.377466+00:00",
  "lastDetected": "2023-04-12T11:55:41.598613+00:00",
  "matchCriteriaString": "OS:(Fedora 33) ",
  "recommendedSteps": null,
  "remediationTypes": null,
  "status": "Open",
  "statusSource": "CONSOLE"
},
{
  "advisoryId": null,
  "avmRating": null,
  "confidenceLevel": "High",
  "cveUid": "CVE-2023-21427",
  "deviceId": 1734392,
  "firstDetected": "2023-04-23T11:58:49.227537+00:00",
  "lastDetected": "2023-04-23T11:58:49.227537+00:00",
  "matchCriteriaString": "OS:(Android 13.0) ",
  "recommendedSteps": null,
  "remediationTypes": null,
  "status": "Open",
  "statusSource": null
}
```

26.1.4 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Bad request. Missing identifier parameter, must provide one of <code>device_ids</code> , <code>vulnerability_ids</code> .
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.
402	Not permitted.

26.2 Get vulnerabilities matches by filters

POST `/api/v1/vulnerability-match/`

NOTE: Only Armis Centrix™ for Vulnerability Prioritization and Remediation (AKA ViPR) customers can obtain details of matches.

26.2.1 Permissions required

Vulnerability > Read

26.2.2 URI parameters

Name	Type	Description
<code>starting_id</code>	(formData)	A list of comma-separated Armis Device IDs.
<code>number_of_results</code>	(formData)	Set the number of results. The maximum is 10,000.
<code>device_ids</code>	string (formData)	A list of comma-separated values of Armis device IDs.
<code>vulnerability_ids</code>	string (formData)	A list of comma-separated values of Armis vulnerability IDs.
<code>status</code>	string (formData)	A list of comma-separated values of Armis statuses. Example: Ignored,Open,Resolved,Ticketed
<code>avm_rating</code>	string (formData)	A list of comma-separated values of Armis AVM (ViPR) rating. Example: Critical,High,Low,Medium,<EMPTY>
<code>severity</code>	string	A list of comma-separated values of Armis severity rating.

Name	Type	Description
	(formData)	Example: Critical,High,Low,Medium,Unavailable
last_detected	integer (formData)	When were the matches last seen (in days).

26.2.3 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Nothing to change.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.
402	Not permitted.

26.3 Setting the status of CVE-on-asset matches according to CVE or device IDs

POST `/api/v1/vulnerability/set_status/`

26.3.1 Permissions required

- Vulnerability > Manage > Write

26.3.2 URI parameters

Name	Type	Description
device_ids	string (formData)	A list of comma-separated Armis Device IDs.
vulnerability_ids	string (formData)	A list of comma-separated Armis Vulnerability IDs.
status * Required	string (formData)	The status of the designated vulnerability matches Available values : OPEN, IGNORED, RESOLVED

26.3.3 Responses

This API call has the following HTTP status codes:

Code	Description
200	OK.
400	Nothing to change.
401	Authorization information is missing or invalid. Name —Authorization. Description —The <code>access_token</code> obtained using the <code>/access_token/</code> endpoint. Type —string.
402	Not permitted.