


Step 2

Turn the finite table of (argument,result)-pairs specifying δ into a RM gadget

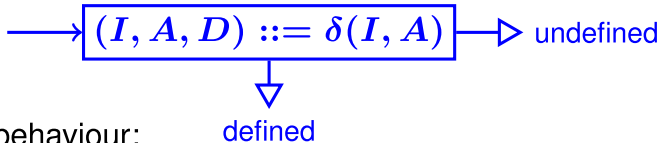

which has the behaviour:

- If q , a and d are the initial values of registers I , A and D
- updates the registers to $I = q'$, $A = a'$, $D = d'$ and takes the **defined** exit if $\delta(q, a) = (q', a', d')$
 - leaves the registers intact and takes the **undefined** exit if $\delta(q, a)$ is undefined