


com.example.aplicacion
_3ro.Utilidades.uuidToHexString

com.example.aplicacion
_3ro.Utilidades.uuidToString

com.example.aplicacion
_3ro.Utilidades.dosLongToBytes

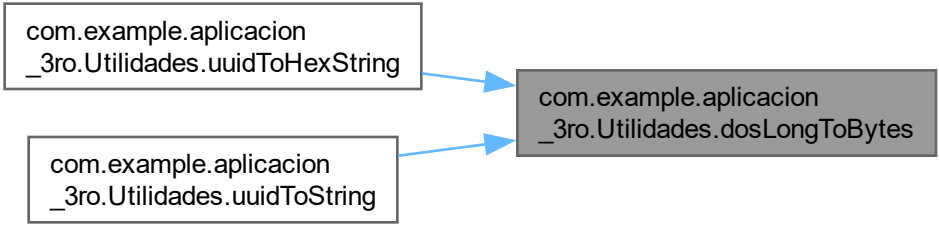

```
graph LR; A[com.example.aplicacion_3ro.Utilidades.uuidToHexString] --> C[com.example.aplicacion_3ro.Utilidades.dosLongToBytes]; B[com.example.aplicacion_3ro.Utilidades.uuidToString] --> C;
```

The diagram illustrates a mapping or transformation process. On the left, there are two white rectangular boxes with black borders. The top box contains the text 'com.example.aplicacion' followed by a line break and '_3ro.Utilidades.uuidToHexString'. The bottom box contains 'com.example.aplicacion' followed by a line break and '_3ro.Utilidades.uuidToString'. Two blue arrows originate from the right side of these boxes. The arrow from the top box points to the top of a gray rectangular box on the right. The arrow from the bottom box points to the bottom of the same gray box. The gray box contains the text 'com.example.aplicacion' followed by a line break and '_3ro.Utilidades.dosLongToBytes'.