

# Hands-on Lab: Joins in MySQL using phpMyAdmin

**Estimated time needed:** 20 minutes

In this lab, you will learn how to create tables and load data in the MySQL database service using the phpMyAdmin graphical user interface (GUI) tool.

## Software Used in this Lab

In this lab, you will use [MySQL](#). MySQL is a Relational Database Management System (RDBMS) designed to efficiently store, manipulate, and retrieve data.



To complete this lab you will utilize MySQL relational database service available as part of IBM Skills Network Labs (SN Labs) Cloud IDE. SN Labs is a virtual lab environment used in this course.

## Objectives

After completing this lab, you will be able to:

1. Determine the correct type of join to use for a given problem.
2. Write and execute joins to query data from multiple tables.

## Database Used in this Lab

**mysql\_learners** database has been used in this lab.

Here you will be creating and inserting data into the below mentioned 3 tables

- 1.chicago\_public\_schools
- 2.chicago\_socioeconomic\_data
- 3.chicago\_crime

Here you will be using 3 dump files for this purpose.

[chicago\\_public\\_schools](#)


[chicago\\_crime](#)

[chicago\\_socioeconomic\\_data](#)


## Task A: Create a database

1. Click on **Skills Network Toolbox**. In **Database** section, click **MySQL**.

To start the MySQL click **Start**.

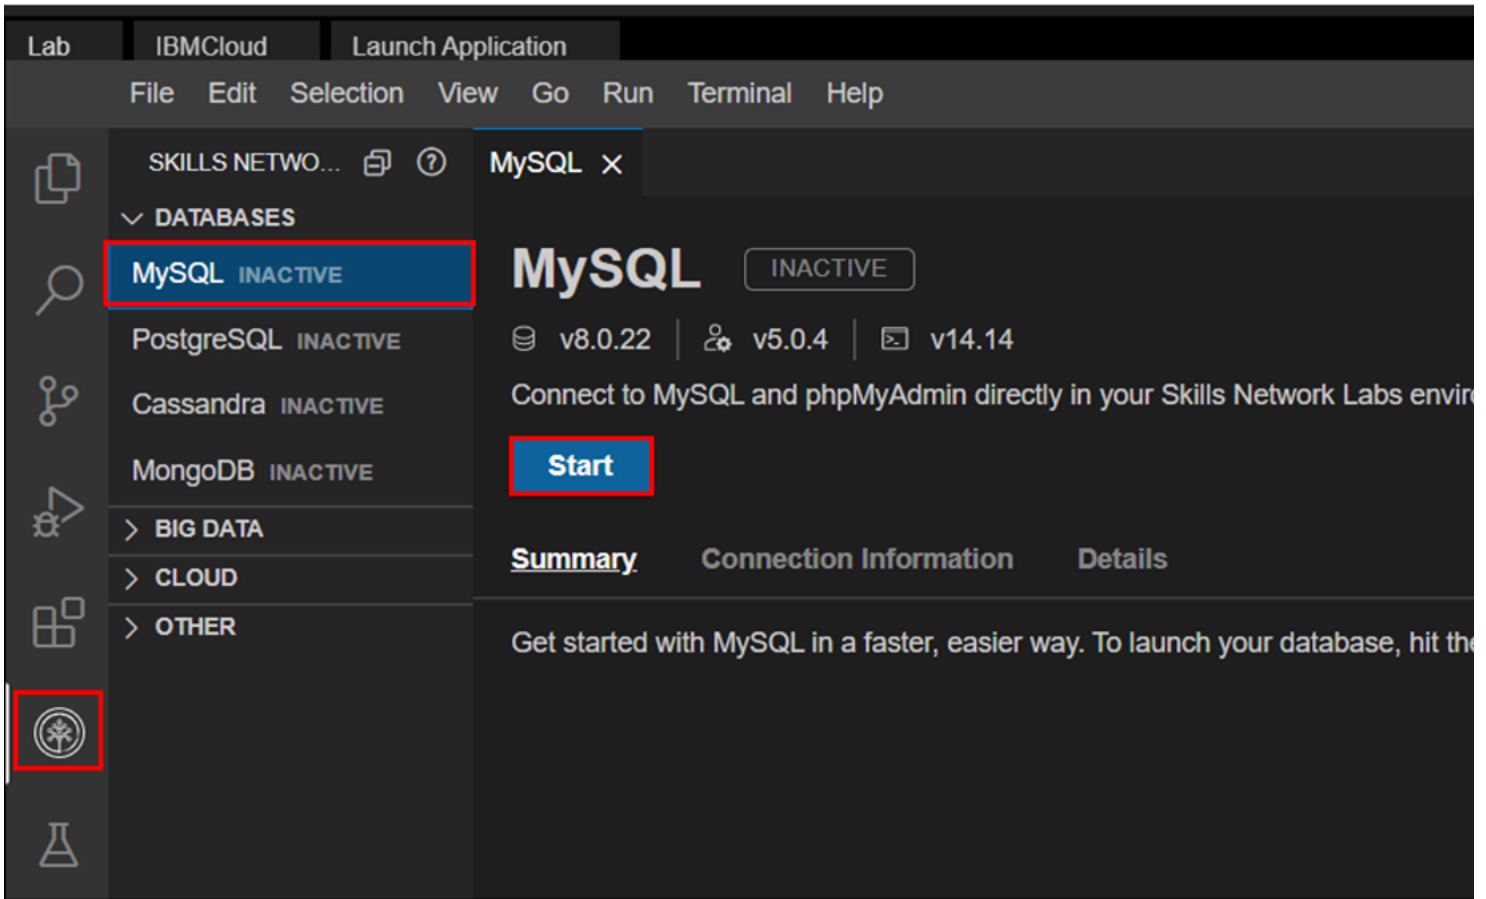


2. Once MySQL has started, click on **phpMyAdmin** button to open **phpMyAdmin** in the same window.

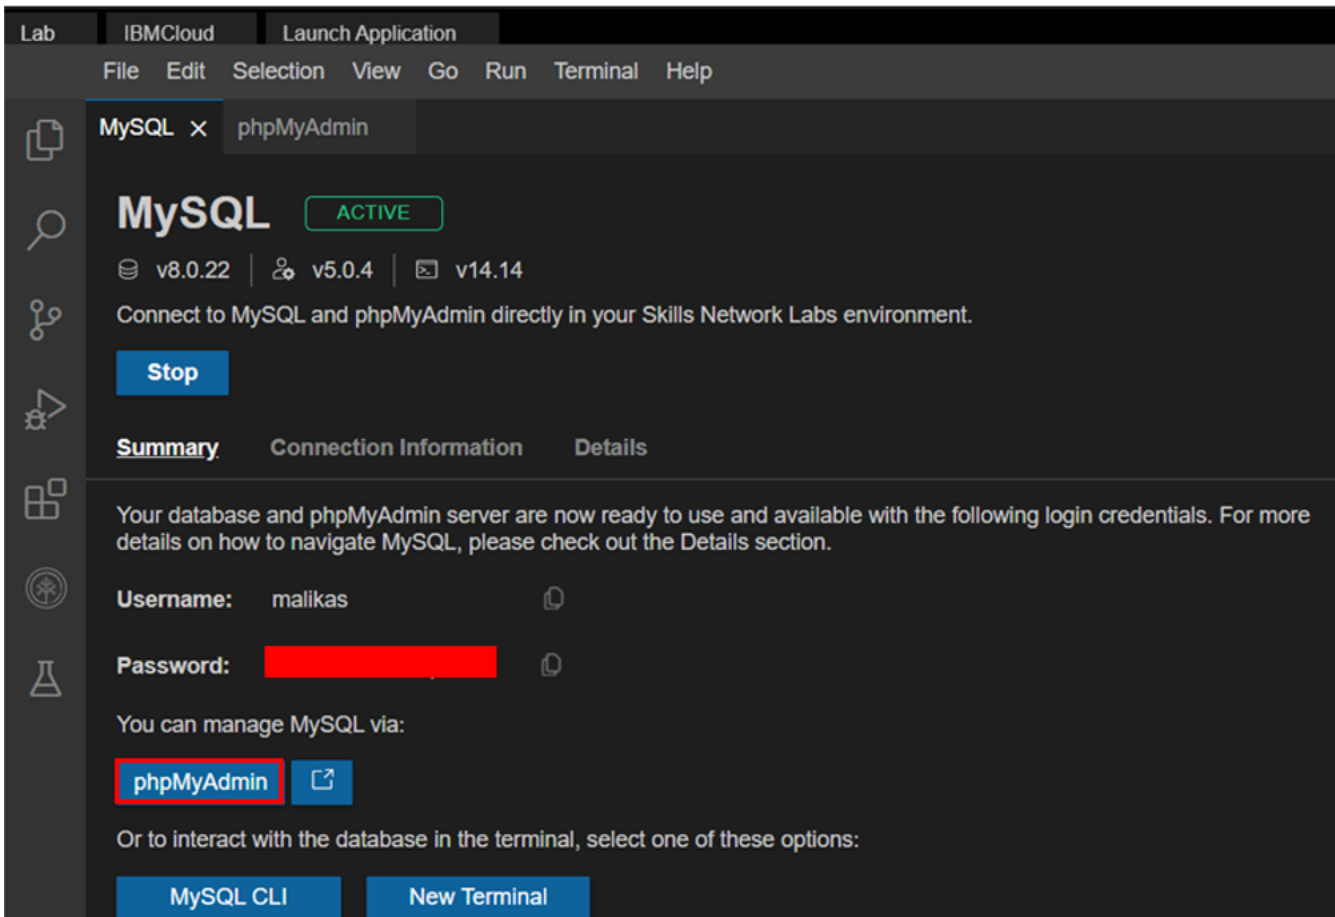

3. You will see the phpMyAdmin GUI tool.

[illegible]



4. In the tree-view, click **New** to create a new empty database. Then enter **Mysql\_Learners** as the name of the database and click **Create**.

The encoding will be left as **utf8mb4\_0900\_ai\_ci**. UTF-8 is the most commonly used character encoding for content or data.

Proceed to Task B.

Databases

SQL

Status

User accounts

Export

Import

Settings

Binary log

R

## Databases

Create database

Mysql\_learners

utf8mb4\_0900\_ai\_ci

Create

	Database	Collation	Master replication	Action
<input type="checkbox"/>	information_schema	utf8_general_ci	✓ Replicated	Check privileges
<input type="checkbox"/>	mysql	utf8mb4_0900_ai_ci	✓ Replicated	Check privileges
<input type="checkbox"/>	performance_schema	utf8mb4_0900_ai_ci	✓ Replicated	Check privileges
<input type="checkbox"/>	sys	utf8mb4_0900_ai_ci	✓ Replicated	Check privileges
Total: 4				

↑

☐ Check all

With selected:

Drop

⚠

Note: Enabling the database statistics here might cause heavy traffic between the web server and the MySQL server.

• Enable statistics

Load the dump files one by one into the database **Mysql\_learners** by clicking the **Import** tab and choose the file. Click on **Go** button.

# Importing into the database "Mysql\_learners"

## File to import:

File may be compressed (gzip, bzip2, zip) or uncompressed.  
A compressed file's name must end in **.[format].[compression]**. Example: **.sql.zip**

Browse your computer: Choose File chicago\_pu...\_schools.sql (Max: 2,048KiB)

You may also drag and drop a file on any page.

Character set of the file: utf-8

## Partial import:

☒ Allow the interruption of an import in case the script detects it is close to the PHP timeout limit. *(This might be a good way to import large files, howe*

Skip this number of queries (for SQL) starting from the first one: 0

## Other options:

☒ Enable foreign key checks

## Format:

Console

The screenshot shows the phpMyAdmin interface. On the left, the database tree is expanded to show the 'Mysql\_learners' database, which contains a new table named 'chicago\_public\_schools'. The main panel displays the 'Import' tab, showing a successful import of a SQL dump file. The query log on the right shows the following queries and their results:

- Import has been successfully finished, 22 queries executed. (chicago\_public\_schools.sql)
- MySQL returned an empty result set (i.e. zero rows). (Query took 0.0008 seconds.)
- phpMyAdmin SQL Dump -- version 5.0.4 -- https://www.phpmyadmin.net/ -- -- Host: mysql  
Version: 7.4.15 SET SQL\_MODE = "NO\_AUTO\_VALUE\_ON\_ZERO"
- MySQL returned an empty result set (i.e. zero rows). (Query took 0.0003 seconds.)
- START TRANSACTION
- MySQL returned an empty result set (i.e. zero rows). (Query took 0.0003 seconds.)
- SET time\_zone = "+00:00"
- MySQL returned an empty result set (i.e. zero rows). (Query took 0.0003 seconds.)
- /\*!40101 SET @OLD\_CHARACTER\_SET\_CLIENT=@@CHARACTER\_SET\_CLIENT \*/
- MySQL returned an empty result set (i.e. zero rows). (Query took 0.0005 seconds.)
- /\*!40101 SET @OLD\_CHARACTER\_SET\_RESULTS=@@CHARACTER\_SET\_RESULTS \*/

The tables are created and the data is loaded successfully. Repeat the same operation with the other 2 dump files to create and load the tables.

You will see a screen as below

The screenshot shows a MySQL IDE interface. On the left, a database schema tree is visible with the following structure:

- Recent
- Favorites
- There are no favorite tables.
- New
- information\_schema
- mysql
- MySQL\_learners
  - New
  - chicago\_crime
  - chicago\_public\_schools
  - chicago\_socioeconomic\_data
- performance\_schema
- sys

On the right, the query log shows four successful queries, each returning an empty result set (zero rows) and taking approximately 0.0002 to 0.0003 seconds to execute. The queries are:

```

`PERCENT_OF_HOUSING_CROWDED`, `PERCENT_HOUSEHOLDS_BELOW_POVERTY`, `PERCENT_AGED_16__UN
`PERCENT_AGED_UNDER_18_OR_OVER_64`, `PER_CAPITA_INCOME`, `HARDSHIP_INDEX`) VALUES ('1'
Ridge', '7.8', '17.2', '8.8', '20.8', '38.5', 23040, '46'), ('3', 'Uptown', '3.8', '24
'8.2', '13.4', '25.5', 37524, '17'), ('5', 'North Center', '0.3', '7.5', '5.2', '4.5',
60058, '5'), ('7', 'Lincoln Park', '0.8', '12.3', '5.1', '3.6', '21.5', 71551, '2'), (

```

Below the queries, the console shows the following messages:

```

✓ MySQL returned an empty result set (i.e. zero rows). (Query took 0.0002 seconds.)

COMMIT

✓ MySQL returned an empty result set (i.e. zero rows). (Query took 0.0003 seconds.)

/*!40101 SET CHARACTER_SET_CLIENT=@OLD_CHARACTER_SET_CLIENT */

✓ MySQL returned an empty result set (i.e. zero rows). (Query took 0.0002 seconds.)

/*!40101 SET CHARACTER_SET_RESULTS=@OLD_CHARACTER_SET_RESULTS */

✓ MySQL returned an empty result set (i.e. zero rows). (Query took 0.0003 seconds.)

/*!40101 SET COLLATION_CONNECTION=@OLD_COLLATION_CONNECTION */

```

At the bottom, there is a "Console" tab.

## Exercise

### Problem 1

List the case number, type of crime and community area for all crimes in community area number 18.

- ▶ Hint 1
- ▶ Hint 2
- ▶ Hint 3

### Problem 2

List all crimes that took place at a school. Include case number, crime type and community name.

- ▶ Hint 1
- ▶ Hint 2
- ▶ Hint 3

### Problem 3

For the communities of Oakland, Armour Square, Edgewater and CHICAGO list the associated community\_area\_numbers and the case\_numbers.

- ▶ Hint 1
- ▶ Hint 2
- ▶ Hint 3

**Congratulations! You have completed this lab, and you are ready for the next topic.**



# Author(s)

[Lakshmi Holla](#)

[Malika Singla](#)

# Changelog

Date	Version	Changed by	Change Description
2023-05-04	0.4	Rahul Jaideep	Updated Markdown file
2022-05-11	0.3	Appalabhaktula Hema	Updated hint
2022-04-07	0.2	Malika Singla	Updated screenshot
2022-02-10	0.1	Lakshmi Holla, Malika Singla	Initial Version

© IBM Corporation 2023. All rights reserved.