

WoOOL ToOOLs Usage Guide

WoOOL ToOOLs Usage Guide

Package contents:

Latest version:	v2026.03.21.001
CE:	Content Editor
ME:	Map Editor
MP:	Map Patcher
WDaP:	WoOOL Download and Patcher

Supported File Types

Supported File Types

WPF variants supported:

- normal .wpf archives with internal FAT
- both primary and legacy header/FAT field layouts
- compressed and uncompressed entries
- zlib-compressed entries in:
 - normal single-stream form
 - newer chunked zlib form
- archives where data is compressed even if the compression flag is missing
- case-insensitive entry lookup

WPF edge cases included:

- If an entry is marked compressed but decompression fails, the code still tries alternate detection before falling back to raw bytes.
- If an entry is not marked compressed, the code still probes for zlib/chunked-zlib and will decode it.
- .wpf.hash sidecars are supported for comparison/info purposes.
- Some WPF entry names may contain non-ASCII bytes; the code tries to work around that internally, but exporting such names can be skipped if the OS path conversion fails.

The SGL reader supports:

- standard indexed .sgl files
- Shanda Game Lib SGL variant ("shanda game lib" header)
- opening from:
 - Disk
 - memory buffers extracted from WPF
- sparse/empty slots (offset = 0) without failing

SGL edge cases included:

- standalone SGL paths are resolved case-insensitively if exact casing is wrong
- WPF-embedded SGLs are loaded fully from extracted memory
- empty slots are valid and simply return no image
- bad/out-of-range indices safely return null/no image rather than crashing

New-format TEX supported;

- standard TEX1
- XOR-obfuscated TEX1 variants where:
 - magic is offset from normal TEX1
 - header fields are XOR'd with a small key

- ??ET-style wrapped/variant headers where the real frame header is not at the standard place

Old-format TEX supported:

- Compression / payload variants supported
- raw uncompressed pixel blocks
- zlib-compressed TEX payloads
- chunked zlib-wrapped TEX payloads
- XET-compressed block payloads
- raw XET DXT payloads

Pixel/block formats supported:

- A8R8G8B8
- A4R4G4B4
- A0R5G6B5
- DXT1
- DXT3
- DXT5

Old TEX option variants handled:

- RLE blocks
- Shanda-style 0x02 size-prefixed RLE behavior
- WoOOL S3TC/DXT blocks
- separate alpha payloads
- newer/unknown 0x60-bit S3TC/DXT variants with size prefixes

Animation is supported, but with safeguards.

Included behaviors:

per-frame decode support

- frame-count detection without fully decoding the image
- invalid frame counts fall back to 1
- truncated or malformed trailing frames are ignored when counting frames
- malformed headers are sanity-checked before trust

Important limit:

In MapEditor, frame counts above a “reasonable” threshold are treated as suspicious and clamped to 1 for stability during preload/render flow.

So:

- shared codec logic can recognize animated TEXs
- MapEditor intentionally becomes conservative for suspicious counts

Content Editor

Content Editor

Setup Data Paths:


Click **CONTENT EDITOR** in the menu then click **Preferences**, this will bring up the Settings window.

Click **Data Paths** header from the left.


Click **Add Data Path** to add a new row, fill in the **Name** and **Path**.

Under **Actions** clicking ... will open a dialog box where you can browse for the folder.

Once set close this window, settings are saved automatically.

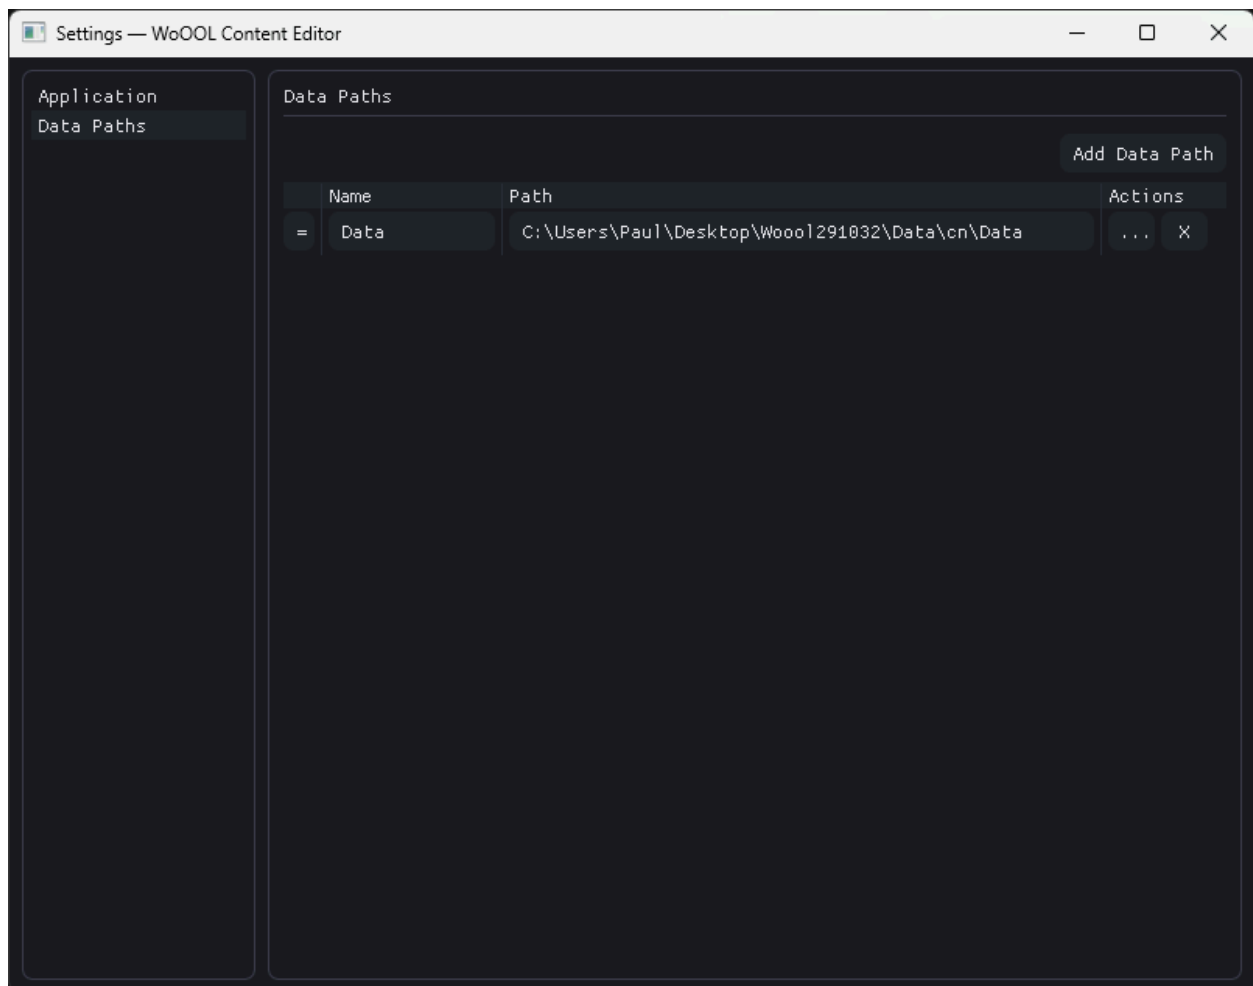


The data folder will appear in the **Data Folders** panel, one header for each folder specified.


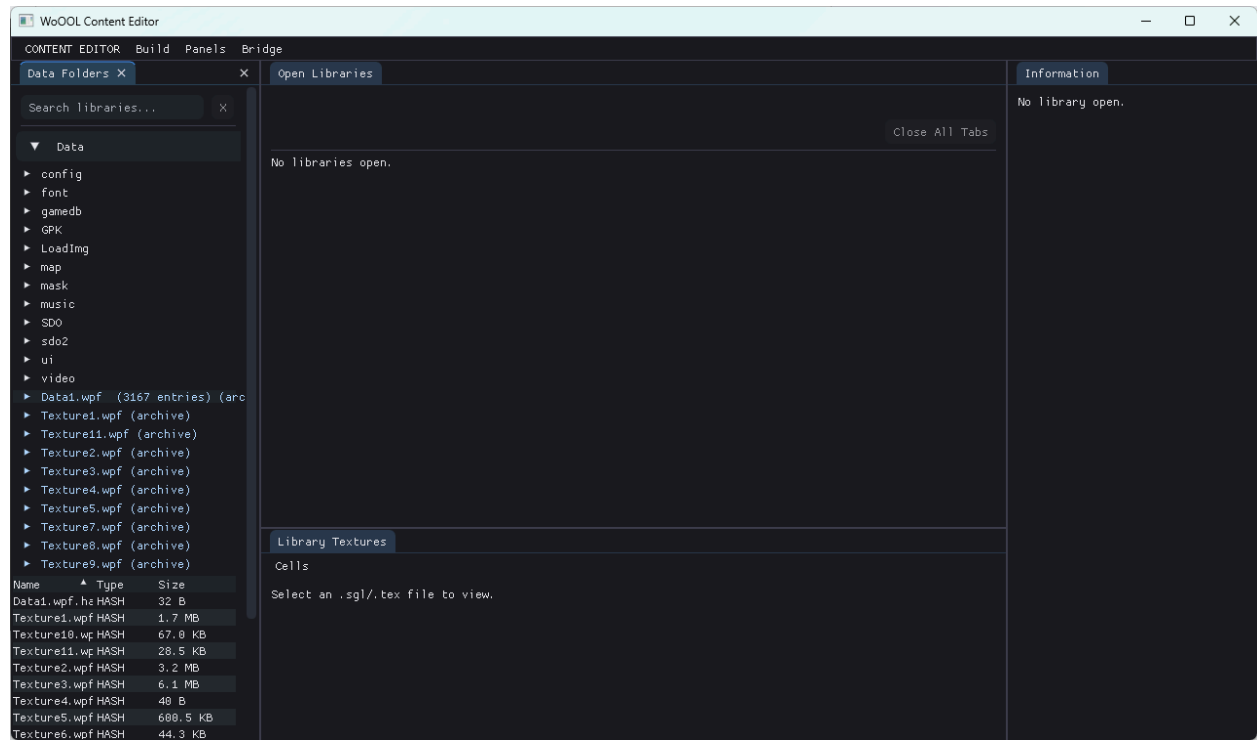



If the **Map Editor** is open, you can right click a NMP file in the **Data Folders** panel and open it. This will send a command to the **Map Editor** allowing it to read and load the map.

NOTE: The Map Editor needs to be set up with its own data folders first.

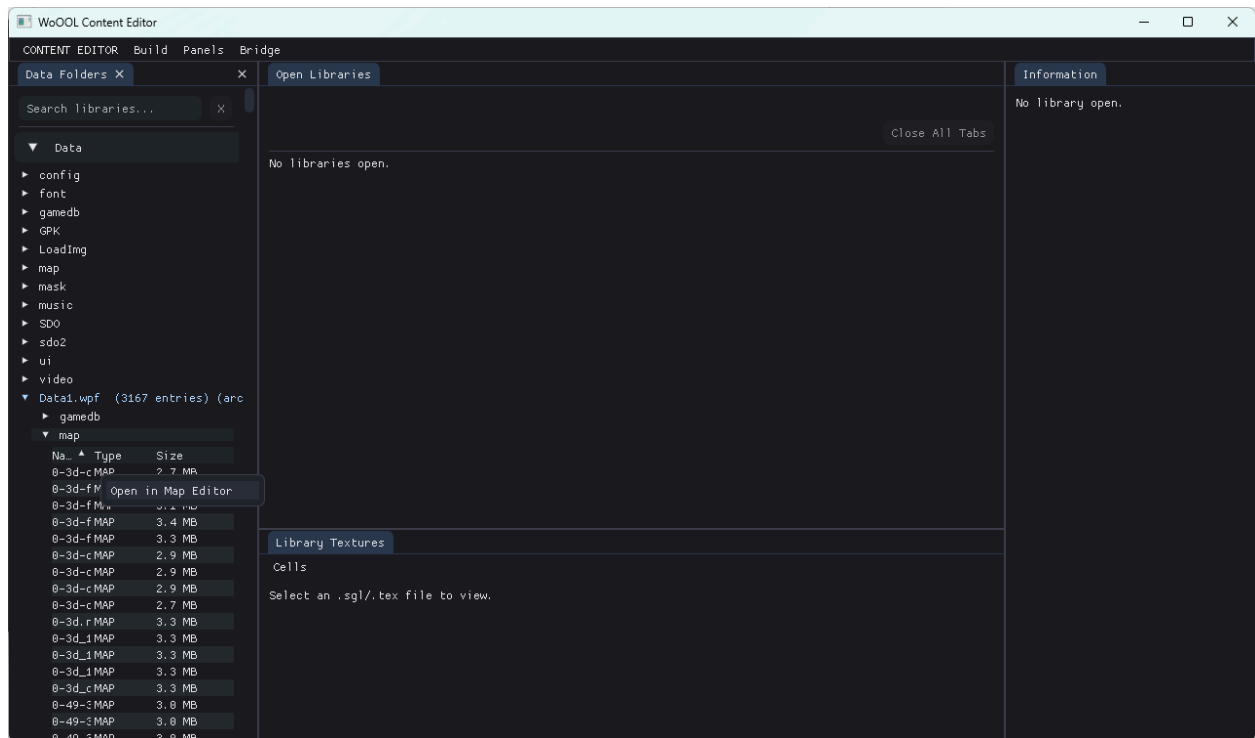

Hash validation and patching:

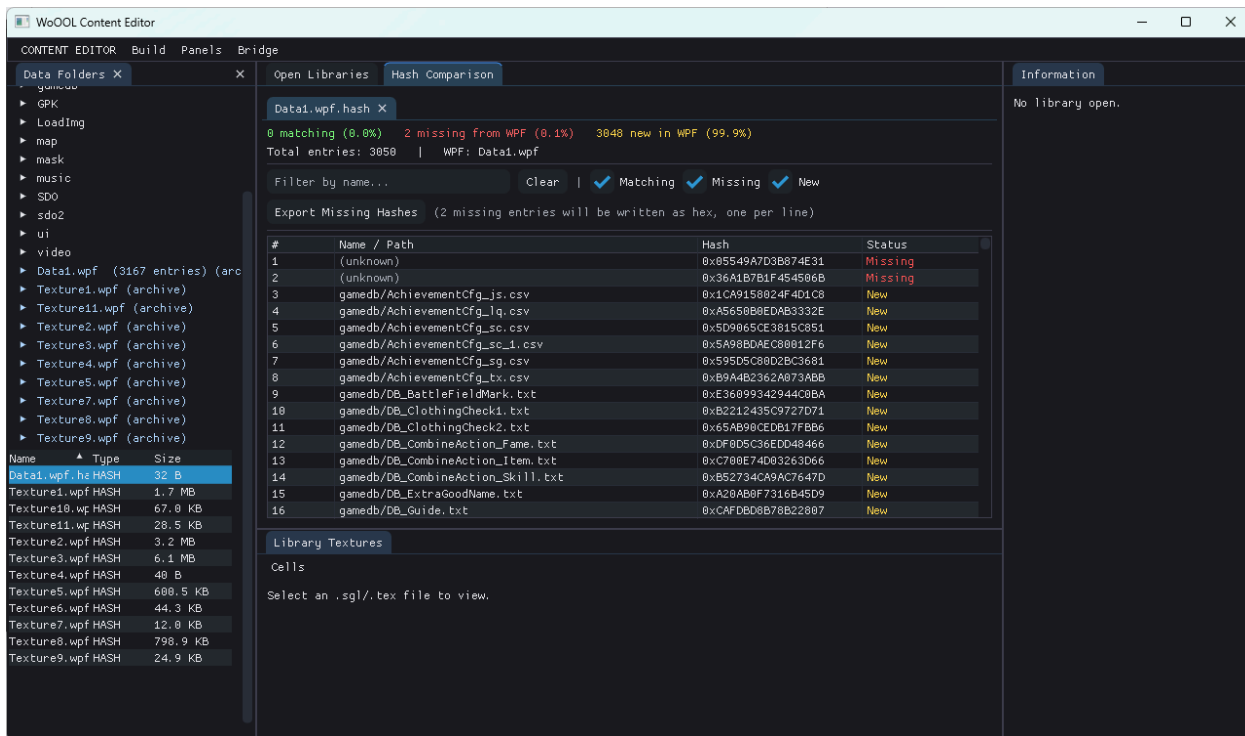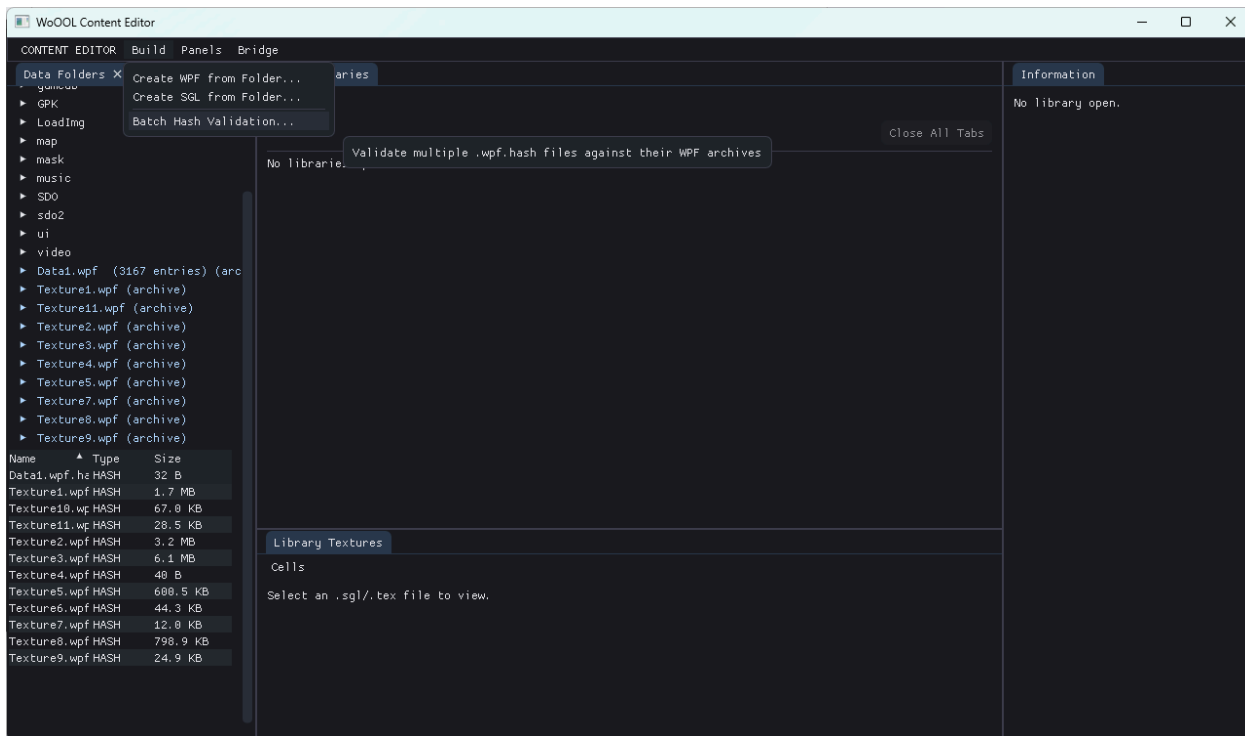

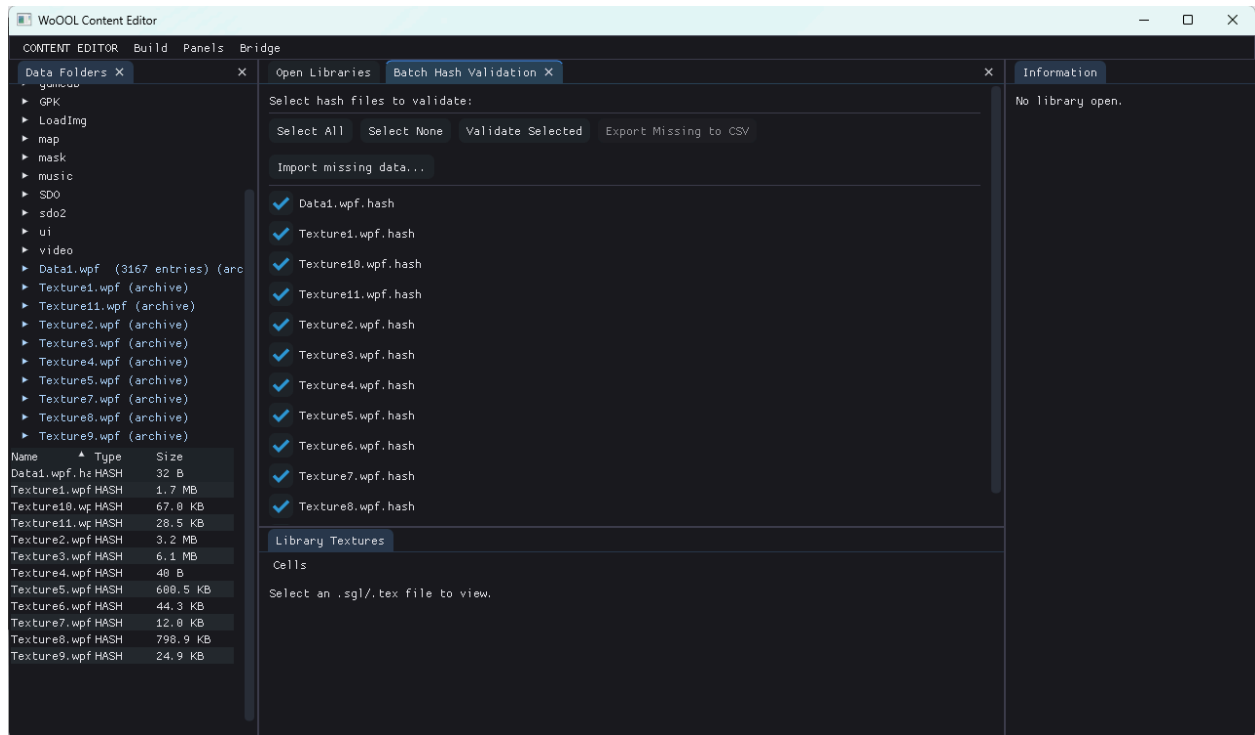

WoOOL Content Editor

CONTENT EDITORBuildPanelsBridge

Search libraries...

Data

config

font

gamedb

GPK

LoadImg

map

mask

music

SD0

sdo2

ui

video

Data1.wpf (3167 entries) (archive)

Texture1.wpf (archive)

Texture11.wpf (archive)

Texture2.wpf (archive)

Texture3.wpf (archive)

Texture4.wpf (archive)

Texture5.wpf (archive)

Texture7.wpf (archive)

Texture8.wpf (archive)

Texture9.wpf (archive)

Name

Type

Size

Data1.wpf.hash

HASH

32 B

Texture1.wpf.h

HASH

1.7 MB

Texture10.wpf.h

HASH

67.0 KB

Texture11.wpf.h

HASH

28.5 KB

Texture2.wpf.h

HASH

3.2 MB

Texture3.wpf.h

HASH

6.1 MB

Texture4.wpf.h

HASH

48 B

Texture5.wpf.h

HASH

600.5 KB

Texture6.wpf.h

HASH

44.3 KB

Texture7.wpf.h

HASH

12.0 KB

Texture8.wpf.h

HASH

798.9 KB

Texture9.wpf.h

HASH

24.9 KB

Open LibrariesBatch Hash Validation X

Import missing data...

✓Data1.wpf.hash

✓Texture1.wpf.hash

✓Texture10.wpf.hash

✓Texture11.wpf.hash

✓Texture2.wpf.hash

✓Texture3.wpf.hash

✓Texture4.wpf.hash

✓Texture5.wpf.hash

✓Texture6.wpf.hash

✓Texture7.wpf.hash

✓Texture8.wpf.hash

✓Texture9.wpf.hash

Results:

File	Total	Matching	Missing	New	Status
Data1.wpf.hash	3050	0	2	3048	0.0% match
Texture1.wpf.hash	221389	221389	0	0	100.0% OK
Texture10.wpf.hash	8572	0	8572	0	0.0% match
Texture11.wpf.hash	119631	0	3649	115982	0.0% match
Texture2.wpf.hash	422983	422983	0	0	100.0% OK
Texture3.wpf.hash	805430	805430	0	0	100.0% OK
Texture4.wpf.hash	48413	0	3	48410	0.0% match
Texture5.wpf.hash	76858	76858	0	0	100.0% OK
Texture6.wpf.hash	5668	0	5668	0	0.0% match
Texture7.wpf.hash	398016	0	1536	396480	0.0% match
Texture8.wpf.hash	102389	102253	0	136	99.9% match
Texture9.wpf.hash	79984	2570	619	76795	3.2% match

Overall: 1631483 / 2292383 entries matching across 12 files - 71.2% complete
20049 missing640051 new


Library Textures

Cells

Select an .sgl/.tex file to view.

Information

No library open.

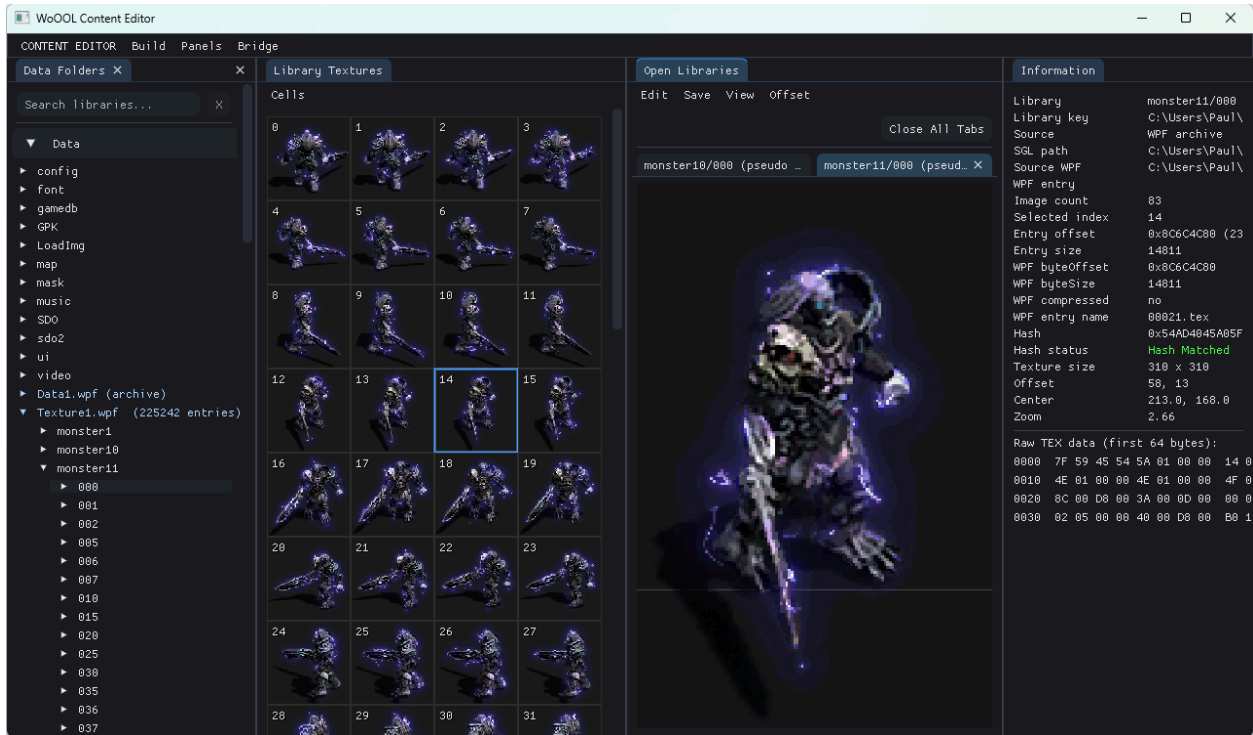

Map Editor

Map Patcher

WoOOL Download Patcher

