How to Flash the firmware into the R36Max

1. Install the flash tools and Usb driver

RKDevTool_Release.zip   2025/1/21 16:17

DriverAssitant_v5.12.zip   2023/12/16 10:42

1.1 Install the usb driver
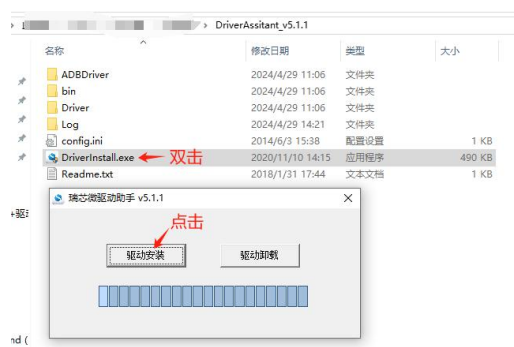
2. Double click the RKDevTool.exe

3. Loading the firmware u need

4. Identify the loader device

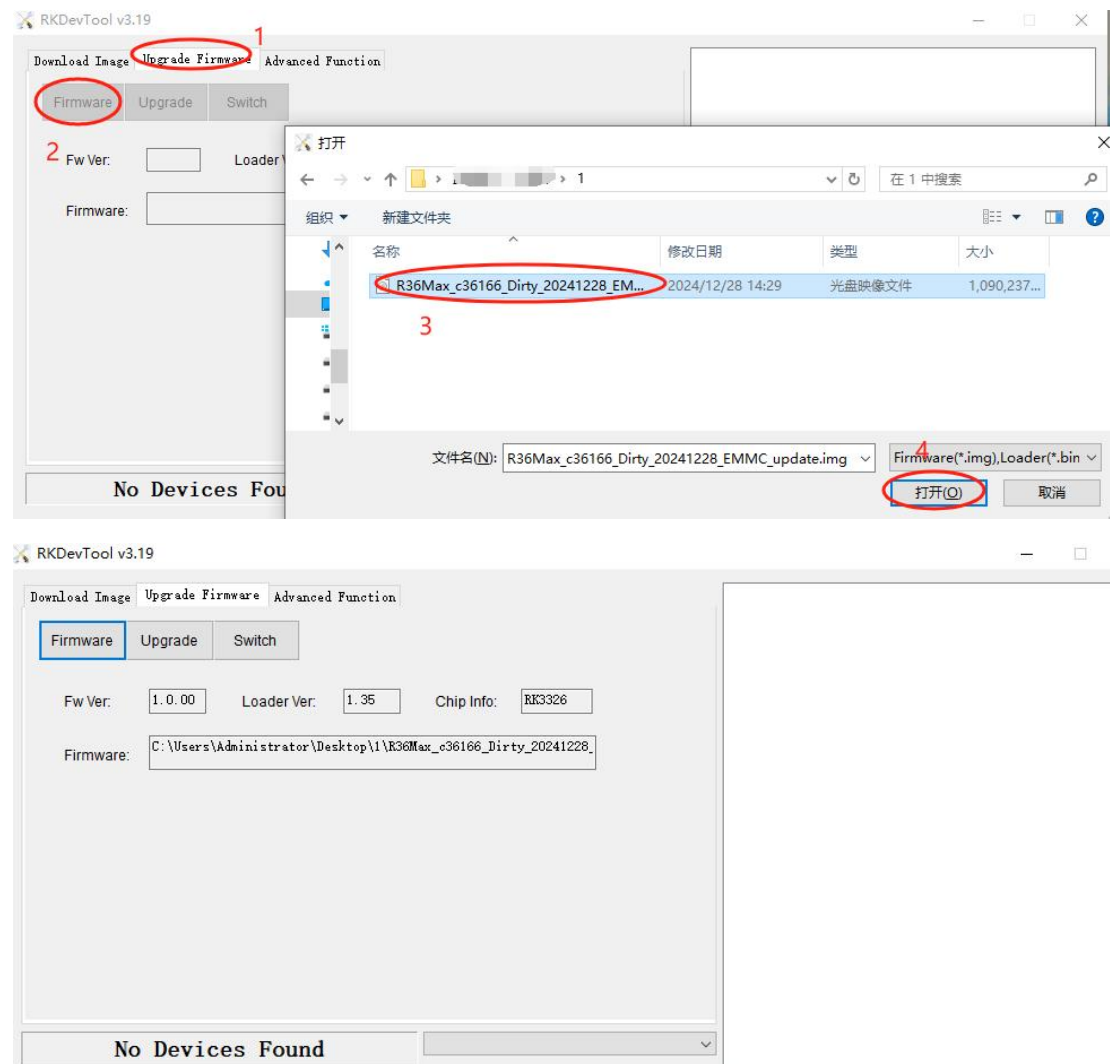Use a data cable to connect one end to the computer and the other end to the device's OTG port.

Method 1: While the device is powered off, hold down the volume up button and then press and hold the power button.

Method 2: While the device is powered on, hold down the volume up button and then briefly press the reset (RST) button.

5. Flash the firmware

After identifying the MaskROM/Loader device, click "Upgrade," and the right side will prompt you that once the download is complete, the device will automatically restart and boot into the system interface.