LOGIC BUILDING WITH LOOPS

(BEFORE STARTING DSA)

Phase 1 – While Loop
Phase 2 – do while loop
Phase 3 – For Loop
Phase 4 – Nested loop Logic
Phase 5 – Break / Continue logic
Phase 6 – Mathematical Series
Phase 7 – Mixed Logical Loop Problems
Phase 8 – Star Pattern Printing

Repositories for Answers:

- **C:** logic-building-codeN-C
- **C++:** logic-building-codeN-Cpp
- **Java:** logic-building-codeN-Java
- **Python:** logic-building-codeN-Python
- **JavaScript:** logic-building-codeN-JavaScript

Phase 1 : While Loop

1. Print all numbers from **1 to 10** using a loop.
2. Print numbers from **10 down to 1** in reverse order.
3. Print **all even numbers** between **1 and 100**.
4. Print **all odd numbers** between **1 and 100**.
5. Print the **multiplication table** of a given number from **n × 1 to n × 10**.
6. Calculate and print the **sum of the first n natural numbers**.
7. Calculate the **sum of all even numbers** from **1 up to n**.
8. Calculate the **sum of all odd numbers** from **1 up to n**.
9. Calculate and print the **factorial of a given number**.
10. Find and print the **product of all digits** of a given number.
11. Count and print the **total number of digits** in a given number.
12. Reverse the given number and print the **reversed value**.
13. Check whether the given number is a **palindrome**.
14. Find and print the **sum of digits** of the given number.
15. Check whether the given number is an **Armstrong number**.
16. Check whether the given number is a **Perfect number**.
17. Print **all prime numbers** between **1 and 100**.
18. Check whether the given number is a **prime number**.
19. Print the **Fibonacci series** up to **n terms**.
20. Find and print the **sum of the Fibonacci series** up to **n terms**.
21. Print the **square of each number** from **1 to n**.
22. Print the **cube of each number** from **1 to n**.

Scanned with CamScanner

23. Print all numbers between **a and b** that are **divisible by 7**.
24. Print **all factors** of the given number.
25. Find and print the **sum of all factors** of the given number.
26. Find the **HCF (Highest Common Factor)** of two given numbers.
27. Find the **LCM (Least Common Multiple)** of two given numbers.
28. Find the **smallest digit** in the given number.
29. Find the **largest digit** in the given number.

Phase 2 : do - While Loop

1. Print all numbers from **1 to 10**.
2. Print the **multiplication table** of a given number.
3. Keep taking numbers from the user until **0 is entered**, then print the **sum of all entered numbers**.
4. Keep taking numbers from the user until **0 is entered**, then print the **largest number** among all inputs.
5. Count and print the **number of digits** in the given number.
6. Reverse the given number and print the **reversed value.**
7. Check whether the given number is **a palindrome**.
8. Check whether the given number is an **Armstrong number**.
9. Calculate and print the **factorial** of the given number.
10. Print the **Fibonacci series** up to the required number of terms.
11. Find the **HCF (Highest Common Factor)** of the given numbers.
12. Create a **menu-driven program** that allows the user to choose and perform different operations.
13. Keep taking numbers from the user until a **negative number is entered**, then count how many **positive numbers** were entered.
14. Find and print the **sum of digits** of the given number.
15. Calculate and print the **sum of even digits** and the **sum of odd digits** of the given number separately.

Phase 3 : For Loop

1. Print all numbers from **1 to 10**.
2. Print numbers from **10 down to** 1 in reverse order.
3. Print **all even numbers** between **1 and 100**.
4. Print **all odd numbers** between **1 and 100**.
5. Print the **multiplication table** of a given number.
6. Calculate and print the **factorial of a given number**.
7. Calculate and print the **factorial of every number** from **1 to n**.
8. Print **all prime numbers** between **1 and 100**.
9. Check whether the given number is a **prime number**.

Scanned with CamScanner

10. Print the **Fibonacci series** up to the required number of terms.
11. Find and print the **sum of the Fibonacci series**.
12. Print **all factors** of the given number.
13. Find and print the **sum of all factors** of the given number.
14. Find the **HCF (Highest Common Factor)** of the given numbers.
15. Find the **LCM (Least Common Multiple)** of the given numbers.
16. Print the **square of each number** from **1 to n**.
17. Print the **cube of each number** from **1 to n**.
18. Print all numbers between **a and b** that are **divisible by 7**.
19. Find and print the **sum of the first n natural numbers**.
20. Find and print the **sum of all even numbers** from **1 up to n**.
21. Find and print the **sum of all odd numbers** from **1 up to n**.

Phase 4 : Nested Loop Logic

1. Print the **multiplication tables for all numbers from 1 to 10**.
2. Print **all possible pairs (i, j)** where both `i` and `j` range from **1 to n**.
3. For every number from **1 to n**, count and print the **total number of its factors**.
4. Print **all prime numbers** up to n using **nested loop checking**.
5. Print the **Fibonacci pattern row by row**, where each row prints the next Fibonacci numbers
6. Generate and print a **number triangle pattern** using **nested loops**.
7. Print a **matrix**, then calculate and display the **sum of each row** and the **sum of each column**.
8. Print **all Pythagorean triplets** whose values are **less than or equal to n**.

Phase 5 : Break / Continue Logic

1. Print numbers from **1 to 100**, and **stop the loop** as soon as a number **divisible by 17** is encountered.
2. Print numbers from **1 to 100**, but **skip** all numbers that are **divisible by 5** and continue printing the rest.
3. Take **5 numbers** as input, **skip any number that is 0** using `continue`, and calculate the **sum of the remaining numbers**.
4. Search for a specific number in a list of inputs, and **terminate the loop** immediately when the number is **found**.
5. Keep taking numbers from the user and **print them until a negative number appears**, then stop the loop.
6. Skip all **odd numbers** and print **only the even numbers**.
7. Continuously add numbers in a loop and **stop the loop** when the **sum becomes greater than 100**

Scanned with CamScanner

Phase 6 : Mathematical Series

1. Find and print the **sum of the first n natural numbers**.
2. Find and print the **sum of the first n even numbers**.
3. Find and print the **sum of the first n odd numbers**.
4. Print the **first n terms** of an **arithmetic progression** for the given first term and common difference.
5. Print the **first n terms** of a **geometric progression** for the given first term and common ratio.
6. Print the **Fibonacci series** up to the required number of terms.
7. Find and print the **sum of the Fibonacci series** up to the required number of terms.
8. Calculate and print the value of the series
   $1^2 + 2^2 + 3^2 + \ldots + n^2$.
9. Calculate and print the value of the series
   $1^3 + 2^3 + 3^3 + \ldots + n^3$.
10. Calculate and print the value of the series
    $1 + 1/2 + 1/3 + \ldots + 1/n$.
11. Print the series of powers of two:
    $1 + 2 + 4 + 8 + \ldots + 2^n$.
12. Calculate and print the value of the series
    $1! + 2! + 3! + \ldots + n!$.
13. Calculate and print the value of the series
    $1 + x + x^2 + x^3 + \ldots + x^n$.
14. Calculate and print the value of the series
    $x - x^2/2! + x^3/3! - x^4/4! + \ldots$.
15. Check whether the given number is a **Strong number**, where the number equals the **sum of factorials of its digits**.

Phase 7 : Mixed Logical Loop Problems

1. Print all numbers between **1 and 100** whose **sum of digits is even**.
2. Count Total numbers between **1 & 500** are **divisible by 7** but **not divisible by 5**.
3. Print **all palindrome numbers** between **1 and 500**.
4. Print all numbers from **1 to 100** whose **sum of digits is a multiple of 3**.
5. Print all numbers from **1 to n** whose **binary representation contains an even number of 1s**.
6. Print a pattern where the **i-th row prints the value `i * i`**.
7. Find & print the **sum of odd digits** & the **sum of even digits** of the given number.
8. Print **all Armstrong numbers** between **1 and 1000**.
9. Print **all Perfect numbers** between **1 and 1000**.
10. Find the number between **1 and n** that has the **maximum digit sum**, and print that number along with its digit sum.

Scanned with CamScanner


Phase 7 : Star Pattern Printing

1. Print a Single Star (*)

2. Print Four Stars (****)

3. Print n Stars on Same Line

4. Print Square of Stars (n x n Stars)




5. Print an Increasing Triangle of Stars



6. Print a Right-Aligned Triangle of Stars



7. Print Stars in Even Numbers (2, 4, 6, 8, 10)



Scanned with CamScanner

8. Print Stars in Odd Numbers (1, 3, 5, 7, 9)




9. Print a Centered Pyramid of Stars




10. Print Stars and Spaces Alternating (Stars and Blank Spaces) (b = blank space here)



11. Print Numbers in an Increasing Sequence (1, 12, 123, 1234, 12345)



12. Print Repeated Numbers per Row (Same Number Repeated)



Scanned with CamScanner

13.



14.



15.




16



17



18.




Scanned with CamScanner


19.



20.




21.



22.



23.

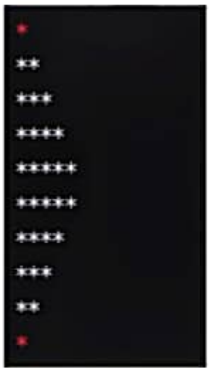

Scanned with CamScanner