

Week 3 - Storing Information

Data Structures

Tues Class: Outline

- Simple data structures: arrays, strings, doubles/floats, characters
- Storing data in memory: variable declaration; colon operator
- Regular indexing into arrays (RC); more complicated indexing
- Distinguish between array indices and stored values
- Complex data structures: cell arrays and structures
- Distinguish between cells/fields and contents of cells/fields


Quiz #1

In EOAS we often work with many measurements (ie. *lots of data*).

Example

- West Coast of VI 2013
- Transect: about 70 km
- Measurements:
 - every 1 m vertical
 - every 1 km lateral
- Avg Depth: 90 m
- Temperature, Salinity, Oxygen, Pressure, Latitude, Longitude, Depth

One of about 75 transects

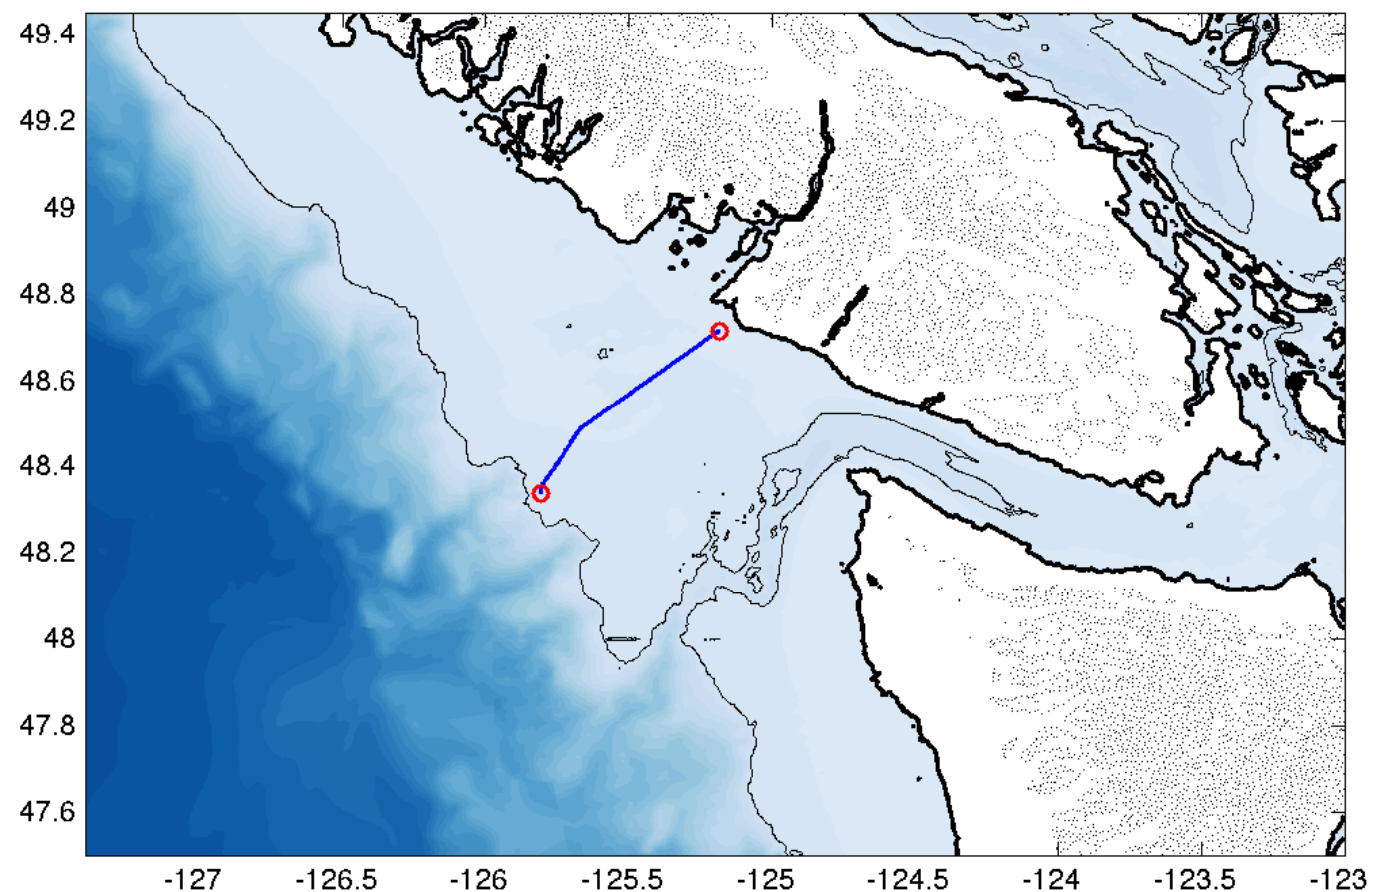

$90 \times 70 = 6300$ measurements per variable per transect.

7 variables and 75 transects, so $6300 \times 7 \times 75 = 3,307,500$ measurements!

How do you store and organize your data?

Primitive Data Structures: **Arrays**

Example, continued: The simplest way to store large amounts of data is in *arrays*. Consider the salinity measurements from the previous example - to plot this data, we require three arrays:

“2D Array”, size MxN
2D Matrix

depth	saln
1	NaN NaN NaN NaN NaN NaN NaN NaN NaN NaN ... NaN
2	NaN NaN NaN NaN NaN NaN NaN NaN NaN NaN ... NaN
...
15	32.65 32.26 32.13 32.31 32.52 32.51 32.58 32.77 32.76 32.42 ... 32.53
16	32.67 32.30 32.13 32.36 32.55 32.59 32.69 32.85 32.81 32.49 ... 32.58
17	32.66 32.35 32.15 32.40 32.64 32.61 32.64 32.82 32.87 32.61 ... 32.57
18	32.67 32.43 32.23 32.46 32.70 32.67 32.66 32.83 32.93 32.68 ... 32.59
19	32.74 32.51 32.30 32.56 32.77 32.75 32.72 32.85 32.99 32.72 ... 32.72
20	32.78 32.56 32.36 32.69 32.85 32.82 32.77 32.88 33.02 32.78 ... 32.74
21	32.86 32.61 32.44 32.74 32.89 32.88 32.87 32.97 33.07 32.91 ... 32.76
...

2.2	3.1	4.0	4.9	5.8	6.7	7.6	8.5	9.4	10.3	...	12.1
-----	-----	-----	-----	-----	-----	-----	-----	-----	------	-----	------

distance

“1D Array”, size Mx1
Column Vector

“1D Array”, size Nx1
Row Vector

In Matlab:

```
>> whos
      Name      Size      Bytes  Class  Attributes
depth         251x1         2008  double
distance        1x75          600  double
saln          251x75       150600  double
tempr         251x75       150600  double

>>
```

Arrays are like tables that store values, with one value stored in each location, much like a spreadsheet in Excel.

They can be:

- 1 Dimensional (row or column)
- 2 Dimensional (square/rectangle)
- 3 Dimensional (cube)
- N Dimensional (hard to visualize!)

Indexing into Arrays

- For accessing a subset of an array
- Think **RC** — row, column
- Regular indexing always uses the convention **(row, column)**
 - ie. “row-comma-column”

Example: Given that the array `sal` looks like this:

32.65	32.26	32.13	32.31	32.52	32.51	32.58	32.77	32.76	32.42	32.53
32.67	32.30	32.13	32.36	32.55	32.59	32.69	32.85	32.81	32.49	32.58
32.66	32.35	32.15	32.40	32.64	32.61	32.64	32.82	32.87	32.61	32.57
32.67	32.43	32.23	32.46	32.70	32.67	32.66	32.83	32.93	32.68	32.59
32.74	32.51	32.30	32.56	32.77	32.75	32.72	32.85	32.99	32.72	32.72
32.78	32.56	32.36	32.69	32.85	32.82	32.77	32.88	33.02	32.78	32.74
32.86	32.61	32.44	32.74	32.89	32.88	32.87	32.97	33.07	32.91	32.76

`sal(2:3, 2:5)`

`sal(end, :)`

`sal(:, 7)`



Forgot how to index?
Think “RC Cola”

Here the colon (:) operator means “all”, and the reserved word “end” refers to the last element

Worksheet

Please find your groups

Start on exercises 1 and 2

Complex Data Structures

Arrays are limiting because they only store one type of data at a time and because they must have regular shapes (ie. rectangles). There are two types of data structures that can accommodate more than one type of data type:

Cell Arrays

Arrays of “cells” where each cell may contain any simple data structure (ie. a numeric or character array). Use curly braces `{}` to denote cell arrays.

```
>> Var1 = {'Farmer John'; [5 6; 7 8]; [1:4]}
Var1 =
    'Farmer John'
    [2x2 double]
    [1x4 double]
>> Var1{2}
ans =
     5     6
     7     8
```

Structures

Structures are variables that contain a series of fields, each holding a simple data structure. Use “dot notation” to access

```
>> Client.name = 'Farmer John';
>> Client.age = 39;
>> Client.assets = [326, 254, 784];
>> Client

Client =
    name: 'Farmer John'
    age: 39
    assets: [326 254 784]
>> Client.name
ans =
Farmer John
```


Practice with structures and cell arrays


Worksheet exercise 3 and this week's lab

Cell Arrays: A practical example

Go back to our example of last year's Vancouver Island cruise. Say the cruise consisted of 12 individual legs (leg 3 is the one we looked at earlier), each measuring temperature (T), salinity (S), and distance (x), depth (z)

Problem: What is an efficient way to store T , S , x , and z for each leg?

Solution: You do NOT need $12 \times 4 = 48$ variables! Instead, create four cell arrays, each with 12 cells.

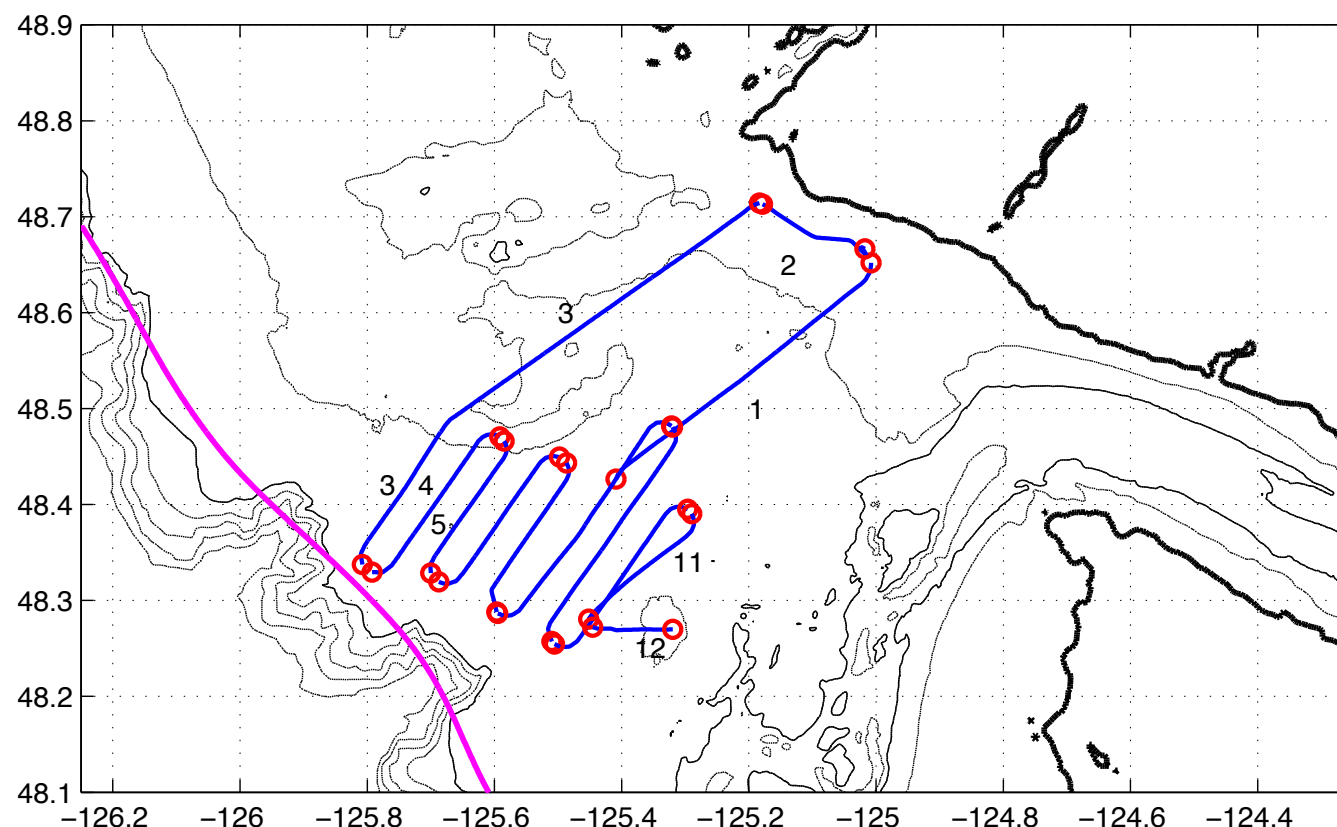

Use four variables, each a cell array with 12 cells (one for each leg)

```
>> whos
Name      Size      Bytes  Class
depth     1x12      25440   cell
distance  1x12       8544   cell
saln      1x12     1808544 cell
tempr     1x12     1808544 cell
```

*notice the “class” on the right

next slide: more practice to try
on your own

More complicated indexing

Example: Given that the array `sal` looks like this:

32.65	32.26	32.13	32.31	32.52	32.51	32.58	32.77	32.76	32.42	32.53
32.67	32.30	32.13	32.36	32.55	32.59	32.69	32.85	32.81	32.49	32.58
32.66	32.35	32.15	32.40	32.64	32.61	32.64	32.82	32.87	32.61	32.57
32.67	32.43	32.23	32.46	32.70	32.67	32.66	32.83	32.93	32.68	32.59
32.74	32.51	32.30	32.56	32.77	32.75	32.72	32.85	32.99	32.72	32.72
32.78	32.56	32.36	32.69	32.85	32.82	32.77	32.88	33.02	32.78	32.74
32.86	32.61	32.44	32.74	32.89	32.88	32.87	32.97	33.07	32.91	32.76

1. How might you create the following array,
using only one line of code?

32.30	32.13	32.36	32.55	32.59
32.43	32.23	32.46	32.70	32.67

2. Given `x=1:2:10` is stored in memory, what do you think the following will produce?

`z = sal(1,x)`