


CONTENTS


1. Introduction	1
2. Complete list of aTableau commands and options	6
2A. aTableau Colours	9
3. Tableaux and Young diagrams	9
3A. Tableaux	9
3A.1. Adding style	10
3A.2. Tableau coordinates	12
3A.3. Tableau keys	12
3A.4. Compositions	22
3A.5. Drawing order	22
3A.6. Special characters	23
3B. Young diagrams	23
3B.1. Diagrams with entries	26
3C. Skew tableaux and skew diagrams	27
3D. Shifted tableaux and shifted diagrams	28
3E. Tabloids	29
3F. Ribbon tableaux	30
3F.1. Ribbon specifications	30
3G. Multidiagrams and multitableaux	33
4. Abacuses	39
4A. Bead specifications	39
4A.1. Abacus coordinates	41
4B. Abacus keys	41
5. Examples from the literature	46
6. Feature requests and bug reports	48
References	49
Index	49

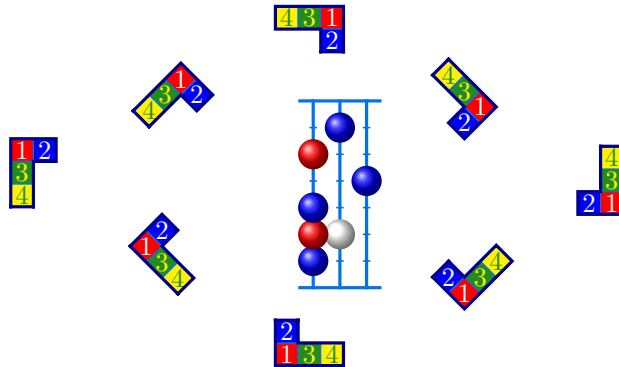

1. INTRODUCTION

The package provides commands for drawing common objects in algebraic combinatorics and representation theory, together with styling options and a key-value interface for additional customization. Under the hood, everything is drawn using `TikZ` (and `LATEX3`). These commands can be used either as standalone commands or as part of a `tikzpicture` environment. This package started as code for drawing the diagrams that I need in my own research. It is written as flexibly as possible in the hope that it will draw the diagrams that others need.

For the impatient, here is a basic example that shows how to use the main commands provided by the `aTableau` package:



1	2	3	9
4	5	6	10
7	8		

```
\Abacus{4}{4~3,2,1~2,0}
\Tableau{1239,456{10},78}
```

1.1

If you already know what tableaux and abacuses are, then you can probably work out the (basic) syntax of these two commands from this example and start using the package. If you do not know what tableaux and abacuses are, then you probably don't need this package! In any case, you will not find the precise mathematical definitions of these objects in this manual, so please consult textbooks like [9, 8] if you need them. For more advanced usage, such as adding styling, I recommend skimming through the manual, and looking at the many examples. Chapter 2 gives quick summary of all aTableau commands and their options.

The aTableau commands are intended to be easy to use and easy to customise. For example, partitions can be entered either as a (weakly decreasing list of non-negative) integers, or using exponential notation, or as a sequence of beta numbers (for the \Abacus command), and tableaux are entered as comma-separated words. The commands support the main conventions for drawing tableaux and diagrams.

By way of example, the following table shows how to draw a Young diagram of shape $\lambda = (4, 3^2, 2)$ using the four tableaux conventions supported by aTableau:

Convention	aTableau command	Picture
English	<code>\Tableau[english]{1234,567,89{10},{11}{12}}</code> (the default)	
French	<code>\Tableau[french]{1234,567,89{10},{11}{12}}</code>	
Ukrainian ¹	<code>\Tableau[ukrainian]{1234,567,89{10},{11}{12}}</code>	
Australian ²	<code>\Tableau[australian]{1234,567,89{10},{11}{12}}</code>	

This table shows how the commands provided by aTableau work: there are basic commands for drawing pictures, and these pictures can be embellished using optional arguments, which use a key-value interface.

The different conventions for diagrams, and tableaux, are listed in order of (my perception of) their popularity in the literature. By default, the *English* convention is used, so we can omit *english*:

1	2	3	4
5	6	7	
8	9	10	
11	12		



```
\Tableau{1234,567,89{10},{11}{12}}
```

1.2

for the first tableau in the table. These four conventions are used in exactly the same way with the \Diagram command:

¹Some authors call this the Russian convention.

²I have not seen a name for this convention in the literature. Calling this the *Australian convention* seems apt.



```
\Diagram{4,3,3,1}
\Diagram[ukrainian]{4,3^2,1}
```

1.3

This example shows that partitions can either be typed out in full, as a comma-separated list of positive integers, or using exponential notation, which is usually shorter and easier to read.

To use the package, add the following line to your document preamble:

```
\usepackage[options]{atableau}
```

Here, the *options* is an optional comma-separated list of **aTableau** options, or keys. We describe the possible options below. For example, to make the tableaux and Young diagrams commands use the **French** convention, by default, you could write:

```
\usepackage[french]{atableau}
```

You can change the default options at any point in your document using the **\aTabset** command, and you can change it for particular diagram.

Each of the **aTableau** commands is designed to be easy to use, easy to read, and easy to customise. Each command accepts an optional list of key-value options that modify and embellish the diagrams. In addition, optional styling can be applied to entries of a tableau and the beads in an abacus. Each command can be used as a standalone object in a document, or they can be incorporated into a larger **tikzpicture** environment, making it possible to use these commands to create more complicated pictures.

The general syntax of an **aTableau** command is:

```
\Command (x,y) [options] {...specifications...}
```

The (x,y) -Cartesian coordinates³ are optional, being necessary if (and only if), the diagram is part of a **tikzpicture** environment. See [Subsection 3A.2](#) and [Subsection 4A.1](#) for more detail about how these coordinates work for tableaux and abacuses, respectively.

The key-value *options*, or *keys*, control the style and appearance of the final diagram. The keys are optional and are described in detail below, with examples. This section emphasises only some of these options together with the fact that every key can be set “globally” (inside the current L^AT_EX group), by using **\aTabset{...options...}**. As discussed already, the default options for the document can also be set via **\usepackage[options]{atableau}**.

Many of the **aTableau** options are specific to the particular diagrams being drawn. The full list of the **aTableau** commands and their options is given in [Chapter 2](#), with the following sections giving more details and many examples. The following options are common to all **aTableau** commands.

align

Sets the baseline for vertically aligning diagrams. The possible options are **align=top**, **align=center**, and **align=bottom**, which aligns the baseline of the diagram with the top, centre or bottom of the surrounding objects, respectively. By default, **aTableau** are centered.

math entries, test entries

Determines whether tableaux entries, and bead labels, are typeset as mathematics or text.

name

Set the prefix for the **TikZ** *named anchors* for the boxes and beads in **aTableau** diagrams.

scale, xscale, yscale

Use **scale** to rescale all **aTableau** diagrams. Use **xscale** to rescale in the x -direction and **yscale** to rescale in the y -direction.

³Currently, only Cartesian coordinates are supported. For example, it is not possible to use named or polar coordinates.

styles

A short-hand for defining single-use **TikZ**-styles for the current picture.

tikzpicture

When used without Cartesian coordinates, all **aTableau** commands are implicitly drawn inside a **tikzpicture** environment. Use **tikzpicture=keys** to set the optional argument of this environment: `\begin{tikzpicture}[ keys ]...\end{tikzpicture}`.

tikz before, tikz after

Use the **tikz before** and **tikz after** keys to inject **TikZ** code into the **tikzpicture** environment, before and after the picture drawn by **aTableau**.

With boolean options, which are set to **true** or **false**, the value can typically be omitted. For example, **border** is equivalent to **border=true** and to **no border=false**. The **no border** key is inverse to **border**, so **no border** is equivalent to **no border=true**, and to **border=false**.


For all keys, American spelling variations are tolerated. For example, you can use **center** and **color** instead of the correct spellings of **centre** and **colour**, respectively.



Unlike the egalitarian **aTableau** settings, **TikZ**-style settings *do not* countenance English spelling of the English language!

The next example contrasts using the **\Diagram** command both outside and inside a **tikzpicture** environment. More explicitly, the second **\Diagram** command has Cartesian coordinates because it is being used inside a **tikzpicture** environment. Otherwise, these two **\Diagram** commands are identical, except that the second diagram is embellished with labels that are drawn by the other commands in the **tikzpicture** environment.


```
% \usetikzlibrary{patterns}
\tikzset{
  B/.style={pattern=north east lines, pattern color=blue},
  G/.style={pattern=north west lines, pattern color=ForestGreen},
}
\Diagram[ribbons={{(G)16ccccrrr, (B)16crrcccr}}]{6,5^2,2} % outside tikzpicture
\begin{tikzpicture} % inside tikzpicture with labels
  \Diagram(0,0)[ribbons={{(G)16ccccrrr, (B)16crrcccr}}]{6,5^2,2}
  % add the labels
  \draw[>->](1.5, 0.5)node[right]{ $\alpha=(1,2)$ } to [out=180,in=90] (A-1-2.base);
  \draw[>->](1.5,-2.5)node[right]{ $f_\alpha=(4,2)$ } to [out=180,in=270] (A-4-2.base);
  \draw[red,<->]([xshift=-1mm]A-1-1.south west)
    --node[rotate=90,above]{ $l_\alpha=3$ }([xshift=-1mm]A-4-1.south west);
\end{tikzpicture}
```

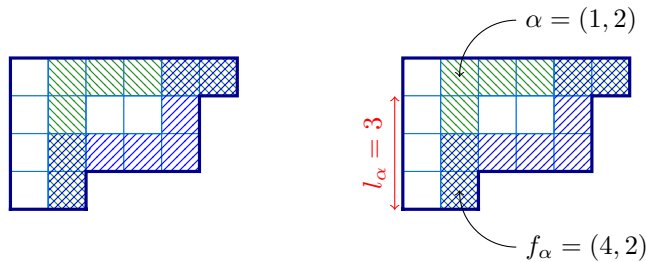

The first diagram shows that most of the right-hand diagram is drawn by the **\Diagram** command, even though most of the commands in the example are **TikZ** commands. In particular, the shading of the boxes in the $(1,2)$ -hook and $(1,2)$ -rim hook is done by the **ribbons** key. (In fact, the right-hand picture could be drawn without using a **tikzpicture** environment by using the **tikz after** key to add the **\draw** -commands.)


The top of the last example defines two **TikZ**-styles, B and G, which add the blue and green coloured hatchings of the two hooks. Inside the **tikzpicture** environment, the Young diagram is placed at position (0,0) by the **\Diagram** command. The three **\draw** commands are used to add the three labelled arrows to the picture. Please consult the very readable **TikZ** manual for more details on the **TikZ**-commands in this example.

From the viewpoint of **aTableau**, the most important point of the last example is that the first **\Diagram** command is a standalone diagram, whereas the second one is part of a **tikzpicture** environment because it was given the Cartesian coordinate (0,0). The second important point is that this example uses four *named coordinates*: (A-1-1), (A-1-2), (A-4-1), and (A-4-2). When **aTableau** draws a tableau, or a diagram, it creates a **TikZ** named coordinate (A-r-c) for every box in the diagram, where (A-r-c) is the box in row r and column c. These named coordinates, or anchors, are *only* defined for the boxes in the tableau. Giving finer control, the following standard **TikZ** anchors are available, depending on which tableaux convention you are using:

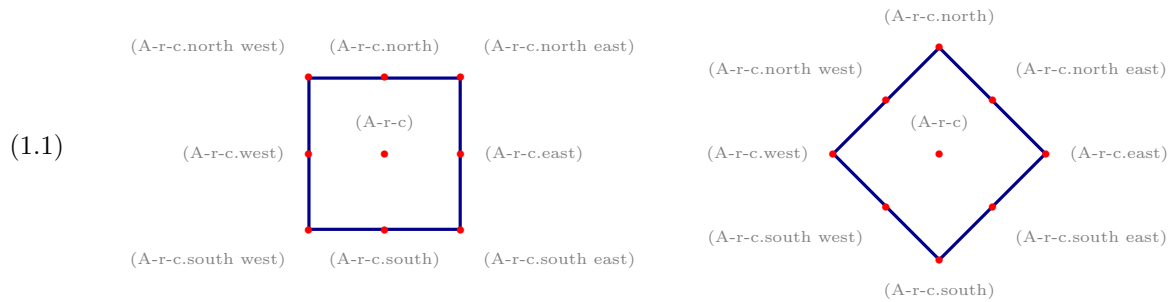


You can change the prefix A in these anchors using the **name** key. Similar anchors are created for abacus beads. These *anchors* are a standard part of **TikZ**. If you change the shape of the node, then the available anchors may change; for more information see the **TikZ** manual.

In the example above, the Cartesian coordinate (0,0) is necessary because the **\Diagram** command is used inside a **tikzpicture** environment, but the choice of coordinate is not important in the sense that changing the coordinate will not change the picture. Cartesian coordinates become more meaningful when the **tikzpicture** environment has more components. In the next example, the key **name=B** makes the named coordinates for the second diagram take the form (B-r-c), instead of the default node names (A-r-c), which are used in the first diagram. This allows us to draw (*wavy) lines between boxes in the two tableaux.

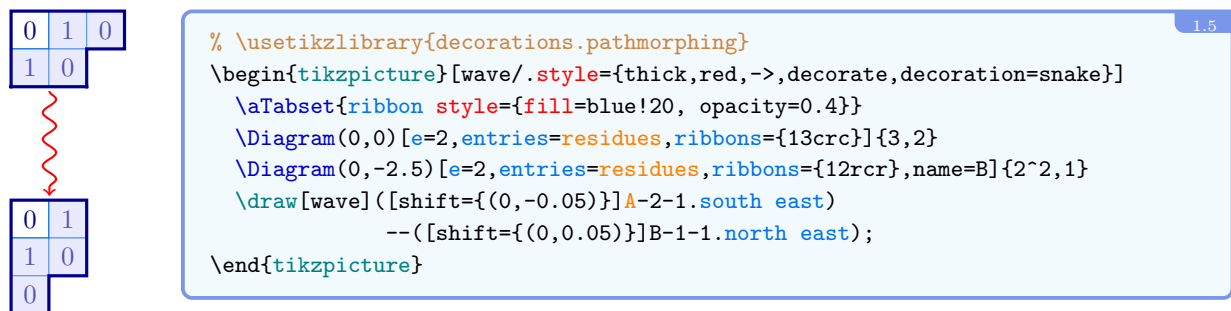

In this example, the entries in the two tableaux were added by the key **entries=residues**, which automatically puts the **e**-residue into each of the boxes in the two tableaux. The shading is done by the **ribbons** commands. Notice that **ribbon style**, which sets the **TikZ**-style of the ribbons, includes **opacity=0.4**. This necessary because the ribbons are drawn *after* the tableau entries; see **Subsection 3A.5**. Alternatively, these tableau entries could be included in the ribbon specifications, as described in **Section 3F**.


The final example in the introduction uses **\ShiftedTableau** inside a *matrix of nodes*:

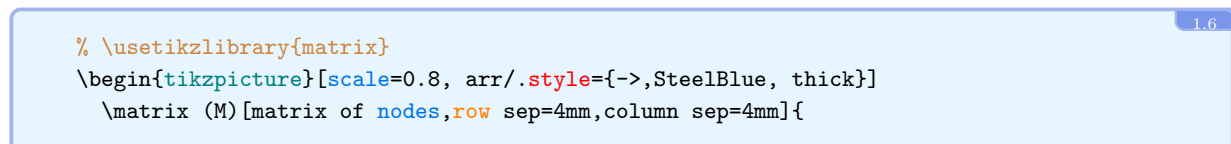

```

& & & \SkewedTableau{1234,567} \\
& & \SkewedTableau{1235,467}
& & \SkewedTableau{1243,567}\\
& \SkewedTableau{1236,457}
& & \SkewedTableau{1245,367}
& & \SkewedTableau{1253,467}\\
\SkewedTableau{1237,456}
& & \SkewedTableau{1246,357}
& & \SkewedTableau{1254,367}\\
& \SkewedTableau{1247,356}\\
};
\draw[arr] (M-1-4)--node[above]{\sigma_4}(M-2-3);
\draw[arr] (M-1-4)--node[above]{\sigma_3}(M-2-5);
\draw[arr] (M-2-3)--node[above]{\sigma_5}(M-3-2);
\draw[arr] (M-2-3)--node[above]{\sigma_3}(M-3-4);
\draw[arr] (M-2-5)--node[above]{\sigma_4}(M-3-6);
\draw[arr] (M-3-2)--node[above]{\sigma_6}(M-4-1);
\draw[arr] (M-3-2)--node[above]{\sigma_3}(M-4-3);
\draw[arr] (M-3-4)--node[above]{\sigma_5}(M-4-3);
\draw[arr] (M-3-4)--node[above]{\sigma_4}(M-4-5);
\draw[arr] (M-3-6)--node[above]{\sigma_3}(M-4-5);
\draw[arr] (M-4-1)--node[above]{\sigma_3}(M-5-2);
\draw[arr] (M-4-3)--node[above]{\sigma_6}(M-5-2);
\end{tikzpicture}

```

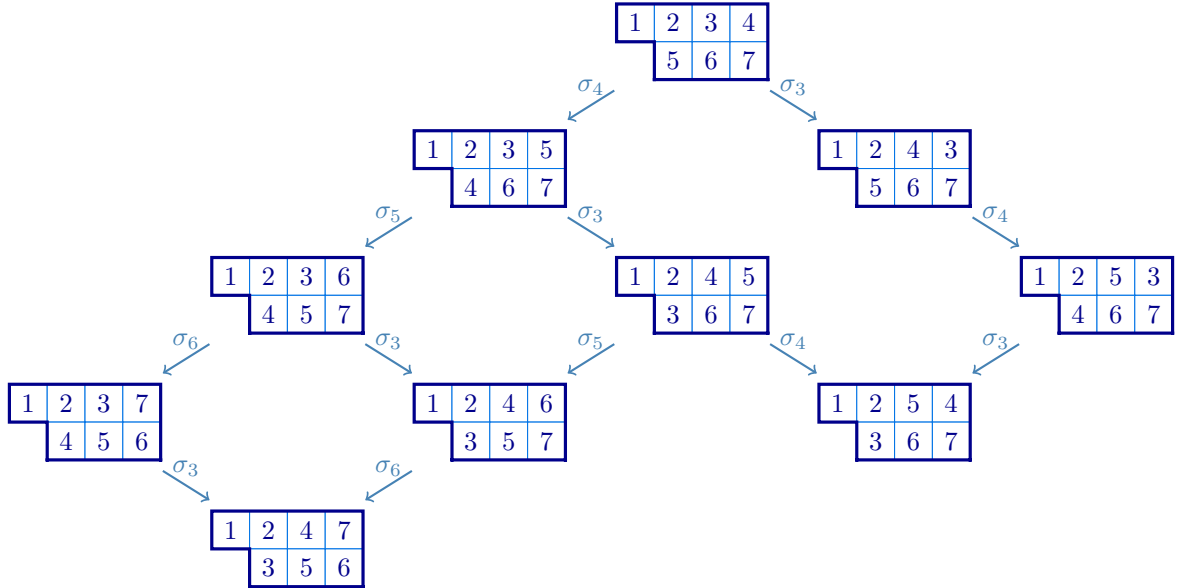

Notice that even though the `\SkewedTableau` commands are being used inside a `tikzpicture` environment they do not need coordinates because the skew tableaux are being placed by the `TikZ \matrix` command. The `\SkewedTableau` commands are not explicit components in the `tikzpicture` environment, being all (implicitly) inside `TikZ`-nodes.

The following sections describe the commands defined by the `aTableau` package and how to use them. We start with the `\Tableau` command because all of the diagram and tableau commands, except for `\RibbonTableau`, are derived from `\Tableau`.

2. COMPLETE LIST OF `aTableau` COMMANDS AND OPTIONS

For this impatient, this section compactly lists the `aTableau` commands and their options. Later section show how these are used, with examples.

The `aTableau` package provides the following commands:

Command	Picture	Section
<code>\Abacus</code>	An abacus for a partition	Chapter 4
<code>\Diagram</code>	A Young diagram for a partition	Section 3B
<code>\Multidiagram</code>	An ℓ -tuple of Young diagrams	Section 3G
<code>\Multitableau</code>	An ℓ -tuple of tableaux	Section 3G
<code>\RibbonTableau</code>	A ribbon tableau	Section 3F
<code>\ShiftedDiagram</code>	A shifted Young diagram	Section 3D
<code>\ShiftedTableau</code>	A shifted tableau	Section 3D
<code>\SkewDiagram</code>	A skew Young diagram	Section 3C
<code>\SkewTableau</code>	A skew tableau	Section 3C
<code>\Tableau</code>	A tableau	Section 3A
<code>\Tabloid</code>	A tabloid	Section 3E

In addition, the `\aTabset` command is provided for setting can default `aTableau` values for the `aTableau` options.

For easier reference, here is the list of the `aTableau` keys, together with a quick explanation of what they do. The last two columns indicate whether the options apply to tableau (and diagrams), or to abacuses — or both! Options starting with `(no)` are a pair of boolean options and their inverses. If not given a true or false value then they are implicitly set to true. Although not explicitly listed, spelling variations of keys from the American dialect of English are tolerated.

Key	Meaning	Tableau	Abacus
<code>abacus ends</code>	Set the top and bottom of the abacus	✗	✓
<code>abacus ends style</code>	Set the style of the top and bottom of the abacus	✗	✓
<code>align</code>	Set baseline alignment of <code>aTableau</code> diagram	✓	✓
<code>australian</code>	Use the Australian convention for tableaux	✓	✗
<code>bead</code>	Set the colour of the abacus beads	✗	✓
<code>bead font</code>	Set the font used for the abacus bead labels	✗	✓
<code>bead sep</code>	The distance between adjacent beads on a runner	✗	✓
<code>bead size</code>	The diameter of the abacus beads	✗	✓
<code>bead style</code>	Set the style of the abacus beads	✗	✓
<code>bead text</code>	Set the colour of the abacus bead labels	✗	✓
<code>beta numbers</code>	Enter bead specification as beta numbers	✗	✓
<code>(no) border</code>	Draw the tableau border	✓	✗
<code>border colour</code>	Set tableau border colour	✓	✗
<code>border style</code>	Set tableau border style	✓	✗
<code>box height</code>	Set tableau box height	✓	✗
<code>box style</code>	Set tableau box style	✓	✗
<code>box width</code>	Set tableau box width	✓	✗
<code>(no) boxes</code>	Draw inner walls around boxes	✓	✗
<code>cartan</code>	Set Cartan type for residues	✓	✓
<code>charge</code>	Set charge for contents and residues	✓	✓
<code>conjugate</code>	Draw the conjugate tableau/diagram	✓	✗
<code>delimiters</code>	Set delimiters for multitableau and multidiagrams	✓	✗
<code>dotted cols</code>	Specify columns to replace with dots	✓	✓
<code>dotted rows</code>	Specify rows to replace with dots	✓	✓
<code>east</code>	Make abacus grow in the easterly direction	✓	✗
<code>empty</code>	Symbol for empty tableau in multitableau	✓	✗
<code>english</code>	Use the English convention for tableaux	✓	✗
<code>entries</code>	Add entries to tableaux and abacuses	✓	✓
<code>e</code>	Set the quantum characteristic for residues	✓	✓
<code>french</code>	Use the French convention for tableaux	✓	✗
<code>halign</code>	Horizontal alignment of box entries and bead labels	✓	✓
<code>inner colour</code>	Set colour of inner tableau wall	✓	✗
<code>inner style</code>	Set style of inner tableau wall	✓	✗

Key	Meaning	Tableau	Abacus
label style	Set style of tableau labels	✓	✗
label	Set tableau label	✓	✗
left delimiter	Set left delimiter for multitableau	✓	✗
math entries	Typeset box and label entries in math-mode	✓	✓
name	Prefix of named nodes	✓	✓
north	Make abacus grow in the northerly direction	✗	✓
path box style	Sets style of boxes on each path	✓	✗
path box	Adds default box entry for each path	✓	✗
path style	Sets style of a path	✓	✗
paths	Add paths to a diagram or tableau	✓	✗
ribbon box	Adds default box entry for each ribbon	✓	✗
ribbon box	Define a node for every box on a ribbon path	✓	✗
ribbon box	Set style of boxes in ribbons	✓	✗
ribbon style	Set ribbon style	✓	✗
ribbons	Comma separated list of ribbons to add to tableau	✓	✗
ribbon box style	Sets style of boxes on each ribbon	✓	✗
ribbon style	Sets style of a ribbon	✓	✗
right delimiter	Set left delimiter for multitableau	✓	✗
rows	Set number of rows in multitableau or abacus	✓	✓
runner style	Set the colour of the abacus runners	✗	✓
runner sep	Set distance between consecutive abacus runners	✗	✓
scale	Sets the aTableau scale	✓	✓
separation	Set distance between components in multitableau	✓	✗
separator colour	Set separator colour for multitableau	✓	✗
(no) separators	Enable separators in multitableau	✓	✗
separator	Set separator colour in multitableau	✓	✗
shifted	Set true for a shifted tableau	✓	✗
skew border style	Set TikZ-style of the skew border	✓	✗
(no) skew border	Set skew border colour	✓	✗
skew box style	Set TikZ-style of the skew boxes	✓	✗
(no) skew boxes	Enable drawing of skew boxes	✓	✗
skew	Set inner skew shape	✓	✗
snobs	Comma separated list of snobs to add to tableau	✓	✗
snob box	Adds default box entry for each snob	✓	✗
snob box style	Sets style of boxes on each snob	✓	✗
snob style	Sets style of a snob	✓	✗
south	Make abacus grow in the southerly direction	✓	✗
star style	Set TikZ-style of tableau *-nodes	✓	✗
styles	Short-hand for defining single use TikZ-styles	✓	✓
tabloid	Set true for a shifted tableau	✓	✗
text entries	Typeset box and label entries in text-mode	✓	✓
tick	Set the colour of the abacus runner ticks	✗	✓
tick width	Set the width of the abacus runners	✗	✓
tikz after	TikZ-code injected after aTableau picture	✓	✓
tikz before	TikZ-code injected before aTableau picture	✓	✓
tikzpicture	Sets tikzpicture environment keys	✓	✗
ukrainian	Use the Ukrainian convention for tableaux	✓	✗
valign	Set vertical alignment	✓	✓
west	Make abacus grow in the westerly direction	✓	✗
xoffsets	Set x-offsets for components in a multitableau	✓	✗
xscale	Set aTableau x-scale	✓	✓
yoffsets	Set y-offsets for components in a multitableau	✓	✗

Key	Meaning	Tableau	Abacus
<code>yyscale</code>	Set <code>aTableau</code> y -scale	✓	✓

2A. **aTableau Colours.** The `aTableau` package defines and uses the following colours:

Colour	Name	HTML
	<code>aTableauInner</code>	0073E6
	<code>aTableauMain</code>	00008B
	<code>aTableauSkewFill</code>	F8F8F8
	<code>aTableauSkew</code>	818589
	<code>aTableauStarStyle</code>	E6F7FF

All of these colours are defined as HTML colours using the `\definecolor` command provided by `xcolor`.

We recommend using the key-value interface to change the colours used in the pictures created by `aTableau`, rather than changing these colours. It is sometimes useful to be able to use these colour names directly in your own styles.

3. TABLEAUX AND YOUNG DIAGRAMS

Partitions are weakly decreasing sequences of non-negative integers. They are fundamental objects in algebraic combinatorics and representation theory. Rather than working with sequences of integers, it is often useful to visualise partitions as Young *diagrams*, which are arrays of *boxes*, or *nodes*, in the plane⁴. A *tableau* is a (Young) diagram where the boxes are labelled using some alphabet. Equivalently, a diagram is a tableau with empty labels.

For example, $\lambda = (4, 3, 3, 2, 0, 0, \dots)$ is a partition of 12, since the entries sum to 12. It is customary to omit the zeros when writing partitions and to use exponents for repeated parts, so we can write this partition in *exponential notation* as $\lambda = (4, 3^2, 2)$. Many authors identify a partition $\lambda = (\lambda_1, \lambda_2, \dots)$ with its *diagram*, which is the set $[\lambda] = \{(r, c) \mid 1 \leq c \leq \lambda_r \text{ for } r \geq 1\}$. When using the *English convention*, the diagram of λ is visualised as a left justified array of boxes in the plane, where the first row has 4 boxes, the next two lower rows have 3 boxes and the last row has 2 boxes. The *shape* of a diagram is the partition that gives the number of boxes in each row. Diagrams and tableaux drawn using the *French* convention are given by reflecting in a horizontal line above the diagrams, whereas the *Ukrainian* and *Australian* conventions are given by appropriately rotating these diagrams. All of these conventions are used in the literature, with some papers using more than one convention.

3A. **Tableaux.** This section describes the `\Tableau` command, which draws tableaux or labelled diagrams. The syntax of this command is:

```
\Tableau (x,y) [options] {tableau entries}
```

where:

(x, y)

The Cartesian coordinates (x, y) are needed if, and only if, the tableau is a component of a `tikzpicture` environment.

options

Optional arguments. Described, with examples, below.

tableau entries

The `tableau entries` are given as a comma-separated list, with commas separating rows and each *token*, or braced-group of tokens, being in a separate column. As we explain below, each tableau entry can be prefixed by (optional) *TikZ*-styling specifications.

⁴In this manual, we normally refer to the entries of tableaux and diagrams as *boxes*, rather than *nodes*. This is to avoid any ambiguity with *TikZ*-nodes.

We show by example how to use the `\Tableau` command, starting with basic usage and finishing with style. Inside `\Tableau`, the rows are separated by commas, with the columns given by the “letters” in the word for each row:

1	2	3	4
5	6		
7			
8			

α	γ	δ	q
x	y	η	
λ	μ		
π	Σ		

```
\Tableau{ 1234, 56, 7, 8 }
\Tableau{ \alpha\gamma\delta q,
           xy\eta,
           \lambda\mu,
           \pi\sum }
```

3A.1

The tableau specifications can be put on a single line, without any spaces. Alternatively, as shown here, spaces and line breaks can be added to improve readability. The one restriction is that you cannot have blank lines inside a `\Tableau` command. As this example suggests, by default, the entries in a tableau are typeset in mathematics-mode, but this can be changed using the `text entries` key, which is described below.

As the examples above show, the tableau entries can be individual characters, or they can be T_EX commands. Tableaux frequently contain entries that are not single characters, or given by commands. Such entries can be added to a tableau by enclosing them in braces:

1	3	10	11	2x
2	x^2			
r_1				

```
\Tableau{ 13{10}{11}{2x}, 2{x^2}, {r_1} }
```

3A.2

3A.1. Adding style. The `aTableau` package provides several different ways to add T_ikZ style specifications to the boxes in diagrams and tableaux. This is done by adding style prefixes to the tableau entries. To take advantage of these styles you need to have at least rudimentary knowledge of T_ikZ-styling. The examples in this manual might be enough to get you started as they give a good indication of what is possible. For anything more exotic, please consult the T_ikZ manual.

The simplest way to change the style of an entry in a tableau is to add a `*`-prefix to the entry:

1	2	3	4	5
6	7	8	9	
10	11	12		
13				

```
\Tableau{ 1*2*3*4*5, 6*789, {10}*{11}{12}, {13} }
```

3A.3

In this tableau, there is an asterisk before each of the entries 2, 3, 4, 5 and 8, which gives the corresponding boxes the `star style`. The `*`-entries are given the T_ikZ-styling, which is `fill=` by default. You can change the default `*`-style using the `star style` key:

1	2	3	4	5
6	7	8	9	
10	11	12		
13				

```
\Tableau[star style={fill=red!20,draw=red,thick}]
{ 1*2*3*4*5, 6*789, {10}*{11}{12}, {13} }
```

3A.4

Note that the `*`-styling overrides the default styling of the surrounding boxes. This is because the boxes with the default styling are placed first, in the order that they are entered, after which the boxes with custom styles are placed.

The `*`-syntax is a quick shorthand for adding emphasis to some boxes in a tableau, but all of the `*`-entries are given the same style. It is possible to give every box in the tableau different styles by putting T_ikZ-styling specifications inside square brackets, `[...]`, before the corresponding letter in the tableau specification. You can mix the `*`-syntax and the `[...]`-style syntax for different entries, although only one of these style settings can be applied to any given box.

```
\Tableau[french]{
  1 [blue!20]2 [circle]3 [red]4 [cyan]5,
  6 *7 8 9,
  {10} *{11} {12},
  {{13}} }
```

3A.5

It is not necessary to add spaces between the entries in the way that this example does. This is done only to make it clearer how the style specifications are applied to the different entries in the tableau.

Omitting some technicalities, each box in a tableau is constructed as a *TikZ* node, so any *TikZ*-styling specifications for a node can be used. This example shows that some care is needed when changing the style because simply giving a colour changes both the colour used to *fill* the box and the *text colour*, which is why some of tableau entries in the last example appear to be blank. If you are already familiar with *TikZ* then you probably already know what to do. If not, then here is a short list of useful style specifications for *TikZ* nodes:

Style	Meaning
<code>draw</code> = $\langle \text{colour} \rangle$	Sets the boundary colour of the node
<code>fill</code> = $\langle \text{colour} \rangle$	Sets the fill, or background, colour of the node
<code>font</code> = $\langle \text{font commands} \rangle$	Sets the font
<code>opacity</code> = $\langle \text{value} \rangle$	Sets both the drawing and filling opacity to = $\langle \text{value} \rangle$
<code>text</code> = $\langle \text{colour} \rangle$	Sets the text colour in the node

In the style settings, any valid $\text{\LaTeX}$ colour name can be used; see, for example, the `xcolor` manual. In addition, the style specifications `thin`, `thick`, `very thick`, `ultra thick`, `dashed`, `dotted`, `...` change the border thickness, and its properties. Subsection 3A.3 below describes how to use these options to customise the tableau style.


If you want to apply “complicated” style settings, such as `draw=cyan,ultra thick`, which consists of a comma-separated list of *TikZ*-style settings, then the entire style must be put inside matching square brackets and curly braces `[{...}]`. This is necessary to ensure that $\text{\LaTeX}$ does not get confused by the commas in the style setting (since commas are also used to separate the rows of the tableau).

```
\Tableau[australian]{
  1 [fill=blue!20]2 3 [text=red]4 5,
  [{circle,fill=orange}]6 *7 8 9,
  [{draw=cyan,ultra thick}]{10} *{11} {12},
  [{dashed,draw=red,ultra thick}]{13} }
```

3A.6

This example shows that modifying the borders of a box is problematic because boxes placed later are likely to overwrite the new border style (see Subsection 3A.5). As a result, modifying the borders of the boxes is often not a good way to add emphasis to a tableau, so use this sparingly. In addition, the orange circle in this example looks too big, but it is what we asked for because the diameter of the circle is the horizontal width of the box. The next example shows that we get a better result with *minimum size* specification when using the *Australian* and *Ukrainian* conventions for tableaux.

For complex or frequently used styles, we recommend using the `\tikzset` command to define the style outside of the `\Tableau` command. This makes your code both easier to read and easier to change. If you need to define a style for a single picture, then you can also use the `styles` key.




```

\tikzset{
  B/.style={fill=blue!40, text=yellow},
  G/.style={fill=green!80!blue, circle, minimum size=5mm},
  R/.style={fill=red, text=white, font=\tiny},
  Y/.style={fill=yellow!20, text=blue}
}
\Tableau[french]{[R]1[B]2,[G]3,[Y]4}
\Tableau[ukrainian]{[R]1[B]2,[G]3,[Y]4}
\Tableau[english]{[R]1[B]2,[G]3,[Y]4}
\Tableau[australian]{[R]1[B]2,[G]3,[Y]4}

```

In this example, the `TikZ`-styles `B`, `G`, `R`, and `Y` are applied to the tableaux entries labelled 1, 2, 3, and 4, respectively. Note the use of *minimum size* to control the size of the circle. The colours used here, and throughout this manual, are for demonstration purposes only. I recommend against such garish choices in any self-respecting document!

3A.2. Tableau coordinates. The (x, y) -coordinates are required if, and only if, the `\Tableau` command is used inside a `tikzpicture` environment, in which case (x, y) gives the coordinates of the “outside corner” of the box in row 1 and column 1 of the tableau. The following example shows how tableaux are placed using (x, y) -coordinates inside a `tikzpicture` environment. The example also shows that, by default, the tableau boxes are square and half a unit wide.

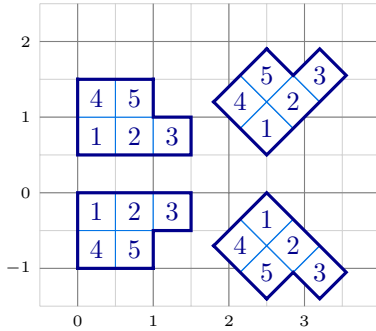

```

\begin{tikzpicture}[add grid]
  \Tableau(0,0) [english] {123,45}
  \Tableau(0,0.5) [french] {123,45}
  \Tableau(2.5,0.5) [ukrainian] {123,45}
  \Tableau(2.5,0) [australian] {123,45}
\end{tikzpicture}

```

3A.3. Tableau keys. The optional `*-styles` and `[...]-styles` are the main mechanism for styling the individual boxes in a tableau. Using a key-value syntax, you can change aspects of the tableau produced by the `\Tableau` command. The rest of this section describes these keys, their default values, and gives examples of how to use them.

The options below can be applied to the `\Tableau` command by giving them as a comma-separated list inside square brackets:


`\Tableau [options] {tableau entries}` or `\Tableau (x,y) [options] {tableau entries}`.

The options can appear in any order, with later options having precedence over earlier ones.

When used inside a `\Tableau` command, the options only affect that particular tableau. Most of these options, or keys, can also be used in the `\aTabset` command, or as optional arguments in `\usepackage[...]{atableau}`, to change the default settings of all tableaux in the same L^AT_EX group. For example, if you put the command `\aTabset[ukrainian]` in the preamble of your document then, by default, all subsequent tableaux and Young diagrams will be drawn using the Ukrainian convention.


`english` (default: `english`)
`french`
`ukrainian`
`australian`

These four (mutually exclusive) options change the convention, or orientation, that is used when drawing the tableaux. Rather than defining these conventions precisely, we use the tired and true method in combinatorics of defining by example.



```
\Tableau[ukrainian, styles={R={fill=red!20,draw=red}}]
{12[R]3,45}
```

3A.9




```
\tikzset{R/.style={fill=red!20, circle, draw=red, ultra thick}}
\Tableau[french]{12[R]3,45}
```

3A.10



```
\tikzset{B/.style={fill=blue!20, dashed, thick}}
\Tableau[english]{12[B]3,45}
```

3A.11



```
\Tableau[australian, styles={B={fill=blue!20, text=white}}]
{12[B]3,45}
```

3A.12


Changing the convention sets the [box height](#) and [box width](#), relative to the current [scale](#). If you want to use a custom box height and box width, then you need to set them *after* specifying the convention.

By default, the [english](#) convention is used to draw tableaux and Young diagrams. The default convention can be changed using `\aTabset`. Capitalised names, [Australian](#), [English](#), [French](#) and [Ukrainian](#), are also recognised. If, for example, your document is only going to draw [french](#) tableaux and diagrams, then you can specify this when you load the package using `\usepackage[french]{atableau}`, or by adding `\aTabset{french}` to your document preamble.

[align](#) (default: [centre](#))

[accepts: [centre](#)/[bottom](#)/[top](#)]


By default, the baseline of a tableau is its centre. This can be changed using the [align](#) key.



```
% the default
```


```
Some \Tableau[align=centre]{124,357,68} words
```

3A.13



```
Some \Tableau[align=top]{124,357,68} words
```


3A.14



```
Some \Tableau[align=bottom]{124,357,68} words
```


3A.15

Similarly, use [align](#) to control how tableaux are aligned in displayed equations.




```
\aTabset{align=bottom}
\Tableau{124,357,68}
\Tableau{124,35}
```

3A.16



```
% by default: align=centre
\Tableau{124,357,68}
\Tableau{124,35}
```

3A.17



```
\aTabset{align=top}
\Tableau{124,357,68}
\Tableau{124,35}
```

3A.18

aTableau

`border` (default: `true`)
`no border` (default: `false`)

[accepts: true/false]
[accepts: false/true]

The `border` and `no border` keys enable and disable The `no border` key is inverse to `border`, so `no border` is equivalent to `no border=true` the drawing of the (thick) border wall around a tableau.

		4		
	7		5	
6		5		3
	4		2	
		1		

6	7	4
4	5	5
1	2	3

```
\Tableau[ukrainian, border=false]{123,455,674}
\Tableau[french, no border]{123,455,674}
```

3A.19

`border colour` (default:)
`border style` (default: `thick`, `line cap=rect`)

[accepts: any colour]
[accepts: `TikZ`-styling]

The `border colour` option sets the colour of the border wall, whereas `border style` sets the `TikZ`-styling of the border wall. (So, `border style` can override `border colour`.)

		4		
	7		5	
6		5		3
	4		2	
		1		

4	5	5
1	2	3

```
\Tableau[ukrainian, border colour=red]{123,455,674}
\Tableau[french, border style={dashed,orange}]{123,455}
```

3A.20

The `border style` key *appends* any `TikZ`-styles to the current styling of the wall.

`box fill` (default: `none`)

[accepts: any colour]

The `box fill` option sets the background colour of a box in a tableau, just like the `fill` key for a `TikZ`-node. If you use a dark fill colour, then you will almost certainly want to change the text colour using the `text` option – and you may also want to change the colours of the border walls and inner walls using `border colour` and `inner colour`, respectively.

1	2	3
4	5	5
6	7	4

1	2	3
4	5	5

```
\Tableau[box fill=blue, box text=yellow]{123,455,674}
\Tableau[box fill=red!10]{123,455}
```

3A.21

`box font`

[accepts:]

The `box font` key sets the font used to type the entries of a tableau. By default, tableau entries are typeset as mathematics, so this is mainly useful for changing the font size (because, for example `\bfseries $1$` does not make the 1 bold). It is only when you are using `text entries` that font commands like `\itshape` and `\bfseries` will have any effect.

1	2	3
4	5	5
6	7	4

1	2	3
4	5	5

```
\Tableau[box font=\tiny]{123,455,674}
\Tableau[text entries, box font=\bfseries]{123,455}
```

3A.22

`box height` (default: `0.5`)
`box width` (default: `0.5`)

[accepts: a decimal giving the height in cm]
[accepts: a decimal giving the width in cm]

Sets the width and height of the boxes in the tableau. The default height and width of the boxes is 0.5 cm when using the `english` and `french` conventions and 0.7012 cm, which is approximately $1/\sqrt{2}$ cm, when using the `ukrainian` and `australian` conventions. (In all cases, the default side length of the boxes is 0.5 cm.)

aTableau

1	2	3
4	5	5
6	7	4

	5	
4	5	3
	2	
	1	

```
\aTabset{align=top}
\Tableau[box height=0.8]{123,455,674}
\Tableau[box width=0.2, ukrainian]{123,455}
```

3A.23

The `box height` and `box width` keys need to be set *after* changing the tableau convention using `australian`, `english`, `french`, or `ukrainian` because the conventions change the height and width of the tableau boxes (and later conventions override earlier ones). In particular, in the last example, `box width=0.2` has no effect because of the following `ukrainian` setting.

1	2	3
4	5	5
6	7	4

	5	
4	5	3
	2	
	1	

```
\aTabset{align=top}
\Tableau[box height=0.3]{123,455,674}
\Tableau[ukrainian, box width=0.2]{123,455}
```

3A.24

See also the `scale`, `xscale` and `yscale` options.

`box text` (default:)

[accepts: any colour]

As for a `TikZ`-nodes, use `box text` to set the default text colour for the entries of the tableau boxes.

1	2	3
4	5	

4	5	
1	2	3

```
\Tableau[box text=red]{123,45}
\Tableau[box text=blue, french]{123,45}
```

3A.25

`conjugate` (default: `false`)

[accepts: false/true]

Draws the *conjugate* tableau, where the rows and columns are swapped.

1	2	3
4	5	
6	7	

1	4	6
2	5	7
3		

```
\Tableau{123,45,67}
\Tableau[conjugate]{123,45,67}
```

3A.26

`halign` (default: `centre`)

[accepts: centre, left, right]

`valign` (default: `centre`)

[accepts: bottom, centre, top]

By default, the entries in tableaux are centered, both horizontally and vertically, and it is your responsibility to ensure that the entries fit inside the tableau boxes (you can change the box dimensions using the `box height`, `box width` and `scale` keys). The `halign` and `valign` keys provide a crude way to change the horizontal and vertical alignment of the box entries.

1	11	11
1	1	

1	11	11
11	1	

1	1	1
1	1	

```
\Tableau[halign=left]{1{11}{11},{11}1}
\Tableau[halign=centre]{1{11}{11},{11}1}
\Tableau[halign=right]{1{11}{11},{11}1}
```

3A.27

q	f	
g	p	t
j	b	

q	f	
g	p	t
j	b	

q	f	
g	p	t
j	b	

```
\Tableau[valign=bottom]{qf,gpt,jb}
\Tableau[valign=centre]{qf,gpt,jb}
\Tableau[valign=top]{qf,gpt,jb}
```

3A.28

These keys are provided for completeness only. We recommend not using them!


`inner colour` (default:)

[accepts: any colour]

`inner style` (default: `thin`, `line cap=rect`)

[accepts: `TikZ`-styling]

The `inner colour` option sets the colour of the inner wall, whereas `inner style` sets the `TikZ`-styling of the inner wall. (In particular, `inner style` can be used to override `inner colour`.)



```
\Tableau[australian, inner colour=red]{123,455,674}
\Tableau[inner style=dashed]{123,455}
```

3A.29


If you closely at the second tableau in [Example 3A.29](#), you will notice that the dashes are not very clean. This is because, for example, the dashes on bottom of one box do not properly match up with the dashes on the top of the adjacent box below it. Rather than using `inner style=dashed` it is better to use something like `inner style={dash pattern on 1pt off 2pt}`.



```
\Tableau[inner style={dash pattern=on 1pt off 2pt}]
{123,455}
```

3A.30

Use `inner colour=none`, to remove the inner tableau walls.



```
\Tableau[ukrainian, inner colour=none]{123,45,67}
```

3A.31


`label`

[accepts: any character/text]

`label style` (default: `font=\scriptsize, text=` XXXXXXXXXX `)`

[accepts: `TikZ` commands]

The `label` key adds a label to a tableau next to the (1,1)-box. The style of the label can be changed using the `label style` key.



```
\Tableau[ukrainian, label={\mathtt{t}}]{13,25,4}
\Tableau[french, label=0, label style={red}]{13,5}
\Tableau[label style={draw=orange,circle, inner sep=0pt},
label=1]{12,35,5}
```

3A.32


`math entries` (default: `true`)

[accepts: true/false]

`text entries` (default: `false`)

[accepts: true/false]

Use the `math entries` and `text entries` to have the tableau entries typeset as either mathematics or text, respectively. By default, the entries of a tableau are typeset as mathematics.



```
\Tableau[math entries]{ABCD, efg, HI}
\Tableau[text entries]{ABCD, efg, HI}
```

% the default

3A.33

`name` (default: `A`)

[accepts: string]

By default, the boxes can be referenced using the node names (A-1-1), (A-1-2), (A-1-3), ..., with (A-*r*-*c*) referring to the box in row *r* and column *c*. Use the `name` key to change the *prefix* A to anything else that you like. This feature is most useful when you have several tableaux inside a `tikzpicture` environment because by using `name` you can refer to boxes in the different diagrams. If you only have one tableau, then you would not normally need to change the default prefix for the node names. See (1.1) for a description of the anchor names. For examples using node names and anchors see [Example 1.5](#), [Example 3A.57](#) and [Example 5.5](#).


paths

[accepts: list of path ribbon specifications]

path style (default: -)[accepts: **TikZ**-styling commands]

Use the **paths** key to add a comma-separated list of *ribbon paths* to the tableau. This allows you to draw certain types of paths inside your tableaux and diagrams.


Ribbon paths are specified using the **\RibbonTableau** syntax, where you first specify the row and column indices of the *head* of the ribbon, which is the unique node of maximal content in the ribbon, and then give a sequence of *r*'s and *c*'s depending on whether the row index increases, or the column index decreases, respectively. As always, you have the option of adding style — and you can also specify the contents of each box in the ribbon. For more details about the ribbon specifications, with examples, see [Section 3F](#), which describes the **\RibbonTableau** command.



```
\Tableau[styles={R={red,thick}, C={cyan,thick}},
paths={({R}14ccrc, (C)23rcc)]{1234,567,89{10}}
```

3A.34

The **path style** key changes the default style of the path:



```
\Tableau[styles={R={red,thick}, C={cyan,thick}},
paths={({R}14ccrc, (C)23rcc},
path style={rounded corners}] {1234,567,89{10}}
```


3A.35

path box (default: -)

[accepts: A node entry]

path box style (default: -)[accepts: **TikZ**-styling commands]


The **path box** sets the default entry for every box on a path. The **path box** is only used if you have not specified a box entry as a subscript in the path/ribbon specification. This key is useful if you want to mark all of the boxes in every path with the same symbol.



```
\tikzset{R/.style={red,thick}, C/.style={cyan,thick}}
\Tableau[paths={({R}14ccrc, (C)23rcc},
path box=\bullet
]{1234,567,89{10}}
```

3A.36


Use the **path box style** to change the style of the boxes in the path.



```
\Tableau[styles={R={red,thick}, C={cyan,thick}},
paths={({R}14ccrc, (C)23rcc},
path box style={draw,circle, minimum size=4mm}
]{1234,567,89{10}}
```

3A.37


By combining **path box style** and **path style**, you can “decorate” the boxes on a path.



```
\Tableau[styles={R={red,thick}, C={cyan,thick}},
paths={({R}14ccrc, (C)23rcc},
path box style={draw,circle, minimum size=4mm},
path style={draw=none},
]{1234,567,89{10}}
```

3A.38

Another way to do this is to change the style of the individual paths. In this way you have more control because different paths can be given different styling.



```
\Tableau[styles={R={draw=none,text=red,thick},
                  C={cyan,thick}},
          paths={({R}14ccrc,{C}23rcc),
          path box style={draw,circle, minimum size=4mm},
          ]{1234,567,89{10}}
```

3A.39

ribbons**ribbon style** (default: `draw=` , `thin`)**ribbon box** (default: `-`)**ribbon box style** (default: `-`)

[accepts: list of ribbon specifications]

[accepts: **TikZ**-styling commands]


[accepts: A node entry]

[accepts: **TikZ**-styling commands]

Use the **ribbons** key to add a comma-separated list of *ribbons* to a tableau. The ribbon specifications are identical to those used for **paths**. For more details see [Section 3F](#), which describes the `\RibbonTableau` command.

The **ribbons** key works in almost exactly the same way as the **paths** key, with the difference being that we are adding ribbons to the tableau rather than lines. The **ribbon style** key controls the default ribbon style. The **ribbon box** and **ribbon box style** keys work in the same way as **path box** and **path box style**, respectively.


TikZ-styling can be added to ribbons using **ribbon style** and **ribbon box style**. The **ribbon style** changes the default style of the entire ribbon, whereas **ribbon box style** changes the default style of the individual boxes in the ribbon.



```
\Tableau[ribbon style={fill=blue!20,opacity=0.4},
          ribbons={22rc}]{123,45,67}
```

3A.40

Use the **ribbon box style** key to change the default style of the boxes in a ribbon. For example, noting that a box is a ribbon of length 1, the following code uses ribbons of length one (that is, nodes), to highlight the addable nodes of this tableau.



```
\Tableau[star style={fill=green!80!blue,text=white},
          ribbon style={fill=yellow,text=red},
          ribbons={15_A,24_B,42_C,51_D},
          ]{123*4,567,89*{10},*{11}}
```

3A.41

As this example indicates, ribbons are assumed to be contained inside the diagram of the tableau, so they do not change the border of a tableau.

snobs**snob style** (default: `draw=` , `thin`)**snob box** (default: `-`)**snob box style** (default: `-`)


[accepts: list of ribbon specifications]

[accepts: **TikZ**-styling commands]

[accepts: A node entry]

[accepts: **TikZ**-styling commands]

Use **snobs** to add ribbons to the tableau, which are ribbons that are placed *after* the border of the diagram is drawn. (Writing *ribbons* backwards gives *snobbir*.) The **snob style** key controls the default style of snobs.



```
\Tableau[star style={fill=green!80!blue, text=white},
          snob style={fill=yellow, text=red},
          snobs={15_A,24_B,42_C,51_D},
          ]{123*4,567,89*{10},*{11}}
```

3A.42

The difference between this pictures and the one given above using **ribbons** is that in the **snobs** are drawn over the top of the tableau border, causing the border to disappear for these nodes. For this reason, in most cases you should normally avoid **snobs** and use **ribbons**. This said, **snobs** are exactly what are needed in [Example 3G.30](#).

aTableau

The `snob box` and `snob box style` keys work in the same way as the `path box` and `ribbon box`, and `path box style` and `ribbon box style`, keys.

`scale` (default: 1) [accepts: a decimal number]
`xscale` (default: 1) [accepts: a decimal number]
`yscale` (default: 1) [accepts: a decimal number]

By design, boxes in tableaux do not automatically resize to fit their contents. For example, consider:

1	3	10	11	$1+x$
2	$1+x$			

```
\Tableau{ 13{10}{11}{1+x}, 2{1+x} }
```

3A.43

This is unlikely to be the desired output! The options `scale`, `xscale` and `yscale` can be used to rescale the boxes in tableaux and diagrams. The names are slightly misleading because `xscale` rescales in the direction of increasing column index and `yscale` rescales in the direction of increasing row index.

1	3	10	11	$1+x$
2	$1+x$			

```
\Tableau[scale=2]{ 13{10}{11}{1+x}, 2{1+x} }
```

3A.44

1	3	10	11	$1+x$
2	$1+x$			

```
\Tableau[xscale=2]{ 13{10}{11}{1+x}, 2{1+x} }
```

3A.45

When using the `australian` and `ukrainian` conventions, `xscale` and `yscale` scale in both the x direction and the y -direction, reflecting how these tableaux grow with increasing column and row index, respectively.

				$1+x$
	$1+x$		10	11
2		3		
	1			

```
\Tableau[ukrainian, xscale=2]{ 13{10}{11}{1+x}, 2{1+x} }
```

3A.46

1				
2		3		
$1+x$		10		
		11		
			$1+x$	

```
\Tableau[australian, yscale=2]{ 13{10}{11}{1+x}, 2{1+x} }
```

3A.47



The options, `scale`, `xscale`, and `yscale`, affect all `aTableau` diagrams, including tableaux, Young diagrams and abacuses. If you want to use `\aTabset` to change the default sizes of the diagrams and tableaux in your document, then it is probably better to use the `box height` and `box width` options.

`shifted` (default: `false`) [accepts: true/false]

Set to `true` for a shifted tableau or shifted diagram. Shifted tableaux, and shifted diagrams, are discussed in more detail in [Section 3D](#), which describes the `\ShiftedDiagram` and `\ShiftedTableau` commands.

1	2	3
	4	5


```
\Tableau[shifted]{123,45}  
\Diagram[shifted]{3,2^2}
```


3A.48

See [Section 3D](#) for the options specific to shifted tableaux and shifted diagrams.

`skew` (default: `(0)`)

[accepts: a partition]

Specify the skew shape for a skew tableau or skew diagram. Skew tableaux, and skew diagrams, are discussed in more detail in [Section 3C](#), which describes the `\SkewDiagram` and `\SkewTableau` commands.



```
\Tableau[skew={2}]{123,45}
\Diagram[skew={2^2,1}]{3,2^2}
```


3A.49

See [Section 3C](#) for the options specific to skew tableaux and skew diagrams.

`star style` (default: `fill=` )

[accepts: [TikZ](#)-styling]

Use the `star style` to add to the style of the starred entries of a tableau. (In [TikZ](#) parlance, `star style` *appends* these styles to the default `star style`.)



```
\Tableau[star style={text=magenta, draw=cyan, thick}]
{1*2*3,4*5}
\Tableau[star style={fill=orange!50}]{1*2*3,4*5}
```


3A.50

Note that the tableau border is drawn *after* the `star style` is applied. You can use `snobs` to draw on top of the border.

`styles` (default: `-`)

[accepts: List of [TikZ](#) style specifications]

The `styles` key is a shorthand for defining [TikZ](#)-styles that are only used in the current picture. For example, instead of writing



```
\tikzset{
  B/.style={fill=blue!40, text=yellow},
  G/.style={fill=green!80!blue, circle, minimum size=5mm},
  R/.style={fill=red, text=white, font=\tiny},
  Y/.style={fill=yellow!20, text=blue}
}
\Tableau[french]{[R]1[B]2, [G]3, [Y]4}
```

3A.51

you can save some typing using the `styles` key:



```
\Tableau[french, styles={
  B={fill=blue!40, text=yellow},
  G={fill=green!80!blue, circle, minimum size=5mm},
  R={fill=red, text=white, font=\tiny},
  Y={fill=yellow!20, text=blue},
}]{[R]1[B]2, [G]3, [Y]4}
```

3A.52

Styles defined this way will only be available in the current picture. Use `\tikzset` whenever you are defining styles that are likely to be used more than once.

`tabloid` (default: `false`)

[accepts: true/false]

Use the `tabloid` key to draw a tabloid. This key is discussed in more detail in [Section 3E](#), which describes the `\Tabloid` command.

1	2	3
4	5	


```
\Tableau[tabloid]{123,45}
\Diagram[tabloid]{3,2^2}
```

3A.53

See [Section 3E](#) for the options specific to tabloids.

`tikz before`
`tikz after`

[accepts: [TikZ](#) commands][accepts: [TikZ](#) commands]

These keys inject [TikZ](#) code into the underlying `tikzpicture` environment, where the tableau is constructed, before and after the `\Tableau` command, respectively.

	1	3	4	
	5	6	7	
	8	9		

```
\Tableau[
tikz before={\draw[help lines, step=0.5](-0.5,-2)grid(2,0.5);},
tikz after={\draw[ultra thick, red]
(A-1-3.north east)--(A-1-3.south east)
--(A-2-1.north east)--(A-3-1.south east)
--(A-3-1.south west);
}}{134,567,89}
```

3A.54

Both before and after hooks are provided because the order in which you place [TikZ](#) commands affects the final picture because later commands are drawn over the top of earlier ones. Note that the *before* code cannot use the named nodes `A-r-c` because this code is executed before these nodes are constructed, which happens when the tableau is drawn. For more examples, see [Subsection 3A.5](#).

`tikzpicture`

[accepts: [TikZ](#)-keys]

This command adds an optional argument to the underlying `tikzpicture` environment, which contains the tableau. The `tikzpicture` option is ignored when the `\Tableau` command is equipped with (x,y) -coordinates.

As a first example, we use `tikzpicture={rotate=30}` to rotate a tableau by 90 degrees:

3	
2	5
1	4

3	
2	5
1	4

```
\Tableau[tikzpicture={rotate=90}]{123,45}
\begin{tikzpicture}[rotate=90]
\Tableau(0,0){123,45}
\end{tikzpicture}
```

3A.55


The two tableaux constructions in this example are equivalent. An oddity with both of these examples is that the numbers in the tableaux have not been rotated, which is because the [TikZ](#) *rotate* key does not affect component objects, such as nodes, inside a [TikZ](#) picture. You can rotate the entire picture using the [TikZ](#)-key *transform canvas*

3	
2	5
1	4

```
\Tableau[tikzpicture={transform canvas={rotate=90}}]{123,45}
```

3A.56

A more interesting example is that by using `tikzpicture=remember picture` we can add annotations to a tableau. For example, consider:



```
\Tableau[ukrainian, name=A,
tikzpicture={remember picture}]
{ 1[fill=blue!20]23[text=red]45,
6*78[{draw=cyan,ultra thick}]9,
[{circle,fill=orange}]{10}*{11}{12},
[{dashed,draw=red,ultra thick}]{13}
}
```

3A.57


Since `name=A`, the nodes in this tableau are referenced as (A-1-1), (A-1-2), (A-1-3), As the example uses `remember picture`, other `tikzpicture` environments can reference the node names in last tableau, which allows us to do things like this:

This circle is too big!
Use minimum size=5mm

```
\tikz[remember picture, overlay]
\draw[very thick, ->, red]
(0,0) node[right,align=left]
{This circle is too big!\Use minimum size=5mm}
to [out=135, in=225](A-3-1);
```

3A.58

3A.4. *Compositions*. As we have defined them, tableaux are always of *partition* shape, in the sense that the lengths of the rows is a weakly decreasing sequence. In fact, the `\Tableau` command also accepts tableaux of *composition* shape, where the lengths of the rows are not necessarily in decreasing order:



```
\Tableau{ 45,2751,31 }
\SkewTableau{1,2}{ 45,27,31 }
```

3A.59

Even though it is possible to draw compositions, and tableaux of composition shape, compositions are not supported in the sense that many of the options/keys assume that the diagrams are of partition shape. In addition, some options assume that tableaux and diagrams do not contain empty rows, and that the diagrams are *connected*. (For disconnected tableaux and diagrams, see the `\Multidiagram` and `\Multitableau` commands in Section 3G.)

3A.5. *Drawing order*. When `TikZ` constructs a picture, later objects are drawn over the top of earlier ones, which can obscure earlier features. Consequently, for more complicated diagrams and tableaux it helps to know the order in which the different parts of these diagrams are drawn, which is the following:

- First, the tableau entries that use the default styling are placed, in the order that they appear in the *tableau specifications*.
- Secondly, the styled tableau entries are placed, in the order that they appear in the *tableau specifications*.
- Next, the nodes in any *ribbons* and ribbon *paths* are placed, again in the order that the ribbons are listed. For each ribbon, first the border of the ribbon is drawn, together with any styling for the ribbon, and then the boxes in the ribbon, together with any styling, are added.
- When enabled by `skew border`, the skew border is drawn, after which the border of the tableau is drawn.
- The `dotted rows` and `dotted cols` keys are applied to replace the specified rows and columns with dots.
- Finally, any *snobs* are drawn, in the order that they are listed.

All of the tableau and Young diagram commands use this drawing order.

3A.6. *Special characters.* The characters `[]`, `,`, and `*` have special meanings in the *tableau specifications*. Enclose these characters in braces when you want to use these characters as entries in a tableau:


1	3	,	5	]
8	[			
*				

```
\Tableau{ 13{,}5], 8{[}, {{*}} }
```

3A.60

There is no need to enclose `]` in braces because it only becomes special when it is preceded by a matching `[` character.

3B. **Young diagrams.** A *Young diagram*, or simply a *diagram*, is an unlabelled tableau. Diagrams can be drawn using the `\Tableau` command:




```
\Tableau{~~~,~~~,~~,~}
```

3B.1

This approach works, but it is cumbersome, hard to proofread, and easy to miscount. For this reason, `aTableau` provides the `\Diagram` command. The `\Diagram` command uses almost the same syntax as the `\Tableau` command:

```
\Diagram (x,y) [options] {partition}
```

As with the `\Tableau` command, the (x, y) -coordinates are needed if, and only if, the diagram is inside a `tikzpicture` environment. The `\Diagram` command allows the *partition* to be specified as either a comma-separated list of *weakly decreasing positive integers*, or by using *exponential notation*:

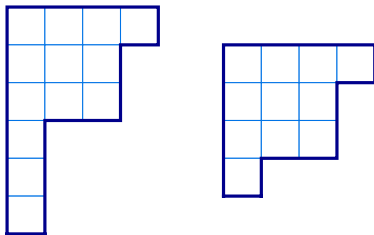


```
\Diagram{4,3^2,1^3}
\Diagram{4,3,3,1}
```

3B.2

Internally, `\Diagram` actually does something like the first example in this section, so all of the options for the `\Tableau` command can be used with `\Diagram`. Rather than repeating all of the `\Tableau` options in this section, we highlight the more interesting options together with some new, diagram specific, options.


Just like the `\Tableau` command, `\Diagram` supports the four different conventions for diagrams, with `english` being the default:

english
french
ukrainian
australian (default: english)



```
\Diagram[australian]{3,2,1}
\Diagram[australian]{3,1^3}
```


3B.3



```
% English is the default convention
\Diagram[english]{3,2,1}
\Diagram{3,1^3}
```


3B.4

aTableau



```
\Diagram[french]{3,2,1}
\Diagram[french]{3,1^3}
```

3B.5




```
\Diagram[ukrainian]{3,2,1}
\Diagram[ukrainian]{3,1^3}
```

3B.6

`border` (default: `true`)
`no border` (default: `false`)

[accepts: true/false]
 [accepts: false/true]

If `border` is true, which it is by default, then the border of the tableau is drawn. If `border` is false, then the border of the tableau is not drawn. Notice that the border refers only to the outside border of the diagram, and not to the internal borders of the boxes on the diagram, which can be disabled using `no boxes`.



```
\Diagram[border=false]{3,2,1}
\Diagram[no border, french]{3^2,1}
```


3B.7

The `no border` option, and similar options, are provided only for completeness because it is the inverse of `border`. That is, `no border` is equivalent to `border=false`, and `no border=false` is equivalent to `border=true`.

`boxes` (default: `true`)
`no boxes` (default: `false`)

[accepts: true/false]
 [accepts: false/true]

The `boxes` and `no boxes` keys control whether or not the internal wall around the boxes are drawn, with these two keys being inverses of each other. By default, `boxes` is true, so the internal boxes are drawn. When `no boxes` is in force, the internal walls around boxes are not drawn.




```
\Diagram[no boxes]{3,2,1}
\Tableau[french, no boxes, no border]{123,45}
```

3B.8

`conjugate` (default: `false`)

[accepts: false/true]

Draws the conjugate diagram, which has the rows and columns interchanged.



```
\Diagram[conjugate]{3,2,2}
\Diagram[ukrainian, conjugate]{2,1^3}
```



3B.9

`dotted cols`
`dotted rows`

[accepts: comma separated list of columns]
 [accepts: comma separated list of rows]

The `dotted rows` and `dotted cols` keys draw diagrams where the specified rows and columns are replaced with dots. This makes it possible to draw *generic* diagrams, where the number of rows and columns is not fully specified.


aTableau



```
\aTabset{scale=0.8}
\Diagram[dotted rows={2,4,5}]{4^2,2^2,1^3}
\Diagram[dotted cols={5,3,4},
no boxes]{6,5,4,3,2,1}
```

3B.10

As shown above, when row and columns indices are in increasing *consecutive* order, then the corresponding rows or columns are replaced as a block. Non-consecutive indices are treated separately.

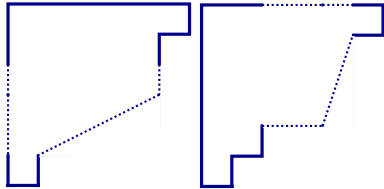


```
\aTabset{scale=0.8, no boxes}
\Diagram[dotted rows={4,5,3}]{6,5,5,5,2,1}
\Diagram[dotted cols={5,3,4}]{6,5,5,5,2,1}
```

3B.11

The `dotted rows` and `dotted cols` keys work by overwriting the content on the specified rows and columns, so anything that was drawn in these rows and columns will disappear. The `dotted rows` and `dotted cols` keys can be used with the `\Tableau` command, with the caveat that this will remove all boxes, with their contents, in the specified rows and columns.


When the `dotted rows` and `dotted cols` keys are used together, the `dotted rows` are applied first.



```
\Diagram[scale=0.8, no boxes,
dotted rows={4,5},
dotted cols={4,5},
]{6,5,5,5,2,1}
```

3B.12

When using these two keys together, you need to be careful when choosing which rows and columns are removed because, otherwise, artifacts can remain. Ideally, the endpoints of the rows and columns being removed should not overlap. For example, the circled horizontal dots below are a “user error”, not a bug, because these dots come from trying to use `dotted rows` to remove row three:



```
\Diagram[scale=0.8, no boxes,
dotted rows={4,5,3}, dotted cols={4,5,3},
tikz after = {\draw[red] (1,-1.6) circle(0.3);}
]{6,5,5,5,2,1}
```


3B.13

The `dotted rows` and `dotted cols` keys are not designed to be used with the `conjugate` key.

`ribbons`
`paths`
`snobs`

[accepts: ribbon specification]
[accepts: ribbon specification]
[accepts: ribbon specification]


Use `ribbons`, `paths` and `snobs` to add ribbons, ribbon paths and snobs to a diagram, respectively. The `snobs` are drawn after the border of the diagram.



```
\Diagram[french, ribbons={*22*c_4*r*r}]{3,2^2,1}
```

3B.14

As described in [Section 3E](#), each of these keys has associated keys to change the style of the ribbon, set a content of each box on the ribbon or path and a key to set the style of these boxes. More explicitly, the keys `path style`, `path box` and `math box style` are associated to `paths`.



```
\Diagram[ukrainian, inner style=dotted,
  styles={b={fill=blue!20,opacity=0.4},
    R={red,text=red,thick},
    B={blue,text=blue,thick},
  }, path style={thick},
  path box=\bullet,
  paths={(R)15rccrc[b]rc,(blue)43[b]rcc}
][5~2,3~3]
```

A description of the ribbon specifications, with examples, can be found in [Section 3F](#), which describes the `\RibbonTableau` command.


3B.1. *Diagrams with entries.* The `entries` option provides a shortcut for drawing some common tableaux of a specified shape.

entries

[accepts: contents, first, hooks, last, residues]


The possible choices are:

- **entries=first** print the *first standard* tableau of this shape, with respect to the Bruhat order. This is the tableau that has the numbers $1, 2, \dots, n$ entered in order from top left to right along down successive rows (with appropriate modifications for the non-English conventions).




```
\Diagram[entries=first]{3,2,2}
\Diagram[ukrainian, entries=first]{3^2,2}
```

- `entries=last` print the *last standard* tableau of this shape, with respect to the Bruhat order. This is the tableau that has the numbers $1, 2, \dots, n$ entered in order from top to bottom down successive columns (with appropriate modifications for the non-English conventions).



```
\Diagram[entries=last]{3,2,2}
\Diagram[australian, entries=last]{2^2,1}
```

- **entries=hooks** print the diagram where each box is labelled by the corresponding *hook length*. If λ is a partition and λ' is its conjugate partition then the hook length of the box in row i and column j is $\lambda_i - i + \lambda'_j - j + 1$.



```
\Diagram[entries=hooks]{3,2,2}
\Diagram[ukrainian, entries=hooks]{2^2,1}
```


- **entries=contents** where each box is labelled by its *content*, which is the row index minus the column index.



```
\Diagram[entries=contents]{3,2,1}
\Diagram[french, entries=contents]{2^2,1}
```

Inside a tableau, the default minus sign for a negative number looks too long, so `aTableau` uses `\shortminus` for negative contents. For example, it prints `\shortminus 1` instead of `-1`, which look like -1 and −1, respectively.


- `entries=residues` print the diagram where each box is labelled by its *residue*, which is the row index minus the column index modulo an integer $e \geq 2$, which must also be supplied.



```
\Diagram[entries=residues, e=2]{3,2,1}
\Diagram[french, entries=residues, e=3]{3,2,1}
```


3B.20

By default, residue sequences for affine type $A_e^{(1)}$, or the symmetric group and friends, are given. In addition, residues in affine types $C_e^{(1)}$, $A_{2e}^{(2)}$ and $D_e^{(2)}$, which can be accessed using `cartan=C`, `cartan=AA`, and `cartan=DD`, respectively.



```
% affine type C
\Diagram[french, entries=residues,
e=2, cartan=C] {8,4,2}
```

3B.21

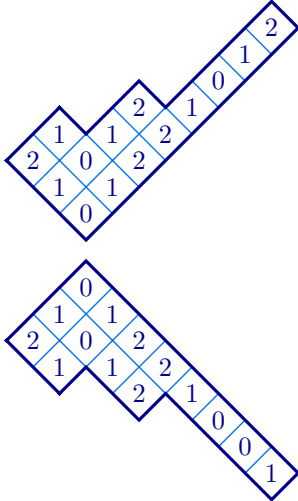

```
% twisted affine type A
\Diagram[ukrainian, entries=residues,
e=2, cartan=AA] {8,4,2}
```

3B.22

```
% twisted affine type D
\Diagram[australian, entries=residues,
e=2, cartan=DD] {8,4,2}
```

3B.23


3C. Skew tableaux and skew diagrams. A partition μ is *contained* in another partition λ , which is written as $\mu \subseteq \lambda$, if $\mu_k \leq \lambda_k$, for $k \geq 0$. If $\mu \subseteq \lambda$ then the *skew partition* $\lambda/\mu = \{(r, c) \in \lambda \mid (r, c) \notin \mu\}$ is the set of nodes that are in λ and not in μ . In this manual, μ is the *inner shape* and λ/μ is the outer shape. A *skew tableau* is a labelling of the nodes in the diagram of a skew partition. Skew partitions and skew tableau can be drawn using the commands:

```
\SkewDiagram (x,y) [options] {inner shape} {outer shape}
\SkewTableau (x,y) [options] {inner shape} {skew tableau specifications}
```

As with the previous commands, the (x, y) -coordinates should be given if, and only if, the picture is inside a `tikzpicture` environment. The inner and outer shapes can either be given as a comma-separated list of non-negative integers, or in exponential notation.

Skew tableau and skew diagrams should always be connected. Use `\Multidiagram` and `\Multitableau` to draw disconnected diagrams.


In fact, the `\SkewTableau` is just an alias for the `\Tableau`, using the `skew` key to set the inner shape. For this reason, all of the options for the `\Tableau` command can be used with `\SkewTableau`. The entries in a `\SkewTableau` are specified in exactly the same way as in the `\Tableau` command. In particular, the entries of skew tableaux can, optionally, be given style prefixes, both using a `*` to add the current *star style*, or arbitrary *TikZ*-styling using `[...]`.



```
\tikzset{R/.style={fill=red!20,text=red}}
\SkewTableau[french]{1^2}{13,5*7,[R]79}
\Tableau[french, skew={1^2}]{13,5*7,[R]79}
```

3C.1

Similarly, the `\SkewDiagram` command is an alias for the `\Diagram` command, with a `skew` key.



```
\SkewDiagram[french]{1^2}{2^3}
\Diagram[french, skew={1^2}]{2^3}
```


3C.2

As the `\SkewTableau` and `\SkewTableaua` commands are shortcuts, all of the options for the `\Tableau` and `\Diagram` commands can be used with the `\SkewTableau` and `\SkewDiagram` commands, respectively. In addition, the following options are supported:

`skew border` (default: `false`)
`no skew border` (default: `true`)

[accepts: `true/false`]
 [accepts: `false/true`]

These two keys are inverse to each other. When `skew border` is `true`, the border of the (inner) skew shape is drawn.



```
\tikzset{R/.style={fill=red!20,circle}}
\SkewTableau[skew border]{2,1^2}{12[R]3,45,67}
\SkewTableau[french, skew border]{2,1^2}{12[R]3,45,67}
```


3C.3

Note that `skew border` only draws the border of the skew shape and not the boxes inside the inner skew shape. Use `skew boxes` to draw the interior walls of the boxes in the skew shape.

`skew border style` (default: `draw=` , `fill=` , `thick`)

[accepts: `TikZ`-styling]

Use `skew border style` to change the style of the skew border. Since the skew border is only drawn when `skew border` is set, the `skew border style` does not have any effect unless `skew border` has been set to `true`.




```
\SkewTableau[skew border style={draw=yellow},
skew border]{2,1^2}{123,45,67}
\SkewDiagram[skew border style={dashed,fill=red!10},
skew border]{1^2}{2^3}
```

3C.4

`skew boxes` (default: `false`)
`skew box style` (default: `thin`, `fill=`)

[accepts: `true/false`]
 [accepts: `TikZ`-styling]


The `skew boxes` key draws the inner walls in the inside the inner partition of a skew shape. Use `skew box style` to change the default shading of these boxes.

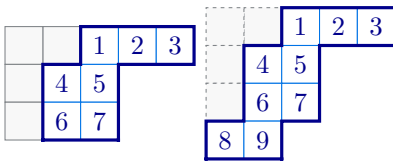

```
\SkewTableau[skew boxes]{2,1^2}{123,45,67}
\SkewTableau[skew boxes,
skew box style={dash pattern=on 1pt off 2pt}
]{2,1^2}{123,45,67,89}
```

3C.5

Using the options `skew border` and the `skew boxes` together gives the skew (inner) shape both inner and outer borders.





```
\SkewTableau[skew border, skew boxes]{2^2,1}{123,45,67}
```

3C.6

3D. Shifted tableaux and shifted diagrams. *Strict partitions*, which have strictly increasing parts, and *shifted tableaux*, which are of strict partition shape, appear in several places in representation theory, such as in the study of projective representations of the symmetric groups. These tableaux and diagrams are drawn with row r shifted by $(r-1)$ -units along the row, so that the first box in each row has content 0. These diagrams and tableaux can be drawn using the following commands:

`\ShiftedDiagram (x,y) [options] {partition }`
`\ShiftedTableau (x,y) [options] {tableau specification}`

As usual, the (x,y) -coordinates are necessary if, and only if, these commands are used inside a `tikzpicture` environment. The partition in a `\ShiftedDiagram` can be given using exponential notation and the tableau specification for a `\ShiftedTableau` can include the usual optional style prefixes.



```
\tikzset{R/.style={fill=red!20,circle}}
\ShiftedTableau{12[R]3,45,*6}
\ShiftedDiagram[french]{3,2,1}
```

3D.1

In the literature, shifted tableaux and shifted diagrams almost always have strict partition shape, however, this is not enforced by these commands. Under the hood, the `\ShiftedTableau` is the `\Tableau` command with the `shifted` option set to true. Similarly, `\ShiftedDiagram` is the same as using the `\Diagram` command with the `shifted` option. Consequently, all of the options for the `\Tableau` and `\Diagram` commands can be used with `\ShiftedTableau` and `\ShiftedDiagram`, respectively. In particular, options like `skew boxes` can be used to highlight the shifted part of the diagram








```
\ShiftedTableau[skew boxes]{1*23,4*5}
\ShiftedDiagram[skew border]{3,2}
```

3D.2

The `entries` key works as expected for shifted diagrams:

```
\ShiftedDiagram[entries=contents]{3,2,1} \equal
\ShiftedDiagram[entries=first]{4,2,1} \equal
\ShiftedDiagram[entries=hooks]{4,2,1} \equal
\ShiftedDiagram[entries=last]{4,2,1} \equal
\ShiftedDiagram[entries=residues, e=3]{4,2,1}
```

3D.3






The definition of hook lengths for shifted diagrams can be found, for example, in [7]!

3E. Tabloids. A *tabloid* is an equivalence class of tableau, where two tableaux are equivalent if they have the same entries in each row, up to a permutation. In the literature, tabloids are usually drawn with lines above and below each row, and without side borders. Tabloids can be drawn with the `\Tabloid` command.

`\Tabloid (x,y) [options] {partition }`



The `\Tabloid` command functions in the same way as the `\Tableau` command, except that it draws tabloids. In fact, the `\Tabloid` is a special case of the `\Tableau` command with the `tabloid` option set.



```
\tikzset{R/.style={fill=red!20,circle,minimum size=5mm}}
\Tabloid[ukrainian]{12[R]3,45}
\Tabloid[english]{12[R]3,45}
\Tabloid[french]{12[R]3,45}
```

3E.1


The `aTableau` package does not provide a dedicated command for tabloid diagrams, however, they can be drawn using the `\Diagram` command together with the `tabloid` option:



```
\Diagram[tabloid]{3^2,1}
\Diagram[tabloid, french]{3,1^2}
```

3E.2


Some authors work with *column tabloids*. Such tableaux do not have a dedicated `aTableau` command, however, they can be drawn using the `conjugate` option:



```
\Tabloid[conjugate]{123,4}
\Diagram[conjugate, tabloid]{3,1}
```

3E.3

Similarly, skew tabloids and shifted tabloids can be drawn using the `skew` option.

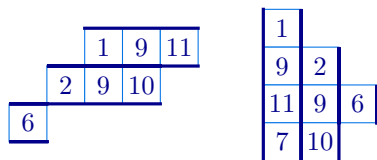

```
\Tabloid[skew={2,1}]{19{11},29{10},6}  
\Tabloid[conjugate, skew={0,1,2}]{19{11}7,29{10},6}
```

3E.4


3F. Ribbon tableaux. A *ribbon* in a tableau, or a diagram, is a connected strip of boxes R that are totally ordered by their contents. (Recall from [Subsection 3B.1](#) that the content of the box in row a and column b is $b - a$.) Therefore, a ribbon does not contain a $\boxplus$ -square, and if $(a, b) \in R$ then at most one of $(a + 1, b)$ and $(a, b - 1)$ belongs to R . The *head* of a ribbon R is the unique node of maximal content. A *ribbon tableau* is a tableau that is tiled by ribbons. A box is a ribbon of length 1, so every tableau is a ribbon tableau.

```
\RibbonTableau (x,y) [options] {ribbon specifications}
```

Like the other commands, the (x, y) -coordinates are optional and are required if, and only if, the diagram is being used as part of a `tikzpicture` environment. All options for the `\Tableau` command can be used for the ribbon command, so we refer to [Section 3A](#) for a description of the available options.

3F.1. *Ribbon specifications.* Unlike the `\Tableau` command, the entries of a ribbon tableau are given by ribbon specifications (rather than tableau) specifications. Ribbon specifications are also used by the three keys `ribbons`, `paths`, and `snobs`, which were introduced in [Subsection 3A.3](#).

To understand the ribbon specifications, observe that if (a, b) is the head of a ribbon, then we can walk along the ribbon by specifying whether the row index increases or the column index decreases. That is, a ribbon is uniquely determined by specifying its head (a, b) together with a sequence of r 's and c 's to indicate when the row index increases, or the column index decreases, respectively. For example, vertical and horizontal ribbons are given by a sequences of r 's and c 's, respectively:




```
\aTabset{align=top, no border}  
\RibbonTableau{11rrrrr}  
\RibbonTableau{16ccccc}
```

3F.1

The border of a ribbon tableau is the smallest (skew) partition that contains all of its ribbons. In the last example shows, the `no border` key is used to disable the ribbon tableau border so that we can better see the ribbon, which is the full diagram in these two cases.


The following diagram shows a see-sawing ribbon with head in row 1 and column 10, and tail in row 5 and column 1.

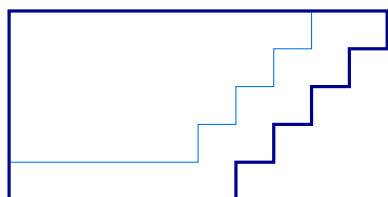

`\RibbonTableau{1{10}crrrrrrrrrrrr}`

3F.2


As with tableau entries, each box in a ribbon can be preceded with a style specification, either using `*` for the **star style** or using `[...]` for more customised style specifications.

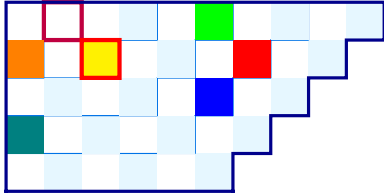

```
\RibbonTableau{
  *1{10}c*rc*rc*rc*cc*cc,
  *18c[fill=red]rc[fill=blue]rc*rc*cc[fill=teal]c,
  [fill=green]16c*rc*rc*cc,
  *14c[{draw=purple,ultra thick}]cc[fill=orange]r,
  [{fill=yellow,draw=red,ultra thick}]23
}
```

3F.3

In particular, the yellow box in this example highlights that boxes are ribbons of length 1. Most of the time, you want to style the entire ribbon rather than styling the individual boxes in the ribbon. Optionally, the style for the entire ribbon can be given inside parentheses (...) at the *start* of the ribbon. Unlike the other style specifications, the **-shorthand* for the *star style* cannot be applied to an entire ribbon.

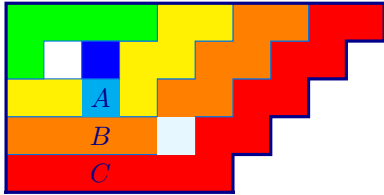


```
\RibbonTableau{
  (fill=red)1{10}crcrcrcrccc_Ccc,
  (fill=orange)18crcrc*rc_Bcc,
  (fill=yellow)16crcr[fill=cyan]c_Acc,
  (fill=green)14cccr,
  (fill=blue)23
}
```

3F.4

Any styles for a ribbon are applied to the region bounded by the closed path given by the border of the ribbon. The ribbon style is applied first, after which any styled boxes in ribbon are drawn. As this example shows, the optional style of any box in the ribbon takes precedence over the style of the full ribbon.


Finally, it is often necessary to label some of the boxes in the ribbon. Optionally, text can be added to the boxes in a ribbon by supplying it as a *subscript* to the corresponding entry in the ribbon specification:



```
\RibbonTableau[french] { 12_1 c_2 r_3 }
\RibbonTableau[ukrainian] { 12_a c_b r_c }
\RibbonTableau[australian]{ 12_{1_a} c_{2_b} r_{3_c} }
```

3F.5

Here we have put spaces between the entries for the different boxes in the ribbon for clarity. There are often many ways to draw the same ribbon tableau, especially if the entries have styling.




```
\tikzset{Fill/.style={fill=#1!20!white},
  B/.style={Fill=blue}, R/.style={Fill=red},
  Y/.style={Fill=yellow}}
\RibbonTableau{ [B]12_1 [R]c_2 [Y]r_3 }
\RibbonTableau{ [B]12_1, [R]11_2, [Y]21_3 }
\Tableau{ [B]2 [R]1, [Y]3 }
```

3F.6

As shown, the easiest way to draw this particular tableau is using the `\Tableau` command.


There is no dedicated syntax for putting a label on the boundary between two boxes in the diagram, but this can be done using the named anchors of (1.1).



```
\RibbonTableau[shifted, tikz after={
  \node at (A-1-2.east){$1$};
  \node at (A-2-2.east){$2$};
}]{ 14c, 12c, 23c }
```

3F.7

Here is an example of a 3-ribbon skew tableau.



```
\RibbonTableau[skew={2^2,1^2}, skew border]{
  14c_0r,15r_1c, 18c_7c,26r_9r,
  34c_2c,35r_8r,42r_3c, 44c_4r,
  54r_6c,62c_5r
}
```

3F.8

We have now seen the full ribbon specifications. To summarise:


- The ribbon specification starts with optional [TikZ](#)-styling for the ribbon, enclosed in (...).
- The first entry in the ribbon is given as **ab**, if the head of the ribbon is in row **a** and column **b**. The remaining entries in the ribbon are specified by a sequence of **r**'s and **c**'s, depending on whether the next box in the ribbon is given by increasing the row index, or decreasing the column index, respectively.
- Optionally, each box in the ribbon, including the head, can be given [TikZ](#)-styling by prefixing it with a *, which gives the ribbon [star style](#), or by giving [TikZ](#)-styling keys inside square brackets [...].

Finally, when drawing the border, ribbons in a `\RibbonTableau` are assumed to be contained in the smallest Young diagram that contains the ribbons. This said, it is up to you to ensure that the boxes in the ribbon do not have negative column indices. Inside a `\Diagram` or `\Tableau` command, any ribbons added using [paths](#), [ribbons](#), or [snobs](#) do not affect the border of the diagram or tableau, and it is your responsibility to ensure that the boxes in the ribbon are inside the diagram or tableau. This said, it is a useful feature to be able to place boxes outside of the diagrams.

[ribbons](#)
[paths](#)
[snobs](#)

[accepts: comma separated ribbon specifications]
[accepts: comma separated ribbon specifications]
[accepts: comma separated ribbon specifications]


You can add [ribbons](#), [paths](#) and [snobs](#) to a `\RibbonTableau` in exactly the same way that you add them to `\Tableau`. At first sight, it seems unnecessary to add [ribbons](#) and [snobs](#) because ribbon tableaux are composed of ribbons. The point is that any ribbon added to a tableau using [ribbons](#) or [snobs](#) is not assumed to be inside the border of the tableau.



```
\RibbonTableau[
  styles={A={fill=green!10, text=teal},
    R={fill=yellow!10, text=red}},
  ribbons={ [A]15_A, [A]24_A, [A]41_A, [R]14_R, [R]33_R }
] {11, (fill=blue!10)12rc, 14crrcc}
```

3F.9

Here is a cute use of [paths](#) to add arrows to a skew 2-ribbon tableau:



```
\RibbonTableau[skew={4,3,2,1},
  styles={L={red,semithick,->}, R={red,semithick,<-}},
  paths = { (L)15c, (L)17c, (L)24c, (L)26c,
    (R)32r, (R)41r, (R)52r, (R)61r, (R)34c},
  tikz after = { % node labels: row/col/label
    \foreach \r/\c/\l in {1/6/0,1/8/6,2/5/3,2/7/8}
      { \node at (A-\r-\c.west){\l};}
    \foreach \r/\c/\l in {5/1/1,4/2/2,3/3/5,7/1/4,6/2/7}
      { \node at (A-\r-\c.south){\l};}
  }
] { 16c,18c, 25c, 27c, 33r, 42r, 51r, 62r,71r }
```


3F.10

The arrows are added by the `paths` key using the two styles L and R, which draws “left” and “right” arrows between the two boxes, where left and right is with respect to the line-order of the two boxes in the corresponding draw command. The two `\foreach`-statements might look complicated, but they are just loops that add the entries of the tableau. These loops set `\r`, `\c` and `\l` equal to the row index, column index and label, respectively, using the two lists of `\r/\c/\l` triples given above.

`ribbon style` (default: `draw=`, `thin`)
`ribbon box style` (default: `-`)

TikZ-styling
TikZ-styling

Use the `ribbon style` and `ribbon box` options to append to the default styling of the ribbons and the boxes in the ribbons, respectively. By default, the full ribbons has an inner wall, but the boxes in ribbons have no styling. If you want inner walls, then they can be added using the `ribbon box` key.



```
\RibbonTableau[ribbon style={draw=red, thick,
fill=orange!20}]{16_1r_2c_3c_4c_5c_6r_7c_8}
\RibbonTableau[ribbon box style={fill=orange!20,
draw=magenta}]{16_1r_2c_3c_4c_5c_6r_7c_8}
```


3F.11

Ribbons are drawn by first drawing the full ribbon, applying `ribbon style`, then the empty boxes in the ribbon are drawn, and, finally, any boxes in the ribbon that have styling or an entry are added. In particular, if the style `ribbon box` draws an outline around a box then this has precedence over any outline added by `ribbon style` since `ribbon box` is applied last.

`ribbon box`

default box contents

You can add content to the boxes in a ribbon using subscripts in the ribbon specifications. Alternatively, you can use `ribbon box` if you want to add the same content to each box in the ribbon.



```
\RibbonTableau[ribbon box=\times]{14rcrcr}
\RibbonTableau[ribbon box=\bullet]{14_1rc_2cr_3c}
```

3F.12


As shown, whenever a box entry is given as a subscript it is used instead of the value of `ribbon box`. If a ribbon tableau contains multiple ribbons, then `ribbon box` is used for all ribbons.

Similarly, there are keys `path style`, `path box`, `path box style`, `snob style`, `snob box` and `snob box style` that work in the same way. Many of the `\Tableau` keys work as expected for ribbon tableaux.

3G. Multidiagrams and multitableaux. Multitableaux and multidiagrams are ℓ -tuples of tableaux and diagrams, respectively. These diagrams appear in many places in representation theory, such as when considering representations of wreath products or cyclotomic Hecke algebras. For convenience, `aTableau` provides the `\Multidiagram` and `\Multitableau` commands for drawing these diagrams, even though it is not difficult to construct such tableaux and diagrams using the `\Tableau` and `\Diagram` commands.

```
\Multidiagram (x,y) [options] {multipartition specifications}
\Multitableau (x,y) [options] {multitableau specifications}
```


Our preferred notation for a multipartition λ is to write $\lambda = (\lambda^{(1)}|\lambda^{(2)}|\dots|\lambda^{(\ell)})$, where $\ell \geq 1$ is the *level* and the partitions $\lambda^{(1)}, \dots, \lambda^{(\ell)}$ are the *components* of λ . Similarly, a multitableau is written as $t = (t^{(1)}|\dots|t^{(\ell)})$, where the tableaux $t^{(1)}, \dots, t^{(\ell)}$ are the *components* of t . Accordingly, in the `\Multidiagram` and `\Multitableau` commands, the pipe symbol `|` is used to separate components:



```
\aTabset{scale=0.7}
\Multidiagram{3,2^2|2,1,1|1}
\Multitableau[box font=\tiny]
{ 123,45,67|89,{10},{11}}|{12}{13}{14} }
```

3G.1


As shown, the `\Multidiagram` command accepts exponential notation for multipartitions. The entries in a `\Multitableau` can be given optional styling specifications, exactly as inside the `\Tableau` command.



```
\tikzset{R/.style={fill=red!10,text=magenta}}
\Multitableau{1*24,*68|[R]9{10},{11}}
```

3G.2


Multitableaux and multidigraphs can, in principle, have arbitrary level. In practice, the level is constrained by the page width.



```
\Multitableau[french]{1,2|3,4|5,6|7,8|9,{10}}
```

3G.3

Both the `\Multitableau` and `\Multidiagram` commands accept a special component, `...`, that is used to add dots between the separators:



```
\aTabset{scale=0.7}
\Multidiagram{3,2^2|...|1}
\Multitableau[box font=\tiny]
{123,45,67|...|{12}{13}{14}}
```

3G.4

The `\Multitableau` and `\Multidiagram` commands accept most of the options of the `\Tableau` and `\Diagram` commands, together with a few options that are specific to multitableaux and multidigraphs. This section describes the new options, and highlights how some of the other options are used.


english

french

ukrainian

australian (default: english)

All four tableaux conventions are supported for multitableaux and multidigraphs, with the caveat that all component diagrams use the same convention.



```
\aTabset{scale=0.7}
\Multidiagram[french]{3,2^2|...|1}
\Multitableau[ukrainian, box font=\tiny]
{123,45,67|...|{12}{13}{14}}
```

3G.5

conjugate

The `conjugate` option prints the conjugate multitableaux and multidigraphs. Conjugation for multitableaux and multidigraphs reverses the order of the components and then conjugates the component diagrams.



```
\aTabset{scale=0.6, box font=\scriptsize}
\Multitableau[conjugate]{ 123,45 | 67,89}
\Multidiagram[conjugate]{ 3,2 | 1^2 }
```

3G.6

delimiters (default: `()`)

[accepts: pair of L^AT_EX delimiters]

left delimiter (default: `()`)

[accepts: a L^AT_EX delimiter]

right delimiter (default: `)`)

[accepts: a L^AT_EX delimiter]


The delimiter options control the delimiters that are put on the left and right of multitableaux and multidiagrams. These options accept any L^AT_EX delimiter.



```
\aTabset{scale=0.7}
\Multidiagram[left delimiter=\langle,
right delimiter=|]{2,1|1}
\Multidiagram[delimiters={\|}{\|}]{{1^2|2}}
```

3G.7

To remove a delimiter, set **left delimiter** or **right delimiter** to nothing.




```
\Multitableau[left delimiter=, right delimiter=]
{123,45,67|{12}{14}}
```

3G.8

empty (default: `\textendash`)

[accepts: any L^AT_EX]

The **empty** option determines what is printed when a component diagram is empty. By default, the en-dash symbol – is used.

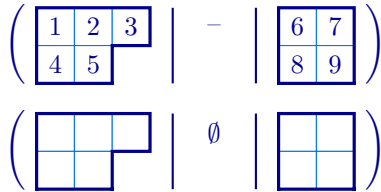

```
\Multitableau{ 123,45 | | 67,89}
\Multidiagram[empty=$\emptyset$]{ 3,2 | | 2^2 }
```

3G.9

entries

[accepts: contents, first, hooks, last, residues]


charge

[accepts: |-separated list of charges]

The **entries** key automatically fills in particular types of entries for you to draw the requested tableau of the specified shape. Use **charge** to provide offsets in each component when using **entries=contents** and **entries=residues** (and no charge should be set when using **entries=first** and **entries=last**).

The possible choices are:


- **entries=first** print the *first standard* tableau of this shape, which has the numbers $1, 2, \dots, n$ entered in order from top left to right along down successive rows (with appropriate modifications for the non-English conventions).



```
\Multidiagram[entries=first]{3,1^2|2^2,1}
```

3G.10


- **entries=last** print the *last standard* tableau of this shape, which has the numbers $1, 2, \dots, n$ entered in order from top to bottom down successive columns, and right to left along components (with appropriate modifications for the non-English conventions).



```
\Multidiagram[entries=last]{3,2,2|2^2}
```

3G.11


- **entries=hooks** print the diagram where each box in each component is labelled by the corresponding *hook length*.



```
\Multidiagram[entries=hooks]{3,1^2|3^3}
```

3G.12

- `entries=contents` print the diagram where each box is labelled by its *content*, which is the row index minus the column index.




```
\Multidiagram[entries=contents,
charge={0,2}] {3,2,1|2^2}
```

3G.13

As shown, the `charge` offsets the contents in each component.


- `entries=residues` print the diagram where each box is labelled by its *residue*, which is the row index minus the column index modulo some integer e , which must also be supplied.



```
\Multidiagram[entries=residues, e=2]{3,2,1|1^3}
```

3G.14

Specifying the `charge` offsets the residues in each component.



```
\Multidiagram[french, entries=residues, e=3,
charge={1,2}]{3,2,1|1^2}
```


3G.15

As in [Subsection 3B.1](#), residues for the other affine Cartan types can be specified using `cartan=??`.

label

[accepts: a |-separated list of labels]

Use the `label` key to add labels to the component diagrams.



```
\Multitableau[label={1|2}]{123,45,67|{12}{14}}
```


3G.16

No extra space is allowed for the labels, so use `xoffsets` and `yoffsets` to adjust for wide labels.

name (default: A)

[accepts: character]

The `name` option is used to change the default prefix for the box node names. In a tableau, or diagram, the box names depend on the *row* and *column* indices. In a multitableau, or multidiagram, the box names depend on the *component*, *row* and *column* indices. Explicitly, by default, in multitableaux and multidiagrams the names of the take the form A-k-r-c, where k is the component index, r is the row index, and c is the column index of the box. ⁵ The B can be changed like using the `name` key.



```
\Multitableau[name=A, tikz after = {
\draw[red, thick,<->](A-1-2-2.south east) to
[out=315,in=225] (A-2-2-1.south west);
}] { 123,4*5 | 67,*89}
```

3G.17

paths
ribbons
snobs


[accepts: a |-separated list of ribbon path specifications]

[accepts: a |-separated list of ribbon specifications]

[accepts: a |-separated list of ribbon specifications]

⁵This follows the convention for nodes in multidiagrams of [3], rather than the somewhat misguided convention that the author introduced in [2].

The `ribbons`, `path`, and `snoobs` keys work in exactly the same way for multitableaux and multidiagrams as they do for tableaux and diagrams except that the ribbons for different components are separated by a pipe `|`.



```
\Multitableau[ribbons={(R)11*r|(Y)12rc},
  styles={R={fill=red!10, opacity=0.5},
          Y={fill=yellow!20, opacity=0.5}}
] { 123,45 | 67,89}
```

3G.18


Notice that the 4 in the first component has disappeared because the second node in the ribbon $(R)11*r$ has `*-styling`, which writes over the 4. (One way to recover the missing entry is to use the ribbon specification $(R)11*r_4$.)

rows

[accepts: a decimal number]

The `rows` option sets the number of rows covered by the delimiters in multitableaux and multidiagram. By default, the `\Multitableau` and `\Multidiagram` set the size of the delimiters so that they match the component diagrams, which may not be what you want especially when using the `australia` and `ukrainian` conventions. The value of `rows` can be a decimal number.






```
\Multitableau[separator={,}]{ 123,45 | 67,89}
\Multidiagram[separator=:]{ 3,2 | 2^2 }
```

3G.23

separator colour (default:)

[accepts: L^AT_EX colour]

The **separator colour** sets the colour of the delimiters and the separator between component diagrams. By default, the separators are the same colour as the diagram border.




```
\Multitableau[separator colour=red]{123,45 | 67,89}
\Multidiagram[separator color=brown, separator=:]{
  3,2 | 2^2 }
```

3G.24

separation (default: 0.3)

[accepts: a decimal number (the distance in cm)]

The **separation** key sets the distance between the separators and the component tableaux and diagrams.

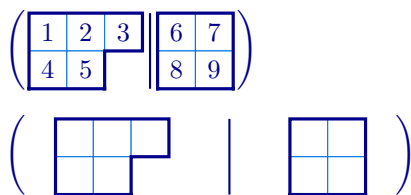


```
\Multitableau[separation=0.1]{123,45 | 67,89}
\Multidiagram[separation=0.8]{3,2 | 2^2}
```

3G.25

skew

a |-separated list of partitions

Skew multishapes can be drawn using the **skew** option to specify a |-separated list of inner shapes.

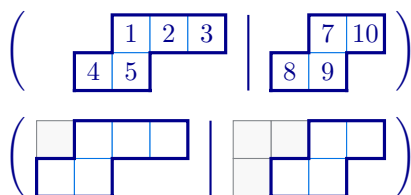


```
\Multitableau[skew={2,1|1}]{ 123,45 | 7{10},89}
```

```
\Multidiagram[skew={1|2,1}, skew boxes]{ 3,2 | 2^2 }
```

3G.26

There is no command for drawing shifted multitableau or multidiagrams, however, such diagrams can be drawn using an appropriate **skew** key. In the same way, it is possible to draw multitableaux and multidiagrams with components that are a mixture of non-skew, skew and shifted shapes.

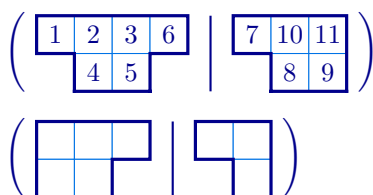


```
\Multitableau[skew={0,1|0,1}]{ 1236,45 | 7{10}{11},89}
```

```
\Multidiagram[skew={|0,1}]{ 3,2 | 2,1 }
```

3G.27

tabloid

Use the **tabloid** key for multitableau diagrams and tableaux.



```
\Multitableau[tabloid]{ 123,45 | 67,89}
\Multidiagram[tabloid]{ 4,2 | 2^2 }
```

3G.28


`xoffsets` (default: 0)

[accepts: |-separated list of x -offsets]

`yoffsets` (default: 0)

[accepts: |-separated list of y -offsets]


The `\Multitableau` and `\Multidiagram` commands try to draw the diagrams as compactly as possible with their first rows aligned, and the distance between the separators given by the value of `separation`. Use the `xoffsets` to offset the x -coordinates of the component diagrams and `yoffsets` to offset their y -coordinates.



```
\Multitableau[xoffsets={0.5,0.2}]{ 123,45 | 67,89}
\Multidiagram[yoffsets={0,1.5}]{ 4,2 | 2^2 }
```

3G.29

When using `xoffsets` or `yoffsets`, you may want to use `no separators` to disable the separators between component shapes. For example, here is a homogeneous Garnir tableau using the style of [6], where no separators are used and the component tableaux are stacked vertically.



```
\Multidiagram[entries=first, no separators,
xoffsets={0|-1.1}, yoffsets={0|-1},
styles={0={fill=orange!50}, P={fill=purple!50}},
snob style={draw=red,double,thick,fill=white},
snobs={|(0)24_{15}c_{14}, (P)26_{17}c_{16}, 27_{18},
31_{11}, (P)33_{13}c_{12}}
]{1|7^2,4,1}
```

3G.30

This is a slightly lazy way of drawing this multitableau because `entries=first` is used to automatically populate most of the entries and then `snobs=...` are used to rewrite the “bricks” in the homogeneous Garnir belt.

4. ABACUSES

Gordon James introduced the abacus, with beads and runners, as another way to represent a partition [5]. The abacus is particularly useful in modular representation theory, where the number of runners is the (quantum) characteristic. Abacus combinatorics are now used to help many algebras beyond their initial appearance in the representation theory of the symmetric groups.

The partition corresponding to an abacus is given by counting the number of empty bead positions before each bead on the abacus. The `\Abacus` command, which draws an abacus representation of a partition, has a similar syntax to the tableau and diagram commands.

```
\Abacus (x,y) [options] {number of runners} {bead specifications}
```

As with other `aTableau` commands, the (x,y) -coordinates are necessary if, and only if, the abacus is part of a `tikzpicture` environment. The number of runners is a positive integer that specifies the number of abacus runners.


4A. Bead specifications. In their simplest form, the bead specifications are a comma separated list of non-negative integers specifying a partition. Partitions can be given either as comma separated lists of

non-negative integers, or using exponential notation. The full bead specifications add optional styling and bead labels.


Here are some examples showing basic usage of the `\Abacus` command:

```
\aTabset{align=top}
\Abacus{1}{2,1,1}
\Abacus{4}{2,1^2,0^5}
\Abacus{2}{2,1^2,0^3}
\Abacus{5}{2,1^2,0^5}
\Abacus{3}{2,1^2,0^5}
\Abacus{6}{2,1^2,0^5}
```

4A.1

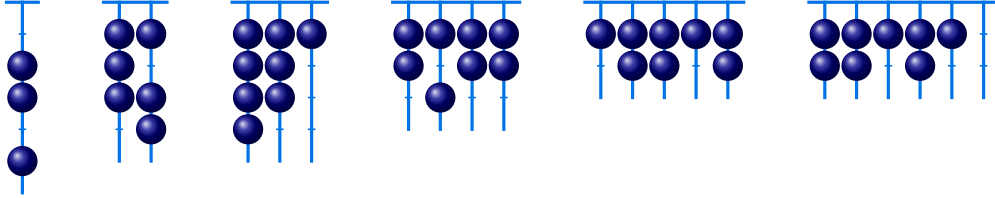

The beads in an abacus correspond to the parts of the partition. Just as with the `\Tableau` command, each of the beads can be given optional styling, which can either be given by prepending a `*`, which applies the `abacus star style`, or by giving `TikZ` styling-keys inside square brackets `[...]`. When exponential notation is used, the styles are applied to all of the associated beads.




```
\aTabset{align=top}
\Abacus{3}{3,*2^3,1}
\Abacus{4}{2,*1,[ball color=red]1^2,*1,
[ball color=orange]1,[ball color=brown]0}
```

4A.2

In particular, in the right-hand abacus, the two beads corresponding to `1^2` are coloured red, whereas the other three beads that correspond to a 1 are either orange or an off-white colour, which is the default `abacus star style`. As with the tableaux commands, we recommend using `\tikzset` to define more complicated bead styles.

In addition to applying style to the individual beads on the abacus, *labels* for any bead can (optionally) be given as a subscript in the bead specifications. Again, the same labels are applied to all of the corresponding beads when exponential notation is used.

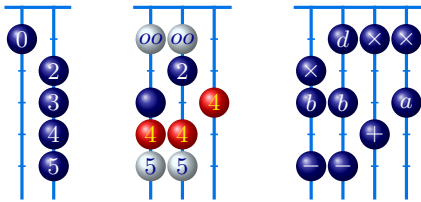


```
\Abacus{2}{5_5, 4_4, 3_3, 2_2,0_0}
\Abacus[styles={R={ball color=red, text=yellow}}]
{3}{*5^2_5, [R]4^3_4, 3, 2_2,*0^2_{oo}}
\Abacus{4}{8^2_-,7_+,5_a,4^2_b,1_\times^3,1_d}
```

4A.3

The bead labels are arbitrary, however, anything wider than the bead will spill into the abacus. Traditionally, abacus beads are not labelled, but you can give labels to as many beads as you like.

You can remove beads that you have placed on the abacus using the *no shade* style⁶. The point of being able to remove beads in this way is that this allows you to put something else in its place using the bead label. In such cases, you probably want to change the text colour, which is white by default.




```
\Abacus[styles={C={no shade,text=red}}]
{5}{8^2_-,7_+,5_a,4^2_b,[C]1_\bullet^3,1_d}
```

4A.4

As with tableau boxes, the bead labels are typeset in mathematics mode by default. This can be changed using `math entries` and `text entries`.

⁶`TikZ` does not provide a way to disable a shading that is already in effect. The *no shade* style, which is based on a `stack exchange post`, is available whenever the `aTableau` package is loaded.

4A.1. *Abacus coordinates.* The (x, y) -coordinates are required if, and only if, the `\Abacus` command is used inside a `tikzpicture` environment, in which case (x, y) gives the coordinates of the “outside corner” of the box in row 1 and column 1 of the tableau. The following example shows how tableaux are placed using (x, y) -coordinates inside a `tikzpicture` environment. The example also shows that, by default, the beads and runners in an abacus are half a unit apart.

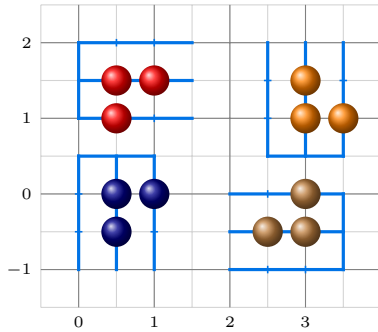

```
\begin{tikzpicture}[add grid]
\abaset{abacus ends=_|}
\Abacus(0,0.5) [south] {3}{2,1^2}
\Abacus(0,2) [east, bead=red] {3}{2,1^2}
\Abacus(2.5,0.5) [north, bead=orange] {3}{2,1^2}
\Abacus(3.5,-1) [west, bead=brown] {3}{2,1^2}
\end{tikzpicture}
```

4A.5

4B. **Abacus keys.** The abacus keys, or options, control the general appearance of the abacuses drawn by the `\Abacus` command. Many of the options, or keys, for tableaux and diagrams can be applied to abacuses, and we do not discuss all of these options here. In particular, `\Abacus` accepts the following keys: `align`, `math entries`, `text entries`, `name`, `scale`, `styles`, `tikz after`, `tikz before`, and `tikzpicture`. See Chapter 2 for the complete list.


`south` (default: `true`)
`east`
`north`
`west`

Just like tableaux, abacus have four different conventions. By default, abacuses are drawn with the runners pointing to the south, from top to bottom, and runners increasing from left to right. Similar to tableaux, we number the rows $0, 1, \dots$, and we number the runners, or columns, $0, 1, \dots, e - 1$, from left to right (when using `south`). If there are e runners, then the bead in row r and column c is in position $er + c$. See Example 4B.20 for an example.

Using the keys `east`, `north` and `west`, abacuses can be drawn so that the row index increases to the east, north, and west, respectively.

```
\Abacus[south,entries=betas]{2}{4^2,2,1}
\Abacus[north,entries=betas]{2}{4^2,2,1}
\Abacus[east,entries=betas]{2}{4^2,2,1}
\Abacus[west,entries=betas]{2}{4^2,2,1}
```

4B.1

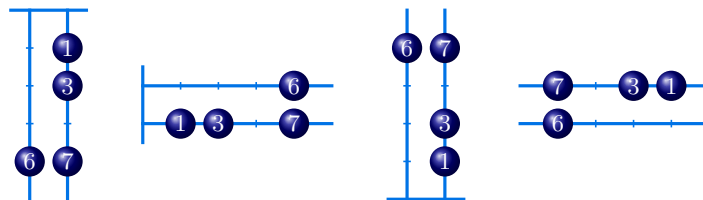

To make these conventions clearer, we have used `entries=betas` to label the beads in these abacuses by their bead positions, or *beta numbers*.

`abacus ends` (default: `-|`) [accepts: any pair of: `-`, `-`, `.`, `*`, `|`, `>`]
`abacus ends style` (default: `very thick, draw=`) [accepts: `TikZ`-styling]

The `abacus ends` key sets the style used for the top and bottom of the abacus. The meaning of these six symbols is the following:


- Adds a line that extends slightly past the first and last runners
- Adds a line between the first and last runners
- Add dots to the end of each runner

- * Add dots and an arrow to the end of each runner
- | The runners do not have any additional decoration
- > Add arrows to the end of each runner


Exactly two of these styling characters must be given when setting `abacus ends`. There are six options for the top of the abacus, and six options for the bottom, so there are 36 possible configurations (most of which will never be used...). We do not list all of them, but here are some examples.

```
\aTabset{align=top}
\Abacus[abacus ends=-|]{3}{2,1^2,0^3}
\Abacus[abacus ends=_.]{3}{2,1^2,0^3}
\Abacus[abacus ends=>|]{3}{2,1^2,0^3}
\Abacus[abacus ends=>|]{3}{2,1^2,0^3}
\Abacus[abacus ends=>|]{3}{2,1^2,0^3}
\Abacus[abacus ends=-_]{3}{2,1^2,0^3}
\Abacus[abacus ends=->]{3}{2,1^2,0^3}
\Abacus[abacus ends=-_]{3}{2,1^2,0^3}
\Abacus[abacus ends=-*]{3}{2,1^2,0^3}
```

4B.2

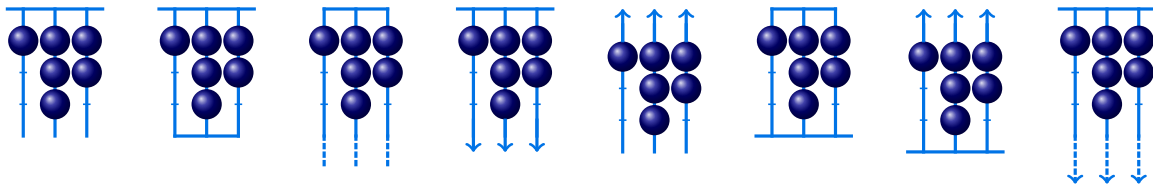


As one more example, *beta numbers* might be displayed using:



```
\Abacus[abacus ends=**, east, rows=7]{1}{2,1^2,*0^2}
```

4B.3

The `abacus ends style` key changes the *TikZ*-styling of the ends of the abacus. By default, this styling is the same as the styling for the abacus runners, which is set using `runner style`. Changes to `runner style` also changes the style of the abacus ends, but their style is ultimately determined by `abacus ends style`.




```
\Abacus[abacus ends style={aTableauMain,
  ultra thick}]{3}{2,1^2,0^3}
\Abacus[runner style=cyan]{3}{2,1^2,0^3}
\Abacus[abacus ends style=aTableauMain,
  runner style=cyan]{3}{2,1^2,0^3}
```

4B.4

`abacus star style` (default: `ball color=` , `text=`)

[accepts: *TikZ*-style keys]

The `abacus star style` key appends *TikZ*-style keys to the abacus `*-style`:




```
\Abacus{3}{5,*4_a,*1^2,0^4}
\Abacus[abacus star style={ball color=yellow,text=black}]
{3}{5,*4_a,*1^2,0^4}
```

4B.5

`bead` (default:)

[accepts: *L^AT_EX* colour]

The `bead` key sets the bead colour.



```
\Abacus{2}{2^3,1}
\Abacus[bead=black]{3}{4^3,2,1}
\Abacus[bead=red]{4}{4^3,[ball color=blue]2,1}
```


4B.6

The `bead` key changes the colour of every bead on the abacus. As shown, the colour of individual beads can be changed by applying the *TikZ*-style `ball color` to the bead.

bead font (default: `\small`)

[accepts: L^AT_EX font command]

The **bead font** key sets the font used for the bead labels. By default, these labels are typeset as mathematics, so this is mainly useful for changing the font size (because, for example `\bfseries $1$` does not make the 1 bold). It is only when you are using **text entries** that font commands like `\itshape` and `\bfseries` will have any effect.



```
\Abacus{3}{3_3,2^2,1^3}
\Abacus[bead font=\tiny]{3}{3_3,2^2,1^3}
\Abacus[text entries, bead font=\bfseries]{3}{3_3,2^2,1^3}
```

4B.7

The **scale** key can also be used to resize abacuses.

bead size (default: 0.4)

[accepts: decimal number, distance in cm]


bead sep (default: 0.42)

[accepts: decimal number, distance in cm]

runner sep (default: 0.42)

[accepts: decimal number, distance in cm]

These three keys control the size of the beads and the distance between them, so they would normally be used together. By default, the *diameter* of the abacus beads is 0.4 cm, the distance between adjacent beads on the same runner is 0.42 cm, and the distance between consecutive runners is 0.42 cm.



```
\Abacus[bead size=0.6,
        bead sep=0.65,
        runner sep=0.65]
{3}{3_3,2^2,1^3}
```


4B.8

As with tableau, you can also change the size of the abacuses using **scale**, **xscale** and **yscale**. Changing these keys globally affects both abacuses and tableaux.

bead style

[accepts: TikZ styling]

The keys above are usually sufficient for fine-tuning the style of the abacus beads. Alternatively, the **bead style** key appends TikZ-styling to the default bead style, which has many moving parts.



```
\Abacus[bead style={shading=axis}, bead text=red]
{3}{3_3,2^2,1^3}
\Abacus[bead style={no shade, fill=aTableauMain}]
{3}{3_3,2^2,1^3}
```


4B.9

By default, the beads look like balls (they use the TikZ-styling `shading=ball`, `ball color=`). In contrast, the beads on the left look like go beads, and those on the right are flat.

bead text (default: `white`)

[accepts: any colour]

The **bead text** key sets the text colour of the abacus labels.



```
\Abacus[bead=blue, bead text=yellow] {3}{3_3,2^2,1^3}
```


4B.10

beta numbers (default: `false`)

[accepts: false/true]

When **beta numbers** is set, the numbers in the bead specifications are entered as *beta numbers*. The beta numbers give the bead positions, which are numbered 0, 1, ..., starting from the first row and then

continuing in this way in subsequent rows. More explicitly, if there are e runners then the bead to row r and column c is in position $er + c$. Up to shift, bead numbers are first column hook lengths. In particular, beta numbers are pairwise distinct.



```
\Abacus{3}{3,2^2}
\Abacus[beta numbers]{3}{5,3,2}
\Abacus[beta numbers]{3}{6,4,3,[ball color=red]0}
```


4B.11

There is no inverse key to `beta numbers`, however, `beta numbers=false` will remove the requirement that beta numbers be used in the bead specifications.

`dotted cols`
`dotted rows`

[accepts: list of runner indices]
[accepts: list of row indices]


The `dotted rows` and `dotted cols` keys draw abacuses where the specified rows and columns are replaced with dots. This makes it possible to draw *generic* abacuses, where the number of rows and columns is not fully specified. Note that for abacuses, both the row and column indexing starts from 0.

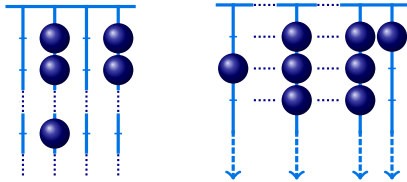

```
\Abacus[dotted rows={2,4}]{4}{8,5,4,3,2,1}
\Abacus[dotted cols={1,3}, abacus
ends=-*]{6}{9,8,5,4,3^3,2}
```

4B.12

As with tableau, consecutive rows and columns treated together.

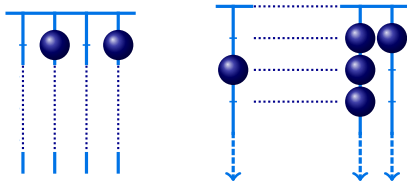


```
\Abacus[dotted rows={1,2,3}]{4}{8,5,4,3,2,1}
\Abacus[dotted cols={1,2,3}, abacus
ends=-*]{6}{9,8,5,4,3^3,2}
```

4B.13

Comparing these two examples shows that the beads and runners in the dotted rows and columns are removed by `dotted rows` and `dotted cols`, respectively. Named coordinates, for use with `name`, are not created for the bead and tick positions on the dotted rows and columns.


The `dotted cols` and `dotted rows` keys can be used together, in which case the `dotted rows` are removed first, followed by the `dotted cols`. The output may need to be adjusted if the dotted rows and columns overlap. For example, consider the abacus:



```
\Abacus[dotted cols={2,3},
dotted rows={2,3}
]{6}{26,21^2,5^2,3,2^2,0^2}
```

4B.14

The cross-hatched dots in the centre of the abacus are not ideal. The following trick addresses this:



```
\Abacus[dotted cols={2,3}, dotted rows={2,3},
tikz after = {
\draw[aTableau/clearBoxes](A-1-1.south east)rectangle(A-4-4.north west);
\draw[aTableau/dotted](A-1-1.south east)--(A-4-4.north west);
}
]{6}{26,21^2,5^2,3,2^2,0^2}
```


4B.15

`entries`

[accepts: betas, residues, rows, shape]

Like the `entries` key for tableaux, the `entries` option for abacuses provides a shortcut for labelling the abacus beads by some common choices. The possible choices are:


- `entries=betas` Label the beads by the corresponding *beta numbers*.



```
\Abacus[entries=betas]{3}{3,2^2,0^2}
\Abacus[entries=betas]{4}{3,2^2,0^2}
```

4B.16


- `entries=residues` Label the beads by their residues. Unlike for tableaux, it is not necessary to specify the quantum characteristic `e`, because this is determined by the number of runners and the `cartan` type. You can override this by setting `e` manually.



```
\Abacus[entries=residues,]{3}{3,2^2,0^2}
\Abacus[entries=residues, cartan=C]{4}{3,2^2,0^2}
```

4B.17


- `entries=rows` Label the beads by their rows index of the corresponding part in the partition.



```
\Abacus[entries=rows]{3}{3,2^2,0^2}
\Abacus[entries=rows]{4}{3,2^2,0^2}
```

4B.18

- `entries=shape` Label the beads by their shape, which is the corresponding partition.



```
\Abacus[entries=shape]{3}{3,2^2,0^2}
\Abacus[entries=shape]{4}{3,2^2,0^2}
```

4B.19

`name` (default: `A`)


text

Just like the tableaux commands, the `abacus` command defines named coordinates for all of the *beads* and *ticks* on the abacus. By default, the named coordinates take the form $(A-r-c)$, for the bead or tick in row r and column c of the abacus. Note that for abacuses, both the row and column indexing starts from 0. The key `name` changes the prefix used for the names. For example, after `name=X` the node names take the form $(X-r-c)$.

```
\Abacus[name=X,
tikz after={
\draw[orange,<-,thick] (X-0-0.west) -- ++(-1,0)
node[blue,align=left,anchor=west] {Empty bead\ position};
\draw[red,<-,thick] (X-2-2.east) -- ++(2,0)
node[blue,align=left,anchor=west] {First part of\ the partition};
}]{3}{4^3,1^2}
```

4B.20

Empty bead
position




First part of
the partition

`no shade`

[accepts:]

The abacus balls are drawn with the `TikZ` style `shading=ball`. As noted in Example 4A.4, you can disable this for individual beads using `no shade`. The `no shade` disables the `TikZ`-ball shading for all beads, making it possible to fully customise how the abacus beads are displayed.



```
\Abacus[no shade, bead text=red]{3}{3_1,2_2,2_3}
\Abacus[bead style={no shade, shape=diamond,
fill=brown, text=yellow}]{3}{3_1,2_2,2_3,0^2}
```


4B.21

As the first example shows, if you use the `no shade` key then you need to define a new style for the abacus beads. As the second example shows, rather than using `no shape` as an `aTableau`-key you can use it directly as a `TikZ`-style in `bead style`. (We include the `no shade` option partly for convenience and partly to advertise how it can be used.)

`rows` (default: -)

non-negative integer

By default, the `\Abacus` command uses the smallest number of rows necessary to display all of the beads on the abacus. Use the `rows` key to change the number of rows displayed. If you use the `rows` key, then it is your responsibility to ensure that the abacus has enough rows to display all of the beads.

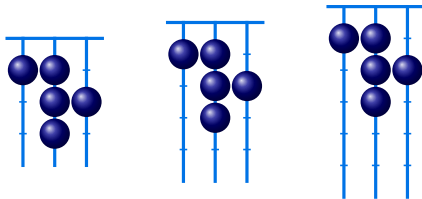

```
\Abacus{3}{3,2^2,0^2}
\Abacus[rows=4]{3}{3,2^2,0^2}
\Abacus[rows=5]{3}{3,2^2,0^2}
```

4B.22


`runner` (default: `draw=` )

[accepts: `LATEX` colour]

`runner style` (default: `very thick`)

[accepts: `TikZ`-styling]


Use `runner` to set the colour of abacus runners.

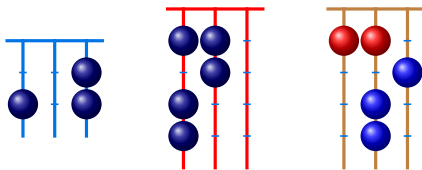

```
\Abacus{3}{3,2^2}
\Abacus[runner=red]{3}{5,3,2,0^2}
\Abacus[runner=brown, bead=blue]
{3}{6,4,3,[ball color=red]0^2}
```

4B.23

The `runner style` key appends `TikZ`-styling to the abacus runner style.



```
\Abacus[runner style={dashed}]{3}{3,2^2}
```

4B.24

`tick` (default: )

[accepts: `LATEX` colour]


`tick style` (default: `semithick`)

[accepts: `TikZ` style]

`tick length` (default: `0.1`)

[accepts: a decimal number, length in cm]

These three keys control the ticks on the abacus runners, which mark the empty bead positions. Use `tick` to the colour of the ticks on the abacus runners. The other two key have the obvious meanings.

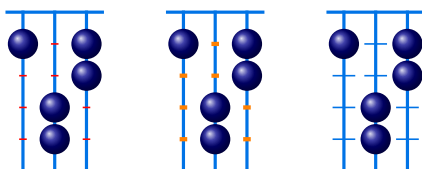


```
\Abacus[tick=red]{3}{6,4,3,1,0}
\Abacus[tick style={ultra thick,orange}]{3}{6,4,3,1,0}
\Abacus[tick length=0.3]{3}{6,4,3,1,0}
```

4B.25

5. EXAMPLES FROM THE LITERATURE

This section shows how to draw some tableaux that appear in the literature. All of these diagrams predate this package. The aim of this section is to show how these pictures can be drawn using this package.


Diagrams like the following are common. Note the use of a ribbon to add the α in row 6 and column 8.

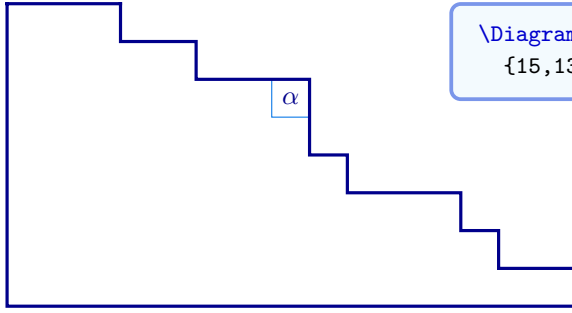

```
\Diagram[french, no boxes, ribbons={*68_\alpha}]
{15,13,12,9,8^2,5,3}
```

5.1


Mendes [10] uses tableaux like these to give a new proof of the Murnaghan-Nakayama rule.



```
\tikzset{C/.style={circle,draw=blue,
minimum size=3.5mm, fill=white,thick}}
\Diagram[paths={
[C]13_1cc_\bullet, [C]21_2r_\bullet,
[C]23_3c_\bullet, [C]14_4
}] {4,3,1}
\Diagram[path style={rounded corners},
paths={ [C]12_1cr_\bullet, [C]14_2c_\bullet,
[C]23_3c_\bullet, [C]31_4}] {4,3,1}
```

5.2


The following ribbon tableau comes from a nice paper by Fayers [4], which uses Dyck tilings to understand homogeneous Garnir relations for KLR algebras of type A .

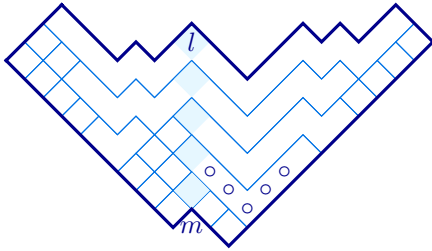

```
\RibbonTableau[skew={1^2}, ukrainian, scale=0.7,
ribbons={(draw=none)21_m}
] {
12,16c_\circ c_\circ c_\circ r_\circ r_\circ c *r,
18crrrrrr*r,19,1{10},1{11},1{12},
22,29crrrrrr*rrrrrr,
2{12}ccrrrrrr*r_lrrrrrr,
31,*32,41,42,51,52,53,
62cr,81,91,{10}1,{10}2,{11}1,{11}2
}
```

5.3

The entries of a tableau are usually single characters, but they can be more complicated. The paper [1] contains tableaux with entries that are *symbols*, which are produced by the `\Symb` command below.




```
\newcommand\Symb[2]{\genfrac{}{}{0pt}{}{#1}{#2}}
\Tableau[ukrainian, box font=\scriptsize,
tikz after = {\draw[ultra thick, red]
(A-2-3.east)--(A-2-2.south)--(A-3-2.west)
--(A-3-3.north)--cycle;
}]{
{\Symb11}{\Symb11}{\Symb11}{\Symb0s},
{\Symb11}{\Symb11}{\Symb11}{\Symb0s},
{\Symb11}{\Symb11}{\Symb{s^*}s}{\Symb0f},
{\Symb11}{\Symb11}{\Symb11},
{\Symb11}{\Symb11}
}
```

5.4

The next example, also from [1], is a little more involved. Most of the diagram is drawn using *pics* from `TikZ`, which are a good way to add repeating features to a `tikzpicture`. In the code below, *pics* are used to add the up and down strings to this drawing, taking as input the string colour, the starting box, the list of the boxes the strings goes through, and the final box. At the risk of further obfuscation, this could be done a little more efficiently. From the perspective of this manual, the most interesting feature

of this picture is that it is a non-trivial example showing that shows how to use the named nodes for the tableaux boxes; see (1.1).

```
\begin{tikzpicture}[
  Cap/.style={out=45, in=135}, % caps are drawn with to[Cap]
  Cup/.style={out=315, in=225}, % cups are drawn with to[Cup]
  every node/.style={font=\scriptsize},
  redribbon/.style={fill=red!40, opacity=0.4},
  % define pics for drawing the curvy up and down strings
  pics/ustring/.style n args = {4}{% {colour}{first coord}{wave coords}{last coord}
    code = {
      \def\last{#2} % should not be necessary
      \draw[thick, #1] (T-|#2.north west) node[above=-0.155]{$\vee$} -- (#2.north west)
        foreach [remember=\pt as \last (initially #2)] \pt in {#3}
          {to[Cup](\last.north east) to[Cap] (\pt.north west)}
          to[Cup] (#4.north east) -- (#4.north east|-T) node[above=-0.27]{$\wedge$};
    }
  },
  pics/dstring/.style n args = {4}{% {colour}{first coord}{wave coords}{last coord}
    code = {
      \def\last{#2} % should not be necessary
      \draw[thick, #1] (O-|#2.south west) node[below=-0.13]{$\wedge$} -- (#2.south west)
        foreach [remember=\pt as \last (initially #2)] \pt in {#3}
          {to[Cap](\last.south east) to[Cup] (\pt.south west)}
          to[Cap] (#4.south east) -- (#4.south east|-O) node[above=-0.13]{$\vee$};
    }
  },
],
\coordinate (O) at (0,0); \coordinate (T) at (0,3.2);
\draw(-2,0)--(2.5,0) (-2,3.2)--(2.5,3.2);
\Diagram(0,0)[ukrainian, inner style=dotted, ribbons={(redribbon)24rcrcrc}]{5,4^3,3}
\pic at (T) {ustring={gray}{A-1-5}{A-1-5}}; % up strings
\pic at (T) {ustring={gray}{A-4-4}{A-4-4}};
\pic at (T) {ustring={gray}{A-5-2}{A-4-3,A-3-4}{A-3-4}};
\pic at (T) {ustring={gray}{A-5-3}{A-5-3}};
\pic at (T) {ustring={red}{A-5-1}{A-4-2,A-3-3,A-2-4}{A-2-4}};
\pic at (O) {dstring={gray}{A-1-1}{A-1-1}}; % down strings
\pic at (O) {dstring={gray}{A-2-1}{A-1-2}{A-1-2}};
\pic at (O) {dstring={gray}{A-3-1}{A-2-2,A-1-3}{A-1-3}};
\pic at (O) {dstring={gray}{A-4-1}{A-3-2,A-2-3,A-1-4}{A-1-4}};
\pic at (O) {dstring={gray}{A-5-1}{A-4-2,A-3-3,A-2-4,A-1-5}{A-1-5}};
\end{tikzpicture}
```



6. FEATURE REQUESTS AND BUG REPORTS

Please make any feature requests and bug reports on the package github page

github.com/AndrewMathas/aTableau/.

Please give as much detail as possible when making such requests.

Bug reports must be accompanied by a *minimal working example*, which is the smallest possible amount of L^AT_EX code that compiles and demonstrates the problem. This is necessary because if I cannot reproduce your problem, then it is unlikely that I will be able to fix it.

REFERENCES

- [1] C. BOWMAN, M. D. VISSCHER, A. HAZI, AND C. STROPPEL, *Quiver presentations and isomorphisms of Hecke categories and Khovanov arc algebras*, 2023. [arXiv:2309.13695](#).
- [2] R. DIPPER, G. JAMES, AND A. MATHAS, *Cyclotomic q -Schur algebras*, Math. Z., **229** (1998), 385–416.
- [3] A. EVSEEV AND A. MATHAS, *Content systems and deformations of cyclotomic KLR algebras of type A and C* , Annals of Representation Theory, **1** (2024), 193–297. [arXiv:2209.00134](#).
- [4] M. FAYERS, *Dyck tilings and the homogeneous Garnir relations for graded Specht modules*, 2013, preprint. [arXiv:1309.6467](#).
- [5] G. JAMES, *Some combinatorial results involving Young diagrams*, Math. Proc. Cambridge Philos. Soc., **83** (1978), 1–10.
- [6] A. KLESHCHEV, A. MATHAS, AND A. RAM, *Universal graded Specht modules for cyclotomic Hecke algebras*, Proc. Lond. Math. Soc. (3), **105** (2012), 1245–1289. [arXiv:1102.3519](#).
- [7] M. Z. KONVALINKA, *The weighted hook length formula III: Shifted tableaux*, Electron. J. Combin., **18** (2011), Paper 101, 29.
- [8] I. G. MACDONALD, *Symmetric functions and Hall polynomials*, Oxford Mathematical Monographs, The Clarendon Press Oxford University Press, New York, second ed., 1995. With contributions by A. Zelevinsky, Oxford Science Publications.
- [9] A. MATHAS, *Iwahori-Hecke algebras and Schur algebras of the symmetric group*, University Lecture Series, **15**, American Mathematical Society, Providence, RI, 1999.
- [10] A. MENDES, *The combinatorics of rim hook tableaux*, Australas. J. Combin., **73** (2019), 132–148.

INDEX

- *, *see* star
- \Abacus, [39](#)
- \Diagram, [23](#)
- \Multidiagram, [33](#)
- \Multitableau, [33](#)
- \RibbonTableau, [30](#)
- \ShiftedDiagram, [28](#)
- \ShiftedTableau, [28](#)
- \SkewDiagram, [27](#)
- \SkewTableau, [27](#)
- \Tableau, [9](#)
- \Tabloid, [29](#)
- \aTabset, [3](#)
- \shortminus, [26](#)
- \usepackage, [3](#)
- abacus, [39](#)
- abacus ends, [7](#), [41](#), [41](#), [42](#)
- abacus ends style, [7](#), [41](#), [42](#)
- abacus star style, [40](#), [42](#), [42](#)
- affine quiver, [26](#)
- align, [3](#), [7](#), [13](#), [13](#), [41](#)
- American dialect, [4](#)
- australia, [37](#)
- australian, [7](#), [12](#), [14](#), [15](#), [23](#), [34](#)
- Australian, [2](#)
- bead, [7](#), [42](#), [42](#)
- bead font, [7](#), [43](#), [43](#)
- bead sep, [7](#), [43](#)
- bead size, [7](#), [43](#)
- bead style, [7](#), [43](#), [43](#), [46](#)
- bead text, [7](#), [43](#), [43](#)
- beta numbers, [43](#), [43](#), [44](#)
- beta numbers, [7](#)
- border, [4](#), [7](#), [14](#), [14](#), [24](#), [24](#)
- border colour, [7](#), [14](#), [14](#)
- border style, [7](#), [14](#), [14](#)
- box, [9](#)
- box fill, [14](#), [14](#)
- box font, [14](#), [14](#)
- box height, [7](#), [13](#), [14](#), [15](#), [19](#)
- box style, [7](#)
- box text, [15](#), [15](#)
- box width, [7](#), [13](#), [14](#), [15](#), [19](#)
- boxes, [7](#), [24](#), [24](#)
- cartan, [7](#), [27](#), [36](#), [45](#)
- Cartesian coordinates, [3](#)
 - abacus, [41](#)
 - tableau, [12](#)
- center, [4](#)
- centre, [4](#)
- charge, [7](#), [35](#), [35](#), [36](#)
- color, [4](#)
- colour, [4](#)
- components, [33](#)
- composition, [22](#)
- conjugate, [7](#), [15](#), [24](#), [25](#), [30](#), [34](#), [34](#)
 - multidiagram, [34](#)
 - multitableau, [34](#)
- contents, [26](#), [35](#)
 - multitableau, [35](#)
- dashed, [16](#)
- delimiters, [7](#), [35](#)
- diagram, [9](#), [23](#)
 - exponential notation, [23](#)
 - multidiagram, [33](#)
 - shifted, [28](#)
 - skew, [27](#)
- dotted cols, [7](#), [22](#), [24](#), [24](#), [25](#), [44](#), [44](#)
- dotted rows, [7](#), [22](#), [24](#), [24](#), [25](#), [44](#), [44](#)
- draw, [11](#)
- e, [5](#), [7](#), [45](#)
- east, [7](#), [41](#), [41](#)
- empty, [7](#), [35](#), [35](#)
- english, [7](#), [12](#), [13–15](#), [23](#), [23](#), [34](#)
- English, [2](#)
- entries, [5](#), [7](#), [26](#), [26](#), [29](#), [35](#), [35](#), [36](#), [39](#), [41](#), [44](#), [45](#)
 - beta, [45](#)
 - multitableau, [35](#)
 - partition, [45](#)
 - residues, [45](#)
- exponential notation, [9](#), [23](#), [27](#)
- fill, [11](#)
- first tableau, [26](#)
 - multitableau, [35](#)
- font, [11](#)
- French, [3](#)
- french, [7](#), [12](#), [13–15](#), [23](#), [34](#)
- French, [2](#)
- halign, [7](#), [15](#), [15](#)
- hook lengths, [26](#)
- hooks, [26](#)
 - multitableau, [35](#)
- inner colour, [7](#), [14](#), [15](#), [16](#)
- inner style, [7](#), [15](#), [16](#)
- label, [8](#), [16](#), [16](#), [36](#), [36](#)

- label style, 8, [16](#), [16](#)
- last tableau, [26](#)
 - multitabseau, [35](#)
- left delimiter, 8, [35](#), [35](#)
- math box style, [25](#)
- math entries, [3](#), [8](#), [16](#), [16](#), [40](#), [41](#)
 - abacus, [40](#)
- multidiagram
 - components, [33](#)
 - conjugate, [34](#)
 - show, [35](#)
- multitabseau
 - components, [33](#)
 - conjugate, [34](#)
 - contents, [35](#)
 - first, [35](#)
 - hooks, [35](#)
 - last, [35](#)
 - residue, [35](#)
- name, [3](#), [5](#), [8](#), [16](#), [16](#), [22](#), [36](#), [36](#), [41](#), [44](#), [45](#), [45](#)
- no border, [4](#), [14](#), [14](#), [24](#), [24](#), [30](#)
- no boxes, [24](#), [24](#)
- no separators, [37](#), [37](#), [39](#)
- no shade, [40](#), [45](#), [45](#), [46](#)
- no shape, [46](#)
- no skew border, [28](#)
- node, *see* box, [9](#)
- north, 8, [41](#), [41](#)
- partition, [9](#)
 - diagram, [23](#)
 - exponential notation, [9](#), [23](#)
 - skew, [27](#)
 - strict, [28](#)
- path, [37](#)
- path box, 8, [17](#), [17–19](#), [25](#), [33](#)
- path box style, 8, [17](#), [17–19](#), [33](#)
- path style, 8, [17](#), [17](#), [25](#), [33](#)
- paths, 8, [17](#), [17](#), [18](#), [22](#), [25](#), [25](#), [30](#), [32](#), [32](#), [33](#), [36](#)
- residue, [26](#)
- residues, [26](#), [35](#), [36](#)
 - multitabseau, [35](#)
- ribbon
 - head, [30](#)
- ribbon box, 8, [18](#), [18](#), [19](#), [33](#), [33](#)
- ribbon box style, 8, [18](#), [18](#), [19](#), [33](#)
- ribbon style, 5, 8, [18](#), [18](#), [33](#), [33](#)
- ribbons, 4, 5, 8, [18](#), [18](#), [22](#), [25](#), [25](#), [30](#), [32](#), [32](#), [36](#), [37](#)
- right delimiter, 8, [35](#), [35](#)
- rows, 8, [37](#), [37](#), [46](#), [46](#)
- runner, [46](#), [46](#)
- runner sep, [43](#)
- runner style, 8, [42](#), [46](#), [46](#)
- runner sep, 8
- scale, [3](#), [8](#), [13](#), [15](#), [19](#), [19](#), [41](#), [43](#)
- separation, 8, [38](#), [38](#), [39](#)
- separator, 8, [37](#), [37](#)
- separator colour, 8, [38](#), [38](#)
- separators, 8, [37](#), [37](#)
- shifted, 8, [19](#), [29](#)
- shifted tableau, [28](#)
- skew, 8, [20](#), [27](#), [30](#), [38](#), [38](#)
- skew border, 8, [22](#), [28](#), [28](#)
- skew border style, 8, [28](#), [28](#)
- skew box style, 8, [28](#), [28](#)
- skew boxes, 8, [28](#), [28](#), [29](#)
- snob box, 8, [18](#), [19](#), [33](#)
- snob box style, 8, [18](#), [19](#), [33](#)
- snob style, 8, [18](#), [18](#), [33](#)
- snobs, 8, [18](#), [18](#), [20](#), [22](#), [25](#), [25](#), [30](#), [32](#), [32](#), [36](#), [37](#), [39](#)
- south, 8, [41](#), [41](#)
- star, [10](#)
- star style, 8, [10](#), [20](#), [20](#), [27](#), [30–32](#)
- strict partition, [28](#)
- style
 - dashed, [16](#)
- styles, 4, 8, [11](#), [20](#), [20](#), [41](#)
- tableau, [9](#)
 - *, [23](#)
 - [, [23](#)
- comma, [23](#)
- contents, [26](#)
- dotted cols, [25](#)
- dotted rows, [25](#)
- drawing order, [22](#)
- first, [26](#)
- hook lengths, [26](#)
- hooks, [26](#)
- last, [26](#)
- multitabseau, [33](#)
- residues, [26](#), [36](#)
- ribbon tableau, [30](#)
- shifted, [28](#)
- skew, [27](#)
- special characters, [23](#)
- tableau entries, [9](#)
 - star, [10](#)
 - style, [10](#)
- tabloid, 8, [20](#), [20](#), [29](#), [38](#), [38](#)
- tablolds
 - column, [30](#)
- text, [11](#), [14](#)
- text entries, [3](#), [8](#), [10](#), [14](#), [16](#), [16](#), [40](#), [41](#), [43](#)
 - abacus, [40](#)
- tick, 8, [46](#), [46](#)
- tick length, [46](#)
- tick style, [46](#)
- tick width, [8](#)
- tikz after, 4, 8, [21](#), [41](#)
- tikz before, 4, 8, [21](#), [41](#)
- tikzpicture, 4, 8, [21](#), [21](#), [41](#)
- ukrainian, 8, [12](#), [14](#), [15](#), [23](#), [34](#), [37](#)
- Ukrainian, [2](#)
- valign, 8, [15](#), [15](#)
- west, 8, [41](#), [41](#)
- xoffsets, 8, [36](#), [39](#), [39](#)
- xscale, [3](#), [8](#), [15](#), [19](#), [19](#), [43](#) (x, y), [9](#), [12](#), [41](#)
- yoffsets, 8, [36](#), [39](#), [39](#)
- Young diagram, *see* diagram, *see* diagram
- yscale, [3](#), [9](#), [15](#), [19](#), [19](#), [43](#)