

Andrew Mathas

Version 2.0-alpha



This version of the code is already quite powerful, but it is still in the proof-of-concept phase. There are bugs and there is very little documentation. Several planned features have not been implemented. Everything is subject to change. Comments and suggestions are welcome.

This package provides commands for drawing Young diagrams, tableaux, abacuses and other common objects used in algebraic combinatorics and representation theory. The commands are designed to be easy to use and easy to read. The literature contains many embellishments of the basic diagrams, so we provide mechanisms to customise and style these diagrams.

The package provides basic commands for drawing these objects, together with styling options and a key-value interface for adding extra features. Under the hood, everything is drawn using `TikZ`. It is possible to use all of our commands either as standalone commands, or as components of a `tikzpicture` environment. This makes it possible to use these commands inside more complicated diagrams.

## CONTENTS

|                                     |    |
|-------------------------------------|----|
| 1. Young diagrams and tableaux      | 1  |
| Tableaux                            | 3  |
| Young diagrams                      | 8  |
| Skew tableau                        | 9  |
| Shifted tableau                     | 9  |
| Tabloids                            | 9  |
| Ribbon tableaux                     | 9  |
| Multidiagrams and multitableaux     | 10 |
| 2. Abacuses                         | 10 |
| 3. Dynkin quivers                   | 11 |
| 4. Braid diagrams and KLRW diagrams | 11 |
| 5. <code>aTableau</code> settings   | 11 |
| 6. The code                         | 11 |
| Index                               | 11 |
| Index                               | 11 |


## 1. YOUNG DIAGRAMS AND TABLEAUX

*Partitions*, which are weakly decreasing sequences of non-negative integers, are fundamental objects in algebraic combinatorics and representation theory. Rather than working with sequences of integers, it is often useful to visualise partitions as Young *diagrams*, which are arrays of boxes in the plane. A *tableau* is a (Young) diagram where the boxes are labelled using some alphabet. Equivalently, a diagram is a tableau with empty labels.

For example,  $\lambda = (4, 3, 3, 2, 0, 0, \dots)$  is a partition of 12, since the entries sum to 12. It is customary to omit the zeros when writing partitions and to use exponents for repeated parts, so we also write  $\lambda = (4, 3^2, 2)$ . Many authors identify a partition  $\lambda = (\lambda_1, \lambda_2, \dots)$  with its *diagram*, which is the set

$$[\lambda] = \{ (r, c) \mid 1 \leq c \leq \lambda_r \text{ for } r \geq 1 \}.$$

The diagram of  $\lambda$  is visualised as a justified array of boxes in the plane, where the first row has 4 boxes, the next two rows have 3 boxes and the last row has 2 boxes. The *shape* of a diagram is the partition that gives the number of boxes in each row. Here are some examples of the diagrams and tableaux of shape  $(2, 1^2)$  that can be drawn using `aTableau`:




This choice of colouring is gratuitous, but it emphasises that [aTableau](#) provides a mechanism for adding style (and, in particular, colour), to each box in these diagrams. The example also shows that [aTableau](#) supports the four different conventions used for drawing Young diagrams and tableaux. The following table shows how to draw the Young diagram for  $\lambda = (4, 3^2, 2)$  using the four tableaux conventions supported by [aTableau](#):

| Convention              | <a href="#">aTableau</a> command           | Diagram |
|-------------------------|--------------------------------------------|---------|
| English                 | <code>\Diagram[english]{4,3^2,2}</code>    |         |
| French                  | <code>\Diagram[french]{4,3,3,2}</code>     |         |
| Ukrainian <sup>1</sup>  | <code>\Diagram[ukrainian]{4,3^2,2}</code>  |         |
| Australian <sup>2</sup> | <code>\Diagram[australian]{4,3,3,2}</code> |         |

As shown, partitions can either be typed out in full or using the exponential notation. The different conventions for diagrams, and tableaux, are listed in order of their popularity in the literature. By default, the *English* convention is used, so `\Diagram{4,3,3,2}` produces the first diagram above. These four conventions can be applied in the same way to the `\Tableau` command. You can change the default convention using the `\aTabSet` command.

This table shows how the commands provided by [aTableau](#) work: there are basic commands for drawing diagrams, and these diagrams can be embellished using optional arguments and a key-value interface. In addition, as the following example shows, by supplying (optional) Cartesian coordinates, these diagrams can be used inside a `tikzpicture` to create more exotic pictures:


```
% \usetikzlibrary{patterns}
\begin{tikzpicture}[
  B/.style={pattern=north east lines, pattern color=blue,opacity=0.5},
  Y/.style={pattern=north west lines, pattern color=ForestGreen,opacity=0.5},
]
\Diagram(0,0)[ribbons={Y|16ccccrrr, B|16crrcccr}]{6,5^2,2}
\draw[->](1.5, 1)node[right]{ $\alpha=(1,2)$ } to [out=180,in=90] (T-1-2.base);
\draw[->](1.5,-2)node[right]{ $\beta=(4,2)$ } to [out=180,in=270] (T-4-2.base);
\draw[red,<->]([xshift=-1mm]T-1-1.south west)
--node[rotate=90,above]{ $\beta_1=3$ }([xshift=-1mm]T-4-1.south west);
\end{tikzpicture}
```



Most of the commands in this example are **TikZ** commands, but most of the picture is drawn by the `\Diagram` command. The top of defines two **TikZ** styles, **B** and **Y**, that are used in the ribbons. The Young diagram is placed at position (0,0) by the `\Diagram` command, and the three `\draw` commands add arrows to the picture. You should consult the very readable **TikZ** manual if you want to know more.

From the viewpoint of **aTableau**, the most important point of this example is that the `\Diagram` command can be used inside a `tikzpicture` environment because it is equipped with the Cartesian coordinate (0,0). The example also uses the four named coordinates, (T-1-1), (T-1-2), (T-4-1), and (T-4-2). When **aTableau** draws a tableau, or diagram, it creates **TikZ** named coordinates for each of the boxes in the diagram, so that (T-r-c) refers to the box in row *r* and column *c*. Giving finer control, (T-r-c).base is the middle of the box, and (T-r-c).north, (T-r-c).south, ..., have the obvious meaning.

The previous example also shows that the `ribbons` option adds *ribbons* to diagrams (and tableaux), and that these ribbons can be given **TikZ** styling. All of the options to these commands are described in the following sections. We start with the `\Tableau` command because all of the diagram and tableau commands, except for `\Diagram` In the example above the Cartesian coordinate (0,0) is necessary because the `\Diagram` command is embedded inside a `tikzpicture` environment, but the coordinate itself is not important in the sense that changing the coordinate will not change the picture. Cartesian coordinates become more meaningful when there is more than one diagram or tableau:



```
% \usetikzlibrary{decorations.pathmorphing}
\begin{tikzpicture}[wave/.style={thick,red,->,decorate,decoration=snake}]
  \aTabSet{ribbonstyle={fill=blue!20, opacity=0.4}}
  \Diagram(0,0)[e=2,label=residues,ribbons={13crc}]{3,2}
  \draw[wave] (0.25,-1.0) --+ (0,-1);
  \Diagram(0,-2.5)[e=2,label=residues,ribbons={12rcr}]{2^2,1}
\end{tikzpicture}
```

The following sections describe the commands defined by the package and how to use them.

**Tableaux.** This section describes the `\Tableau` command, which draws tableau or labelled diagrams. The syntax for this command is:

`\Tableau (x,y) [options] {tableau entries}`

*(x,y)* :

The Cartesian coordinates  $(x,y)$  are needed if and only if the tableau is inside a `tikzpicture` environment.

**options** :

Optional arguments, described below.

**tableau entries** :

The `tableau entries` are given as a comma separated list, with commas separating rows and each *token*, or braced-group of tokens, being in a separate column. As we explain below, optionally, each tableau entry can be prefixed by **TikZ** styling commands.

We show by example how to use the `\Tableau` command, starting with basic usage and finishing with style. Inside `\Tableau`, the rows are separated by commas, with the column entries given by the “letters” in the entry for each row:

|   |   |   |   |
|---|---|---|---|
| 1 | 2 | 3 | 4 |
| 5 | 6 |   |   |
| 7 |   |   |   |
| 8 |   |   |   |

|           |         |          |          |
|-----------|---------|----------|----------|
| $\alpha$  | $\beta$ | $\gamma$ | $\delta$ |
| $x$       | $y$     | $\eta$   |          |
| $\lambda$ | $\mu$   | $\nu$    |          |
| $\pi$     | $\rho$  | $\sum$   |          |

```
\Tableau{ 1234, 56, 7, 8 }
\Tableau{ \alpha\beta\gamma\delta,
          xy\eta,
          \lambda\mu\nu,
          \pi\rho\sum }
```

You can put all of the tableau specifications on one line, without any spaces. Alternatively, as I do, you add spaces and line breaks between the tableau entries to improve readability (although, you cannot have blank lines inside a `\Tableau` command). As this example suggests, by default, the entries of a tableau are typeset as mathematics, but this can be changed.

As the second example above shows, the tableau entries are *not* just individual characters: they also include  $\text{\TeX}$  commands. Tableaux frequently contain entries that are not single characters, or given by commands. Such entries can be inserted in a tableau by enclosing them in braces:

|   |       |    |    |      |
|---|-------|----|----|------|
| 1 | 3     | 10 | 11 | $2x$ |
| 2 | $x^2$ |    |    |      |

```
\Tableau{ 13{10}{11}{2x}, 2{x^2} }
```

There is one additional caveat for braced-entries: *any single braced entry in a row needs to be double-braced*. In practical terms, the need to double-bracing is shown by the following example:

|   |    |   |   |
|---|----|---|---|
| 1 | 3  | 4 | 5 |
| 8 | 10 |   |   |
| 1 | 1  |   |   |
| 1 | 2  |   |   |

|    |    |   |   |
|----|----|---|---|
| 1  | 3  | 4 | 5 |
| 8  | 10 |   |   |
| 11 |    |   |   |
| 12 |    |   |   |

```
\Tableau{ 1345, 8{10}, {11}, {12} }
\Tableau{ 1345, 8{{10}}, {{11}}, {{12}} }
```

The  $\{11\}$  and  $\{12\}$  in the first tableau are both treated as spanning two columns in the tableau because they are not double-braced; in contrast, they occupy only one column in the second tableau because they are double-braced.

The need for double-bracing of singleton entries is a consequence of how  $\text{\LaTeX}$ 3 detects braced commas in comma separated lists. If you want to have a comma as an entry in a tableau, then you should enclose it in braces.

|    |    |   |   |
|----|----|---|---|
| 1  | 3  | , | 5 |
| 8  | 10 |   |   |
| 11 |    |   |   |

```
\Tableau{ 13{,}5, 8{10}, {{11}} }
```

As we have defined them, tableaux are always of *partition* shape, in that the lengths of the rows form a weakly decreasing sequence. In fact, the `\Tableau` command also accepts tableaux of *composition* shape, where the lengths of the rows are not necessarily in decreasing order.

|   |   |   |   |   |
|---|---|---|---|---|
| 2 | 4 | 5 |   |   |
| 8 | 2 | 7 | 5 | 1 |
| 2 | 3 | 1 |   |   |

```
\Tableau{ 245,82751,231 }
```

*Adding style.* The `aTableau` package provides several different ways to add `TikZ` style commands to tableaux and diagrams. This is made possible by an enhanced syntax for the tableau entries. To take advantage of these styles you will need at least rudimentary knowledge of how `TikZ` styles work. At least to get started, the examples in this manual will help.

The simplest way to change the style of a tableau entry is to give it a `*`-prefix in the tableau specifications. This is the easiest way to add some style to some of the nodes in the tableau:

|    |    |    |   |   |
|----|----|----|---|---|
| 1  | 2  | 3  | 4 | 5 |
| 6  | 7  | 8  | 9 |   |
| 10 | 11 | 12 |   |   |
| 13 |    |    |   |   |

```
\Tableau{ 1*2*3*4*5, 6*789, {10}*{11}{12}, {{13}} }
```

By default, the \*-entries are given the **TikZ** styling `fill=blue!20`. You can change the default \*-style using the `starstyle` key:

|    |    |    |   |   |
|----|----|----|---|---|
| 1  | 2  | 3  | 4 | 5 |
| 6  | 7  | 8  | 9 |   |
| 10 | 11 | 12 |   |   |
| 13 |    |    |   |   |

```
\Tableau[starstyle={fill=red!20,draw=red,thick}]
{ 1*2*3*4*5, 6*789, {10}*{11}{12}, {{13}} }
```

Using `starstyle` to change the border thickness of the nodes is not the best way to do this because some of the borders of the \*-ed nodes are not thick. This is because, for example, the default style for the box containing \* is applied after the \*-style for the box containing 3, which overwrites the thick border. If you wanted to achieve a styling like this it is better to use the `ribbons` key, which is described below, because the ribbons are added to the tableau after the nodes have been drawn.

The \*-syntax is convenient if you want to emphasise some of the boxes in a tableau, using a single style. In fact, it is possible to give every box in the tableau its own style by putting the style specification inside square brackets, `[...]`, before the corresponding letter in the tableau specification. You can mix the \*-syntax and the [...]-style syntax for different entries, although you can only apply one of these style settings to any given node.

|    |    |    |   |  |
|----|----|----|---|--|
| 13 |    |    |   |  |
| 10 | 11 | 12 |   |  |
| 6  | 7  | 8  | 9 |  |
| 1  |    | 3  |   |  |


```
\Tableau[french]{
  1[blue!20]2[circle]3[red]4[cyan]5,
  6*789,
  {10}*{11}{12},
  {{13}} }
```

This example shows that some precision is needed when changing the style because simply giving a colour will change both the colour used to fill the box and the text colour, which is why some of tableau entries above appear to be blank. Instead of using just a colour, use `text=...` to change the text colour, `fill=...` to change the fill colour, and `draw=...` to change the border colour. If you want to apply more than one style setting to any tableau entry, such as `circle,fill=orange`, then you need to enclose the all of style settings inside matching square and curly braces `[{...}]`. This is necessary because commas are used to separate the rows of the tableau.

|    |    |   |   |   |  |
|----|----|---|---|---|--|
|    |    | 1 |   |   |  |
|    | 6  |   | 2 |   |  |
|    | 10 | 7 |   | 3 |  |
| 13 | 11 | 8 |   | 4 |  |
|    | 12 | 9 | 5 |   |  |

```
\Tableau[australian]{
  1[fill=blue!20]2[{circle,fill=orange}]3[text=red]45,
  6*78[{draw=cyan,ultra thick}]9,
  {10}*{11}{12},
  [{dashed,draw=red,ultra thick}]{13} }
```

For complicated styles, or styles that are used often, we recommend defining the style outside of the `\Tableau` command by using the `\tikzset` command to define the style:



```
\tikzset{
  B/.style={fill=blue!40, text=yellow},
  G/.style={fill=green!80!blue,font=\tiny},
  R/.style={fill=red,text=white},
  Y/.style={fill=yellow!20, text=blue}
}
\Tableau[french]{[R]1[B]2,[G]3,[Y]4}
\Tableau[ukrainian]{[R]1[B]2,[G]3,[Y]4}
\Tableau[english]{[R]1[B]2,[G]3,[Y]4}
\Tableau[australian]{[R]1[B]2,[G]3,[Y]4}
```

In this example, the `TikZ` styles `B`, `G`, `R`, and `Y` are being applied to the tableaux entries labelled 1, 2, 3, and 4, respectively. The colours used here, and throughout this manual, are for demonstration purposes only: I recommend against such garish choices in any self-respecting document!

*\Tableau options.* The optional `*-styles` and `[...]-styles` are the main mechanism for styling individual nodes in a tableau. Using a key-value syntax, you can change other aspects of the tableaux produced by the `\Tableau` command. The rest of this section describes these keys, their default values, and gives examples of how to use them.

The options described below can be used with the `\Tableau` command by placing them as a comma separated list inside square brackets:

`\Tableau[options]{tableau entries}` or `\Tableau(x,y)[options]{tableau entries}`.

The options can appear in any order, with later options having precedence over earlier ones.

When used inside a `\Tableau` command, the options only affect that tableau. Most of these options can also be used in the `\aTabSet` command, to change the default settings of all following tableaux in the same  $\text{\LaTeX}$  group. For example, if you put the command `\aTabSet[ukrainian]` in the preamble of your document then, by default, latter tableaux and Young diagrams will be drawn using the Ukrainian convention.

english

french

ukrainian

australian

skew

[accepts: a partition]

shifted

[accepts: true/false]

tabloid

[accepts: true/false]

align (default: center)

[accepts: center/bottom/top]

prefix (default: T)

inner wall

outer wall

inner style

outer style

fill

text

font

**math nodes** (default: **true**)

[accepts: true/false]

**text nodes**

[accepts: true/false]

**shape****node height****node width****ribbons**

[accepts: a comma separated list of ribbon specifiers]

**ribbonstyle** (default: **fill=blue!20**)

Use the **ribbons** key to add a comma separated list of ribbons to your tableau. The syntax for adding ribbons is described in the `\RibbonTableau` section below. The basic idea is that you specify the location of the head of the ribbon, which has minimum row index and maximum column index, and then gives a sequence of *r*'s and *c*'s depending on whether the ribbon moves along a row or column – and, of course, you can add style. Use the **ribbonstyle** option to change the default style of the ribbons. For example, noting the a box is a ribbon of length 1, the following code uses ribbons of length one (that is, nodes), to highlight the addable nodes of this tableau.

|    |   |    |   |  |
|----|---|----|---|--|
| 1  | 2 | 3  | 4 |  |
| 5  | 6 | 7  |   |  |
| 8  | 9 | 10 |   |  |
| 11 |   |    |   |  |
|    |   |    |   |  |

```
\Tableau[ribbons={15,24,42,51},
ribbonstyle={fill=yellow}]
{1234,567,89{10},{11}}
```

**star style****scale** (default: **1**)

[accepts: a decimal number]

**xscale** (default: **1**)

[accepts: a decimal number]

**yscale** (default: **1**)

[accepts: a decimal number]

As the following example shows, the boxes in tableaux do not automatically resize to fit their contents.

|   |       |    |    |       |
|---|-------|----|----|-------|
| 1 | 3     | 10 | 11 | $1+x$ |
| 2 | $1+x$ |    |    |       |

```
\Tableau{ 13{10}{11}{1+x}, 2{1+x} }
```

The options **scale**, **xscale** and **yscale** can be used to rescale the boxes in tableaux and diagrams. The names are slightly misleading because **xscale** rescales in the direction of increasing column index and **yscale** rescales in the direction of increasing row index.

|   |       |    |    |       |
|---|-------|----|----|-------|
| 1 | 3     | 10 | 11 | $1+x$ |
| 2 | $1+x$ |    |    |       |

```
\Tableau[scale=2]{ 13{10}{11}{1+x}, 2{1+x} }
```

|   |       |    |    |       |
|---|-------|----|----|-------|
| 1 | 3     | 10 | 11 | $1+x$ |
| 2 | $1+x$ |    |    |       |

```
\Tableau[xscale=2]{ 13{10}{11}{1+x}, 2{1+x} }
```

|   |       |   |    |       |
|---|-------|---|----|-------|
|   |       |   |    | $1+x$ |
|   | $1+x$ |   | 10 | 11    |
| 2 |       | 3 |    |       |
|   | 1     |   |    |       |

```
\Tableau[ukrainian, xscale=2]{ 13{10}{11}{1+x}, 2{1+x} }
```

|   |   |  |
|---|---|--|
| . | . |  |
| . |   |  |
| . |   |  |

```
\Tableau[starstyle={blue}]{... , ... , ... }
```

|   |   |   |
|---|---|---|
| 1 | 2 | 3 |
| 4 | 5 |   |








|   |   |   |
|---|---|---|
| 1 | 2 | 3 |
| 4 | 5 |   |

|   |   |   |
|---|---|---|
|   | 5 | 3 |
| 4 |   | 2 |
|   | 1 |   |

|   |   |   |
|---|---|---|
|   | 1 |   |
| 4 |   | 2 |
|   | 5 |   |
|   |   | 3 |

|   |   |
|---|---|
| 4 | 5 |
| 1 | 2 |
|   | 3 |

Young diagrams.

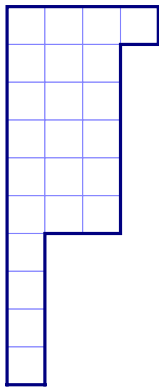

|    |   |   |
|----|---|---|
| 0  | 1 | 2 |
| -1 | 0 |   |
| -2 |   |   |

|    |   |   |
|----|---|---|
| 0  | 1 | 2 |
| -1 | 0 |   |
| -2 |   |   |

|   |   |   |
|---|---|---|
| 5 | 4 | 1 |
| 3 | 2 |   |
| 2 | 1 |   |

```
\tikzset{R/.style={fill=blue!20,draw=red,thick}}
\Tableau{12[R]3,4[R]5}
\Tableau[starstyle={fill=blue!50,text=white}]{12*3,4*5}
```

```
\tikzset{R/.style={fill=red!20,draw=red}}
\Tableau[ukrainian]{12[R]3,45}
```

```
\tikzset{R/.style={fill=blue!20,draw=NavyBlue,thick}}
\Tableau[Australian]{12[thick]3,45}
```

```
\tikzset{R/.style={fill=red!20,circle,radius=0.2}}
\Tableau[french]{12[R]3,45}
```

```
\Tableau{~~~,~~~,~~,~}
```

```
\Diagram{4,3^5,1^4}
\Diagram{4,3,3,1}
```

```
\Diagram[australian]{3,2,1}
```

```
\Diagram[english]{3,2,1}
```

```
\Diagram[french]{3,2,1}
```

```
\Diagram[ukrainian]{3,2,1}
```

```
\Diagram[label=contents]{3,2,1}
\Tableau{012,{-1}0,{{-2}}}
```

```
\Diagram[label=hooks]{3,2,2}
```



|   |   |   |
|---|---|---|
| 1 | 4 | 7 |
| 2 | 5 |   |
| 3 | 6 |   |

```
\Diagram[label=final]{3,2,2}
```

|   |   |   |
|---|---|---|
| 1 | 2 | 3 |
| 4 | 5 |   |
| 6 | 7 |   |

```
\Diagram[label=initial]{3,2,2}
```

|   |   |   |
|---|---|---|
| 0 | 1 | 2 |
| 2 | 0 |   |
| 1 |   |   |

```
\Diagram[label=residues, e=3]{3,2,1}
```

Skew tableau.

|   |   |   |   |
|---|---|---|---|
|   | 1 | 2 | 3 |
| 4 | 5 |   |   |
| 6 | 7 |   |   |

|  |   |   |
|--|---|---|
|  | 6 | 7 |
|  | 4 | 5 |
|  |   | 1 |
|  |   | 2 |
|  |   | 3 |

```
\tikzset{R/.style={fill=red!20,circle}}
\SkewTableau{2,1^2}{12[R]3,45,67}
\SkewTableau[french,skewwall]{2,1^2}{12[R]3,45,67}
```

Shifted tableau.

|   |   |   |
|---|---|---|
| 1 | 2 | 3 |
|   | 4 | 5 |

```
\tikzset{R/.style={fill=red!20,circle}}
\ShiftedTableau{12[R]3,45}
```

|   |   |   |
|---|---|---|
|   | 4 | 5 |
| 1 | 2 | 3 |

```
\tikzset{R/.style={fill=red!20,circle}}
\ShiftedTableau[french]{12[R]3,45}
```

**Tabloids.** A *tabloid* is an equivalence class of tableau where two tableaux are equivalent if they have the same entries in each row, up to a permutation. In the literature, tabloids are drawn with (outer wall) lines drawn above and below each row, and no side boundary walls. The `\Tabloid` command functions in the same way as the `\Tableau` command, except that it draws tabloids.


|   |   |   |
|---|---|---|
| 4 | 1 | 2 |
| 5 |   | 3 |

|   |   |   |
|---|---|---|
| 1 | 2 | 3 |
| 4 | 5 |   |


|   |   |   |
|---|---|---|
| 4 | 5 |   |
| 1 | 2 | 3 |

```
\tikzset{R/.style={fill=red!20,circle}}
\Tabloid[australian]{12[R]3,45}
\Tabloid[english]{12[R]3,45}
\Tabloid[french]{12[R]3,45}
\Tabloid[ukrainian]{12[R]3,45}
```


**Ribbon tableaux.** A *ribbon* in a tableau, or in a diagram, is a connected strip of nodes that does not contain a  $\begin{smallmatrix} \blacksquare & \blacksquare \\ \blacksquare & \blacksquare \end{smallmatrix}$ -square. The *head* of a ribbon  $R$  is the node  $(r, c) \in R$  such that  $r' > r$  and  $c' < c$  whenever  $(r', c') \in R$  and  $(r', c') \neq (r, c)$ .



```
\RibbonTableau{11rrrrrr}
\RibbonTableau{16ccccc}
\RibbonTableau{1{10}crcrcrcrc}
```




```
\RibbonTableau{
[fill=blue!20!1]12[fill=red!20!2]c[fill=yellow!20!3]r }
\RibbonTableau[french]{ [|1]12[|2]c[|3]r }
\RibbonTableau[ukrainian]{ [|1]12[|2]c[|3]r }
\RibbonTableau[australian]{ [|1]12[|2]c[|3]r }
```



```
\RibbonTableau[skew={4,1^2},ukrainian]
{15,16,26,25crrc,23cr,42cr,61}
\RibbonTableau[skew={4,1^2},australian]
{fill=blue!10!16crrcrrcrr,26,34cr}
```

Multidiagrams and multitableaux.

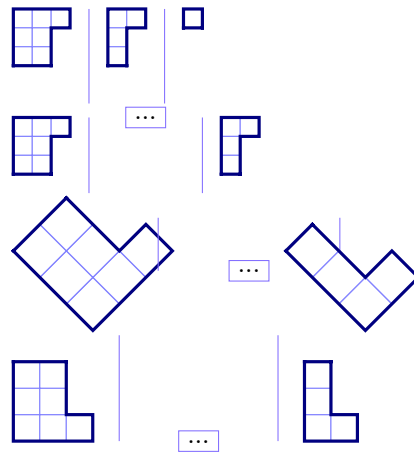


```
\Multidiagram[scale=0.5]{3,2^2||2,1^2}

\Multidiagram[scale=0.5,rows=3,rows=3]
{3,2^2||...||2,1^2}


\Multidiagram[ukrainian,scale=0.5,
cols=3]{3,2^2||...||2,1^2}

\Multidiagram[french,scale=0.7,rows=3]
```

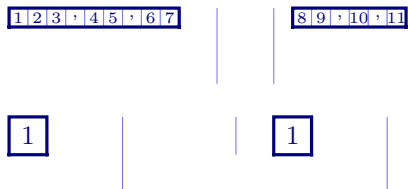


```
\Multitableau[rows=3,scale=0.5,font=\tiny]
{123,45,67||89,{10},{11}||...||{12}}
```

## 2. ABACUSES

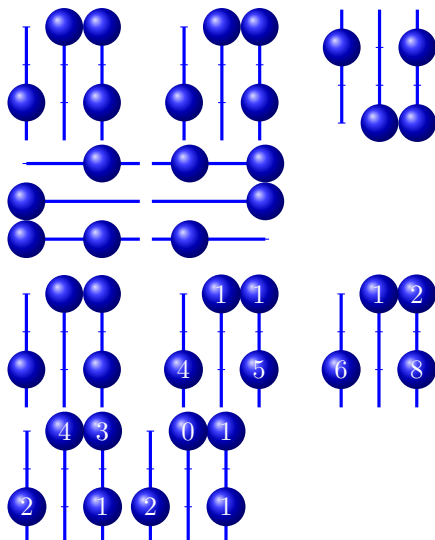


```
\Abacus{3}{5,4,1,1}
\Abacus[south]{3}{5,4,1,1}
\Abacus[north]{3}{5,4,1,1}
\Abacus[east]{3}{5,4,1,1}
\Abacus[west]{3}{5,4,1,1}
```

```
\Abacus{3}{5,4,1,1}
\Abacus[label=shape,text=white]{3}{5,4,1,1}
\Abacus[label=beta,text=white]{3}{5,4,1,1}
\Abacus[label=row,text=white]{3}{5,4,1,1}
\Abacus[label=residue,text=white]{3}{5,4,1,1}
```



An abacus:



Done!

```
\tikzset{R/.style={ball color=red},
          S/.style={ball color=white}}

\Abacus{3}{5,[R]4,1^2,[S]0^4}
\Abacus[north]{3}{5,[R]4,1^2,[S]0^4}

\Abacus[north, scale=0.5, starstyle={ball
color=white}]{3}{5,4,*1^2,*0^4}
```

```
\Abacus[text=white,font=\tiny]{3}{5_a,4_b,1_c,1_d}
```

### 3. DYNKIN QUIVERS

### 4. BRAID DIAGRAMS AND KLRW DIAGRAMS

### 5. `\Tableau` SETTINGS

### 6. THE CODE

Every command provided by `aTableau` uses `TikZ`, with the bulk of the code in the package being written in  $\text{\LaTeX}$ 3. Most of the tableau commands are special cases of the `\Tableau` command. Here is a dictionary:

| Command                                          | Equivalent <code>\Tableau</code> command          |
|--------------------------------------------------|---------------------------------------------------|
| <code>\ShiftedTableau{...}</code>                | <code>\Tableau[shifted]{...}</code>               |
| <code>\SkewTableau{<math>\mu</math>}{...}</code> | <code>\Tableau[skew=<math>\mu</math>]{...}</code> |
| <code>\Tabloid{...}</code>                       | <code>\Tableau[tabloid]{...}</code>               |

The `\Diagram` command also invokes the `\Tableau` command, however, this requires some involved internal trickery. For example, `\Diagram{3,2^2}` is the same as `\Tableau{...,...,...}`.

Use the `\EAbacus` command to typeset an abacus

### INDEX

|                                  |                                 |                                  |
|----------------------------------|---------------------------------|----------------------------------|
| <code>*</code> , <i>see</i> star | font, 6                         | outer wall, 6                    |
| align, 6                         | french, 6                       | partition, 1                     |
| australian, 6                    | French, 2                       | prefix, 6                        |
| Australian, 2                    | inner style, 6                  | ribbons, 3, 5, 7                 |
| composition, 4                   | inner wall, 6                   | ribbonstyle, 7                   |
| diagram, 1                       | math nodes, 7                   | <code>\RibbonTableau</code> , 9  |
| <code>\Diagram</code> , 8        | <code>\Multidiagram</code> , 10 | scale, 7                         |
| english, 6                       | <code>\Multitableau</code> , 10 | shape, 7                         |
| English, 2                       | node height, 7                  | shifted, 6                       |
| fill, 6                          | node width, 7                   | <code>\ShiftedTableau</code> , 9 |
|                                  | outer style, 6                  | skew, 6                          |
|                                  |                                 | <code>\SkewTableau</code> , 9    |

- star, [4](#)
- star style, [7](#)
- starstyle, [5](#)
  
- tableau, [1](#)
- \Tableau, [3](#)
- tableau entries, [3](#)
  
- double-braced, [4](#)
- star, [4](#)
- style, [4](#)
- tabloid, [6](#)
- \Tabloid, [9](#)
- text, [6](#)
- text nodes, [7](#)
  
- ukrainian, [6](#)
- Ukrainian, [2](#)
  
- xscale, [7](#)
- $(x, y)$ , [3](#)
  
- Young diagram, *see* diagram
- yscale, [7](#)