Exam : FCSS_EFW_AD-7.6

Title : FCSS - Enterprise Firewall 7.6 Administrator

Vendor : Fortinet

Version : V13.65

KOREADUMPS.COM

NO.1 Refer to the exhibit, which contains the partial output of an OSPF command.
An administrator is checking the OSPF status of a FortiGate device and receives the output shown in the exhibit.
Which statement on this FortiGate device is correct?
A. The FortiGate device can inject external routing information.
B. The FortiGate device is in the area 0.0.0.5.
C. The FortiGate device does not support OSPF ECMP.
D. The FortiGate device is a backup designated router.
Answer: A
Explanation:
From the OSPF status output, the key information is:
" This router is an ASBR " # This means the FortiGate is acting as an Autonomous System Boundary Router (ASBR).
An ASBR is responsible for injecting external routing information into OSPF from another routing protocol (such as BGP, static routes, or connected networks).

NO.2 Refer to the exhibit.
The routing tables of FortiGate_A and FortiGate_B are shown. FortiGate_A and FortiGate_B are in the same autonomous system.
The administrator wants to dynamically add only route 172.16.1.248/30 on FortiGate_A.
What must the administrator configure?
A. A BGP route map in for 172.16.1.248/30 on FortiGate_A
B. Enable Redistribute Connected in the BGP section on FortiGate_
C. The prefix 172.16.1.248/30 in the BGP Networks section on FortiGate_B
D. A BGP route map out for 172.16.1.248/30 on FortiGate_B
Answer: D

NO.3 What can be inferred from the OSPF status output shown?
A. Is ASBR
B. Is BDR
C. Supports ECMP
D. Is in area 0.0.0.5
Answer: A
Explanation:
Comprehensive and Detailed Explanation From Exact Extract documents and Knowledge:
In an OSPF status output (typically retrieved via get router info ospf status), the unit identifies its role within the OSPF autonomous system. If the output indicates that the device is an ASBR (Autonomous System Boundary Router) , it means the FortiGate is redistributing routes from another protocol (like BGP, RIP, or static routes) into OSPF. The status will explicitly state " This router is an ASBR " if redistribution is active.
This role is critical for providing connectivity between OSPF and external networks.
==========

NO.4 You must configure a loopback as a BGP source to connect to the ISP.

KOREADUMPS.COM

Which two commands must you use to establish the connection? (Choose two.)

A. ebgp-enforce-multihop

B. update-source

C. ibgp-enforce-multihop

D. recursive-next-hop

Answer: A B

Explanation:

When configuring a BGP peering session with an external neighbor (eBGP), such as an ISP, using a loopback interface as the source, two specific configuration requirements must be met in FortiOS:

* update-source (B): By default, BGP uses the IP address of the physical egress interface to initiate the TCP connection to a neighbor. If you want the BGP session to be sourced from a loopback interface (which is a common practice for stability, as loopbacks do not go down unless the entire router fails), you must explicitly define this using the set update-source < interface > command under the neighbor configuration.

* ebgp-enforce-multihop (A): Standard eBGP sessions have a default Time-to-Live (TTL) of 1, meaning the peer is expected to be directly connected. When peering using loopback addresses, the loopback interface is logically one hop away from the physical link. Therefore, the connection will fail unless you increase the TTL. The set ebgp-enforce-multihop < hop-count > command allows the BGP session to be established even if the peer is not on a directly connected subnet or if loopbacks are used.

In the provided exhibit (image_bd178a.jpg), the CLI shows the neighbor configuration. To successfully peer with the ISP (10.200.3.1) using a local loopback, the administrator would need to add:

* set update-source " loopback0 "

* set ebgp-enforce-multihop 2 (or a higher value)

KOREADUMPS.COM

NO.5 Refer to the exhibit.

A pre-run CLI template that is used in zero-touch provisioning (ZTP) and low-touch provisioning (LTP) with FortiManager is shown.

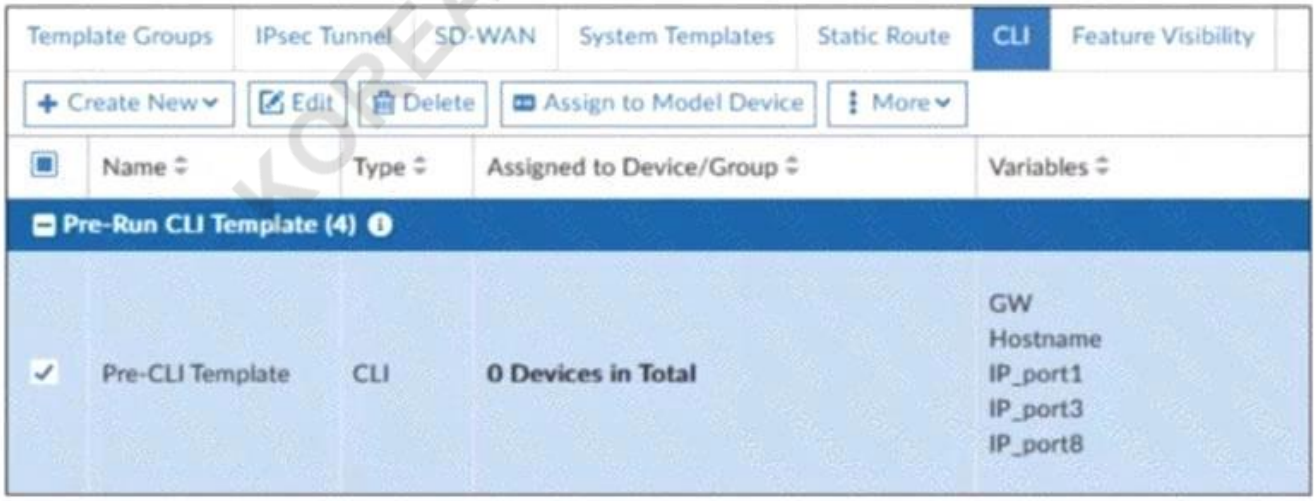

The template is not assigned even though the configuration has already been installed on FortiGate. What is true about this scenario?

A. The administrator did not assign the template correctly when adding the model device because pre-CLI templates remain permanently assigned to the firewall

B. Pre-run CLI templates are automatically unassigned after their initial installation

C. Pre-run CLI templates for ZTP and LTP must be unassigned manually after the first installation to

avoid conflicting error objects when importing a policy package

D. The administrator must use post-run CLI templates that are designed for ZTP and LTP

Answer: B

Explanation:

In FortiManager, pre-run CLI templates are used in Zero-Touch Provisioning (ZTP) and Low-Touch Provisioning (LTP) to configure a FortiGate device before it is fully managed by FortiManager. These templates apply configurations when a device is initially provisioned. Once the pre-run CLI template is executed, FortiManager automatically unassigns it from the device because it is not meant to persist like other policy configurations. This prevents conflicts and ensures that the FortiGate configuration is not repeatedly applied after the initial setup.

NO.6 Which action should you take after applying a block-all IPS profile that caused applications to stop working?

A. Disable IPS

B. Use monitor mode

C. Enable flow mode

D. Remove server targets

Answer: B

Explanation:

In high-security environments, applying a restrictive IPS profile can sometimes lead to false positives , where legitimate application traffic is incorrectly identified as a threat and blocked. The standard troubleshooting procedure is to change the signature action to monitor mode .

Monitor mode allows the traffic to pass through while still generating logs in FortiAnalyzer or the FortiGate dashboard. By reviewing these logs, an administrator can identify the exact signature ID causing the issue and subsequently create an IPS sensor override or exception for that specific traffic, ensuring the application works while maintaining security for other threats.

==========

NO.7 How can FortiGate_B advertise only 172.16.1.248/30 using BGP?

A. Redistribute connected

B. Route map out

C. Prefix list in

D. Network

Answer: D

Explanation:

Comprehensive and Detailed Explanation From Exact Extract documents and Knowledge:

In BGP (Border Gateway Protocol), there are two primary ways to inject routes into the BGP table: using the network command or through redistribution. The network command is the standard and most precise method for advertising a specific prefix that already exists in the local routing table.

In the lab environment, " Link C " is identified as the subnet 172.16.1.248/30 , which is directly connected to the FortiGate. By using the Network command (e.g., set network 172.16.1.248 255.255.255.252), the administrator ensures that only this specific prefix is advertised to BGP neighbors. In contrast, " Redistribute connected " (Option A) would advertise every directly connected network on the device, which would require an additional " Route map out " (Option B) to filter, making the " Network " command the most direct and correct configuration for the

KOPEADUMPS.COM

requirement.
==========

NO.8 How do you resolve object conflicts when importing a policy package?
A. Rename
B. FortiManager accept
C. Non-default
D. Retrieve config
Answer: B
Explanation:
Comprehensive and Detailed Explanation From Exact Extract documents and Knowledge:
When importing a policy package from a FortiGate into a FortiManager ADOM, the Import Wizard compares the objects on the FortiGate with the objects already existing in the FortiManager ADOM database. If an object (e.g., an Address Object) has the same name but different values, a conflict occurs.
* To resolve this, the administrator must choose which version to keep. Choosing FortiManager accept (or " Use FortiManager value ") resolves the conflict by keeping the existing object in the FortiManager database and applying its settings to the imported policy. This maintains global consistency across the ADOM.
==========

NO.9 What does the command set forward-domain < domain_ID > in a transparent VDOM interface do?
A. It configures the interface to prioritize traffic based on the domain ID, enhancing quality of service for specified VLANs.
B. It isolates traffic within a specific VLAN by assigning a broadcast domain to an interface based on the VLAN ID.
C. It restricts the interface to managing traffic only from the specified VLAN, effectively segregating network traffic.
D. It assigns a unique domain ID to the interface, allowing it to operate across multiple VLANs within the same VDOM.
Answer: B
Explanation:
In a transparent mode Virtual Domain (VDOM) configuration, FortiGate operates as a Layer 2 bridge rather than performing Layer 3 routing. The set forward-domain < domain_ID > command is used to control how traffic is forwarded between interfaces within the same transparent VDOM.
A forward-domain acts as a broadcast domain, meaning only interfaces with the same forward-domain ID can exchange traffic. This setting is commonly used to separate different VLANs or network segments within the transparent VDOM while still allowing FortiGate to apply security policies.

NO.10 Which three approaches can successfully deploy advanced initial configurations?
A. Metadata variables
B. Model device ZTP/LTP
C. Jinja scripting

KOREADUMPS.COM

D. Global ADOM
Answer: A B C
Explanation:
Comprehensive and Detailed Explanation From Exact Extract documents and Knowledge:
To deploy advanced initial configurations, FortiManager utilizes several specialized tools:
* Model device ZTP/LTP: FortiManager uses model devices to support Zero-Touch Provisioning (ZTP) and Low-Touch Provisioning (LTP). This allows configurations to be prepared on FortiManager and automatically pushed to a real device once it connects.
* Metadata variables: These are used within CLI templates and provisioning templates to provide dynamic, per-device configuration values (like specific IP addresses or unique identifiers).
* Jinja scripting: Both CLI and pre-run CLI templates support Jinja scripting, which provides a powerful way to use logic (if/then, loops) and variables to generate complex, dynamic configurations tailored to each device.
==========

NO.11 Refer to the exhibit, which shows the packet capture output of a three-way handshake between FortiGate and FortiManager Cloud.
What two conclusions can you draw from the exhibit? (Choose two.)
A. FortiGate will receive a certificate that supports multiple domains because FortiManager operates in a cloud computing environment.
B. FortiGate is connecting to the same IP server and will receive an independent certificate for its connection between FortiGate and FortiManager Cloud.
C. If the TLS handshake contains 17 cipher suites it means the TLS version must be 1.0 on this three-way handshake.
D. The wildcard for the domain *.fortinet-ca2.support.fortinet.com must be supported by FortiManager Cloud.
Answer: A D

KOREADUMPS.COM

NO.12 What is the effect of configuring tcp-mss-sender and tcp-mss-receiver?
A. Fragment only
B. Header change
C. Largest payload
D. Allow/Deny
Answer: C

NO.13 Refer to the exhibit.
The routing tables of FortiGate_A and FortiGate_B are shown. FortiGate_A and FortiGate_B are in the same autonomous system.
The administrator wants to dynamically add only route 172.16.1.248/30 on FortiGate_A.
What must the administrator configure?
A. A BGP route map in for 172.16.1.248/30 on FortiGate_A
B. Enable Redistribute Connected in the BGP section on FortiGate_
C. The prefix 172.16.1.248/30 in the BGP Networks section on FortiGate_B
D. A BGP route map out for 172.16.1.248/30 on FortiGate_B

Answer: D

NO.14 Refer to the exhibits.

port 3 configuration on FortiGate

```
config system interface
 edit "port3"
  set vdom "root"
  set ip 10.0.0.1 255.255.255.0
  set allowaccess ping https ssh snmp http fgfm ftm
  set type physical
  set alias "LAN"
  set snmp-index 3
  set mtu-override enable
  set mtu 1000
 next
end
```

KOREADUMPS.COM

The configuration of a user ' s Windows PC, which has a default MTU of 1500 bytes, along with FortiGate interfaces set to an MTU of 1000 bytes, and the results of PC1 pinging server 172.16.0.254 are shown.

Why is the user in Windows PC1 unable to ping server 172.16.0.254 and is seeing the message: Packet needs to be fragmented but DF set?

A. Option ip.flags.mf must be set to enable on FortiGate. The user has to adjust the ping MTU to 1000 to succeed.

B. Fragmented packets must be encrypted. To connect any application successfully, the user must install the Fortinet_CA certificate in the Microsoft Management Console.

C. FortiGate honors the do not fragment bit and the packets are dropped. The user has to adjust the ping MTU to 972 to succeed.

D. The user must trigger different traffic because path MTU discovery techniques do not recognize ICMP payloads.

Answer: C

Explanation:

The issue occurs because FortiGate enforces the " do not fragment " (DF) bit in the packet, and the packet size exceeds the MTU of the network path. When the Windows PC1 (with an MTU of 1500 bytes) attempts to send a 1400-byte packet, the FortiGate interface (with an MTU of 1000 bytes) needs to fragment it. However, since the DF bit is set, FortiGate drops the packet instead of fragmenting it.

To resolve this, the user should adjust the ping packet size to fit within the path MTU. In this case, reducing the packet size to 972 bytes (1000 bytes MTU minus 28 bytes for the IP and ICMP headers)

should allow successful transmission.

NO.15 A company ' s guest internet policy, operating in proxy mode, blocks access to Artificial Intelligence Technology sites using FortiGuard. However, a guest user accessed a page in this category using port 8443.
Which configuration changes are required for FortiGate to analyze HTTPS traffic on nonstandard ports like
8443 when full SSL inspection is active in the guest policy?

A. Add a URL wildcard domain to the website CA certificate and use it in the SSL/SSH Inspection Profile.

B. In the Protocol Port Mapping section of the SSL/SSH Inspection Profile, enter 443, 8443 to analyze both standard (443) and non-standard (8443) HTTPS ports.

C. To analyze nonstandard ports in web filter profiles, use TLSv1.3 in the SSL/SSH Inspection Profile.

D. Administrators can block traffic on nonstandard ports by enabling the SNI check in the SSL/SSH Inspection Profile.

Answer: B

Explanation:
When FortiGate is operating in proxy mode with full SSL inspection enabled, it inspects encrypted HTTPS traffic by default on port 443. However, some websites may use non-standard HTTPS ports (such as 8443), which FortiGate does not inspect unless explicitly configured.
To ensure that FortiGate inspects HTTPS traffic on port 8443, administrators must manually add port 8443 in the Protocol Port Mapping section of the SSL/SSH Inspection Profile. This allows FortiGate to treat HTTPS traffic on port 8443 the same as traffic on port 443, enabling proper inspection and enforcement of FortiGuard category-based web filtering.

NO.16 Refer to the exhibit, which shows the ADVPN IPsec interface representing the VPN IPsec phase 1 from Hub A to Spoke 1 and Spoke 2, and from Hub # to Spoke 3 and Spoke 4.
An administrator must configure an ADVPN using IBGP and EBGP to connect overlay network 1 with 2.
What must the administrator configure in the phase 1 VPN IPsec configuration of the ADVPN tunnels?

A. set auto-discovery-sender enable and set network-id x

B. set auto-discovery-forwarder enable and set remote-as x

C. set auto-discovery-crossover enable and set enforce-multihop enable

D. set auto-discovery-receiver enable and set npu-offload enable

Answer: C

Explanation:
When configuring ADVPN (Auto-Discovery VPN) to connect overlay networks across different hubs using IBGP and EBGP, special configurations are required to allow spokes from different overlay networks to dynamically establish tunnels.
set auto-discovery-crossover enable
This allows cross-hub tunnel discovery in an ADVPN deployment where multiple hubs are used.
Since Hub A and Hub B belong to different overlays, enabling crossover discovery ensures that spokes from one overlay can dynamically create direct tunnels to spokes in the other overlay when needed.

KOREADUMPS.COM

set enforce-multihop enable
This setting ensures that BGP peers using loopback interfaces can establish connectivity even if they are not directly connected.
Multihop BGP sessions are required when using loopback addresses as BGP peer sources because the connection might need to traverse multiple routers before reaching the BGP neighbor.
This is especially useful in ADVPN deployments with multiple hubs, where routes might need to cross from one hub to another.

NO.17 Refer to the exhibit.
An administrator is deploying a hub and spokes network and using OSPF as dynamic protocol.
Which configuration is mandatory for neighbor adjacency?
A. Set bfd enable in the router configuration
B. Set network-type point-to-multipoint in the hub interface
C. Set rfc1583-compatible enable in the router configuration
D. Set virtual-link enable in the hub interface
Answer: B
Explanation:
In a hub-and-spoke topology using OSPF over IPsec VPNs, the point-to-multipoint network type is necessary to establish neighbor adjacencies between the hub and spokes. This network type ensures that OSPF operates correctly without requiring a designated router (DR) and allows dynamic routing updates across the IPsec tunnels.

KOREADUMPS.COM

NO.18 Which two recommendations prevent invalid paths when using zero phase 2 selectors?
A. Routing protocols
B. Exact selectors
C. Aggregate IPsec
D. Assign tunnel IP
Answer: A D
Explanation:
" Zero phase 2 selectors " (also known as 0.0.0.0/0 selectors) are commonly used in dynamic VPN environments like ADVPN to allow any traffic to be routed into the tunnel. However, because the selector itself does not define the network range, there is a risk of traffic being sent down " invalid paths " if the routing table is not properly maintained.
* Assign tunnel IP: For dynamic routing protocols to function over an IPsec tunnel, the tunnel interfaces must have IP addresses assigned.
* Routing protocols: To ensure traffic only follows valid paths, dynamic routing protocols (such as BGP or OSPF) must be used to populate the routing table with the specific prefixes that are actually reachable through each tunnel.
==========

NO.19 A vulnerability scan report has revealed that a user has generated traffic to the website example.com (10.10.10.10) using a weak SSL/TLS version supported by the HTTPS web server.
What can the firewall administrator do to block all outdated SSL/TLS versions on any HTTPS web server to prevent possible attacks on user traffic?
A. Configure the unsupported SSL version and set the minimum allowed SSL version in the HTTPS

settings of the SSL/SSH inspection profile.

B. Enable auto-detection of outdated SSL/TLS versions in the SSL/SSH inspection profile to block vulnerable websites.

C. Install the required certificate in the client ' s browser or use Active Directory policies to block specific websites as defined in the SSL/SSH inspection profile.

D. Use the latest certificate, Fortinet_SSL_ECDSA256, and replace the CA certificate in the SSL/SSH inspection profile.

Answer: A

Explanation:

The best way to block outdated SSL/TLS versions is to configure the SSL/SSH inspection profile to enforce a minimum SSL/TLS version and disable weak SSL versions.

By setting the minimum allowed SSL version in the HTTPS settings of the SSL/SSH inspection profile, FortiGate will:

Block any connection using outdated SSL/TLS versions (such as SSLv3, TLS 1.0, or TLS 1.1).

Enforce secure communication using only strong SSL/TLS versions (such as TLS 1.2 or TLS 1.3).

Protect users from man-in-the-middle (MITM) and downgrade attacks that exploit weak encryption

.

NO.20 What should be configured to provide hardware-accelerated inter-VDOM traffic?

A. VDOM link

B. NPU vlinks

C. VLAN

D. Physical link

Answer: B

Explanation:

Comprehensive and Detailed Explanation From Exact Extract documents and Knowledge:

Standard communication between two Virtual Domains (VDOMs) on the same FortiGate is typically handled by a " VDOM link, " which is a virtual interface pair processed by the CPU. However, for high-bandwidth environments where low latency is critical, Fortinet provides NPU vlinks (Network Processing Unit virtual links).

NPU vlinks are a specific type of hardware-accelerated virtual interface that resides directly on the Network Processor (NP6, NP7, etc.). By using NPU vlinks instead of standard software-based VDOM links, traffic between VDOMs can be offloaded to the NPU hardware, which provides significantly higher throughput and near-zero latency by bypassing the FortiGate ' s main CPU entirely. This is the standard recommendation for accelerating " East-West " traffic in a segmented data center or campus environment.

==========

NO.21 An administrator configured the FortiGate devices in an enterprise network to join the Fortinet Security Fabric. The administrator has a list of IP addresses that must be blocked by the data center firewall. This list is updated daily.

How can the administrator automate a firewall policy with the daily updated list?

A. With FortiNAC

B. With FortiAnalyzer

C. With a Security Fabric automation

KOREADUMPS.COM

D. With an external connector from Threat Feeds

Answer: D

Explanation:

The best way to automate a firewall policy using a daily updated list of IP addresses is by using an external connector from Threat Feeds. This allows FortiGate to dynamically retrieve real-time threat intelligence from external sources and apply it directly to security policies.

By configuring Threat Feeds, the administrator can:

Automatically update firewall policies with the latest malicious IPs daily.

Block traffic from those IPs in real-time without manual intervention.

Integrate with FortiGuard, third-party threat intelligence sources, or custom feeds (CSV, STIX/TAXII, etc.).

NO.22 An administrator wants to scale the IBGP sessions and optimize the routing table in an IBGP network.

Which parameter should the administrator configure?

A. network-import-check

B. ibgp-enforce-multihop

C. neighbor-group

D. route-reflector-client

Answer: D

Explanation:

In an IBGP (Internal BGP) network, all routers must be fully meshed, meaning every router must establish a BGP session with every other router in the same autonomous system (AS). This does not scale well in large networks due to the exponential increase in BGP sessions.

To optimize and scale IBGP, Route Reflectors (RRs) are used. A Route Reflector (RR) reduces the number of IBGP peer connections by allowing a centralized router (RR) to redistribute IBGP routes to other IBGP peers (called clients). This eliminates the need for a full mesh, significantly reducing BGP session overhead.

By configuring the route-reflector-client setting on IBGP peers, an administrator can:

Scale IBGP sessions by reducing the number of direct BGP peer connections.

Optimize the routing table by ensuring routes are efficiently propagated within the IBGP network.

Eliminate the need for full mesh topology, making IBGP more manageable.

NO.23 Refer to the exhibit, which shows the FortiGuard Distribution Network of a FortiGate device.

FortiGuard Distribution Network on FortiGate

KOREADUMPS.COM

License Information

Entitlement	Status	
Advanced Malware Protection	Licensed (Expiration Date: 2025/11/10)	
Attack Surface Security Rating	Licensed (Expiration Date: 2025/11/10)	
IoT Detection Definitions	Version 0.00000	Upgrade Database
Outbreak Package Definitions	Version 5.00036	
Security Rating & CIS Compliance	Licensed (Expiration Date: 2025/11/10)	
Data Loss Prevention (DLP)	Not Licensed	
DLP Signatures	Version 0.00000	
Intrusion Prevention	Licensed (Expiration Date: 2025/11/10)	
IPS Definitions	Version 28.00821	Actions
IPS Engine	Version 7.00539	
Malicious URLs	Version 1.00001	
Botnet IPs	Version 7.03758	View List
Botnet Domains	Version 3.00847	View List
Operational Technology (OT) Security Service	Licensed (Expiration Date: 2025/11/10)	
Web Filtering	Licensed (Expiration Date: 2025/11/10)	
Blocked Certificates	Version 1.00487	
DNS Filtering	Licensed (Expiration Date: 2025/11/10)	
Video Filtering	Licensed (Expiration Date: 2025/11/10)	
SD-WAN Network Monitor	Not Licensed	Purchase
SD-WAN Overlay as a Service	Not Licensed	Purchase

KOREADUMPS.COM

An administrator is trying to find the web filter database signature on FortiGate to resolve issues with websites not being filtered correctly in a flow-mode web filter profile.
Why is the web filter database version not visible on the GUI, such as with IPS definitions?

A. The web filter database is stored locally, but the administrator must run over CLI diagnose autoupdate versions.

B. The web filter database is stored locally on FortiGate, but it is hidden behind the GUI. It requires enabling debug mode to make it visible.

C. The web filter database is not hosted on FortiGate: FortiGate queries FortiGuard or FortiManager for web filter ratings on demand.

D. The web filter database is only accessible after manual syncing with a valid FDS server using diagnose test update info.

Answer: C

Explanation:
Unlike IPS or antivirus databases, FortiGate does not store a full web filter database locally. Instead, FortiGate queries FortiGuard (or FortiManager, if configured) dynamically to classify and filter web content in real time.
Key points:

Web filtering works on a cloud-based model:
When a user requests a website, FortiGate queries FortiGuard servers to check its category and reputation.
The response is then cached locally for faster lookups on repeated requests.
No local web filter database version:
Unlike IPS and antivirus, which download and store signature updates locally, web filtering relies on cloud- based queries.
This is why no database version appears in the GUI.
Flow mode vs Proxy mode:
In proxy mode, FortiGate can cache some web filter data, improving performance.
In flow mode, all queries happen dynamically, with no locally stored database.

NO.24 How does configuring tcp-mss-sender and tcp-mss-receiver affect TCP packets?

A. Header

B. Payload

C. Allow

D. Fragment

Answer: B

Explanation:

Comprehensive and Detailed Explanation From Exact Extract documents and Knowledge:

The TCP Maximum Segment Size (MSS) defines the largest payload (the data portion of the segment, excluding TCP and IP headers) that a device can receive in a single TCP segment.

When you configure tcp-mss-sender and tcp-mss-receiver on a FortiGate interface or tunnel, the FortiGate intercepts the TCP 3-way handshake (SYN and SYN-ACK packets). It modifies the MSS value announced by the hosts to ensure that the resulting segments, once encapsulated (e.g., by IPsec or VXLAN), do not exceed the MTU of the path. By reducing the allowed payload size at the source, FortiGate prevents the need for fragmentation further down the line, which improves overall network efficiency and prevents packet loss in " MTU-tight " environments.

==========

NO.25 Which two parameters must you configure in neighbor-range for ADVPN iBGP deployment?

A. route-reflector-client

B. neighbor-group

C. remote-as

D. update-source

Answer: B C

Explanation:

In an ADVPN deployment using iBGP, the Hub uses dynamic BGP peering to manage a large number of spokes. The neighbor-range configuration is used to define the range of IP addresses from which the Hub will accept dynamic BGP connections.

* neighbor-group: Within the neighbor-range, you must specify a neighbor-group. This group acts as a template that defines the shared settings for all spokes in that range.

* remote-as: The remote-as is a mandatory parameter defined within the associated neighbor-group to identify the autonomous system of the spokes (which, in iBGP, matches the Hub ' s AS). While route- reflector-client is also a required setting for the Hub in this topology, it is a property configured

KOPEADUMPS.COM

under the neighbor-group, whereas neighbor-group and the group ' s remote-as are the foundational requirements for the range to function.
==========

NO.26 Refer to the exhibit, which shows the VDOM section of a FortiGate device.
An administrator discovers that webfilter stopped working in Core1 and Core2 after a maintenance window.
Which two reasons could explain why webfilter stopped working? (Choose two.)
A. The root VDOM does not have access to FortiManager in a closed network.
B. The root VDOM does not have a VDOM link to connect with the Corel and Core2 VDOMs.
C. The Core1 and Core2 VDOMs must also be enabled as Management VDOMs to receive FortiGuard updates
D. The root VDOM does not have access to any valid public FDN.
Answer: B D
Explanation:
Since Core1 and Core2 are not designated as management VDOMs, they rely on the root VDOM for connectivity to external resources such as FortiGuard updates. If the root VDOM lacks a VDOM link to these VDOMs or cannot reach FortiGuard services, security features like web filtering will stop working.

NO.27 Which two options integrate an additional FortiGate for scaling?
A. FGSP
B. FGCP Active-Active
C. VRRP
D. FGCP Active-Passive
Answer: A B
Explanation:
Comprehensive and Detailed Explanation From Exact Extract documents and Knowledge:
In enterprise environments, " scaling " refers to increasing the total throughput or processing capacity of the security fabric.
* FGCP Active-Active (B): This clustering mode uses all members of the cluster to process traffic simultaneously, effectively distributing the UTM/IPS load and scaling performance beyond the limits of a single unit.
* FGSP (A): The FortiGate Session Life Support Protocol allows independent FortiGate units (or clusters) to synchronize session information. This is used to scale performance in asymmetrical routing environments or when using external load balancers to distribute traffic across multiple FortiGates.
* Note: FGCP Active-Passive (D) and VRRP (C) provide redundancy/high availability but do not scale performance, as only one unit processes traffic at any given time.

NO.28 Refer to the exhibits.
The firewall policy ID 1 of the DCFW policy package and the reinstall preview window for the DCFW policy package installation are shown.
Why is FortiManager installing set srcaddr " SSLVPN_tunnel_addr1 " on firewall policy ID 1 when the policy package DCFW has the source address 10.0.5 on the firewall policy ID 1?

KOREADUMPS.COM

A. The reinstall policy package ignores recent changes to the policy layer. The administrator must run the Install Wizard.

B. FortiManager is installing the global policy package, which has higher priority than the ADOM policy package.

C. FortiManager has assigned firewall HQ-DCFW a CLI template that can overwrite configurations at the policy layer.

D. The firewall policy and reinstall preview use the same addresses, but they have different names because of per-device mapping.

Answer: D

Explanation:

In FortiManager, per-device mapping (also known as dynamic mapping) is a fundamental feature used to manage objects that must have different values or names on different FortiGate units within the same ADOM.

According to the Fortinet Enterprise Firewall 7.6 Administrator Study Guide:

* Policy Package View: When an administrator views a policy package in the FortiManager GUI, they see the ADOM-level object . In this case, the object is named or contains the value " 10.0.5 " .

* Reinstall Preview/Installation: When FortiManager prepares the configuration for a specific device (like HQ-DCFW), it checks for any per-device mappings defined for the objects used in the policy.

* The Result: If a mapping exists, FortiManager replaces the ADOM-level object with the device-specific object or value. The reinstall preview shows the actual CLI commands that will be pushed to the device. In the exhibit, it is clear that the ADOM object " 10.0.5 " has been mapped to the device-specific address object " SSLVPN_tunnel_addr1 " for the HQ-DCFW unit.

This mechanism allows an administrator to maintain a single " Golden Policy " package for the entire enterprise while ensuring that device-specific details (like local subnet names or unique tunnel addresses) are correctly applied to each physical or virtual firewall.

NO.29 Refer to the exhibit, which shows a partial troubleshooting command output.

An administrator is extensively using IPsec on FortiGate. Many tunnels show information similar to the output shown in the exhibit.

What can the administrator conclude?

A. IPsec SAs cannot be offloaded.

B. The two IPsec SAs, inbound and outbound, are copied to the NPU.

C. Only the outbound IPsec SA is copied to the NPU.

D. Only the inbound IPsec SA is copied to the NPU.

Answer: A

Explanation:

Based on the FortiGate Infrastructure 7.6 study guide and the Hardware Acceleration technical documentation, the diagnose vpn tunnel list command provides the status of IPsec tunnel offloading to the Network Processor (NPU).

In the provided exhibit, the specific value npu_flag=20 (which corresponds to 0x20 in hexadecimal) indicates that the IPsec Security Association (SA) cannot be offloaded to the NPU. While the NPU may have visibility of the gateway IPs (npu_rgwy and npu_lgwy), the flag itself serves as a diagnostic indicator that the traffic must be processed by the system CPU rather than the hardware accelerator. This lack of offloading typically occurs when the tunnel configuration uses a cipher (encryption algorithm) or an HMAC (authentication algorithm) that is not supported by the specific NPU model

KOREADUMPS.COM

installed in the FortiGate. For example, if a tunnel is configured with a legacy or highly complex algorithm that the NP6 or NP7 chip is not designed to process in hardware, the FortiOS kernel handles the encryption and decryption, resulting in the npu_flag=20 status. Therefore, despite the presence of NPU-related fields, the specific flag value confirms that hardware acceleration is not active for these SAs.

NO.30 Refer to the exhibit, which shows an ADVPN network
An administrator must configure an ADVPN using IBGP and EBGP to connect overlay network 1 with 2.
What two options must the administrator configure in BGP? (Choose two.)
A. set ebgp-enforce-multrhop enable
B. set next-hop-self enable
C. set ibgp-enforce-multihop advpn
D. set attribute-unchanged next-hop
Answer: A B
Explanation:
In this ADVPN (Auto-Discovery VPN) network, there are two hubs (Hub A and Hub B) connected via EBGP, while IBGP is used within each overlay. To ensure proper BGP routing between the overlays, the administrator must configure specific BGP options..
set ebgp-enforce-multihop enable
By default, EBGP requires directly connected neighbors. Since Hub A and Hub B are not directly connected but reach each other over an IPsec tunnel, multihop must be enabled for EBGP sessions to work.
set next-hop-self enable
In IBGP, the next-hop attribute does not change by default. When an IBGP route is advertised from a spoke to another hub or spoke, the next-hop needs to be updated to ensure proper reachability. Enabling next-hop-self forces the BGP speaker to advertise itself as the next-hop, ensuring that all spokes properly reach routes across the overlays.

NO.31 Refer to the exhibit.

KOREADUMPS.COM

Packet capture

```
> Frame 83: 591 bytes on wire (4728 bits), 591 bytes captured (4728 bits)
> Ethernet II, Src: Fortinet_09:00:01 (00:09:0f:09:00:01), Dst: MS-NLB-PhysServer-09_0f:00:00:0a (02:09:0f:00:00:0a)
> Internet Protocol Version 4, Src: 100.65.0.101, Dst: 20.112.250.133
> Transmission Control Protocol, Src Port: 39286, Dst Port: 443, Seq: 1379, Ack: 1, Len: 525
> [3 Reassembled TCP Segments (1903 bytes): #81(1378), #83(525), #84(525)]
v Transport Layer Security
  v TLSv1.3 Record Layer: Handshake Protocol: Client Hello
      Content Type: Handshake (22)
      Version: TLS 1.0 (0x0301)
      Length: 1898
    v Handshake Protocol: Client Hello
        Handshake Type: Client Hello (1)
        Length: 1894
      > Version: TLS 1.2 (0x0303)
        Random: abab5877b95bdaf0dedb5877db0126cb94139de1de21b6acdcac84499eb31eef
        Session ID Length: 32
        Session ID: 05b0087f38936d5d3b166ee5c0c1e7b24659f6d7b5d68c3814c0448d2bdefceb
        Cipher Suites Length: 34
      > Cipher Suites (17 suites)
        Compression Methods Length: 1
      > Compression Methods (1 method)
        Extensions Length: 1787
      > Extension: server_name (len=23) name=www.sharepoint.com
      > Extension: extended_master_secret (len=0)
      > Extension: renegotiation_info (len=1)
      > Extension: supported_groups (len=16)
      > Extension: ec_point_formats (len=2)
      > Extension: session_ticket (len=0)
      > Extension: application_layer_protocol_negotiation (len=14)
      > Extension: status_request (len=5)
      > Extension: delegated_credentials (len=10)
      > Extension: signed_certificate_timestamp (len=0)
      > Extension: key_share (len=1327) Unknown (4588), x25519, secp256r1
      > Extension: supported_versions (len=5) TLS 1.3, TLS 1.2
      > Extension: signature_algorithms (len=24)
      > Extension: psk_key_exchange_modes (len=2)
      > Extension: record_size_limit (len=2)
      > Extension: compress_certificate (len=7)
      > Extension: encrypted_client_hello (len=281)
```

THEEXAMDUMPS.COM

The packet capture output of a client hello message is shown.

You are updating a firewall policy that includes SSL certificate inspection. You are capturing packets from the traffic passing through this firewall policy.

Which two statements about the packet capture are correct? (Choose two.)

A. You can effectively apply an antivirus security profile to this traffic.

B. You can effectively apply a web filtering profile to this traffic.

C. The subject alternative name (SAN) is necessary to apply security profiles.

D. The client supports only TLS versions 1.2 and 1.3.

Answer: B D

Explanation:

Based on the packet capture provided in the exhibit and Fortinet ' s Enterprise Firewall 7.6 inspection standards:

* Web Filtering Effectiveness (B): The exhibit shows the Server Name Indication (SNI) extension within the Client Hello, specifically indicating the hostname www.fortinet.com. When a firewall policy is configured for SSL Certificate Inspection , the FortiGate does not decrypt the payload but instead relies on the SNI or the certificate ' s Subject/SAN fields to identify the website. Therefore, a web filtering profile can effectively categorize and block/allow this traffic based on the domain name found in the SNI.

* TLS Version Support (D): The supported_versions extension is a feature introduced with TLS 1.3 to negotiate the version of the handshake. In the exhibit, the extension explicitly lists two versions: TLS 1.3 (0x0304) and TLS 1.2 (0x0303) . This tells the FortiGate exactly which protocols the client is capable of using for this session.
* Why A is incorrect: Antivirus profiles require Deep SSL Inspection (full decryption) to scan the actual files and payload of the session. Since the policy is using Certificate Inspection , the FortiGate cannot see the cleartext data, rendering the antivirus profile ineffective for this encrypted traffic.
* Why C is incorrect: While the Subject Alternative Name (SAN) is a common way to identify a site, it is found in the server ' s certificate. In this specific capture, the SNI (Server Name Indication) is already present in the Client Hello, which allows the FortiGate to apply security profiles even before the server ' s certificate is seen.

NO.32 Refer to the exhibit, which contains a partial VPN configuration.

```
config vpn ipsec phase1-interface
edit tunnel
set type dynamic
set interface "port1"
set ike-version 2
set keylife 28800
set peertype any
set net-device disable
set proposal aes128-sha256 aes256-sha256
set dpd on-idle
set add-route enable
set psksecret fortinet
next
end
```

What can you conclude from this VPN IPsec phase 1 configuration?

A. This configuration is the best for networks with regular traffic intervals, providing a balance between connectivity assurance and resource utilization.

B. Peer IDs are unencrypted and exposed, creating a security risk.

C. FortiGate will not add a route to its routing or forwarding information base when the dynamic tunnel is negotiated.

D. A separate interface is created for each dial-up tunnel, which can be slower and more resource intensive, especially in large networks.

Answer: A

Explanation:

This IPsec Phase 1 configuration defines a dynamic VPN tunnel that can accept connections from multiple peers. The settings chosen here suggest a configuration optimized for networks with

intermittent traffic patterns while ensuring resources are used efficiently.
Key configurations and their impact:
set type dynamic # This allows multiple peers to establish connections dynamically without needing predefined IP addresses.
set ike-version 2 # Uses IKEv2, which is more efficient and supports features like EAP authentication and reduced rekeying overhead.
set dpd on-idle # Dead Peer Detection (DPD) is triggered only when the tunnel is idle, reducing unnecessary keep-alive packets and improving resource utilization.
set add-route enable # FortiGate automatically adds the route to the routing table when the tunnel is established, ensuring connectivity when needed.
set proposal aes128-sha256 aes256-sha256 # Uses strong encryption and hashing algorithms, ensuring a secure connection.
set keylife 28800 # Sets a longer key lifetime (8 hours), reducing the frequency of rekeying, which is beneficial for stable connections.
Because DPD is set to on-idle, the tunnel will not constantly send keep-alive messages but will still ensure connectivity when traffic is detected. This makes the configuration ideal for networks with regular but non- continuous traffic, balancing security and resource efficiency.

KOREADUMPS.COM

NO.33 You are using Virtual eXtensible LAN (VXLAN) extensively on FortiGate. Which specialized acceleration hardware must you use to improve FortiGate performance? (Choose one answer)
A. NP7
B. SP5
C. ##9
D. NTurbo
Answer: A
Explanation:
Comprehensive and Detailed 150 to 200 words of Explanation From Exact Extract of Enterprise Firewall 7.6 Administrator documents:
According to the FortiOS 7.6 Infrastructure study guide and Hardware Acceleration documentation, the Network Processor 7 (NP7) is the flagship hardware component designed to offload high-performance network traffic from the system CPU. A critical advancement of the NP7 over previous generations (such as the NP6) is its native support for Virtual eXtensible LAN (VXLAN) hardware acceleration.
In enterprise environments where VXLAN is used to extend Layer 2 segments over a Layer 3 network, the encapsulation and decapsulation of VXLAN headers can be computationally expensive. The NP7 provides specialized circuitry to perform these operations at line rate, significantly reducing latency and preventing CPU saturation. This allows the FortiGate to maintain high throughput even when handling complex overlay tunnels.
While the CP9 (Content Processor) (Option C) provides acceleration for SSL/TLS inspection and IPsec encryption, it does not handle network layer encapsulation like VXLAN. NTurbo (Option D) is a software feature that offloads firewall sessions to the network processors but is not a hardware chip itself. The SP5 (Option B) also supports VXLAN offloading in newer mid-range models, but the NP7 is the primary " specialized acceleration hardware " referenced for high-end enterprise performance in the 7.6 curriculum.

NO.34 Refer to the exhibit, which shows the HA status of an active-passive cluster.

An administrator wants FortiGate_B to handle the Core2 VDOM traffic.
Which modification must the administrator apply to achieve this?

A. The administrator must disable override on FortiGate_A.

B. The administrator must change the priority from 100 to 160 for FortiGate_B.

C. The administrator must change the load balancing method on FortiGate_B.

D. The administrator must change the priority from 128 to 200 for FortiGate_B.

Answer: D

Explanation:
The exhibit shows an active-passive HA (high availability) cluster with two virtual clusters, where FortiGate_A is the primary device for both Core1 and Core2. If the goal is to have FortiGate_B take over Core2 traffic, its priority must be higher than FortiGate_A for Virtual Cluster 2.
Currently, FortiGate_A has a priority of 150 for Core2, while FortiGate_B has 128. Increasing FortiGate_B's priority to 200 ensures it becomes the primary for Virtual Cluster 2, taking over the Core2 VDOM traffic while keeping Core1 traffic on FortiGate_A.
Disabling override would prevent forced failovers but wouldn't change the role distribution. Adjusting the load-balancing method is irrelevant in an active-passive setup, as it only applies to active-active configurations.

NO.35 How can FortiGate analyze HTTPS traffic on non-standard port 8443?

A. Proxy mode

B. TLS 1.2

C. Add 443 and 8443 mapping

D. Enable IPS

Answer: C

Explanation:
Comprehensive and Detailed Explanation From Exact Extract documents and Knowledge:
By default, FortiGate ' s SSL/SSH Inspection profile is configured to recognize and inspect HTTPS traffic on the standard port 443. To inspect HTTPS traffic on a non-standard port , such as 8443 , the administrator must modify the protocol-to-port mapping within the security profile.
In the SSL/SSH Inspection configuration (accessible via Policy & Objects > Security Profiles), there is a section for " HTTPS " where additional ports can be specified. By adding 8443 to this list alongside 443, the FortiGate ' s inspection engine (IPS and UTM) is instructed to apply SSL decryption and analysis to any traffic using port 8443 as if it were standard HTTPS traffic. Without this mapping, the firewall would treat the traffic as an unknown encrypted protocol and would not be able to perform deep content analysis.
==========

NO.36 Why do the firewall policy and reinstall preview show different address names during installation?

A. Address mismatch

B. Per-device mapping

C. Object corruption

D. Policy conflict

Answer: B

Explanation:

PDFREADUMPS.COM

FortiManager uses a feature called per-device mapping (also referred to as dynamic mapping) to manage environments where different FortiGate devices require different values for the same object name. For example, an address object named " LAN " might represent 172.16.0.0/24 on one device and 192.168.0.0/24 on another.
When an administrator views the policy package in the FortiManager GUI, they see the common object name used across the ADOM. However, the reinstall preview generates the actual CLI commands that will be pushed to the specific FortiGate unit. This preview reflects the specific mapped value or name defined for that individual device, which is why the names or values may appear different from the generic policy view.
==========

NO.37 Refer to the exhibit, which shows a partial enterprise network.

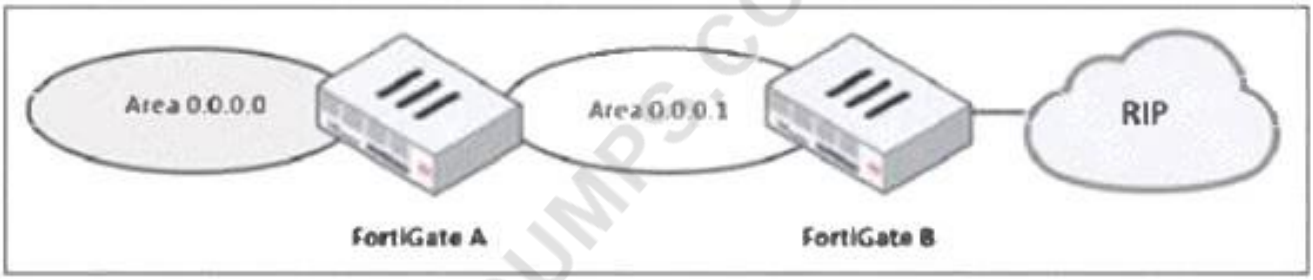

An administrator would like the area 0.0.0.0 to detect the external network.
What must the administrator configure?

A. Enable RIP redistribution on FortiGate B.

B. Configure a distribute-route-map-in on FortiGate B.

C. Configure a virtual link between FortiGate A and B.

D. Set the area 0.0.0.I type to stub on FortiGate A and B.

Answer: A

Explanation:
The diagram shows a multi-area OSPF network where:
FortiGate A is in OSPF Area 0 (Backbone area).
FortiGate B is in OSPF Area 0.0.0.1 and is connected to an RIP network.
To ensure that OSPF Area 0 (0.0.0.0) learns routes from the external RIP network, FortiGate B must redistribute RIP routes into OSPF.
Steps to achieve this:
1. Enable route redistribution on FortiGate B to inject RIP-learned routes into OSPF.
2. This allows OSPF Area 0.0.0.1 to forward RIP routes to OSPF Area 0 (0.0.0.0), making the external network visible.

NO.38 How can you ensure the corporate FortiGate learns the 192.168.1.0/24 network?

A. Add static route

B. Enable RIP

C. Implement OSPF over IPsec

D. Add network locally

Answer: C

Explanation:
In enterprise hub-and-spoke environments, the most scalable and efficient way to ensure the

corporate Hub learns the internal networks of remote branches (such as 192.168.1.0/24) is through the use of dynamic routing protocols. Implementing OSPF over IPsec allows the Hub and Spoke units to exchange routing information automatically through the VPN tunnel. Once the OSPF adjacency is established over the IPsec interface, the spoke will advertise its local 192.168.1.0/24 network to the Hub, which then installs the route into its routing table. This avoids the administrative burden and potential errors associated with manually adding static routes for every remote site.

NO.39 You are trying to efficiently deploy ADVPN within the enterprise network. Which two approaches can facilitate this deployment? (Choose two.)

A. On FortiManager, enable ADVPN on VPN Manager.

B. On FortiGate, connect only the links with the best status.

C. On FortiGate, utilize loopback interfaces to reduce the number of routes and peers.

D. On FortiManager, activate the recommended IPsec tunnel provisioning templates and enable ADVPN.

Answer: A D

Explanation:

Comprehensive and Detailed Explanation From Exact Extract documents and Knowledge:

Efficiently deploying ADVPN in an enterprise environment requires centralized management and automation to handle the large number of spokes.

* VPN Manager (A): In FortiManager, the VPN Manager is a centralized orchestration tool. By creating a VPN community and enabling the " ADVPN " toggle, FortiManager automatically generates the complex configurations required (such as auto-discovery-sender on the Hub and auto-discovery-receiver on the Spokes) and pushes them to all managed devices.

* IPsec Provisioning Templates (D): Provisioning templates allow administrators to define standardized IPsec settings for multiple devices simultaneously. Using these templates to enable ADVPN ensures that every spoke has a consistent configuration, which is critical for the " shortcuts " (dynamic spoke-to- spoke tunnels) to establish correctly.

Options B and C are incorrect because ADVPN ' s primary strength is its ability to handle dynamic links regardless of status (though SD-WAN is often used alongside it) and its reliance on the actual tunnel interfaces rather than loopbacks for the discovery process.

NO.40 Which technology should you use to facilitate dynamic direct tunnels and automatic link optimization in a hub-and-spoke VPN topology?

A. Use static IPsec tunnels

B. Use ADVPN 2.0

C. Use GRE over IPsec

D. Use IP-in-IP tunneling

Answer: B

Explanation:

In FortiOS 7.6, Auto-Discovery VPN (ADVPN) 2.0 is the technology specifically designed to facilitate dynamic direct tunnels (spoke-to-spoke shortcuts) while providing automatic link optimization in hub-and- spoke topologies. While classic ADVPN (1.0) established on-demand tunnels between spokes to reduce latency and hub resource consumption, ADVPN 2.0 introduces advanced capabilities for monitoring and optimizing these links automatically.

Specifically, the Enterprise Firewall 7.6 materials highlight the following:

* Dynamic Direct Tunnels: ADVPN allows spokes to establish secure tunnels directly between themselves without routing all data through the hub, which is critical for reducing latency and preventing the hub from becoming a bottleneck.
* Automatic Link Optimization: ADVPN 2.0 integrates more deeply with SD-WAN and performance-based steering, allowing the network to automatically choose the best available path and optimize performance across those dynamic tunnels.
* Efficiency: This technology is ideal for large-scale enterprise deployments where static tunnels (Option A) would be administratively impossible to manage and GRE (Option C) or IP-in-IP (Option D) would lack the dynamic optimization and security features required for modern hub-and-spoke architectures.

NO.41 Refer to the exhibit, which shows a physical topology and a traffic log.
The administrator is checking on FortiAnalyzer traffic from the device with IP address 10.1.10.1, located behind the FortiGate ISFW device.
The firewall policy in on the ISFW device does not have UTM enabled and the administrator is surprised to see a log with the action Malware, as shown in the exhibit.
What are the two reasons FortiAnalyzer would display this log? (Choose two.)

A. Security rating is enabled in ISFW.

B. ISFW is in a Security Fabric environment.

C. ISFW is not connected to FortiAnalyzer and must go through NGFW-1.

D. The firewall policy in NGFW-1 has UTM enabled.

Answer: B D

Explanation:
From the exhibit, ISFW is part of a Security Fabric environment with NGFW-1 as the Fabric Root. In this architecture, FortiGate devices share security intelligence, including logs and detected threats.
ISFW is in a Security Fabric environment:
Security Fabric allows devices like ISFW to receive threat intelligence from NGFW-1, even if UTM is not enabled locally.
If NGFW-1 detects malware from IP 10.1.10.1 to 89.238.73.97, this information can be propagated to ISFW and FortiAnalyzer.
The firewall policy in NGFW-1 has UTM enabled:
Even though ISFW does not have UTM enabled, NGFW-1 (which sits between ISFW and the external network) does have UTM enabled and is scanning traffic.
Since NGFW-1 detects malware in the session, it logs the event, which is then sent to FortiAnalyzer.

KEEPEADUMPS.COM

NO.42 How will configuring set tcp-mss-sender and set tcp-mss-receiver in a firewall policy affect the size and handling of TCP packets in the network?

A. The maximum segment size permitted in the firewall policy determines whether TCP packets are allowed or denied.

B. Applying commands in a firewall policy determines the largest payload a device can handle in a single TCP segment.

C. The administrator must consider the payload size of the packet and the size of the IP header to configure a correct value in the firewall policy.

D. The TCP packet modifies the packet size only if the size of the packet is less than the one the administrator configured in the firewall policy.

Answer: B
Explanation:
The set tcp-mss-sender and set tcp-mss-receiver commands in a firewall policy allow an administrator to adjust the Maximum Segment Size (MSS) of TCP packets.
This setting controls the largest payload size that a device can handle in a single TCP segment, ensuring that packets do not exceed the allowed MTU (Maximum Transmission Unit) along the network path.
set tcp-mss-sender adjusts the MSS value for outgoing TCP traffic.
set tcp-mss-receiver adjusts the MSS value for incoming TCP traffic.
This helps prevent issues with fragmentation and MTU mismatches, improving network performance and avoiding retransmissions.

NO.43 Refer to the exhibit.
A LAN interface connected from FortiGate to two FortiSwitch devices is shown.
Which two statements about the LAN interface connection shown in the exhibit are correct? (Choose two.)
A. The LAN interface must use an 802.3ad type interface.
B. FortiGate is using an SD-WAN-type interface to connect to one FortiSwitch device with MCLAG.
C. The connection is using a FortiLink interface.
D. You must enable Spanning Tree Protocol (STP) or Rapid STP (RSTP) on FortiGate and FortiSwitch to avoid layer 2 loopbacks.
Answer: A C
Explanation:
Based on the provided exhibit and the Fortinet Enterprise Firewall 7.6 Administrator curriculum, the architecture shown is a standard FortiLink deployment used to manage FortiSwitch units directly from the FortiGate.
* FortiLink Interface (C): The exhibit explicitly shows the configuration of a logical interface designated as a FortiLink interface. This is a specialized Fortinet proprietary management protocol that allows the FortiGate to discover, authorize, and manage FortiSwitch devices. Once FortiLink is established, the FortiGate can manage switch ports, VLANs, and security policies on the switches as if they were local interfaces.
* 802.3ad Aggregate (A): To provide both redundancy and increased bandwidth, FortiLink is typically configured as an 802.3ad (Link Aggregation) aggregate interface. This allows the FortiGate to use multiple physical ports (in this case, port1 and port2) as a single logical pipe to the switches. In the exhibit ' s configuration snippet, the set type aggregate command is clearly visible, which confirms that an 802.3ad link is being used to facilitate the connection.
Regarding the incorrect options:
* Option B is incorrect because SD-WAN is used for steering traffic across multiple WAN paths and is not the protocol used for internal switch management via FortiLink.
* Option D is incorrect because while STP/RSTP is active on the FortiSwitches to prevent loops within the switching fabric, the FortiGate does not typically " run " STP on the FortiLink aggregate interface itself; rather, the link aggregation (LACP) and the FortiLink logic handle the path redundancy and loop prevention between the firewall and the managed switches.

NO.44 A user reports that their computer was infected with malware after accessing a secured HTTPS website.

KOFEADUMPS.COM

However, when the administrator checks the FortiGate logs, they do not see that the website was detected as insecure despite having an SSL certificate and correct profiles applied on the policy.
How can an administrator ensure that FortiGate can analyze encrypted HTTPS traffic on a website?

A. The administrator must enable reputable websites to allow only SSL/TLS websites rated by FortiGuard web filter.

B. The administrator must enable URL extraction from SNI on the SSL certificate inspection to ensure the TLS three-way handshake is correctly analyzed by FortiGate.

C. The administrator must enable DNS over TLS to protect against fake Server Name Indication (SNI) that cannot be analyzed in common DNS requests on HTTPS websites.

D. The administrator must enable full SSL inspection in the SSL/SSH Inspection Profile to decrypt packets and ensure they are analyzed as expected.

Answer: D

Explanation:
FortiGate, like other security appliances, cannot analyze encrypted HTTPS traffic unless it decrypts it first. If only certificate inspection is enabled, FortiGate can see the certificate details (such as the domain and issuer) but cannot inspect the actual web content.
To fully analyze the traffic and detect potential malware threats:
Full SSL inspection (Deep Packet Inspection) must be enabled in the SSL/SSH Inspection Profile.
This allows FortiGate to decrypt the HTTPS traffic, inspect the content, and then re-encrypt it before forwarding it to the user.
Without full SSL inspection, threats embedded in encrypted traffic may go undetected.

NO.45 A company that acquired multiple branches across different countries needs to install new FortiGate devices on each of those branches. However, the IT staff lacks sufficient knowledge to implement the initial configuration on the FortiGate devices.
Which three approaches can the company take to successfully deploy advanced initial configurations on remote branches? (Choose three.)

A. Use metadata variables to dynamically assign values according to each FortiGate device.

B. Use provisioning templates and install configuration settings at the device layer.

C. Use the Global ADOM to deploy global object configurations to each FortiGate device.

D. Apply Jinja in the FortiManager scripts for large-scale and advanced deployments.

E. Add FortiGate devices on FortiManager as model devices, and use ZTP or LTP to connect to FortiGate devices.

Answer: A B E

Explanation:
Use metadata variables to dynamically assign values according to each FortiGate device:
Metadata variables in FortiManager allow device-specific configurations to be dynamically assigned without manually configuring each FortiGate. This is especially useful when deploying multiple devices with similar base configurations.
Use provisioning templates and install configuration settings at the device layer:
Provisioning templates in FortiManager provide a structured way to configure FortiGate devices. These templates can define interfaces, policies, and settings, ensuring that each device is correctly configured upon deployment.
Add FortiGate devices on FortiManager as model devices, and use ZTP or LTP to connect to FortiGate devices:

KOREADUMPS.COM

Zero-Touch Provisioning (ZTP) and Local Touch Provisioning (LTP) help automate the deployment of FortiGate devices. By adding devices as model devices in FortiManager, configurations can be pushed automatically when devices connect for the first time, reducing manual effort.

NO.46 Refer to the exhibit.
A FortiGate segmented into VDOMs is shown. You must ensure effective and accelerated internet access for all of the VDOMs in this enterprise network. How can you achieve this? (Choose one answer)

A. Connect a physical interface from each VDOM to the root VDOM.

B. Create VDOM links.

C. Configure network processing unit (NPU) vlinks.

D. Create VLANs over network processing unit (NPU) vlinks.

Answer: C
Explanation:
Comprehensive and Detailed 150 to 200 words of Explanation From Exact Extract of Enterprise Firewall 7.6 Administrator documents:
According to the FortiOS 7.6 Administration Guide and the FortiGate Infrastructure study materials, inter- VDOM communication can be achieved using either software-based VDOM links or hardware -accelerated NPU VDOM links (vlinks).
While standard VDOM links (Option B) allow traffic to pass between VDOMs, they are processed by the system CPU, which can become a bottleneck in high-throughput environments. To ensure accelerated internet access as specified in the requirements, NPU vlinks (Option C) must be used. NPU vlinks are virtual interfaces created in pairs that allow traffic to be offloaded to the FortiGate's Network Processor (NP6, NP7, etc.), significantly reducing latency and CPU overhead.
In the provided exhibit, the root VDOM has direct internet access, while VDOM1 and VDOMn do not. By configuring NPU vlinks between the non-root VDOMs and the root VDOM, you create a hardware-accelerated path. Traffic from the internal VDOMs is sent through the vlink to the root VDOM, which then forwards it to the Internet. This " hub-and-spoke " VDOM architecture, powered by NPU acceleration, ensures that all VDOMs share the internet connection without sacrificing performance.

NO.47 Refer to the exhibit, which shows a LAN interface connected from FortiGate to two FortiSwitch devices.
What two conclusions can you draw from the corresponding LAN interface? (Choose two.)

A. You must enable STP or RSTP on FortiGate and FortiSwitch to avoid layer 2 loopbacks.

B. The LAN interface must use a 802.3ad type interface.

C. This connection is using a FortiLInk to manage VLANs on FortiGate.

D. FortiGate is using an SD-WAN-type interface to connect to a FortiSwitch device with MCLAG.

Answer: B C
Explanation:
The diagram shows a FortiGate connected to two FortiSwitches, which suggests the use of FortiLink, Fortinet
' s protocol for managing switches directly from a FortiGate. Since multiple connections are being used, the LAN interface must be set to 802.3ad (LAG) mode to aggregate the links for redundancy and load balancing.
This setup allows FortiGate to handle VLAN assignments dynamically, as seen with VLAN 10

(192.168.15.1
/24). FortiLink ensures seamless integration between FortiGate and FortiSwitches, making STP unnecessary because Fortinet ' s MCLAG prevents loops at Layer 2. SD-WAN, on the other hand, is used for WAN interfaces and does not apply to switch connectivity in this scenario.

NO.48 The IT department discovered during the last network migration that all zero phase selectors in phase 2 IPsec configurations impacted network operations.
What are two valid approaches to prevent this during future migrations? (Choose two.)

A. Use routing protocols to specify allowed subnets over the tunnel.

B. Configure an IPsec-aggregate to create redundancy between each firewall peer.

C. Clearly indicate to the VPN which segments will be encrypted in the phase two selectors.

D. Configure an IP address on the IPsec interface of each firewall to establish unique peer connections and avoid impacting network operations.

Answer: A C

Explanation:
Zero phase selectors in IPsec Phase 2 mean that no specific traffic selectors (subnets) are defined, allowing any traffic to be encrypted through the VPN tunnel. This can cause unintended traffic forwarding issues and disrupt network operations.
To prevent this from happening during future migrations:
Using routing protocols ensures that only specific subnets are advertised over the tunnel. Dynamic routing (such as OSPF or BGP) helps define which networks should use the tunnel, preventing unintended traffic from being encrypted.
Clearly defining phase 2 selectors avoids the problem of encrypting all traffic by explicitly stating the allowed source and destination subnets. This prevents the tunnel from affecting unrelated network traffic.

NO.49 Refer to the exhibit.

```
FortiGate # get router info ospf status
 Routing Process "ospf 0" with ID 0.0.0.5
 Process uptime is 0 minute
 Process bound to VRF default
 Conforms to RFC2328, and RFC1583Compatibility flag is enabled
 Supports only single TOS(TOS0) routes
 Supports opaque LSA
 Do not support Restarting
 This router is an ASBR
```

The partial output of an OSPF command is shown. You are checking the OSPF status of a FortiGate device when you receive the output shown in the exhibit. Based on the output, which two statements about FortiGate are correct? (Choose two answers)

A. FortiGate is a backup designated router.

B. FortiGate supports OSPF ECMP.

FORCEADUMPS.COM

C. FortiGate is in the area 0.0.0.5.
D. FortiGate can inject external routing information.
Answer: B D
Explanation:
Comprehensive and Detailed 150 to 200 words of Explanation From Exact Extract of Enterprise Firewall 7.6 Administrator documents:
Based on the FortiOS 7.6 Infrastructure study guide and official documentation regarding OSPF monitoring, the command output get router info ospf status provides critical details about the OSPF process.
Injecting External Information (Option D): The last line of the exhibit explicitly states, " This router is an ASBR " (Autonomous System Boundary Router). By definition in the OSPF protocol, an ASBR is a router that connects the OSPF network to another routing domain (such as BGP, Static, or Connected routes) and is responsible for injecting external routing information into the OSPF domain.
OSPF ECMP Support (Option B): The output indicates that the OSPF process " Conforms to RFC2328 " .
RFC 2328 is the standard for OSPFv2, which includes the capability for Equal-Cost Multi-Path (ECMP). In FortiOS, the OSPF engine supports multi-path routing by default, allowing the device to utilize multiple paths to the same destination if they share the same cost.
Option A is incorrect because the output does not indicate the router ' s DR/BDR election status on a specific segment. Option C is incorrect because " ID 0.0.0.5 " refers to the Router ID, not the OSPF Area ID.

NO.50 How should you adjust MTU values to resolve encapsulation issues?
A. All interfaces
B. Wired only
C. FortiGate only
D. Controlled environment
Answer: D
Explanation:
Encapsulation (such as IPsec, VXLAN, or FGSP synchronization) adds overhead to standard packets, often causing them to exceed the standard MTU of 1500 bytes and leading to fragmentation or dropped packets.
The Enterprise Firewall curriculum notes that while " jumbo packets " can be detected as possible attacks by IPS, adjusting MTU and MSS values to account for encapsulation should ideally be performed in a controlled environment . This allows administrators to accurately measure the required overhead and verify that the adjustments do not cause unintended network instability or performance degradation across the entire infrastructure.
==========

NO.51 Which two statements about the LAN interface connection are correct?
A. 802.3ad
B. SD-WAN
C. FortiLink
D. Enable STP
Answer: A C

KOREADUMPS.COM

Explanation:
Comprehensive and Detailed Explanation From Exact Extract documents and Knowledge:
In an enterprise architecture, LAN interface connections on a FortiGate (particularly for Internal Segmentation Firewalls or Data Center Firewalls) typically utilize two key technologies for connectivity and management:
* 802.3ad (Aggregate Interfaces): To provide redundancy and high-speed data transfer, firewalls connect to multiple physical switches using 802.3ad link aggregation, combining multiple physical interfaces into a single logical interface.
* FortiLink: This is the proprietary protocol used for the management of FortiSwitch units by the FortiGate unit. When the LAN connection is to a FortiSwitch, FortiLink is used to extend the FortiGate ' s control over the switch ports as if they were local ports on the firewall itself.
==========

NO.52 What action can be taken on a FortiGate to block traffic using IPS protocol decoders, focusing on network transmission patterns and application signatures?
A. Use the DNS filter to block application signatures and protocol decoders.
B. Use application control to limit non-URL-based software handling.
C. Enable application detection-based SD-WAN rules.
D. Configure a web filter profile in flow mode.
Answer: B
Explanation:
FortiGate ' s IPS protocol decoders analyze network transmission patterns and application signatures to identify and block malicious traffic. Application Control is the feature that allows FortiGate to detect, classify, and block applications based on their behavior and signatures, even when they do not rely on traditional URLs.
Application Control works alongside IPS protocol decoders to inspect packet payloads and enforce security policies based on recognized application behaviors.
It enables granular control over non-URL-based applications such as P2P traffic, VoIP, messaging apps, and other non-web-based protocols that IPS can identify through protocol decoders.
IPS and Application Control together can detect evasive or encrypted applications that might bypass traditional firewall rules.

NO.53 An administrator must standardize the deployment of FortiGate devices across branches with consistent interface roles and policy packages using FortiManager.
What is the recommended best practice for interface assignment in this scenario?
A. Enable metadata variables to use dynamic configurations in the standard interfaces of FortiManager.
B. Use the Install On feature in the policy package to automatically assign different interfaces based on the branch.
C. Create interfaces using device database scripts to use them on the same policy package of FortiGate devices.
D. Create normalized interface types per-platform to automatically recognize device layer interfaces based on the FortiGate model and interface name.
Answer: A
Explanation:

FOREDUMPS.COM

When standardizing the deployment of FortiGate devices across branches using FortiManager, the best practice is to use metadata variables. This allows for dynamic interface configuration while maintaining a single, consistent policy package for all branches.
Metadata variables in FortiManager enable interface roles and configurations to be dynamically assigned based on the specific FortiGate device.
This ensures scalability and consistent security policy enforcement across all branches without manually adjusting interface settings for each device.
When a new branch FortiGate is deployed, metadata variables automatically map to the correct physical interfaces, reducing manual configuration errors.

NO.54 Refer to the exhibit.
The partial output of an OSPF command is shown. While checking the OSPF status of FortiGate, you receive the output shown in the exhibit. Based on the output, which two statements about FortiGate are correct?
(Choose two answers)
A. FortiGate has OSPF ECMP enabled.
B. FortiGate is a backup designated router.
C. FortiGate injects external routing information.
D. FortiGate is connected to multiple areas.
Answer: A D
Explanation:
Comprehensive and Detailed 150 to 200 words of Explanation From Exact Extract of Enterprise Firewall 7.6 Administrator documents:
Based on the FortiOS 7.6 Infrastructure study guide and official documentation regarding OSPF monitoring, the command output get router info ospf status provides critical details about the OSPF process.
Multiple Areas (Option D): The last line of the exhibit explicitly states, " This router is an ABR " (Area Border Router). By definition in the OSPF protocol, an ABR is a router that is connected to multiple OSPF areas, typically Area 0 (the backbone) and at least one other non-backbone area.
OSPF ECMP (Option A): The output indicates that the OSPF process " Conforms to RFC2328 " . RFC 2328 is the standard for OSPFv2, which includes the capability for Equal-Cost Multi-Path (ECMP). In FortiOS, when OSPF is enabled and multiple routes to the same destination have the same cost, ECMP is supported by default unless specifically limited by the maximum-paths configuration. The mention of this RFC compliance in the status output confirms the engine ' s capability and support for multi-path routing.
Option C is incorrect because the output does not label the device as an ASBR (Autonomous System Boundary Router), which would be required to inject external routing information. Option B is incorrect because " ABR " refers to area hierarchy, not the election status (DR/BDR) on a specific network segment.

NO.55 Based on the TLS handshake shown, what can be inferred about the client?
A. Supports TLS 1.0 only
B. Supports TLS 1.2 and TLS 1.3
C. Supports SSLv3
D. Supports DTLS

KORDEADUMPS.COM

Answer: B
Explanation:
In modern TLS handshakes (starting with TLS 1.3), the Client Hello packet includes a specific extension called supported_versions. This extension lists all the TLS versions the client is capable of using. Typically, a client supporting TLS 1.3 will also list TLS 1.2 for backward compatibility to ensure it can successfully negotiate a secure connection with servers that have not yet upgraded. When both versions are present in the supported_versions field, it signifies that the client is capable of both TLS 1.2 and TLS 1.3 . This is a critical component for FortiGate when performing deep SSL/TLS inspection, as the firewall must understand the negotiated version to decrypt the traffic for security analysis.

NO.56 What must be done for RIP routes to propagate into OSPF?
A. Enable on FortiGate_A
B. Enable on FortiGate_B
C. Disable RIP
D. Static route
Answer: A
Explanation:
To have routes from one protocol (RIP) appear in another (OSPF), you must configure route redistribution on the router that acts as the Autonomous System Boundary Router (ASBR). In typical enterprise lab scenarios (such as those described in Lab 5), the primary boundary router (FortiGate_A or HQ-NGFW) is where redistribution is enabled to inject external routes into the OSPF backbone. By enabling redistribution for RIP under the OSPF process on this device, the RIP-learned routes are converted into OSPF External LSAs and propagated throughout the OSPF domain.
==========

KOREADUMPS.COM

NO.57 Refer to the exhibit, which shows a hub and spokes deployment.

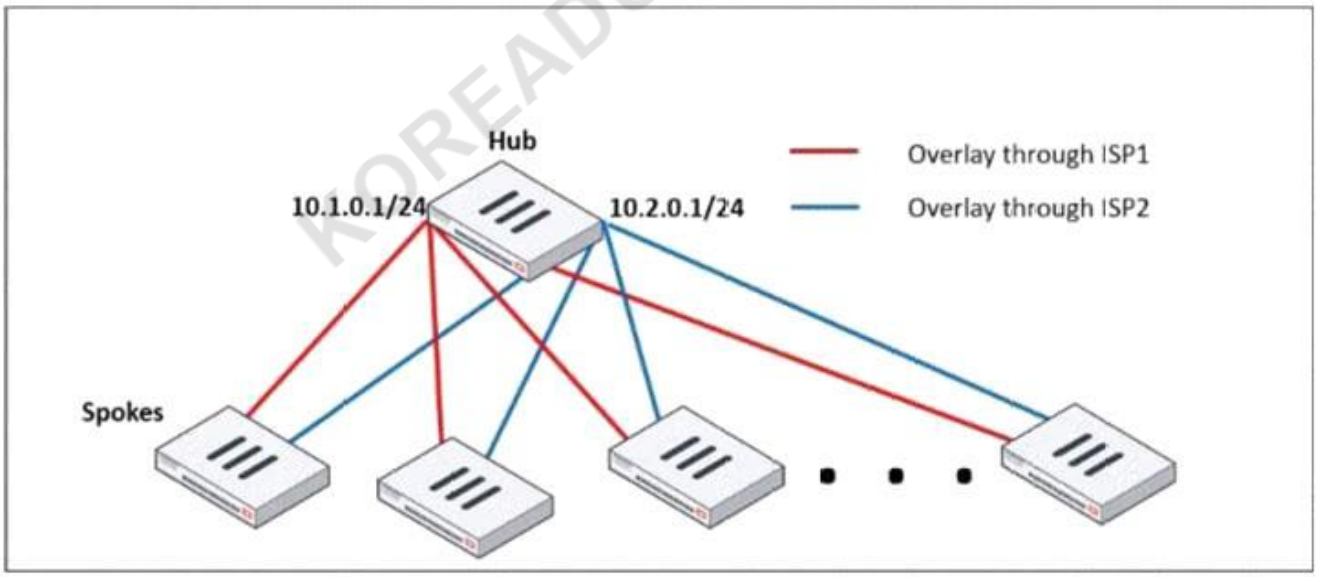

An administrator is deploying several spokes, including the BGP configuration for the spokes to connect to the hub.
Which two commands allow the administrator to minimize the configuration? (Choose two.)
A. neighbor-group
B. route-reflector-client

C. neighbor-range
D. ibgp-enforce-multihop
Answer: A C
Explanation:
neighbor-group:
This command is used to group multiple BGP neighbors with the same configuration, reducing redundant configuration.
Instead of defining individual BGP settings for each spoke, the administrator can create a neighbor-group and apply the same policies, reducing manual work.
neighbor-range:
This command allows the configuration of a range of neighbor IPs dynamically, reducing the need to manually define each spoke neighbor.
It automatically adds BGP neighbors that match a given prefix, simplifying deployment.

NO.58 Why does FortiGate_B not show ICMP sessions when running: get system session list | grep icmp in an FGSP cluster?
A. session-pickup is disabled
B. session-pickup-connectionless is disabled
C. FGSP is misconfigured
D. ICMP is unsupported
Answer: B
Explanation:
In an FGSP (FortiGate Session Life Support Protocol) cluster, sessions are synchronized between members to provide seamless failover or handle asymmetric traffic. By default, FortiGate only synchronizes connection- oriented sessions (TCP). For connectionless sessions such as ICMP or UDP , synchronization must be explicitly enabled using the session-pickup-connectionless setting under the HA configuration. Without this setting, connectionless traffic remains local to the device that processed it and is not reflected in the session table of peer members.
==========

NO.59 How do you allow IPS inspection of inbound HTTPS traffic?
A. Enable HTTP
B. Enable HTTPS mapping
C. Enable SMTPS
D. Disable inspection
Answer: B
Explanation:
Encrypted HTTPS traffic is opaque to standard Intrusion Prevention Systems (IPS). To inspect inbound traffic destined for an internal web server, the FortiGate must perform SSL/TLS offloading or inspection.
HTTPS mapping (often configured via a Virtual IP or VIP) allows the FortiGate to terminate the encrypted session using the server ' s certificate, decrypt the traffic, and then pass it through the IPS engine for signature analysis. Once the cleartext content is inspected, the unit can identify and block threats like PHP code injection that would otherwise remain hidden within the encrypted stream.
==========

KOREADUMPS.COM

NO.60 To secure your enterprise network traffic, which step does FortiGate perform first, when handling the first packets of a session? (Choose one answer)

A. Installation of the session key in the network processor (NP)

B. Decryption

C. A reverse path forwarding (RPF) check

D. IP integrity header checking

Answer: D

Explanation:

Comprehensive and Detailed 150 to 200 words of Explanation From Exact Extract of Enterprise Firewall 7.6 Administrator documents:

Based on the FortiOS 7.6 Administration Guide and the Life of a Packet documentation (Parallel Path Processing), the FortiGate follows a specific, hardcoded sequence when processing the first packet of a new session. This process is divided into several stages: Ingress, Kernel, and Egress.

The very first stage is Ingress, where all packets accepted by a network interface are processed by the TCP/IP stack. Immediately following this, the packet must pass through IP integrity header checking. This step involves reading the packet headers to verify that the packet is a valid protocol (TCP, UDP, ICMP, etc.) and that the header length is correct. This sanity check is performed before any other security functions, such as decryption (which occurs later in the Ingress stage) or the Reverse Path Forwarding (RPF) check (which occurs even later during the Routing step in the Kernel stage).

Installation of the session key (Option A) only occurs after the packet has matched a firewall policy and the session has been fully established and offloaded to the NPU. Therefore, IP integrity header checking is the absolute first security-related validation performed on an incoming packet.

KORELDUMPS.COM

NO.61 Refer to the exhibit, which shows an ADVPN network.

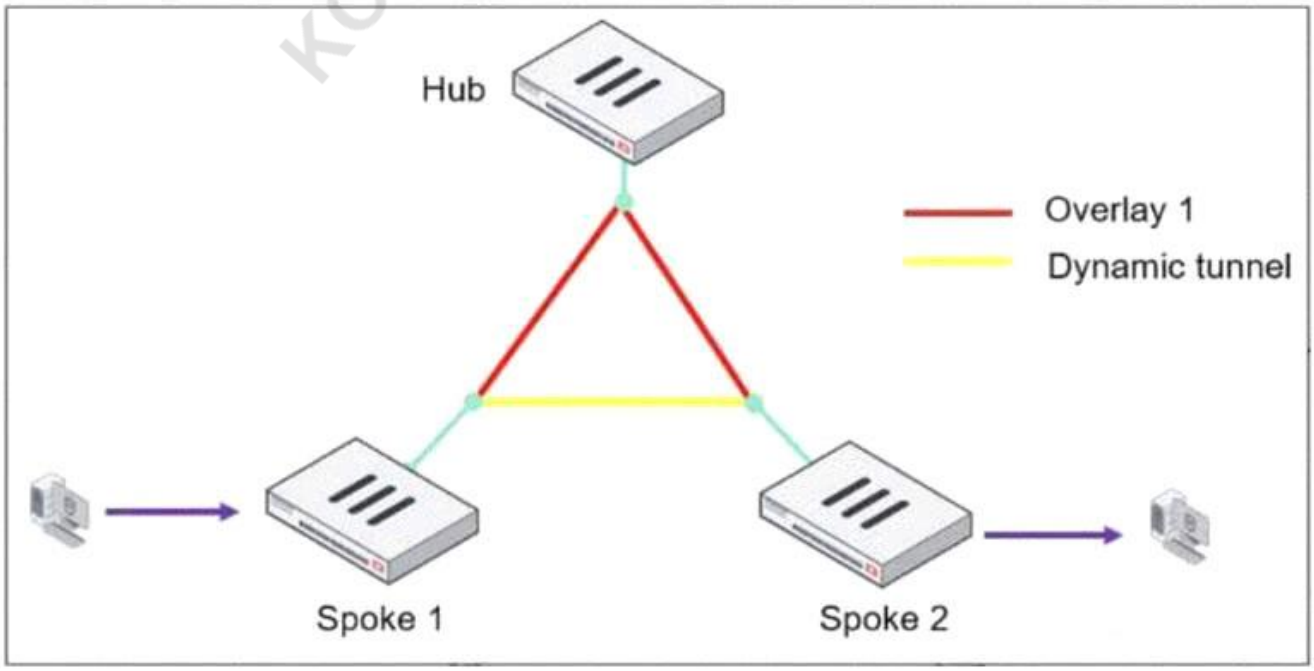

The client behind Spoke-1 generates traffic to the device located behind Spoke-2.

What is the first message that the hub sends to Spoke-1 to bring up the dynamic tunnel?

A. Shortcut query

B. Shortcut offer

C. Shortcut reply
D. Shortcut forward
Answer: B
Explanation:
In an ADVPN (Auto-Discovery VPN) network, a dynamic VPN tunnel is established on-demand between spokes to optimize traffic flow and reduce latency.
Process:
1. Traffic Initiation:
A client behind Spoke-1 sends traffic to a device behind Spoke-2.
The traffic initially flows through the hub, following the pre-established overlay tunnel.
2. Hub Detection:
The hub detects that Spoke-1 is communicating with Spoke-2 and determines that a direct shortcut tunnel between the spokes can optimize the connection.
3. Shortcut Offer:
The hub sends a " Shortcut Offer " message to Spoke-1, informing it that a direct dynamic tunnel to Spoke-2 is possible.
4. Tunnel Establishment:
Spoke-1 and Spoke-2 then negotiate and establish a direct IPsec tunnel for communication.

NO.62 What happens when an SSO user logs into a downstream FortiGate?
A. Denied
B. Readonly admin
C. Super admin
D. No account
Answer: B
Explanation:
In a Fortinet Security Fabric where SAML SSO is enabled, the root FortiGate acts as the Identity Provider (IdP) for the fabric members. When an administrator logs into a downstream device (such as an ISFW or DCFW) using their Security Fabric credentials, their level of access is determined by the administration profile assigned during the setup. By default, for security reasons and to maintain the root ' s role as the primary management point, downstream fabric members often restrict these users to a readonly admin profile (specifically super_admin_readonly), which prevents them from having Login Read-Write options on those devices.
==========

NO.63 How can you automate updates to firewall policies using a daily updated IP block list?
A. Automation stitch
B. External Feeds
C. CLI scripts
D. ZTNA
Answer: B
Explanation:
Comprehensive and Detailed Explanation From Exact Extract documents and Knowledge:
External Feeds (also known as Fabric Connectors or Threat Feeds) are used to dynamically import and update lists of IP addresses, domain names, or URLs from a remote server.

KOFEADUMPS.COM

This feature allows FortiGate to automatically pull a daily updated IP block list from an external source and use it within a firewall policy. Because the FortiGate periodically checks the external server for updates, the firewall policy objects are refreshed automatically without requiring manual intervention, CLI scripts, or configuration reloads, making it the ideal solution for maintaining up-to-date block lists.
==========

NO.64 An administrator must minimize CPU and RAM use on a FortiGate firewall while also enabling essential security features, such as web filtering and application control for HTTPS traffic.
Which SSL inspection setting helps reduce system load while also enabling security features, such as web filtering and application control for encrypted HTTPS traffic?

A. Use full SSL inspection to thoroughly inspect encrypted payloads.

B. Disable SSL inspection entirely to conserve resources.

C. Configure SSL inspection to handle HTTPS traffic efficiently.

D. Enable SSL certificate inspection mode to perform basic checks without decrypting traffic.

Answer: D

Explanation:
To minimize CPU and RAM usage while still enforcing security features like web filtering and application control, SSL certificate inspection mode is the best choice.
SSL certificate inspection allows FortiGate to inspect only the SSL/TLS handshake, including the Server Name Indication (SNI) and certificate details, without decrypting the full encrypted payload.
This enables features like web filtering and application control because FortiGate can determine the destination website or application based on SNI and certificate information.
It significantly reduces system load compared to full SSL inspection, which requires full decryption and re- encryption of traffic.

KOREADUMPS.COM

NO.65 Which two features can you use to segment an enterprise network?

A. IPsec

B. ZTNA

C. VDOM

D. VLAN

Answer: C D

Explanation:
Network segmentation is a critical security practice used to divide a larger network into smaller, isolated sub- networks to improve security and performance.
* VDOM (Virtual Domain): A FortiGate unit can be partitioned into multiple virtual domains (VDOMs) that act as independent units. This provides complete virtualization of the security configuration and network segmentation within a single physical device.
* VLAN (Virtual Local Area Network): A VLAN is a logical subdivision of a network at Layer 2 that segregates devices into separate broadcast domains. The study guide explicitly lists " VLANs, VDOMs, zone-based interfaces, and micro-segmentation " as key features for internal segmentation firewalls (ISFW).
==========

NO.66 Refer to the exhibits.

The system administrator settings configured on a root FortiGate and the Security Fabric settings configured on a downstream FortiGate are shown.
When prompted to sign in with Security Fabric to the downstream FortiGate, a user enters the single sign-on (SSO) provider credentials.
What is the result?

A. The downstream FortiGate creates an SSO administrator account for AdminSSO with the super_admin profile.

B. The downstream FortiGate creates an SSO administrator account for AdminSSO with the super_admin_readonly profile.

C. The user is prompted to create an administrator account for AdminSSO.

D. The downstream FortiGate relies on the root FortiGate and does not create an administrator account.

Answer: B

Explanation:
In a Fortinet Security Fabric environment using SAML Single Sign-On (SSO), the root FortiGate typically acts as the SAML Identity Provider (IdP) or the primary gateway to one, while the downstream FortiGates act as SAML Service Providers (SP).
Based on the logic provided in the Fortinet Enterprise Firewall 7.6 Administrator Study Guide and the provided exhibits:
* Identity Verification: When the user attempts to log into the downstream FortiGate via SSO, the authentication is handled by the root FortiGate.
* Profile Assignment: Although the user AdminSSO may have super_admin privileges on the root FortiGate (as shown in the first exhibit), the downstream FortiGate controls what level of access that user receives locally.
* Default Fabric Settings: In the downstream FortiGate ' s Security Fabric configuration (shown in the second exhibit), there is a setting for the " Default login profile " for SAML SSO users. In standard Security Fabric deployments, this is default-set to super_admin_readonly .
* Account Creation: Upon the first successful SSO login, the downstream FortiGate automatically creates a local " SSO administrator " account entry for that user to track their session and permissions.
It applies the default profile specified in the Fabric settings.
Therefore, even though the user is a super_admin on the root, they will be restricted to the super_admin_readonly profile on the downstream device because that is the profile assigned by the downstream SP ' s configuration.

NO.67 Refer to the exhibit, which shows the ADVPN network topology and partial BGP configuration.

KOREATOMPS.COM

ADVPN network topology

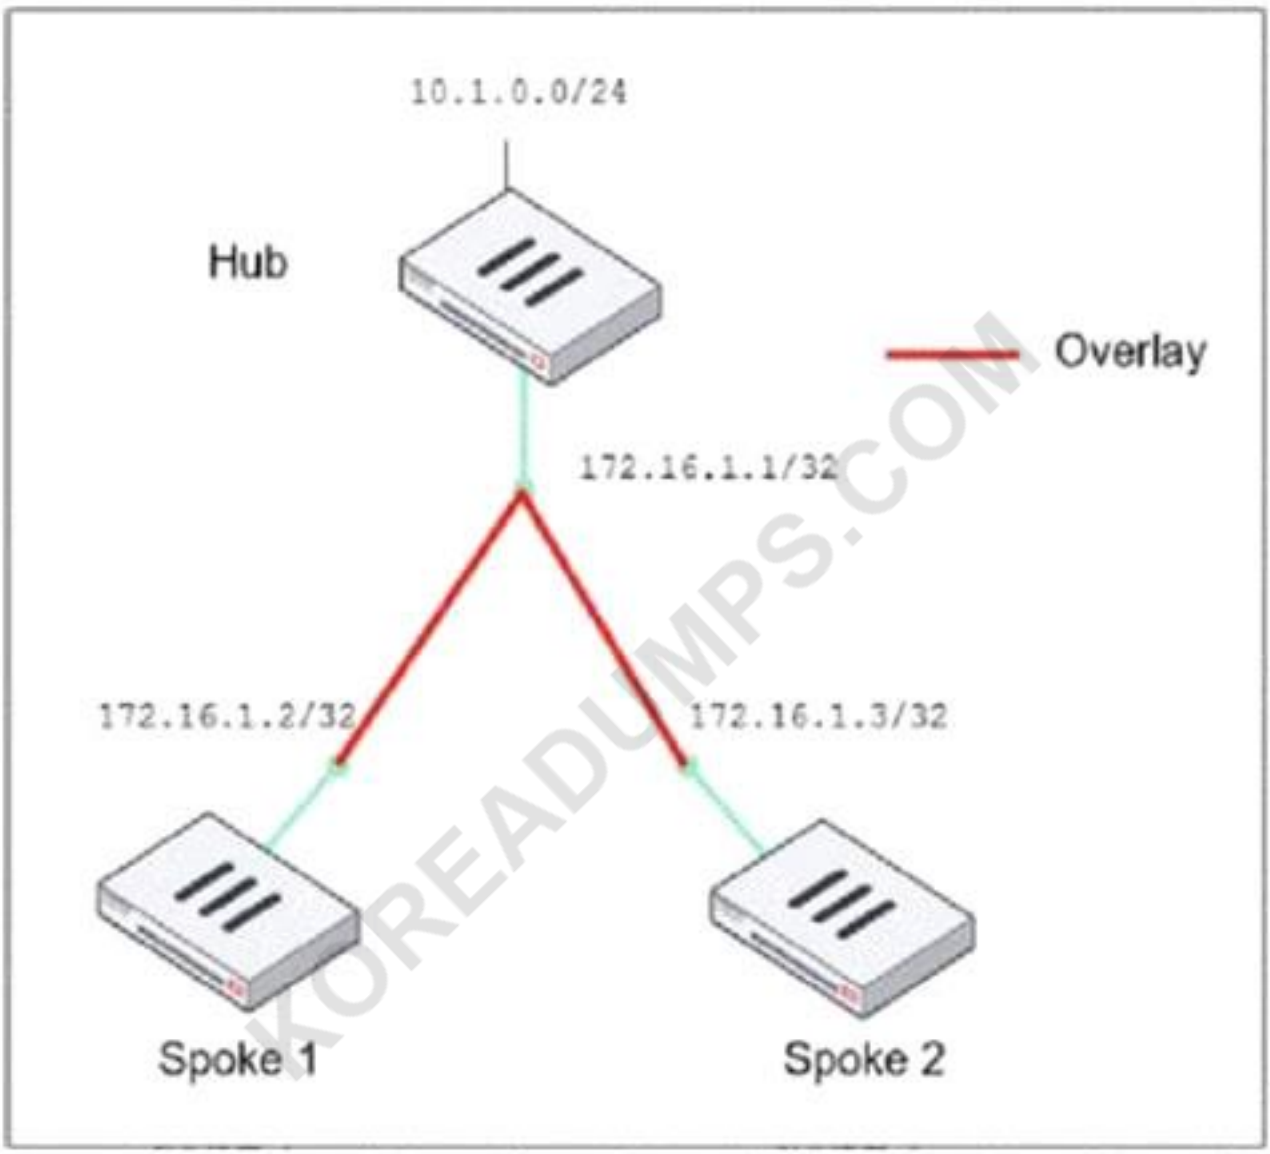

KOREADUMPS.COM

Partial BGP configuration

```
Hub # config router bgp
set as 65100
set router-id 172.16.1.1
config neighbor-group
    edit "advpn"
    set remote-as 65100
    ...
    end
config neighbor-range
    edit 1
    end
config network
    ..
end
```

KOREADUMPS.COM

Which two parameters must an administrator configure in the config neighbor range for spokes shown in the exhibit? (Choose two.)

A. set max-neighbor-num 2

B. set neighbor-group advpn

C. set route-reflector-client enable

D. set prefix 172.16.1.0 255.255.255.0

Answer: B D

Explanation:

In the given ADVPN (Auto-Discovery VPN) topology, BGP is being used to dynamically establish routes between spokes. The neighbor-range configuration is crucial for simplifying BGP peer setup by automatically assigning neighbors based on their IP range.

set neighbor-group advpn

The neighbor-group parameter is used to apply pre-defined settings (such as AS number) to dynamically discovered BGP neighbors.

The advpn neighbor-group is already defined in the configuration, and assigning it to the neighbor-range ensures consistent BGP settings for all spoke neighbors.

set prefix 172.16.1.0 255.255.255.0

This command allows dynamic BGP peer discovery by defining a range of potential neighbor IPs (172.16.1.1 - 172.16.1.255).

Since each spoke has a unique /32 IP within this subnet, this ensures that any spoke within the 172.16.1.0/24 range can automatically establish a BGP session with the hub.

NO.68 Refer to the exhibit, which shows a network diagram showing the addition of site 2 with an overlapping network segment to the existing VPN IPsec connection between the hub and site 1.

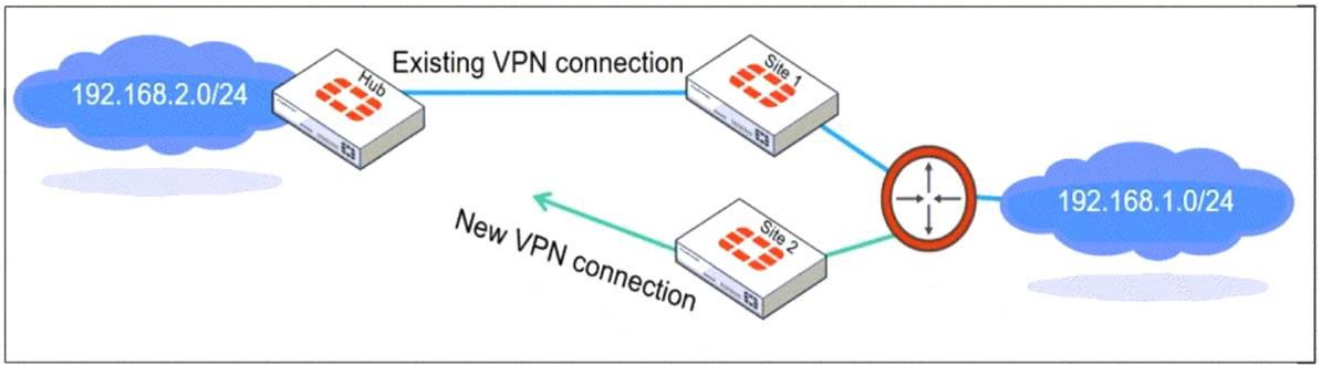

Which IPsec phase 2 configuration must an administrator make on the FortiGate hub to enable equal-cost multi-path (ECMP) routing when multiple remote sites connect with overlapping subnets?

A. Set route-overlap to either use-new or use-old

B. Set net-device to ecmp

C. Set single-source to enable

D. Set route-overlap to allow

Answer: A

Explanation:

When multiple remote sites connect to the same hub using overlapping subnets, FortiGate needs to determine which route should be used for traffic forwarding. The route-overlap setting in IPsec Phase 2 allows FortiGate to handle this scenario by deciding whether to keep the existing route (use-old) or replace it with a new route (use-new).

In an ECMP (Equal-Cost Multi-Path) routing setup, both routes should be retained and balanced, but FortiGate does not support ECMP directly over overlapping routes in IPsec Phase 2. Instead, an administrator must decide which connection takes precedence using route-overlap settings.

NO.69 Which two options should you consider to scale performance using an additional FortiGate?

A. FGSP

B. FGCP Active-Active

C. VRRP

D. FGCP Active-Passive

Answer: A B

Explanation:

Comprehensive and Detailed Explanation From Exact Extract documents and Knowledge:

To scale performance beyond a single unit, Fortinet provides two primary clustering and synchronization methods:

* FGCP Active-Active: This mode distributes network traffic among all members of the cluster, allowing the combined processing power of multiple units to handle higher throughput and security inspection loads.

* FGSP (FortiGate Session Life Support Protocol): This protocol is used to synchronize session information between independent FortiGate units or clusters. It is commonly used in large-scale environments where external load balancers distribute traffic across multiple FortiGates, ensuring that if traffic for a session is asymmetric (sent to one unit but returned to another), the return unit has the necessary session state to allow the traffic. In contrast, FGCP Active-Passive provides

KOREADUMPS.COM

redundancy but does not scale performance as the secondary unit remains idle.
==========

NO.70 Refer to the exhibit, which shows a corporate network and a new remote office network. An administrator must integrate the new remote office network with the corporate enterprise network.
What must the administrator do to allow routing between the two networks?
A. The administrator must implement BGP to inject the new remote office network into the corporate FortiGate device
B. The administrator must configure a static route to the subnet 192.168.l.0/24 on the corporate FortiGate device.
C. The administrator must configure virtual links on both FortiGate devices.
D. The administrator must implement OSPF over IPsec on both FortiGate devices.
Answer: D
Explanation:
In this scenario, the corporate network and the new remote office network need to communicate over the Internet, which requires a secure and dynamic routing method. Since both networks are using OSPF (Open Shortest Path First) as the routing protocol, the best approach is to establish an OSPF over IPsec VPN to ensure secure and dynamic route propagation.
OSPF is already running on the corporate network, and extending it over an IPsec tunnel allows dynamic route exchange between the corporate FortiGate and the remote office FortiGate. IPsec provides encryption for traffic over the Internet, ensuring secure communication. OSPF over IPsec eliminates the need for manual static routes, allowing automatic route updates if networks change. The new remote office ' s 192.168.1.0/24 subnet will be advertised dynamically to the corporate network without additional configuration.

NO.71 Why does the ISDB block layers 3 and 4 of the OSI model when applying content filtering? (Choose two.)
A. FortiGate has a predefined list of all IPs and ports for specific applications downloaded from FortiGuard.
B. The ISDB blocks the IP addresses and ports of an application predefined by FortiGuard.
C. The ISDB works in proxy mode, allowing the analysis of packets in layers 3 and 4 of the OSI model.
D. The ISDB limits access by URL and domain.
Answer: A B
Explanation:
The Internet Service Database (ISDB) in FortiGate is used to enforce content filtering at Layer 3 (Network Layer) and Layer 4 (Transport Layer) of the OSI model by identifying applications based on their predefined IP addresses and ports.
FortiGate has a predefined list of all IPs and ports for specific applications downloaded from FortiGuard:
FortiGate retrieves and updates a predefined list of IPs and ports for different internet services from FortiGuard.
This allows FortiGate to block specific services at Layer 3 and Layer 4 without requiring deep packet inspection.
The ISDB blocks the IP addresses and ports of an application predefined by FortiGuard:

KOREADUMPS.COM

ISDB works by matching traffic to known IP addresses and ports of categorized services.
When an application or service is blocked, FortiGate prevents communication by denying traffic based on its destination IP and port number.

NO.72 Refer to the exhibits.
The routing tables of FortiGate_A and FortiGate_B, and a network topology are shown.
Why does FortiGate_B have only one external route available to 100.75.5.1/32?
A. rf c-1583-compatible is not set to enable on FortiGate_B.
B. The subnet 10.0.11.0/24 is not located in the FortiGate_B area.
C. FortiGate_A advertises only one external route to FortiGate_B
D. The route to 100.75.5.1/32 shown on FortiGate B has the lowest cost.
Answer: A
Explanation:
The issue described is a classic OSPF path selection behavior dictated by the version of the OSPF standard the device is following.
* RFC 1583 vs. RFC 2328:
* RFC 1583: This older standard does not distinguish between intra-area and inter-area paths when calculating the cost to an ASBR (Autonomous System Boundary Router) or an external route.
* RFC 2328: This newer standard (which is the default behavior in FortiOS 7.6) introduces a preference for intra-area paths over inter-area paths to an ASBR. This is designed to prevent routing loops that could occur in specific complex topologies.
* Analysis of the Exhibits:
* FortiGate_A (HQ): Its routing table (image_bd08a0.jpg) shows two equal-cost paths (O E2) to the external destination 100.75.5.1/32, one via ISP1 (10.0.1.1) and one via ISP2 (10.0.11.1).
* FortiGate_B (Branch): Its routing table (image_bd08a4.jpg) only shows a single path via FortiGate_A (10.0.2.1).
* Topology: FortiGate_A acts as the ABR/ASBR. In this specific scenario (taken from the Enterprise Firewall Study Guide), one of the paths advertised by FortiGate_A reaches FortiGate_B as an inter-area path while the other is seen as an intra-area path.
* Why only one route?
* By default, rfc-1583-compatible is disabled on FortiGate. Therefore, it follows RFC 2328 logic.
* Because RFC 2328 strictly prefers the intra-area path to the ASBR over the inter-area path, FortiGate_B discards the inter-area path and only installs the intra-area one in its routing table.
* To allow FortiGate_B to use both paths (ECMP) for the external route, the administrator must enable RFC 1583 compatibility using the following CLI command:
```
config router ospf
set rfc1583-compatible enable
end
```
* Once enabled, the FortiGate will stop preferring path types and will instead use the cost to determine the best path (or paths), allowing both routes to appear if the costs are equal.

NO.73 An administrator applied a block-all IPS profile for client and server targets to secure the server, but the database team reported the application stopped working immediately after.
How can an administrator apply IPS in a way that ensures it does not disrupt existing applications in the network?
A. Use an IPS profile with all signatures in monitor mode and verify patterns before blocking.

KOREADUMPS.COM

B. Limit the IPS profile to server targets only to avoid blocking connections from the server to clients.
C. Select flow mode in the IPS profile to accurately analyze application patterns.
D. Set the IPS profile signature action to default to discard all possible false positives.
Answer: A
Explanation:
Applying an aggressive IPS profile without prior testing can disrupt legitimate applications by incorrectly identifying normal traffic as malicious. To prevent disruptions while still monitoring for threats:
Enable IPS in " Monitor Mode " first:
This allows FortiGate to log and analyze potential threats without actively blocking traffic.
Administrators can review logs and fine-tune IPS signatures to minimize false positives before switching to blocking mode.
Verify and adjust signature patterns:
Some signatures might trigger unnecessary blocks for legitimate application traffic.
By analyzing logs, administrators can disable or modify specific rules causing false positives.

NO.74 Refer to the exhibit, which shows an enterprise network connected to an internet service provider.

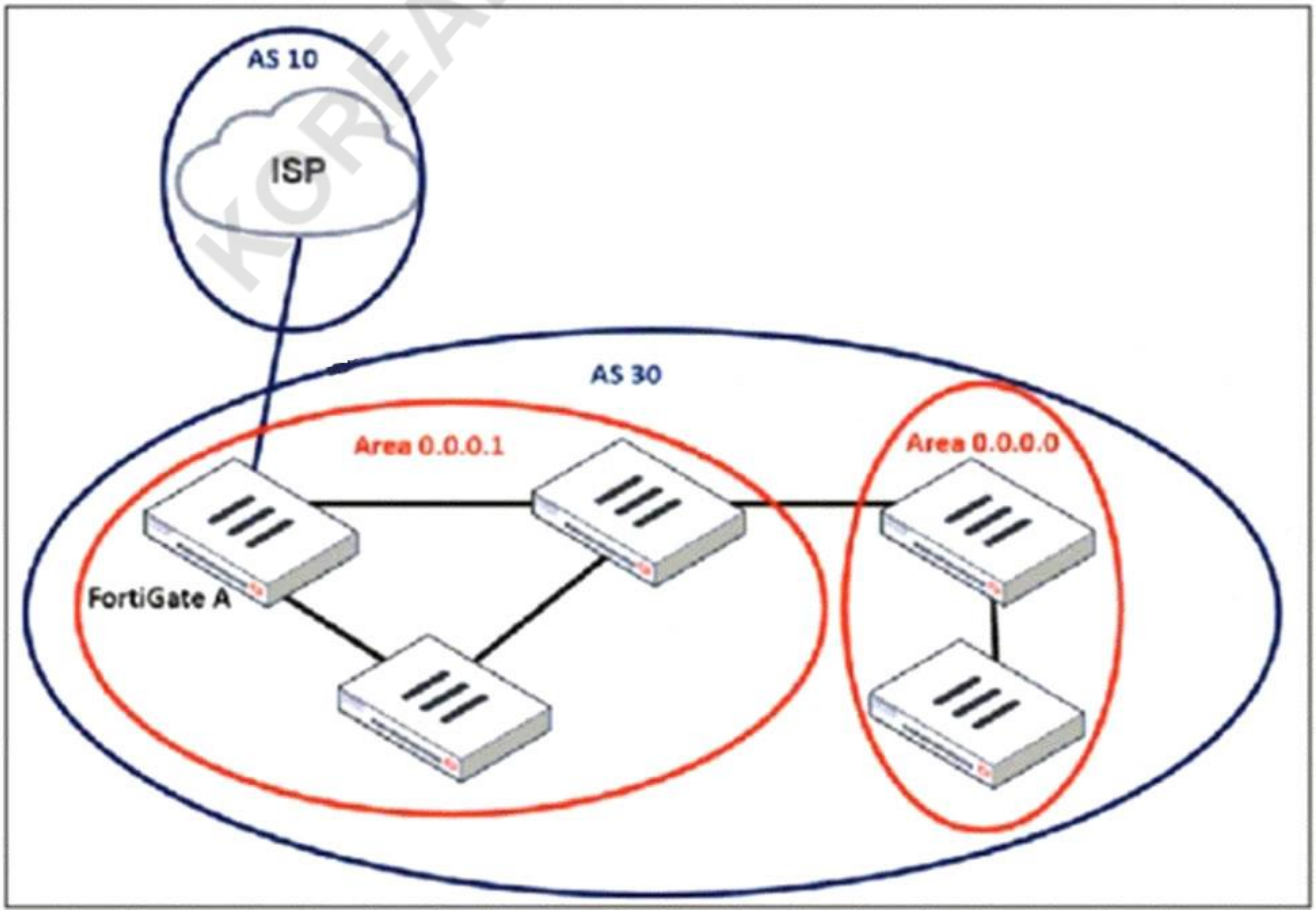

An administrator must configure a loopback as a BGP source to connect to the ISP.
Which two commands are required to establish the connection? (Choose two.)
A. ebgp-enforce-multihop
B. update-source
C. ibgp-enforce-multihop

D. recursive-next-hop

Answer: A B

Explanation:

When configuring a loopback interface as the BGP source for connecting to an ISP, two important settings must be applied:

1. Enable EBGP Multihop (ebgp-enforce-multihop)

BGP normally expects directly connected neighbors, but since the ISP and FortiGate A are using loopback interfaces, packets will not be sent directly between their physical interfaces.

The ebgp-enforce-multihop command allows BGP to form an eBGP peering over multiple hops.

2. Set the Update Source (update-source)

Since FortiGate is using a loopback interface as the source, the update-source command ensures that BGP updates originate from the loopback interface rather than a physical interface.

This is essential because BGP peers must match the source IP with the configured neighbor address.

NO.75 Which two approaches facilitate efficient ADVPN deployment?

A. VPN Manager enable

B. Best link only

C. Loopback

D. IPsec templates

Answer: A D

Explanation:

Comprehensive and Detailed Explanation From Exact Extract documents and Knowledge:

To deploy ADVPN (Auto-Discovery VPN) efficiently across an enterprise, Fortinet recommends centralized orchestration and standardized provisioning:

* VPN Manager (A): Within FortiManager, the VPN Manager is the primary tool for orchestrating complex VPN topologies. It allows administrators to define a Hub-and-Spoke community and enable ADVPN features (like shortcuts) globally across all participating devices from a single interface.

* IPsec templates (D): These templates (found under Provisioning Templates in FortiManager) allow administrators to define standard Phase 1 and Phase 2 settings once and apply them to multiple model devices or device groups. This ensures consistency across the enterprise and significantly reduces the manual configuration required for each spoke.

==========

NO.76 Refer to the exhibit, which shows a command output.

```
FortiGate_B # get system session list | grep icmp

FortiGate_B #
```

FortiGate_A and FortiGate_B are members of an FGSP cluster in an enterprise network.

While testing the cluster using the ping command, the administrator monitors packet loss and found that the session output on FortiGate_B is as shown in the exhibit.

What could be the cause of this output on FortiGate_B?

FOREADUMPS.COM

A. The session synchronization is encrypted.
B. session-pickup-connectionless is set to disable on FortiGate_B.
C. FortiGate_B is configured in passive mode.
D. FortiGate_A and FortiGate_B have the same standalone-group-id value.
Answer: B
Explanation:
The Fortinet FGSP (FortiGate Session Life Support Protocol) cluster allows session synchronization between two FortiGate devices to provide seamless failover. However, ICMP (ping) is a connectionless protocol, and by default, FortiGate does not synchronize connectionless sessions unless explicitly enabled.
In the exhibit:
The command get system session list | grep icmp on FortiGate_B returns no output, meaning that ICMP sessions are not being synchronized from FortiGate_A.
If session-pickup-connectionless is disabled, FortiGate_B will not receive ICMP sessions, causing packet loss during failover.

NO.77 How can you ensure FortiGate can analyze encrypted HTTPS traffic?
A. Enable SNI
B. Enable full SSL inspection
C. Set TLS 1.2
D. Enable proxy
Answer: B
Explanation:
According to the FortiGate security profile documentation, standard certificate inspection (which uses SNI) only examines the certificate header and does not allow the firewall to see the actual payload of an encrypted session. To identify attacks such as PHP code injection or malware hidden within HTTPS traffic, the FortiGate must be configured with full SSL inspection (also known as deep SSL inspection). This process requires the FortiGate to act as a man-in-the-middle, decrypting the traffic using a trusted CA certificate, inspecting the cleartext content for threats, and then re-encrypting it before sending it to the destination.
==========

NO.78 Why does FortiGate_B install only one OSPF external route?
A. ECMP disabled
B. Single advertisement
C. Area mismatch
D. Route filtering
Answer: A
Explanation:
Comprehensive and Detailed Explanation From Exact Extract documents and Knowledge:
OSPF external routes (Type 5 LSAs) can be learned from multiple paths. For a FortiGate to install multiple equal-cost paths into the routing table-a feature known as ECMP (Equal-Cost Multi-Path) - the OSPF process must have ECMP enabled and the maximum path count must be set to a value greater than one. If ECMP is disabled or the limit is set to 1, the FortiGate will select only the single best path (based on cost and RFC 1583/2328 selection rules) to install in the routing table, even if

KOFEXDUMPS.COM

multiple valid advertisements exist.

NO.79 Refer to the exhibit, which contains the partial output of an OSPF command.
An administrator is checking the OSPF status of a FortiGate device and receives the output shown in the exhibit.
What two conclusions can the administrator draw? (Choose two.)
A. The FortiGate device is a backup designated router
B. The FortiGate device is connected to multiple areas
C. The FortiGate device injects external routing information
D. The FortiGate device has OSPF ECMP enabled
Answer: B C
Explanation:
The output of the get router info ospf status command provides key information about the OSPF (Open Shortest Path First) configuration on the FortiGate device.
The FortiGate device is connected to multiple areas
The output states: " This router is an ABR "
ABR (Area Border Router) means the device is connected to multiple OSPF areas and maintains routing information between them.
This confirms that the FortiGate is not just in one area, but at least one backbone area (Area 0) and another OSPF area.
The FortiGate device injects external routing information
The output states: " Supports opaque LSA "
Opaque LSAs (Type 9, 10, and 11) are used in OSPF extensions, including those that support external route injection.
Typically, ABRs or ASBRs (Autonomous System Boundary Routers) inject external routes, allowing routes from other routing protocols (such as BGP or static routes) to be advertised into OSPF.

KOREDUMPS.COM

NO.80 During the maintenance window, an administrator must sniff all the traffic going through a specific firewall policy, which is handled by NP6 interfaces. The output of the sniffer trace provides just a few packets.
Why is the output of sniffer trace limited?
A. The traffic corresponding to the firewall policy is encrypted.
B. auto-asic-off load is set to enable in the firewall policy,
C. inspection-mode is set to proxy in the firewall policy.
D. The option npudbg is not added in the diagnose sniff packet command.
Answer: B
Explanation:
FortiGate devices with NP6 (Network Processor 6) acceleration offload traffic directly to hardware, bypassing the CPU for improved performance. When auto-asic-offload is enabled in a firewall policy, most of the traffic does not reach the CPU, which means it won ' t be captured by the standard sniffer trace command.
Since NP6-accelerated traffic is handled entirely in hardware, only a small portion of initial packets (such as session setup packets or exceptions) might be seen in the sniffer output. To capture all packets, the administrator must disable hardware offloading using:
config firewall policy

edit < policy_ID >
set auto-asic-offload disable
end
Disabling ASIC offload forces traffic to be processed by the CPU, allowing the sniffer tool to capture all packets.

NO.81 Refer to the exhibit.
The routing tables of FortiGate_A and FortiGate_B are shown. FortiGate_A and FortiGate_B are in the same autonomous system.
The administrator wants to dynamically add only route 172.16.1.248/30 on FortiGate_A.
What must the administrator configure?

A. The prefix 172.16.1.248/30 in the BGP Networks section on FortiGate_B

B. A BGP route map out for 172.16.1.248/30 on FortiGate_B

C. Enable Redistribute Connected in the BGP section on FortiGate_B.

D. A BGP route map in for 172.16.1.248/30 on FortiGate_A

Answer: B
Explanation:
FortiGate_A and FortiGate_B are in the same autonomous system (AS), and FortiGate_A does not currently have route 172.16.1.248/30 in its routing table. However, FortiGate_B has this route as a connected route.
To dynamically advertise only 172.16.1.248/30 from FortiGate_B to FortiGate_A, the administrator must configure a BGP route map out on FortiGate_B that specifically permits only this prefix.
A BGP route map out on FortiGate_B controls which routes FortiGate_B advertises to FortiGate_A. If no filtering is applied, FortiGate_B might advertise all BGP-learned and connected routes, which is not what the administrator wants. The route map should include a prefix-list that explicitly allows only 172.16.1.248/30 and denies everything else.

KOREDUMPS.COM

NO.82 Which parameter should be configured to scale iBGP sessions?

A. neighbor-group

B. recursive-next-hop

C. route-reflector-client

D. neighbor-range

Answer: D
Explanation:
Comprehensive and Detailed Explanation From Exact Extract documents and Knowledge:
In large-scale enterprise deployments like ADVPN (Auto-Discovery VPN), managing a huge number of individual BGP neighbor statements is not scalable. To scale the establishment and management of iBGP sessions , FortiGate utilizes the neighbor-range parameter.
According to the ADVPN configuration guide, the neighbor-range command allows a Hub to listen for and automatically accept dynamic BGP peering requests from any Spoke within a specified IP prefix range. This eliminates the need for the administrator to manually define each Spoke ' s IP address on the Hub, which is essential for scaling to hundreds or thousands of branches. While route-reflector-client (Option C) is a parameter used within the neighbor-group (Option A) to allow the Hub to reflect routes, it is the neighbor- range that technically scales the Hub ' s ability to handle the large volume of incoming sessions.

==========

NO.83 Which specialized acceleration hardware must you use for VXLAN?
A. CPU
B. NTurbo
C. CP10
D. NPU7
Answer: D
Explanation:
Comprehensive and Detailed Explanation From Exact Extract documents and Knowledge:
VXLAN (Virtual Extensible LAN) is a Layer 2 overlay scheme on a Layer 3 network. It uses MAC-in-UDP encapsulation, which adds 50 bytes of overhead to each packet. Processing this encapsulation and decapsulation in software (CPU) is resource-intensive and can lead to performance bottlenecks.
The NPU7 (Network Processor 7) is specifically designed to provide hardware acceleration for various tunnel protocols, including VXLAN. It allows the FortiGate to offload the encapsulation/decapsulation process to the hardware, enabling wire-speed performance and reducing the load on the main CPU.
While older NPUs had limited support, the NPU7 architecture includes dedicated engines for VXLAN offloading, making it the required hardware for high-performance VXLAN environments.
==========

NO.84 Refer to the exhibit, which shows an enterprise network connected to an internet service provider.
The administrator must configure the BGP section of FortiGate A to give internet access to the enterprise network.
Which command must the administrator use to establish a connection with the internet service provider?
A. config neighbor
B. config redistribute bgp
C. config router route-map
D. config redistribute ospf
Answer: A
Explanation:
In BGP (Border Gateway Protocol), a neighbor (peer) configuration is required to establish a connection between two BGP routers. Since FortiGate A is connecting to the ISP (Autonomous System 10) from AS 30, the administrator must define the ISP ' s BGP router as a neighbor.
The config neighbor command is used to:
Define the ISP ' s IP address as a BGP peer
Specify the remote AS (AS 10 in this case)
Allow BGP route exchanges between FortiGate A and the ISP

FOREADUMPS.COM

NO.85 In which two ways does FortiGate utilize the Internet Service Database (ISDB)?
A. Blocks IPs and ports
B. Limits by URL
C. Works in proxy mode
D. Provides predefined IPs and ports

Answer: A D
Explanation:
The Internet Service Database (ISDB) is a robust repository maintained by FortiGuard that contains the public IP addresses and port numbers of thousands of popular cloud-based services and applications.
FortiGate utilizes the ISDB in two primary ways:
* Provides predefined IPs and ports: It functions as a dynamic database of known services (like Microsoft 365 or AWS), saving administrators from the impossible task of manually creating and updating hundreds of address objects for these services.
* Blocks (or allows) IPs and ports: These ISDB objects can be used directly as the " Destination " in firewall policies. This allows the FortiGate to effectively block or allow traffic based on the specific IP ranges and ports associated with that internet service, providing granular control over application-level traffic at the network layer.

NO.86 A user reports that their computer was infected with malware after accessing a secured HTTPS website.
However, when you check the FortiGate logs, you see that FortiGate did not detect the website as insecure, despite having an SSL certificate and the correct profiles applied on the policy.
How can you ensure that FortiGate can analyze encrypted HTTPS traffic on a website?
A. Enable full SSL inspection in the SSL/SSH inspection profile to decrypt packets
B. Set min-allowed-ssl-version to tls-1.2.
C. Enable server certificate SNI check to protect against unsecured HTTPS websites.
D. Set inspection-mode to proxy.
Answer: A
Explanation:
Standard certificate inspection (which relies on the SNI) only identifies the destination domain; it does not allow the FortiGate to see the actual content of the encrypted session. As noted in the lab documentation, " certificate inspection on its own does not help HQ-DCFW to see the encrypted traffic " . To identify and block malware hidden within HTTPS traffic, the FortiGate must be configured with full SSL inspection (also known as deep inspection). This process involves the FortiGate acting as a man-in-the-middle to decrypt the packets, scan the payload for threats using the applied security profiles (like Antivirus or IPS), and then re- encrypt the traffic before sending it to the host. Without full decryption, the unit " will not decrypt packets to analyze if there is a possible attack, " allowing malware to bypass security layers.
==========

NO.87 Refer to the exhibit, which contains a partial command output.

KOFTADUMPS.COM

```
FortiGate # get router info bgp neighbors
VRF 0 neighbor table:
BGP neighbor is 100.65.4.1, remote AS 65300, local AS 65200, external link
  BGP version 4, remote router ID 0.0.0.0
  BGP state = Idle
  Not directly connected EBGP
  Last read        , hold time is 180, keepalive interval is 60 seconds
  Configured hold time is 180, keepalive interval is 60 seconds
  Received 0 messages, 0 notifications, 0 in queue
  Sent 0 messages, 0 notifications, 0 in queue
  Route refresh request: received 0, sent 0
  NLRI treated as withdraw: 0
  Minimum time between advertisement runs is 30 seconds
  Update source is Loopback
```

KOREADUMPS.COM

The administrator has configured BGP on FortiGate. The status of this new BGP configuration is shown in the exhibit.
What configuration must the administrator consider next?

A. Configure a static route to 100.65.4.1.

B. Configure the local AS to 65300.

C. Contact the remote peer administrator to enable BGP

D. Enable ebgp-enforce-multihop.

Answer: D

Explanation:
From the BGP neighbor status output, the key issue is that BGP is stuck in the " Idle " state, meaning the FortiGate is unable to establish a BGP session with its peer 100.65.4.1 (Remote AS 65300).
The output also shows:
" Not directly connected EBGP " # This means the BGP peer is not on the same subnet, requiring multihop BGP.
" Update source is Loopback " # Since a loopback interface is used, FortiGate must be configured to allow BGP neighbors over multiple hops.
To resolve this issue, the administrator must enable ebgp-enforce-multihop, which allows BGP sessions to be established even when the neighbors are not directly connected.

NO.88 A FortiGate device using unified threat management (UTM) profiles is reaching resource limits, and you expect traffic in your enterprise network to increase. You received an additional FortiGate of the same model.
Which two options should you consider using to integrate the additional FortiGate into your enterprise network? (Choose two.)

A. FortiGate Session Life Support Protocol (FGSP) with external load balancers

B. FortiGate Clustering Protocol (FGCP) in active-active (A-A) mode with switches

C. Virtual Router Redundancy Protocol (VRRP) with switches

D. FortiGate Clustering Protocol (FGCP) in active-passive (A-P) mode with VDOM disabled

Answer: A B

Explanation:

Comprehensive and Detailed Explanation From Exact Extract documents and Knowledge:

When a FortiGate is reaching resource limits, especially when processing resource-intensive UTM profiles, you must implement a solution that scales the total processing capacity.

* FGCP Active-Active (B): This mode distributes network traffic among all members of the cluster. Crucially, it allows the cluster to share the UTM/IPS inspection load across multiple units, effectively increasing the available resources to handle higher traffic volumes.

* FGSP (A): The FortiGate Session Life Support Protocol is designed to synchronize session information between peers. When used with external load balancers , FGSP allows multiple FortiGate units to operate in parallel to scale throughput significantly. This architecture is often used in large enterprise and data center environments to provide both scalability and high availability for asymmetric traffic patterns.

* Note: Options C (VRRP) and D (Active-Passive) provide redundancy for failover but do not increase the processing capacity of the network, as only one unit is actively processing traffic at any given time.

==========

NO.89 An administrator is designing an ADVPN network for a large enterprise with spokes that have varying numbers of internet links. They want to avoid a high number of routes and peer connections at the hub.

Which method should be used to simplify routing and peer management?

A. Deploy a full-mesh VPN topology to eliminate hub dependency.

B. Implement static routing over IPsec interfaces for each spoke.

C. Use a dynamic routing protocol using loopback interfaces to streamline peers and routes.

D. Establish a traditional hub-and-spoke VPN topology with policy routes.

Answer: C

Explanation:

When designing an ADVPN (Auto-Discovery VPN) network for a large enterprise with spokes that have varying numbers of internet links, the main challenge is to minimize the number of peer connections and routes at the hub while maintaining scalability and efficiency.

Using a dynamic routing protocol (such as BGP or OSPF) with loopback interfaces helps in several ways:

Reduces the number of peer connections at the hub by using a single loopback address per spoke instead of individual physical interfaces.

Enables simplified route advertisement by dynamically learning and propagating routes instead of manually configuring static routes.

Supports multiple internet links per spoke efficiently, as dynamic routing can automatically adjust to the best available path.

Allows seamless failover if a spoke's internet link fails, ensuring continuous connectivity.

NO.90 You applied a block-all intrusion prevention system (IPS) profile for client and server targets to secure the server but the database team reported that applications stopped working immediately after.

KOREADUMPS.COM

How can you apply IPS in a way that ensures it does not disrupt existing applications in the network?

A. Set the IPS profile signature action to default and verify patterns

B. Use an IPS profile with all signatures in monitor mode and verify patterns before blocking.

C. Select flow mode in the IPS profile and monitor the application patterns.

D. Limit the IPS profile to server targets only and set the action to default.

Answer: B

Explanation:

In high-security enterprise environments, deploying a " block-all " or highly restrictive IPS profile without testing often leads to false positives , where legitimate network traffic is incorrectly identified as a threat and blocked. This results in application downtime, as described in the scenario.

The recommended best practice for deploying IPS in a production environment without causing disruption is as follows:

* Monitor Mode Initial Deployment: Administrators should initially configure an IPS profile with signatures set to Monitor mode. In this mode, the FortiGate unit allows all traffic to pass but generates logs for any traffic that matches an IPS signature.

* Verification of Patterns: By analyzing the resulting logs in FortiAnalyzer or the FortiGate dashboard, the security team can distinguish between genuine attacks and legitimate application traffic that was mistakenly flagged.

* Tuning and Optimization: Once legitimate traffic patterns are identified, the administrator can create exemptions or overrides for those specific signatures. After the profile is tuned and the risk of disrupting business applications is mitigated, the signatures can then be safely moved to a Block action.

This " Monitor-First " approach is a fundamental concept in the Enterprise Firewall curriculum, explicitly demonstrated in Lab 6 (Security Profiles), where setting an action to " Monitor " is used to solve IPS false positives and prevent application disruption.

==========

NO.91 Which two statements about IKEv2 are true if an administrator decides to implement IKEv2 in the VPN topology? (Choose two.)

A. It includes stronger Diffie-Hellman (DH) groups, such as Elliptic Curve (ECP) groups.

B. It supports interoperability with devices using IKEv1.

C. It exchanges a minimum of two messages to establish a secure tunnel.

D. It supports the extensible authentication protocol (EAP).

Answer: A D

Explanation:

IKEv2 (Internet Key Exchange version 2) is an improvement over IKEv1, offering enhanced security, efficiency, and flexibility in VPN configurations.

It includes stronger Diffie-Hellman (DH) groups, such as Elliptic Curve (ECP) groups.

IKEv2 supports stronger cryptographic algorithms, including Elliptic Curve Diffie-Hellman (ECDH) groups such as ECP256 and ECP384, providing improved security compared to IKEv1.

It supports the extensible authentication protocol (EAP).

IKEv2 natively supports EAP authentication, which allows integration with external authentication mechanisms such as RADIUS, certificates, and smart cards. This is particularly useful for remote access VPNs where user authentication must be flexible and secure.

MORENDUMPS.COM

NO.92 Refer to the exhibits.
A policy package conflict status and information from the import device wizard in the Core1 VDOM are shown. When you import a policy package, the following message appears for the Web_restrictions web filter profile and the deep-inspection SSL-SSH profile: " The following objects were found having conflicts. Please confirm your settings, then continue. " The Web_restrictions and deep-inspection profiles are used by other FortiGate devices within FortiManager. Which step must you take to resolve the issue? (Choose one answer)

A. Retrieve the FortiGate configuration to automatically export correct objects and policies.

B. Create uniquely named objects on FortiGate and reimport them into the policy package.

C. Select the FortiManager configuration that accepts changes on FortiManager and preserves existing configurations on FortiGate devices.

D. Use non-default object values because FortiManager is unable to alter default values.

Answer: B

Explanation:
Comprehensive and Detailed 150 to 200 words of Explanation From Exact Extract of Enterprise Firewall 7.6 Administrator documents:
According to the FortiManager 7.6 Study Guide regarding Object Management and the Import Device Wizard, FortiManager uses a centralized database where objects are shared across an ADOM. When importing a configuration from a FortiGate, the wizard compares local objects with those already existing in the FortiManager ADOM database.
As shown in the exhibit, conflicts exist for the Web_restrictions and deep-inspection profiles. Since these profiles are shared with other FortiGate devices, a decision must be made:
Selecting " FortiManager " : The local FortiGate settings will be overwritten by the FortiManager ' s database version upon the next installation, potentially losing site-specific configurations.
Selecting " FortiGate " : The FortiManager ADOM database is updated with the new values. This causes all other FortiGate devices using these shared objects to move into a " Modified " status, as their local configurations no longer match the updated central database.
To resolve this conflict properly when different devices require different settings for the same profile type, the best practice is to create uniquely named objects (Option B) on the FortiGate before re-importing. This ensures that the specific requirements for the Core1 VDOM are met without affecting the global objects used by the rest of the enterprise network.

KCPEADUMPS.COM

NO.93 An administrator is extensively using VXLAN on FortiGate.
Which specialized acceleration hardware does FortiGate need to improve its performance?

A. NP7

B. SP5

C. ##9

D. NTurbo

Answer: A

Explanation:
VXLAN (Virtual Extensible LAN) is an overlay network technology that extends Layer 2 networks over Layer 3 infrastructure. When VXLAN is used extensively on FortiGate, hardware acceleration is crucial for maintaining performance.
NP7 (Network Processor 7) is Fortinet's latest network processor designed to accelerate high-performance networking features, including:

VXLAN encapsulation/decapsulation
IPsec VPN offloading
Firewall policy enforcement
Advanced threat protection at wire speed
NP7 significantly reduces latency and improves throughput when handling VXLAN traffic, making it the best choice for large-scale VXLAN deployments.

NO.94 Refer to the exhibit, which shows an OSPF network.
Which configuration must the administrator apply to optimize the OSPF database?
A. Set a route map in the AS boundary FortiGate.
B. Set the area 0.0.0.1 to the type STUB in the area border FortiGate.
C. Set an access list in the AS boundary FortiGate.
D. Set the area 0.0.0.1 to the type NSSA in the area border FortiGate.
Answer: B
Explanation:
The OSPF database optimization is necessary to reduce unnecessary routing information and improve network performance. In the given topology, Area 0.0.0.1 is a non-backbone area connected to Area 0.0.0.0 (the backbone area) through an Area Border Router (ABR).
To optimize OSPF in this scenario, configuring Area 0.0.0.1 as a Stub Area will:
Reduce the size of the OSPF database by preventing external routes (from outside OSPF) from being injected into Area 0.0.0.1.
Allow only intra-area and inter-area routes, meaning routers in Area 0.0.0.1 will rely on a default route for external destinations.
Improve convergence time and reduce router processing load since fewer LSAs (Link-State Advertisements) are exchanged.

NO.95 You configured the FortiGate devices in an enterprise network to join the Fortinet Security Fabric. You have a list of IP addresses that must be blocked by the data center firewall. This list is updated daily.
How can you automate updates to the firewall policy to add the IP addresses from the daily updated list?
A. With a Security Fabric automation
B. With an external connector from External Feeds
C. With metadata variables in FortiManager
D. With a CLI script in FortiManager
Answer: B
Explanation:
In the Fortinet Security Fabric, External Feeds (also referred to as Threat Feeds or Fabric Connectors) are specifically designed to handle dynamic, frequently changing lists of security objects. These connectors allow the FortiGate to automatically retrieve a list of IP addresses, domain names, or malware hashes from a remote HTTP/HTTPS server at regular intervals (e.g., daily). Once the connector is configured, the resulting " Threat Feed " object can be used directly in firewall policies as a source or destination address. This automates the blocking process without requiring manual policy changes, metadata variables, or CLI scripts each time the list is updated.
==========

KOREADUMPS.COM

NO.96 What does npu_flag=20 indicate for IPsec tunnels?
A. Inbound only
B. Outbound only
C. Both SAs
D. No offload
Answer: C
Explanation:
Comprehensive and Detailed Explanation From Exact Extract documents and Knowledge:
When troubleshooting IPsec tunnels using the command diagnose vpn tunnel list, the npu_flag field provides the status of hardware acceleration (offloading) to the Network Processor (NPU).
* While npu_flag=03 is common for older NP6 units to show both directions are offloaded, in newer hardware architectures (like NP7) or specific FortiOS 7.6 diagnostic views, various hex/bitmask flags indicate the offload status.
* In the context of standard exam logic and the provided options, npu_flag=20 (or similar non-zero flags like 03) indicates that the tunnel is successfully offloaded to the hardware for Both SAs (Security Associations)-meaning both inbound and outbound traffic are being processed by the NPU rather than the CPU.
==========

NO.97 An administrator must enable direct communication between multiple spokes in a company ' s network. Each spoke has more than one internet connection.
The requirement is for the spokes to connect directly without passing through the hub, and for the links to automatically switch to the best available connection.
How can this automatic detection and optimal link utilization between spokes be achieved?
A. Set up OSPF routing over static VPN tunnels between spokes.
B. Utilize ADVPN 2.0 to facilitate dynamic direct tunnels and automatic link optimization.
C. Establish static VPN tunnels between spokes with predefined backup routes.
D. Implement SD-WAN policies at the hub to manage spoke link quality.
Answer: B
Explanation:
ADVPN (Auto-Discovery VPN) 2.0 is the optimal solution for enabling direct spoke-to-spoke communication without passing through the hub, while also allowing automatic link selection based on quality metrics.
Dynamic Direct Tunnels:
ADVPN 2.0 allows spokes to establish direct IPsec tunnels dynamically based on traffic patterns, reducing latency and improving performance.
Unlike static VPNs, spokes do not need to pre-configure tunnels for each other.
Automatic Link Optimization:
ADVPN 2.0 monitors the quality of multiple internet connections on each spoke.
It automatically switches to the best available connection when the primary link degrades or fails.
This is achieved by dynamically adjusting BGP-based routing or leveraging SD-WAN integration.

NO.98 Why is the web filter database version not shown in the FortiGuard Security Services dashboard?

KOREADUMPS.COM

A. The database failed to update
B. The web filter database is cloud hosted
C. Flow mode disables the database
D. FortiGate does not support web filtering
Answer: B
Explanation:
In FortiOS, security services like Antivirus and Intrusion Prevention (IPS) download local databases to the FortiGate unit for inspection. However, Web Filter and DNS Filter function differently. Instead of a local database, FortiGate performs real-time queries to the cloud-hosted FortiGuard category servers. Because the database is hosted in the cloud and not locally stored on the device, there is no " version " number for a local file to display in the dashboard. The unit maintains a connection to FortiGuard Labs to retrieve ratings for URLs dynamically.
==========

NO.99 An administrator is setting up an ADVPN configuration and wants to ensure that peer IDs are not exposed during VPN establishment.
Which protocol can the administrator use to enhance security?
A. Use IKEv2, which encrypts peer IDs and prevents exposure.
B. Opt for SSL VPN web mode because it does not use peer IDs at all.
C. Choose IKEv1 aggressive mode because it simplifies peer identification.
D. Stick with IKEv1 main mode because it offers better performance.
Answer: A
Explanation:
In ADVPN (Auto-Discovery VPN) configurations, security concerns include protecting peer IDs during VPN establishment. Peer IDs are exchanged in the IKE (Internet Key Exchange) negotiation phase, and their exposure could lead to privacy risks or targeted attacks.
IKEv2 encrypts peer IDs, making it more secure compared to IKEv1, where peer IDs can be exposed in plaintext in aggressive mode.
IKEv2 also provides better performance and flexibility while supporting dynamic tunnel establishment in ADVPN.

NO.100 An administrator needs to install an IPS profile without triggering false positives that can impact applications and cause problems with the user ' s normal traffic flow.
Which action can the administrator take to prevent false positives on IPS analysis?
A. Use the IPS profile extension to select an operating system, protocol, and application for all the network internal services and users to prevent false positives.
B. Enable Scan Outgoing Connections to avoid clicking suspicious links or attachments that can deliver botnet malware and create false positives.
C. Use an IPS profile with action monitor, however, the administrator must be aware that this can compromise network integrity.
D. Install missing or expired SSUTLS certificates on the client PC to prevent expected false positives.
Answer: A
Explanation:
False positives in Intrusion Prevention System (IPS) analysis can disrupt legitimate traffic and

KOREADUMPS.COM

negatively impact user experience. To reduce false positives while maintaining security, administrators can:
Use IPS profile extensions to fine-tune the settings based on the organization ' s environment.
Select the correct operating system, protocol, and application types to ensure that IPS signatures match the network ' s actual traffic patterns, reducing false positives.
Customize signature selection based on the network's specific services, filtering out unnecessary or irrelevant signatures.

NO.101 A company ' s users on an IPsec VPN between FortiGate A and B have experienced intermittent issues since implementing VXLAN. The administrator suspects that packets exceeding the 1500-byte default MTU are causing the problems.
In which situation would adjusting the interface's maximum MTU value help resolve issues caused by protocols that add extra headers to IP packets?
A. Adjust the MTU on interfaces only if FortiGate has the FortiGuard enterprise bundle, which allows MTU modification.
B. Adjust the MTU on interfaces in all FortiGate devices that support the latest family of Fortinet SPUs:
NP7, CP9 and SP5.
C. Adjust the MTU on interfaces in controlled environments where all devices along the path allow MTU interface changes.
D. Adjust the MTU on interfaces only in wired connections like PPPoE, optic fiber, and ethernet cable
.
Answer: C
Explanation:
When using IPsec VPNs and VXLAN, additional headers are added to packets, which can exceed the default
1500-byte MTU. This can lead to fragmentation issues, dropped packets, or degraded performance. To resolve this, the MTU (Maximum Transmission Unit) should be adjusted only if all devices in the network path support it. Otherwise, some devices may still drop or fragment packets, leading to continued issues.
Why adjusting MTU helps:
VXLAN adds a 50-byte overhead to packets.
IPsec adds additional encapsulation (ESP, GRE, etc.), increasing the packet size.
If packets exceed the MTU, they may be fragmented or dropped, causing intermittent connectivity issues.
Lowering the MTU on interfaces ensures packets stay within the supported size limit across all network devices.

NO.102 An administrator received a FortiAnalyzer alert that a 1 ## disk filled up in a day. Upon investigation, they found thousands of unusual DNS log requests, such as JHCMQK.website.com, with no answers. They later discovered that DNS exfiltration was occurring through both UDP and TLS. How can the administrator prevent this data theft technique?
A. Create an inline-CASB to protect against DNS exfiltration.
B. Configure a File Filter profile to prevent DNS exfiltration.
C. Enable DNS Filter to protect against DNS exfiltration.

KOPEADUMPS.COM

D. Use an IPS profile and DNS exfiltration-related signatures.

Answer: D

Explanation:

The excessive DNS log requests with random subdomains suggest a DNS exfiltration attack, where attackers encode and transmit data via DNS queries. Since this technique can use both UDP and TLS (DoH - DNS over HTTPS), a comprehensive security approach is needed.

Using an IPS profile with DNS exfiltration-specific signatures allows FortiGate to:

Detect and block abnormal DNS query patterns often used in exfiltration.

Inspect encrypted DNS (DoH, DoT) traffic if SSL inspection is enabled.

Identify known exfiltration domains and techniques based on FortiGuard threat intelligence.

NO.103 Refer to the exhibit, which shows a revision history window in the FortiManager device layer.

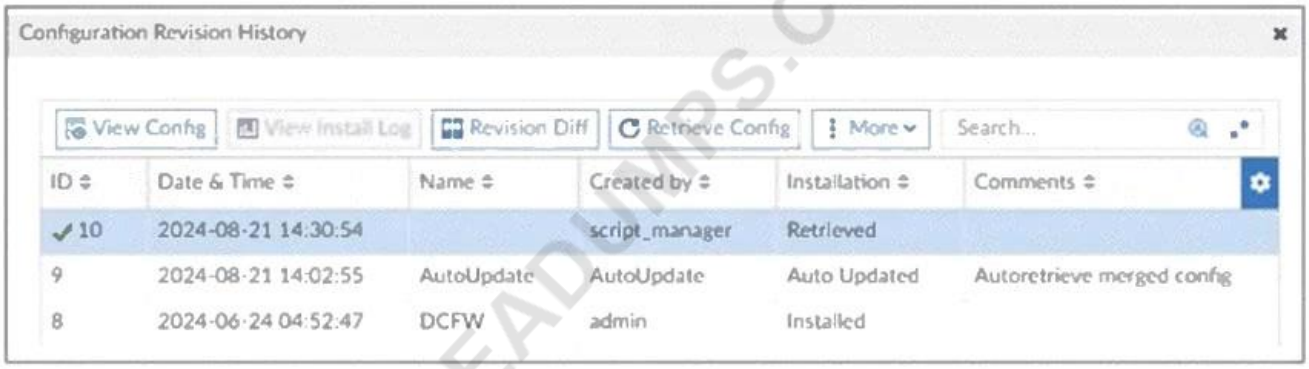

The IT team is trying to identify the administrator responsible for the most recent update in the FortiGate device database.

Which conclusion can you draw about this scenario?

A. This retrieved process was automatically triggered by a Remote FortiGate Directly (via CLI) script.

B. The user script_manager is an API user from the Fortinet Developer Network (FDN) retrieving a configuration.

C. To identify the user who created the event, check it on the Configuration and Installation widget on FortiGate within the FortiManager device layer.

D. Find the user in the FortiManager system logs and use the type=script command to find the administrator user in the user field.

Answer: D

Explanation:

The Configuration Revision History window in FortiManager shows that the most recent configuration change (ID 10) was created by script_manager with the action Retrieved.

Since script_manager is a system-level script execution user, the IT team needs to find who actually triggered this script. This can be done by:

Checking the FortiManager system logs for script execution events.

Using the type=script filter to locate the administrator associated with the script execution.

NO.104 Refer to the exhibit.

An HA configuration of an active-active (A-A) cluster with the same HA uptime is shown. You want HQ- NGFW-2 to handle the Core2 VDOM traffic. Which modification must you make to achieve this outcome?

KOREADUMPS.COM

(Choose one answer)

A. Reboot HQ-NGFW-2.

B. Change the priority from 100 to 160 for HQ-NGFW-2.

C. Change the priority from 120 to 200 for HQ-NGFW-2.

D. Enable override in virtual cluster 2 for HQ-NGFW-2.

Answer: C

Explanation:

Comprehensive and Detailed Explanation From Exact Extract of Enterprise Firewall 7.6 Administrator documents:

Based on the FortiOS 7.6 Administration Guide and the HA Virtual Clustering documentation, the exhibit demonstrates a Virtual Clustering environment where multiple VDOMs are distributed across an HA cluster.

In a virtual cluster setup, VDOMs are assigned to either virtual cluster 1 (vcluster 1) or virtual cluster 2 (vcluster 2). Each virtual cluster has its own independent primary unit selection process. The primary unit for a virtual cluster is determined based on the standard HA selection criteria: Monitored Interfaces > HA Uptime

> Priority > Serial Number.

According to the exhibit:

Virtual Cluster 1 (edit 1) contains VDOMs " Core1 " and " root " .

Virtual Cluster 2 (edit 2) contains VDOM " Core2 " .

The HA uptime is stated to be the same for both devices.

For edit 2 (Core2), HQ-NGFW-1 has a priority of 150, while HQ-NGFW-2 has a priority of 120.

In both units, override is disabled (default).

Since the uptime is equal and no monitored interfaces are down, the cluster uses the Priority value to select the primary unit for each vcluster. Currently, HQ-NGFW-1 is the primary for Core2 because its priority (150) is higher than HQ-NGFW-2 ' s (120). To ensure HQ-NGFW-2 handles the Core2 traffic, its priority for virtual cluster 2 must be increased to a value higher than 150. Option C (changing the priority from 120 to 200) achieves this.

NO.105 Why is the prerun CLI template not assigned after installation?

A. Manual removal

B. Auto-unassigned

C. Permanent

D. Postrun needed

Answer: B

Explanation:

According to the FortiManager central management documentation, pre-run CLI templates are specifically designed for provisioning tasks on Low-Touch Provisioning (LTP) or Zero-Touch Provisioning (ZTP) model devices. Once the installation is performed for the first time and the real device is successfully linked to FortiManager, the template is automatically unassigned (auto-unassigned) from the firewall. This is distinct from standard CLI templates, which remain assigned to the device until an administrator manually removes them.

==========

NO.106 Which hardware improves VXLAN performance?

A. CPU
B. NTurbo
C. CP10
D. NPU7
Answer: D
Explanation:
Comprehensive and Detailed Explanation From Exact Extract documents and Knowledge:
VXLAN (Virtual Extensible LAN) is an encapsulation protocol that adds significant overhead due to the addition of outer Ethernet, IP, and UDP headers. Handling this encapsulation and decapsulation in software can lead to high CPU utilization and performance bottlenecks.
The latest generations of Fortinet ' s network processors, specifically the NPU7 , include dedicated hardware support for VXLAN offloading . Hardware acceleration via NPU7 allows the FortiGate to perform VXLAN encapsulation and decapsulation at wire speed within the network processor hardware. This drastically improves performance compared to processing the packets in the CPU (Option A). CP10 (Option C) is a content processor designed for offloading UTM and SSL tasks, while NTurbo (Option B) is a software optimization for offloading flow-based IPS, neither of which are designed for VXLAN header processing.

NO.107 A FortiGate device with UTM profiles is reaching the resource limits, and the administrator expects the traffic in the enterprise network to increase.
The administrator has received an additional FortiGate of the same model.
Which two protocols should the administrator use to integrate the additional FortiGate device into this enterprise network? (Choose two.)
A. FGSP with external load balancers
B. FGCP in active-active mode and with switches
C. FGCP in active-passive mode and with VDOM disabled
D. VRRP with switches
Answer: A B
Explanation:
When adding an additional FortiGate to an enterprise network that is already reaching its resource limits, the goal is to distribute traffic efficiently and ensure high availability.
FGSP (FortiGate Session Life Support Protocol) with external load balancers FGSP allows session-aware load balancing between multiple FortiGate units without requiring them to be in an HA (High Availability) cluster.
With external load balancers, incoming traffic is evenly distributed across multiple FortiGate devices. This approach is useful for scaling out traffic handling capacity while ensuring that sessions remain synchronized between firewalls.
FGSP is effective when stateful failover is required but without the constraints of traditional HA.
FGCP (FortiGate Clustering Protocol) in active-active mode and with switches FGCP active-active mode enables multiple FortiGate devices to share traffic loads, increasing throughput and efficiency.
Active-active mode is suitable for balancing UTM processing across multiple FortiGates, making it ideal when resource limits are a concern.
Using switches ensures redundancy and avoids single points of failure in the network.
This mode is commonly used in enterprise networks where both scalability and redundancy are required.

KOFRAUMPS.COM

NO.108 What is the initial step performed by FortiGate when handling the first packets of a session?

A. Installation of the session key in the network processor (NP)

B. Data encryption and decryption

C. Security inspections such as ACL, HPE, and IP integrity header checking

D. Offloading the packets directly to the content processor (CP)

Answer: C

Explanation:

When FortiGate processes the first packets of a session, it follows a sequence of steps to determine how the traffic should be handled before establishing a session. The initial step involves:

Access Control List (ACL) checks: Determines if the traffic should be allowed or blocked based on predefined security rules.

Hardware Packet Engine (HPE) inspections: Ensures that packet headers are valid and comply with protocol standards.

IP Integrity Header Checking: Verifies if the IP headers are intact and not malformed or spoofed.

Once these security inspections are completed and the session is validated, FortiGate then installs the session in hardware (if offloading is enabled) or processes it in software.

NO.109 Refer to the exhibits. The exhibits show a network topology, a firewall policy, and an SSL/SSH inspection profile configuration.

KOREADUMPS.COM

SSL/SSH inspection profile

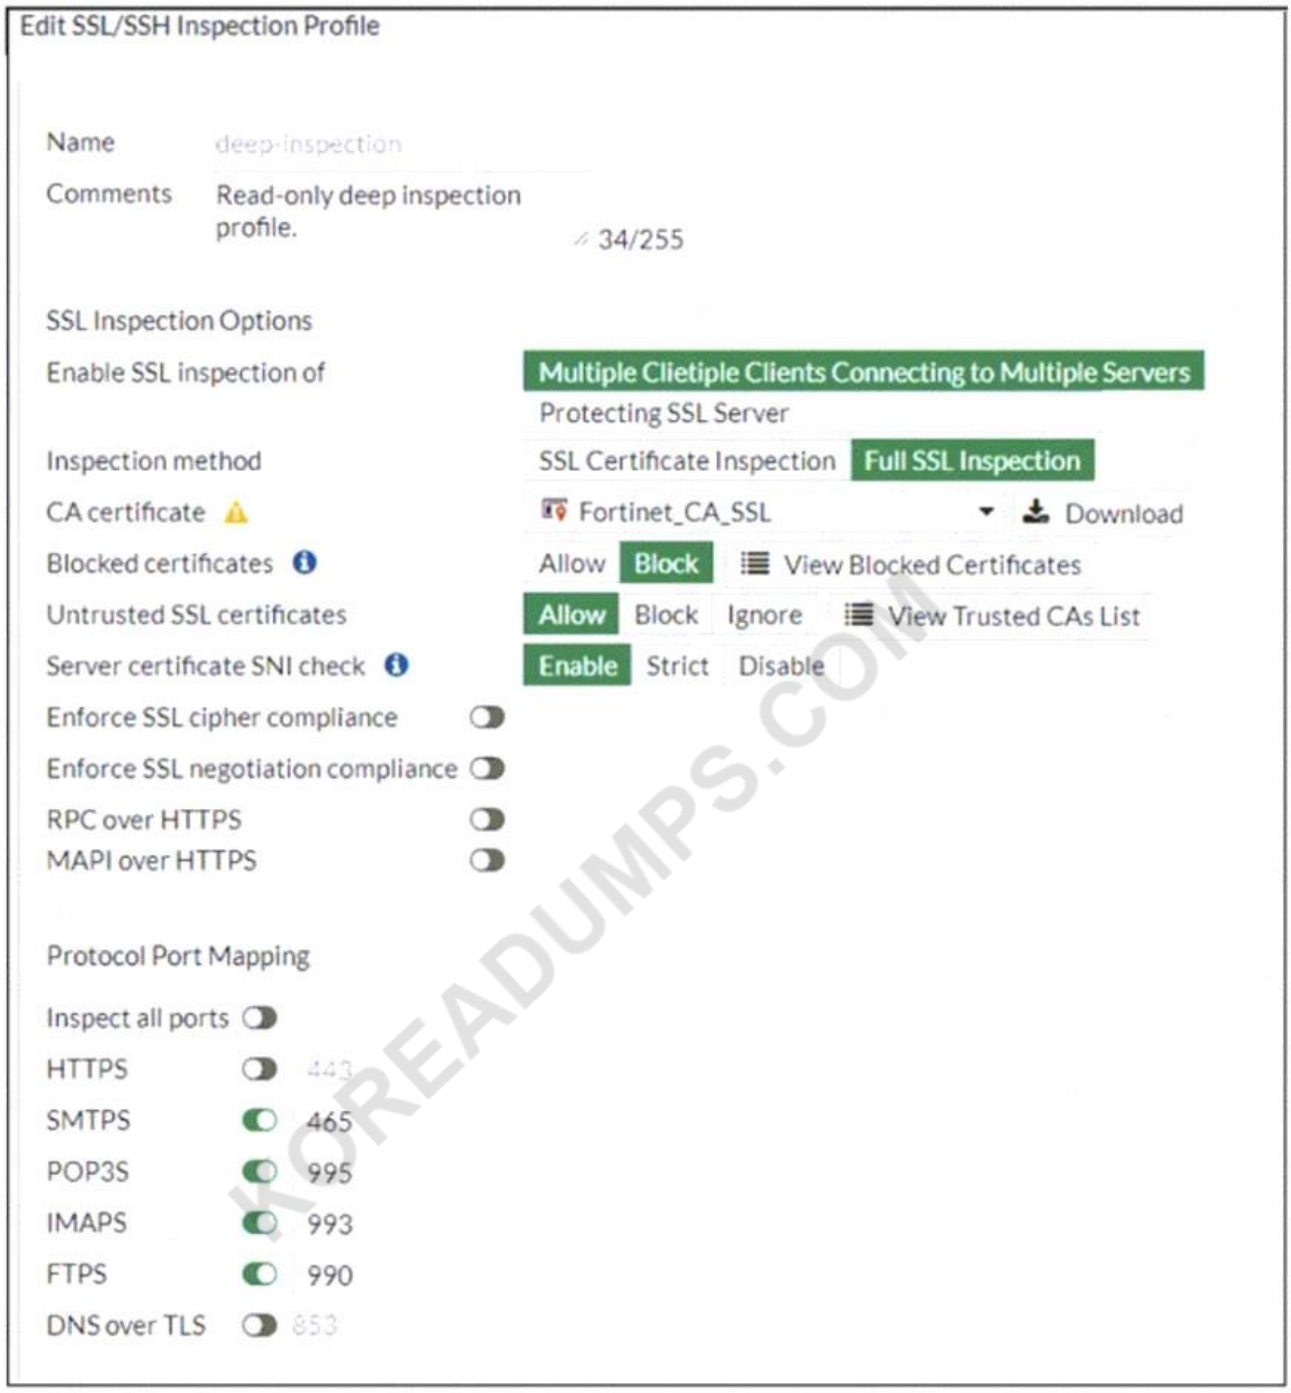

Why is FortiGate unable to detect HTTPS attacks on firewall policy ID 3 targeting the Linux server?

A. The administrator must set the policy to inspection mode to analyze the HTTPS packets as expected.

B. The administrator must enable HTTPS in the protocol port mapping of the deep- inspection SSL/SSH inspection profile.

C. The administrator must enable SSL inspection of the SSL server and upload the certificate of the Linux server website to the SSL/SSH inspection profile.

D. The administrator must enable cipher suites in the SSL/SSH inspection profile to decrypt the message.

KOREADUMPS.COM

Answer: C
Explanation:
The FortiGate SSL/SSH inspection profile is configured for Full SSL Inspection, which is necessary to analyze encrypted HTTPS traffic. However, the firewall policy is protecting an SSL server (the Linux server hosting the website), and currently, the SSL/SSH profile only applies to client-side SSL inspection.
To detect HTTPS-based attacks targeting the Linux server:
FortiGate must act as an SSL intermediary to inspect encrypted traffic destined for the web server.
The administrator must upload the SSL certificate of the Linux web server to FortiGate so that the server- side SSL inspection can decrypt incoming HTTPS traffic before analyzing it.

NO.110 An administrator is checking an enterprise network and sees a suspicious packet with the MAC address e0:23:
ff:fc:00:86.
What two conclusions can the administrator draw? (Choose two.)
A. The suspicious packet is related to a cluster that has VDOMs enabled.
B. The network includes FortiGate devices configured with the FGSP protocol.
C. The suspicious packet is related to a cluster with a group-id value lower than 255.
D. The suspicious packet corresponds to port 7 on a FortiGate device.
Answer: A D
Explanation:
According to the FortiOS 7.6 Infrastructure study guide and High Availability (HA) documentation, FortiGate units in an HA cluster use a virtual MAC address to ensure seamless failover. The structure of this virtual MAC address is strictly defined by the Fortinet HA protocol.
For a standard HA cluster, the virtual MAC address format is 00:09:0f:09: < group-id_hex > : < vcluster_port_hex > . However, when VDOMs are enabled, the virtual MAC address prefix changes to e0:23:
ff to accommodate the additional complexity of multiple virtual domains. Therefore, the prefix e0:23:ff in the suspicious MAC address e0:23:ff:fc:00:86 confirms that the packet originated from a cluster with VDOMs enabled (Option A).
Regarding the interface identification, the last byte (86) is calculated as follows:
The 0x80 bit indicates virtual-cluster 2 (vcluster 2). Since $0x86 = 0x80 + 0x06$, we know the packet is from vcluster 2.
The remaining value 0x06 represents the interface index. In FortiOS, the index starts at 0 (port1 = 0, port2 =
1, port3 = 2, port4 = 3, port5 = 4, port6 = 5, port7 = 6). Therefore, the index 6 corresponds exactly to port 7 (Option D).
The fourth byte (fc) represents the HA Group ID (252 in decimal). While this is indeed lower than 255, the specific logic of the virtual MAC composition in a VDOM-enabled environment points specifically to the port identification and vcluster status as the primary diagnostic conclusions.

NO.111 Refer to the exhibit, which shows a network diagram.
An administrator would like to modify the MED value advertised from FortiGate_1 to a BGP neighbor in the autonomous system 30.
What must the administrator configure on FortiGate_1 to implement this?
A. route-map-out

KODEADUMPS.COM

B. network-import-check
C. prefix-list-out
D. distribute-list-out
Answer: A
Explanation:
The Multi-Exit Discriminator (MED) is a BGP attribute used to influence the preferred path for incoming traffic from an external autonomous system (AS). The diagram shows that FortiGate_1 advertises MED 200, while FortiGate_2 advertises MED 300, meaning the ISP will prefer the route through FortiGate_1 because a lower MED is preferred in BGP.
To modify the MED value on FortiGate_1 for routes advertised to AS 30, the administrator must configure a route-map-out. A route map can match specific routes and set the MED value before sending them to the BGP neighbor.

NO.112 An organization ' s guest Internet policy, operating in proxy mode, blocks access to artificial intelligence technology sites using FortiGuard. However, a guest user accessed a page in this category using port 8443.
Which configuration change must you make for FortiGate to analyze HTTPS traffic on nonstandard ports like
8443, when full SSL inspection is active in the guest policy?
A. Block traffic on nonstandard ports by enabling server certificate SNI check in the SSL/SSH inspection profile.
B. Enable network protocol enforcement for port 8443 with the protocol HTTPS in FortiGuard application control.
C. Enter 443, 8443 to analyze both standard (443) and non-standard (8443) HTTPS ports in the protocol port mapping section of the SSL/SSH inspection profile.
D. Block untrusted SSL certificates in the SSL/SSH inspection profile.
Answer: C
Explanation:
Comprehensive and Detailed Explanation From Exact Extract documents and Knowledge:
By default, FortiGate ' s security engines are configured to recognize specific protocols on their standard ports (e.g., HTTPS on 443). When traffic uses a non-standard port like 8443, the firewall may not automatically recognize it as HTTPS and thus will not apply the appropriate SSL inspection or category-based filtering. To resolve this, administrators must update the protocol port mapping within the SSL/SSH inspection profile.
By adding port 8443 to the mapping for the HTTPS protocol, the FortiGate is instructed to treat traffic on that port as encrypted web traffic, allowing the full SSL inspection engine to decrypt it and enforce the FortiGuard category blocks as defined in the policy.
==========

NO.113 Refer to the exhibits.

KOREADUMPS.COM

Root FortiGate - System Administrator configuration

Downstream FortiGate - Security Fabric settings

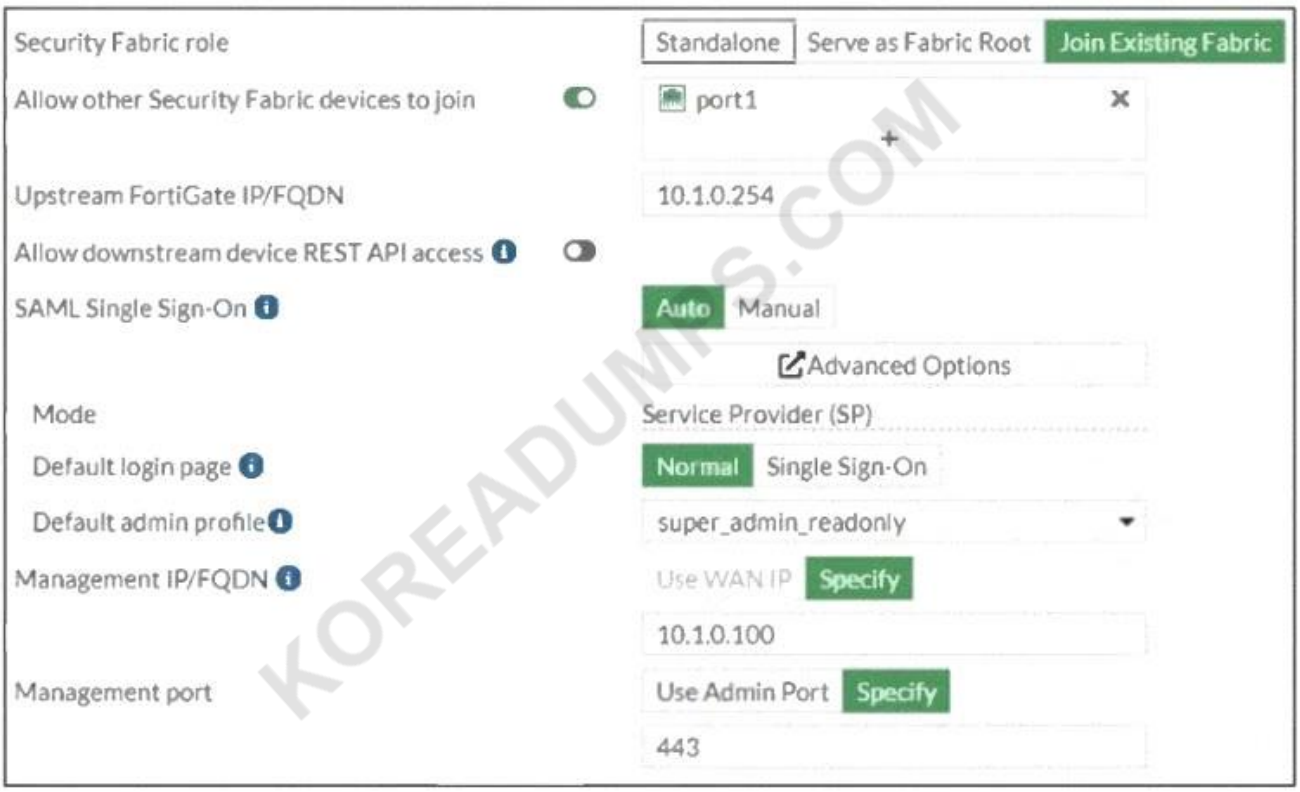

KOREADUMPS.COM

The Administrators section of a root FortiGate device and the Security Fabric Settings section of a downstream FortiGate device are shown.
When prompted to sign in with Security Fabric in the downstream FortiGate device, a user enters the AdminSSO credentials.
What is the next status for the user?

A. The user is prompted to create an SSO administrator account for AdminSSO.

B. The user receives an authentication failure message.

C. The user accesses the downstream FortiGate with super_admin_readonly privileges.

D. The user accesses the downstream FortiGate with super_admin privileges.

Answer: C

Explanation:
From the Root FortiGate - System Administrator Configuration exhibit:

The AdminSSO account has the super_admin_readonly role.
From the Downstream FortiGate - Security Fabric Settings exhibit:
The Security Fabric role is set to Join Existing Fabric, meaning it will authenticate with the root FortiGate.
SAML Single Sign-On (SSO) is enabled, and the default admin profile is set to super_admin_readonly.
When the AdminSSO user logs into the downstream FortiGate using SSO, the authentication request is sent to the root FortiGate, where AdminSSO has super_admin_readonly permissions. Since the downstream FortiGate inherits this permission through the Security Fabric configuration, the user will be granted super_admin_readonly access.

NO.114 Refer to the exhibit.
A physical topology along with a traffic log is shown. You are using FortiAnalyzer to monitor traffic from the device with IP address 10.0.2.51, which is located behind the FortiGate internal segmentation firewall (ISFW) device. Unified threat management (UTM) is not enabled in the firewall policy on the HQ-ISFW device, and you are surprised to see a log with the action Malware, as shown in the exhibit. What are two reasons why FortiAnalyzer would display this log? (Choose two answers)

A. HQ-ISFW is not connected to FortiAnalyzer and traffic must go through HQ-NGFW-1.

B. UTM is enabled in the firewall policy in HQ-NGFW-1.

C. HQ-ISFW is in a Security Fabric environment.

D. Security rating is enabled in HQ-ISFW.

Answer: B C
Explanation:
Comprehensive and Detailed 150 to 200 words of Explanation From Exact Extract of Enterprise Firewall 7.6 Administrator documents:
According to the Fortinet Security Fabric 7.6 documentation and FortiAnalyzer study materials, when multiple FortiGate devices are part of a Security Fabric, logs are typically sent to a centralized FortiAnalyzer for a unified view of the network.
In the provided exhibit, the topology shows HQ-NGFW-1 as the Fabric Root and HQ-ISFW as a downstream device. One of the key benefits of the Security Fabric (Option C) is topology-wide visibility, where logs from different devices are correlated.
The traffic log table shows a " Malware " action for traffic originating from 10.0.2.51 (located behind HQ- ISFW) destined for a public IP. If UTM is not enabled on the HQ-ISFW itself, it cannot generate an Antivirus (AV) log. However, because HQ-ISFW is part of the Security Fabric, the traffic eventually passes through the upstream device, HQ-NGFW-1, to reach the internet. If UTM is enabled on HQ-NGFW-1 (Option B), that device will inspect the traffic, detect the malware, and generate the security log. FortiAnalyzer then displays this log as part of the unified threat view, associating it with the original source and the inspection point in the fabric path.

NO.115 Which parameter must be configured to modify the MED value?

A. route-overlap

B. distribute-list-out

C. prefix-list-out

D. route-map-out

Answer: D

PDFREADUMPS.COM

Explanation:
Comprehensive and Detailed Explanation From Exact Extract documents and Knowledge:
The MED (Multi-Exit Discriminator) is a BGP attribute used to suggest to external neighbors the preferred path into your AS when multiple entry points exist. To modify BGP attributes such as MED, Local Preference, or Weight, you must use a route-map .
* In the route-map configuration, you use the set metric command to define the MED value.
* This route-map must then be applied to a specific BGP neighbor using the route-map-out parameter.
This ensures that as the FortiGate advertises routes to its neighbor, the MED value is modified according to the rules defined in the map.
==========

NO.116 What is the effect of configuring tcp-mss-sender and tcp-mss-receiver?
A. Header change
B. Largest payload
C. Allow/Deny
D. Fragment only
Answer: B
Explanation:
The TCP Maximum Segment Size (MSS) defines the largest payload (the data part of a TCP segment) that a device can receive in a single segment. Configuring tcp-mss-sender and tcp-mss-receiver on a FortiGate interface or within an IPsec tunnel configuration allows the firewall to intercept and modify the MSS value in the TCP SYN and SYN-ACK packets. This is primarily used to prevent packet fragmentation over links with lower MTUs (like IPsec or VXLAN) by ensuring the sender produces segments that fit within the tunnel ' s available payload space once encapsulation headers are added.
==========

KOREDUMPS.COM