



ElementOne Installation Guide for VMware Workstation

Version 1.31.2
July 2026

Contents

Chapter 1. Copyright.....	3
Chapter 2. Introduction.....	4
Chapter 3. Deploying ElementOne on VMware Workstation.....	5
Configure the Virtual Machine Hardware Settings.....	6
Chapter 4. How to Extend Disk on VMware Workstation.....	15
Extend ElementOne Data Disk.....	15
Extend ElementOne Element Connect Disk.....	18
Chapter 5. How to Backup Disk on VMware Workstation.....	21
Chapter 6. How to Migrate Disk on VMware Workstation.....	25
Restore Disks on ElementOne VM.....	25
Migrate Disks to New ElementOne VM.....	34
Chapter 7. Out-of-Box Experience.....	42
Set Up the Network Interface of ElementOne VM.....	42
Set Up DNS Server.....	42
Set Up Element Data Disk.....	43
(For Element Connect feature) Set Up Element Connect Disk.....	43
Set Up System Time.....	44
Reset Password.....	45
Find the Master Admin Temporary Password.....	46
Finalizing Set Up through Web Console.....	46
Chapter 8. Contact Us.....	48

Chapter 1. Copyright

TXOne Networks Incorporated reserves the right to make changes to this document and to the product described herein without notice. Before installing and using the product, review the readme files, release notes, and/or the latest version of the applicable documentation, which are available at <https://help.txone.com/> and <https://my.txone.com/>.

TXOne Networks, TXOne Portable Inspector, TXOne Virtual Portable Inspector, TXOne ElementOne, and TXOne Safe Port are registered trademarks of TXOne Networks Incorporated. All other product names may be trademarks or registered trademarks of their owners.

Copyright ©2026 TXOne Networks Incorporated. All rights reserved. No part of this publication may be reproduced, photocopied, stored in a retrieval system, or transmitted without the express prior written consent of TXOne Networks Incorporated.

Chapter 2. Introduction

This article provides step-by-step instructions to create ElementOne VM on VMware Workstation.

Prerequisites

- The OVA package provided by TXOne must be available and accessible to VMware Workstation.
- VMware Workstation 16 Pro or above is required.
- The necessary networks must be properly configured for VMware Workstation.
- At least 20 GB of free space for ElementOne data disk.
- At least 200 GB of free space for ElementOne Element Connect disk.
- No support for storage encryption mechanisms, e.g., BitLocker.

Chapter 3. Deploying ElementOne on VMware Workstation


1. Launch VMware Workstation.
2. From the top toolbar, click **File > Open....**



Note:


Alternatively, you can click **Open a Virtual Machine**.

3. Select a OVA file, and then click **Open**.

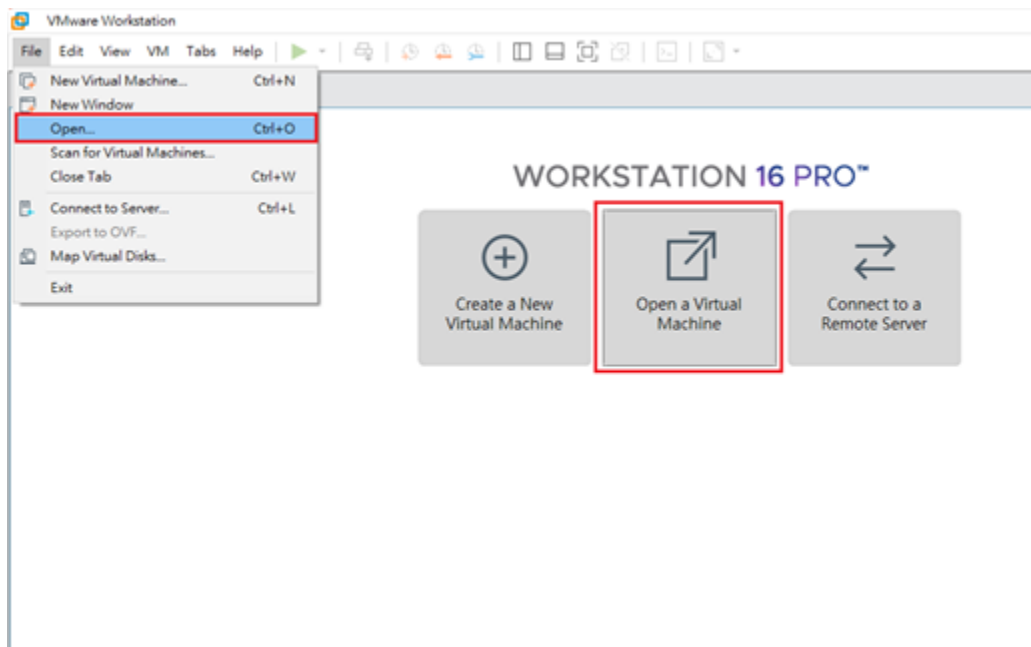

4. In the window **Import Virtual Machine**, enter a virtual machine name in the **Name for the new virtual machine** box.


5. Click **Import**.

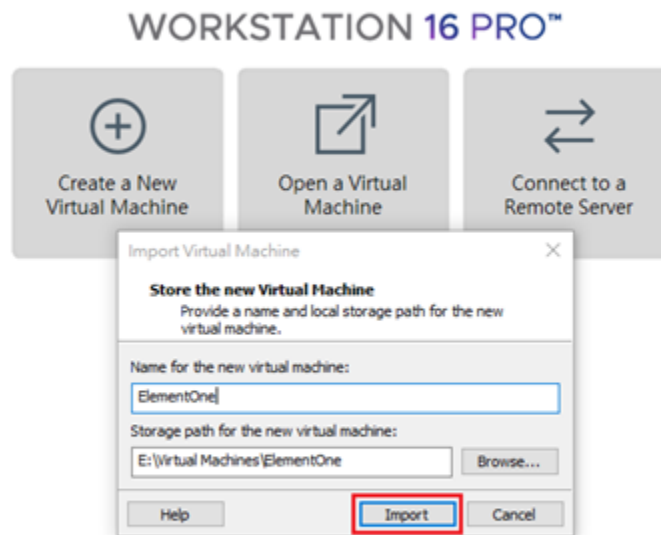

Configure the Virtual Machine Hardware Settings

After importing the OVA file into VMware Workstation, you need to add a data disk and modify the virtual hardware settings to ensure ElementOne can function properly.

1. Click **Edit virtual machine settings**.

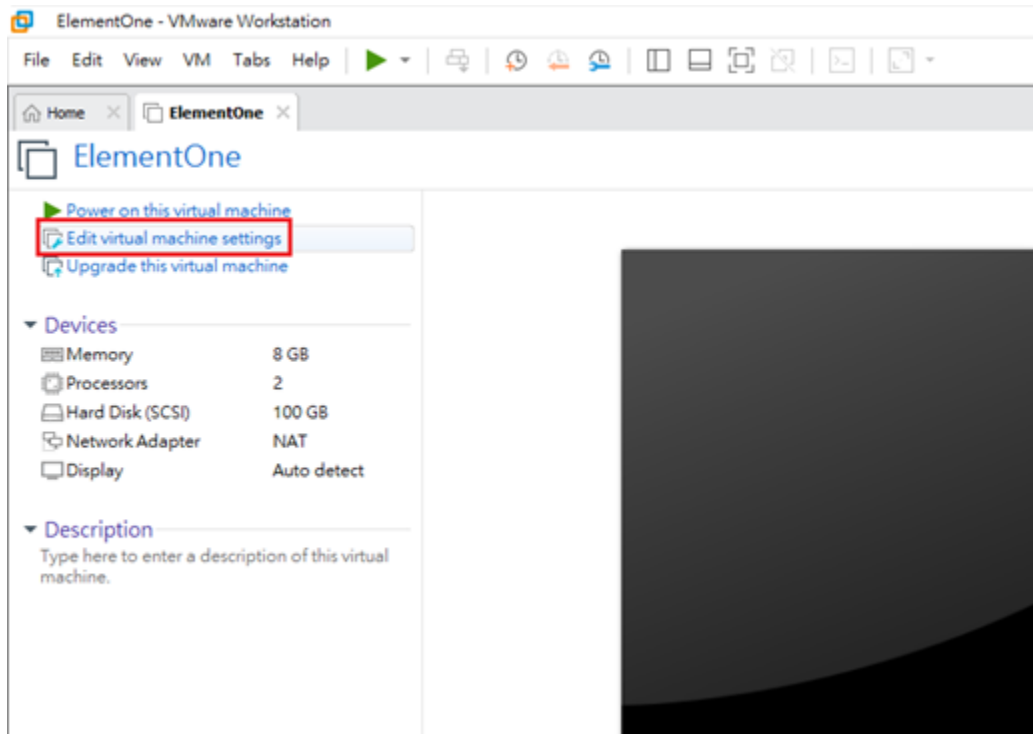


2. From the **Virtual Machine Settings** window, go to the **Hardware** tab and click **Processors** to modify the number of CPU.




Note:

In the **Virtualization engine** field, make sure **NOT** to select the checkboxes of **Virtualize Intel VT-x/EPT or AMD-V/RVI** and **Virtualize CPU performance counters**.

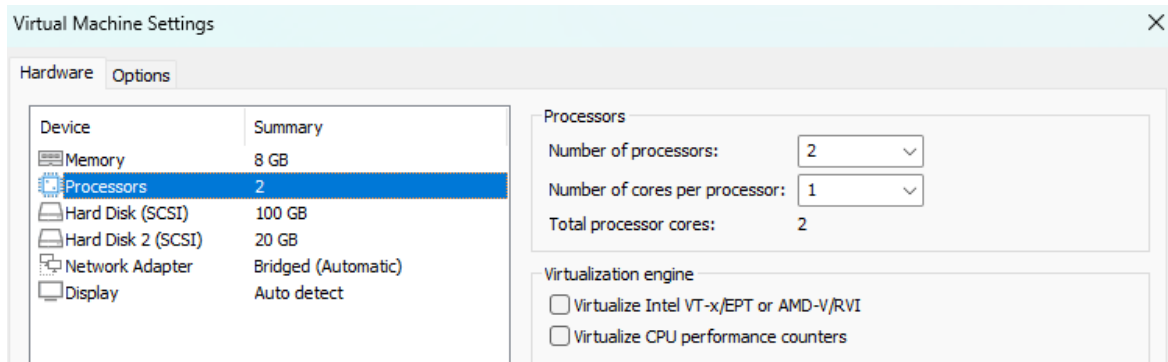

3. Click **Memory** to modify the size of memory.

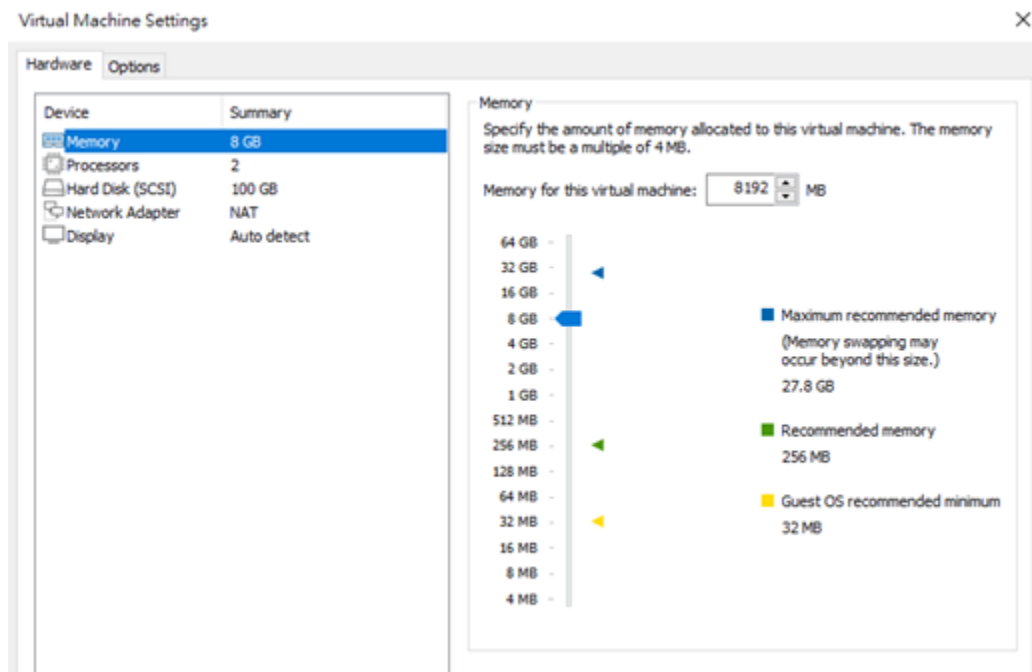


Note:


- The **minimum** resource requirements for ElementOne are as follows.

Volume of Portable Inspector	CPU (2.2 GHz or above)	Memory	Disk type
<= 100	1 core	8 GB	HDD/SSD
101-300	2 cores	8 GB	HDD/SSD
301-500	2 cores	8 GB	HDD/SSD
501-1000	4 cores	8 GB	HDD/SSD
TIP: We recommend solid-state drive (SSD).			

4. From the **Virtual Machine Settings** window, click **Add...**
5. From the pop-up window **Add Hardware Wizard**, select **Hard Disk** from the list of Hardware types, and then click **Next >**.

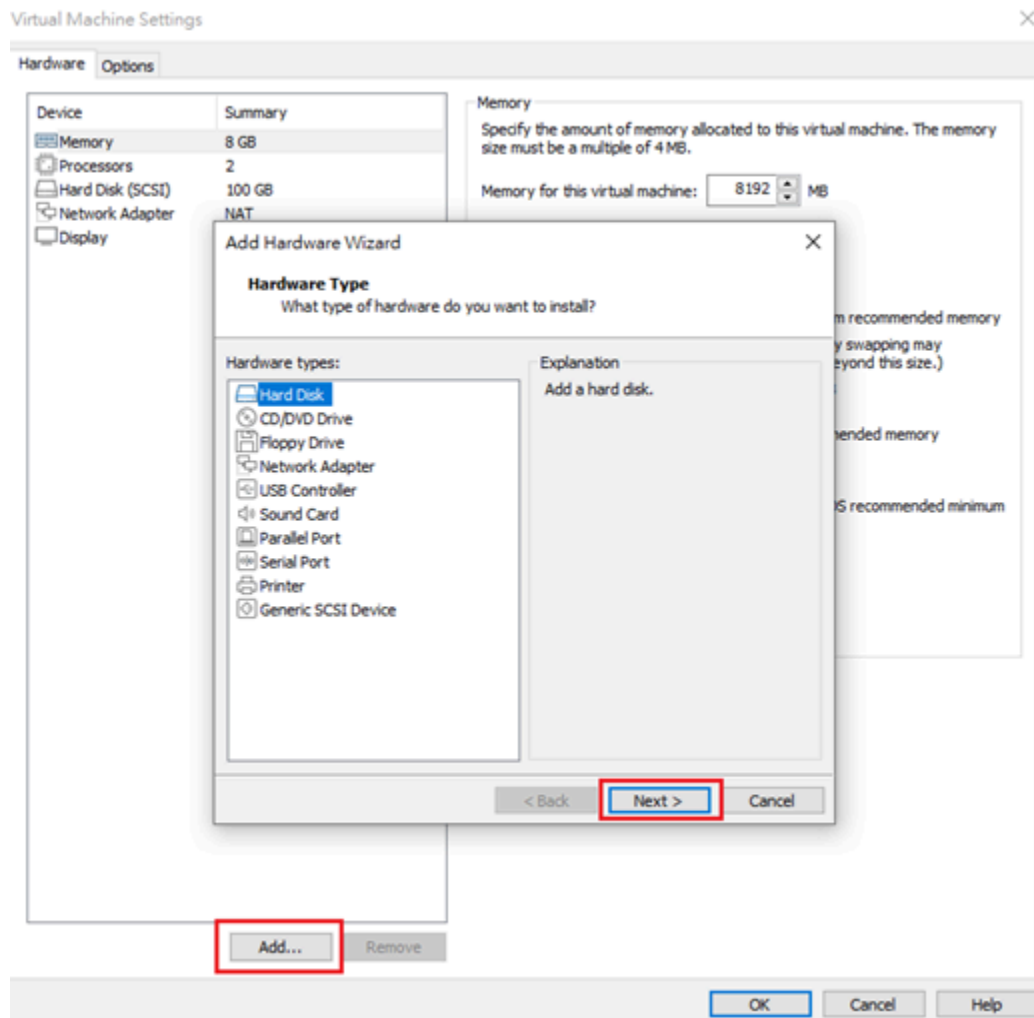

6. Select **SCSI** as the disk type, and then click **Next >**.

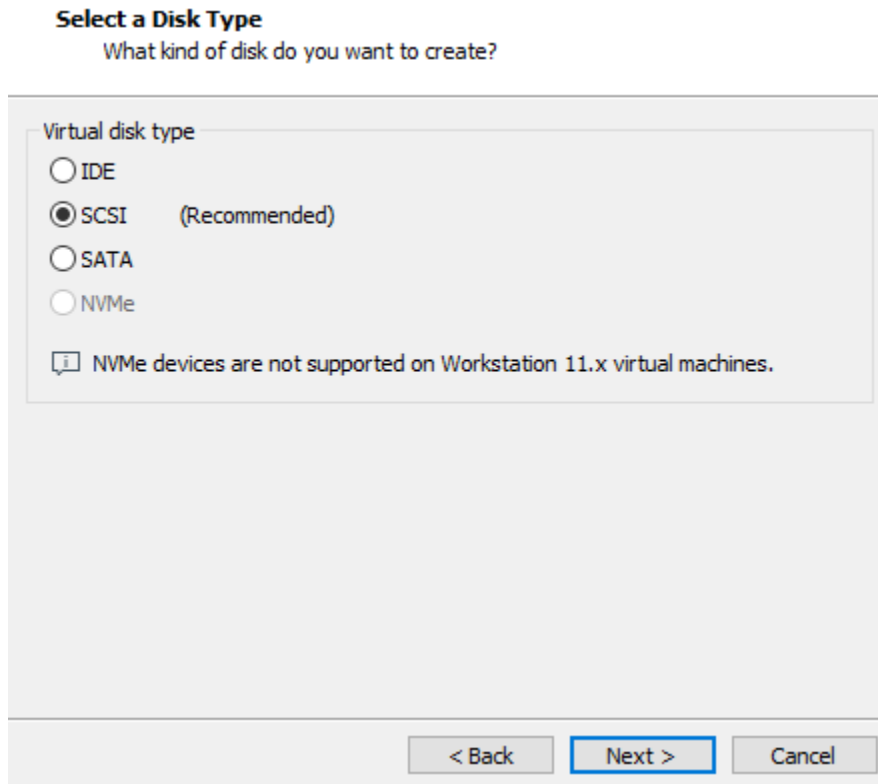

7. Select **Create a new virtual disk**, and then click **Next >**.

Select a Disk
Which disk do you want to use?

Disk

☒ Create a new virtual disk
A virtual disk is composed of one or more files on the host file system, which will appear as a single hard disk to the guest operating system. Virtual disks can easily be copied or moved on the same host or between hosts.

☐ Use an existing virtual disk
Choose this option to reuse a previously configured disk.

☐ Use a physical disk (for advanced users)
Choose this option to give the virtual machine direct access to a local hard disk. Requires administrator privileges.

< Back **Next >** Cancel

8. Modify the size of the new hard disk, and then click **Next >**.

Specify Disk Capacity
How large do you want this disk to be?

Maximum disk size (GB):

Recommended size for Other: 8 GB

☐ Allocate all disk space now.
Allocating the full capacity can enhance performance but requires all of the physical disk space to be available right now. If you do not allocate all the space now, the virtual disk starts small and grows as you add data to it.

☐ Store virtual disk as a single file

☒ Split virtual disk into multiple files
Splitting the disk makes it easier to move the virtual machine to another computer but may reduce performance with very large disks.

< Back Next > Cancel



Note:

- You can choose to store the virtual disk as a **single file** or **multiple files**, depending on your management requirements.
- The **minimum** size for the data disk is 20 GB.

ElementOne will not start if the data disk size is less than 20 GB.

- Excluding quarantined files, the minimum data disk size requirements for ElementOne logs are as follows.

We recommend increasing your current database size at least to the data disk size specified in the table.

For example, if you purchase 350 devices, where each device scans 10 assets per week, the total number of scan logs generated per year will be 182,000 scan logs (350 devices * 10 assets * 52 weeks).

At the minimum of 20 GB data disk size, ElementOne can store scan logs for over 40 years. However, the actual disk space requirement varies largely by the number and sizes of quarantined files.

	Number of scan logs	Image disk size	Data disk size
	8,000,000	100 GB	20 GB
	10,000,000		25 GB
	50,000,000		110 GB
	100,000,000		210 GB

9. Enter a disk file name, and then click **Finish**.

Specify Disk File
Where would you like to store the disk file?

Disk file

A 20 GB virtual disk be created using multiple disk files. The disk files will be automatically named based on this file name.

< Back **Finish** Cancel



Note:

◦ **Adding an Element Connect Disk (Optional)**


Adding an **Element Connect Disk** is an optional step and is not required for the initial activation of ElementOne.



Please note that the minimum requirement for the Element Connect disk is **200 GB** or more to ensure proper functionality and sufficient storage capacity.

This optional step allows you to enable and fully utilize the Element Connect feature when needed.

10. Click **Power on this virtual machine** to activate ElementOne.

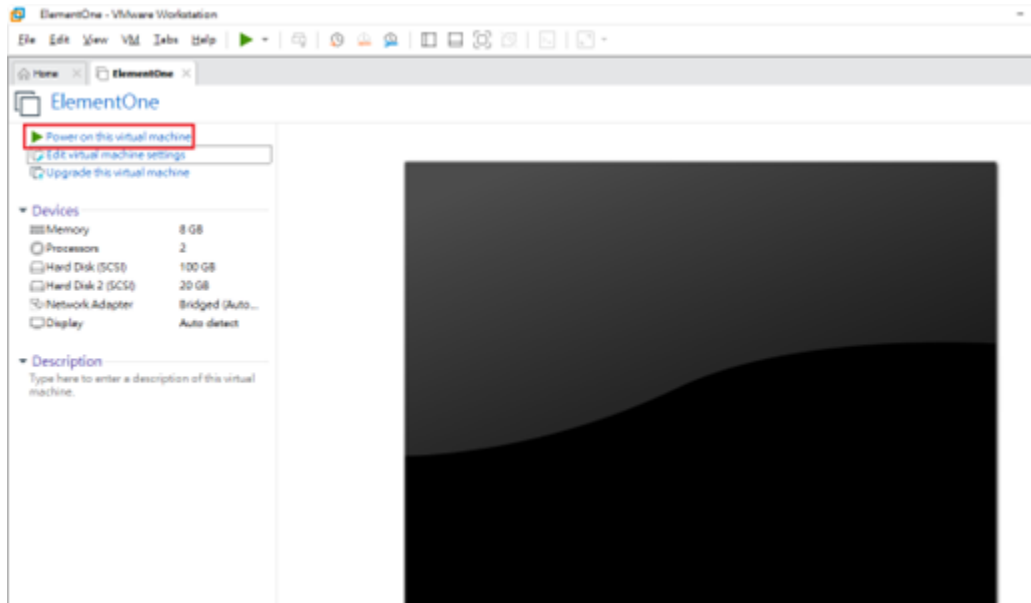

Chapter 4. How to Extend Disk on VMware Workstation


This article provides step-by-step instructions to extend data disks or Element Connect disks using VMDK files for VMware Workstation.

Prerequisites


- VMware Workstation 16 Pro or later is required.
- Encryption Limitations: Storage encryption mechanisms, such as BitLocker, are not supported during the disk extension process.

Extend ElementOne Data Disk


1. On the VM toolbar, click **Shut Down Guest** to safely power off the virtual machine.

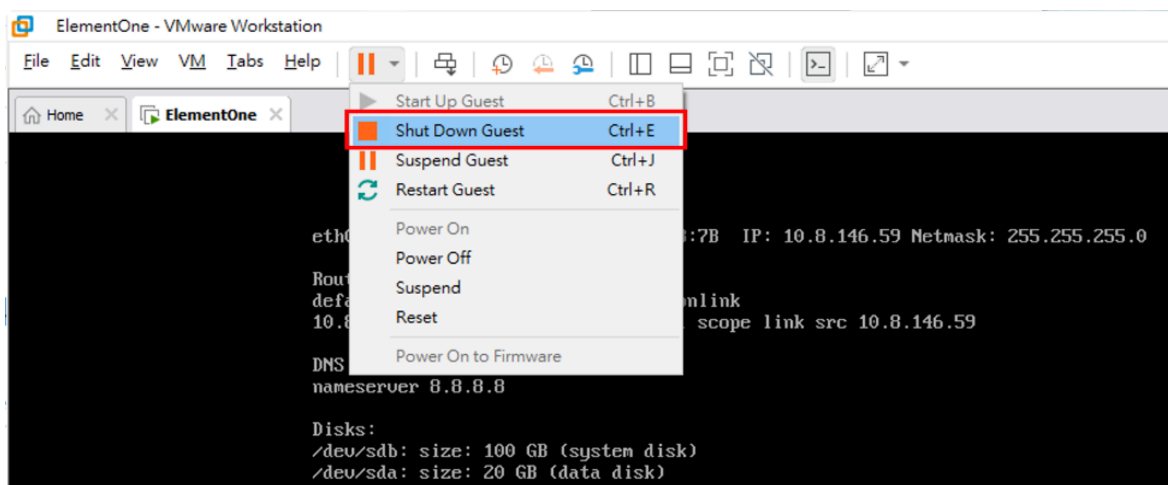

2. Click **Edit virtual machine settings**.

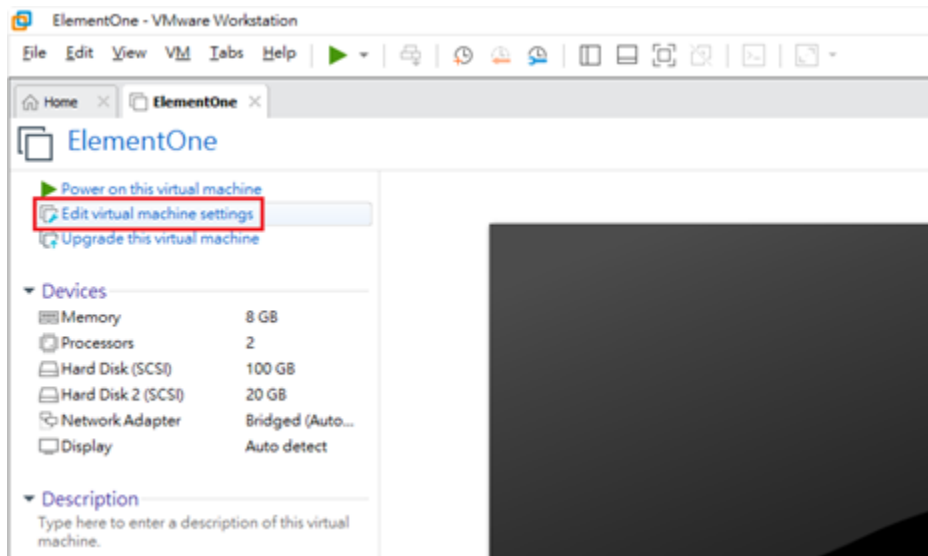

3. From the **Virtual Machine Settings** window, select the hard disk, and then click **Expand....**
4. From the pop-up window **Expand Disk Capacity**, modify the **Maximum disk size (GB)** field to the desired value, and then click **Expand** to apply the changes.

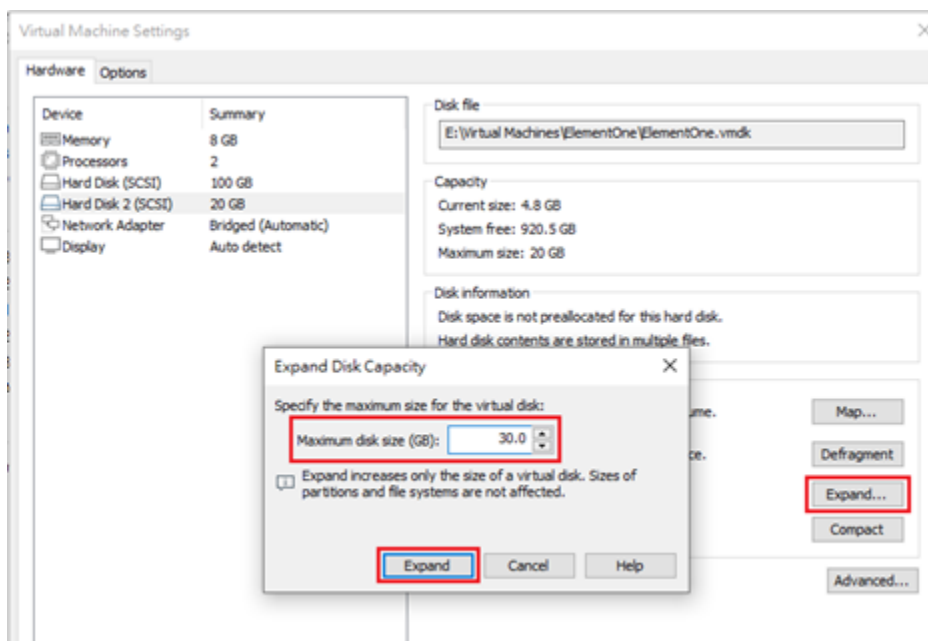


Note:

The new size must be equal to or larger than the original size of 10 GB or more.

Otherwise, ElementOne will be unable to extend the data disk.

5. You can see that the size of the data disk has been extended.
6. Click **Power on this virtual machine** to turn on the VM.

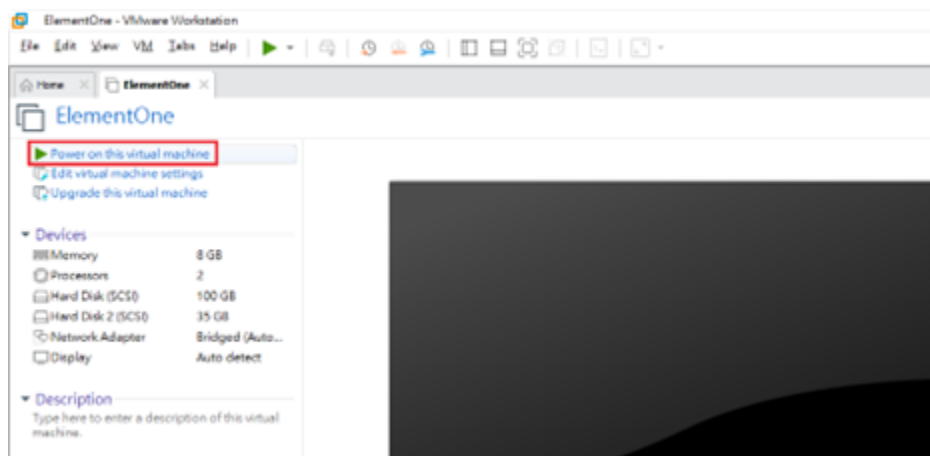


7. On ElementOne vshell, input the following:
 - a. Input `elementone service stop`.
 - b. Input `elementone datadisk extend`.
 - c. Check the extend information, and then input `yes`.
 - d. Input `elementone service start` to complete the data disk extend.


```
ElementOne Command Line Interface
$ elementone service stop
Active: inactive (dead) since Mon 2024-12-23 09:40:44 UTC: 4ms ago
$ elementone datadisk extend
Device name: /dev/sdb
data disk status: mount
Disk capacity: 30.0 GB
Allocated space: 20.0 GB
Unallocated free space: 10.0 GB
The data disk "/dev/sdb" will be extended by 10.0 GB, increasing its capacity to 30.0 GB.
Proceed (yes/no)? yes
Device name: /dev/sdb
data disk status: mount
Disk capacity: 30.0 GB
Allocated space: 30.0 GB
Unallocated free space: 0.0 GB
$ elementone service start
Active: active (running) since Mon 2024-12-23 09:42:35 UTC: 4ms ago
$
dlog      Collect OS information and service debug logs.
elementone ElementOne Service.
env       Manage system environment variables.
iface     Manage the network interfaces.
logout    Log out of Vshell.
ping      Test the reachability of a host.
poweroff  Shut down the machine immediately.
```

Extend ElementOne Element Connect Disk


1. On the VM toolbar, click **Shut Down Guest** to safely power off the virtual machine.

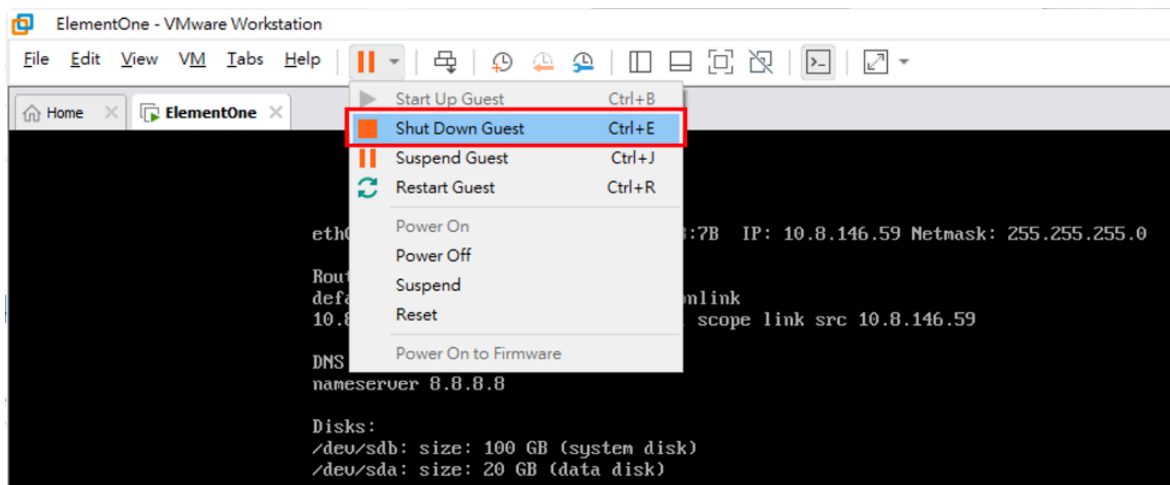

2. Click **Edit virtual machine settings**.

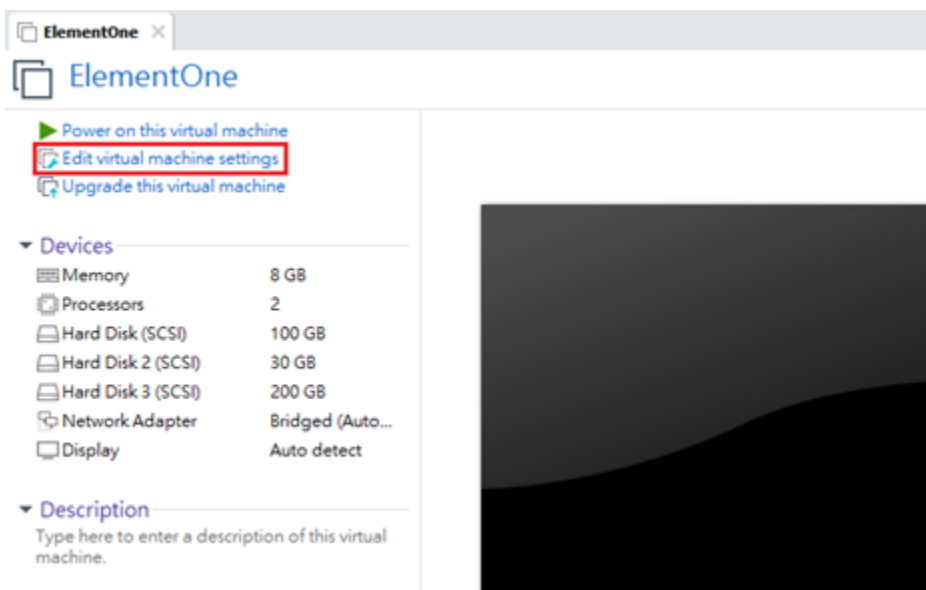

3. From the **Virtual Machine Settings** window, select the hard disk, and then click **Expand....**
4. From the pop-up window Expand Disk Capacity, modify the **Maximum disk size (GB)** field to the desired value, and then click **Expand** to apply the changes.

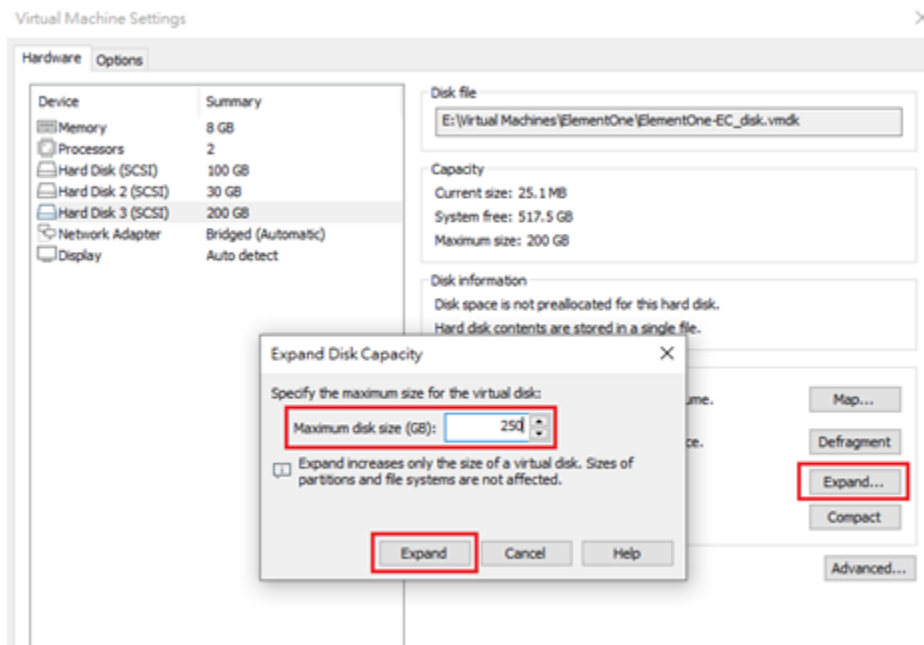


Note:

The new size must be equal to or larger than the original size of 10 GB or more.

Otherwise, ElementOne will be unable to extend the data disk.

5. You can see that the size of the data disk has been extended.
6. Click **Power on this virtual machine** to turn on the VM.

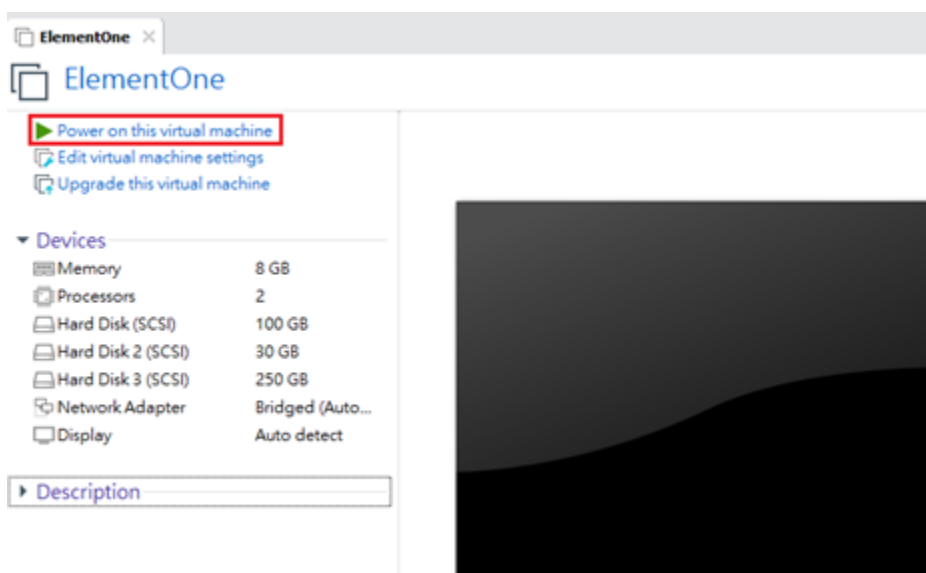

7. On ElementOne vshell, input the following:


- a. Input `elementone service stop`.
- b. Input `elementone elementconnect local extend`.
- c. Check the extend information, and then input `yes`.
- d. Input `elementone service start` to complete the elementconnect disk extend.

```
ElementOne Command Line Interface
$ elementone service stop
Active: inactive (dead) since Mon 2024-12-23 09:43:07 UTC: 3ms ago
$ elementone elementconnect local extend
Device name: /dev/sdc
Element Connect disk status: mount
Disk capacity: 250.0 GB
Allocated space: 200.0 GB
Unallocated free space: 50.0 GB
The Element Connect disk "/dev/sdc" will be extended by 50.0 GB, increasing its capacity to 250.0 GB.
Proceed (yes/no)? yes
Device name: /dev/sdc
Element Connect disk status: mount
Disk capacity: 250.0 GB
Allocated space: 250.0 GB
Unallocated free space: 0.0 GB
$ elementone service start
Active: active (running) since Mon 2024-12-23 09:44:07 UTC: 3ms ago
$
dlog      Collect OS information and service debug logs.
elementone ElementOne Service.
env       Manage system environment variables.
iface     Manage the network interfaces.
logout    Log out of Vshell.
ping      Test the reachability of a host.
poweroff  Shut down the machine immediately.
```


Chapter 5. How to Backup Disk on VMware Workstation

This function allows users to back up the data disk on VMware Workstation.


1. On the VM toolbar, click **Shut Down Guest** to safely power off the virtual machine.

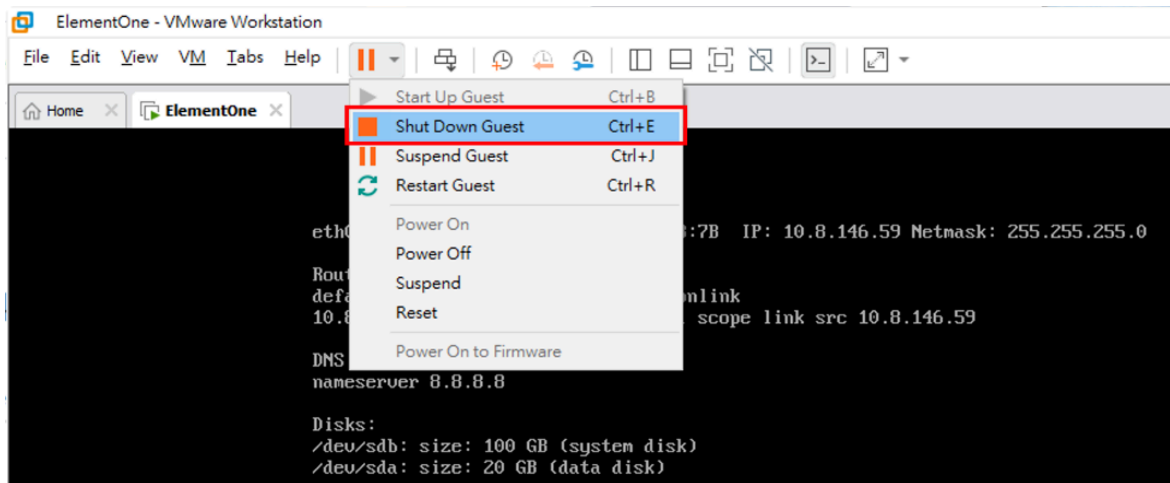

2. Click **Edit virtual machine settings**.

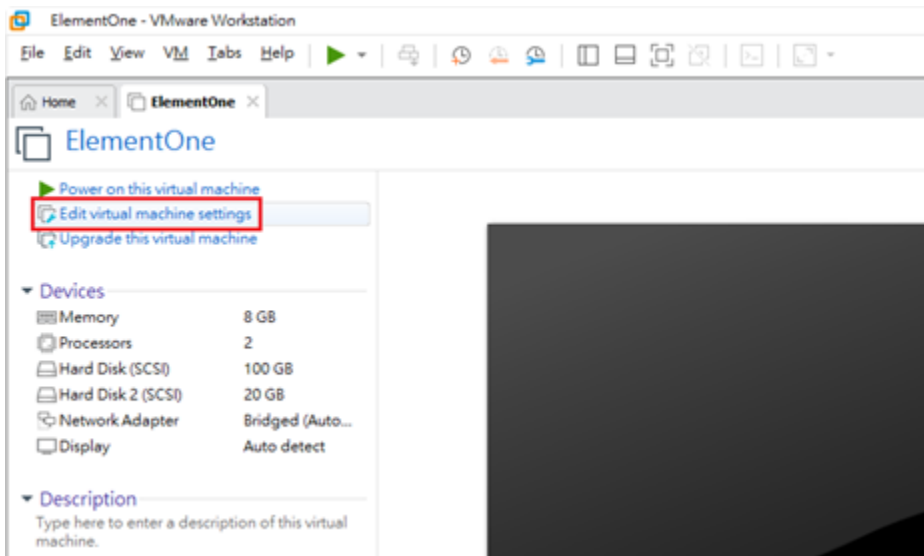

3. Check the file path of Data Disk.
 - a. From the **Virtual Machine Settings** window, select the Data Disk.
 - b. Check the file path of Data Disk in the **Disk file** field on the right.

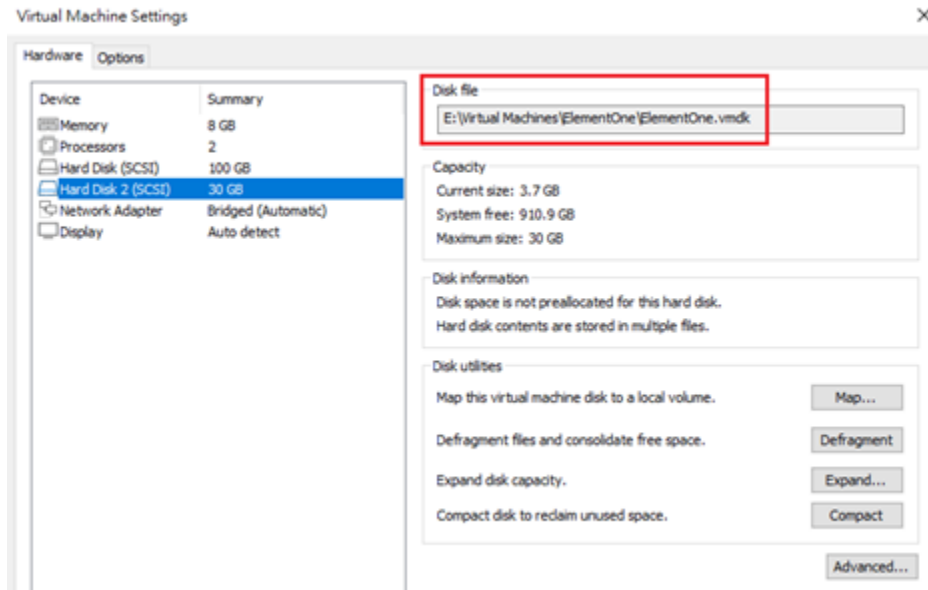

4. Locate and copy the file path of Data Disk.
 - a. Open File Explorer.
 - b. Navigate to the file path of Data Disk obtained in the previous step.
 - c. For different Disk File Setups:

- i. **Single Disk File Setup:** If your setup uses a single .vmdk file, select the file and copy its file path for further use.
- ii. **Multiple Disk File Setup:** If your setup uses multiple .vmdk files (as shown in the screenshot), ensure you select all the associated files and save their file paths for further use.

名称	修改日期	类型	大小
ElementOne.vmdk	2024/12/18 下午 09:46	VMware virtual d...	1 KB
ElementOne.vmsd	2024/12/18 下午 05:39	VMware snapsho...	0 KB
ElementOne.vmx	2024/12/18 下午 09:51	VMware virtual ...	3 KB
ElementOne.vmx	2024/12/18 下午 05:39	VMware Team M...	1 KB
ElementOne-disk1.vmdk	2024/12/18 下午 09:51	VMware virtual d...	10,920,448 KB
ElementOne-s001.vmdk	2024/12/18 下午 09:51	VMware virtual d...	1,078,784 KB
ElementOne-s002.vmdk	2024/12/18 下午 09:50	VMware virtual d...	2,587,520 KB
ElementOne-s003.vmdk	2024/12/18 下午 09:51	VMware virtual d...	175,616 KB
ElementOne-s004.vmdk	2024/12/18 下午 09:46	VMware virtual d...	704 KB
ElementOne-s005.vmdk	2024/12/18 下午 09:46	VMware virtual d...	640 KB
ElementOne-s006.vmdk	2024/12/18 下午 09:46	VMware virtual d...	128 KB
nvrnm	2024/12/18 下午 05:49	檔案	9 KB
vm.scoreboard	2024/12/18 下午 09:40	SCOREBOARD 檔...	8 KB
vm-1.scoreboard	2024/12/18 下午 05:40	SCOREBOARD 檔...	8 KB
vm-2.scoreboard	2024/12/18 下午 05:50	SCOREBOARD 檔...	8 KB
vmware.log	2024/12/18 下午 09:51	文字文件	195 KB
vmware-0.log	2024/12/18 下午 07:11	文字文件	155 KB
vmware-1.log	2024/12/18 下午 05:49	文字文件	156 KB


5. Back up and store the disk files.

- a. Browse the directory to locate the .vmdk files (or the equivalent files for your setup).
- b. Create a copy of the disk files.
- c. Follow your organization's backup policy to securely store the copied files.

名称	修改日期	类型	大小
ElementOne.vmdk	2024/12/18 下午 09:46	VMware virtual d...	1 K
ElementOne-s001.vmdk	2024/12/18 下午 09:51	VMware virtual d...	1,078,784
ElementOne-s002.vmdk	2024/12/18 下午 09:50	VMware virtual d...	2,587,520
ElementOne-s003.vmdk	2024/12/18 下午 09:51	VMware virtual d...	175,616 K
ElementOne-s004.vmdk	2024/12/18 下午 09:46	VMware virtual d...	704 K
ElementOne-s005.vmdk	2024/12/18 下午 09:46	VMware virtual d...	640 K
ElementOne-s006.vmdk	2024/12/18 下午 09:46	VMware virtual d...	128 K

6. (Optional) Follow this step to ensure the Element Connect disk is also backed up.

- a. Check the file path of Element Connect Disk.
 - i. From the **Virtual Machine Settings** window, select the Element Connect Disk.
 - ii. Check the file path of Element Connect Disk in the **Disk file** field on the right.

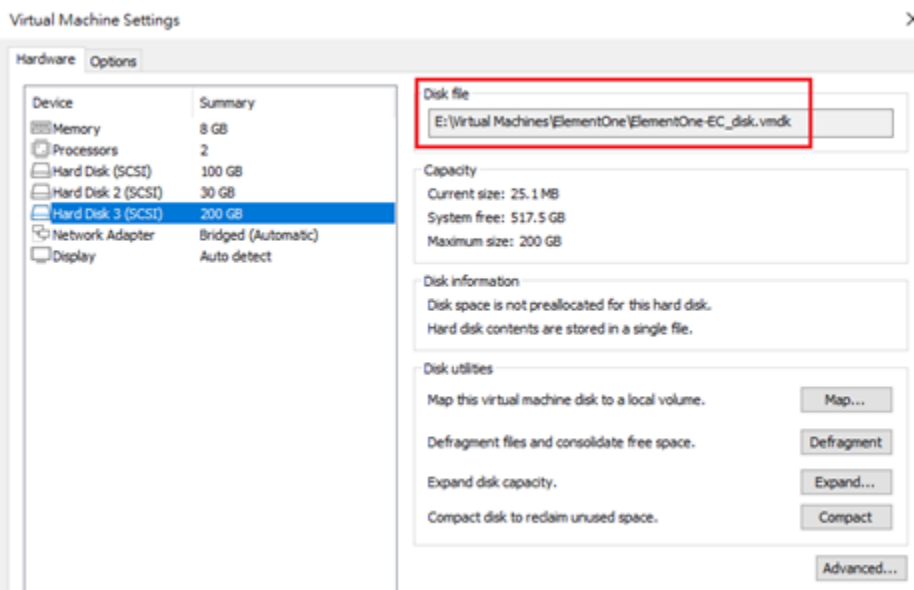

- b. Locate and copy the file path of Element Connect Disk.
 - i. Open File Explorer.
 - ii. Navigate to the file path of Element Connect Disk obtained in the previous step.
 - iii. For different Disk File Setups:
 1. **Single Disk File Setup:** If your setup uses a single .vmdk file, select the file and copy its file path for further use.
 2. **Multiple Disk File Setup:** If your setup uses multiple .vmdk files, ensure you select all the associated files and save their file paths for further use.
- c. Back up and store the disk files.
 - i. Browse the directory to locate the .vmdk files (or the equivalent files for your setup).
 - ii. Create a copy of the disk files.
 - iii. Follow your organization's backup policy to securely store the copied files.



Note:

When backing up disks, if the Element Connect disk is activated and enabled, please ensure to back up both the data disk and the Element Connect disk together.

Chapter 6. How to Migrate Disk on VMware Workstation

This article provides step-by-step instructions to backup and restore data disks or Element Connect disks using VMDK files for VMware Workstation.

Prerequisites

- VMware Workstation 16 Pro or later is required.
- Encryption Limitations: Storage encryption mechanisms, such as BitLocker, are not supported during the backup and restore process.


Restore Disks on ElementOne VM



Note:

Make sure you have backed up ElementOne data disk and Element Connect disk files before you perform restore on an ElementOne VM.

1. Shut Down the VM.
 - a. On the VM toolbar, click "Shut Down Guest" to safely power off the virtual machine.

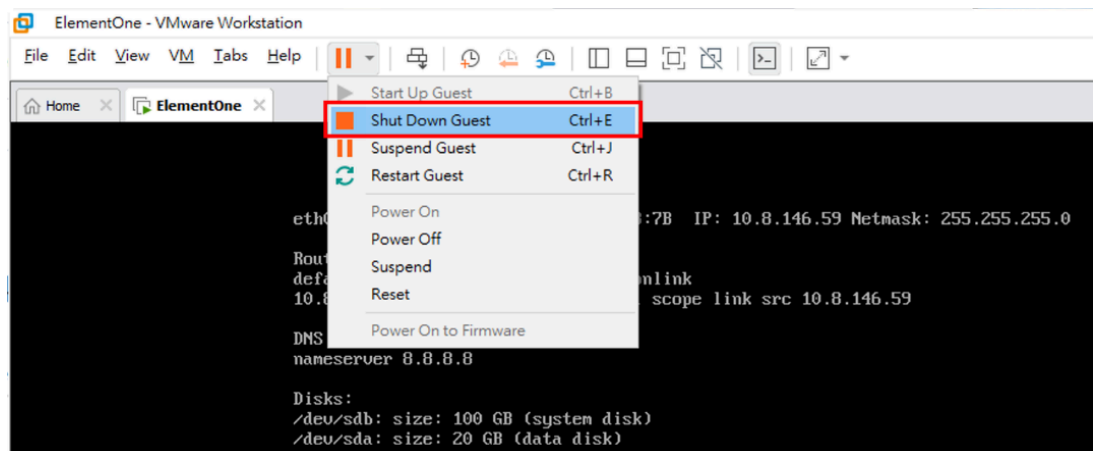


2. Remove the Disk File.

- a. In Virtual Machine Settings, select the disk to remove and click "Remove" to disconnect it.




Note:


- This only removes the disk link. The VMDK file remains in storage.
- If the VMDK file is no longer needed, manually delete it from the storage directory.

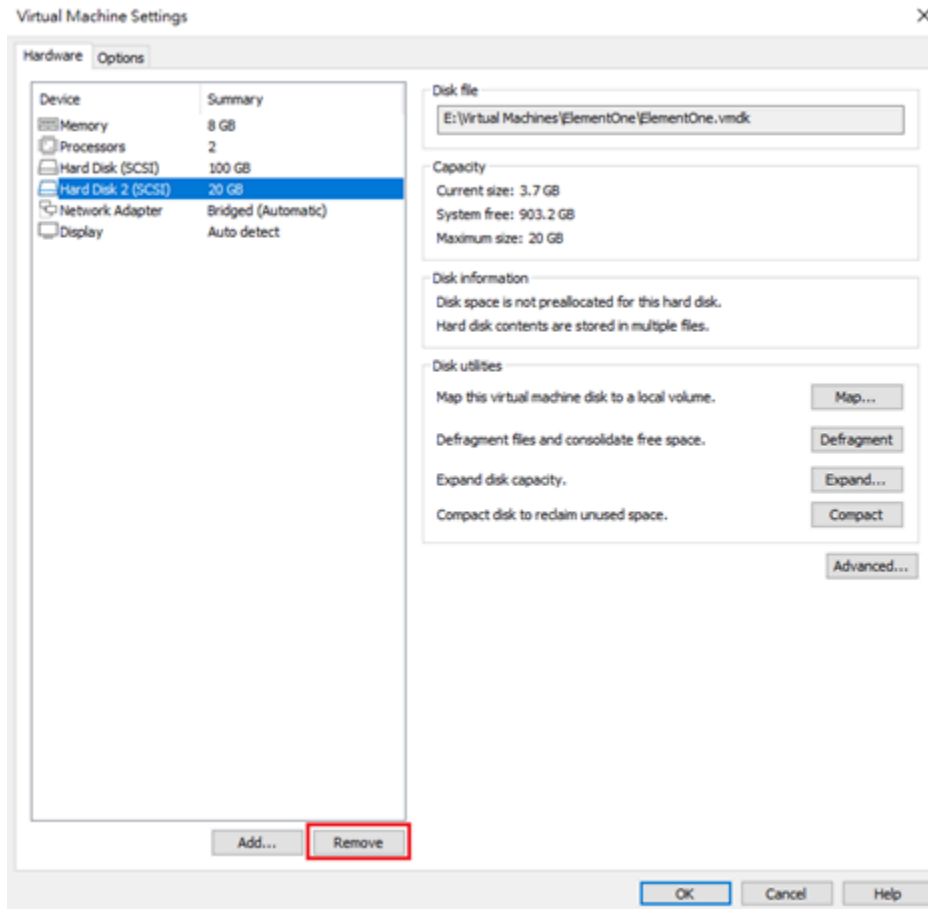


3. Restore the Backup Disk Files.
 - a. Copy the backup disk files (e.g., ElementOne Data Disk Backup) to the ElementOne VM directory.
 - b. Wait for the copying process to complete.

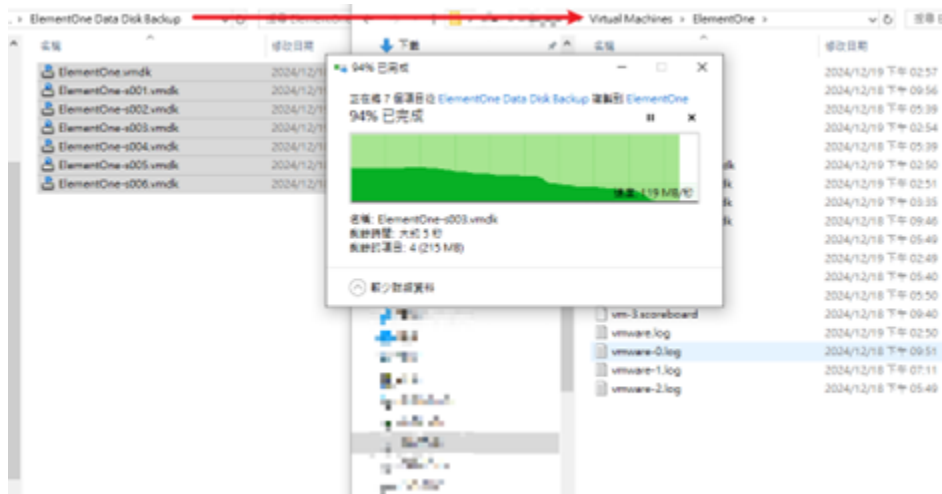


4. Access Virtual Machine Settings.
 - a. Return to the Virtual Machine page.
 - b. Click "Edit virtual machine settings".

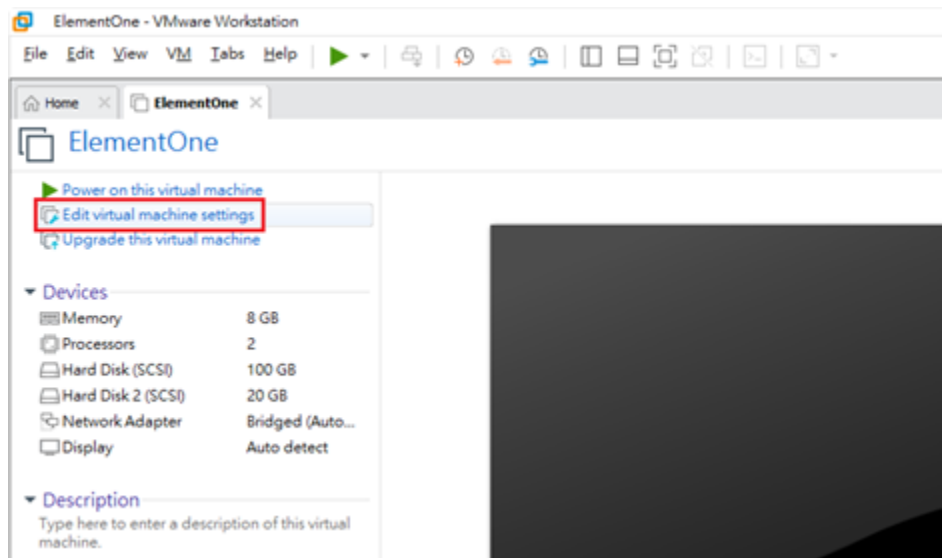


5. Add a New Hard Disk.
 - a. In the Virtual Machine Settings, click "Add...".
 - b. In the Add Hardware Wizard, select "Hard Disk" from the list of hardware types.
 - c. Click "Next >" to proceed.

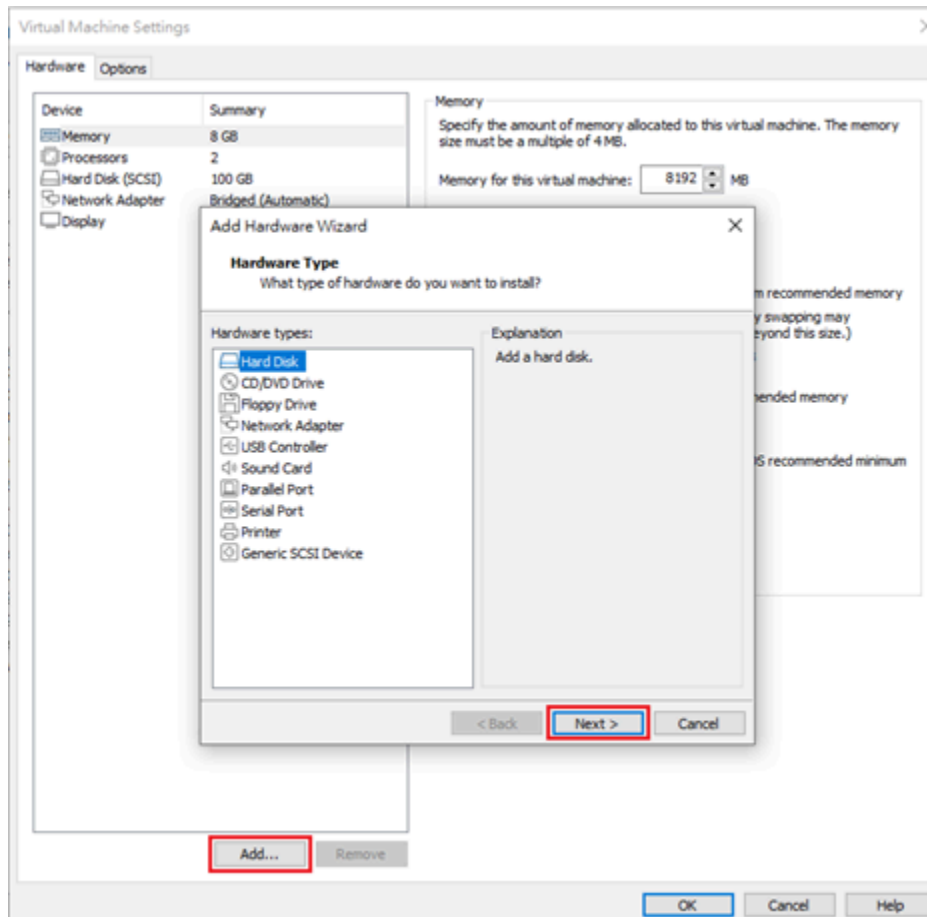


6. Select Disk Type.
 - a. In the Add Hardware Wizard, choose "SCSI" as the virtual disk type (recommended).
 - b. Click "Next >" to continue.

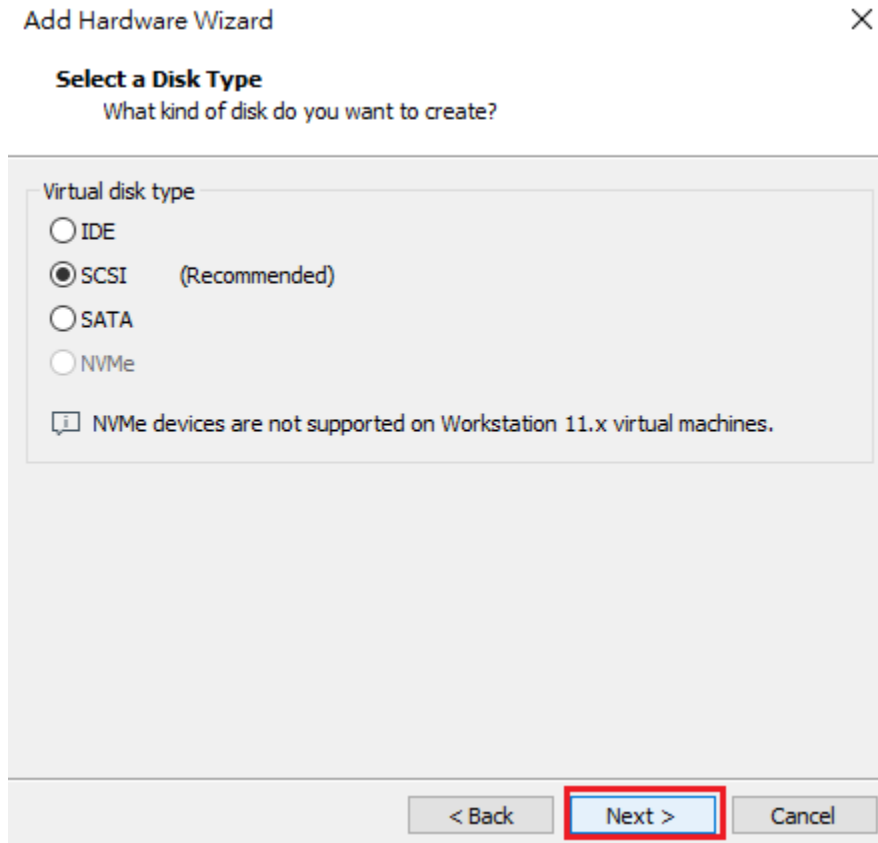


7. Select a Disk.
 - a. Choose "Use an existing virtual disk" to reuse a previously configured disk.
 - b. Click "Next >" to proceed.

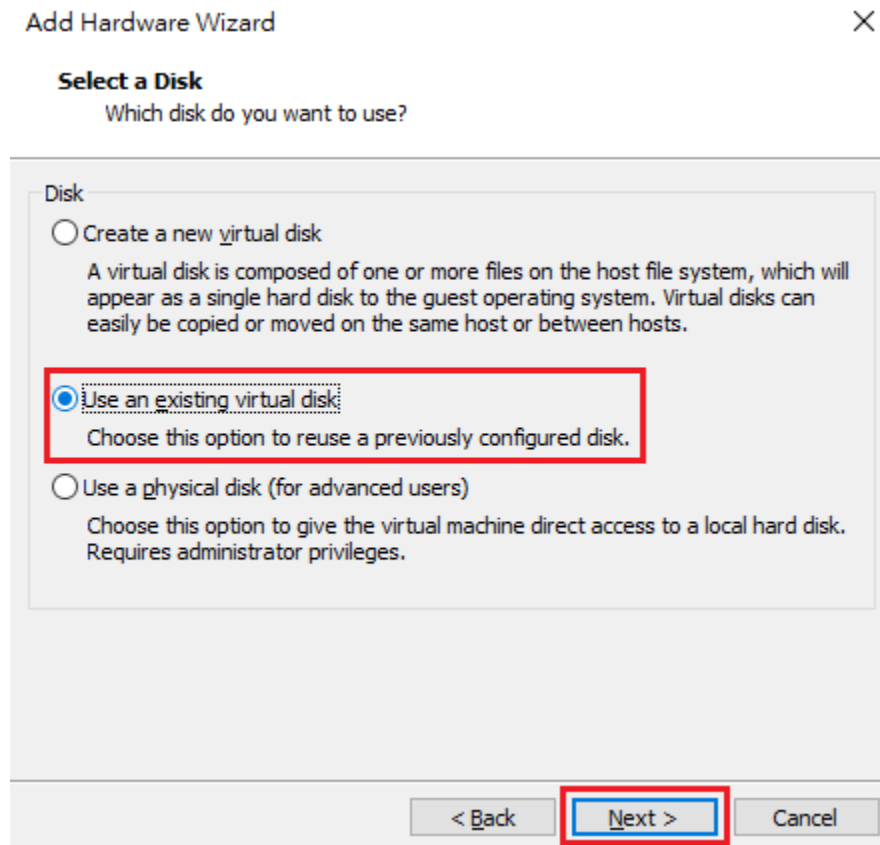

8. Select an Existing Disk.
 - a. Click "Browse..." and locate the existing virtual disk file (e.g., ElementOne.vmdk).
 - b. Select the disk file and click "Finish" to complete the process.

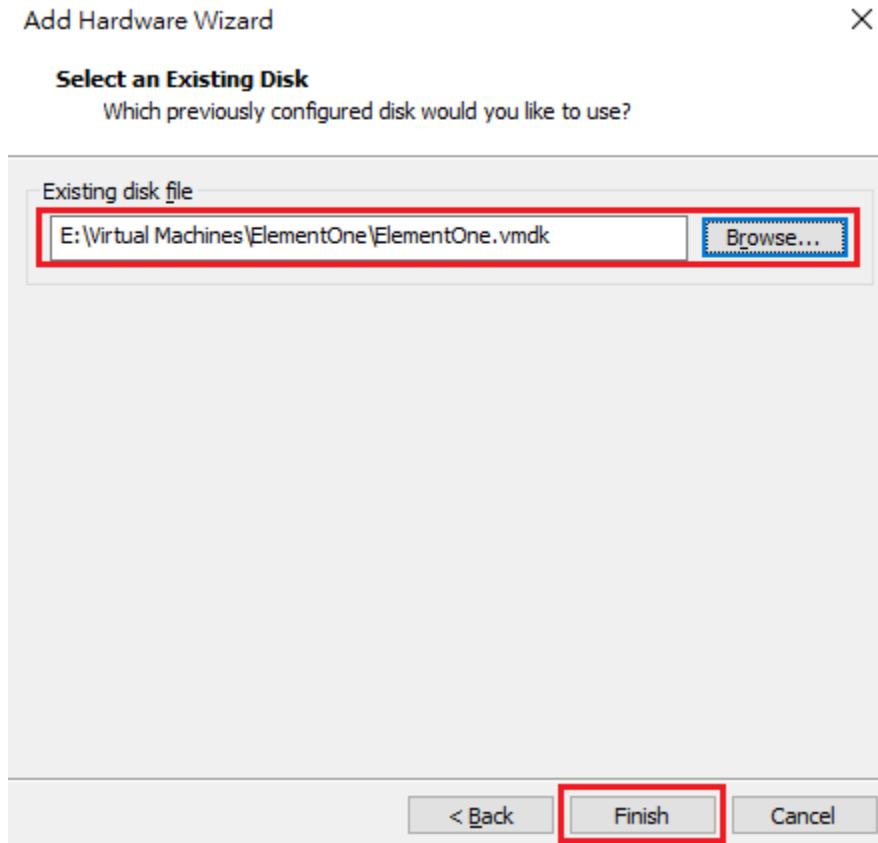


9. Complete the configuration.
 - a. Verify that the new hard disk appears in the Device list (e.g., New Hard Disk (SCSI)).
 - b. Click "OK" to save the settings and complete the configuration.

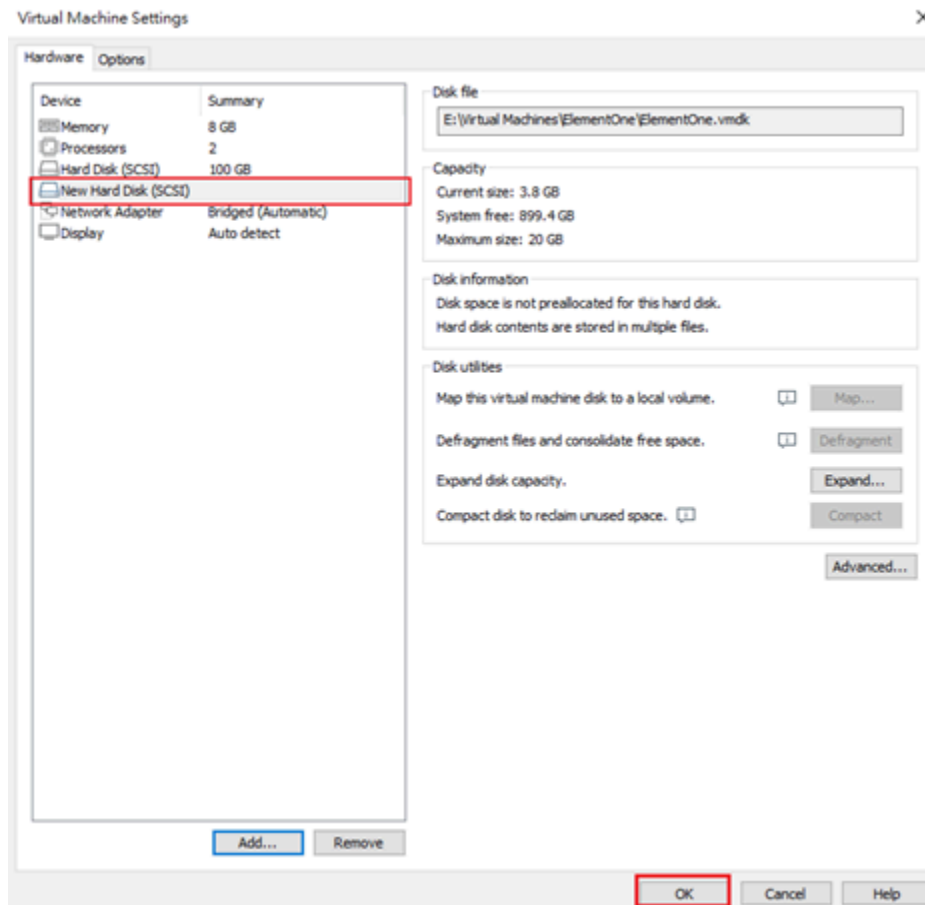

10. (Optional) **Follow the steps outlined in “Restore the Backup Disk Files” to attach the Element Connect disk.**


- In the Virtual Machine Settings, click “Add...” to create a new hard disk.
- Select the “Use an existing virtual disk” option and browse to locate the **Element Connect .vmdk** file.
- Confirm the disk path (e.g., E:\Virtual Machines\ElementOne\ElementOne-EC_disk.vmdk).
- Click “OK” to attach the disk to the virtual machine.

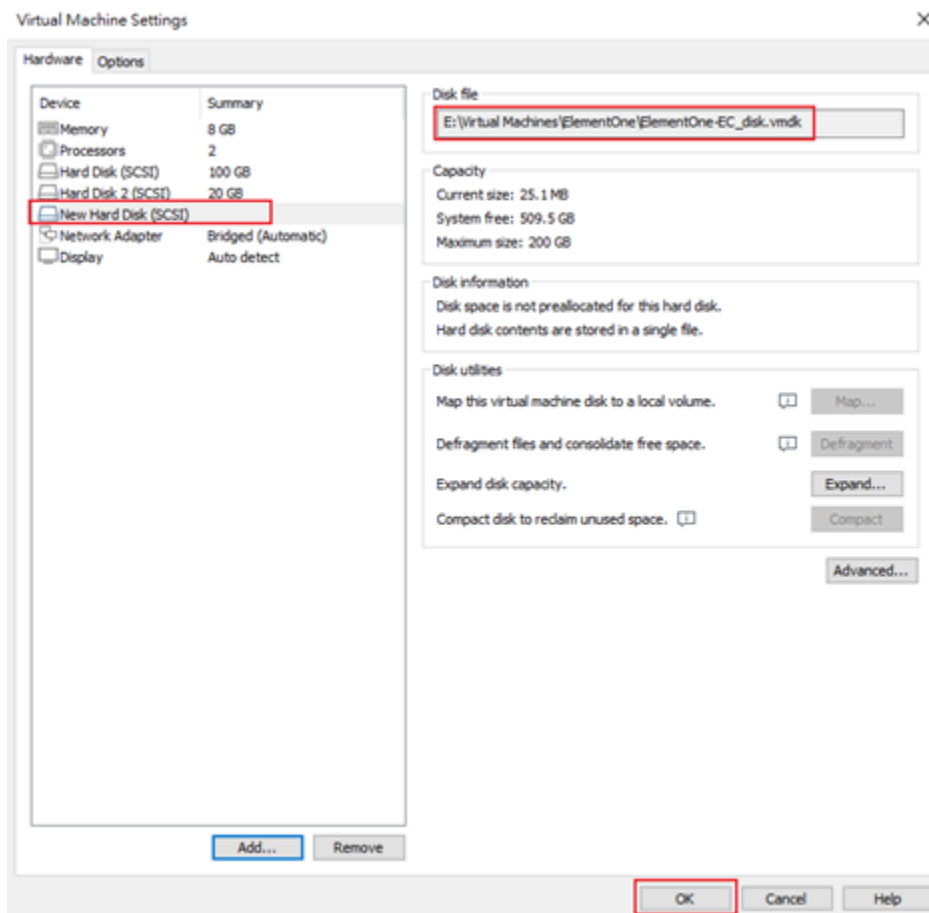

Note:


When restoring disks, if the Element Connect disk is activated and enabled, please ensure that both the data disk and the Element Connect disk are restored together. Otherwise, the collected samples and files in Secure Distribute may not be available.

11. Click "Power on this virtual machine" to start ElementOne.

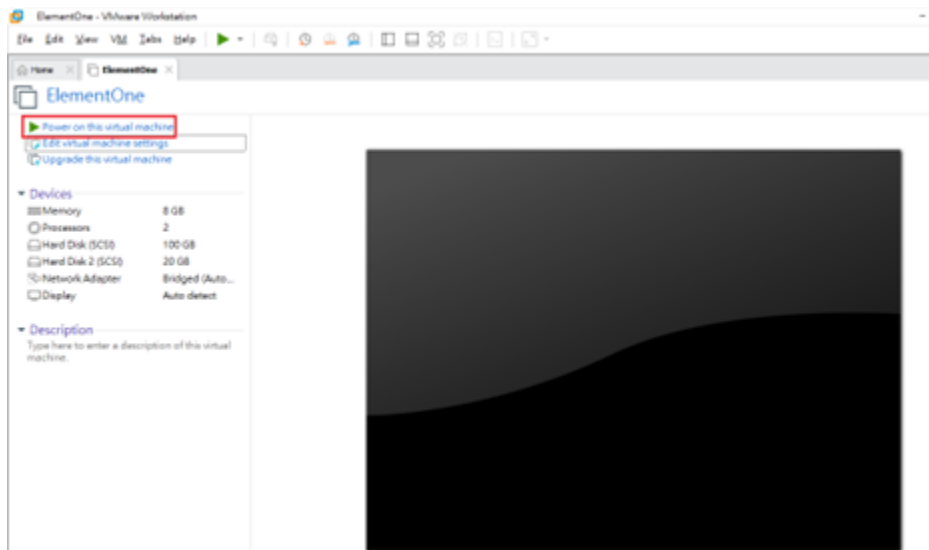


Migrate Disks to New ElementOne VM


1. Follow the [Deploying ElementOne on VMware Workstation \(on page 5\)](#) section in the Installation Guide to create an ElementOne VM with a new version of the ElementOne OVA file.
2. Restore the backup disk files.
 - a. Copy the backup disk files (e.g., ElementOne Data Disk Backup) to the new VM directory.
 - b. Wait for the copying process to complete.

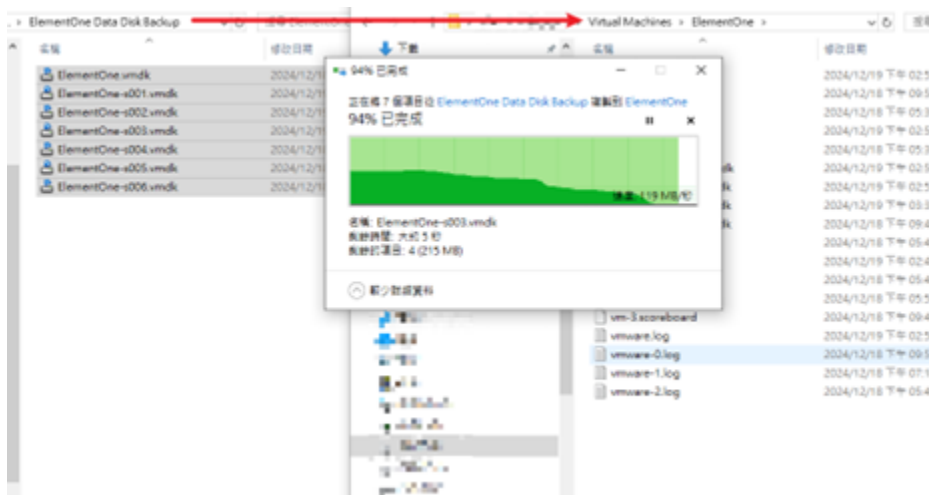

3. Go to the Virtual Machine page and click "Edit virtual machine settings".

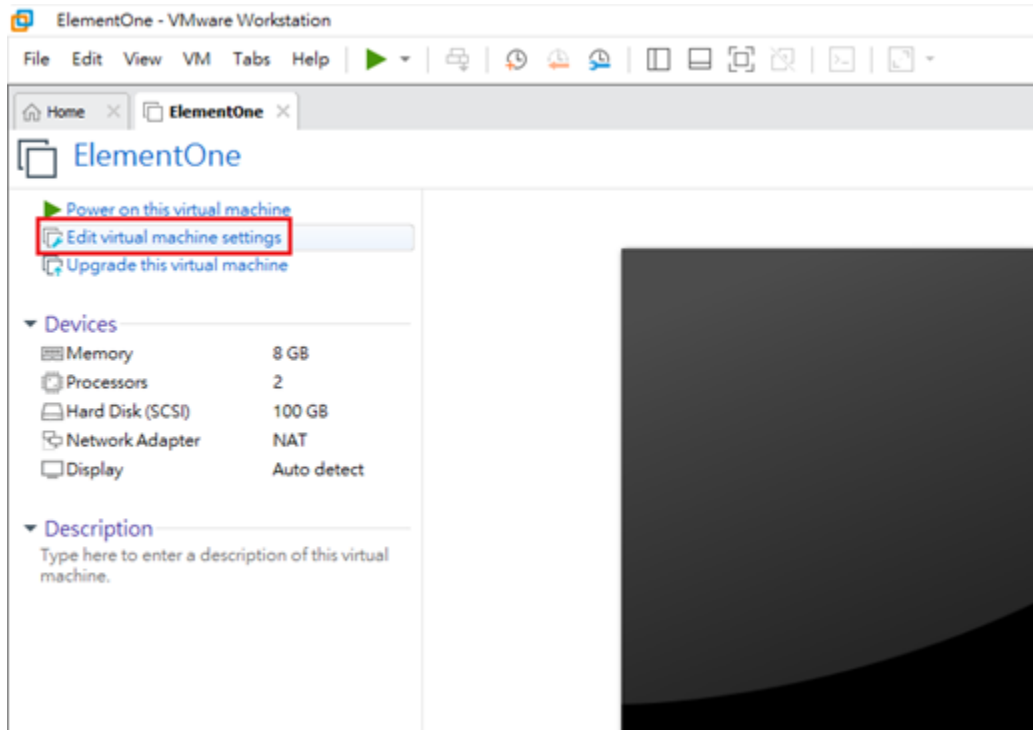


4. Add a New Hard Disk.
 - a. In the Virtual Machine Settings, click "Add...".
 - b. In the Add Hardware Wizard, select "Hard Disk" from the list of hardware types.
 - c. Click "Next >" to proceed.

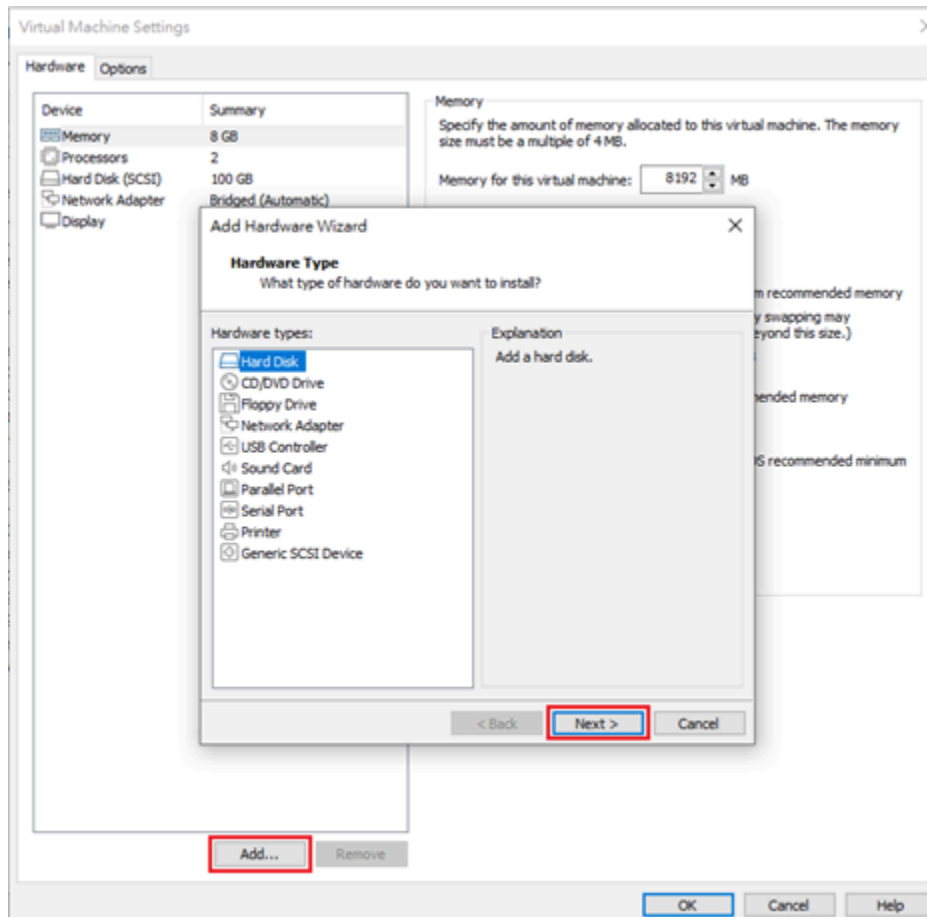


5. Select Disk Type.


- a. In the Add Hardware Wizard, choose "SCSI" as the virtual disk type (recommended).
- b. Click "Next >" to continue.

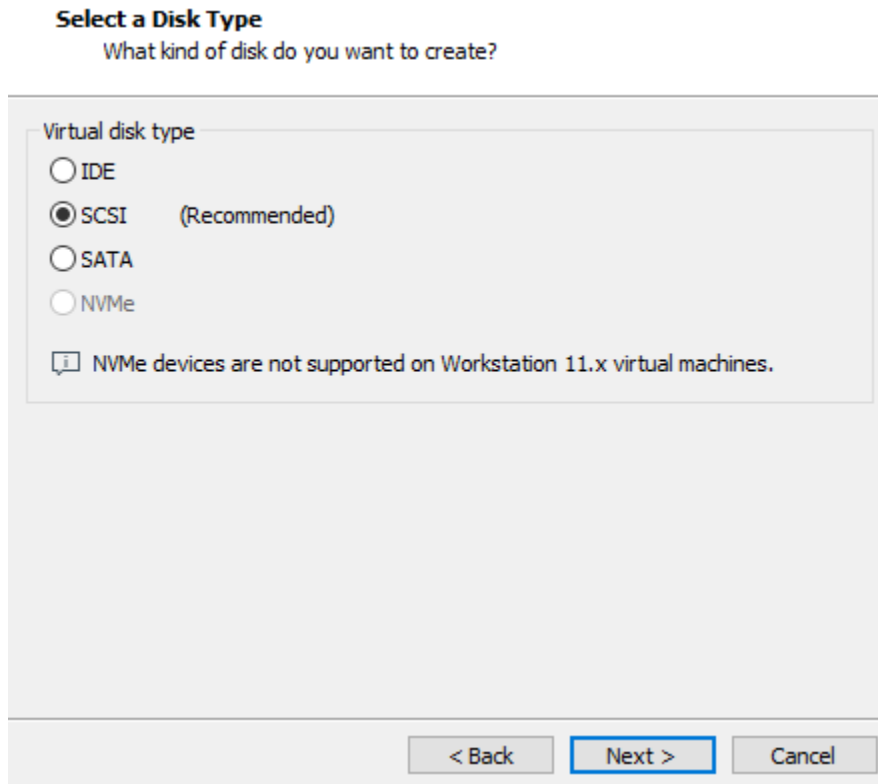


6. Select a Disk.
 - a. Choose "Use an existing virtual disk" to reuse a previously configured disk.
 - b. Click "Next >" to proceed.

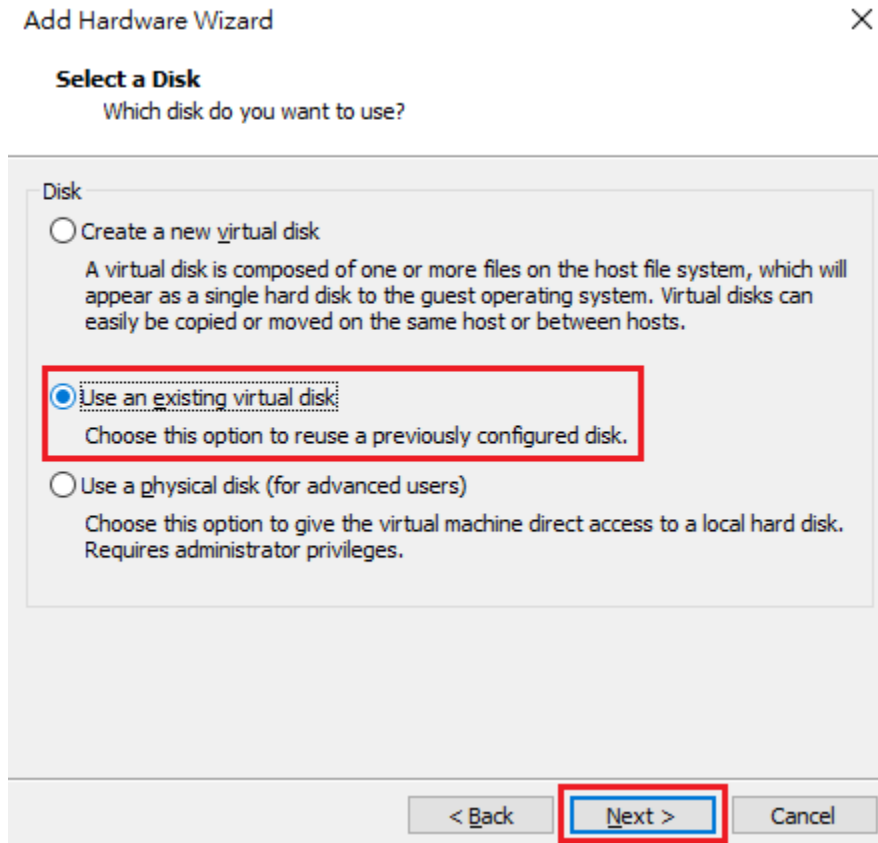


7. Select an Existing Disk.
 - a. Click "Browse..." and locate the existing virtual disk file (e.g., ElementOne.vmdk).
 - b. Select the disk file and click "Finish" to complete the process.

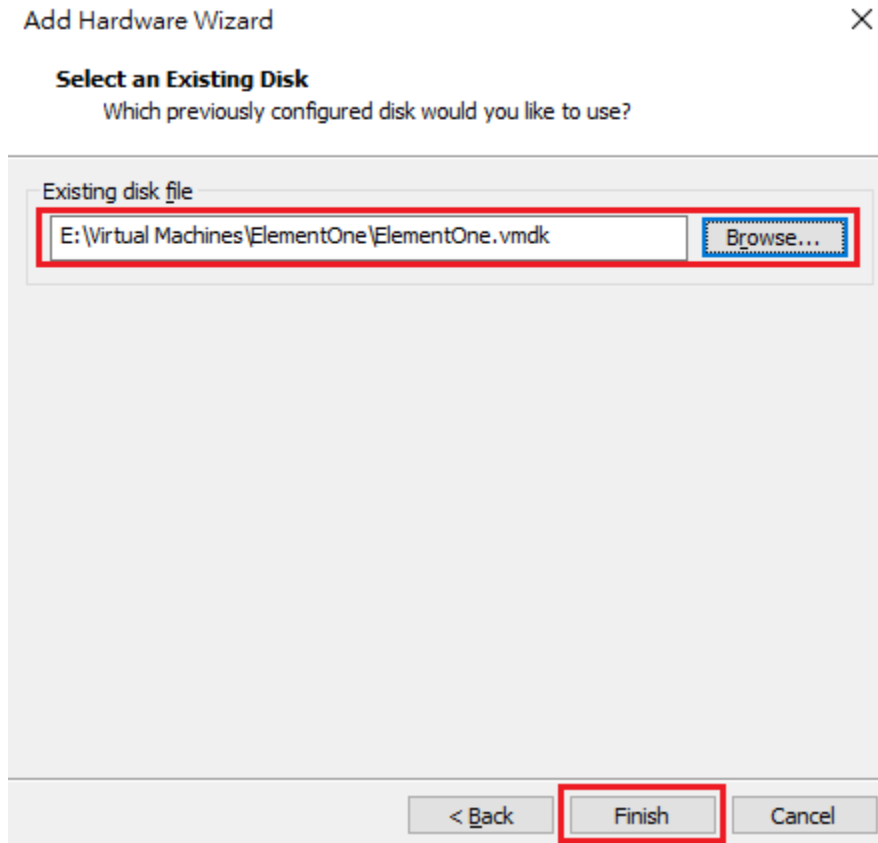

8. Complete the configuration.
 - a. Verify that the new hard disk appears in the Device list (e.g., New Hard Disk (SCSI)).
 - b. Click "OK" to save the settings and finalize the configuration.

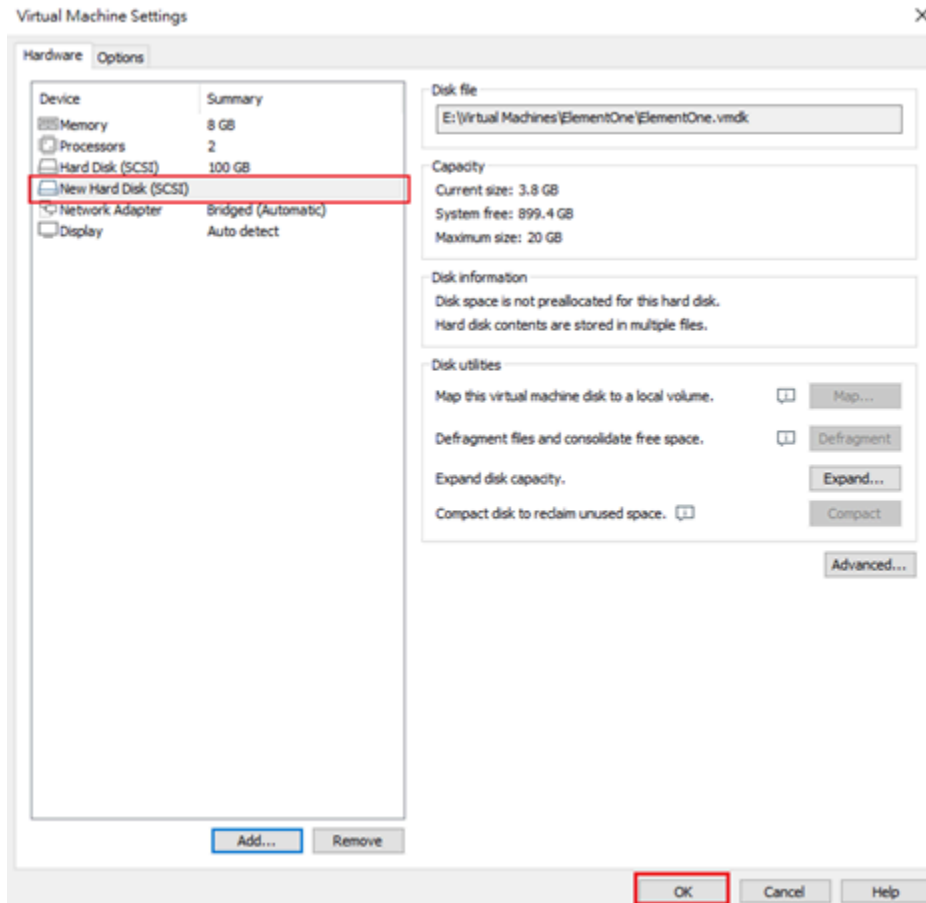

9. (Optional) Follow **Step 10** in [Restore Disks on ElementOne VM \(on page 25\)](#) to add the Element Connect disk to the virtual machine.
10. Click "Power on this virtual machine" to start ElementOne.

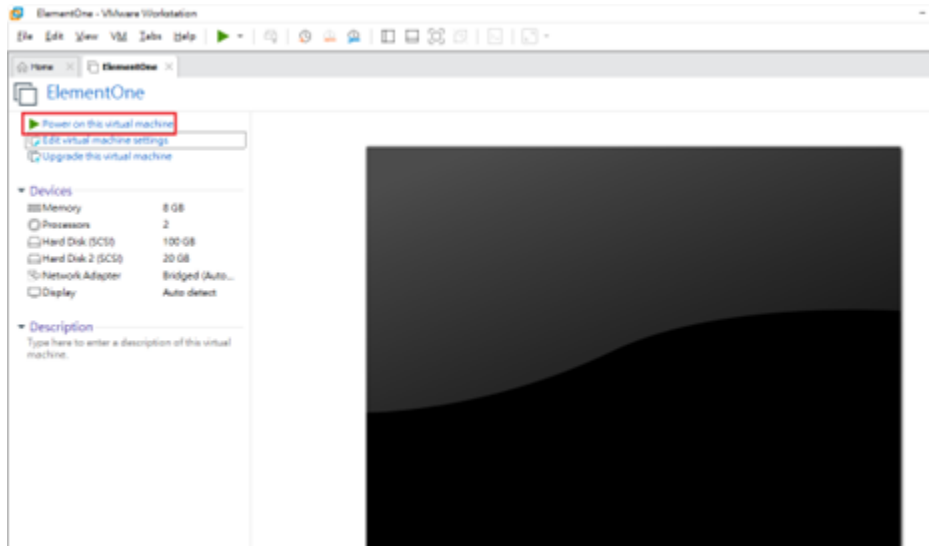

11. On the ElementOne VM, you need to perform OOBIE to set the hostname, network settings, system time, and console password again. Once these settings are configured, you will be able to browse the same data on ElementOne.

Chapter 7. Out-of-Box Experience

After creating the ElementOne VM, you need to go through the OOB (Out-of-Box Experience) before you can start using ElementOne. It usually takes about 2 minutes for ElementOne to initialize and boot from a new data disk. Afterwards, you will see the login prompt.

Default Login

In the console of ElementOne, log in using the default login credentials:

- ElementOne login: **root**
- Password: **txone**

Set Up the Network Interface of ElementOne VM



Note:

Avoid using the 169.254.0.0/24 for the network configuration whether you select DHCP or manual setting. This network configuration will interfere with the internal service network, preventing ElementOne from operating correctly.

1. If you want to use DHCP (recommended), enter 'y' and press 'Enter'.

```
ElementOne Command Line Interface is not activated, proceeding to OOB.  
[OOB - IP configuration] Set up network interface eth0 to DHCP (y/n)? y
```

2. If you do not want to use DHCP and prefer manual settings, enter 'n' and press 'Enter' to edit the settings. Type in the IP address, netmask, and the gateway IP address. Enter 'Y' and press 'Enter' to apply the settings.

```
[OOB - IP configuration] Set up network interface eth0 to DHCP (y/n)? n  
[OOB - static] Enter the IP address: 10.8.146.195  
[OOB - static] Enter the Netmask: 255.255.255.0  
[OOB - static] Enter the Gateway IP(press Enter to skip): 10.8.146.254  
[OOB - static] Are you sure you want to set eth0 with the settings shown above (y/n)? y
```

Set Up DNS Server

Ensure the domain name server can resolve TXOne domains and URLs. Failure to do so may cause errors during license activation, renewal, or component updates in ElementOne.

1. If the DNS servers list is empty, input the IP address of the DNS server and press "Enter" to append it. Enter "y" and press "Enter" to apply the settings.

```
[OOBE - DNS] Add a custom DNS server: x.x.x.x
[OOBE - DNS] Are you sure you want to add the DNS server(x.x.x.x) (y/n)? y
```

2. To skip adding a custom DNS server (recommended), press "Enter".

```
[OOBE - DNS] Current DNS settings:
nameserver 8.8.8.8
Add another custom DNS server or press Enter to use the current DNS servers:
```

3. To add a custom DNS server, input the DNS server's IP address, press "Enter" to append it, then enter "y" and press "Enter" to apply the settings.

```
[OOBE - DNS] Current DNS settings:
nameserver 8.8.8.8
Add another custom DNS server or press Enter to use the current DNS servers: x.x.x.x
[OOBE - DNS] Are you sure you want to add the DNS server(x.x.x.x) (y/n)? y
```

4. After completing this task, update the network's Access Control List (ACL) to include the DNS.

Set Up Element Data Disk

1. Select a disk from the list.
2. Input "y" to confirm.

```
[OOBE - Disk configuration] Select a disk from the list below to designate it as the data disk:

1. /dev/sdb - 20.0 GB (available)
2. /dev/sdc - 200.0 GB (available)
[-] /dev/sda - 100.0 GB (system disk)

Enter the number corresponding to your choice: 1

The disk "/dev/sdb" will be formatted and designated as the data disk. Proceed (y/n)? y

Data disk setup completed.
```

(For Element Connect feature) Set Up Element Connect Disk

This procedure is required exclusively for the Element Connect feature.

1. Select a disk from the list.
2. Input "y" to confirm.

```
[OOBE - Disk configuration] Select a disk from the list below to designate it as the Element Connect disk:

1. /dev/sdc - 200.0 GB (available)
[-] /dev/sda - 100.0 GB (system disk)
[-] /dev/sdb - 20.0 GB (data disk)

Enter the number corresponding to your choice (0 to skip): 1

The disk "/dev/sdc" will be formatted and designated as the Element Connect disk. Proceed (y/n)? y

Element Connect disk setup completed.
```

Set Up System Time

Set up the system time of ElementOne.

1. If you want to use NTP, enter "y" and then press "Enter" (recommended).



Note:

Press "Enter" to use the default NTP server (2.debian.pool.ntp.org).

Otherwise, input the IP address or the domain name for a custom NTP then press "Enter". The prompt will confirm the settings again, enter "y" then press "Enter" to apply the settings.

```
[OOBE - set-time] Enable the NTP to sync the system time (y/n)? y

[OOBE - set-time - NTP] Enter the NTP server address or press Enter to use the default NTP
server(2.debian.pool.ntp.org):

Time: 2024-11-18 17:09:19 +0000 UTC

Timezone: Etc/UTC

NTP: Enabled

NTP server: 2.debian.pool.ntp.org
```

2. If you do not want to use NTP and prefer manual settings, enter "n" and then press "Enter". Next, enter the current UTC date and time, and press "Enter" to apply the setting.

```
[OOBE - set-time] Enable the NTP to sync the system time (y/n)? n

[OOBE - set-time - manually] Enter the UTC date and time(in YYYY-MM-DD HH:MM, 24hr format): 2024-11-19 03:21
```

```
[OOBE - set-time] Are you sure you want to set the UTC date and time formats into 2024-11-19 03:21 (y/n)? y
Time: 2024-11-19 03:21:00 +0000 UTC
Timezone: Etc/UTC
NTP: Disabled
```

**Note:**

If you choose to manually set the time, ensure that the time you set is accurate. Failure to do so will prevent license activation/renewal and component updates for ElementOne.

3. After completing this task, update the network's Access Control List (ACL) to include the NTP.

Reset Password

1. Enter the current password then press "Enter".

**Note:**

The default credential is root/txone.

2. Enter the new password then press 'Enter'.
3. Re-enter the new password and press "Enter" to apply the changes.

```
[OOBE - reset password] Enter current password:
[OOBE - reset password] Enter new password:
[OOBE - reset password] Re-enter new password:
```

```
The password has updated successfully.
Activating the ElementOne service ....
ElementOne service is activated.
```

```
The OOBE process has been completed. You can log in with your Master Admin account and start using ElementOne.
```

```
ElementOne IP Address: 192.168.60.183
ElementOne Master Admin account ID: masteradmin
ElementOne Master Admin default password: oeHbP1iRW$
```

```
(press Enter to leave ...)
```

4. After you reset the password, ElementOne will be activated. ElementOne console will display the current IP address, the master admin account ID for logging in to ElementOne web console, and a temporary password for the web console.
5. Press "Enter" to leave the window.
6. Afterward, the Vshell login prompt will be displayed.

Vshell login prompt:

```
Debian GNU/Linux 11 elementone tty1
```

```
Hint: Num Lock on
```

```
elementone login:
```

Find the Master Admin Temporary Password

Forgotten temporary Masteradmin password can be found by:

```
elementone web reset
```


Finalizing Set Up through Web Console

1. Open the browser and input the IP address of ElementOne, then press "Enter".




Note:

ElementOne uses a self-generated and self-signed certificate by default, which may cause your browser to display a warning when browsing pages that use this type of certificate. If your organization has its own certificate, you can import it into ElementOne to avoid the certification warning in the browser. Refer to the "Import Certificate" section in the ElementOne User's Guide for detailed instructions. To proceed, Click **Advanced**.

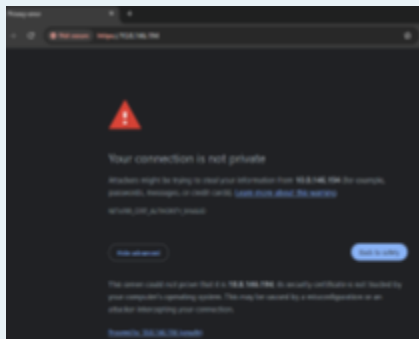


2. Click **Proceed to [ElementOne IP] (unsafe)**.
3. Enter the login credentials of master admin account.
4. Click **Login**.
5. Enter a new password, re-enter it for confirmation, and then click **Confirm**.

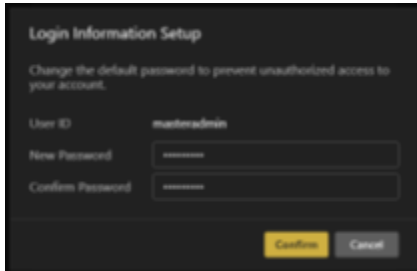

6. Enter the login credentials of the master admin account.

**Note:**

The default user ID is "masteradmin".

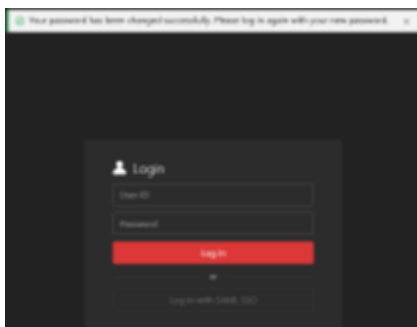

Chapter 8. Contact Us

For support and additional information, visit the following websites:

- Worldwide support offices: <https://www.txone.com/contact/>
- TXOne Networks product documentation: <https://help.txone.com/docs>
- MyTXOne: <https://my.txone.com>