



公司内部		
第	V1.0	版
共	6	页

Linux 6.0.60.4 得实 DS-2630 打印机使用手册

项目名称：凝思操作系统 6.0.60.4 使用得实 DS-2630 打印机手册

项目代号：

专题名称：

文档类别：测试

密 级：公司内部

版 本 号：V1.0

创 建 人：韩爽

建立日期：2020-03-19

评审人员：

批准日期：XXXX-XX-XX

保 管 人：高严

存放位置：

编辑软件：LibreOffice 4.3.3.2

文档修订记录

VER	REV	修订人	修订日期	简要说明	评审人员	批准日期
V1.0	C	韩爽	20 年 3 月 19 日	初次创建		
VER（版本编号）：V——版本编号；R——修订编号。						
REV（修订状态）：C——创建；A——增加；M——修改；D——删除。						

内容目录

概述.....	1
1 目的.....	1
2 范围.....	1
3 参考资料.....	1
测试环境.....	1
1 硬件环境.....	1
2 软件环境.....	1
3 网络环境.....	1
安装步骤.....	2
1 打印机硬件设置.....	2
2 开启打印机服务.....	2
3 使用火狐浏览器添加配置打印机.....	2
4 打印测试.....	6
5 打印机服务设置开机自启动.....	6

表格

概述

1 目的

本文档是凝思 60 安全操作系统使用得实 DS-2630 打印机的使用手册。

2 范围

适用于凝思安全操作系统 6.0.60.4-20170915 , 6.0.60.4-NS3000s-20190709 (x86_64 和 x86_32) 。

3 参考资料

无

测试环境

1 硬件环境

测试机硬件配置

CPU : Intel(R) Core(TM) i5-7400 CPU , 单路 4 核

内存 : 16GB

硬盘 : sata 200GB

打印机 : 得实 DS-2630

2 软件环境

软件名称	版本号	用途
Linux6.0.60.4-20180514	6.0.60	测试机操作系统
Linux6.0.60.4-NS3000-20190709	6.0.60	测试机操作系统

3 网络环境

测试主机 eth0 的 IP 地址

eth0:172.16.0.210

安装步骤

1 打印机硬件设置


1. 得实 DS-2630 打印机连接电源线，使用 usb 电缆连接此计算机

2 开启打印机服务


1. `/etc/init.d/cups start`

3 使用火狐浏览器添加配置打印机


1. 打开火狐浏览器，输入 `localhost:631`

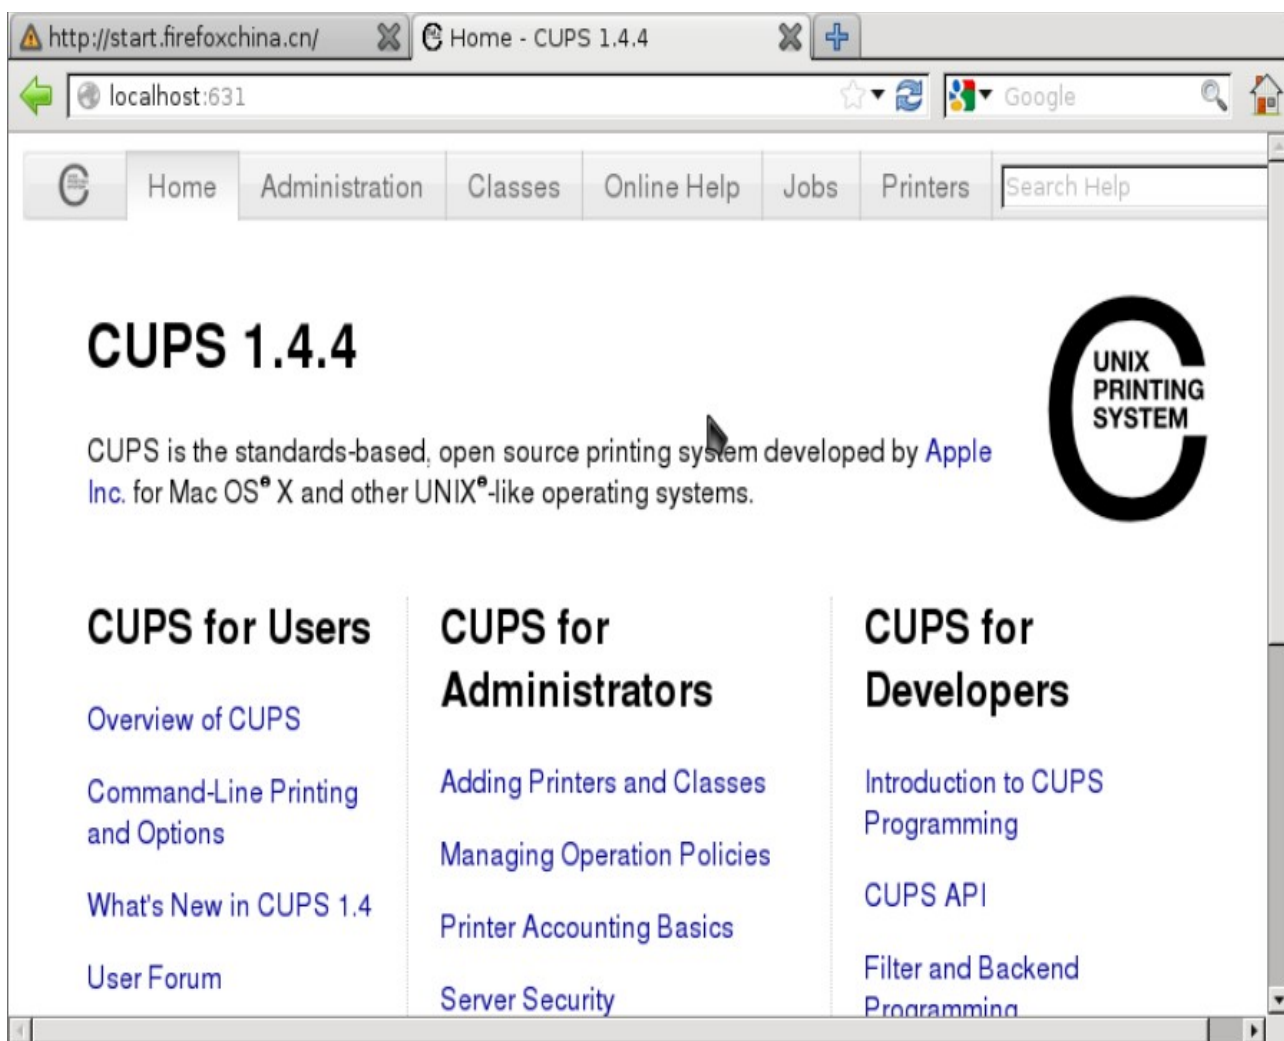

1. 点击 Administration, 点击 Add Printer 会弹出对话框，输入用户名 root，和 root 密码。

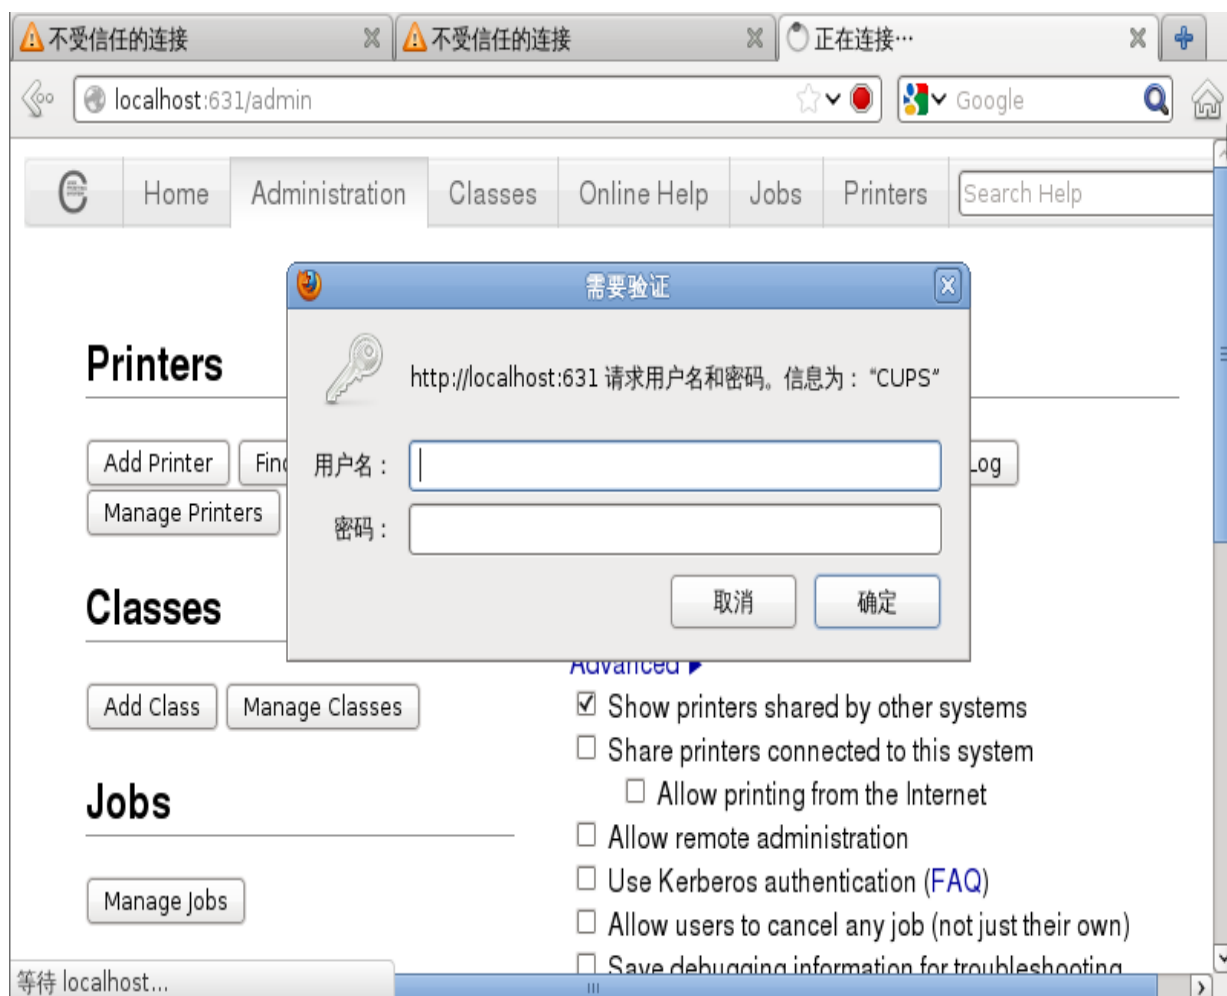

2. 在 Local Printers 选择打印机型号 DASCOS DS-2630(DASCOS DS-2630),点击 Continue

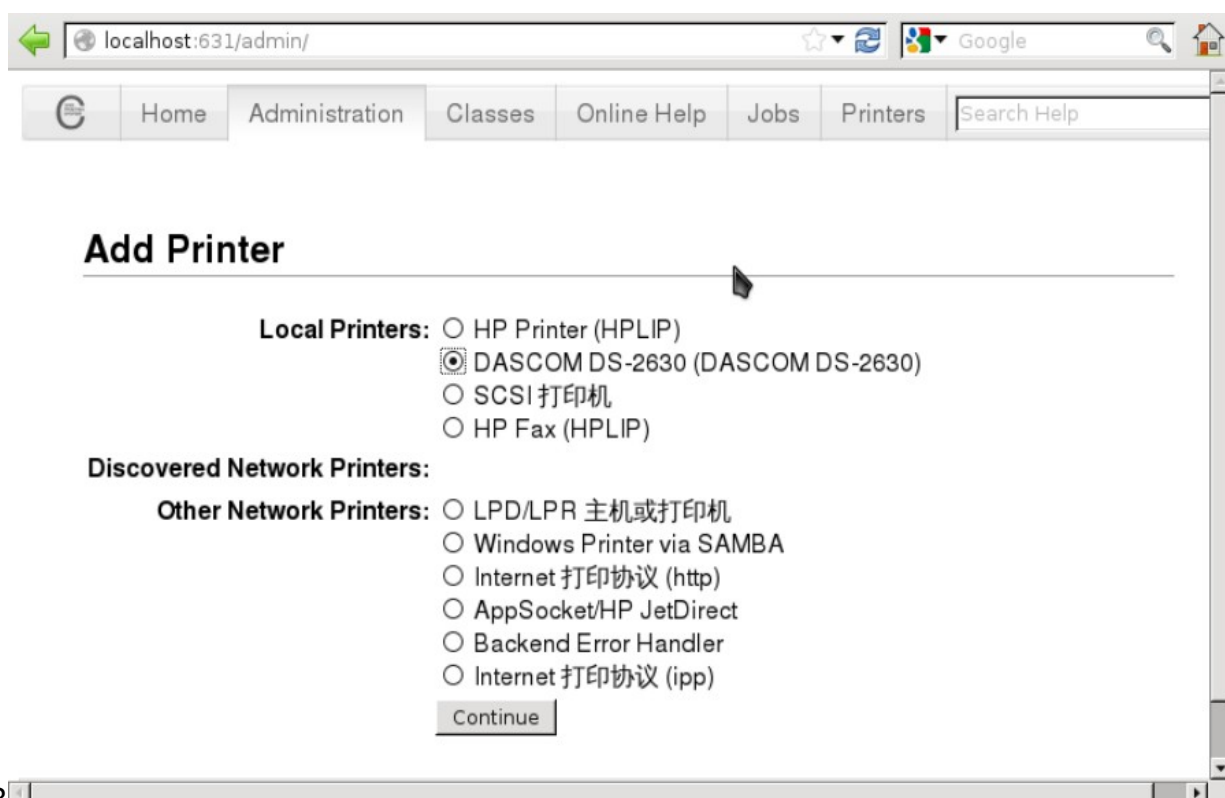

3. 点击 Continue

localhost:631/admin

Home Administration Classes Online Help Jobs Printers Search Help

Add Printer

Name:
(May contain any printable characters except "/", "#", and space)

Description:
(Human-readable description such as "HP LaserJet with Duplexer")

Location:
(Human-readable location such as "Lab 1")

Connection: usb://DASCOM/DS-2630

Sharing: ☐ Share This Printer

CUPS and the CUPS logo are trademarks of Apple Inc. CUPS is copyright 2007-2010 Apple Inc. All rights reserved.

4. 在 Make 处选择 Epson, 点击 Add Printer

localhost:631/admin

Description: DASCOM DS-2630

Location:

Connection: usb://DASCOM/DS-2630


Sharing: Do Not Share This Printer

Make:
Fujitsu
Generic
Genicom
Heidelberg
Hitachi
HP
IBM
Imagen
Imagistics


Or Provide a PPD File:

CUPS and the CUPS logo are trademarks of Apple Inc. CUPS is copyright 2007-2010 Apple Inc. All rights reserved.

5. 在 Model:处选择 Epson 24-Pin Series(en),点击 Add Printer

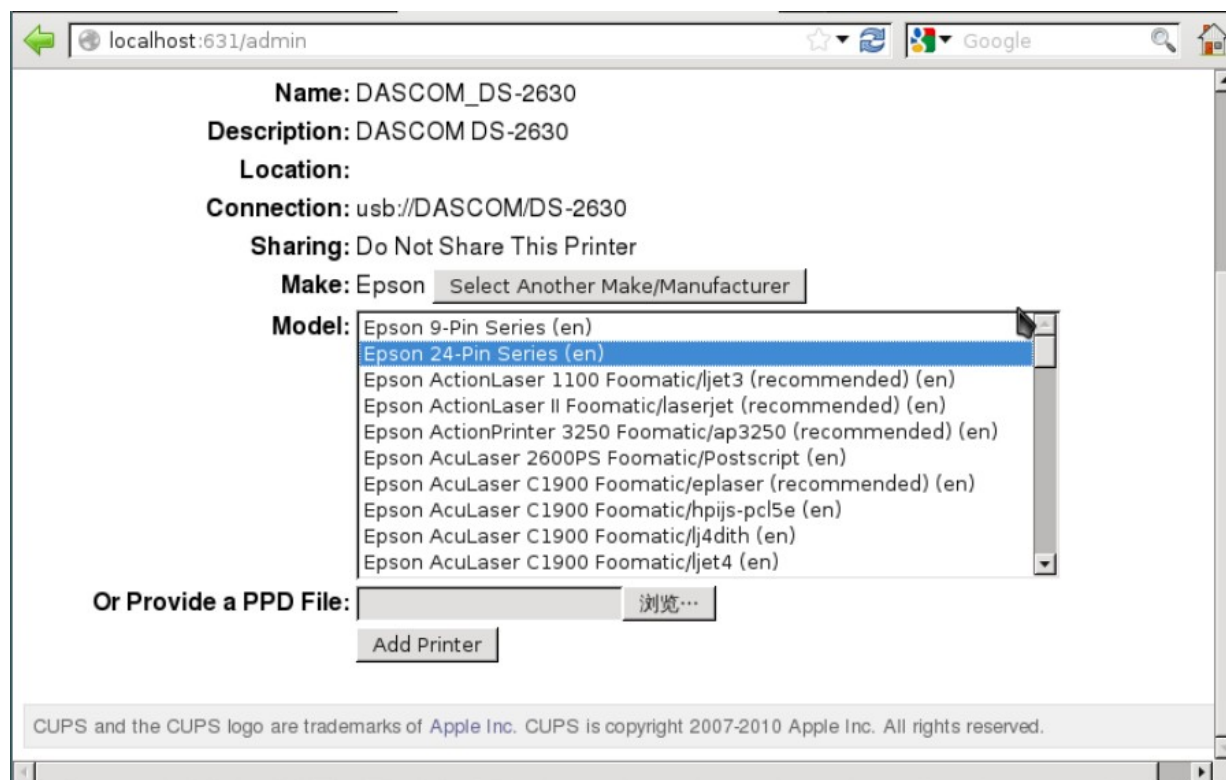

6. 在 Resolution:选择 360x180dpi,点击 Set Default Options

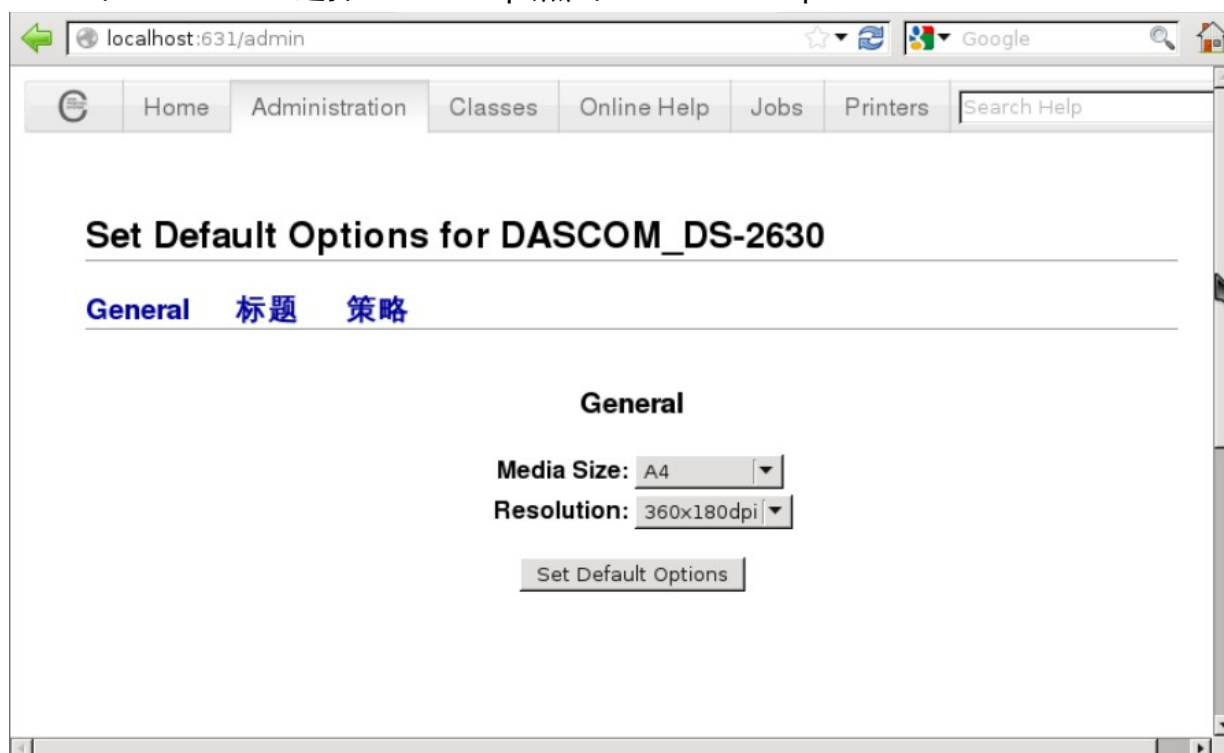

4 打印测试

1. 应用程序->附件->文本编辑器->打开->/etc/hosts->打印->DASCOM_DS-2630->打印
(注：linx6.0.60-700-20180514 系统测试方法)
2. 应用程序->工具->文档编辑器->打开->/etc/network/interfaces->文件->打印->名称->DASCOM_DS-2630->打印 (注：Linx-6.0.60.4-NS3000s-20190709 系统测试方法)

5 打印机服务设置开机自启动

1. `chkconfig cups on`