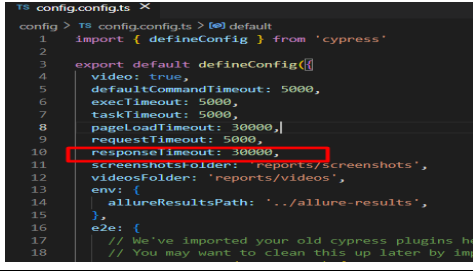
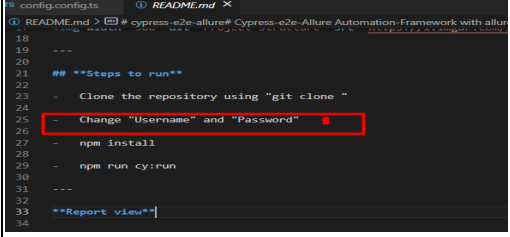


ID	Errors	Screenshots	Comments
Page Object model			
ID-1	There is no two-level page object in the project		A global Page must be created and other pages must link to it
loginPage.ts file			
ID-2	All selectors must be declared outside the class	 <pre> login.test.ts      TS loginPage.ts X cypress &gt; e2e &gt; pages &gt; TS loginPage.ts &gt; LoginPage 1  /// &lt;reference types="cypress" /&gt; 2 3  class LoginPage { 4    get signinLink() { return cy.get('.login') } 5    get emailAddressTxt() { return cy.get('#email') } 6    get passwordTxt() { return cy.get('#passwd') } 7    get signinBtn() { return cy.get('#SubmitLogin') } 8    get alertBox() { return cy.get('p:contains("error")') } 9    get alertMessage() { return cy.get('.alert-danger') } 10 11   public launchApplication() { 12     cy.visit('/') 13   } </pre>	Need use "const" outside of the class and don't use "get" in the class
ID-3	Unclear selector names: emailAddressTxt and passwordTxt	 <pre> class LoginPage {   get signinLink() { return cy.get('.login') }   get emailAddressTxt() { return cy.get('#email') }   get passwordTxt() { return cy.get('#passwd') }   get signinBtn() { return cy.get('#SubmitLogin') }   get alertBox() { return cy.get('p:contains("error")') }   get alertMessage() { return cy.get('.alert-danger &gt; ol &gt; li') }    public launchApplication() {     cy.visit('/')   } } </pre>	At the end of the selector name, need to specify the name of the page element
ID-4	The signinLink and signinButton difficult to read	 <pre> login.test.ts      TS loginPage.ts X cypress &gt; e2e &gt; pages &gt; TS loginPage.ts &gt; LoginPage 1  /// &lt;reference types="cypress" /&gt; 2 3  class LoginPage { 4    get signinLink() { return cy.get('.login') } 5    get emailAddressTxt() { return cy.get('#email') } 6    get passwordTxt() { return cy.get('#passwd') } 7    get signinBtn() { return cy.get('#SubmitLogin') } 8    get alertBox() { return cy.get('p:contains("error")') } 9    get alertMessage() { return cy.get('.alert-danger') } 10 11   public launchApplication() { 12     cy.visit('/') 13   } </pre>	The sign in need write in camel case
ID-5	Don't use string type in the command for password input	 <pre> /// &lt;reference types="cypress" /&gt;  class LoginPage {   get signinLink() { return cy.get('.login') }   get emailAddressTxt() { return cy.get('#email') }   get passwordTxt() { return cy.get('#passwd') }   get signinBtn() { return cy.get('#SubmitLogin') }   get alertBox() { return cy.get('p:contains("error")') }   get alertMessage() { return cy.get('.alert-danger &gt; ol &gt; li') }    public launchApplication() {     cy.visit('/')   }    public login(emailId: string, password: string) {     this.signinLink.click()     this.emailAddressTxt.type(emailId)     this.passwordTxt.type(password)     this.signinBtn.click()   }    public validateLoginError(errorMessage: string) {     this.alertBox.should('be.visible')     this.alertMessage.should('have.text', errorMessage)   } } </pre>	Need to use the type "any". If the user will type the number in the password the test will be doesn't run
myAccountPage.ts file			
ID-6	Expect in the page file	 <pre> myAccountPage.ts X cypress &gt; e2e &gt; pages &gt; TS myAccountPage.ts &gt; MyAccountPage &gt; validateSuccessfulLogin 1  /// &lt;reference types="cypress" /&gt; 2 3  import { LoginPage } from './loginPage' 4 5  class MyAccountPage { 6    get signoutLink() { return cy.get('.logout') } 7    get pageHeading() { return cy.get('.page-heading') } 8 9    public validateSuccessfulLogin() { 10     this.pageHeading.should('have.text', 'My account') 11   } 12 13   public logout() { 14     this.signoutLink.click() 15   } 16 17   public validateSuccessfulLogout() { 18     LoginPage.signinLink.should('be.visible') 19   } </pre>	All expect should be done in spec files, maybe the expect command should be written in a helper file

ID-7	The signoutLink difficult to read	<pre> 1 // &lt;reference types="cypress" /&gt; 2 3 import { loginPage } from "../loginPage" 4 5 class MyAccountPage { 6   get signoutLink() { return cy.get('.logout') } 7   get pageHeading() { return cy.get('.page-heading') } 8 9   public validateSuccessfulLogin() { 10     this.pageHeading.should('have.text', 'My account') 11   } </pre>	The sign out need write in camel case
ID-8	Don't use commands from one page on another page	<pre> 1 // &lt;reference types="cypress" /&gt; 2 3 import { loginPage } from "../loginPage" 4 5 class MyAccountPage { 6   get signoutLink() { return cy.get('.logout') } 7   get pageHeading() { return cy.get('.page-heading') } 8 9   public validateSuccessfulLogin() { 10     this.pageHeading.should('have.text', 'My account') 11   } 12 13   public logout() { 14     this.signoutLink.click() 15   } 16 17   public validateSuccessfulLogout() { 18     loginPage.signinLink.should('be.visible') 19   } 20 21 } </pre>	This command need to go to the spec file
login.test.ts file			
ID-9	The tests duplicate each other	<pre> 1 // &lt;reference types="cypress" /&gt; 2 3 describe('login', () =&gt; { 4   it('login with valid credentials', function () { 5     loginPage.login('testautomation@cyrestest.com', 'Test') 6     myAccountPage.validateSuccessfulLogin() 7     myAccountPage.logout() 8     myAccountPage.validateSuccessfulLogout() 9   }) 10 11   it('login with valid credentials read data from fixture', function () { 12     loginPage.login(this.data.valid_credentials.emailId, this.data.valid_credentials.password) 13     myAccountPage.validateSuccessfulLogin() 14     myAccountPage.logout() 15     myAccountPage.validateSuccessfulLogout() 16   }) 17 }) </pre>	Need to remove one of these test
ID-10	Wrong text "Invalid email addressssss." in the expect command	<pre> 1 // &lt;reference types="cypress" /&gt; 2 3 describe('login', () =&gt; { 4   it('login with wrong email format credentials read data from fixture', function () { 5     loginPage.login(this.data.invalid_credentials.wrong_email_format, this.data.invalid_credentials.password) 6     loginPage.validateLoginError('Invalid email addressssss.') 7   }) 8 }) </pre>	The correct text is "Invalid email address." Need change text
myAccount.test.ts file			
ID-11	Actions in the myAccount spec file do not match the myAccount page file	<div> <pre> 1 import { loginPage } from "../pages/loginPage"; 2 3 describe('My Account Functionality', () =&gt; { 4   beforeEach(() =&gt; { 5     cy.visit('https://google.com'); 6     //loginPage.launchApplication() 7   }) 8   it('Sample Test', () =&gt; { 9     console.log("This is a sample test") 10   }) 11 }) </pre> </div> <div> <pre> 1 // &lt;reference types="cypress" /&gt; 2 3 import { loginPage } from "../pages/loginPage"; 4 5 class MyAccountPage { 6   get signoutLink() { return cy.get('.logout') } 7   get pageHeading() { return cy.get('.page-heading') } 8 9   public validateSuccessfulLogin() { 10     this.pageHeading.should('have.text', 'My account') 11   } 12 13   public logout() { 14     this.signoutLink.click() 15   } 16 17   public validateSuccessfulLogout() { 18     loginPage.signinLink.should('be.visible') 19   } 20 21 } </pre> </div>	Need to rename this spec file
ID-12	The Login page doesn't use in the myAccount spec file	<pre> 1 import { loginPage } from "../pages/loginPage"; 2 3 describe('My Account Functionality', () =&gt; { 4   beforeEach(() =&gt; { 5     cy.visit('https://google.com'); </pre>	Need to remove the import login page

ID-13	Commenting out a command that is not used in a file test is bad practice	<pre> 1 import { loginPage } from "../pages/loginPage"; 2 3 describe('My Account Functionality', () =&gt; { 4   beforeEach(() =&gt; { 5     cy.visit('https://google.com'); 6     //loginPage.launchApplication() 7   }) </pre>	Need to remove comment in the Myaccount spec file
ID-14	The title of describe doesn't match the action in the spec	<pre> TS myAccount.spec.ts X cypress &gt; e2e &gt; tests &gt; TS myAccount.spec.ts &gt; ... 1 import { loginPage } from "../pages/loginPage"; 2 3 describe('My Account Functionality', { =&gt; { 4   beforeEach(() =&gt; { 5     cy.visit('https://google.com'); 6     //loginPage.launchApplication() 7   }) 8   it('Sample Test', () =&gt; { 9     console.log("This is a sample test") 10  }) 11 }) </pre>	Need to rename the title in the describe
user.json file			
ID-15	The wrong_email_format used the wrong password	<pre> () users.json X cypress &gt; fixtures &gt; () users.json &gt; () invalid_credentials &gt; () invalid_password 1 2 { 3   "valid_credentials": { 4     "emailId": "testautomation@cyresstest.com", 5     "password": "Test@1234" 6   }, 7   "invalid_credentials": { 8     "invalid_email": { 9       "emailId": "invalidUser@cyresstest.com", 10      "password": "Test@1234" 11     }, 12     "invalid_password": { 13       "emailId": "testautomation@cyresstest.com", 14       "password": "test@12345" 15     }, 16     "wrong_email_format": { 17       "emailId": "testautomation@cyresstest.com", 18       "password": "test@12345" 19     } 20 } </pre>	I think the name of the command means that there must be an incorrect email format and a correct password
config.config.ts file			
ID-16	Need to remove command video - true in the configuration file	<pre> TS config.config.ts X config &gt; TS config.config.ts &gt; [0] default 1 import { defineConfig } from 'cypress' 2 3 export default defineConfig({ 4   video: true, 5   defaultCommandTimeout: 5000, 6   execTimeout: 5000, 7   taskTimeout: 5000, 8   pageLoadTimeout: 30000, 9   requestTimeout: 5000, 10  responseTimeout: 30000, 11  screenshotsFolder: 'reports/screenshots', 12  videosFolder: 'reports/videos', 13  env: { 14    allureResultsPath: '../allure-results', 15  }, 16 }) </pre>	Video:true it's the default state
ID-17	Need to remove command execTimeout-5000 in the configuration file	<pre> import { defineConfig } from 'cypress'  export default defineConfig({   video: true,   defaultCommandTimeout: 5000,   execTimeout: 5000,   taskTimeout: 5000,   pageLoadTimeout: 30000,   requestTimeout: 5000,   responseTimeout: 30000,   screenshotsFolder: 'reports/screenshots',   videosFolder: 'reports/videos',   env: {     allureResultsPath: '../allure-results',   },   e2e: {     // We've imported your old cypress plugins here     // You may want to clean this up later by importing </pre>	The default state in the execTimeout is 60000. Command cy.exec() doesn't use in the project. There is no point in changing the default value.
ID-18	Need to remove command taskTimeout: 5000 in the configuration file	<pre> TS config.config.ts X config &gt; TS config.config.ts &gt; [0] default 1 import { defineConfig } from 'cypress' 2 3 export default defineConfig({ 4   video: true, 5   defaultCommandTimeout: 5000, 6   execTimeout: 5000, 7   taskTimeout: 5000, 8   pageLoadTimeout: 30000, 9   requestTimeout: 5000, 10  responseTimeout: 30000, 11  screenshotsFolder: 'reports/screenshots', 12  videosFolder: 'reports/videos', 13  env: { 14    allureResultsPath: '../allure-results', 15  }, 16  e2e: { 17    // We've imported your old cypress plugins here 18    // You may want to clean this up later by importing </pre>	The default state in the taskTimeout is 60000. Command taskTimeout values are readonly and cannot be changed at run time. Need to remove this command from the configuration file

ID-19	Need to remove command requestTimeout: 5000 in the configuration file	 <pre> 1  import { defineConfig } from 'cypress' 2 3  export default defineConfig({ 4    video: true, 5    defaultCommandTimeout: 5000, 6    execTimeout: 5000, 7    taskTimeout: 5000, 8    pageLoadTimeout: 30000, 9    requestTimeout: 5000, 10   responseTimeout: 30000, 11   screenshotsFolder: 'reports/screenshots', 12   videosFolder: 'reports/videos', 13   env: { 14     allureResultsPath: '../allure-results', 15   }, 16   e2e: { 17     // We've imported your old cypress plugins here. </pre>	The requestTimeout: 5000 it's the default state
ID-20	Need to remove command responseTimeout: 30000 in the configuration file	 <pre> 1  import { defineConfig } from 'cypress' 2 3  export default defineConfig({ 4    video: true, 5    defaultCommandTimeout: 5000, 6    execTimeout: 5000, 7    taskTimeout: 5000, 8    pageLoadTimeout: 30000, 9    requestTimeout: 5000, 10   responseTimeout: 30000, 11   screenshotsFolder: 'reports/screenshots', 12   videosFolder: 'reports/videos', 13   env: { 14     allureResultsPath: '../allure-results', 15   }, 16   e2e: { 17     // We've imported your old cypress plugins here 18     // You may want to clean this up later by im </pre>	The responseTimeout: 30000 it's the default state
ID-21	Need to remove command screenshotsFolder: 'reports/screenshots' in the configuration file	 <pre> 1  import { defineConfig } from 'cypress' 2 3  export default defineConfig({ 4    video: true, 5    defaultCommandTimeout: 5000, 6    execTimeout: 5000, 7    taskTimeout: 5000, 8    pageLoadTimeout: 30000, 9    requestTimeout: 5000, 10   responseTimeout: 30000, 11   screenshotsFolder: 'reports/screenshots', 12   videosFolder: 'reports/videos', 13   env: { 14     allureResultsPath: '../allure-results', 15   }, 16   e2e: { </pre>	The screenshotsFolder: 'reports/screenshots' it's the default folder
ID-22	Need to remove command videosFolder: 'reports/videos' in the configuration file	 <pre> 1  import { defineConfig } from 'cypress' 2 3  export default defineConfig({ 4    video: true, 5    defaultCommandTimeout: 5000, 6    execTimeout: 5000, 7    taskTimeout: 5000, 8    pageLoadTimeout: 30000, 9    requestTimeout: 5000, 10   responseTimeout: 30000, 11   screenshotsFolder: 'reports/screenshots', 12   videosFolder: 'reports/videos', 13   env: { 14     allureResultsPath: '../allure-results', 15   }, 16   e2e: { 17     // We've imported your old cypress plugins here 18     // You may want to clean this up later by im </pre>	The videosFolder: 'reports/videos' it's the default folder
README.md file			
ID-23	Information about node js and visual studio code	 <pre> 1  # Cypress-e2e-allure# Cypress-e2e-Allure Automation-Framework with allure reports 2 3  ## **This Framework contains sample code for # Cypress-e2e-Allure Automation-Framework** 4 5  - Page Object Model 6 7  - Reading test data from json file 8 9  - Simple login scenario with valid credentials and with invalid credentials 10 11 - Allure report integration 12 13 --- 14 15 **Directory Structure** 16 17 &lt;img width="388" alt="Project structure" src="https://i.imgur.com/Sh0XQy8.png"&gt; 18 19 --- 20 21 ## **Steps to run** 22 23 - Clone the repository using "git clone " 24 25 - Change "Username" and "Password" 26 27 - npm install 28 29 - npm run cy:run 30 31 --- 32 </pre>	In the readme file need add the information about node js and visual studio code
ID-24	No command to open to allure report in the step run test	 <pre> 14  # Cypress-e2e-allure# Cypress-e2e-Allure Automation-Framework with allure reports 15 16  **Directory Structure** 17 18  &lt;img width="388" alt="Project structure" src="https://i.imgur.com/Sh0XQy8.png"&gt; 19 20  --- 21  ## **Steps to run** 22 23  - Clone the repository using "git clone " 24 25  - Change "Username" and "Password" 26 27  - npm install 28 29  - npm run cy:run 30 31  --- 32 </pre>	In the steps to run need add a command that opens the allure report

ID-25	Login and password data in test run steps	 <pre>18 --- 19 20 ## **Steps to run** 21 22 - Clone the repository using "git clone " 23 24 - Change "Username" and "Password" 25 26 - npm install 27 28 - npm run cy:run 29 30 --- 31 32 **Report view** 33 34</pre>	<p>In the steps to run don't understand where the user needs to change the username and password. Maybe they don't need to be changed at all.</p>
-------	---	---	---