
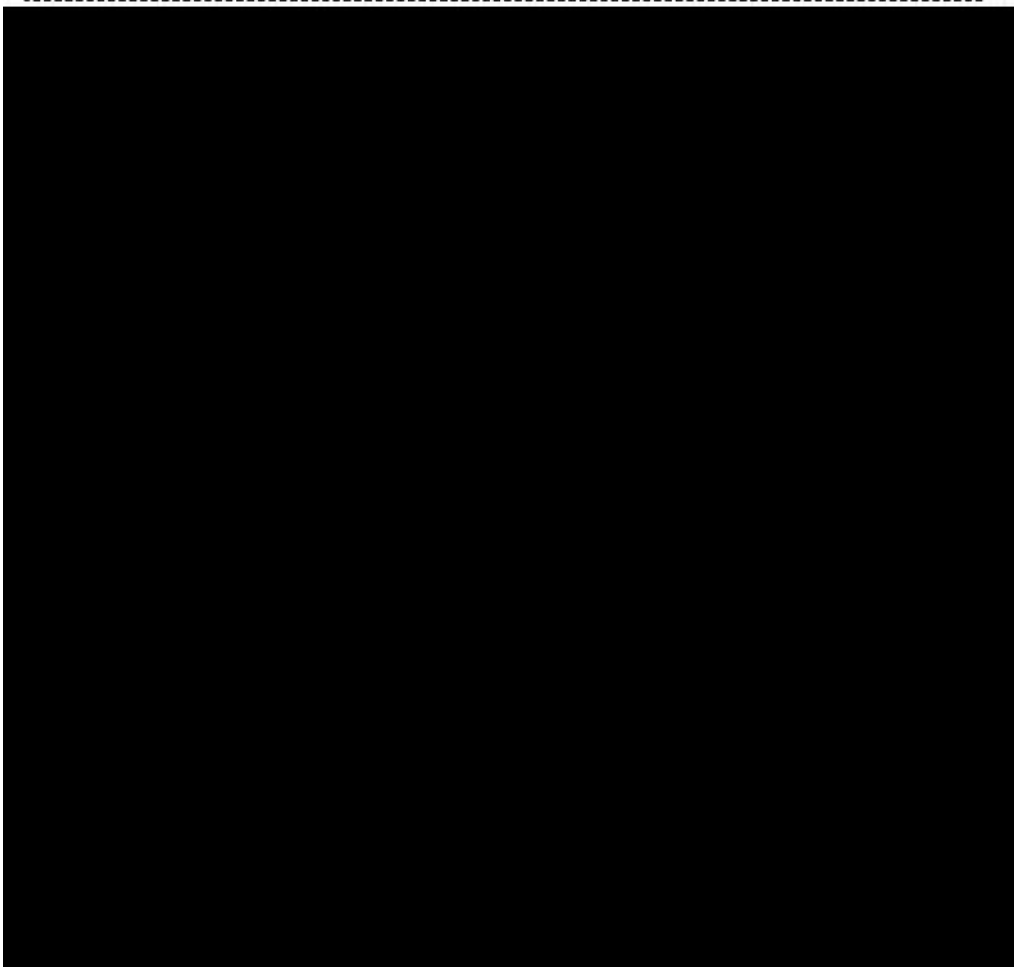
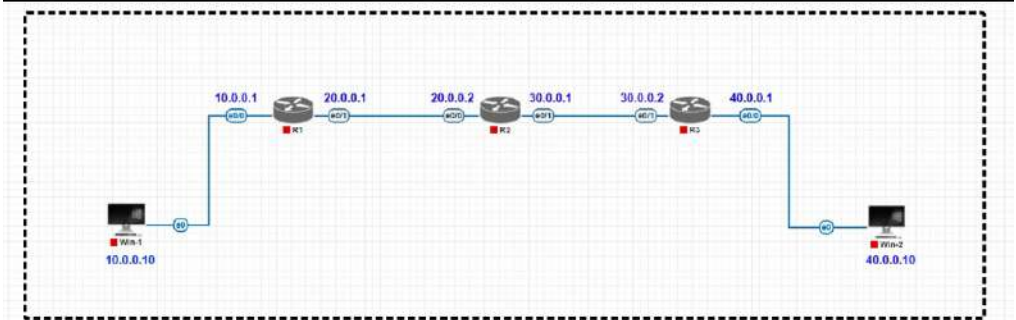




R1

```
R1#
R1#config terminal
Enter configuration commands, one per line. End with CNTL/Z.
R1(config)#ininterface ethernet0/0
      ^
% Invalid input detected at '^' marker.

R1(config)#interface ethernet0/0
R1(config-if)#ip address 10.0.0.1 255.0.0.0
R1(config-if)#no shutdown
R1(config-if)#exit
R1(config)#
R1(config)#interface ethernet0/1
R1(config-if)#ip address 20.0.0.1 255.0.0.0
R1(config-if)#no shutdown
R1(config-if)#exit
R1(config)#
```

```
R2#config terminal
Enter configuration commands, one per line.  End with CNTL/Z.
R2(config)#interface ethernet0/0
R2(config-if)#ip
*Oct  3 13:05:50.072: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R2(config-if)#ip address 20.0.0.2 255.0.0.0
R2(config-if)#no shutdown
R2(config-if)#exit
R2(config)#
R2(config)#interface ethernet0/1
R2(config-if)#ip address 30.0.0.1 255.0.0.0
R2(config-if)#no shutdown
R2(config-if)#exit
R2(config)#
R2(config)#
R2(config)#router ospf 2
R2(config-router)#router-id 2.2.2.2
R2(config-router)#network 20.0.0.0 0.255.255.255 a 1
R2(config-router)#network 30.0.
*Oct  3 13:17:56.932: %OSPF-5-ADJCHG: Process 2, Nbr 1.1.1.1 on Ethernet0/0 from LOADING to FULL, Loading Done
R2(config-router)#network 30.0.0.0 0.255.255.255 a 1
R2(config-router)#exit
R2(config)#
R2(config)#
R2(config)#
*Oct  3 13:19:47.574: %OSPF-5-ADJCHG: Process 2, Nbr 3.3.3.3 on Ethernet0/1 from LOADING to FULL, Loading Done
R2(config)#
```

```
R3#config terminal
^
% Invalid input detected at '^' marker.

R3#config terminal
Enter configuration commands, one per line.  End with CNTL/Z.
R3(config)#
R3(config)#
R3(config)#interface ethernet0/1
R3(config-if)#ip address 30.0.0.2 255.0.0.0
R3(config-if)#no shutdown
R3(config-if)#exit
R3(config)#
R3(config)#interface ethernet0/0
R3(config-if)#ip address 40.0.0.1 255.0.0.0
R3(config-if)#no shutdown
*Oct  3 13:10:31.896: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R3(config-if)#no shutdown
R3(config-if)#exit
R3(config)#
R3(config)#router ospf 2
R3(config-router)#router-id 3.3.3.3
R3(config-router)#network 30.0.0.0 0.255.255.255 a 1
R3(config-router)#network 40.0.0.0 0.255.255.255 a 1
R3(config-router)#
*Oct  3 13:19:47.575: %OSPF-5-ADJCHG: Process 2, Nbr 2.2.2.2 on Ethernet0/1 from LOADING to FULL, Loading Done
R3(config-router)#exit
```

QEMU (Win-1)



My Documents

My Computer

My Network Places

Recycle Bin

Internet Explorer

Cisco ASDM-1...

Old Java ASDM

```
C:\WINDOWS\system32\cmd.exe
Windows IP Configuration

Ethernet adapter Local Area Connection:

    Connection-specific DNS Suffix  . : 
    IP Address. . . . . : 10.0.0.10
    Subnet Mask . . . . . : 255.0.0.0
    Default Gateway . . . . . : 10.0.0.1

C:\Documents and Settings\User>ping 40.0.0.10

Pinging 40.0.0.10 with 32 bytes of data:

Reply from 40.0.0.10: bytes=32 time=4ms TTL=125
Reply from 40.0.0.10: bytes=32 time=2ms TTL=125
Reply from 40.0.0.10: bytes=32 time=2ms TTL=125
Reply from 40.0.0.10: bytes=32 time=1ms TTL=125

Ping statistics for 40.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 4ms, Average = 2ms

C:\Documents and Settings\User>_
```

```

R1#
*Oct 3 13:20:16.555: %SYS-5-CONFIG_I: Configured from console by console
R1#show ip ospf neighbor

Neighbor ID      Pri   State           Dead Time   Address      Interface
2.2.2.2          1    FULL/BDR        00:00:34    20.0.0.2     Ethernet0/1
R1#
R1#show ip ospf database

        OSPF Router with ID (1.1.1.1) (Process ID 1)

          Router Link States (Area 1)

Link ID      ADV Router   Age         Seq#          Checksum Link count
1.1.1.1      1.1.1.1      312         0x80000005    0x0017B8 2
2.2.2.2      2.2.2.2      202         0x80000006    0x003959 2
3.3.3.3      3.3.3.3      162         0x80000005    0x008606 2

          Net Link States (Area 1)

Link ID      ADV Router   Age         Seq#          Checksum
20.0.0.1     1.1.1.1      312         0x80000001    0x00F61C
30.0.0.1     2.2.2.2      202         0x80000001    0x00AC52
R1#
R1#show ip ospf interface ethernet0/0
Ethernet0/0 is up, line protocol is up
  Internet Address 10.0.0.1/8, Area 1, Attached via Network Statement
  Process ID 1, Router ID 1.1.1.1, Network Type BROADCAST, Cost: 10
  Topology-MTID    Cost    Disabled Shutdown Topology Name
    0             10      no       no       Base
  Transmit Delay is 1 sec, State DR, Priority 1
  Designated Router (ID) 1.1.1.1, Interface address 10.0.0.1
  No backup designated router on this network
  Timer intervals configured, Hello 10, Dead 40, Wait 40, Retransmit 5
    oob-resync timeout 40
    Hello due in 00:00:04
  Supports Link-local Signaling (LLS)
  Cisco NSF helper support enabled
  IETF NSF helper support enabled
  Index 1/1/1, flood queue length 0
  Next 0x0(0)/0x0(0)/0x0(0)
  Last flood scan length is 0, maximum is 0
  Last flood scan time is 0 msec, maximum is 0 msec
  Neighbor Count is 0, Adjacent neighbor count is 0
  Suppress hello for 0 neighbor(s)
R1#

```

```
R1#
R1#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
        D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
        N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
        E1 - OSPF external type 1, E2 - OSPF external type 2
        i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
        ia - IS-IS inter area, * - candidate default, U - per-user static route
        o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
        a - application route
        + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

    10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       10.0.0.0/8 is directly connected, Ethernet0/0
L       10.0.0.1/32 is directly connected, Ethernet0/0
    20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       20.0.0.0/8 is directly connected, Ethernet0/1
L       20.0.0.1/32 is directly connected, Ethernet0/1
O       30.0.0.0/8 [110/20] via 20.0.0.2, 00:05:28, Ethernet0/1
O       40.0.0.0/8 [110/30] via 20.0.0.2, 00:03:44, Ethernet0/1
R1#
R1#
R1#
R1#
```

