Practice Troubleshooting Assessment
20 minutes

Overview:

In this Troubleshooting assessment you are given a Packet Tracer file with a network topology, IP addresses, and configuration information. You are required to troubleshoot and fix a number of issues that do not meet the specifications for the given topology, IP addressing, or configuration information.

Topology:

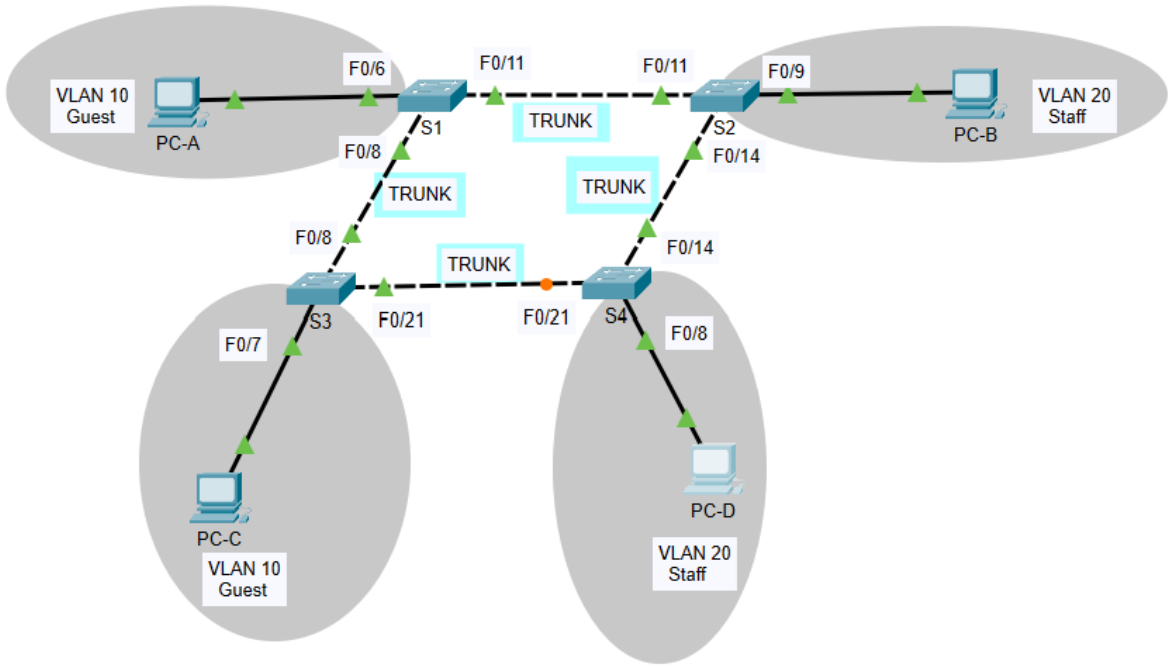

IMPORTANT:

You must use the provided Packet Tracer .pka file with Packet Tracer 8.2 only. Do NOT create your own Packet Tracer file as that will not be able to be marked.

Late submissions cannot be marked. This is a 20-minute examination with 10 minutes to download and upload the file. The 10-minute upload time is in addition to the assessment and is not to be used for completing the assessment. Because of the additional time given for uploading, late submissions cannot be marked. Please save your work regularly to avoid losing your work. Please ensure that you do not upload the incomplete Packet Tracer file that you downloaded.

Rename the file to: Firstname_Lastname_Troubleshooting.pka

Put your first name and last name in the name box, and your student number in the email box:

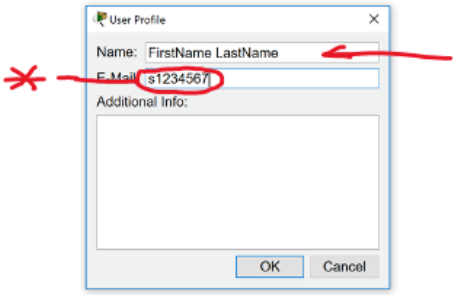

Important: If you do not put your name and student number as described the Packet Tracer mark will not be able to be attributed to you.

Practice Troubleshooting Assessment
20 minutes

Scoring:

There are 10 errors in the file that must be corrected by updating the configuration. Each error is worth 2 marks out of the 20 marks available.

Make sure to save the file when you make a change. If you make a change and the score on the Check Results window does not change then check that you have entered what you believe to be the correct fix and move on to another problem.

The below information will enable to a change to the score on the Check Results window:

- There are 5 errors that may contribute to connectivity issues.
- There are 5 errors related to incorrect configuration.

IPv4 addresses:

Device	Interface	IPv4 Address	Subnet Mask
S1	VLAN 60	192.168.200.1	255.255.255.0
S2	VLAN 60	192.168.200.2	255.255.255.0
S3	VLAN 60	192.168.200.3	255.255.255.0
S4	VLAN 60	192.168.200.4	255.255.255.0
PC-A	NIC	192.168.1.1	255.255.255.0
PC-B	NIC	192.168.1.2	255.255.255.0
PC-C	NIC	192.168.1.3	255.255.255.0
PC-D	NIC	192.168.1.4	255.255.255.0

VLAN Assignments

VLAN	Name	Interface Assigned
10	Guest	S1: F0/6 S3: F0/7
20	Staff	S2: F0/9 S4: F0/8
60	Management	S1: VLAN 60 S2: VLAN 60 S3: VLAN 60 S4: VLAN 60
999	Native	N/A

Note: You need to use the console cable from a PC to connect to a switch as you cannot rely on the current configuration to be correct and therefore, it may not be possible to ssh to a device until the configuration is fixed.

Practice Troubleshooting Assessment
20 minutes

The following configuration is what should be correctly configured on each device:

a) For each switch in the topology;

1) Correct device name as per the topology
2) DNS lookup turned off
3) Clear text passwords encrypted
4) **cisco** as the console and vty passwords with login and logging synchronous enabled
5) **class** as the privileged EXEC password
6) Banner that warns anyone accessing the device that unauthorized access is prohibited. With the following text:

   Unauthorised access is strictly prohibited.

7) SSH configured with username **`admin`**, privilege level **15**, secret **cisco**, **1024** bits **RSA** encryption, and domain name **networklab.com**.
8) Required VLANs created
9) IPv4 address assigned as per the requirements
10) Access ports configured as per the requirements
11) Trunk ports configured as with correct native VLAN and allowed VLANs for correct operation of the network
12) All unused interfaces configured as inactive

b) For each PC in the topology;

1) Correct device name as per the topology
2) IPv4 addressing assigned as per the requirements