



2026

PRODUCT CATALOG

# Tillage & farm implements

Spreaders, trailers, tillage, mowers, planters and more parts – direct from the factory to your farm.

## WHO WE ARE

# Farm equipment, at the price it *actually* costs.

Built by farmers, for farmers. Andrivo sources farm infrastructure and equipment from international manufacturers, handles the entire import process, and delivers to your farm anywhere in Southern Africa.

Farmers usually pay for a chain of markups they never see — a factory, an export agent, an importer and a local distributor, each adding a margin nobody discloses. Andrivo removes that chain. Our only charge is a service fee on top of the true cost: 30%, or 25% with a referral code from an Andrivo farmer. It's shown to you before you order, not folded into a price you can't verify.

**25%**

fee with a referral code (30% without)

**0**

distributors in between

**SADC**

we deliver across Southern Africa

## How every quote works

**1****Factory direct**

We work directly with the manufacturer of every machine in this catalog — no middlemen.

**2****Inspected before it ships**

Each order is checked against the factory spec sheet before it leaves the plant.

**3****Shipping & customs handled**

Freight, duties, clearing and transport to your gate are all managed by us.

**4****Parts & aftersales**

Spares in stock, and every machine logged to your farm under My Farm by Andrivo.

**EXAMPLE: A DISC HARROW ORDER**

|                               |                |
|-------------------------------|----------------|
| Factory price                 | R36 000        |
| Freight, duties & customs     | R7 000         |
| Transport: port to farm       | R2 000         |
| Andrivo fee (25% with a code) | R11 250        |
| <b>You pay</b>                | <b>R56 250</b> |

## CONTENTS

# What's in this catalog

Specifications are typical for each model; your Andrivo quote confirms the exact configuration, size and price for your farm.

## Spreading & transport 04

Fertiliser spreader carts (2–14 m<sup>3</sup>) 04

Liquid fertiliser spreaders 04

Grain transport vehicle 05

## Tillage & land preparation 06

Land leveller 06

Stone picker 06

Farm trailer 06

Disc harrow 07

Power harrow 07

Rotary tiller 07

Chisel plough 08

Cultivator 08

Trencher 08

Horizontal reversing plough 08

Disc plough 09

Furrow plough 09

Heavy disc harrow 09

## Mowers & cutters 10

Folding-wing rotary cutter 10

Double-disc mower 10

Multi-disc mower 10

Sickle bar mower 11

9GX semi-circular lawn mower 11

LCTM light lawn mower 11

9GX large lawn mower 11

Flail mowers 12–13

## Planting & harvesting 14

Potato harvester 14

Corn sheller 14

Vegetable planter 14

Wheat planter 14

Potato planter 15

Finger-wheel rake 15

Reel sprinkler irrigation machine 15

Plough & rotary tiller combination 15

## Wear parts 16


Loosening shovels, plough tips & rake blades 16

Disc blades: sizes & weights 17

## Fertilizer spreader cart



| Horizontal screw conveyor/double disc fertilizer spreader                                                                                                                  |                      |                |                |                |                |                |                |                |                |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|
| NO.                                                                                                                                                                        | Item                 | Unit           | 2 cubes        | 3 cubes        | 5 cubes        | 8 cubes        | 10 cubes       | 12 cubes       | 14 cubes       |
| 1                                                                                                                                                                          | Hopper volume        | m <sup>3</sup> | 2              | 3              | 5              | 8              | 10             | 12             | 14             |
| 2                                                                                                                                                                          | Bearing weight       | t              | 3              | 4              | 6              | 10             | 12             | 14             | 17             |
| 3                                                                                                                                                                          | Supporting power     | hp             | ≥50            | ≥50            | ≥60            | ≥80            | ≥100           | ≥120           | ≥120           |
| 4                                                                                                                                                                          | Machine size (L×W×H) | mm             | 4100×1800×1700 | 4400×1970×1700 | 4400×2130×1970 | 5500×2300×2350 | 5900×2300×2400 | 6350×2560×2590 | 6350×2560×2790 |
| 5                                                                                                                                                                          | Spread width         | m              | 8-10           | 8-10           | 8-10           | 8-10           | 8-10           | 8-10           | 8-10           |
| 6                                                                                                                                                                          | Machine weight       | kg             | 1190           | 1230           | 1570           | 2250           | 2750           | 2850           | 2980           |
| 7                                                                                                                                                                          | Tyre type            | /              | 10.0/75-15.3   | 11.5/80-15.3   | 14-17.5        | 16/70-20       | 16/70-24       | 500/60-22.5    | 500/60-22.5    |
| Customizable double vertical screw conveyors, horizontal screw conveyors, double disc spreading devices and self-propelled three-wheel fertilizer spreaders are available. |                      |                |                |                |                |                |                |                |                |

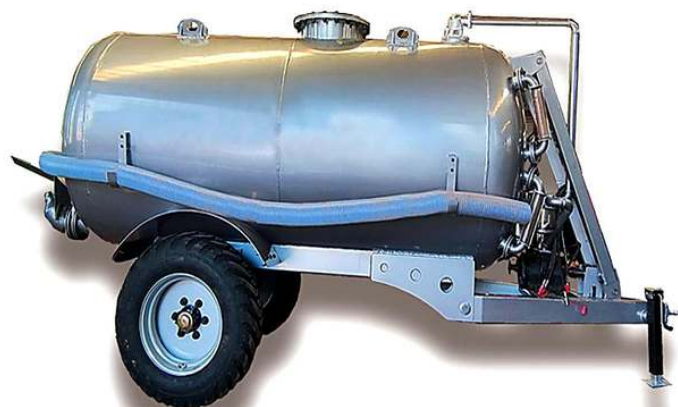

| Liquid fertilizer spreader |                      |                |                  |                  |                  |                  |                  |
|----------------------------|----------------------|----------------|------------------|------------------|------------------|------------------|------------------|
| NO.                        | Item                 | Unit           | 6 cubes          | 8 cubes          | 10 cubes         | 12cubes          | 15 cubes         |
| 1                          | Hopper volume        | m <sup>3</sup> | 6                | 8                | 10               | 12               | 15               |
| 2                          | Supporting power     | hp             | ≥70              | ≥80              | ≥100             | ≥100             | ≥150             |
| 3                          | Machine size (L×W×H) | mm             | 6100×2000×2700   | 7000×2300×2700   | 7340×2540×2700   | 7300×2600×2900   | 7600×2700×3350   |
| 4                          | Fertilization rate   | r/min          | ≥1m <sup>3</sup> | ≥1m <sup>3</sup> | ≥1m <sup>3</sup> | ≥1m <sup>3</sup> | ≥1m <sup>3</sup> |
| 5                          | Spraying amplitude   | m              | 10-15            | 10-15            | 10-15            | 10-15            | 10-15            |
| 6                          | Machine weight       | kg             | 2100             | 2550             | 3210             | 4100             | 5020             |
| 7                          | Tyre type            | /              | 400/55-22.5      | 16/70-24         | 500/60-22.5      | 600/55-26.5      | 500/60-22.5      |
| Customizable               |                      |                |                  |                  |                  |                  |                  |

## Grain transport vehicle



| Grain transport vehicle |                      |                |                |                |                |                |                                 |
|-------------------------|----------------------|----------------|----------------|----------------|----------------|----------------|---------------------------------|
| NO.                     | Item                 | Unit           | 3 cubes        | 6 cubes        | 9cubes         | 12cubes        | 20cubes                         |
| 1                       | Hopper volume        | m <sup>3</sup> | 3              | 6              | 9              | 12             | 20                              |
| 2                       | Bearing weight       | t              | 4              | 7              | 11             | 14             | 24                              |
| 3                       | Supporting power     | hp             | ≥40            | ≥60            | ≥90            | ≥100           | ≥200                            |
| 4                       | Machine size (L×W×H) | mm             | 4050×1600×2000 | 4580×2060×2500 | 5170×2400×2900 | 6140×2560×2860 | 7400×2960×3400                  |
| 5                       | Machine weight       | kg             | 1100           | 1390           | 1900           | 2500           | 5210                            |
| 6                       | Tyre type            | /              | 11.5/80-15.3   | 14-17.5        | 400/60-22.5    | 600/50-22.5    | 500/60-22.5<br>(Double Bridges) |
| Customizable            |                      |                |                |                |                |                |                                 |




| Folding arm grain transporter |                       |                |                              |                |
|-------------------------------|-----------------------|----------------|------------------------------|----------------|
| NO.                           | Item                  | Unit           | 28 cubes                     | 7 cubes        |
| 1                             | Hopper volume         | m <sup>3</sup> | 28                           | 7              |
| 2                             | Supporting power      | hp             | ≥240                         | ≥70            |
| 3                             | Machine size (L×W×H)  | mm             | 8360×2950×3500               | 5580×2550×3000 |
| 4                             | Carriage size (L×W×H) | m              | 5950×2900×2300               | 2720×2220×1700 |
| 5                             | Machine weight        | kg             | 6620                         | 2290           |
| 6                             | Tyre type             | /              | 600/50-22.5 (Double Bridges) | 16/70-20       |
| Customizable                  |                       |                |                              |                |

## Land leveler




| Land leveler |                      |      |                |                |                       |                       |
|--------------|----------------------|------|----------------|----------------|-----------------------|-----------------------|
| NO.          | Item                 | Unit | 12PW-250       | 12PW-300       | 12PW-230S             | 12PW-300S             |
| 1            | Working width        | m    | 2.5            | 3              | 1.5-2.3               | 2-3                   |
| 2            | Machine size (L×W×H) | mm   | 3400*2530*2850 | 3400*3000*2850 | 3200*(1520-2320)*1750 | 3200*(2040-3040)*1750 |
| 3            | Supporting power     | hp   | 100-150        | 120-180        | 80-140                | 100-180               |
| 4            | Machine weight       | kg   | 1090           | 1180           | 1090                  | 1180                  |
| 5            | Horizontal error     | cm   | ±2             | ±2             | ±2                    | ±2                    |
| 6            | Tyre type            | /    | 10.0/75-15.3   | 10.0/75-15.3   | 26*12.00-12ss         | 26*12.00-12ss         |

## Stone picker

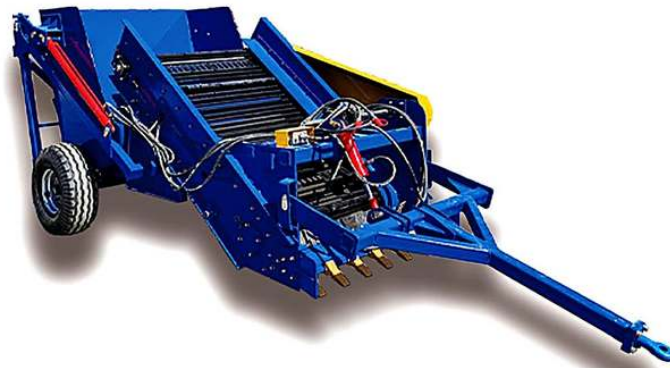

| Stone picker |                      |      |                |                |
|--------------|----------------------|------|----------------|----------------|
| NO.          | Item                 | Unit | 1.2m           | 1.5m           |
| 1            | Trenching depth      | cm   | 20-35          | 20-35          |
| 2            | Machine size (L×W×H) | mm   | 4700*2060*1700 | 4800*2300*1800 |
| 3            | Body size (L×W×H)    | mm   | 1430*700*1200  | 1730*700*1200  |
| 4            | Supporting power     | hp   | 100            | 140            |
| 5            | Machine weight       | kg   | 1410           | 1590           |
| 6            | Tyre type            | /    | 10.0/80-12     | 10.0/80-12     |

## Farm trailer

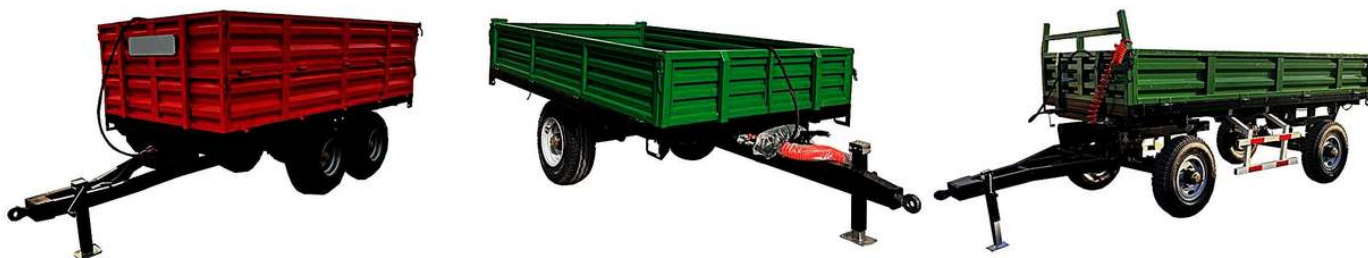


| Farm trailer |                  |      |                                |                                   |                                |                                   |                |                                        |
|--------------|------------------|------|--------------------------------|-----------------------------------|--------------------------------|-----------------------------------|----------------|----------------------------------------|
| NO.          | Item             | Unit | 3t                             | 4t                                | 5t                             | 6t                                | 7t             | 8t                                     |
| 1            | Machine weight   | kg   | 660                            | 1450                              | 2060                           | 2050                              | 1640           | 2260                                   |
| 2            | Dumping method   | /    | Hydraulic rear-tipping dumping | Hydraulic left and right dumping  | Hydraulic rear-tipping dumping | Hydraulic left and right dumping  | No             | Hydraulic three-way dumping            |
| 3            | Braking mode     | /    | Air brake                      | Air brake                         | Air brake                      | No                                | Air brake      | Air brake                              |
| 4            | Machine size     | mm   | 3800×1520×1700                 | 5320×1710×1900                    | 5870×2180×2350                 | 6250×2170×2070                    | 6400×2210×2610 | 5830×2200×2260                         |
| 5            | Carriage size    | mm   | 2500×1520×540                  | 3800×1710×455                     | 4100×2100×(550+550)            | 4500×2150×550                     | 4800×2210×550  | 4100×2100×1100                         |
| 6            | wheelbase        | m    | 0.9                            | 1.45                              | 1.6                            | 1.5                               | 1.6            | 1.32                                   |
| 7            | Traction length  | m    | 2.15                           | 1.37                              | 1.66                           | 1.53                              | 1.8            | 1.55                                   |
| 8            | Tyre type        | /    | 11.5/80-15.3                   | 7.50-16<br>(Dual-axle four-wheel) | 11.5/80-15.3                   | 9.00-16<br>(Dual-axle four-wheel) | 9.00-16        | 11.5/80-15.3<br>(Dual-axle four-wheel) |
| 9            | Supporting power | hp   | 30-50                          | 30-50                             | 50-100                         | 60-100                            | ≥70            | 80-120                                 |
| Customizable |                  |      |                                |                                   |                                |                                   |                |                                        |

## Disc harrow




| Suspended |                       |      |                |                |                |                |                |
|-----------|-----------------------|------|----------------|----------------|----------------|----------------|----------------|
| NO.       | Item                  | Unit | 2m             | 2.5m           | 3.5 m          | 4 m            | 5.5m           |
| 1         | Machine weight        | kg   | 1250           | 1450           | 1740           | 1990           | 2735           |
| 2         | Machine size (L×W ×H) | mm   | 2530×2000×1540 | 2530×2500×1540 | 2530×3500×1540 | 2530×4000×1540 | 2530×5500×1540 |
| 3         | Main beam dimension   | cm   | 10×10          | 10×10          | 10×10          | 10×10          | 10×10          |
| 4         | Disc diameter         | cm   | 62             | 62             | 62             | 62             | 62             |
| 5         | Crusher roll diameter | cm   | 35             | 35             | 35             | 35             | 35             |
| 6         | Number of discs       | pcs  | 14             | 16             | 24             | 28             | 38             |
| 7         | Working width         | m    | 2              | 2.5            | 3.5            | 4              | 5.5            |
| 8         | Supporting power      | hp   | 90-120         | 100-140        | ≥160           | ≥180           | ≥200           |

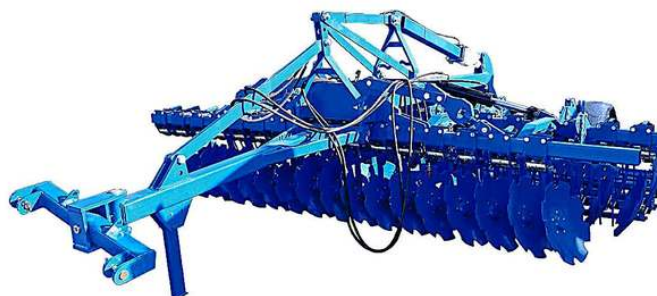

| 3-Point/pull type |                       |      |                |                |                |                |                |
|-------------------|-----------------------|------|----------------|----------------|----------------|----------------|----------------|
| NO.               | Item                  | Unit | 4 meters       | 5 meters       | 6 meters       | 7 meters       | 7.5 meters     |
| 1                 | Machine weight        | kg   | 4480           | 5600           | 6720           | 7840           | 8400           |
| 2                 | Machine size (L×W ×H) | mm   | 7300×4550×1900 | 7300×5550×1900 | 7300×6550×1900 | 7300×7550×1900 | 7300×8050×1900 |
| 3                 | Disc diameter         | cm   | 62             | 62             | 62             | 62             | 62             |
| 4                 | Crusher roll diameter | cm   | 40             | 40             | 40             | 40             | 40             |
| 5                 | Number of discs       | pcs  | 32             | 40             | 48             | 56             | 60             |
| 6                 | Working width         | m    | 4              | 5              | 6              | 7              | 7.5            |
| 7                 | Supporting power      | hp   | 180-220        | 200-240        | 220-260        | 260-300        | ≥300           |
| 8                 | Tyre type             | /    | 16/70-20       | 16/70-20       | 16/70-20       | 16/70-20       | 16/70-20       |

## Power harrow

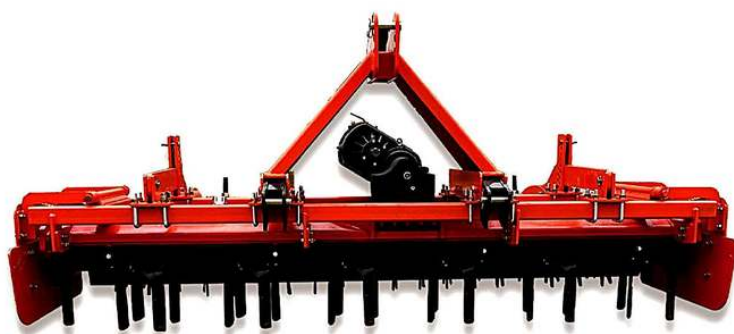

| Power harrow |                         |      |                |                |                |
|--------------|-------------------------|------|----------------|----------------|----------------|
| NO.          | Item                    | Unit | 3 meters       | 3.5 meters     | 4 meters       |
| 1            | Working width           | m    | 3              | 3.5            | 4              |
| 2            | Machine weight          | kg   | 1700           | 1940           | 2180           |
| 3            | Supporting power        | hp   | ≥180           | ≥200           | ≥240           |
| 4            | Machine size (L×W ×H)   | mm   | 1490×3140×1400 | 1520×3640×1420 | 1600×4390×1420 |
| 5            | Rake tooth depth        | cm   | 32             | 33             | 33             |
| 6            | Hydraulic roll diameter | cm   | 32             | 32             | 32             |

## Rotary tiller



| Rotary tiller |                  |      |          |           |           |           |           |           |           |
|---------------|------------------|------|----------|-----------|-----------|-----------|-----------|-----------|-----------|
| NO.           | Item             | Unit | SGTN-80D | SGTN-100D | SGTN-120D | SGTN-125D | SGTN-140D | SGTN-150D | SGTN-160D |
| 1             | Supporting power | hp   | 18-20    | 18-22     | 20-25     | 20-25     | 25-30     | 25-30     | 30-40     |
| 2             | Tilling width    | cm   | 70       | 90        | 110       | 115       | 130       | 140       | 150       |
| 3             | Tilling depth    | cm   | 8-16     | 8-16      | 8-16      | 8-16      | 8-16      | 8-16      | 8-16      |
| 4             | Number of blades | pcs  | 16       | 16        | 24        | 24        | 24        | 24        | 24        |
| 5             | Blade type       | /    | SGTN-L   |           |           |           |           |           |           |
| 6             | Machine weight   | kg   | 190      | 195       | 200       | 205       | 210       | 215       | 240       |

## Chisel plough



| Chisel plough |                       |      |                        |         |         |         |         |         |
|---------------|-----------------------|------|------------------------|---------|---------|---------|---------|---------|
| NO.           | Item                  | Unit | 3ZT-1.0                | 3ZT-1.4 | 3ZT-1.8 | 3ZT-2.2 | 3ZT-2.6 | 3ZT-3.0 |
| 1             | Working width         | mm   | 1000                   | 1400    | 1800    | 2200    | 2600    | 3000    |
| 2             | Number of plough tips | pcs  | 5                      | 7       | 9       | 11      | 13      | 15      |
| 3             | Working depth         | mm   | 100-200                |         |         |         |         |         |
| 4             | Machine weight        | kg   | 260                    | 300     | 350     | 420     | 490     | 580     |
| 5             | Supporting power      | hp   | 25                     | 30-40   | 40-50   | 50-70   | 70-90   | 80-100  |
| 6             | Hook mode             | /    | Three-point suspension |         |         |         |         |         |

## Cultivator




| Cultivator |                                            |      |                                                       |
|------------|--------------------------------------------|------|-------------------------------------------------------|
| NO.        | Item                                       | Unit | 3.5 meters                                            |
| 1          | Machine weight                             | kg   | 1670                                                  |
| 2          | Machine size (L×W×H)                       | mm   | 3900×3870×1470                                        |
| 3          | Working width                              | m    | 3.45                                                  |
| 4          | The number of deep loosening shovels/rakes | pcs  | 11 deep loosening shovels with 32 notches and 4 discs |
| 5          | Ploughing depth                            | cm   | 35-45                                                 |
| 6          | Supporting power                           | hp   | ≥200                                                  |

## Trencher



| Trencher |                        |      |               |
|----------|------------------------|------|---------------|
| NO.      | Item                   | Unit | 1KS-35        |
| 1        | Structural form        | /    | Double disc   |
| 2        | Overall size           | mm   | 1450*900*1200 |
| 3        | Machine weight         | kg   | 320           |
| 4        | Cutter number          | pcs  | 2             |
| 5        | Number of blades       | pcs  | 30            |
| 6        | Trenching depth        | cm   | 45            |
| 7        | Width of trench bottom | cm   | 25            |
| 8        | Supporting power       | hp   | 60-150        |

## Horizontal reversing plough

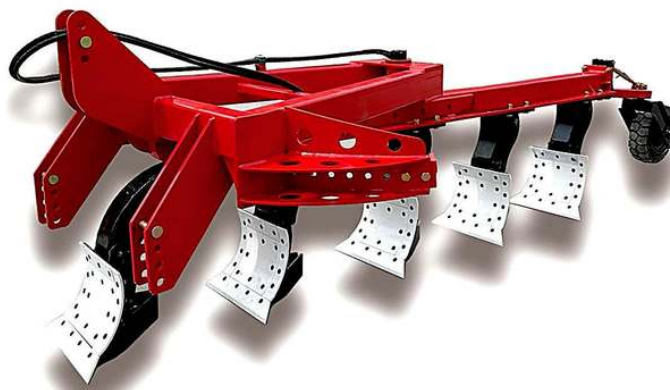

| Horizontal reversing plough |                      |      |                |
|-----------------------------|----------------------|------|----------------|
| NO.                         | Item                 | Unit | 5 plows        |
| 1                           | Working width        | mm   | 2400           |
| 2                           | Machine size (L×W×H) | mm   | 4700×2100×1400 |
| 3                           | Main beam dimension  | mm   | 150×150        |
| 4                           | Supporting power     | hp   | 200            |
| 5                           | Plow depth           | cm   | 12-30          |
| 6                           | Machine weight       | kg   | 1060           |

## Disc plough



| Disc plow |                  |      |              |              |              |
|-----------|------------------|------|--------------|--------------|--------------|
| NO.       | Item             | Unit | 1LY (T) -325 | 1LY (T) -425 | 1LY (T) -525 |
| 1         | Tilling width    | m    | 0.75         | 1.00         | 1.25         |
| 2         | Tilling depth    | mm   | 250-300      | 250-300      | 250-300      |
| 3         | Number of discs  | pcs  | 3            | 4            | 5            |
| 4         | Disc diameter    | mm   | 660          |              |              |
| 5         | Machine weight   | kg   | 420          | 480          | 580          |
| 6         | Supporting power | hp   | 55-70        | 80-90        | 100-120      |

## Furrow plough



| Furrow plough |                          |      |                        |        |        |        |
|---------------|--------------------------|------|------------------------|--------|--------|--------|
| NO.           | Item                     | Unit | 1L-235                 | 1L-335 | 1L-435 | 1L-535 |
| 1             | Single plow body tillage | mm   | 350                    |        |        |        |
| 2             | Maximum tillage          | mm   | 700                    | 1050   | 1400   | 1750   |
| 3             | Tilling depth            | cm   | 200-350                |        |        |        |
| 4             | Matching horse power     | hp   | 40-50                  | 55-80  | 60-80  | 90-120 |
| 5             | weight                   | kg   | 195                    | 320    | 410    | 550    |
| 6             | Hitch form               | /    | Three-point suspension |        |        |        |

## Disc harrow



| Disc harrow |                             |      |              |         |         |         |         |         |         |         |         |
|-------------|-----------------------------|------|--------------|---------|---------|---------|---------|---------|---------|---------|---------|
| NO.         | Item                        | Unit | 1BZ-1.8      | 1BZ-2.0 | 1BZ-2.2 | 1BZ-2.5 | 1BZ-3.0 | 1BZ-3.4 | 1BZ-3.8 | 1BZ-4.2 | 1BZ-5.3 |
| 1           | Plowing width               | mm   | 1800         | 2000    | 2200    | 2500    | 3000    | 3400    | 3800    | 4200    | 5300    |
| 2           | Cultivate deeply            | mm   | 200-250      |         |         |         |         |         |         |         |         |
| 3           | Diameter of the rake blade  | mm   | 660mm/26inch |         |         |         |         |         |         |         |         |
| 4           | Thickness of the rake blade | mm   | 5            |         |         |         |         |         |         |         | 6       |
| 5           | The number of rake blades   | pcs  | 16           | 18      | 20      | 24      | 28p     | 32      | 36      | 40      | 48      |
| 6           | Whole machine weight        | kg   | 1150         | 1250    | 1350    | 1500    | 1600    | 1800    | 2100    | 2300    | 3750    |
| 7           | Supporting power            | hp   | 60-70        | 70-80   | 80-90   | 90-100  | 100-110 | 110-120 | 130-140 | 150-160 | 160-180 |

## Folding wing rotary cutter



| Folding wing rotary cutter |                              |      |                  |                |                |
|----------------------------|------------------------------|------|------------------|----------------|----------------|
| NO.                        | Item                         | Unit | 3.5m             | 4.5m           | 6m             |
| 1                          | Machine weight               | kg   | 1650             | 1850           | 2440           |
| 2                          | Mowing width                 | m    | 3.5              | 4.5            | 6              |
| 3                          | Overall machine size (L×W×H) | mm   | 4800*4000*600mm  | 4900*4900*650  | 4800*6500*900  |
| 4                          | Folded wing size(L×W×H)      | mm   | 4800*1600*1500mm | 4900*2400*2000 | 4800*2750*3000 |
| 5                          | Supporting power             | hp   | 100-150          | 100-150        | ≥180           |
| 6                          | Tyre type                    | /    | 165/70R13        | 165/70R13      | 165/70R13      |

## Double-disc lawn mower

## Multi-disc lawn mower



| Double-disc lawn mower |                  |       |               |               |               |
|------------------------|------------------|-------|---------------|---------------|---------------|
| NO.                    | Item             | Unit  | 1.25          | 1.35          | 1.65          |
| 1                      | Supporting power | hp    | 20-40         | 30-50         | 45-60         |
| 2                      | swath            | m     | 1.25          | 1.35          | 1.65          |
| 3                      | Drum speed       | r/min | 1620          | 1620          | 1620          |
| 4                      | Overall size     | mm    | 2300*800*1050 | 2400*850*1050 | 3000*900*1100 |
| 5                      | Machine weight   | kg    | 330           | 350           | 448           |

| Multi-disc lawn mower |                      |      |                |                |                |                |                |
|-----------------------|----------------------|------|----------------|----------------|----------------|----------------|----------------|
| NO.                   | Item                 | Unit | 4-disc         | 5-disc         | 6-disc         | 7-disc         | 8-disc         |
| 1                     | Working width        | m    | 1.7            | 2.1            | 2.45           | 2.8            | 3.05           |
| 2                     | Number of discs      | pcs  | 4              | 5              | 6              | 7              | 8              |
| 3                     | Machine size (L×W×H) | mm   | 2940*1300*1300 | 3430*1300*1300 | 3920*1480*1300 | 4410*1300*1300 | 4900*1300*1300 |
| 4                     | Supporting power     | hp   | 40-80          | 40-90          | 40-90          | 60-100         | 80-120         |
| 5                     | Machine weight       | kg   | 450            | 485            | 527            | 545            | 650            |

## Sickle bar mower




| Sickle bar mower |                  |      |                        |        |        |        |
|------------------|------------------|------|------------------------|--------|--------|--------|
| NO.              | Item             | Unit | 9G-1.4                 | 9G-1.6 | 9G-1.8 | 9G-2.1 |
| 1                | Working width    | m    | 1.4                    | 1.6    | 1.8    | 2.1    |
| 2                | Cutting height   | cm   | 5-6                    | 5-6    | 5-6    | 5-6    |
| 3                | Machine weight   | kg   | 140                    | 160    | 180    | 200    |
| 4                | Supporting power | hp   | 15                     | 18     | 20     | 25-45  |
| 5                | Hook mode        | /    | Three-point suspension |        |        |        |

## 9GX- Semi-circular lawn mower




| 9GX- Semi-circular lawn mower |                     |       |         |         |         |         |
|-------------------------------|---------------------|-------|---------|---------|---------|---------|
| NO.                           | Item                | Unit  | 9GX-1.2 | 9GX-1.5 | 9GX-1.8 | 9GX-2.1 |
| 1                             | Cutting width       | m     | 1.2     | 1.5     | 1.8     | 2.1     |
| 2                             | Stubble height      | cm    | 4-11    |         |         |         |
| 3                             | Input speed         | r/min | 540     |         |         |         |
| 4                             | Whole machine weigh | kg    | 265     | 310     | 410     | 470     |
| 5                             | Supporting power    | hp    | 18-35   | 30-55   | 55-90   | 70-120  |

## LCTM- Light Lawn mower

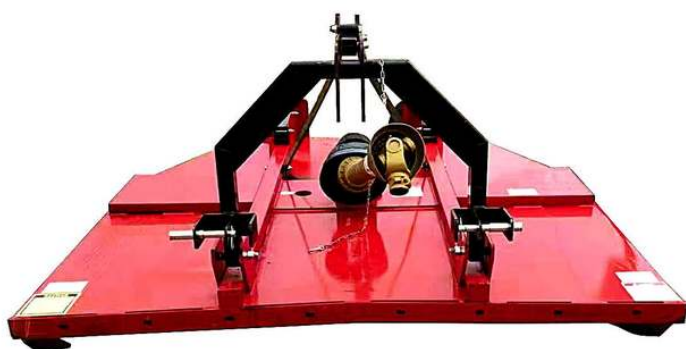

| LCTM- Light Lawn mower |                      |       |         |         |         |         |
|------------------------|----------------------|-------|---------|---------|---------|---------|
| NO.                    | Item                 | Unit  | LCTM100 | LCTM120 | LCTM150 | LCTM180 |
| 1                      | Cutting width        | m     | 1.0     | 1.2     | 1.5     | 1.8     |
| 2                      | Stubble height       | cm    | 4-11    |         |         |         |
| 3                      | Input speed          | r/min | 540     |         |         |         |
| 4                      | Whole machine weight | kg    | 170     | 185     | 210     | 315     |
| 5                      | Supporting power     | hp    | 12-30   | 18-35   | 25-50   | 40-80   |

## 9GX- Large lawn mower

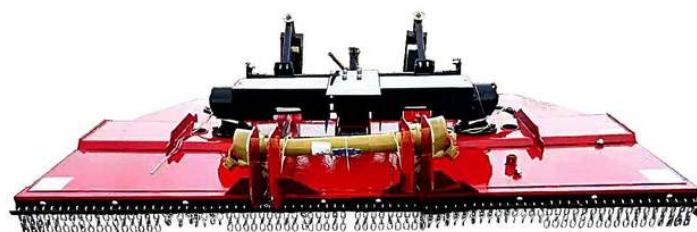

| 9GX- Large lawn mower |                      |       |         |         |         |         |
|-----------------------|----------------------|-------|---------|---------|---------|---------|
| NO.                   | Item                 | Unit  | 9GX-2.4 | 9GX-2.8 | 9GX-3.0 | 9GX-3.5 |
| 1                     | Cutting width        | m     | 2.4     | 2.8     | 3.0     | 3.5     |
| 2                     | Stubble height       | cm    | 4-11    |         |         |         |
| 3                     | Input speed          | r/min | 540     |         |         |         |
| 4                     | Whole machine weight | kg    | 700     | 730     | 780     | 1030    |
| 5                     | Supporting power     | hp    | 70-100  | 80-120  | 90-130  | 100-200 |

## Flail mower



| NO. | Item             | Unit | AGL120       | AGL140       | AGL160       | AGL180       |
|-----|------------------|------|--------------|--------------|--------------|--------------|
| 1   | Working width    | mm   | 1150         | 1350         | 1550         | 1750         |
| 2   | Rated speed      | rpm  | 540          | 540          | 540          | 540          |
| 3   | Hammer blade     | n    | 18           | 22           | 24           | 28           |
| 4   | Y-blade          | n    | 36           | 44           | 48           | 56           |
| 5   | Spindle speed    | rpm  | 2160         | 2160         | 2160         | 2160         |
| 6   | Supporting power | hp   | 35-60        | 40-70        | 45-80        | 60-90        |
| 7   | Machine weight   | kg   | 303          | 318          | 336          | 355          |
| 8   | Package size     | mm   | 1350*800*750 | 1550*800*750 | 1750*800*750 | 1950*800*750 |




| NO. | Item             | Unit | AGF160       | AGF180       | AG200        | AGF220       |
|-----|------------------|------|--------------|--------------|--------------|--------------|
| 1   | Working width    | mm   | 1550         | 1750         | 1950         | 2150         |
| 2   | Rated speed      | rpm  | 540          | 540          | 540          | 540          |
| 3   | Hammer blade     | n    | 22           | 26           | 28           | 32           |
| 4   | Y-blade          | n    | 44           | 52           | 56           | 64           |
| 5   | Spindle speed    | rpm  | 2160         | 2160         | 2160         | 2160         |
| 6   | Supporting power | hp   | 60-100       | 70-110       | 85-120       | 95-130       |
| 7   | Machine weight   | kg   | 571          | 605          | 632          | 665          |
| 8   | Package size     | mm   | 2100*900*750 | 2300*900*750 | 2500*900*750 | 2700*900*750 |



| NO. | Item             | Unit | EF120        | EF140        | EF160        | EF180        | EF200        |
|-----|------------------|------|--------------|--------------|--------------|--------------|--------------|
| 1   | Working width    | mm   | 1150         | 1350         | 1550         | 1750         | 1950         |
| 2   | Rated speed      | rpm  | 540          | 540          | 540          | 540          | 540          |
| 3   | Hammer blade     | n    | 18           | 22           | 24           | 28           | 34           |
| 4   | Y-blade          | n    | 36           | 44           | 48           | 56           | 68           |
| 5   | Spindle speed    | rpm  | 2160         | 2160         | 2160         | 2160         | 2160         |
| 6   | Supporting power | hp   | 30-60        | 35-70        | 40-80        | 55-90        | 70-100       |
| 7   | Machine weight   | kg   | 249          | 257          | 270          | 281          | 295          |
| 8   | Package size     | mm   | 1350*800*750 | 1550*800*750 | 1750*800*750 | 1950*800*750 | 2150*800*750 |



| NO. | Item             | Unit | EFCT140      | EFCT160      | EFCT180      | EFCT200      | EFCT220      |
|-----|------------------|------|--------------|--------------|--------------|--------------|--------------|
| 1   | Working width    | mm   | 1350         | 1550         | 1750         | 1950         | 2150         |
| 2   | Rated speed      | rpm  | 540          | 540          | 540          | 540          | 540          |
| 3   | Hammer blade     | n    | 22           | 24           | 28           | 34           | 38           |
| 4   | Y-blade          | n    | 44           | 48           | 56           | 68           | 76           |
| 5   | Spindle speed    | rpm  | 2160         | 2160         | 2160         | 2160         | 2160         |
| 6   | Supporting power | hp   | 35-70        | 40-80        | 55-90        | 70-100       | 80-100       |
| 7   | Machine weight   | kg   | 265          | 278          | 289          | 305          | 319          |
| 8   | Package size     | mm   | 1550*800*750 | 1750*800*750 | 1950*800*750 | 2150*800*750 | 2350*800*750 |

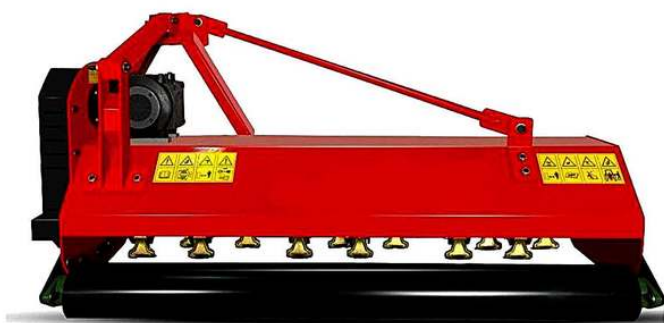


| NO. | Item             | Unit | EFCT140      | EFCT160      |
|-----|------------------|------|--------------|--------------|
| 1   | Working width    | mm   | 1350         | 1550         |
| 2   | Rated speed      | rpm  | 540          | 540          |
| 3   | Hammer blade     | n    | 22           | 24           |
| 4   | Y-blade          | n    | 44           | 48           |
| 5   | Spindle speed    | rpm  | 2160         | 2160         |
| 6   | Supporting power | hp   | 35-70        | 40-80        |
| 7   | Machine weight   | kg   | 280          | 293          |
| 8   | Package size     | mm   | 1550*800*750 | 1750*800*750 |



| NO. | Item             | Unit | EFGCH140     | EFGCH160     | EFGCH180     | EFGCH200     | EFGCH220     |
|-----|------------------|------|--------------|--------------|--------------|--------------|--------------|
| 1   | Working width    | mm   | 1350         | 1550         | 1750         | 1950         | 2150         |
| 2   | Rated speed      | rpm  | 540          | 540          | 540          | 540          | 540          |
| 3   | Hammer blade     | n    | 22           | 24           | 28           | 34           | 38           |
| 4   | Y-blade          | n    | 44           | 48           | 56           | 68           | 76           |
| 5   | Spindle speed    | rpm  | 2160         | 2160         | 2160         | 2160         | 2160         |
| 6   | Supporting power | hp   | 40-70        | 45-80        | 60-90        | 75-100       | 85-100       |
| 7   | Machine weight   | kg   | 312          | 330          | 351          | 369          | 390          |
| 8   | Package size     | mm   | 1550*800*750 | 1750*800*750 | 1950*800*750 | 2150*800*750 | 2350*800*750 |

## Potato harvester

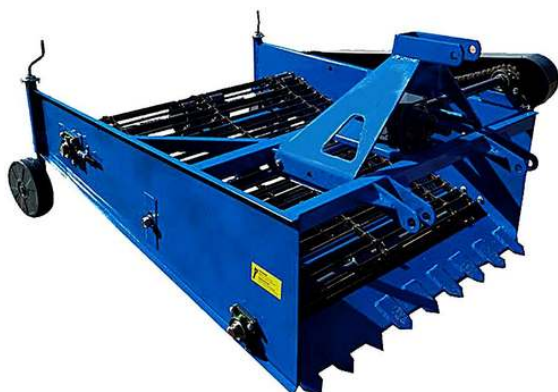

| Potato harvester |                  |      |               |             |               |                |                |                |
|------------------|------------------|------|---------------|-------------|---------------|----------------|----------------|----------------|
| NO.              | Item             | Unit | 4U-1          | 4U-1A       | 4UZ-1         | 4U-2           | 4U-2B          | 4U-3           |
| 1                | Line spacing     | cm   | 55-80         | 50-60       | 55-80         | 55-80          | 55-80          | 55-80          |
| 2                | weight           | kg   | 180           | 100         | 160           | 700            | 800            | 1200           |
| 3                | Supporting power | hp   | 22-35         | 8-15        | 22-35         | 50-80          | 50-80          | 70-120         |
| 4                | Working depth    | cm   | 25            | 20          | 25            | 25             | 25             | 25             |
| 5                | Overall size     | mm   | 1800*1000*980 | 900*700*700 | 1200*1000*750 | 2300*2200*1000 | 2800*2200*1000 | 3300*3900*3100 |

## The corn sheller



| Corn thresher |                  |      |                |               |                |               |
|---------------|------------------|------|----------------|---------------|----------------|---------------|
| NO.           | Item             | Unit | Trailer type   | STYM-850      | Motor type     | PTO           |
| 1             | Overall size     | mm   | 1800*1100*1200 | 1270*720*1000 | 1300*1000*1100 | 1500*850*1000 |
| 2             | Machine weight   | kg   | 345            | 115           | 190            | 150           |
| 3             | Supporting power | hp   | 15-20          | 12-18         | 8-10           | 18-40         |
| 4             | Work efficiency  | t/h  | 6-8            | 4-5           | 4-5            | 4-5           |
| 5             | Threshing rate   | %    | 99             | 99            | 99             | 99            |

## Vegetable planter



| Vegetable planter |                     |      |                        |
|-------------------|---------------------|------|------------------------|
| NO.               | Item                | Unit | 2BS-15                 |
| 1                 | Overall size        | mm   | 2100*1280*800          |
| 2                 | Machine weight      | kg   | 266                    |
| 3                 | Work efficiency     | mm   | 5-10                   |
| 4                 | Supporting power    | hp   | 20-50                  |
| 5                 | Seeding row spacing | mm   | 110-120 (customizable) |
| 6                 | Seed spacing        | mm   | 5-150 (adjustable)     |

## A wheat planter



| A wheat planter |                  |      |        |         |         |         |         |         |
|-----------------|------------------|------|--------|---------|---------|---------|---------|---------|
| NO.             | Item             | Unit | 2BFX-9 | 2BFX-12 | 2BFX-14 | 2BFX-16 | 2BFX-18 | 2BFX-24 |
| 1               | Supporting power | hp   | 15-18  | 15-30   | 18-30   | 50      | 60-80   | 70-100  |
| 2               | Net weight       | kg   | 220    | 285     | 310     | 650     | 680     | 1080    |
| 3               | Sowing range     | mm   | 1350   | 1800    | 2100    | 2400    | 2700    | 3600    |
| 4               | Seeding rows     | row  | 9      | 12      | 14      | 16      | 18      | 24      |
| 5               | Basic spacing    | mm   | 150    | 150     | 150     | 150     | 150     | 150     |
| 6               | Sowing depth     | mm   | 40-80  |         |         |         |         |         |

## Potato planter



| Potato planter |                        |                    |                     |                      |                                 |
|----------------|------------------------|--------------------|---------------------|----------------------|---------------------------------|
| NO.            | Item                   | Unit               | 2CM2 (Double ridge) | 2CM-1 (Single ridge) | 2CM-2A (Two rows and four rows) |
| 1              | Machine weight         | kg                 | 200                 | 180                  | 380                             |
| 2              | Row spacing            | cm                 | 50-80               | /                    | 50-100                          |
| 3              | Spacing in rows        | cm                 | 18-35               | 18-35                | 18-35                           |
| 4              | Operational efficiency | hm <sup>2</sup> /h | 0.4-0.6             | /                    | 0.6-1                           |
| 5              | Seed box volume        | m <sup>3</sup>     | 0.24*2              | 0.24*1               | 0.24*2                          |
| 6              | Fat box volume         | m <sup>3</sup>     | 0.08*1              | 0.08*1               | 0.08*2                          |
| 7              | Supporting power       | hp                 | 20-35               | 20-35                | 50-90                           |

## Finger-wheel rake



| Finger-wheel rake |                                            |      |          |         |         |
|-------------------|--------------------------------------------|------|----------|---------|---------|
| NO.               | Item                                       | Unit | 9LZ-3.0  | 9LZ-4.0 | 9LZ-4.8 |
| 1                 | Working width                              | mm   | 3000     | 4000    | 4800    |
| 2                 | Weight                                     | kg   | 260      | 380     | 450     |
| 3                 | Supporting power                           | hp   | 20       | 30      | 40      |
| 4                 | Number of plates                           | pcs  | 4        | 6       | 8       |
| 5                 | Strip width                                | mm   | 800-1500 |         |         |
| 6                 | Tool width in transport condition          | mm   | 3200     |         |         |
| 7                 | Weight of equipment in transport condition | mm   | 2300     | 3000    | 3800    |
| 8                 | Unit operating speed                       | km/h | 5-15     | 10-15   | 10-15   |

## Reel sprinkler irrigation machine



| Reel sprinkler irrigation machine |                      |      |                |                |                |
|-----------------------------------|----------------------|------|----------------|----------------|----------------|
| NO.                               | Item                 | Unit | 180            | 300            | 400            |
| 1                                 | Machine weight       | kg   | 430            | 1690           | 1870           |
| 2                                 | Machine size (L×W×H) | mm   | 3400×1580×1500 | 5400×2340×2600 | 5400×2340×2600 |
| 3                                 | PE pipe diameter     | mm   | 50             | 75             | 75             |
| 4                                 | PE pipe chief        | m    | 180            | 300            | 400            |
| 5                                 | Drive mode           | /    | Water turbine  | Water turbine  | Electric       |
| 6                                 | Tyre type            | /    | 145/70R12      | 10.0/80-12     | 10.0/80-12     |
| 7                                 | Spraying radius      | m    | 30-50          | 40-80          | 40-80          |

## Plough and rotary tiller all in one machine





| Plough and rotary tiller all in one machine |                       |      |                |                |                |                |                |
|---------------------------------------------|-----------------------|------|----------------|----------------|----------------|----------------|----------------|
| NO.                                         | Item                  | Unit | 225            | 327            | 340            | 425            | 440            |
| 1                                           | Machine weight        | kg   | 300            | 450            | 650            | 620            | 920            |
| 2                                           | Machine size (L×W×H)  | mm   | 1500×1200×1170 | 2250×1300×1280 | 2800×1630×1470 | 2930×1470×1410 | 3450×1680×1550 |
| 3                                           | Number of plow blades | mm   | 2              | 3              | 3              | 4              | 4              |
| 4                                           | Ditching depth        | cm   | 25-35          | 25-35          | 40             | 25-30          | 35-45          |
| 5                                           | Working width         | mm   | 650            | 950-1000       | 1300           | 1200           | 1650           |
| 6                                           | Main beam size        | mm   | 100×80×5       | 100×80×5       | 100×100×8      | 100×80×5       | 100×100×8      |
| 7                                           | Supporting power      | hp   | ≥50            | ≥80            | ≥140           | ≥100           | ≥140           |

## Loosening shovels, plow tips and rake blades

### Product characteristics

We select spring steel with manganese steel and boron steel properties as raw materials. Depending on the material, after undergoing different heat treatment processes, the idealized hardness value is achieved. Hardness of manganese steel material: 45-48HRC; The hardness of boron steel material is 45-48HRC. We will select different materials according to your requirements. The achievable diameter range is 12"-40" (300-1010mm), and the achievable thickness is 3-12mm. The shapes are notched, disc-shaped, flat, corrugated, etc. If you need a new type, we can produce it according to your drawings or samples.

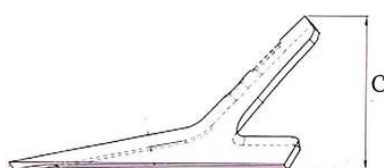

| Loosening shovel  |                   |                  |                   |
|-------------------|-------------------|------------------|-------------------|
| Length (mm)       | Width (mm)        | Height (mm)      | Thickness (mm)    |
| A                 | B                 | C                | /                 |
| 310               | 280               | 50               | 4                 |
| 300               | 230               | 110              | 5                 |
| 250               | 210               | 110              | 6                 |
| 260               | 240               | 160              | 5                 |
| 180               | 220               | 100              | 5                 |
| 500               | 400               | 160              | 6                 |
| 200               | 155               | 80               | 4                 |
| 550               | 420               | 160              | 6                 |
| 185               | 230               | 120              | 5                 |
| 185               | 150               | 100              | 5                 |
| Plow tip          |                   |                  |                   |
| L<br>mm/in        | L1<br>mm/in       | Hole size        | Thickness<br>mm   |
| 170/6.7           | 30/1.2            | Following your's | 5                 |
| 255/10.0          | 40/1.6            |                  | 8                 |
| 290/11.4          | 50/2.0            |                  | 10                |
| 400/15.7          | 60/2.4            |                  | 12                |
| 430/16.9          |                   |                  | 15                |
|                   |                   |                  | 20                |
| What's your size? | What's your size? |                  | What's your size? |



| Diameter |      | thickness | Disc weight |       | Gap weight |      | Flat plate & corrugated weight |      |
|----------|------|-----------|-------------|-------|------------|------|--------------------------------|------|
| 1inch    | mm   | mm        | kg          | LBS   | kg         | LBS  | kg                             | LBS  |
| 12       | 305  | 3.5       | /           | /     | /          | /    | 1.9                            | 4.2  |
| 14       | 356  | 3.5       | /           | /     | /          | /    | 2.6                            | 5.7  |
| 16       | 406  | 3.5       | 3.7         | 8.1   | 3.3        | 7.3  | 3.4                            | 7.5  |
| 18       | 460  | 3.5       | 4.7         | 10.4  | 4.3        | 9.5  | 4.5                            | 9.9  |
| 18       | 460  | 4         | 5.4         | 11.9  | 4.8        | 10.6 | 5.1                            | 11.2 |
| 20       | 508  | 4         | 6.8         | 15.0  | 5.9        | 13.0 | 6.3                            | 13.9 |
| 22       | 560  | 4         | 8.4         | 18.5  | 7.1        | 15.6 | 7.7                            | 17.0 |
| 22       | 560  | 5         | 10.3        | 22.7  | 8.8        | 19.4 | 9.5                            | 20.9 |
| 24       | 610  | 4         | 9.7         | 21.4  | 8.2        | 18.1 | 9.1                            | 20.0 |
| 24       | 610  | 5         | 12.0        | 26.4  | 10.4       | 22.9 | 11.3                           | 24.9 |
| 26       | 660  | 5         | 14.2        | 31.3  | 12.1       | 26.6 | /                              | /    |
| 26       | 660  | 6         | 17.0        | 37.4  | 16.5       | 36.3 | /                              | /    |
| 28       | 710  | 6         | 20.0        | 44.1  | 19.0       | 41.8 | /                              | /    |
| 28       | 710  | 7         | 23.5        | 51.8  | 22.0       | 48.5 | /                              | /    |
| 28       | 710  | 8         | 26.8        | 59.0  | 21.1       | 52.9 | /                              | /    |
| 30       | 760  | 7         | 26.8        | 59.0  | 24.5       | 54.0 | /                              | /    |
| 30       | 760  | 8         | 30.6        | 64.4  | 27.6       | 60.8 | /                              | /    |
| 30       | 760  | 10        | 38.0        | 83.7  | 34.2       | 75.3 | /                              | /    |
| 32       | 810  | 10        | 43.5        | 95.8  | 38.7       | 85.2 | /                              | /    |
| 32       | 810  | 12        | 52.0        | 114.5 | 46.8       | 103  | /                              | /    |
| 36       | 910  | 12        | 66.7        | 147   | 60.0       | 132  | /                              | /    |
| 38       | 960  | 12        | 74.0        | 163   | 66.8       | 147  | /                              | /    |
| 40       | 1010 | 12        | 83.0        | 183   | 76.5       | 168  | /                              | /    |
| 44       | 1120 | 12        | 102.0       | 225   | 95.0       | 211  | /                              | /    |
| 46       | 1170 | 12        | 110.0       | 242   | 100.0      | 220  | /                              | /    |