

## Inverter outline and installation dimensions

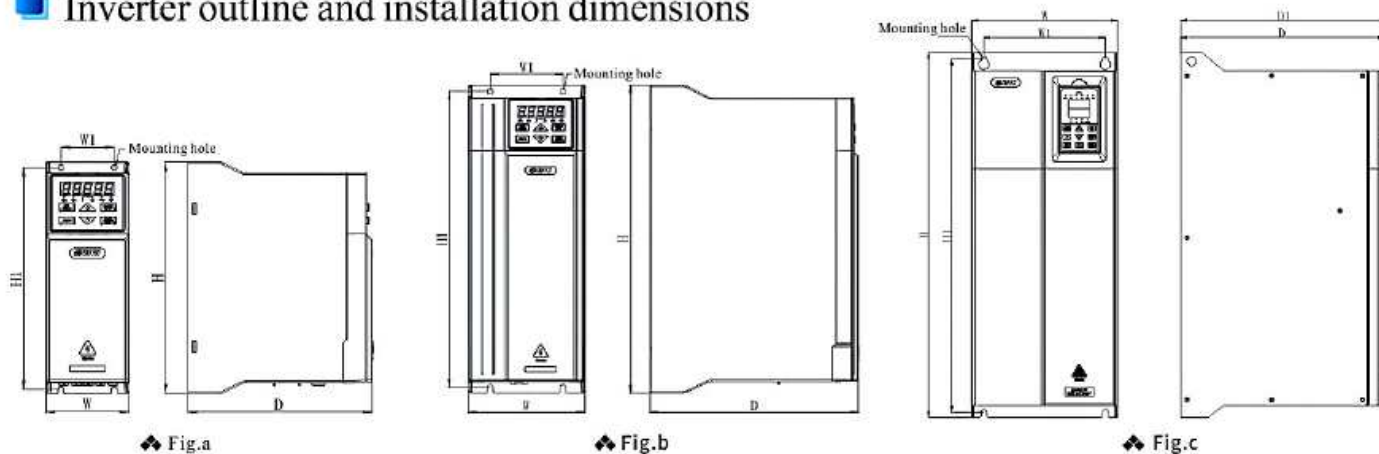



Fig.a

Fig.b

Fig.c

| Inverter model | W (mm) | H (mm) | D (mm) | W1 (mm) | H1 (mm) | D1 (mm) | Mounting hole diameter (mm) | Fig.No. |
|----------------|--------|--------|--------|---------|---------|---------|-----------------------------|---------|
| EN750PV-4T0007 | 67     | 177    | 145    | 40      | 167     | -       | 5                           | Fig.a   |
| EN750PV-4T0015 |        |        |        |         |         |         |                             |         |
| EN750PV-4T0022 |        |        |        |         |         |         |                             |         |
| EN750PV-4T0037 | 75     | 210    | 166    | 48      | 201.5   | -       | 5                           | Fig.a   |
| EN750PV-4T0055 | 100    | 242    | 180    | 71      | 232.5   | -       | 6                           | Fig.b   |
| EN750PV-4T0075 |        |        |        |         |         |         |                             |         |
| EN750PV-4T0110 | 120    | 320    | 214.7  | 75      | 308     | -       | 6                           | Fig.b   |
| EN750PV-4T0150 |        |        |        |         |         |         |                             |         |
| EN750PV-4T0185 | 142    | 408    | 225    | 110     | 394     | -       | 6                           | Fig.b   |
| EN750PV-4T0220 |        |        |        |         |         |         |                             |         |
| EN750PV-4T0300 | 172    | 466    | 230    | 142     | 452     | -       | 7                           | Fig.b   |
| EN750PV-4T0370 |        |        |        |         |         |         |                             |         |
| EN750PV-4T0450 | 225    | 550    | 315    | 185     | 530     | 319.5   | 7                           | Fig.c   |
| EN750PV-4T0550 |        |        |        |         |         |         |                             |         |
| EN750PV-4T0750 | 240    | 600    | 335    | 200     | 580     | 339.5   | 9                           | Fig.c   |
| EN750PV-4T0900 |        |        |        |         |         |         |                             |         |

## Outline dimensions of keypad and keypad mounting box (unit: mm)

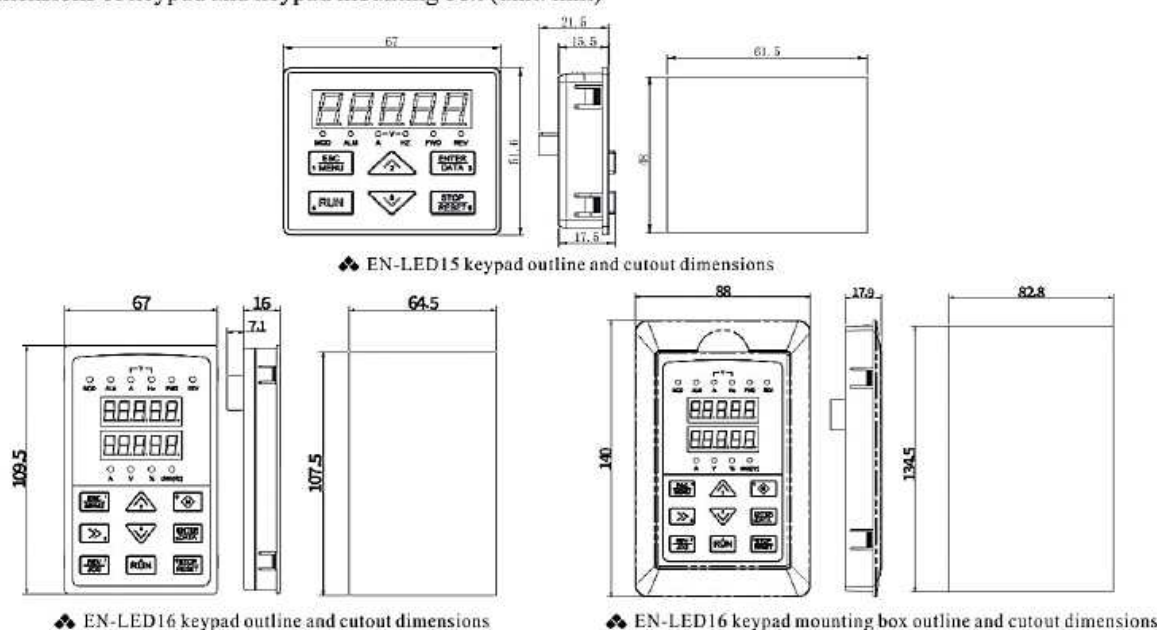

EN-LED15 keypad outline and cutout dimensions

EN-LED16 keypad outline and cutout dimensions

EN-LED16 keypad mounting box outline and cutout dimensions

- Note
- When the EN-LED15 and EN-LED15-D keypads are used externally, mounting via the keypad mounting box is not supported; only direct keypad mounting is supported. The cutout dimensions are shown above.
  - When the EN-LED16 and EN-LED16-D keypads are used externally, the customer can make cutouts according to either the keypad cutout dimensions or the keypad mounting box cutout dimensions based on actual requirements. It is recommended that the panel thickness for mounting the keypad be between 1.0 and 1.5 mm.
  - If the keypad mounting box is used for installation, it is required to be ordered separately.