

PRODUCT CATALOG · TILLAGE

Disc harrows & tillage

Speed disc tillers, seedbed machines, offset and folding heavy-duty harrows up to 10 m, mounted harrows, disc ploughs, crumble rollers and replacement discs — direct from the factory to your farm.



WHO WE ARE

Farm equipment, at the price it *actually* costs.

Built by farmers, for farmers. Andrivo sources farm infrastructure and equipment from international manufacturers, handles the entire import process, and delivers to your farm anywhere in Southern Africa.

Farmers usually pay for a chain of markups they never see — a factory, an export agent, an importer and a local distributor, each adding a margin nobody discloses. Andrivo removes that chain. Our only charge is a service fee on top of the true cost: 30%, or 25% with a referral code.

25%

fee with a referral code (30% without)

0

distributors in between

SADC

we deliver across Southern Africa

How every quote works

1**Factory direct**

We work directly with the manufacturer of every machine in this catalog — no middlemen.

2**Inspected before it ships**

Each order is checked against the factory spec sheet before it leaves the plant.

3**Shipping & customs handled**

Freight, duties, clearing and transport to your gate are all managed by us.

4**Parts & aftersales**

Spares in stock, and every machine logged to your farm under My Farm by Andrivo.

CONTENTS

What's in this catalog

Specifications are typical for each model; your Andrivo quote confirms the exact configuration, disc type and price. Match the harrow to your tractor using the tractor-power row.

Speed disc tillers & land preparation

1BZM mounted speed disc tiller	04
1BZM hydraulic folding speed disc tiller, 4.5–5.5 m	04
1BZM hydraulic folding speed disc tiller, 6–8 m	05
1ZL combined seedbed preparation machine	05
1ZL hydraulic folding seedbed preparation machine	06

Heavy-duty disc harrows

1BZ hydraulic offset heavy-duty disc harrow, 2–3.5 m	06
1BZ hydraulic offset heavy-duty disc harrow, 4–4.5 m	07
1BZ hydraulic folding offset heavy-duty disc harrow	07
1BZ hydraulic folding heavy-duty disc harrow, 6.5–7.5 m	08

Extra-heavy-duty disc harrows

710 series extra-heavy-duty disc harrow	08
710 series hydraulic folding extra-heavy-duty disc harrow	09
710 series hydraulic tandem folding disc harrow, 8.5–10 m	09
810 series extra-heavy-duty disc harrow	10
910 series extra-heavy-duty disc harrow	10
C910 construction disc harrow	11

Mounted disc harrows

1BJX mounted medium disc harrow	11
1BJXD mounted offset medium disc harrow	12
1BQX mounted light-duty disc harrow (reinforced)	12

Ploughs, rollers & discs

1LY disc ploughs	13
Crumble rollers	13

Replacement discs

Harrow and plough discs: sizes	14
--------------------------------	-----------

1BZM 1BZM mounted speed disc tiller



Cultivates, turns in stubble and breaks clods in one pass, mixing straw into the soil to keep its organic matter. Three-point mounted for 100–180 hp tractors.

Model	1BZM-2.5	1BZM-3.0	1BZM-3.5
Working width (m)	2.5	3.0	3.5
Working depth (cm)		15	
Number of discs	16	20	24
Disc diameter (mm)		610/660	
Weight (kg)	1650	1850	2050
Hitch		Mounted	
Tractor power (hp)	100–120	120–150	150–180


1BZM 1BZM hydraulic folding speed disc tiller, 4.5–5.5 m



The trailed, hydraulic folding version of the speed disc tiller: wide work in the field, narrow on the road, for 180–260 hp tractors.

Model	1BZM-4.5	1BZM-5.0	1BZM-5.5
Working width (m)	4.5	5.0	5.5
Working depth (cm)		15	
Number of discs	32	36	40
Disc diameter (mm)		610/660	
Weight (kg)	4200	4400	4650
Hitch		Trailed	
Tractor power (hp)	180–200	200–240	220–260

1BZM 1BZM hydraulic folding speed disc tiller, 6–8 m

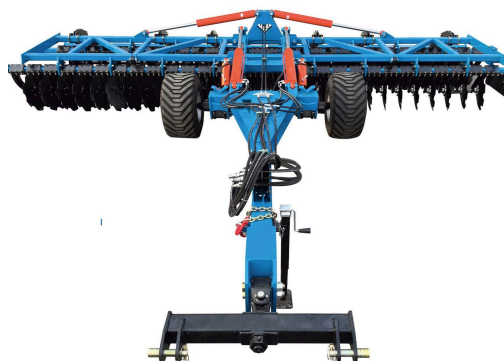

The largest speed disc tillers, 6 to 8 metres wide, for big lands and 300–450 hp tractors. Folds hydraulically for transport.

Model	1BZM-6.0	1BZM-6.5	1BZM-7.5	1BZM-8.0
Working width (m)	6.0	6.5	7.5	8.0
Working depth (cm)	15			
Number of discs	44	48	56	60
Disc diameter (mm)	610/660			
Weight (kg)	5500	6000	7000	7800
Hitch	Trailed			
Tractor power (hp)	300-350	350-380	380-420	400-450

1ZL 1ZL combined seedbed preparation machine



Loosens, crushes and levels the soil, mixes in fertiliser and firms it in one pass, leaving a fine seedbed with a loose top and a firm base that holds moisture. Saves passes and fuel.

Model	1ZL-2.6	1ZL-3.0	1ZL-3.6
Working width (m)	2.6	3.0	3.6
Working depth (cm)	12		
Number of discs	28	32	40
Disc diameter (mm)	460/510		
Weight (kg)	2000	2350	2750
Hitch	Trailed		
Tractor power (hp)	80-100	100-120	120-140

1ZL 1ZL hydraulic folding seedbed preparation machine



The wide, hydraulic folding combined machine, 4 to 6 metres: works wide, folds narrow for the road.

Model	1ZL-4.0	1ZL-4.5	1ZL-5.2	1ZL-5.6	1ZL-6.0
Working width (m)	4.0	4.5	5.2	5.6	6.0
Working depth (cm)	12				
Number of discs	44	48	56	60	64
Disc diameter (mm)	460/510/560				
Weight (kg)	3400	3600	4000	4300	4600
Hitch	Trailed				
Tractor power (hp)	140-160	160-180	180-200	200-240	220-260

1BZ 1BZ hydraulic offset heavy-duty disc harrow, 2–3.5 m



For stubble clearing before ploughing and breaking up soil after it, and can replace the plough for a first pass on worked dry land. Hydraulic transport wheels make it easy to move and turn at headlands.

Model	1BZ-2.0	1BZ-2.5	1BZ-3.0	1BZ-3.5
Working width (m)	2.0	2.5	3.0	3.5
Working depth (cm)	20			
Number of discs	20	24	28	32
Disc diameter (mm)	660			
Weight (kg)	1500	1650	1750	1950
Hitch	Trailed			
Tractor power (hp)	70-80	80-100	90-110	100-120

1BZ 1BZ hydraulic offset heavy-duty disc harrow, 4–4.5 m



Larger offset harrows for heavy clay soils and new lands: clears stubble before ploughing and breaks up the soil after, or replaces the plough for the first pass.

Model	1BZ-4.0	1BZ-4.5
Working width (m)	4.0	4.5
Working depth (cm)	20	
Number of discs	36	40
Disc diameter (mm)	660	
Weight (kg)	2600	2800
Hitch	Trailed	
Tractor power (hp)	120-150	140-180

1BZ 1BZ hydraulic folding offset heavy-duty disc harrow



For stubble clearing on heavy soils and "harrowing instead of ploughing" on medium and light soils, seedbed loosening and weed control on fallow land. Leaves a level field, works wide and folds narrow for transport.

Model	1BZ-4.0	1BZ-4.5	1BZ-5.0	1BZ-5.5
Working width (m)	4.0	4.5	5.0	5.5
Working depth (cm)	20			
Number of discs	36	40	44	48
Disc diameter (mm)	660			
Weight (kg)	3100	3600	3800	4000
Hitch	Trailed			
Tractor power (hp)	130-150	150-180	180-200	200-220

1BZ 1BZ hydraulic folding heavy-duty disc harrow, 6.5–7.5 m



A wide heavy-duty harrow in high-strength alloy steel for large-scale farming. Hydraulic folding takes it down to 3 m wide for the road.

Model	1BZ-6.5	1BZ-7.0	1BZ-7.5
Working width (m)	6.5	7.0	7.5
Working depth (cm)		20	
Number of discs	56	60	64
Disc diameter (mm)		660	
Disc spacing (mm)		230	
Weight (kg)	5500	5800	6000
Hitch		Trailed	
Tractor power (hp)	240-260	260-300	280-320

710 710 series extra-heavy-duty disc harrow



Big 710 mm discs on a high-strength alloy-steel frame with a low centre of gravity. Clears stubble in sunflower, maize, wheat and sugarcane lands and can replace the plough for the first pass on light, worked soils.

Model	710-2.5	710-3.0	710-3.5	710-4.0
Working width (m)	2.5	3.0	3.5	4.0
Working depth (cm)		25		
Number of discs	24	28	32	36
Disc diameter (mm)		710		
Weight (kg)	2600	2800	3000	3700
Hitch		Trailed		
Tractor power (hp)	100-120	120-140	140-160	180-200

710 710 series hydraulic folding extra-heavy-duty disc harrow


The folding 710 harrow, 4 to 7.5 metres wide, for large operations with 180–320 hp tractors.

Model	710-4.0	710-4.5	710-5.5	710-6.5	710-7.5
Working width (m)	4.0	4.5	5.5	6.5	7.5
Working depth (cm)	25				
Number of discs	36	40	48	56	64
Disc diameter (mm)	710				
Weight (kg)	3820	4020	4500	5980	6980
Hitch	Trailed				
Tractor power (hp)	180-200	200-220	240-260	260-300	280-320

710 710 series hydraulic tandem folding disc harrow, 8.5–10 m


The widest harrows in the range, 8.5 to 10 metres, with tandem gangs for 450–600 hp tractors.

Model	710-8.5	710-9.0	710-10.0
Working width (m)	8.5	9.0	10.0
Working depth (cm)	25		
Number of discs	76	80	88
Disc diameter (mm)	710		
Weight (kg)	14000	14500	15500
Hitch	Trailed		
Tractor power (hp)	450-500	500-550	550-600

810 810 series extra-heavy-duty disc harrow


Two rows of 810 mm notched discs, 10 mm thick, working up to 30 cm deep. Built for sugarcane and other tall-stubble lands and seedbed preparation, and can replace the plough on light worked soils. Tapered double-row bearings with four seals last 4–5 times longer than standard farm bearings.

Model	810-2.8	810-3.2	810-4.0	810-4.5	810-5.0	810-6.2
Working width (m)	2.8	3.2	4.0	4.5	5.0	6.2
Working depth (cm)	30					
Number of discs	20	24	28	32	36	44
Disc diameter (mm)	810					
Weight (kg)	4200	4500	5000	5600	6100	8000
Hitch	Trailed					
Disc spacing (mm)	280					
Tractor power (hp)	180-220	220-240	260-280	280-320	320-360	400-440

910 910 series extra-heavy-duty disc harrow


Two rows of 910 mm notched discs, 12 mm thick, on four 400/60-15.5 wide tyres. Clears sugarcane and tall-crop stubble and prepares land before planting, up to 30 cm deep; replaces the plough on light worked soils.

Model	910-3.0	910-4.0	910-5.0
Working width (m)	3.0	3.8	4.9
Working depth (cm)	30		
Number of discs	12	16	20
Disc diameter (mm)	910		
Weight (kg)	4800	5800	6700
Hitch	Trailed		
Tractor power (hp)	200-260	280-320	320-360

C910 C910 construction disc harrow



A heavy harrow for 30–40 cm deep work in heavy soils: building dams and roads and opening up new land.

Model	C910-2680	C910-3680
Working width (m)	2.68	3.68
Working depth (cm)	30	
Disc spacing (mm)	495	
Disc diameter (mm)	910 × 12 mm thick	
Number of discs	6	8
Weight (kg)	3280	3980
Tractor power (hp)	180–240	240–300
Hitch	Trailed	

1BJX 1BJX mounted medium disc harrow



Breaks up soil after ploughing, clears stubble before ploughing and replaces the plough on light and medium dry-land soils. Simple, strong and easy to maintain, with many interchangeable parts.

Model	1BJX-2.0	1BJX-2.2	1BJX-2.5	1BJX-2.8
Working width (m)	2.0	2.2	2.5	2.8
Working depth (cm)	14			
Number of discs	18	20	24	26
Disc diameter (mm)	560			
Weight (kg)	700	800	876	922
Hitch	Category II 3-point			
Tractor power (hp)	50–60	60–70	70–90	80–100

1BJXD 1BJXD mounted offset medium disc harrow



The offset version of the mounted medium harrow, for the same jobs: soil breaking, stubble clearing and harrowing instead of ploughing on light and medium soils.

Model	1BJXD-2.0	1BJXD-2.2	1BJXD-2.5	1BJXD-2.8
Working width (m)	2.0	2.2	2.5	2.8
Working depth (cm)	14			
Number of discs	18	20	24	26
Disc diameter (mm)	560			
Weight (kg)	620	760	840	920
Hitch	Category II 3-point			
Tractor power (hp)	40-60	50-70	70-90	90-100

1BQX 1BQX mounted light-duty disc harrow (reinforced)



A light harrow for small tractors: breaks clods after ploughing, prepares the seedbed, loosens soil, mixes in fertiliser and turns in stubble on light soils.

Model	1BQX-1.1	1BQX-1.3	1BQX-1.5	1BQX-1.7	1BQX-1.9
Working width (m)	1.1	1.3	1.5	1.7	1.9
Working depth (cm)	12				
Number of discs	12	14	16	18	20
Disc diameter (mm)	460				
Weight (kg)	296	326	355	382	410
Hitch	Category I 3-point				
Tractor power (hp)	15-20	25-30	30-35	35-40	40-45

1LY 1LY disc ploughs


Disc ploughs that do not wrap grass, block or bulldoze soil. They cut through stems and roots, suiting green-manure crops, stubble lands, weedy fields and soils with stones or rubble, with low draft and easy handling. Scrapers are optional.

Model	1LYQ-320	1LYQ-420	1LYQ-520	1LY-325	1LY-425	1LY-530
Working width (m)	0.60	0.80	1.00	0.75-0.90	1.0-1.20	1.25-1.50
Working depth (cm)	20	20	20	25-30	25-30	25-30
Number of discs	3	4	5	3	4	5
Disc diameter (mm)	510	510	510	660	660	710
Weight (kg)	190	240	300	400	520	650
Hitch (3-point)	Cat. I	Cat. I	Cat. I	Cat. II	Cat. II	Cat. II
Tractor power (hp)	25-35	35-45	50-70	50-70	60-80	90-120

CR Crumble rollers


Trailed rollers that crush clods and firm the seedbed after tillage, folding up for transport.

Model	CR4500	CR5500	CR6500	CR7500
Working width (m)	4.5	5.5	6.5	7.5
Weight (kg)	1800	1950	2100	2250
Hitch	Trailed			
Tractor power (hp)	100-120	120-150	150-180	180-200

WEAR PARTS

Harrow and plough discs

Plain and notched discs in 30MnB5 boron steel: hard, tough and wear-resistant, heat-treated for long life. Diameters 280–960 mm and thicknesses 3–12 mm, with a choice of centre holes. Discs can also be made to your drawing or sample.



Square



Round


Hexagon, round
corners

Rounded
square


Clover leaf



Square/round


Composite
square


Hexagon

Diameter (mm)	Diameter (in)	Concavity (mm)	Concavity (in)	Thickness (mm)	Thickness (in)
305	12	19	0.75	3	0.12
330	13	25	1	3	0.12
355	14	38	1.5	3	0.12
410	16	38/43/46/48/51	1.5/1.69/1.75/1.85/2	3/3.5/4	0.12/0.14/0.16
435	17	57	2.25	3/3.5/4	0.12/0.14/0.16
460	18	38/44/52/57/63	1.5/1.75/2/2.25/2.5	3/3.5/4	0.12/0.14/0.16
485	19	57	2.25	3.5/4	0.14/0.16
510	20	0/44/51/57/63/70	0/1.75/2.25/2.5/2.75	3.5/4.5	0.14/0.16/0.20
535	21	63/70	2.5/2.75	3.5/4.5	0.14/0.16/0.20
560	22	0/54/57/63/70/76/79/83/89	0/2.125/2.25/2.5/2.75/3/3.125/3.25/3.5	3.5/4.5/6	0.14/0.16/0.20/0.24
585	23	79/83/89	2.875/3.25/3.5	3.5/4.5/6	0.14/0.16/0.20/0.24
610	24	63/70/73/76/81/83/89/95/101/108	2.5/2.75/2.875/3/3.19/3.25/3.5/3.75/4/4.5	3.5/4.5/6	0.14/0.16/0.20/0.24
660	26	57/63/76/83/86/89/102/108/114	2.25/2.44/3/3.25/3.35/3.5/4/4.25/4.5	5/5.5/6/7/8	0.20/0.22/0.24/0.28/0.32
710	28	85/102/108/114/127/130	3.5/4/4.25/4.5/5/5.125	5/5.5/6/7/8	0.20/0.22/0.24/0.28/0.32
810	32	128/132	5.04/5.20	8/12	0.32/0.48
910	36	164	6.46	12	0.48

