

# sbt Reference Manual

## Contents

Preface . . . . .	23
Install . . . . .	24
Getting Started . . . . .	24
Features of sbt . . . . .	24
Also . . . . .	24
<b>Getting Started with sbt . . . . .</b>	<b>25</b>
Installing sbt . . . . .	25
Tips and Notes . . . . .	25
Installing sbt on Mac . . . . .	26
Installing from a universal package . . . . .	26
Installing from a third-party package . . . . .	26
Installing sbt on Windows . . . . .	26
Installing from a universal package . . . . .	26
Windows installer . . . . .	26
Installing sbt on Linux . . . . .	26
Installing from a universal package . . . . .	26
Ubuntu and other Debian-based distributions . . . . .	27
Red Hat Enterprise Linux and other RPM-based distributions . .	27
Gentoo . . . . .	29
Hello, World . . . . .	29
sbt new command . . . . .	29
Running your app . . . . .	29

Exiting sbt shell . . . . .	30
Build definition . . . . .	30
Directory structure . . . . .	30
Base directory . . . . .	30
Source code . . . . .	30
sbt build definition files . . . . .	31
Build support files . . . . .	31
Build products . . . . .	31
Configuring version control . . . . .	31
Running . . . . .	32
sbt shell . . . . .	32
Batch mode . . . . .	32
Continuous build and test . . . . .	33
Common commands . . . . .	33
Tab completion . . . . .	34
History Commands . . . . .	34
Build definition . . . . .	34
Specifying the sbt version . . . . .	35
What is a build definition? . . . . .	35
How build.sbt defines settings . . . . .	36
Keys . . . . .	37
Defining tasks and settings . . . . .	38
Keys in sbt shell . . . . .	38
Imports in build.sbt . . . . .	39
Bare .sbt build definition . . . . .	39
Adding library dependencies . . . . .	39
Task graph . . . . .	40
Terminology . . . . .	40
Declaring dependency to other tasks . . . . .	40
Inlining .value calls . . . . .	43
What's the point of the build.sbt DSL? . . . . .	46

Summary . . . . .	48
Scopes . . . . .	48
The whole story about keys . . . . .	48
Scope axes . . . . .	49
Referring to scopes in a build definition . . . . .	51
Referring to scoped keys from the sbt shell . . . . .	52
Examples of scoped key notation . . . . .	53
Inspecting scopes . . . . .	54
When to specify a scope . . . . .	55
Build-level settings . . . . .	55
Scope delegation . . . . .	56
Appending values . . . . .	57
Appending to previous values: += and ++= . . . . .	57
Appending with dependencies: += and ++= . . . . .	58
Scope delegation (.value lookup) . . . . .	58
Scope delegation rules . . . . .	59
Rule 1: Scope axis precedence . . . . .	60
Rule 2: The task axis delegation . . . . .	60
Rule 3: The configuration axis search path . . . . .	61
Rule 4: The subproject axis search path . . . . .	61
Inspect command lists the delegates . . . . .	63
.value lookup vs dynamic dispatch . . . . .	64
Library dependencies . . . . .	67
Unmanaged dependencies . . . . .	67
Managed Dependencies . . . . .	68
Multi-project builds . . . . .	71
Multiple subprojects . . . . .	71
Dependencies . . . . .	72
Default root project . . . . .	74
Navigating projects interactively . . . . .	74
Common code . . . . .	75

Using plugins . . . . .	75
What is a plugin? . . . . .	75
Declaring a plugin . . . . .	75
Enabling and disabling auto plugins . . . . .	76
Global plugins . . . . .	77
Available Plugins . . . . .	78
Custom settings and tasks . . . . .	78
Defining a key . . . . .	78
Implementing a task . . . . .	79
Execution semantics of tasks . . . . .	80
Turn them into plugins . . . . .	84
Organizing the build . . . . .	84
sbt is recursive . . . . .	84
Tracking dependencies in one place . . . . .	85
When to use <code>.scala</code> files . . . . .	86
Defining auto plugins . . . . .	86
Getting Started summary . . . . .	87
sbt: The Core Concepts . . . . .	87
Advanced Notes . . . . .	88
General Information . . . . .	88
Credits . . . . .	88
Community Plugins . . . . .	99
sbt Organization . . . . .	99
Community Ivy Repository . . . . .	99
Cross building plugins from sbt 0.13 . . . . .	100
Plugins available for sbt 1.0 (including RC-x) . . . . .	100
Plugins available for sbt 1.0.0-M6 . . . . .	102
Plugins available for sbt 1.0.0-M5 . . . . .	102
Community Repository Policy . . . . .	102
Bintray For Plugins . . . . .	103
Create an Open Source Distribution account on Bintray . . . . .	103

Create a repository for your sbt plugins . . . . .	103
Add the bintray-sbt plugin to your build. . . . .	104
Make a release . . . . .	104
Linking your package to the sbt organization . . . . .	105
Linking your package to the sbt organization (sbt org admins) . . . . .	105
Summary . . . . .	106
Setup Notes . . . . .	106
Do not put <code>sbt-launch.jar</code> on your classpath. . . . .	106
Terminal encoding . . . . .	106
JVM heap, permgen, and stack sizes . . . . .	106
Boot directory . . . . .	106
HTTP/HTTPS/FTP Proxy . . . . .	107
Using Sonatype . . . . .	107
Sonatype setup . . . . .	107
SBT setup . . . . .	108
Second - Configure Sonatype integration . . . . .	109
Third - Publish to the staging repository . . . . .	111
Fourth - Integrate with the release process . . . . .	112
Contributing to sbt . . . . .	112
Documentation . . . . .	113
Changes . . . . .	114
Migrating from sbt 0.13.x . . . . .	114
Migrating case class <code>.copy(...)</code> . . . . .	114
sbt version specific source directory . . . . .	114
Migrating from sbt 0.12 style . . . . .	115
Migrating from the Build trait . . . . .	117
sbt 1.0.0-RC2 . . . . .	119
Details of major changes . . . . .	123
Zinc 1: Class-based name hashing . . . . .	123
sbt server: JSON API for tooling integration . . . . .	124
sbt 0.13.5+ Technology Previews . . . . .	127

sbt 0.13.15 . . . . .	127
Fixes with compatibility implications . . . . .	127
Improvements . . . . .	127
Bug fixes . . . . .	128
Maven version range improvement . . . . .	128
Offline installation . . . . .	129
Notes . . . . .	129
sbt 0.13.14 . . . . .	129
sbt 0.13.13 . . . . .	129
Fixes with compatibility implications . . . . .	129
Improvements . . . . .	130
Bug fixes . . . . .	130
new command and templateResolverInfos . . . . .	131
Synthetic subprojects . . . . .	131
Deprecate old sbt 0.12 DSL . . . . .	132
sbt 0.13.12 . . . . .	133
Fixes with compatibility implications . . . . .	133
Improvements . . . . .	133
Bug fixes . . . . .	134
sbt 0.13.11 . . . . .	134
Fixes with compatibility implications . . . . .	134
Improvements . . . . .	135
Bug fixes . . . . .	135
Configurable Scala compiler bridge . . . . .	137
Dotty awareness . . . . .	137
Inter-project dependency tracking . . . . .	137
Def.settings . . . . .	138
sbt 0.13.10 . . . . .	138
sbt 0.13.9 . . . . .	138
Fixes with compatibility implications . . . . .	138
Improvements . . . . .	139

Bug fixes . . . . .	139
<b>crossScalaVersions</b> default value . . . . .	140
POM files no longer include certain source and javadoc jars . . .	140
<b>retrieveManaged</b> related improvements . . . . .	140
Cached resolution fixes . . . . .	140
Force GC . . . . .	141
Maven compatibility fix . . . . .	141
sbt 0.13.8 . . . . .	141
Changes with compatibility implications . . . . .	141
Improvements . . . . .	141
Fixes . . . . .	142
Rolling back XML parsing workaround . . . . .	143
Cross-version support for Scala sources . . . . .	143
Maven resolver plugin . . . . .	143
Project-level dependency exclusions . . . . .	144
Sequential tasks . . . . .	144
Nicer ways of declaring project settings . . . . .	145
Bytecode Enhancers . . . . .	146
sbt 0.13.7 . . . . .	147
Fixes with compatibility implications . . . . .	147
Improvements . . . . .	147
Bug fixes . . . . .	147
Natural whitespace handling . . . . .	148
Custom Maven local repository location . . . . .	148
Circular dependency . . . . .	149
Cached resolution (minigraph caching) . . . . .	149
sbt 0.13.6 . . . . .	150
Fixes with compatibility implications . . . . .	150
Improvements . . . . .	150
Bug fixes . . . . .	151
HTTPS related changes . . . . .	151

enablePlugins/disablePlugins . . . . .	152
Unresolved dependencies error . . . . .	152
Eviction warnings . . . . .	152
Latest SNAPSHOTS . . . . .	153
Consolidated resolution . . . . .	153
sbt 0.13.5 . . . . .	154
sbt 0.13.0 - 0.13.2 . . . . .	154
sbt 0.13.2 . . . . .	154
sbt 0.13.1 . . . . .	155
sbt 0.13.0 . . . . .	156
Details of major changes . . . . .	159
sbt 0.12.4 . . . . .	163
sbt 0.12.3 . . . . .	164
sbt 0.12.2 . . . . .	164
sbt 0.12.1 . . . . .	165
Dependency management fixes: . . . . .	165
Three stage incremental compilation: . . . . .	166
Miscellaneous fixes and improvements: . . . . .	166
Forward-compatible-only change (not present in 0.12.0): . . . . .	167
sbt 0.12.0 . . . . .	167
Details of major changes from 0.11.2 to 0.12.0 . . . . .	169
scala-library.jar . . . . .	172
Older Changes . . . . .	172
0.11.3 to 0.12.0 . . . . .	172
0.11.2 to 0.11.3 . . . . .	172
0.11.1 to 0.11.2 . . . . .	173
0.11.0 to 0.11.1 . . . . .	173
0.10.1 to 0.11.0 . . . . .	174
0.10.0 to 0.10.1 . . . . .	175
0.7.7 to 0.10.0 . . . . .	176
0.7.5 to 0.7.7 . . . . .	176



0.7.4 to 0.7.5 . . . . .	177
0.7.3 to 0.7.4 . . . . .	177
0.7.2 to 0.7.3 . . . . .	178
0.7.1 to 0.7.2 . . . . .	179
0.7.0 to 0.7.1 . . . . .	180
0.5.6 to 0.7.0 . . . . .	180
0.5.5 to 0.5.6 . . . . .	181
0.5.4 to 0.5.5 . . . . .	181
0.5.2 to 0.5.4 . . . . .	182
0.5.1 to 0.5.2 . . . . .	184
0.4.6 to 0.5/0.5.1 . . . . .	185
0.4.5 to 0.4.6 . . . . .	185
0.4.3 to 0.4.5 . . . . .	186
0.4 to 0.4.3 . . . . .	187
0.3.7 to 0.4 . . . . .	188
0.3.6 to 0.3.7 . . . . .	189
0.3.5 to 0.3.6 . . . . .	190
0.3.2 to 0.3.5 . . . . .	190
0.3.1 to 0.3.2 . . . . .	191
0.3 to 0.3.1 . . . . .	191
0.2.3 to 0.3 . . . . .	191
0.2.2 to 0.2.3 . . . . .	192
0.2.1 to 0.2.2 . . . . .	192
0.2.0 to 0.2.1 . . . . .	192
0.1.9 to 0.2.0 . . . . .	193
0.1.8 to 0.1.9 . . . . .	193
0.1.7 to 0.1.8 . . . . .	193
0.1.6 to 0.1.7 . . . . .	193
0.1.5 to 0.1.6 . . . . .	195
0.1.4 to 0.1.5 . . . . .	195
0.1.3 to 0.1.4 . . . . .	195

0.1.2 to 0.1.3 . . . . .	195
0.1.1 to 0.1.2 . . . . .	196
0.1 to 0.1.1 . . . . .	196
Migrating from 0.7 to 0.10+ . . . . .	196
Why move to 1.0.0-RC2? . . . . .	196
Preserve <b>project/</b> for 0.7.x project . . . . .	197
Create <b>build.sbt</b> for 1.0.0-RC2 . . . . .	197
Run sbt 1.0.0-RC2 . . . . .	198
Switching back to sbt 0.7.x . . . . .	198
Detailed Topics . . . . .	198
Using sbt . . . . .	198
Command Line Reference . . . . .	198
Notes on the command line . . . . .	199
Project-level tasks . . . . .	199
Configuration-level tasks . . . . .	199
General commands . . . . .	201
Commands for managing the build definition . . . . .	202
Command Line Options . . . . .	202
Console Project . . . . .	204
Description . . . . .	204
Accessing settings . . . . .	204
Evaluating tasks . . . . .	205
State . . . . .	205
Cross-building . . . . .	206
Introduction . . . . .	206
Publishing Conventions . . . . .	206
Using Cross-Built Libraries . . . . .	206
Cross-Building a Project . . . . .	207
Interacting with the Configuration System . . . . .	209
Selecting commands, tasks, and settings . . . . .	209
Discovering Settings and Tasks . . . . .	210

Triggered Execution . . . . .	214
Compile . . . . .	215
Testing . . . . .	215
Running Multiple Commands . . . . .	215
Scripts, REPL, and Dependencies . . . . .	215
Setup . . . . .	216
Usage . . . . .	216
Understanding Incremental Recompilation . . . . .	218
sbt heuristics . . . . .	219
How to take advantage of sbt heuristics . . . . .	220
Implementation of incremental recompilation . . . . .	220
Overview . . . . .	220
Interaction with the Scala compiler . . . . .	222
Name hashing algorithm . . . . .	224
What is included in the interface of a Scala class . . . . .	230
Further references . . . . .	234
Configuration . . . . .	234
Classpaths, sources, and resources . . . . .	234
Basics . . . . .	234
Compiler Plugin Support . . . . .	237
Continuations Plugin Example . . . . .	238
Version-specific Compiler Plugin Example . . . . .	238
Configuring Scala . . . . .	238
Automatically managed Scala . . . . .	238
Using Scala from a local directory . . . . .	240
sbt's Scala version . . . . .	241
Forking . . . . .	241
Enable forking . . . . .	242
Change working directory . . . . .	242
Forked JVM options . . . . .	243
Java Home . . . . .	243

Configuring output . . . . .	244
Configuring Input . . . . .	244
Direct Usage . . . . .	244
Global Settings . . . . .	245
Basic global configuration file . . . . .	245
Global Settings using a Global Plugin . . . . .	245
Java Sources . . . . .	246
Usage . . . . .	246
Known issues in mixed mode compilation . . . . .	247
Ignoring the Scala source directories . . . . .	247
Mapping Files . . . . .	248
Relative to a directory . . . . .	248
Rebase . . . . .	249
Flatten . . . . .	249
Alternatives . . . . .	250
Local Scala . . . . .	250
Macro Projects . . . . .	251
Introduction . . . . .	251
Defining the Project Relationships . . . . .	251
Common Interface . . . . .	253
Distribution . . . . .	253
Paths . . . . .	254
Constructing a File . . . . .	254
Path Finders . . . . .	255
File Filters . . . . .	258
Parallel Execution . . . . .	258
Task ordering . . . . .	258
Practical constraints . . . . .	259
Configuration . . . . .	259
Future work . . . . .	263
External Processes . . . . .	264

Usage . . . . .	264
Running Project Code . . . . .	267
Problems . . . . .	267
sbt's Solutions . . . . .	267
Testing . . . . .	268
Basics . . . . .	268
Output . . . . .	270
Options . . . . .	270
Additional test configurations . . . . .	272
JUnit . . . . .	276
Extensions . . . . .	276
Dependency Management . . . . .	277
Artifacts . . . . .	277
Selecting default artifacts . . . . .	277
Modifying default artifacts . . . . .	278
Defining custom artifacts . . . . .	279
Publishing .war files . . . . .	280
Using dependencies with artifacts . . . . .	280
Dependency Management Flow . . . . .	281
Background . . . . .	281
Caching and Configuration . . . . .	281
General troubleshooting steps . . . . .	282
Plugins . . . . .	282
Notes . . . . .	283
Library Management . . . . .	283
Introduction . . . . .	283
Manual Dependency Management . . . . .	283
Automatic Dependency Management . . . . .	284
Proxy Repositories . . . . .	295
Overview . . . . .	295
sbt Configuration . . . . .	297

<code>~/ .sbt/repositories</code> . . . . .	297
Proxying Ivy Repositories . . . . .	298
Publishing . . . . .	298
Define the repository . . . . .	300
Credentials . . . . .	300
Cross-publishing . . . . .	301
Published artifacts . . . . .	301
Modifying the generated POM . . . . .	301
Publishing Locally . . . . .	302
Resolvers . . . . .	302
Maven . . . . .	302
Predefined . . . . .	302
Custom . . . . .	303
Update Report . . . . .	306
Filtering a Report and Getting Artifacts . . . . .	307
Cached resolution . . . . .	310
Setup . . . . .	310
Dependency as a graph . . . . .	310
Cached resolution . . . . .	310
Caveats and known issues . . . . .	311
Motivation . . . . .	312
Tasks and Commands . . . . .	313
Tasks . . . . .	313
Introduction . . . . .	313
Features . . . . .	313
Defining a Task . . . . .	314
Getting values from multiple scopes . . . . .	317
Advanced Task Operations . . . . .	320
Dynamic Computations with <code>Def.taskDyn</code> . . . . .	321
Using <code>Def.sequential</code> . . . . .	322
Handling Failure . . . . .	323

Input Tasks . . . . .	327
Input Keys . . . . .	327
Basic Input Task Definition . . . . .	328
Input Task using Parsers . . . . .	328
The InputTask type . . . . .	329
Using other input tasks . . . . .	330
Preapplying input . . . . .	331
Get a Task from an InputTask . . . . .	332
Commands . . . . .	333
What is a “command”?. . . . .	333
Introduction . . . . .	334
Defining a Command . . . . .	334
Full Example . . . . .	335
Parsing and tab completion . . . . .	337
Basic parsers . . . . .	338
Built-in parsers . . . . .	338
Combining parsers . . . . .	339
Transforming results . . . . .	339
Controlling tab completion . . . . .	340
Dependent parsers . . . . .	341
State and actions . . . . .	341
Command-related data . . . . .	342
Project-related data . . . . .	343
Project data . . . . .	343
Classpaths . . . . .	344
Running tasks . . . . .	344
Using State in a task . . . . .	345
Tasks/Settings: Motivation . . . . .	345
Application . . . . .	347
Plugins and Best Practices . . . . .	348
General Best Practices . . . . .	348

<code>project/</code> vs. <code>~/sbt/</code> . . . . .	348
Local settings . . . . .	348
<code>.sbtrc</code> . . . . .	349
Generated files . . . . .	349
Don't hard code . . . . .	349
Don't "mutate" files . . . . .	349
Use absolute paths . . . . .	350
Parser combinators . . . . .	351
Plugins . . . . .	351
Using an auto plugin . . . . .	351
By Description . . . . .	352
Plugin dependencies . . . . .	353
Creating an auto plugin . . . . .	354
Using a library in a build definition example . . . . .	359
Best Practices . . . . .	362
Plugins Best Practices . . . . .	362
Get your plugins known . . . . .	362
Don't use default package . . . . .	362
Follow the naming conventions . . . . .	362
Use settings and tasks. Avoid commands. . . . .	363
Use <code>sbt.AutoPlugin</code> . . . . .	363
Reuse existing keys . . . . .	363
Avoid namespace clashes . . . . .	364
Provide core feature in a plain old Scala object . . . . .	364
Configuration advices . . . . .	364
Mucking with <code>globalSettings</code> . . . . .	367
Setting up Travis CI with sbt . . . . .	368
Set <code>project/build.properties</code> . . . . .	368
Read the Travis manual . . . . .	368
Basic setup . . . . .	368
Plugin build setup . . . . .	369



Custom JVM options . . . . .	370
Caching . . . . .	371
Build matrix . . . . .	372
Notification . . . . .	373
Dealing with flaky network or tests . . . . .	373
More things . . . . .	374
Sample setting . . . . .	374
Testing sbt plugins . . . . .	375
scripted test framework . . . . .	375
step 1: snapshot . . . . .	375
step 2: scripted-plugin . . . . .	375
step 3: src/sbt-test . . . . .	376
step 4: write a script . . . . .	377
step 5: run the script . . . . .	377
step 6: custom assertion . . . . .	378
step 7: testing the test . . . . .	379
step 8: get inspired . . . . .	379
sbt new and Templates . . . . .	380
Trying new command . . . . .	380
Giter8 support . . . . .	380
How to extend sbt new . . . . .	381
Cross building plugins . . . . .	383
How to... . . . .	383
Classpaths . . . . .	384
Include a new type of managed artifact on the classpath, such as <b>mar</b> . . . . .	384
Get the classpath used for compilation . . . . .	384
Get the runtime classpath, including the project's compiled classes	384
Get the test classpath, including the project's compiled test classes	385
Use packaged jars on classpaths instead of class directories . . . .	385
Get all managed jars for a configuration . . . . .	385

Get the files included in a classpath . . . . .	386
Get the module and artifact that produced a classpath entry . . .	386
Customizing paths . . . . .	386
Change the default Scala source directory . . . . .	387
Change the default Java source directory . . . . .	387
Change the default resource directory . . . . .	387
Change the default (unmanaged) library directory . . . . .	388
Disable using the project's base directory as a source directory .	388
Add an additional source directory . . . . .	388
Add an additional resource directory . . . . .	389
Include/exclude files in the source directory . . . . .	389
Include/exclude files in the resource directory . . . . .	389
Include only certain (unmanaged) libraries . . . . .	390
Generating files . . . . .	390
Generate sources . . . . .	390
Generate resources . . . . .	392
Inspect the build . . . . .	393
Show or search help for a command, task, or setting . . . . .	393
List available tasks . . . . .	393
List available settings . . . . .	393
Display the description and type of a setting or task . . . . .	394
Display the delegation chain of a setting or task . . . . .	395
Show the list of projects and builds . . . . .	395
Show the current session (temporary) settings . . . . .	396
Show basic information about sbt and the current build . . . . .	396
Show the value of a setting . . . . .	396
Show the result of executing a task . . . . .	396
Show the classpath used for compilation or testing . . . . .	397
Show the main classes detected in a project . . . . .	397
Show the test classes detected in a project . . . . .	397
Interactive mode . . . . .	398

Use tab completion . . . . .	398
Show more tab completion suggestions . . . . .	398
Modify the default JLine keybindings . . . . .	399
Configure the prompt string . . . . .	399
Use history . . . . .	399
Change the location of the interactive history file . . . . .	399
Use the same history for all projects . . . . .	400
Disable interactive history . . . . .	400
Run commands before entering interactive mode . . . . .	400
Configure and use logging . . . . .	401
View the logging output of the previously executed command . .	401
View the previous logging output of a specific task . . . . .	402
Show warnings from the previous compilation . . . . .	403
Change the logging level globally . . . . .	403
Change the logging level for a specific task, configuration, or project	404
Configure printing of stack traces . . . . .	404
Print the output of tests immediately instead of buffering . . . .	405
Add a custom logger . . . . .	405
Log messages in a task . . . . .	405
Log messages in a setting . . . . .	405
Project metadata . . . . .	406
Set the project name . . . . .	406
Set the project version . . . . .	406
Set the project organization . . . . .	406
Set the project's homepage and other metadata . . . . .	407
Configure packaging . . . . .	407
Use the packaged jar on classpaths instead of class directory . . .	407
Add manifest attributes . . . . .	407
Change the file name of a package . . . . .	408
Modify the contents of the package . . . . .	408
Running commands . . . . .	408

Pass arguments to a command or task in batch mode . . . . .	408
Provide multiple commands to run consecutively . . . . .	409
Read commands from a file . . . . .	409
Define an alias for a command or task . . . . .	409
Quickly evaluate a Scala expression . . . . .	409
Configure and use Scala . . . . .	410
Set the Scala version used for building the project . . . . .	410
Disable the automatic dependency on the Scala library . . . . .	410
Temporarily switch to a different Scala version . . . . .	410
Use a local Scala installation for building a project . . . . .	410
Build a project against multiple Scala versions . . . . .	410
Enter the Scala REPL with a project's dependencies on the class- path, but not the compiled project classes . . . . .	411
Enter the Scala REPL with a project's dependencies and com- piled code on the classpath . . . . .	411
Enter the Scala REPL with plugins and the build definition on the classpath . . . . .	411
Define the initial commands evaluated when entering the Scala REPL . . . . .	411
Define the commands evaluated when exiting the Scala REPL . .	412
Use the Scala REPL from project code . . . . .	412
Generate API documentation . . . . .	413
Select javadoc or scaladoc . . . . .	413
Set the options used for generating scaladoc independently of compilation . . . . .	413
Add options for scaladoc to the compilation options . . . . .	413
Set the options used for generating javadoc independently of com- pilation . . . . .	413
Add options for javadoc to the compilation options . . . . .	413
Enable automatic linking to the external Scaladoc of managed dependencies . . . . .	414
Enable manual linking to the external Scaladoc of managed de- pendencies . . . . .	414
Define the location of API documentation for a library . . . . .	414

Triggered execution . . . . .	414
Run a command when sources change . . . . .	414
Run multiple commands when sources change . . . . .	415
Configure the sources that are checked for changes . . . . .	415
Set the time interval between checks for changes to sources . . . .	415
Define Custom Tasks . . . . .	416
Define a Task that runs tests in specific sub-projects . . . . .	416
How to take an action on startup . . . . .	416
Sequencing . . . . .	417
Defining a sequential task with Def.sequential . . . . .	418
Defining a dynamic task with Def.taskDyn . . . . .	419
Doing something after an input task . . . . .	420
Defining a dynamic input task with Def.inputTaskDyn . . . . .	421
How to sequence using commands . . . . .	423
Examples . . . . .	423
.sbt build examples . . . . .	423
.sbt build with .scala files example . . . . .	427
project/Resolvers.scala . . . . .	428
project/Dependencies.scala . . . . .	428
project/ShellPromptPlugin.scala . . . . .	429
build.sbt . . . . .	429
Advanced configurations example . . . . .	431
Advanced command example . . . . .	432
Frequently Asked Questions . . . . .	434
Project Information . . . . .	434
Usage . . . . .	434
Build definitions . . . . .	435
Extending sbt . . . . .	436
Errors . . . . .	440
Dependency Management . . . . .	441
Miscellaneous . . . . .	442

0.7 to 0.10+ Migration . . . . .	443
My tests all run really fast but some are broken that weren't in 0.7! . . . . .	444
Index . . . . .	445
Values and Types . . . . .	445
Methods . . . . .	447
Developer's Guide (Work in progress) . . . . .	449
Towards sbt 1.0 . . . . .	449
Modularization . . . . .	450
Module summary . . . . .	450
sbt Coding Guideline . . . . .	452
General goal . . . . .	452
Modular design . . . . .	452
Binary resiliency . . . . .	453
Other public API matters . . . . .	454
Style matters . . . . .	455
sbt-datatype . . . . .	456
Using the plugin . . . . .	456
Datatype schema . . . . .	457
Using datatype to retain binary compatibility . . . . .	461
JSON codec generation . . . . .	463
Existing parameters for protocols, records, etc. . . . .	464
Settings . . . . .	465
Syntax summary . . . . .	466
Compiler Interface . . . . .	467
Fetching the most specific sources . . . . .	467
sbt Launcher . . . . .	468
Getting Started with the sbt launcher . . . . .	468
Overview . . . . .	468
Sbt Launcher Architecture . . . . .	473
Module Resolution . . . . .	473

Classloader Caching and Isolation . . . . .	473
Caching . . . . .	475
Locking . . . . .	475
Service Discovery and Isolation . . . . .	475
sbt Launcher Configuration . . . . .	476
Example . . . . .	476
Variable Substitution . . . . .	479
Syntax . . . . .	480
Notes . . . . .	481
Core Principles . . . . .	481
Introduction to build state . . . . .	481
Settings Architecture . . . . .	482
Task Architecture . . . . .	483
Settings Core . . . . .	485
Example . . . . .	485
sbt Settings Discussion . . . . .	488
Setting Initialization . . . . .	489
Controlling Initialization . . . . .	492
Build Loaders . . . . .	493
Custom Resolver . . . . .	493
Custom Builder . . . . .	495
Custom Transformer . . . . .	497
The BuildDependencies type . . . . .	498
Creating Command Line Applications Using sbt . . . . .	499
Hello World Example . . . . .	499
Nightly Builds . . . . .	501

## Preface

sbt is a build tool for Scala, Java, and [more](#). It requires Java 1.8 or later.

## Install

See [Installing sbt](#) for the setup instructions.

## Getting Started

To get started, *please read* the [Getting Started Guide](#). You will save yourself a *lot* of time if you have the right understanding of the big picture up-front. All documentation may be found via the table of contents included at the end of every page.

Use [Stack Overflow](#) for questions. Use the [sbt-dev mailing list](#) for discussing sbt development. Use [\[@scala\\_sbt\]\(https://twitter.com/scala\\_sbt\)](#) for questions and discussions.

## Features of sbt

- Little or no configuration required for simple projects
- Scala-based [build definition](#) that can use the full flexibility of Scala code
- Accurate incremental recompilation using information extracted from the compiler
- Continuous compilation and testing with [triggered execution](#)
- Packages and publishes jars
- Generates documentation with scaladoc
- Supports mixed Scala/[Java](#) projects
- Supports [testing](#) with ScalaCheck, specs, and ScalaTest. JUnit is supported by a plugin.
- Starts the Scala REPL with project classes and dependencies on the class-path
- Modularization supported with [sub-projects](#)
- External project support (list a git repository as a dependency!)
- [Parallel task execution](#), including parallel test execution
- [Library management support](#): inline declarations, external Ivy or Maven configuration files, or manual management

## Also

This documentation can be forked on [GitHub](#). Feel free to make corrections and add documentation.

Documentation for 0.7.x has been [archived here](#). This documentation applies to sbt 1.0.0-RC2.

See also the [API Documentation](#), [SXR Documentation](#), and the [index of names and types](#).



## Getting Started with sbt

sbt uses a small number of concepts to support flexible and powerful build definitions. There are not that many concepts, but sbt is not exactly like other build systems and there are details you *will* stumble on if you haven't read the documentation.

The Getting Started Guide covers the concepts you need to know to create and maintain an sbt build definition.

It is *highly recommended* to read the Getting Started Guide!

If you are in a huge hurry, the most important conceptual background can be found in [build definition](#), [scopes](#), and [task graph](#). But we don't promise that it's a good idea to skip the other pages in the guide.

It's best to read in order, as later pages in the Getting Started Guide build on concepts introduced earlier.

Thanks for trying out sbt and *have fun*!

## Installing sbt

To create an sbt project, you'll need to take these steps:

- Install sbt.
- Setup a simple [hello world](#) project
  - Create a project directory with source files in it.
  - Create your build definition.
- Move on to [running](#) to learn how to run sbt.
- Then move on to [.sbt build definition](#) to learn more about build definitions.

Ultimately, the installation of sbt boils down to a launcher JAR and a shell script, but depending on your platform, we provide several ways to make the process less tedious. Head over to the installation steps for [Mac](#), [Windows](#), or [Linux](#).

## Tips and Notes

If you have any trouble running sbt, see [Setup Notes](#) on terminal encodings, HTTP proxies, and JVM options.

## Installing sbt on Mac

### Installing from a universal package

Download [ZIP](#) or [TGZ](#) package, and expand it.

### Installing from a third-party package

**Note:** Third-party packages may not provide the latest version. Please make sure to report any issues with these packages to the relevant maintainers.

### Homebrew

```
$ brew install sbt --devel
```

### Macports

```
$ port install sbt
```

## Installing sbt on Windows

### Installing from a universal package

Download [ZIP](#) or [TGZ](#) package and expand it.

### Windows installer

Download [msi installer](#) and install it.

## Installing sbt on Linux

### Installing from a universal package

Download [ZIP](#) or [TGZ](#) package and expand it.

## Ubuntu and other Debian-based distributions

[DEB](#) package is officially supported by sbt.

Ubuntu and other Debian-based distributions use the DEB format, but usually you don't install your software from a local DEB file. Instead they come with package managers both for the command line (e.g. `apt-get`, `aptitude`) or with a graphical user interface (e.g. Synaptic). Run the following from the terminal to install `sbt` (You'll need superuser privileges to do so, hence the `sudo`).

```
echo "deb https://dl.bintray.com/sbt/debian-experimental /" | sudo tee -a /etc/apt/sources.list
sudo apt-key adv --keyserver hkp://keyserver.ubuntu.com:80 --recv 2EE0EA64E40A89B84B2DF73499E8
sudo apt-get update
sudo apt-get install sbt
```

Package managers will check a number of configured repositories for packages to offer for installation. `sbt` binaries are published to Bintray, and conveniently Bintray provides an APT repository. You just have to add the repository to the places your package manager will check.

Once `sbt` is installed, you'll be able to manage the package in `aptitude` or Synaptic after you updated their package cache. You should also be able to see the added repository at the bottom of the list in System Settings -> Software & Updates -> Other Software:

## Red Hat Enterprise Linux and other RPM-based distributions

[RPM](#) package is officially supported by sbt.

Red Hat Enterprise Linux and other RPM-based distributions use the RPM format. Run the following from the terminal to install `sbt` (You'll need superuser privileges to do so, hence the `sudo`).

```
curl https://bintray.com/sbt/rpm/rpm-experimental | sudo tee /etc/yum.repos.d/bintray-sbt-rpm
sudo yum install sbt
```

`sbt` binaries are published to Bintray, and conveniently Bintray provides an RPM repository. You just have to add the repository to the places your package manager will check.

**Note:** Please report any issues with these to the [sbt-launcher-package](#) project.

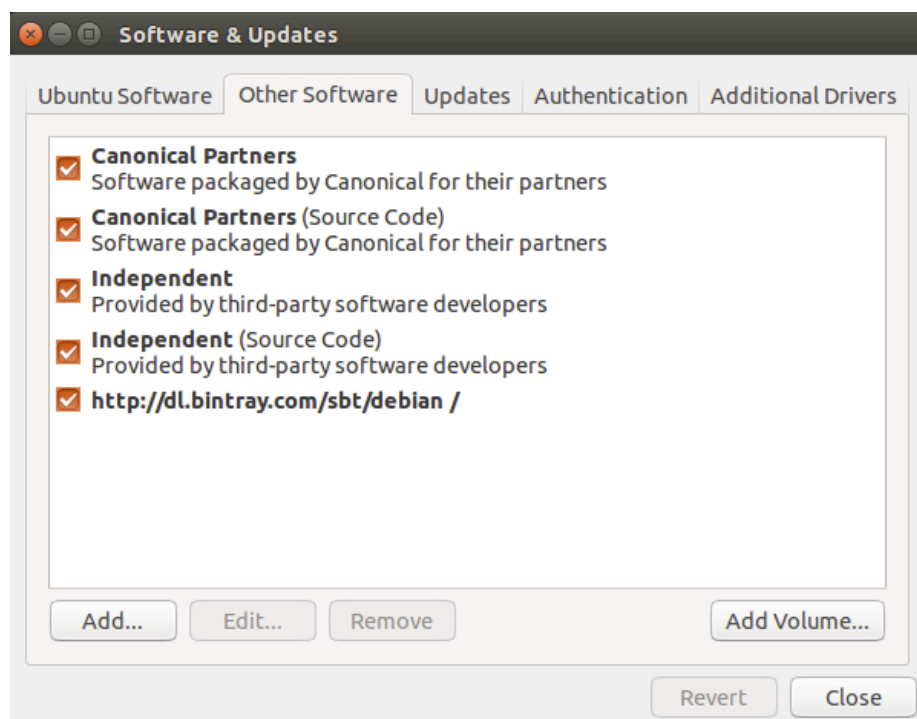


Figure 1: Ubuntu Software & Updates Screenshot

## Gentoo

The official tree contains ebuilds for sbt. To install the latest available version do:

```
emerge dev-java/sbt
```

## Hello, World

This page assumes you've [installed sbt](#) 0.13.13 or later.

### sbt new command

If you're using sbt 0.13.13 or later, you can use sbt **new** command to quickly setup a simple Hello world build. Type the following command to the terminal.

```
$ sbt new sbt/scala-seed.g8
....
Minimum Scala build.

name [My Something Project]: hello

Template applied in ./hello
```

When prompted for the project name, type **hello**.

This will create a new project under a directory named **hello**.

### Running your app

Now from inside the **hello** directory, start **sbt** and type **run** at the sbt shell. On Linux or OS X the commands might look like this:

```
$ cd hello
$ sbt
...
> run
...
[info] Compiling 1 Scala source to /xxx/hello/target/scala-2.12/classes...
[info] Running example.Hello
hello
```

We will see more tasks [later](#).

## Exiting sbt shell

To leave sbt shell, type `exit` or use Ctrl+D (Unix) or Ctrl+Z (Windows).

```
> exit
```

## Build definition

The build definition goes in a file called `build.sbt`, located in the project's base directory. You can take a look at the file, but don't worry if the details of this build file aren't clear yet. In [.sbt build definition](#) you'll learn more about how to write a `build.sbt` file.

## Directory structure

This page assumes you've [installed sbt](#) and seen the [Hello, World](#) example.

### Base directory

In sbt's terminology, the "base directory" is the directory containing the project. So if you created a project `hello` containing `hello/build.sbt` as in the [Hello, World](#) example, `hello` is your base directory.

### Source code

sbt uses the same directory structure as [Maven](#) for source files by default (all paths are relative to the base directory):

```
src/
  main/
    resources/
      <files to include in main jar here>
    scala/
      <main Scala sources>
    java/
      <main Java sources>
  test/
    resources
      <files to include in test jar here>
    scala/
      <test Scala sources>
    java/
      <test Java sources>
```

Other directories in `src/` will be ignored. Additionally, all hidden directories will be ignored.

Source code can be placed in the project's base directory as `hello/app.scala`, which may be for small projects, though for normal projects people tend to keep the projects in the `src/main/` directory to keep things neat. The fact that you can place `*.scala` source code in the base directory might seem like an odd trick, but this fact becomes relevant [later](#).

### **sbt build definition files**

The build definition is described in `build.sbt` (actually any files named `*.sbt`) in the project's base directory.

```
build.sbt
```

### **Build support files**

In addition to `build.sbt`, `project` directory can contain `.scala` files that defines helper objects and one-off plugins. See [organizing the build](#) for more.

```
build.sbt
project/
  Dependencies.scala
```

You may see `.sbt` files inside `project/` but they are not equivalent to `.sbt` files in the project's base directory. Explaining this will come [later](#), since you'll need some background information first.

### **Build products**

Generated files (compiled classes, packaged jars, managed files, caches, and documentation) will be written to the `target` directory by default.

### **Configuring version control**

Your `.gitignore` (or equivalent for other version control systems) should contain:

```
target/
```

Note that this deliberately has a trailing `/` (to match only directories) and it deliberately has no leading `/` (to match `project/target/` in addition to plain `target/`).

## Running

This page describes how to use sbt once you have set up your project. It assumes you've [installed sbt](#) and created a [Hello, World](#) or other project.

### sbt shell

Run sbt in your project directory with no arguments:

```
$ sbt
```

Running sbt with no command line arguments starts sbt shell. sbt shell has a command prompt (with tab completion and history!).

For example, you could type `compile` at the sbt shell:

```
> compile
```

To `compile` again, press up arrow and then enter.

To run your program, type `run`.

To leave sbt shell, type `exit` or use Ctrl+D (Unix) or Ctrl+Z (Windows).

### Batch mode

You can also run sbt in batch mode, specifying a space-separated list of sbt commands as arguments. For sbt commands that take arguments, pass the command and arguments as one argument to sbt by enclosing them in quotes. For example,

```
$ sbt clean compile "testOnly TestA TestB"
```

In this example, `testOnly` has arguments, `TestA` and `TestB`. The commands will be run in sequence (`clean`, `compile`, then `testOnly`).

**Note:** Running in batch mode requires JVM spinup and JIT each time, so **your build will run much slower**. For day-to-day coding, we recommend using the sbt shell or Continuous build and test feature described below.



## Continuous build and test

To speed up your edit-compile-test cycle, you can ask sbt to automatically re-compile or run tests whenever you save a source file.

Make a command run when one or more source files change by prefixing the command with `~`. For example, in sbt shell try:

```
> ~testQuick
```

Press enter to stop watching for changes.

You can use the `~` prefix with either sbt shell or batch mode.

See [Triggered Execution](#) for more details.

## Common commands

Here are some of the most common sbt commands. For a more complete list, see [Command Line Reference](#).

`clean`

Deletes all generated files (in the target directory).

`compile`

Compiles the main sources (in `src/main/scala` and `src/main/java` directories).

`test`

Compiles and runs all tests.

`console`

Starts the Scala interpreter with a classpath including the compiled sources and all dependencies. To return to sbt, type `:quit`, `Ctrl+D` (Unix), or `Ctrl+Z` (Windows).

`run <argument>*`

Runs the main class for the project in the same virtual machine as sbt.

`package`

Creates a jar file containing the files in `src/main/resources` and the classes compiled from `src/main/scala` and `src/main/java`.

`help <command>`

Displays detailed help for the specified command. If no command is provided, displays brief descriptions of all commands.

`reload`

Reloads the build definition (`build.sbt`, `project/.scala`, `project/.sbt` files). Needed if you change the build definition.

## Tab completion

sbt shell has tab completion, including at an empty prompt. A special sbt convention is that pressing tab once may show only a subset of most likely completions, while pressing it more times shows more verbose choices.

## History Commands

sbt shell remembers history, even if you exit sbt and restart it. The simplest way to access history is with the up arrow key. The following commands are also supported:

!

Show history command help.

!!

Execute the previous command again.

!:

Show all previous commands.

!n

Show the last n commands.

!n

Execute the command with index n, as shown by the !: command.

!-n

Execute the nth command before this one.

!string

Execute the most recent command starting with ‘string.’

!?string

Execute the most recent command containing ‘string.’

## Build definition

This page describes sbt build definitions, including some “theory” and the syntax of `build.sbt`. It assumes you have installed a recent version of sbt, such as sbt

0.13.13, know how to [use sbt](#), and have read the previous pages in the Getting Started Guide.

This page discusses the `build.sbt` build definition.

## Specifying the sbt version

As part of your build definition you will specify the version of sbt that your build uses. This allows people with different versions of the sbt launcher to build the same projects with consistent results. To do this, create a file named `project/build.properties` that specifies the sbt version as follows:

```
sbt.version=1.0.0-RC2
```

If the required version is not available locally, the `sbt` launcher will download it for you. If this file is not present, the `sbt` launcher will choose an arbitrary version, which is discouraged because it makes your build non-portable.

## What is a build definition?

A *build definition* is defined in `build.sbt`, and it consists of a set of projects (of type [Project](#)). Because the term *project* can be ambiguous, we often call it a *subproject* in this guide.

For instance, in `build.sbt` you define the subproject located in the current directory like this:

```
lazy val root = (project in file("."))
  .settings(
    name := "Hello",
    scalaVersion := "2.12.2"
  )
```

Each subproject is configured by key-value pairs.

For example, one key is `name` and it maps to a string value, the name of your subproject. The key-value pairs are listed under the `.settings(...)` method as follows:

```
lazy val root = (project in file("."))
  .settings(
    name := "Hello",
    scalaVersion := "2.12.2"
  )
```

## How build.sbt defines settings

build.sbt defines subprojects, which holds a sequence of key-value pairs called *setting expressions* using *build.sbt DSL*.

```
lazy val root = (project in file("."))
  .settings(
    name           := "hello",
    organization   := "com.example",
    scalaVersion   := "2.12.2",
    version        := "0.1.0-SNAPSHOT"
  )
```

<b>organization</b>	<b>:=</b>	<b>{ "com.example"</b>
<hr/>	<hr/>	<hr/>
key	operator	(setting/task) body

### setting/task expression

Let's take a closer look at the build.sbt DSL:

Each entry is called a *setting expression*. Some among them are also called task expressions. We will see more on the difference later in this page.

A setting expression consists of three parts:

1. Left-hand side is a *key*.
2. *Operator*, which in this case is `:=`
3. Right-hand side is called the *body*, or the *setting body*.

On the left-hand side, `name`, `version`, and `scalaVersion` are *keys*. A key is an instance of `SettingKey[T]`, `TaskKey[T]`, or `InputKey[T]` where T is the expected value type. The kinds of key are explained below.

Because key `name` is typed to `SettingKey[String]`, the `:=` operator on `name` is also typed specifically to `String`. If you use the wrong value type, the build definition will not compile:

```
lazy val root = (project in file("."))
  .settings(
    name := 42 // will not compile
  )
```

build.sbt may also be interspersed with `vals`, `lazy vals`, and `defs`. Top-level objects and classes are not allowed in build.sbt. Those should go in the `project/` directory as Scala source files.

## Keys

**Types** There are three flavors of key:

- **SettingKey[T]**: a key for a value computed once (the value is computed when loading the subproject, and kept around).
- **TaskKey[T]**: a key for a value, called a *task*, that has to be recomputed each time, potentially with side effects.
- **InputKey[T]**: a key for a task that has command line arguments as input. Check out [Input Tasks](#) for more details.

**Built-in Keys** The built-in keys are just fields in an object called [Keys](#). A `build.sbt` implicitly has an `import sbt.Keys._`, so `sbt.Keys.name` can be referred to as `name`.

**Custom Keys** Custom keys may be defined with their respective creation methods: `settingKey`, `taskKey`, and `inputKey`. Each method expects the type of the value associated with the key as well as a description. The name of the key is taken from the `val` the key is assigned to. For example, to define a key for a new task called `hello`,

```
lazy val hello = taskKey[Unit]("An example task")
```

Here we have used the fact that an `.sbt` file can contain `vals` and `defs` in addition to settings. All such definitions are evaluated before settings regardless of where they are defined in the file.

**Note:** Typically, lazy vals are used instead of vals to avoid initialization order problems.

**Task vs Setting keys** A `TaskKey[T]` is said to define a *task*. Tasks are operations such as `compile` or `package`. They may return `Unit` (`Unit` is Scala for `void`), or they may return a value related to the task, for example `package` is a `TaskKey[File]` and its value is the jar file it creates.

Each time you start a task execution, for example by typing `compile` at the interactive sbt prompt, sbt will re-run any tasks involved exactly once.

sbt's key-value pairs describing the subproject can keep around a fixed string value for a setting such as `name`, but it has to keep around some executable code for a task such as `compile` – even if that executable code eventually returns a string, it has to be re-run every time.

*A given key always refers to either a task or a plain setting.* That is, “taskiness” (whether to re-run each time) is a property of the key, not the value.

## Defining tasks and settings

Using `:=`, you can assign a value to a setting and a computation to a task. For a setting, the value will be computed once at project load time. For a task, the computation will be re-run each time the task is executed.

For example, to implement the `hello` task from the previous section:

```
lazy val hello = taskKey[Unit]("An example task")

lazy val root = (project in file("."))
  .settings(
    hello := { println("Hello!") }
  )
```

We already saw an example of defining settings when we defined the project's name,

```
lazy val root = (project in file("."))
  .settings(
    name := "hello"
  )
```

**Types for tasks and settings** From a type-system perspective, the `Setting` created from a task key is slightly different from the one created from a setting key. `taskKey := 42` results in a `Setting[Task[T]]` while `settingKey := 42` results in a `Setting[T]`. For most purposes this makes no difference; the task key still creates a value of type `T` when the task executes.

The `T` vs. `Task[T]` type difference has this implication: a setting can't depend on a task, because a setting is evaluated only once on project load and is not re-run. More on this in [task graph](#).

## Keys in sbt shell

In sbt shell, you can type the name of any task to execute that task. This is why typing `compile` runs the `compile` task. `compile` is a task key.

If you type the name of a setting key rather than a task key, the value of the setting key will be displayed. Typing a task key name executes the task but doesn't display the resulting value; to see a task's result, use `show <task name>` rather than plain `<task name>`. The convention for keys names is to use `camelCase` so that the command line name and the Scala identifiers are the same.

To learn more about any key, type `inspect <keyname>` at the sbt interactive prompt. Some of the information `inspect` displays won't make sense yet, but at the top it shows you the setting's value type and a brief description of the setting.

## Imports in build.sbt

You can place import statements at the top of `build.sbt`; they need not be separated by blank lines.

There are some implied default imports, as follows:

```
import sbt._
import Keys._
```

(In addition, if you have auto plugins, the names marked under `autoImport` will be imported.)

## Bare .sbt build definition

Instead of defining `Projects`, bare `.sbt` build definition consists of a list of `Setting[_]` expressions.

```
name := "hello"
version := "1.0"
scalaVersion := "2.12.2"
```

This syntax is recommended mostly for using plugins. See later section about the plugins.

## Adding library dependencies

To depend on third-party libraries, there are two options. The first is to drop jars in `lib/` (unmanaged dependencies) and the other is to add managed dependencies, which will look like this in `build.sbt`:

```
val derby = "org.apache.derby" % "derby" % "10.4.1.3"

lazy val commonSettings = Seq(
  organization := "com.example",
  version := "0.1.0-SNAPSHOT",
  scalaVersion := "2.12.2"
)
```

```

lazy val root = (project in file("."))
  .settings(
    commonSettings,
    name := "Hello",
    libraryDependencies += derby
  )

```

This is how you add a managed dependency on the Apache Derby library, version 10.4.1.3.

The `libraryDependencies` key involves two complexities: `+=` rather than `:=`, and the `%` method. `+=` appends to the key's old value rather than replacing it, this is explained in [Task Graph](#). The `%` method is used to construct an Ivy module ID from strings, explained in [Library dependencies](#).

We'll skip over the details of library dependencies until later in the Getting Started Guide. There's a [whole page](#) covering it later on.

## Task graph

Continuing from [build definition](#), this page explains `build.sbt` definition in more detail.

Rather than thinking of `settings` as key-value pairs, a better analogy would be to think of it as a *directed acyclic graph* (DAG) of tasks where the edges denote **happens-before**. Let's call this the *task graph*.

## Terminology

Let's review the key terms before we dive in.

- Setting/Task expression: entry inside `.settings(...)`.
- Key: Left hand side of a setting expression. It could be a `SettingKey[A]`, a `TaskKey[A]`, or an `InputKey[A]`.
- Setting: Defined by a setting expression with `SettingKey[A]`. The value is calculated once during load.
- Task: Defined by a task expression with `TaskKey[A]`. The value is calculated each time it is invoked.

## Declaring dependency to other tasks

In `build.sbt` DSL, we use `.value` method to express the dependency to another task or setting. The `value` method is special and may only be called in the argument to `:=` (or, `+=` or `++=`, which we'll see later).



As a first example, consider defining the `scalacOption` that depends on `update` and `clean` tasks. Here are the definitions of these keys (from [Keys](#)).

**Note:** The values calculated below are nonsensical for `scalaOptions`, and it's just for demonstration purpose only:

```
val scalacOptions = taskKey[Seq[String]]("Options for the Scala compiler.")
val update = taskKey[UpdateReport]("Resolves and optionally retrieves dependencies, producing a report")
val clean = taskKey[Unit]("Deletes files produced by the build, such as generated sources, etc.")
```

Here's how we can rewire `scalacOptions`:

```
scalacOptions := {
  val ur = update.value // update task happens-before scalacOptions
  val x = clean.value   // clean task happens-before scalacOptions
  // ---- scalacOptions begins here ----
  ur.allConfigurations.take(3)
}
```

`update.value` and `clean.value` declare task dependencies, whereas `ur.allConfigurations.take(3)` is the body of the task.

`.value` is not a normal Scala method call. `build.sbt` DSL uses a macro to lift these outside of the task body. **Both `update` and `clean` tasks are completed by the time task engine evaluates the opening `{` of `scalacOptions` regardless of which line it appears in the body.**

See the following example:

```
lazy val root = (project in file("."))
  .settings(
    name := "Hello",
    organization := "com.example",
    scalaVersion := "2.12.2",
    version := "0.1.0-SNAPSHOT",
    scalacOptions := {
      val out = streams.value // streams task happens-before scalacOptions
      val log = out.log
      log.info("123")
      val ur = update.value // update task happens-before scalacOptions
      log.info("456")
      ur.allConfigurations.take(3)
    }
  )
```

Next, from sbt shell type `scalacOptions`:

```

> scalacOptions
[info] Updating {file:/xxx/}root...
[info] Resolving jline#jline;2.14.1 ...
[info] Done updating.
[info] 123
[info] 456
[success] Total time: 0 s, completed Jan 2, 2017 10:38:24 PM

```

Even though `val ur = ...` appears in between `log.info("123")` and `log.info("456")` the evaluation of `update` task happens before either of them.

Here's another example:

```

lazy val root = (project in file("."))
  .settings(
    name := "Hello",
    organization := "com.example",
    scalaVersion := "2.12.2",
    version := "0.1.0-SNAPSHOT",
    scalacOptions := {
      val ur = update.value // update task happens-before scalacOptions
      if (false) {
        val x = clean.value // clean task happens-before scalacOptions
      }
      ur.allConfigurations.take(3)
    }
  )

```

Next, from sbt shell type `run` then `scalacOptions`:

```

> run
[info] Updating {file:/xxx/}root...
[info] Resolving jline#jline;2.14.1 ...
[info] Done updating.
[info] Compiling 1 Scala source to /Users/eugene/work/quick-test/task-graph/target/scala-2.12/
[info] Running example.Hello
hello
[success] Total time: 0 s, completed Jan 2, 2017 10:45:19 PM
> scalacOptions
[info] Updating {file:/xxx/}root...
[info] Resolving jline#jline;2.14.1 ...
[info] Done updating.
[success] Total time: 0 s, completed Jan 2, 2017 10:45:23 PM

```

Now if you check for `target/scala-2.12/classes/`, it won't exist because `clean` task has run even though it is inside the `if (false)`.

Another important thing to note is that there's no guarantee about the ordering of `update` and `clean` tasks. They might run `update` then `clean`, `clean` then `update`, or both in parallel.

### Inlining `.value` calls

As explained above, `.value` is a special method that is used to express the dependency to other tasks and settings. Until you're familiar with `build.sbt`, we recommend you put all `.value` calls at the top of the task body.

However, as you get more comfortable, you might wish to inline the `.value` calls because it could make the task/setting more concise, and you don't have to come up with variable names.

We've inlined a few examples:

```
scalacOptions := {  
  val x = clean.value  
  update.value.allConfigurations.take(3)  
}
```

Note whether `.value` calls are inlined, or placed anywhere in the task body, they are still evaluated before entering the task body.

**Inspecting the task** In the above example, `scalacOptions` has a *dependency* on `update` and `clean` tasks. If you place the above in `build.sbt` and run the sbt interactive console, then type `inspect scalacOptions`, you should see (in part):

```
> inspect scalacOptions  
[info] Task: scala.collection.Seq[java.lang.String]  
[info] Description:  
[info] Options for the Scala compiler.  
....  
[info] Dependencies:  
[info] *:clean  
[info] *:update  
....
```

This is how sbt knows which tasks depend on which other tasks.

For example, if you `inspect tree compile` you'll see it depends on another key `incCompileSetup`, which it in turn depends on other keys like `dependencyClasspath`. Keep following the dependency chains and magic happens.

```

> inspect tree compile
[info] compile:compile = Task[sbt.inc.Analysis]
[info]   +-compile:incCompileSetup = Task[sbt.Compiler$IncSetup]
[info]     | +-*/:skip = Task[Boolean]
[info]     | +-compile:compileAnalysisFilename = Task[java.lang.String]
[info]       | | +-*/:crossPaths = true
[info]       | | +-{.}/*:scalaBinaryVersion = 2.12
[info]       | |
[info]       | | +-*/:compilerCache = Task[xsbti.compile.GlobalsCache]
[info]       | +-*/:definesClass = Task[scala.Function1[java.io.File, scala.Function1[java.lang.String, Boolean]]]
[info]       | +-compile:dependencyClasspath = Task[scala.collection.Seq[sbt.Attributed[java.io.File]]]
[info]       | | +-compile:dependencyClasspath::streams = Task[sbt.std.TaskStreams[sbt.Init$ScopedKey[_ <: Any]]]
[info]       | | | +-*/:streamsManager = Task[sbt.std.Streams[sbt.Init$ScopedKey[_ <: Any]]]
[info]       | | |
[info]       | | | +-compile:externalDependencyClasspath = Task[scala.collection.Seq[sbt.Attributed[java.io.File]]]
[info]       | | | | +-compile:externalDependencyClasspath::streams = Task[sbt.std.TaskStreams[sbt.Init$ScopedKey[_ <: Any]]]
[info]       | | | | | +-*/:streamsManager = Task[sbt.std.Streams[sbt.Init$ScopedKey[_ <: Any]]]
[info]       | | | |
[info]       | | | | +-compile:managedClasspath = Task[scala.collection.Seq[sbt.Attributed[java.io.File]]]
[info]       | | | | | +-compile:classpathConfiguration = Task[sbt.Configuration]
[info]       | | | | | | +-compile:configuration = compile
[info]       | | | | | +-*/:internalConfigurationMap = <function1>
[info]       | | | | | +-*:update = Task[sbt.UpdateReport]
[info]       | | | |
....

```

When you type `compile` sbt automatically performs an `update`, for example. It Just Works because the values required as inputs to the `compile` computation require sbt to do the `update` computation first.

In this way, all build dependencies in sbt are *automatic* rather than explicitly declared. If you use a key's value in another computation, then the computation depends on that key.

**Defining a task that depends on other settings** `scalacOptions` is a task key. Let's say it's been set to some values already, but you want to filter out `"-Xfatal-warnings"` and `"-deprecation"` for non-2.12.

```

lazy val root = (project in file("."))
  .settings(
    name := "Hello",
    organization := "com.example",
    scalaVersion := "2.12.2",
    version := "0.1.0-SNAPSHOT",
    scalacOptions := List("-encoding", "utf8", "-Xfatal-warnings", "-deprecation", "-unchecked")
  )

```

```

scalacOptions := {
  val old = scalacOptions.value
  scalaBinaryVersion.value match {
    case "2.12" => old
    case _      => old filterNot (Set("-Xfatal-warnings", "-deprecation").apply)
  }
}
)

```

Here's how it should look on the sbt shell:

```

> show scalacOptions
[info] * -encoding
[info] * utf8
[info] * -Xfatal-warnings
[info] * -deprecation
[info] * -unchecked
[success] Total time: 0 s, completed Jan 2, 2017 11:44:44 PM
> ++2.11.8
[info] Setting version to 2.11.8
[info] Reapplying settings...
[info] Set current project to Hello (in build file:/xxx/)
> show scalacOptions
[info] * -encoding
[info] * utf8
[info] * -unchecked
[success] Total time: 0 s, completed Jan 2, 2017 11:44:51 PM

```

Next, take these two keys (from [Keys](#)):

```

val scalacOptions = taskKey[Seq[String]]("Options for the Scala compiler.")
val checksums = settingKey[Seq[String]]("The list of checksums to generate and to verify for")

```

**Note:** `scalacOptions` and `checksums` have nothing to do with each other. They are just two keys with the same value type, where one is a task.

It is possible to compile a `build.sbt` that aliases `scalacOptions` to `checksums`, but not the other way. For example, this is allowed:

```

// The scalacOptions task may be defined in terms of the checksums setting
scalacOptions := checksums.value

```

There is no way to go the *other* direction. That is, a setting key can't depend on a task key. That's because a setting key is only computed once on project load, so the task would not be re-run every time, and tasks expect to re-run every time.

```
// Bad example: The checksums setting cannot be defined in terms of the scalacOptions task!
checksums := scalacOptions.value
```

**Defining a setting that depends on other settings** In terms of the execution timing, we can think of the settings as a special tasks that evaluate during loading time.

Consider defining the project organization to be the same as the project name.

```
// name our organization after our project (both are SettingKey[String])
organization := name.value
```

Here's a realistic example. This rewires `scalaSource` in `Compile` key to a different directory only when `scalaBinaryVersion` is "2.11".

```
scalaSource in Compile := {
  val old = (scalaSource in Compile).value
  scalaBinaryVersion.value match {
    case "2.11" => baseDirectory.value / "src-2.11" / "main" / "scala"
    case _      => old
  }
}
```

## What's the point of the build.sbt DSL?

The `build.sbt` DSL is a domain-specific language used construct a DAG of settings and tasks. The setting expressions encode settings, tasks and the dependencies among them.

This structure is common to [Make](#) (1976), [Ant](#) (2000), and [Rake](#) (2003).

**Intro to Make** The basic Makefile syntax looks like the following:

```
target: dependencies
[tab] system command1
[tab] system command2
```

Given a target (the default target is named `all`),

1. Make checks if the target's dependencies have been built, and builds any of the dependencies that hasn't been built yet.
2. Make runs the system commands in order.

Let's take a look at a Makefile:

```
CC=g++
CFLAGS=-Wall

all: hello

hello: main.o hello.o
    $(CC) main.o hello.o -o hello

%.o: %.cpp
    $(CC) $(CFLAGS) -c $< -o $@
```

Running `make`, it will by default pick the target named `all`. The target lists `hello` as its dependency, which hasn't been built yet, so Make will build `hello`.

Next, Make checks if the `hello` target's dependencies have been built yet. `hello` lists two targets: `main.o` and `hello.o`. Once those targets are created using the last pattern matching rule, only then the system command is executed to link `main.o` and `hello.o` to `hello`.

If you're just running `make`, you can focus on what you want as the target, and the exact timing and commands necessary to build the intermediate products are figured out by Make. We can think of this as dependency-oriented programming, or flow-based programming. Make is actually considered a hybrid system because while the DSL describes the task dependencies, the actions are delegated to system commands.

**Rake** This hybridity is continued for Make successors such as Ant, Rake, and sbt. Take a look at the basic syntax for Rakefile:

```
task name: [:prereq1, :prereq2] do |t|
  # actions (may reference prereq as t.name etc)
end
```

The breakthrough made with Rake was that it used a programming language to describe the actions instead of the system commands.

**Benefits of hybrid flow-based programming** There are several motivation to organizing the build this way.

First is de-duplication. With flow-based programming, a task is executed only once even when it is depended by multiple tasks. For example, even when multiple tasks along the task graph depend on `compile` in `Compile`, the compilation will be executed exactly once.

Second is parallel processing. Using the task graph, the task engine can schedule mutually non-dependent tasks in parallel.

Third is the separation of concern and the flexibility. The task graph lets the build user wire the tasks together in different ways, while sbt and plugins can provide various features such as compilation and library dependency management as functions that can be reused.

## Summary

The core data structure of the build definition is a DAG of tasks, where the edges denote happens-before relationships. `build.sbt` is a DSL designed to express dependency-oriented programming, or flow-based programming, similar to `Makefile` and `Rakefile`.

The key motivation for the flow-based programming is de-duplication, parallel processing, and customizability.

## Scopes

This page describes scopes. It assumes you've read and understood the previous pages, [build definition](#) and [task graph](#).

### The whole story about keys

[Previously](#) we pretended that a key like `name` corresponded to one entry in sbt's map of key-value pairs. This was a simplification.

In truth, each key can have an associated value in more than one context, called a *scope*.

Some concrete examples:

- if you have multiple projects (also called subprojects) in your build definition, a key can have a different value in each project.
- the `compile` key may have a different value for your main sources and your test sources, if you want to compile them differently.
- the `packageOptions` key (which contains options for creating jar packages) may have different values when packaging class files (`packageBin`) or packaging source code (`packageSrc`).

*There is no single value for a given key `name`, because the value may differ according to scope.*

However, there is a single value for a given *scoped* key.



If you think about sbt processing a list of settings to generate a key-value map describing the project, as [discussed earlier](#), the keys in that key-value map are *scoped* keys. Each setting defined in the build definition (for example in `build.sbt`) applies to a scoped key as well.

Often the scope is implied or has a default, but if the defaults are wrong, you'll need to mention the desired scope in `build.sbt`.

## Scope axes

A *scope axis* is a type constructor similar to `Option[A]`, that is used to form a component in a scope.

There are three scope axes:

- The subproject axis
- The dependency configuration axis
- The task axis

If you're not familiar with the notion of *axis*, we can think of the RGB color cube as an example:



Figure 2: color cube

In the RGB color model, all colors are represented by a point in the cube whose axes correspond to red, green, and blue components encoded by a number. Similarly, a full scope in sbt is formed by a **tuple** of a subproject, a configuration, and a task value:

```
scalacOptions in (projA, Compile, console)
```

To be more precise, it actually looks like this:

```
scalacOptions in (Select(projA: Reference),  
                  Select(Compile: ConfigKey),  
                  Select(console.key))
```

**Scoping by the subproject axis** If you [put multiple projects in a single build](#), each project needs its own settings. That is, keys can be scoped according to the project.

The project axis can also be set to `ThisBuild`, which means the “entire build”, so a setting applies to the entire build rather than a single project. Build-level settings are often used as a fallback when a project doesn’t define a project-specific setting. We will discuss more on build-level settings later in this page.

**Scoping by the configuration axis** A *dependency configuration* (or “configuration” for short) defines a graph of library dependencies, potentially with its own classpath, sources, generated packages, etc. The dependency configuration concept comes from Ivy, which sbt uses for managed dependencies [Library Dependencies](#), and from [MavenScopes](#).

Some configurations you’ll see in sbt:

- `Compile` which defines the main build (`src/main/scala`).
- `Test` which defines how to build tests (`src/test/scala`).
- `Runtime` which defines the classpath for the `run` task.

By default, all the keys associated with compiling, packaging, and running are scoped to a configuration and therefore may work differently in each configuration. The most obvious examples are the task keys `compile`, `package`, and `run`; but all the keys which *affect* those keys (such as `sourceDirectories` or `scalacOptions` or `fullClasspath`) are also scoped to the configuration.

Another thing to note about a configuration is that it can extend other configurations. The following figure shows the extension relationship among the most common configurations.

`Test` and `IntegrationTest` extends `Runtime`; `Runtime` extends `Compile`; `CompileInternal` extends `Compile`, `Optional`, and `Provided`.



Figure 3: dependency configurations

**Scoping by Task axis** Settings can affect how a task works. For example, the `packageSrc` task is affected by the `packageOptions` setting.

To support this, a task key (such as `packageSrc`) can be a scope for another key (such as `packageOptions`).

The various tasks that build a package (`packageSrc`, `packageBin`, `packageDoc`) can share keys related to packaging, such as `artifactName` and `packageOptions`. Those keys can have distinct values for each packaging task.

**Global scope component** Each scope axis can be filled in with an instance of the axis type (for example the task axis can be filled in with a task), or the axis can be filled in with the special value `Global`, which is also written as `*`. So we can think of `Global` as `None`.

`*` is a universal fallback for all scope axes, but its direct use should be reserved to sbt and plugin authors in most cases.

To make the matter confusing, `someKey` in `Global` appearing in build definition implicitly converts to `someKey` in `(Global, Global, Global)`.

### Referring to scopes in a build definition

If you create a setting in `build.sbt` with a bare key, it will be scoped to (current subproject, configuration `Global`, task `Global`):

```

lazy val root = (project in file("."))
  .settings(
    name := "hello"
  )

```

Run `sbt` and `inspect name` to see that it's provided by `{file:/home/hp/checkout/hello/}default-aea33a/*` that is, the project is `{file:/home/hp/checkout/hello/}default-aea33a,`

the configuration is `*` (means `Global`), and the task is not shown (which also means `Global`).

A bare key on the right hand side is also scoped to (current subproject, configuration `Global`, task `Global`):

```
organization := name.value
```

Keys have an overloaded method called `.in` that is used to set the scope. The argument to `.in(...)` can be an instance of any of the scope axes. So for example, though there's no real reason to do this, you could set the `name` scoped to the `Compile` configuration:

```
name in Compile := "hello"
```

or you could set the `name` scoped to the `packageBin` task (pointless! just an example):

```
name in packageBin := "hello"
```

or you could set the `name` with multiple scope axes, for example in the `packageBin` task in the `Compile` configuration:

```
name in (Compile, packageBin) := "hello"
```

or you could use `Global` for all axes:

```
// same as concurrentRestrictions in (Global, Global, Global)
concurrentRestrictions in Global := Seq(
  Tags.limitAll(1)
)
```

(`concurrentRestrictions in Global` implicitly converts to `concurrentRestrictions in (Global, Global, Global)`, setting all axes to `Global` scope component; the task and configuration are already `Global` by default, so here the effect is to make the project `Global`, that is, define `*/*:concurrentRestrictions` rather than `{file:/home/hp/checkout/hello/}default-aea33a/*:concurrentRestrictions`)

## Referring to scoped keys from the sbt shell

On the command line and in the sbt shell, sbt displays (and parses) scoped keys like this:

`{<build-uri>}<project-id>/config:intask::key`

- `{<build-uri>}<project-id>` identifies the subproject axis. The `<project-id>` part will be missing if the subproject axis has “entire build” scope.
- `config` identifies the configuration axis.
- `intask` identifies the task axis.
- `key` identifies the key being scoped.

\* can appear for each axis, referring to the **Global** scope.

If you omit part of the scoped key, it will be inferred as follows:

- the current project will be used if you omit the project.
- a key-dependent configuration will be auto-detected if you omit the configuration or task.

For more details, see [Interacting with the Configuration System](#).

### Examples of scoped key notation

- `fullClasspath` specifies just a key, so the default scopes are used: current project, a key-dependent configuration, and global task scope.
- `test:fullClasspath` specifies the configuration, so this is `fullClasspath` in the `test` configuration, with defaults for the other two scope axes.
- `*:fullClasspath` specifies **Global** for the configuration, rather than the default configuration.
- `doc::fullClasspath` specifies the `fullClasspath` key scoped to the `doc` task, with the defaults for the project and configuration axes.
- `{file:/home/hp/checkout/hello/}default-aea33a/test:fullClasspath` specifies a project, `{file:/home/hp/checkout/hello/}default-aea33a`, where the project is identified with the build `{file:/home/hp/checkout/hello/}` and then a project id inside that build `default-aea33a`. Also specifies configuration `test`, but leaves the default task axis.
- `{file:/home/hp/checkout/hello/}/test:fullClasspath` sets the project axis to “entire build” where the build is `{file:/home/hp/checkout/hello/}`.
- `{.}/test:fullClasspath` sets the project axis to “entire build” where the build is `{.}`. `{.}` can be written `ThisBuild` in Scala code.
- `{file:/home/hp/checkout/hello/}/compile:doc::fullClasspath` sets all three scope axes.

## Inspecting scopes

In sbt shell, you can use the `inspect` command to understand keys and their scopes. Try `inspect test:fullClasspath`:

```
$ sbt
> inspect test:fullClasspath
[info] Task: scala.collection.Seq[sbt.Attributed[java.io.File]]
[info] Description:
[info] The exported classpath, consisting of build products and unmanaged and managed, internal
[info] Provided by:
[info] {file:/home/hp/checkout/hello/}default-aea33a/test:fullClasspath
[info] Dependencies:
[info]   test:exportedProducts
[info]   test:dependencyClasspath
[info] Reverse dependencies:
[info]   test:runMain
[info]   test:run
[info]   test:testLoader
[info]   test:console
[info] Delegates:
[info]   test:fullClasspath
[info]   runtime:fullClasspath
[info]   compile:fullClasspath
[info]   *:fullClasspath
[info]   {.}/test:fullClasspath
[info]   {.}/runtime:fullClasspath
[info]   {.}/compile:fullClasspath
[info]   {.}/*:fullClasspath
[info]   */test:fullClasspath
[info]   */runtime:fullClasspath
[info]   */compile:fullClasspath
[info]   */*:fullClasspath
[info] Related:
[info]   compile:fullClasspath
[info]   compile:fullClasspath(for doc)
[info]   test:fullClasspath(for doc)
[info]   runtime:fullClasspath
```

On the first line, you can see this is a task (as opposed to a setting, as explained in [.sbt build definition](#)). The value resulting from the task will have type `scala.collection.Seq[sbt.Attributed[java.io.File]]`.

“Provided by” points you to the scoped key that defines the value, in this case `{file:/home/hp/checkout/hello/}default-aea33a/test:fullClasspath`

(which is the `fullClasspath` key scoped to the `test` configuration and the `{file:/home/hp/checkout/hello/}default-aea33a` project).

“Dependencies” was discussed in detail in the [previous page](#).

We’ll discuss “Delegates” later.

Try `inspect fullClasspath` (as opposed to the above example, `inspect test:fullClasspath`) to get a sense of the difference. Because the configuration is omitted, it is autodetected as `compile`. `inspect compile:fullClasspath` should therefore look the same as `inspect fullClasspath`.

Try `inspect *:fullClasspath` for another contrast. `fullClasspath` is not defined in the `Global` scope by default.

Again, for more details, see [Interacting with the Configuration System](#).

## When to specify a scope

You need to specify the scope if the key in question is normally scoped. For example, the `compile` task, by default, is scoped to `Compile` and `Test` configurations, and does not exist outside of those scopes.

To change the value associated with the `compile` key, you need to write `compile in Compile` or `compile in Test`. Using plain `compile` would define a new `compile` task scoped to the current project, rather than overriding the standard `compile` tasks which are scoped to a configuration.

If you get an error like “*Reference to undefined setting*”, often you’ve failed to specify a scope, or you’ve specified the wrong scope. The key you’re using may be defined in some other scope. sbt will try to suggest what you meant as part of the error message; look for “Did you mean `compile:compile`?”

One way to think of it is that a name is only *part* of a key. In reality, all keys consist of both a name, and a scope (where the scope has three axes). The entire expression `packageOptions in (Compile, packageBin)` is a key name, in other words. Simply `packageOptions` is also a key name, but a different one (for keys with no `in`, a scope is implicitly assumed: current project, global config, global task).

## Build-level settings

An advanced technique for factoring out common settings across subprojects is to define the settings scoped to `ThisBuild`.

If a key that is scoped to a particular subproject is not found, sbt will look for it in `ThisBuild` as a fallback. Using the mechanism, we can define a build-level default setting for frequently used keys such as `version`, `scalaVersion`, and `organization`.

For convenience, there is `inThisBuild(...)` function that will scope both the key and the body of the setting expression to `ThisBuild`. Putting setting expressions in there would be equivalent to appending in `ThisBuild` where possible.

```
lazy val root = (project in file("."))
  .settings(
    inThisBuild(List(
      // Same as:
      // organization in ThisBuild := "com.example"
      organization := "com.example",
      scalaVersion := "2.12.2",
      version      := "0.1.0-SNAPSHOT"
    )),
    name := "Hello",
    publish := (),
    publishLocal := ()
  )

lazy val core = (project in file("core"))
  .settings(
    // other settings
  )

lazy val util = (project in file("util"))
  .settings(
    // other settings
  )
```

Due to the nature of [scope delegation](#) that we will cover later, we do not recommend using build-level settings beyond simple value assignments.

## Scope delegation

A scoped key may be undefined, if it has no value associated with it in its scope.

For each scope axis, sbt has a fallback search path made up of other scope values. Typically, if a key has no associated value in a more-specific scope, sbt will try to get a value from a more general scope, such as the `ThisBuild` scope.

This feature allows you to set a value once in a more general scope, allowing multiple more-specific scopes to inherit the value. We will discuss [scope delegation](#) in detail later.



## Appending values

### Appending to previous values: += and ++=

Assignment with `:=` is the simplest transformation, but keys have other methods as well. If the `T` in `SettingKey[T]` is a sequence, i.e. the key's value type is a sequence, you can append to the sequence rather than replacing it.

- `+=` will append a single element to the sequence.
- `++=` will concatenate another sequence.

For example, the key `sourceDirectories` in `Compile` has a `Seq[File]` as its value. By default this key's value would include `src/main/scala`. If you wanted to also compile source code in a directory called `source` (since you just have to be nonstandard), you could add that directory:

```
sourceDirectories in Compile += new File("source")
```

Or, using the `file()` function from the `sbt` package for convenience:

```
sourceDirectories in Compile += file("source")
```

(`file()` just creates a new `File`.)

You could use `++=` to add more than one directory at a time:

```
sourceDirectories in Compile ++= Seq(file("sources1"), file("sources2"))
```

Where `Seq(a, b, c, ...)` is standard Scala syntax to construct a sequence.

To replace the default source directories entirely, you use `:=` of course:

```
sourceDirectories in Compile := Seq(file("sources1"), file("sources2"))
```

**When settings are undefined** Whenever a setting uses `:=`, `+=`, or `++=` to create a dependency on itself or another key's value, the value it depends on must exist. If it does not, sbt will complain. It might say *“Reference to undefined setting”*, for example. When this happens, be sure you're using the key in the [scope](#) that defines it.

It's possible to create cycles, which is an error; sbt will tell you if you do this.

**Tasks based on other keys' values** You can compute values of some tasks or settings to define or append a value for another task. It's done by using `Def.task` and `taskValue` as an argument to `:=`, `+=`, or `++=`.

As a first example, consider appending a source generator using the project base directory and compilation classpath.

```
sourceGenerators in Compile += Def.task {  
  myGenerator(baseDirectory.value, (managedClasspath in Compile).value)  
}.taskValue
```

### Appending with dependencies: `+=` and `++=`

Other keys can be used when appending to an existing setting or task, just like they can for assigning with `:=`.

For example, say you have a coverage report named after the project, and you want to add it to the files removed by clean:

```
cleanFiles += file("coverage-report-" + name.value + ".txt")
```

### Scope delegation (`.value` lookup)

This page describes scope delegation. It assumes you've read and understood the previous pages, [build definition](#) and [scopes](#).

Now that we've covered all the details of scoping, we can explain the `.value` lookup in detail. It's ok to skip this section if this is your first time reading this page.

Because the term `Global` is used for both a scope component `*`, and as shorthand for the scope (`Global`, `Global`, `Global`), in this page we will use the symbol `*` when we mean it as the scope component.

To summarize what we've learned so far:

- A scope is a tuple of components in three axes: the subproject axis, the configuration axis, and the task axis.
- There's a special scope component `*` (also called `Global`) for any of the scope axes.
- There's a special scope component `ThisBuild` (written as `{.}` in shell) for **the subprojects axis** only.
- `Test` extends `Runtime`, and `Runtime` extends `Compile` configuration.
- A key placed in `build.sbt` is scoped to `(${current subproject}, *, *)` by default.

- A key can be further scoped using `.in(...)` method.

Now let's suppose we have the following build definition:

```
lazy val foo = settingKey[Int]("")
lazy val bar = settingKey[Int]("")

lazy val projX = (project in file("x"))
  .settings(
    foo := {
      (bar in Test).value + 1
    },
    bar in Compile := 1
  )
```

Inside of `foo`'s setting body a dependency on the scoped key `(bar in Test)` is declared. However, despite `bar in Test` being undefined in `projX`, sbt is still able to resolve `(bar in Test)` to another scoped key, resulting in `foo` initialized as 2.

sbt has a well-defined fallback search path called *scope delegation*. This feature allows you to set a value once in a more general scope, allowing multiple more-specific scopes to inherit the value.

## Scope delegation rules

Here are the rules for scope delegation:

- Rule 1: Scope axes have the following precedence: the subproject axis, the configuration axis, and then the task axis.
- Rule 2: Given a scope, delegate scopes are searched by substituting the task axis in the following order: the given task scoping, and then `*` (`Global`), which is non-task scoped version of the scope.
- Rule 3: Given a scope, delegate scopes are searched by substituting the configuration axis in the following order: the given configuration, its parents, their parents and so on, and then `*` (`Global`, same as unscoped configuration axis).
- Rule 4: Given a scope, delegate scopes are searched by substituting the subproject axis in the following order: the given subproject, `ThisBuild`, and then `*` (`Global`).
- Rule 5: A delegated scoped key and its dependent settings/tasks are evaluated without carrying the original context.

We will look at each rule in the rest of this page.

### Rule 1: Scope axis precedence

- Rule 1: Scope axes have the following precedence: the subproject axis, the configuration axis, and then the task axis.

In other words, given two scopes candidates, if one has more specific value on the subproject axis, it will always win regardless of the configuration or the task scoping. Similarly, if subprojects are the same, one with more specific configuration value will always win regardless of the task scoping. We will see more rules to define *more specific*.

### Rule 2: The task axis delegation

- Rule 2: Given a scope, delegate scopes are searched by **substituting** the task axis in the following order: the given task scoping, and then **\*** (**Global**), which is non-task scoped version of the scope.

Here we have a concrete rule for how sbt will generate delegate scopes given a key. Remember, we are trying to show the search path given an arbitrary `(xxx in yyy).value`.

**Exercise A:** Given the following build definition:

```
lazy val projA = (project in file("a"))
  .settings(
    name := {
      "foo-" + (scalaVersion in packageBin).value
    },
    scalaVersion := "2.11.11"
  )
```

What is the value of `name` in `projA` (`projA/name` in sbt shell)?

1. "foo-2.11.11"
2. "foo-2.12.2"
3. something else?

The answer is "foo-2.11.11". Inside of `.settings(...)`, `scalaVersion` is automatically scoped to `(projA, *, *)`, so `scalaVersion in packageBin` becomes `scalaVersion in (projA, *, packageBin)`. That particular scoped key is undefined. By using Rule 2, sbt will substitute the task axis to `*` as `(projA, *, *)` (or `proj/scalaVersion` in shell). That scoped key is defined to be "2.11.11".

### Rule 3: The configuration axis search path

- Rule 3: Given a scope, delegate scopes are searched by substituting the configuration axis in the following order: the given configuration, its parents, their parents and so on, and then \* (Global, same as unscoped configuration axis).

The example for that is `projX` that we saw earlier:

```
lazy val foo = settingKey[Int]("")
lazy val bar = settingKey[Int]("")

lazy val projX = (project in file("x"))
  .settings(
    foo := {
      (bar in Test).value + 1
    },
    bar in Compile := 1
  )
```

If we write out the full scope again, it's `(projX, Test, *)`. Also recall that `Test` extends `Runtime`, and `Runtime` extends `Compile`.

`(bar in Test)` is undefined, but due to Rule 3 sbt will look for `bar` scoped in `(projX, Test, *)`, `(projX, Runtime, *)`, and then `(projX, Compile, *)`. The last one is found, which is `bar in Compile`.

### Rule 4: The subproject axis search path

- Rule 4: Given a scope, delegate scopes are searched by substituting the subproject axis in the following order: the given subproject, `ThisBuild`, and then \* (Global).

**Exercise B:** Given the following build definition:

```
organization in ThisBuild := "com.example"

lazy val projB = (project in file("b"))
  .settings(
    name := "abc-" + organization.value,
    organization := "org.tempuri"
  )
```

What is the value of `name` in `projB` (`projB/name` in shell)?

1. "abc-com.example"
2. "abc-org.tempuri"
3. something else?

The answer is `abc-org.tempuri`. So based on Rule 4, the first search path is `organization` scoped to `(projB, *, *)`, which is defined in `projB` as `"org.tempuri"`. This has higher precedence than the build-level setting `organization` in `ThisBuild`.

**Scope axis precedence, again** Exercise C: Given the following build definition:

```
scalaVersion in (ThisBuild, packageBin) := "2.12.2"

lazy val projC = (project in file("c"))
  .settings(
    name := {
      "foo-" + (scalaVersion in packageBin).value
    },
    scalaVersion := "2.11.11"
  )
```

What is value of `name` in `projC`?

1. "foo-2.12.2"
2. "foo-2.11.11"
3. something else?

The answer is `foo-2.11.11`. `scalaVersion` scoped to `(projC, *, packageBin)` is undefined. Rule 2 finds `(projC, *, *)`. Rule 4 finds `(ThisBuild, *, packageBin)`. In this case Rule 1 dictates that more specific value on the subproject axis wins, which is `(projC, *, *)` that is defined to `"2.11.11"`.

**Exercise D:** Given the following build definition:

```
scalacOptions in ThisBuild += "-Ywarn-unused-import"

lazy val projD = (project in file("d"))
  .settings(
    test := {
      println((scalacOptions in (Compile, console)).value)
    },
    scalacOptions in console -= "-Ywarn-unused-import",
    scalacOptions in Compile := scalacOptions.value // added by sbt
  )
```

What would you see if you ran `projD/test`?

1. `List()`
2. `List(-Ywarn-unused-import)`
3. something else?

The answer is `List(-Ywarn-unused-import)`. Rule 2 finds `(projD, Compile, *)`, Rule 3 finds `(projD, *, console)`, and Rule 4 finds `(ThisBuild, *, *)`. Rule 1 selects `(projD, Compile, *)` because it has the subproject axis `projD`, and the configuration axis has higher precedence over the task axis.

Next, `scalacOptions` in `Compile` refers to `scalacOptions.value`, we next need to find a delegate for `(projD, *, *)`. Rule 4 finds `(ThisBuild, *, *)` and thus it resolves to `List(-Ywarn-unused-import)`.

### Inspect command lists the delegates

You might want to look up quickly what is going on. This is where `inspect` can be used.

```
Hello> inspect projD/compile:console::scalacOptions
[info] Task: scala.collection.Seq[java.lang.String]
[info] Description:
[info]   Options for the Scala compiler.
[info] Provided by:
[info]   {file:/Users/xxxx/}projD/compile:scalacOptions
[info] Defined at:
[info]   /Users/xxxx/build.sbt:47
[info] Reverse dependencies:
[info]   projD/compile:console
[info]   projD/*:test
[info] Delegates:
[info]   projD/compile:console::scalacOptions
[info]   projD/compile:scalacOptions
[info]   projD/*:console::scalacOptions
[info]   projD/*:scalacOptions
[info]   {.}/compile:console::scalacOptions
[info]   {.}/compile:scalacOptions
[info]   {.}/*:console::scalacOptions
[info]   {.}/*:scalacOptions
[info]   */compile:console::scalacOptions
[info]   */compile:scalacOptions
[info]   */*:console::scalacOptions
[info]   */*:scalacOptions
....
```

Note how “Provided by” shows that `projD/compile:console::scalacOptions` is provided by `projD/compile:scalacOptions`. Also under “Delegates”, *all* of the possible delegate candidates listed in the order of precedence!

- All the scopes with `projD` scoping on the subproject axis are listed first, then `ThisBuild ({.})`, and `*`.
- Within a subproject, scopes with `Compile` scoping on the configuration axis are listed first, then falls back to `*`.
- Finally, the task axis scoping lists the given task scoping `console::` and the one without.

### .value lookup vs dynamic dispatch

- Rule 5: A delegated scoped key and its dependent settings/tasks are evaluated without carrying the original context.

Note that scope delegation feels similar to class inheritance in an object-oriented language, but there’s a difference. In an OO language like Scala if there’s a method named `drawShape` on a trait `Shape`, its subclasses can override the behavior even when `drawShape` is used by other methods in the `Shape` trait, which is called dynamic dispatch.

In sbt, however, scope delegation can delegate a scope to a more general scope, like a project-level setting to a build-level settings, but that build-level setting cannot refer to the project-level setting.

**Exercise E:** Given the following build definition:

```
lazy val root = (project in file("."))
  .settings(
    inThisBuild(List(
      organization := "com.example",
      scalaVersion := "2.12.2",
      version      := scalaVersion.value + "_0.1.0"
    )),
    name := "Hello"
  )

lazy val projE = (project in file("e"))
  .settings(
    scalaVersion := "2.11.11"
  )
```

What will `projE/version` return?



1. "2.12.2\_0.1.0"
2. "2.11.11\_0.1.0"
3. something else?

The answer is 2.12.2\_0.1.0. `projD/version` delegates to `version` in `ThisBuild`, which depends on `scalaVersion` in `ThisBuild`. Because of this reason, build level setting should be limited mostly to simple value assignments.

**Exercise F:** Given the following build definition:

```
scalacOptions in ThisBuild += "-D0"
scalacOptions += "-D1"

lazy val projF = (project in file("f"))
  .settings(
    scalacOptions in compile += "-D2",
    scalacOptions in Compile += "-D3",
    scalacOptions in (Compile, compile) += "-D4",
    test := {
      println("bippy" + (scalacOptions in (Compile, compile)).value.mkString)
    }
  )
```

What will `projF/test` show?

1. "bippy-D4"
2. "bippy-D2-D4"
3. "bippy-D0-D3-D4"
4. something else?

The answer is "bippy-D0-D3-D4". This is a variation of an exercise originally created by [Paul Phillips](#).

It's a great demonstration of all the rules because `someKey += "x"` expands to

```
someKey += {
  val old = someKey.value
  old :+ "x"
}
```

Retrieving the old value would cause delegation, and due to Rule 5, it will go to another scoped key. Let's get rid of `+=` first, and annotate the delegates for old values:

```

scalacOptions in ThisBuild := {
  // scalacOptions in Global <- Rule 4
  val old = (scalacOptions in ThisBuild).value
  old :+ "-D0"
}

scalacOptions := {
  // scalacOptions in ThisBuild <- Rule 4
  val old = scalacOptions.value
  old :+ "-D1"
}

lazy val projF = (project in file("f"))
  .settings(
    scalacOptions in compile := {
      // scalacOptions in ThisBuild <- Rules 2 and 4
      val old = (scalacOptions in compile).value
      old :+ "-D2"
    },
    scalacOptions in Compile := {
      // scalacOptions in ThisBuild <- Rules 3 and 4
      val old = (scalacOptions in Compile).value
      old :+ "-D3"
    },
    scalacOptions in (Compile, compile) := {
      // scalacOptions in (projF, Compile) <- Rules 1 and 2
      val old = (scalacOptions in (Compile, compile)).value
      old :+ "-D4"
    },
    test := {
      println("bippy" + (scalacOptions in (Compile, compile)).value.mkString)
    }
  )

```

This becomes:

```

scalacOptions in ThisBuild := {
  Nil :+ "-D0"
}

scalacOptions := {
  List("-D0") :+ "-D1"
}

lazy val projF = (project in file("f"))

```

```

.settings(
  scalacOptions in compile := List("-D0") :+ "-D2",
  scalacOptions in Compile := List("-D0") :+ "-D3",
  scalacOptions in (Compile, compile) := List("-D0", "-D3") :+ "-D4",
  test := {
    println("bippy" + (scalacOptions in (Compile, compile)).value.mkString)
  }
)

```

## Library dependencies

This page assumes you've already read the earlier [Getting Started](#) pages, in particular [build definition](#), [scopes](#), and [task graph](#).

Library dependencies can be added in two ways:

- *unmanaged dependencies* are jars dropped into the `lib` directory
- *managed dependencies* are configured in the build definition and downloaded automatically from repositories

### Unmanaged dependencies

Most people use managed dependencies instead of unmanaged. But unmanaged can be simpler when starting out.

Unmanaged dependencies work like this: add jars to `lib` and they will be placed on the project classpath. Not much else to it!

You can place test jars such as [ScalaCheck](#), [Specs2](#), and [ScalaTest](#) in `lib` as well.

Dependencies in `lib` go on all the classpaths (for `compile`, `test`, `run`, and `console`). If you wanted to change the classpath for just one of those, you would adjust `dependencyClasspath` in `Compile` or `dependencyClasspath` in `Runtime` for example.

There's nothing to add to `build.sbt` to use unmanaged dependencies, though you could change the `unmanagedBase` key if you'd like to use a different directory rather than `lib`.

To use `custom_lib` instead of `lib`:

```
unmanagedBase := baseDirectory.value / "custom_lib"
```

`baseDirectory` is the project's root directory, so here you're changing `unmanagedBase` depending on `baseDirectory` using the special `value` method as explained in [task graph](#).

There's also an `unmanagedJars` task which lists the jars from the `unmanagedBase` directory. If you wanted to use multiple directories or do something else complex, you might need to replace the whole `unmanagedJars` task with one that does something else, e.g. empty the list for `Compile` configuration regardless of the files in `lib` directory:

```
unmanagedJars in Compile := Seq.empty[sbt.Attributed[java.io.File]]
```

## Managed Dependencies

sbt uses [Apache Ivy](#) to implement managed dependencies, so if you're familiar with Ivy or Maven, you won't have much trouble.

**The `libraryDependencies` key** Most of the time, you can simply list your dependencies in the setting `libraryDependencies`. It's also possible to write a Maven POM file or Ivy configuration file to externally configure your dependencies, and have sbt use those external configuration files. You can learn more about that [here](#).

Declaring a dependency looks like this, where `groupId`, `artifactId`, and `revision` are strings:

```
libraryDependencies += groupId % artifactID % revision
```

or like this, where `configuration` can be a string or [Configuration](#) val:

```
libraryDependencies += groupId % artifactID % revision % configuration
```

`libraryDependencies` is declared in [Keys](#) like this:

```
val libraryDependencies = settingKey[Seq[ModuleID]]("Declares managed dependencies.")
```

The `%` methods create `ModuleID` objects from strings, then you add those `ModuleID` to `libraryDependencies`.

Of course, sbt (via Ivy) has to know where to download the module. If your module is in one of the default repositories sbt comes with, this will just work. For example, Apache Derby is in the standard Maven2 repository:

```
libraryDependencies += "org.apache.derby" % "derby" % "10.4.1.3"
```

If you type that in `build.sbt` and then `update`, sbt should download Derby to `~/.ivy2/cache/org.apache.derby/`. (By the way, `update` is a dependency of `compile` so there's no need to manually type `update` most of the time.)

Of course, you can also use `++=` to add a list of dependencies all at once:

```
libraryDependencies += Seq(
  groupId % artifactID % revision,
  groupId % otherID % otherRevision
)
```

In rare cases you might find reasons to use `:=` with `libraryDependencies` as well.

**Getting the right Scala version with %%** If you use `groupId %% artifactID % revision` rather than `groupId % artifactID % revision` (the difference is the double `%%` after the `groupId`), sbt will add your project's Scala version to the artifact name. This is just a shortcut. You could write this without the `%%`:

```
libraryDependencies += "org.scala-tools" % "scala-stm_2.11.1" % "0.3"
```

Assuming the `scalaVersion` for your build is `2.11.1`, the following is identical (note the double `%%` after `"org.scala-tools"`):

```
libraryDependencies += "org.scala-tools" %% "scala-stm" % "0.3"
```

The idea is that many dependencies are compiled for multiple Scala versions, and you'd like to get the one that matches your project to ensure binary compatibility.

The complexity in practice is that often a dependency will work with a slightly different Scala version; but `%%` is not smart about that. So if the dependency is available for `2.10.1` but you're using `scalaVersion := "2.10.4"`, you won't be able to use `%%` even though the `2.10.1` dependency likely works. If `%%` stops working, just go see which versions the dependency is really built for, and hardcode the one you think will work (assuming there is one).

See [Cross Building](#) for some more detail on this.

**Ivy revisions** The revision in `groupId % artifactID % revision` does not have to be a single fixed version. Ivy can select the latest revision of a module according to constraints you specify. Instead of a fixed revision like `"1.6.1"`, you specify `"latest.integration"`, `"2.9.+"`, or `"[1.0,)"`. See the [Ivy revisions](#) documentation for details.

**Resolvers** Not all packages live on the same server; sbt uses the standard Maven2 repository by default. If your dependency isn't on one of the default repositories, you'll have to add a *resolver* to help Ivy find it.

To add an additional repository, use

```
resolvers += name at location
```

with the special `at` between two strings.

For example:

```
resolvers += "Sonatype OSS Snapshots" at "https://oss.sonatype.org/content/repositories/snapshots"
```

The `resolvers` key is defined in [Keys](#) like this:

```
val resolvers = settingKey[Seq[Resolver]]("The user-defined additional resolvers for automation")
```

The `at` method creates a `Resolver` object from two strings.

sbt can search your local Maven repository if you add it as a repository:

```
resolvers += "Local Maven Repository" at "file://" + Path.userHome.absolutePath + "/.m2/repository"
```

or, for convenience:

```
resolvers += Resolver.mavenLocal
```

See [Resolvers](#) for details on defining other types of repositories.

**Overriding default resolvers** `resolvers` does not contain the default resolvers; only additional ones added by your build definition.

sbt combines `resolvers` with some default repositories to form `externalResolvers`.

Therefore, to change or remove the default resolvers, you would need to override `externalResolvers` instead of `resolvers`.

**Per-configuration dependencies** Often a dependency is used by your test code (in `src/test/scala`, which is compiled by the `Test` configuration) but not your main code.

If you want a dependency to show up in the classpath only for the `Test` configuration and not the `Compile` configuration, add `% "test"` like this:

```
libraryDependencies += "org.apache.derby" % "derby" % "10.4.1.3" % "test"
```

You may also use the type-safe version of `Test` configuration as follows:

```
libraryDependencies += "org.apache.derby" % "derby" % "10.4.1.3" % Test
```

Now, if you type `show compile:dependencyClasspath` at the sbt interactive prompt, you should not see the derby jar. But if you type `show test:dependencyClasspath`, you should see the derby jar in the list.

Typically, test-related dependencies such as [ScalaCheck](#), [Specs2](#), and [ScalaTest](#) would be defined with `% "test"`.

There are more details and tips-and-tricks related to library dependencies on [this page](#).

## Multi-project builds

This page introduces multiple subprojects in a single build.

Please read the earlier pages in the Getting Started Guide first, in particular you need to understand [build.sbt](#) before reading this page.

### Multiple subprojects

It can be useful to keep multiple related subprojects in a single build, especially if they depend on one another and you tend to modify them together.

Each subproject in a build has its own source directories, generates its own jar file when you run `package`, and in general works like any other project.

A project is defined by declaring a lazy val of type [Project](#). For example, :

```
lazy val util = (project in file("util"))
```

```
lazy val core = (project in file("core"))
```

The name of the val is used as the subproject's ID, which is used to refer to the subproject at the sbt shell.

Optionally the base directory may be omitted if it's the same as the name of the val.

```
lazy val util = project
```

```
lazy val core = project
```

**Common settings** To factor out common settings across multiple projects, create a sequence named `commonSettings` and call `settings` method on each project.

```

lazy val commonSettings = Seq(
  organization := "com.example",
  version := "0.1.0-SNAPSHOT",
  scalaVersion := "2.12.2"
)

lazy val core = (project in file("core"))
  .settings(
    commonSettings,
    // other settings
  )

lazy val util = (project in file("util"))
  .settings(
    commonSettings,
    // other settings
  )

```

Now we can bump up **version** in one place, and it will be reflected across subprojects when you reload the build.

**Build-wide settings** Another a bit advanced technique for factoring out common settings across subprojects is to define the settings scoped to **ThisBuild**. (See [Scopes](#))

## Dependencies

Projects in the build can be completely independent of one another, but usually they will be related to one another by some kind of dependency. There are two types of dependencies: aggregate and classpath.

**Aggregation** Aggregation means that running a task on the aggregate project will also run it on the aggregated projects. For example,

```

lazy val root = (project in file("."))
  .aggregate(util, core)

lazy val util = (project in file("util"))

lazy val core = (project in file("core"))

```

In the above example, the root project aggregates **util** and **core**. Start up sbt with two subprojects as in the example, and try compile. You should see that all three projects are compiled.



*In the project doing the aggregating*, the root project in this case, you can control aggregation per-task. For example, to avoid aggregating the `update` task:

```
lazy val root = (project in file("."))
  .aggregate(util, core)
  .settings(
    aggregate in update := false
  )
```

[...]

`aggregate in update` is the aggregate key scoped to the `update` task. (See [scopes](#).)

Note: aggregation will run the aggregated tasks in parallel and with no defined ordering between them.

**Classpath dependencies** A project may depend on code in another project. This is done by adding a `dependsOn` method call. For example, if `core` needed `util` on its classpath, you would define `core` as:

```
lazy val core = project.dependsOn(util)
```

Now code in `core` can use classes from `util`. This also creates an ordering between the projects when compiling them; `util` must be updated and compiled before `core` can be compiled.

To depend on multiple projects, use multiple arguments to `dependsOn`, like `dependsOn(bar, baz)`.

**Per-configuration classpath dependencies** `foo dependsOn(bar)` means that the `compile` configuration in `foo` depends on the `compile` configuration in `bar`. You could write this explicitly as `dependsOn(bar % "compile->compile")`.

The `->` in `"compile->compile"` means “depends on” so `"test->compile"` means the `test` configuration in `foo` would depend on the `compile` configuration in `bar`.

Omitting the `->config` part implies `->compile`, so `dependsOn(bar % "test")` means that the `test` configuration in `foo` depends on the `Compile` configuration in `bar`.

A useful declaration is `"test->test"` which means `test` depends on `test`. This allows you to put utility code for testing in `bar/src/test/scala` and then use that code in `foo/src/test/scala`, for example.

You can have multiple configurations for a dependency, separated by semicolons. For example, `dependsOn(bar % "test->test;compile->compile")`.

## Default root project

If a project is not defined for the root directory in the build, sbt creates a default one that aggregates all other projects in the build.

Because project `hello-foo` is defined with `base = file("foo")`, it will be contained in the subdirectory `foo`. Its sources could be directly under `foo`, like `foo/Foo.scala`, or in `foo/src/main/scala`. The usual sbt [directory structure](#) applies underneath `foo` with the exception of build definition files.

Any `.sbt` files in `foo`, say `foo/build.sbt`, will be merged with the build definition for the entire build, but scoped to the `hello-foo` project.

If your whole project is in `hello`, try defining a different version (`version := "0.6"`) in `hello/build.sbt`, `hello/foo/build.sbt`, and `hello/bar/build.sbt`. Now `show version` at the sbt interactive prompt. You should get something like this (with whatever versions you defined):

```
> show version
[info] hello-foo/*:version
[info] 0.7
[info] hello-bar/*:version
[info] 0.9
[info] hello/*:version
[info] 0.5
```

`hello-foo/*:version` was defined in `hello/foo/build.sbt`, `hello-bar/*:version` was defined in `hello/bar/build.sbt`, and `hello/*:version` was defined in `hello/build.sbt`. Remember the [syntax for scoped keys](#). Each `version` key is scoped to a project, based on the location of the `build.sbt`. But all three `build.sbt` are part of the same build definition.

*Each project's settings can go in .sbt files in the base directory of that project, while the .scala file can be as simple as the one shown above, listing the projects and base directories. There is no need to put settings in the .scala file.*

You may find it cleaner to put everything including settings in `.scala` files in order to keep all build definition under a single project directory, however. It's up to you.

You cannot have a project subdirectory or `project/*.scala` files in the sub-projects. `foo/project/Build.scala` would be ignored.

## Navigating projects interactively

At the sbt interactive prompt, type `projects` to list your projects and `project <projectname>` to select a current project. When you run a task like `compile`,

it runs on the current project. So you don't necessarily have to compile the root project, you could compile only a subproject.

You can run a task in another project by explicitly specifying the project ID, such as `subProjectID/compile`.

## Common code

The definitions in `.sbt` files are not visible in other `.sbt` files. In order to share code between `.sbt` files, define one or more Scala files in the `project/` directory of the build root.

See [organizing the build](#) for details.

## Using plugins

Please read the earlier pages in the Getting Started Guide first, in particular you need to understand [build.sbt](#), [task graph](#), [library dependencies](#), before reading this page.

### What is a plugin?

A plugin extends the build definition, most commonly by adding new settings. The new settings could be new tasks. For example, a plugin could add a `codeCoverage` task which would generate a test coverage report.

### Declaring a plugin

If your project is in directory `hello`, and you're adding sbt-site plugin to the build definition, create `hello/project/site.sbt` and declare the plugin dependency by passing the plugin's Ivy module ID to `addSbtPlugin`:

```
addSbtPlugin("com.typesafe.sbt" % "sbt-site" % "0.7.0")
```

If you're adding sbt-assembly, create `hello/project/assembly.sbt` with the following:

```
addSbtPlugin("com.eed3si9n" % "sbt-assembly" % "0.11.2")
```

Not every plugin is located on one of the default repositories and a plugin's documentation may instruct you to also add the repository where it can be found:

```
resolvers += Resolver.sonatypeRepo("public")
```

Plugins usually provide settings that get added to a project to enable the plugin's functionality. This is described in the next section.

## Enabling and disabling auto plugins

A plugin can declare that its settings be automatically added to the build definition, in which case you don't have to do anything to add them.

As of sbt 0.13.5, there is a new [auto plugins](#) feature that enables plugins to automatically, and safely, ensure their settings and dependencies are on a project. Many auto plugins should have their default settings automatically, however some may require explicit enablement.

If you're using an auto plugin that requires explicit enablement, then you have to add the following to your `build.sbt`:

```
lazy val util = (project in file("util"))
  .enablePlugins(FooPlugin, BarPlugin)
  .settings(
    name := "hello-util"
  )
```

The `enablePlugins` method allows projects to explicitly define the auto plugins they wish to consume.

Projects can also exclude plugins using the `disablePlugins` method. For example, if we wish to remove the `IvyPlugin` settings from `util`, we modify our `build.sbt` as follows:

```
lazy val util = (project in file("util"))
  .enablePlugins(FooPlugin, BarPlugin)
  .disablePlugins(plugins.IvyPlugin)
  .settings(
    name := "hello-util"
  )
```

Auto plugins should document whether they need to be explicitly enabled. If you're curious which auto plugins are enabled for a given project, just run the `plugins` command on the sbt console.

For example:

```
> plugins
In file:/home/jsuereth/projects/sbt/test-ivy-issues/
  sbt.plugins.IvyPlugin: enabled in scala-sbt-org
  sbt.plugins.JvmPlugin: enabled in scala-sbt-org
  sbt.plugins.CorePlugin: enabled in scala-sbt-org
  sbt.plugins.JUnitXmlReportPlugin: enabled in scala-sbt-org
```

Here, the `plugins` output is showing that the sbt default plugins are all enabled. sbt's default settings are provided via three plugins:

1. `CorePlugin`: Provides the core parallelism controls for tasks.
2. `IvyPlugin`: Provides the mechanisms to publish/resolve modules.
3. `JvmPlugin`: Provides the mechanisms to compile/test/run/package Java/Scala projects.

In addition, `JUnitXmlReportPlugin` provides an experimental support for generating junit-xml.

Older non-auto plugins often require settings to be added explicitly, so that [multi-project build](#) could have different types of projects. The plugin documentation will indicate how to configure it, but typically for older plugins this involves adding the base settings for the plugin and customizing as necessary.

For example, for the sbt-site plugin, create `site.sbt` with the following content

```
site.settings
```

to enable it for that project.

If the build defines multiple projects, instead add it directly to the project:

```
// don't use the site plugin for the `util` project
lazy val util = (project in file("util"))

// enable the site plugin for the `core` project
lazy val core = (project in file("core"))
  .settings(site.settings)
```

## Global plugins

Plugins can be installed for all your projects at once by declaring them in `~/.sbt/1.0/plugins/`. `~/.sbt/1.0/plugins/` is an sbt project whose classpath is exported to all sbt build definition projects. Roughly speaking, any `.sbt` or `.scala` files in `~/.sbt/1.0/plugins/` behave as if they were in the `project/` directory for all projects.

You can create `~/.sbt/1.0/plugins//build.sbt` and put `addSbtPlugin()` expressions in there to add plugins to all your projects at once. Because doing so would increase the dependency on the machine environment, this feature should be used sparingly. See [Best Practices](#).

## Available Plugins

There's a [list of available plugins](#).

Some especially popular plugins are:

- those for IDEs (to import an sbt project into your IDE)
- those supporting web frameworks, such as [xsbt-web-plugin](#).

For more details, including ways of developing plugins, see [Plugins](#). For best practices, see [Plugins-Best-Practices](#).

## Custom settings and tasks

This page gets you started creating your own settings and tasks.

To understand this page, be sure you've read earlier pages in the Getting Started Guide, especially [build.sbt](#) and [task graph](#).

### Defining a key

[Keys](#) is packed with examples illustrating how to define keys. Most of the keys are implemented in [Defaults](#).

Keys have one of three types. `SettingKey` and `TaskKey` are described in [.sbt build definition](#). Read about `InputKey` on the [Input Tasks](#) page.

Some examples from [Keys](#):

```
val scalaVersion = settingKey[String]("The version of Scala used for building.")
val clean = taskKey[Unit]("Deletes files produced by the build, such as generated sources, o
```

The key constructors have two string parameters: the name of the key ("`scalaVersion`") and a documentation string ("`The version of scala used for building.`").

Remember from [.sbt build definition](#) that the type parameter `T` in `SettingKey[T]` indicates the type of value a setting has. `T` in `TaskKey[T]` indicates the type of the task's result. Also remember from [.sbt build definition](#) that a setting has a fixed value until project reload, while a task is re-computed

for every “task execution” (every time someone types a command at the sbt interactive prompt or in batch mode).

Keys may be defined in an [.sbt file](#), a [.scala file](#), or in an [auto plugin](#). Any `vals` found under `autoImport` object of an enabled auto plugin will be imported automatically into your `.sbt` files.

## Implementing a task

Once you’ve defined a key for your task, you’ll need to complete it with a task definition. You could be defining your own task, or you could be planning to redefine an existing task. Either way looks the same; use `:=` to associate some code with the task key:

```
val sampleStringTask = taskKey[String]("A sample string task.")
val sampleIntTask = taskKey[Int]("A sample int task.")

lazy val commonSettings = Seq(
  organization := "com.example",
  version := "0.1.0-SNAPSHOT"
)

lazy val library = (project in file("library"))
  .settings(
    commonSettings,
    sampleStringTask := System.getProperty("user.home"),
    sampleIntTask := {
      val sum = 1 + 2
      println("sum: " + sum)
      sum
    }
  )
```

If the task has dependencies, you’d reference their value using `value`, as discussed in [task graph](#).

The hardest part about implementing tasks is often not sbt-specific; tasks are just Scala code. The hard part could be writing the “body” of your task that does whatever you’re trying to do. For example, maybe you’re trying to format HTML in which case you might want to use an HTML library (you would [add a library dependency to your build definition](#) and write code based on the HTML library, perhaps).

sbt has some utility libraries and convenience functions, in particular you can often use the convenient APIs in [IO](#) to manipulate files and directories.

## Execution semantics of tasks

When depending on other tasks from a custom task using `value`, an important detail to note is the execution semantics of the tasks. By execution semantics, we mean exactly *when* these tasks are evaluated.

If we take `sampleIntTask` for instance, each line in the body of the task should be strictly evaluated one after the other. That is sequential semantics:

```
sampleIntTask := {  
    val sum = 1 + 2           // first  
    println("sum: " + sum)   // second  
    sum                       // third  
}
```

In reality JVM may inline the `sum` to 3, but the observable *effect* of the task will remain identical as if each line were executed one after the other.

Now suppose we define two more custom tasks `startServer` and `stopServer`, and modify `sampleIntTask` as follows:

```
val startServer = taskKey[Unit]("start server")  
val stopServer = taskKey[Unit]("stop server")  
val sampleIntTask = taskKey[Int]("A sample int task.")  
val sampleStringTask = taskKey[String]("A sample string task.")  
  
lazy val commonSettings = Seq(  
    organization := "com.example",  
    version := "0.1.0-SNAPSHOT"  
)  
  
lazy val library = (project in file("library"))  
    .settings(  
        commonSettings,  
        startServer := {  
            println("starting...")  
            Thread.sleep(500)  
        },  
        stopServer := {  
            println("stopping...")  
            Thread.sleep(500)  
        },  
        sampleIntTask := {  
            startServer.value  
            val sum = 1 + 2  
            println("sum: " + sum)  
        })
```



```

    stopServer.value // THIS WON'T WORK
    sum
  },
  sampleStringTask := {
    startServer.value
    val s = sampleIntTask.value.toString
    println("s: " + s)
    s
  }
)

```

Running `sampleIntTask` from sbt interactive prompt results to the following:

```

> sampleIntTask
stopping...
starting...
sum: 3
[success] Total time: 1 s, completed Dec 22, 2014 5:00:00 PM

```

To review what happened, let's look at a graphical notation of `sampleIntTask`:



Figure 4: task-dependency

Unlike plain Scala method calls, invoking `value` method on tasks will not be evaluated strictly. Instead, they simply act as placeholders to denote that `sampleIntTask` depends on `startServer` and `stopServer` tasks. When `sampleIntTask` is invoked by you, sbt's tasks engine will:

- evaluate the task dependencies *before* evaluating `sampleIntTask` (partial ordering)
- try to evaluate task dependencies in parallel if they are independent (parallelization)
- each task dependency will be evaluated once and only once per command execution (deduplication)

**Deduplication of task dependencies** To demonstrate the last point, we can run `sampleStringTask` from sbt interactive prompt.

```
> sampleStringTask
stopping...
starting...
sum: 3
s: 3
[success] Total time: 1 s, completed Dec 22, 2014 5:30:00 PM
```

Because `sampleStringTask` depends on both `startServer` and `sampleIntTask` task, and `sampleIntTask` also depends on `startServer` task, it appears twice as task dependency. If this was a plain Scala method call it would be evaluated twice, but since `value` is just denoting a task dependency, it will be evaluated once. The following is a graphical notation of `sampleStringTask`'s evaluation:



Figure 5: task-dependency

If we did not deduplicate the task dependencies, we will end up compiling test source code many times when `test` task is invoked since `compile in Test` appears many times as a task dependency of `test in Test`.

**Cleanup task** How should one implement `stopServer` task? The notion of cleanup task does not fit into the execution model of tasks because tasks are about tracking dependencies. The last operation should become the task that depends on other intermediate tasks. For instance `stopServer` should depend on `sampleStringTask`, at which point `stopServer` should be the `sampleStringTask`.

```
lazy val library = (project in file("library"))
  .settings(
    commonSettings,
    startServer := {
      println("starting...")
      Thread.sleep(500)
    },
  )
```

```

sampleIntTask := {
  startServer.value
  val sum = 1 + 2
  println("sum: " + sum)
  sum
},
sampleStringTask := {
  startServer.value
  val s = sampleIntTask.value.toString
  println("s: " + s)
  s
},
sampleStringTask := {
  val old = sampleStringTask.value
  println("stopping...")
  Thread.sleep(500)
  old
}
)

```

To demonstrate that it works, run `sampleStringTask` from the interactive prompt:

```

> sampleStringTask
starting...
sum: 3
s: 3
stopping...
[success] Total time: 1 s, completed Dec 22, 2014 6:00:00 PM

```



Figure 6: task-dependency

**Use plain Scala** Another way of making sure that something happens after some other thing is to use Scala. Implement a simple function in `project/ServerUtil.scala` for example, and you can write:

```

sampleIntTask := {
  ServerUtil.startServer

```

```

try {
  val sum = 1 + 2
  println("sum: " + sum)
} finally {
  ServerUtil.stopServer
}
sum
}

```

Since plain method calls follow sequential semantics, everything happens in order. There's no deduplication, so you have to be careful about that.

## Turn them into plugins

If you find you have a lot of custom code, consider moving it to a plugin for re-use across multiple builds.

It's very easy to create a plugin, as [teased earlier](#) and [discussed at more length here](#).

This page has been a quick taste; there's much much more about custom tasks on the [Tasks](#) page.

## Organizing the build

This page discusses the organization of the build structure.

Please read the earlier pages in the Getting Started Guide first, in particular you need to understand [build.sbt](#), [task graph](#), [Library dependencies](#), and [Multi-project builds](#) before reading this page.

### sbt is recursive

`build.sbt` conceals how sbt really works. sbt builds are defined with Scala code. That code, itself, has to be built. What better way than with sbt?

The **project** directory *is another build inside your build*, which knows how to build your build. To distinguish the builds, we sometimes use the term **proper build** to refer to your build, and **meta-build** to refer to the build in **project**. The projects inside the metabuild can do anything any other project can do. *Your build definition is an sbt project.*

And the turtles go all the way down. If you like, you can tweak the build definition of the build definition project, by creating a **project/project/** directory.

Here's an illustration.

```

hello/                # your build's root project's base directory

Hello.scala           # a source file in your build's root project
                        #   (could be in src/main/scala too)

build.sbt              # build.sbt is part of the source code for
                        #   meta-build's root project inside project/;
                        #   the build definition for your build

project/              # base directory of meta-build's root project

Dependencies.scala     # a source file in the meta-build's root project,
                        #   that is, a source file in the build definition
                        #   the build definition for your build

assembly.sbt          # this is part of the source code for
                        #   meta-meta-build's root project in project/project;
                        #   build definition's build definition

project/              # base directory of meta-meta-build's root project;
                        #   the build definition project for the build definition

MetaDeps.scala         # source file in the root project of
                        #   meta-meta-build in project/project/

```

*Don't worry!* Most of the time you are not going to need all that. But understanding the principle can be helpful.

By the way: any time files ending in `.scala` or `.sbt` are used, naming them `build.sbt` and `Dependencies.scala` are conventions only. This also means that multiple files are allowed.

## Tracking dependencies in one place

One way of using the fact that `.scala` files under `project` becomes part of the build definition is to create `project/Dependencies.scala` to track dependencies in one place.

```

import sbt._

object Dependencies {
  // Versions
  lazy val akkaVersion = "2.3.8"

  // Libraries

```

```

val akkaActor = "com.typesafe.akka" %% "akka-actor" % akkaVersion
val akkaCluster = "com.typesafe.akka" %% "akka-cluster" % akkaVersion
val specs2core = "org.specs2" %% "specs2-core" % "2.4.17"

// Projects
val backendDeps =
  Seq(akkaActor, specs2core % Test)
}

```

The `Dependencies` object will be available in `build.sbt`. To use the `vals` under it easier, import `Dependencies._`.

```

import Dependencies._

lazy val commonSettings = Seq(
  version := "0.1.0",
  scalaVersion := "2.12.2"
)

lazy val backend = (project in file("backend"))
  .settings(
    commonSettings,
    libraryDependencies += backendDeps
  )

```

This technique is useful when you have a multi-project build that's getting large, and you want to make sure that subprojects to have consistent dependencies.

## When to use `.scala` files

In `.scala` files, you can write any Scala code, including top-level classes and objects.

The recommended approach is to define most settings in a multi-project `build.sbt` file, and using `project/*.scala` files for task implementations or to share values, such as keys. The use of `.scala` files also depends on how comfortable you or your team are with Scala.

## Defining auto plugins

For more advanced users, another way of organizing your build is to define one-off [auto plugins](#) in `project/*.scala`. By defining triggered plugins, auto plugins can be used as a convenient way to inject custom tasks and commands across all subprojects.

## Getting Started summary

This page wraps up the Getting Started Guide.

To use sbt, there are a small number of concepts you must understand. These have some learning curve, but on the positive side, there isn't much to sbt *except* these concepts. sbt uses a small core of powerful concepts to do everything it does.

If you've read the whole Getting Started series, now you know what you need to know.

### sbt: The Core Concepts

- the basics of Scala. It's undeniably helpful to be familiar with Scala syntax. [Programming in Scala](#) written by the creator of Scala is a great introduction.
- [.sbt build definition](#)
- your build definition is a big DAG of tasks and their dependencies.
- to create a **Setting**, call one of a few methods on a key: `:=`, `+=`, or `++=`.
- each setting has a value of a particular type, determined by the key.
- *tasks* are special settings where the computation to produce the key's value will be re-run each time you kick off a task. Non-tasks compute the value once, when first loading the build definition.
- [Scopes](#)
- each key may have multiple values, in distinct scopes.
- scoping may use three axes: configuration, project, and task.
- scoping allows you to have different behaviors per-project, per-task, or per-configuration.
- a configuration is a kind of build, such as the main one (**Compile**) or the test one (**Test**).
- the per-project axis also supports "entire build" scope.
- scopes fall back to or *delegate* to more general scopes.
- put most of your configuration in `build.sbt`, but use `.scala` build definition files for defining classes and larger task implementations.
- the build definition is an sbt project in its own right, rooted in the project directory.
- [Plugins](#) are extensions to the build definition
- add plugins with the `addSbtPlugin` method in `project/plugins.sbt` (NOT `build.sbt` in the project's base directory).

If any of this leaves you wondering rather than nodding, please [ask for help](#), go back and re-read, or try some experiments in sbt's interactive mode.

Good luck!

## Advanced Notes

Since sbt is open source, don't forget you can check out the [source code](#) too!

## General Information

This part of the documentation has project “meta-information” such as where to get help, find source code and how to contribute.

## Credits

sbt was originally created by Mark Harrah ([@harrah][@harrah]) in 2008. Most of the fundamental aspects of sbt, such as the Scala incremental compiler, integration with Maven and Ivy dependencies, and parallel task processing were conceived and initially implemented by Mark.

By 2010, when sbt 0.7 came out, many open-source Scala projects were using sbt as their build tool.

Mark joined Typesafe (now Lightbend) in 2011, the year the company was founded. sbt 0.10.0 shipped that same year. Mark remained the maintainer and most active contributor until March 2014, with sbt 0.13.1 as his last release.

Josh Suereth ([@jsuereth][@jsuereth]) at Typesafe became the next maintainer of sbt.

In 2014, Eugene Yokota ([@eed3si9n][@eed3si9n]) joined Typesafe to co-lead sbt with Josh. This team carried the 0.13 series through 0.13.5 and started the trajectory to 1.0 as [technology previews](#). By the time of Josh's departure in 2015, after sbt 0.13.9, they had shipped **AutoPlugin**, kept sbt 0.13 in shape, and laid groundwork for sbt server.

Grzegorz Kossakowski ([@gkossakowski][@gkossakowski]) worked on a better incremental compiler algorithm called “name hashing” during his time on the Scala team at Typesafe. Name hashing became the default incremental compiler in sbt 0.13.6 (2014). Lightbend later commissioned Grzegorz to refine name hashing using a technique called class-based name hashing, which was adopted by Zinc 1. Another notable contribution from Grzegorz was hosting a series of [meetups](#) with @WarsawScaLa, and (with his arm in a sling!) guiding the Warsaw Scala community to [fix](#) the infamous blank-line problem.

In May 2015, Dale Wijnand ([@dwijnand][@dwijnand]) became a committer from the community after contributing features such as `inThisBuild` and `==`.

From June 2015 to early 2016, Martin Duhem ([@Duhemm][@Duhemm]) joined Typesafe as an intern, working on sbt. During this time, Martin worked on crucial components such as making the compiler bridge configurable for Zinc, and code generation for pseudo case classes (which later became Contraband).



Around this time, Eugene, Martin, and Dale started the sbt 1.x code-base, splitting the code base into multiple modules: sbt/sbt, Zinc 1, sbt/librarymanagement, sbt/util, and sbt/io. The aim was to make Zinc 1, an incremental compiler usable by all build tools.

In August 2016, Dale joined the Tooling team at Lightbend. Dale and Eugene oversaw the releases 0.13.12 through 0.13.16, as well as the development of sbt 1.0.

In spring 2017, the Scala Center joined the Zinc 1 development effort. Jorge Vicente Cantero ([@jvican][@jvican]) has contributed a number of improvements including the fix for the “as seen from” bug that had blocked Zinc 1.

According to `git shortlog -sn --no-merges` on [sbt/sbt](#), [sbt/zinc](#), [sbt/librarymanagement](#), [sbt/util](#), [sbt/io](#), [sbt/contraband](#), and [sbt/website](#) there were 9151 non-merge commits by 318 contributors.

- Mark Harrah 3852
- Eugene Yokota (eed3si9n) 1760
- Dale Wijnand 524
- Josh Suereth 357
- Grzegorz Kossakowski 349
- Martin Duhem 333
- Jorge Vicente Cantero (jvican) 314
- Eugene Vigdorchik 108
- Kenji Yoshida (xuwei-k) 96
- Indrajit Raychaudhuri 90
- Dan Sanduleac 74
- Benjy Weinberger 52
- Max Peng 52
- Jacek Laskowski 40
- Jason Zaugg 40
- Josh Soref 39
- Krzysztof Romanowski 39
- Pierre DAL-PRA 36
- Andrzej Jozwik 33
- Antonio Cunei 30
- Aaron S. Hawley 29
- Guillaume Martres 25
- James Roper 24
- Chua Chee Seng (cheeseng) 24
- Paolo G. Giarrusso 23
- Matej Urbas 22
- Stu Hood 22
- Adriaan Moors 18

- Jean-Rémi Desjardins 16
- Sanjin Sehic 16
- Fedor Korotkov 14
- Andrew Johnson 13
- David Perez 13
- Havoc Pennington 13
- Liang Tang 12
- Peter Vlugter 12
- Taro L. Saito 10
- Paul Phillips 9
- Roberto Tyley 9
- Vojin Jovanovic 9
- William Benton 9
- (Yang Bo) 9
- Brian Topping 8
- Bruno Bieth 8
- Johannes Rudolph 8
- KAWACHI Takashi 8
- Ken Kaizu (krrrr38) 8
- Artyom Olshevskiy 7
- Eugene Platonov 7
- Matthew Farwell 7
- Michael Allman 7
- David Pratt 6
- Luca Milanesio 6
- Nepomuk Seiler 6
- Peiyu Wang 6
- Simeon H.K. Fitch 6
- Stephen Samuel 6
- Thierry Treyer 6
- James Earl Douglas 5
- Jean-Remi Desjardins 5
- Miles Sabin 5
- Seth Tisue 5
- qgd 5
- Anthony Whitford 4
- Bardur Arantsson 4
- Ches Martin 4
- Chris Birchall 4
- Daniel C. Sobral 4
- Heikki Vesalainen 4
- Krzysztof Nirski 4

- Lloyd Meta 4
- Michael Schmitz 4
- Orr Sella 4
- Philipp Dörfler 4
- Tim Harper 4
- Vasya Novikov 4
- Vincent Munier 4
- Jürgen Keck (j-keck) 4
- Richard Summerhayes (rasummer) 4
- Adam Warski 3
- Ben McCann 3
- Enno Runne 3
- Eric Bowman 3
- Henrik Engstrom 3
- Ian Forsey 3
- James Ward 3
- Jesse Kinkead 3
- Justin Pihony 3
- Kazuhiro Sera 3
- Krzysztof Borowski 3
- Lars Hupel 3
- Leif Wickland 3
- Lukas Rytz 3
- Max Worgan 3
- Oliver Wickham 3
- Olli Helenius 3
- Roman Timushev 3
- Simon Schäfer 3
- ZhiFeng Hu 3
- daniel-shuy 3
- Roland Schatz 3
- soc 3
- wpitula 3
- Alex Dupre 2
- Alexey Alekhin 2
- Allan Erskine 2
- Alois Cochard 2
- Andreas Flierl 2
- Anthony 2
- Antoine Gourlay 2
- Arnout Engelen 2
- Ben Hutchison 2

- Benjamin Darfler 2
- Brendan W. McAdams 2
- Brennan Saeta 2
- Brian McKenna 2
- Brian Smith 2
- BrianLondon 2
- Charles Feduke 2
- Christian Dedie 2
- Cody Allen 2
- Damien Lecan 2
- David Barri 2
- David Harcombe 2
- David Hotham 2
- Derek Wickern 2
- Eric D. Reichert 2
- Eric J. Christeson 2
- Evgeny Goldin 2
- Evgeny Vereshchagin 2
- Francois Armand (fanf42) 2
- Fred Dubois 2
- Heejong Lee 2
- Henri Kerola 2
- Hideki Ikio 2
- Ikenna Nwaiwu 2
- Ismael Juma 2
- Jakob Odersky 2
- Jan Berkel 2
- Jan Niehusmann 2
- Jarek Sacha 2
- Jens Halm 2
- Joachim Hofer 2
- Joe Barnes 2
- Johan Andrén 2
- Jonas Fonseca 2
- Josh Kalderimis 2
- Juan Manuel Caicedo Carvajal 2
- Justin Kaeser 2
- Konrad Malawski 2
- Lex Spoon 2
- Li Haoyi 2
- Lloyd 2
- Lukasz Piepiora 2

- Marcus Lönnberg 2
- Marko Elezovic 2
- Michael Parrott 2
- Mikael Vallerie 2
- Myyk Seok 2
- Ngoc Dao 2
- Nicolas Rémond 2
- Oscar Vargas Torres 2
- Paul Draper 2
- Paulo “JCranky” Siqueira 2
- Petro Verkhogliad 2
- Piotr Kukielka 2
- Robin Green 2
- Roch Delsalle 2
- Roman Iakovlev 2
- Scott Royston 2
- Simon Hafner 2
- Sukant Hajra 2
- Suzanne Hamilton 2
- Tejas Mandke 2
- Thomas Koch 2
- Thomas Lockney 2
- Tobias Neef 2
- Tomasz Bartczak 2
- Travis 2
- Vitalii Voloshyn 2
- Wei Chen 2
- Wojciech Langiewicz 2
- Xin Ren 2
- Zava 2
- amishak 2
- beolnix 2
- ddworak 2
- drdamour 2
- Eric K Richardson (ekrich) 2
- fsi206914 2
- henry 2
- kaatzee 2
- kalmanb 2
- nau 2
- qvaughan 2
- sam 2

- softprops 2
- tbje 2
- timt 2
- Aaron D. Valade 1
- Alexander Buchholtz 1
- Alexandr Nikitin 1
- Alexandre Archambault 1
- Alexey Levan 1
- Anatoly Fayngelerin 1
- Andrea 1
- Andrew D Bate 1
- Andrew Miller 1
- Ashley Mercer 1
- Bruce Mitchener 1
- Cause Cheng 1
- Cause Chung 1
- Christian Krause 1
- Christophe Vidal 1
- Claudio Bley 1
- Daniel Peebles 1
- Denis T 1
- Devis Lucato 1
- Dmitry Melnichenko 1
- EECOLOR 1
- Edward Samson 1
- Erik Bakker 1
- Erik Bruchez 1
- Ethan 1
- Federico Ragona 1
- Felix Leipold 1
- Geoffroy Couprie 1
- Gerolf Seitz 1
- Gilad Hoch 1
- Gregor Heine 1
- HairyFotr 1
- Heiko Seeberger 1
- Holden Karau 1
- Hussachai Puripunpinyo 1
- Jacques 1
- Jakob Grunig 1
- James Koch 1
- Jan Polák 1

- Jan Ziniewicz 1
- Jisoo Park 1
- Joonas Javanainen 1
- Joscha Feth 1
- Josef Vlach 1
- Joseph Earl 1
- João Costa 1
- Justin Ko 1
- Kamil Kloch 1
- Kazuyoshi Kato 1
- Kevin Scaldeferri 1
- Knut Petter Meen 1
- Krzysztof 1
- Kunihiko Ito 1
- LMnet 1
- Luc Bourlier 1
- Lucas Mogari 1
- Lutz Huehnken 1
- Mal Graty 1
- Marcos Savoury 1
- Marek Żebrowski 1
- Markus Siemens 1
- Martynas Mickevicius 1
- Martynas Mickevičius 1
- Michael Bayne 1
- Michael Ledin 1
- Nathan Hamblen 1
- Nyavro 1
- OlegYch 1
- Olivier ROLAND 1
- Pavel Penkov 1
- Pedro Larroy 1
- Peter Pan 1
- Piotr Kukiela 1
- Rikard Pavelic 1
- Robert Jacob 1
- Rogach 1
- Sergey Andreev 1
- Shanbin Wang 1
- Shane Hender 1
- Simon Olofsson 1
- Stefan Zeiger 1

- Stephen Duncan Jr 1
- Steve Gury 1
- Sören Brunk 1
- Thomas Grainger 1
- Tim Sheppard 1
- Todor Todorov 1
- Toshiyuki Takahashi 1
- Travis Brown 1
- Tsubasa Irisawa 1
- Victor Hiairrassary 1
- Yasuo Nakanishi 1
- Yoshitaka Fujii 1
- adinath 1
- albuch 1
- cchantep 1
- cdietze 1
- choucri 1
- hokada 1
- joiskov 1
- jozic 1
- jyane 1
- k.bigwheel 1
- kavedaa 1
- mmcbride 1
- pishen tsai 1
- sanjiv sahayam 1
- saturday06 1
- seroperson 1
- slideon 1
- thricejamie 1
- todesking 1
- totem3 1
- upescatore 1
- valydia 1
- walidbenchikha 1
- Wiesław Popielarski 1
- Łukasz Indykiewicz 1

For the details on individual contributions, see [Changes](#).

The following people contributed ideas, documentation, or code to sbt but are not listed above:



- Josh Cough
- Nolan Darilek
- Viktor Klang
- David R. MacIver
- Ross McDonald
- Andrew O'Malley
- Jorge Ortiz
- Mikko Peltonen
- Ray Racine
- Stuart Roebuck
- Harshad RJ
- Tony Sloane
- Francisco Treacy
- Vesa Vilhonen

The sbt ecosystem would not be the same without so many awesome plugins. Here are some of the plugins and their contributors:

- [Play Framework](#) by Lightbend (James Roper, Peter Hausel, and many others)
- [Scala.js](#) by Sébastien Doeraene, Tobias Schlatter, et al
- [sbt-assembly](#) by Eugene Yokota (eed3si9n)
- [coursier](#) by Alexandre Archambault
- [sbt Native Packager](#) by Nepomuk Seiler (muuki88) and Josh Suereth
- [sbt-dependency-graph](#) by Johannes Rudolph
- [WartRemover](#) by Claire Neveu and Brian McKenna
- [sbt-android](#) by Perry (pfn)
- [sbt-revolver](#) by Johannes Rudolph and Mathias (sirthias)
- [sbt-docker](#) by Marcus Lönnberg
- [tut](#) by Rob Norris (tpolecat)
- [sbt-release](#) by Gerolf Seitz
- [sbt-jmh](#) by Konrad Malawski (ktoso)
- [sbt-updates](#) by Roman Timushev
- [xsbt-web-plugin](#) by James Earl Douglas and Artyom Olshevskiy
- [sbt-scoverage](#) by Stephen Samuel and Mikko Koponen
- [sbt-web](#) by Lightbend (Christopher Hunt, Peter Vlugter, et al)
- [sbt-buildinfo](#) by Eugene Yokota (eed3si9n)
- [sbt-pack](#) by Taro L. Saito (xerial)
- [sbt-onejar](#) by Jason Zaugg (retronym)
- [sbt-git](#) by Josh Suereth
- [sbt-scalariform](#) by Heiko Seeberger, Daniel Trinh, et al
- [ensime-sbt](#) by Sam Halliday (fommil)

- [sbt-fresh](#) by Heiko Seeberger
- [sbt-web-scalajs](#) by Vincent Munier
- [sbt-sonatype](#) by Taro L. Saito (xerial)
- [sbt-sublime](#) by Orr Sella
- [sbt-errors-summary](#) by Martin Duhem
- [sbt-bintray](#) by Doug Tangren (softprops)
- [Migration Manager](#) by Lightbend (Mirco Dotta, Seth Tissue, et al)
- [sbt-protobuf](#) by Gerolf Seitz and Kenji Yoshida (xuwei-k)
- [sbt-site](#) by Jonas Fonseca, Josh Suereth, et al
- [sbt-doctest](#) by KAWACHI Takashi
- [sbt-robovm](#) by Jan Polák
- [scalastyle-sbt-plugin](#) by Matthew Farwell
- [sbt-microsites](#) by 47 Degrees (Juan Pedro Moreno, Javier de Silóniz Sandino, et al)
- [sbt-header](#) by Heiko Seeberger and Benedikt Ritter
- [sbt-groll](#) by Heiko Seeberger
- [sbt-ctags](#) by Cody Allen
- [sbt-aws-lambda](#) by Gilt (Brendan St John, et al)
- [sbt-heroku](#) by Heroku (Joe Kutner)
- [sbt-dynver](#) by Dale Wijnand
- [sbt-unidoc](#) by Eugene Yokota and Peter Vlugter
- [sbt-docker-compose](#) by Tapad (Kurt Kopchik et al)
- [sbt-coveralls](#) by Ian Forsey and Stephen Samuel
- [gatling-sbt](#) by Pierre Dal-Pra
- [sbt-boilerplate](#) by Johannes Rudolph
- [fm-sbt-s3-resolver](#) by Tim Underwood
- [sbt-reactjs](#) by Dan Di Spaltro
- [sbt-scalabuff](#) by Aloïs Cochard
- [sbt-pgp](#) by Josh Suereth
- [jacoco4sbt](#) by Joachim Hofer
- [sbt-s3-resolver](#) by Alexey Alekhin (laughedelic)
- [sbt-maven-plugin](#) by Shiva Wu
- [sbt-newrelic](#) by Gilt (Gary Coady et al)
- [naptime](#) by Coursera (Brennan Saeta, Bryan Kane et al)
- [neo-sbt-scalafmt](#) by Lucid Software (Paul Draper et al)
- [Courier](#) by Coursera (Joe Betz et al)
- [sbt-optimizer](#) by Johannes Rudolph
- [sbt-appengine](#) by Eugene Yokota (eed3si9n) and Yasushi Abe
- [sbt/sbt-ghpages](#) by Josh Suereth
- [kotlin-plugin](#) by Perry (pfn)
- [sbt-avro](#) by Juan Manuel Caicedo Carvajal (cavorite), Ben McCann, et al
- [sbt-aspectj](#) by Lightbend (Peter Vlugter et al)

- [sbt-crossproject](#) by Denys Shabalin and Guillaume Massé
- [sbt-scapegoat](#) by Stephen Samuel
- [sbt-dependency-graph-sugar](#) by Gilt (Brendan St John et al)
- [sbt-aether-deploy](#) by Arktekk (Erlend Hamnaberg et al)
- [sbt-spark-submit](#) by Forest Fang
- [sbt-proguard](#) by Lightbend (Peter Vlugter et al)
- [Jenkins CI sbt plugin](#) by Uzi Landsmann
- [sbt-quickfix](#) by Dave Cleaver
- [sbt-growl-plugin](#) by Doug Tangren (softprops)
- [sbt-dependency-check](#) by Alexander v. Buchholtz
- [sbt-structure](#) by JetBrains (Justin Kaeser et al)
- [sbt-typescript](#) by Brandon Arp
- [sbt-javacv](#) by Bytedeco (Lloyd Chan et al)
- [sbt-stats](#) by Orr Sella
- [sbt-rig](#) by Verizon (Timothy Perrett et al)
- [sbt-swagger-codegen](#) by UniCredit (Andrea Peruffo, Francesco MDE, et al)
- [sbt-pom-reader](#) by Josh Suereth
- [sbt-class-diagram](#) by Kenji Yoshida (xuwei-k)

Kudos also to people who have answered questions on [Stack Overflow](#) (Jacek Laskowski, Lukasz Piepiora, et al) and [sbt Gitter channel](#), and many who have reported issues and contributed ideas on GitHub.

Thank you all.

## Community Plugins

### sbt Organization

The [sbt organization](#) is available for use by any sbt plugin. Developers who contribute their plugins into the community organization will still retain control over their repository and its access. The goal of the sbt organization is to organize sbt software into one central location.

A side benefit to using the sbt organization for projects is that you can use gh-pages to host websites under the <http://scala-sbt.org> domain.

### Community Ivy Repository

[Lightbend](#) has provided a freely available [Ivy Repository](#) for sbt projects to use. This Ivy repository is mirrored from the freely available [Bintray service](#). If you'd like to submit your plugin, please follow these instructions: [Bintray For Plugins](#).

## Cross building plugins from sbt 0.13

See [Cross Build Plugins](#).

## Plugins available for sbt 1.0 (including RC-x)

[\[Edit\]](#) this page to submit a pull request that adds your plugin to the list.

## Plugins for IDEs ...

### One jar plugins

- sbt-assembly (make fat JARs): <https://github.com/sbt/sbt-assembly>

### Release plugins

- sbt-pgp (PGP signing plugin, can generate keys too): <https://github.com/sbt/sbt-pgp>
- sbt-bintray (Publish to Bintray): <https://github.com/sbt/sbt-bintray>
- sbt-release (customizable release process): <https://github.com/sbt/sbt-release>
- sbt-docker (Build and push Docker images): <https://github.com/marcuslonnberg/sbt-docker>

## Deployment integration plugins ...

### Utility and system plugins

- sbt-git (executes git commands): <https://github.com/sbt/sbt-git>
- sbt-conscript (app distribution using GitHub and Maven Central): <http://www.foundweekends.org/conscript/>
- MiMa (Migration Manager - the Scala binary compatibility validation tool): <https://github.com/typesafehub/migration-manager>
- sbt-jshell (execute Java REPL) <https://github.com/xuwei-k/sbt-jshell>

### Test plugins

- [Scripted plugin](#)
- sbt-jmh (OpenJDK JMH (Java Microbenchmark Harness) integration for Scala): <https://github.com/ktoso/sbt-jmh>

- sbt-scalaprops (plugin for scalaprops): <https://github.com/scalaprops/sbt-scalaprops>
- tut (doc/tutorial generator for scala): <https://github.com/tpolecat/tut>

### Library dependency plugins

- sbt-updates (Display updated versions of your project dependencies): <https://github.com/rtimush/sbt-updates>
- sbt-dependency-check (Check your project dependencies for publicly know vulnerabilities/CVE): <https://github.com/albuch/sbt-dependency-check>

### Web and frontend development plugins ...

### Database plugins ...

### Code generator plugins

- sbt-buildinfo (Generate Scala source for any settings): <https://github.com/sbt/sbt-buildinfo>
- sbt-protobuf (Google Protocol Buffers): <https://github.com/sbt/sbt-protobuf>
- sbt-protoc (SBT plugin for generating code from Protocol Buffer using protoc) <https://github.com/thesamet/sbt-protoc>
- sbt-contraband (Generate pseudo-case class from GraphQL schema): <http://www.scala-sbt.org/contraband/>

### Documentation plugins

- sbt-unidoc (Create a unified API document across subprojects): <https://github.com/sbt/sbt-unidoc>
- sbt-class-diagram (Create a class diagram): <https://github.com/xuwei-k/sbt-class-diagram>

### Static code analysis plugins ...

### Code coverage plugins ...

### In-house plugins

- sbt-houserules (Settings used by sbt modules): <https://github.com/sbt/sbt-houserules>

## Plugins available for sbt 1.0.0-M6

Please submit a [pull request](#) that adds your plugin to the list.

- sbt-sonatype 2.0: <https://github.com/xerial/sbt-sonatype>
- sbt-class-diagram 0.2.1 <https://github.com/xuwei-k/sbt-class-diagram>
- sbt-scalaprops 0.2.1 <https://github.com/scalaprops/sbt-scalaprops>
- sbt-bintray 0.5.0: <https://github.com/sbt/sbt-bintray>
- [Scripted plugin](#)
- sbt-assembly 0.14.5: <https://github.com/sbt/sbt-assembly>
- sbt-buildinfo 0.7.0: <https://github.com/sbt/sbt-buildinfo>
- sbt-contraband 0.3.0-M5: <http://www.scala-sbt.org/contraband/>
- sbt-docker 1.4.1: <https://github.com/marcuslonnberg/sbt-docker>
- sbt-pgp 1.1.0-M1: <http://www.scala-sbt.org/sbt-pgp/>
- sbt-git 0.9.3: <https://github.com/sbt/sbt-git>
- sbt-protobuf 0.6.1 <https://github.com/sbt/sbt-protobuf>
- sbt-conscript 0.5.2 <https://github.com/foundweekends/conscript>
- sbt-jmh 0.2.26 <https://github.com/ktoso/sbt-jmh>
- sbt-updates 0.3.1: <https://github.com/rtimush/sbt-updates>

## Plugins available for sbt 1.0.0-M5

- sbt-bintray 0.4.0: <https://github.com/sbt/sbt-bintray>
- [Scripted plugin](#)
- sbt-assembly 0.14.4: <https://github.com/sbt/sbt-assembly>
- sbt-buildinfo 0.7.0: <https://github.com/sbt/sbt-buildinfo>
- sbt-contraband 0.3.0-M4: <http://www.scala-sbt.org/contraband/>
- Scalafmt 0.7.0-RC1 <http://scalameta.org/scalafmt/>
- neo-sbt-scalafmt 0.3 <https://github.com/lucidsoftware/neo-sbt-scalafmt>
- Coursier 1.0.0-RC2 <https://github.com/coursier/coursier>
- sbt-pgp 1.1.0-M1: <http://www.scala-sbt.org/sbt-pgp/>
- sbt-sonatype 2.0.0-M1: <https://github.com/xerial/sbt-sonatype>
- sbt-updates 0.3.1: <https://github.com/rtimush/sbt-updates>

## Community Repository Policy

The community repository has the following guideline for artifacts published to it:

1. All published artifacts are the authors own work or have an appropriate license which grants distribution rights.

2. All published artifacts come from open source projects, that have an open patch acceptance policy.
3. All published artifacts are placed under an organization in a DNS domain for which you have the permission to use or are an owner (scala-sbt.org is available for sbt plugins).
4. All published artifacts are signed by a committer of the project (coming soon).

## Bintray For Plugins

**This is currently in Beta mode.**

sbt hosts their community plugin repository on [Bintray](#). Bintray is a repository hosting site, similar to github, which allows users to contribute their own plugins, while sbt can aggregate them together in a common repository.

This document walks you through the means to create your own repository for hosting your sbt plugins and then linking them into the sbt shared repository. This will make your plugins available for all sbt users without additional configuration (besides declaring a dependency on your plugin).

To do this, we need to perform the following steps:

### Create an Open Source Distribution account on Bintray

First, go to <https://bintray.com/signup/oss> to create an Open Source Distribution Bintray Account.

If you end up at the [Bintray home page](#), do NOT click on the Free Trial, but click on the link that reads **“For Open Source Distribution Sign Up Here”**.

### Create a repository for your sbt plugins

Now, we'll create a repository to host our personal sbt plugins. In bintray, create a generic repository called **sbt-plugins**.

First, go to your user page and click on the **new repository** link:

You should see the following dialog:

Fill it out similarly to the above image, the settings are:

- Name: sbt-plugins
- Type: Generic
- Desc: My sbt plugins
- Tags: sbt

Once this is done, you can begin to configure your sbt-plugins to publish to bintray.

### Add the bintray-sbt plugin to your build.

First, add the bintray-sbt to your plugin build.

First, create a `project/bintray.sbt` file

```
addSbtPlugin("me.lessis" % "bintray-sbt" % "0.3.0")
```

Next, make sure your `build.sbt` file has the following settings

```
import bintray.Keys._

lazy val commonSettings = Seq(
  version in ThisBuild := "<YOUR PLUGIN VERSION HERE>",
  organization in ThisBuild := "<INSERT YOUR ORG HERE>"
)

lazy val root = (project in file("."))
  .settings(
    commonSettings,
    sbtPlugin := true,
    name := "<YOUR PLUGIN HERE>",
    description := "<YOUR DESCRIPTION HERE>",
    // This is an example. bintray-sbt requires licenses to be specified
    // (using a canonical name).
    licenses += ("Apache-2.0", url("https://www.apache.org/licenses/LICENSE-2.0.html")),
    publishMavenStyle := false,
    bintrayRepository := "sbt-plugins",
    bintrayOrganization in bintray := None
  )
```

Make sure your project has a valid license specified, as well as unique name and organization.

### Make a release

*Note: bintray does not support snapshots. We recommend using [git-revisions](#) supplied by the [sbt-git](#) plugin.*

Once your build is configured, open the sbt console in your build and run



```
sbt> publish
```

The plugin will ask you for your credentials. If you don't know where they are, you can find them on [Bintray](#).

1. Login to the website with your credentials.
2. Click on your username
3. Click on edit profile
4. Click on API Key

This will get you your password. The bintray-sbt plugin will save your API key for future use.

*NOTE: We have to do this before we can link our package to the sbt org.*

### Linking your package to the sbt organization

Now that your plugin is packaged on bintray, you can include it in the community sbt repository. To do so, go to the [Community sbt repository](#) screen.

1. Click the green **include my package** button and select your plugin.
2. Search for your plugin by name and click on the link.
3. Your request should be automatically filled out, just click send
4. Shortly, one of the sbt repository admins will approve your link request.

From here on, any releases of your plugin will automatically appear in the community sbt repository. Congratulations and thank you so much for your contributions!

### Linking your package to the sbt organization (sbt org admins)

If you're a member of the sbt organization on bintray, you can link your package to the sbt organization, but via a different means. To do so, first navigate to the plugin you wish to include and click on the link button:

After clicking this you should see a link like the following:

Click on the **sbt/sbt-plugin-releases** repository and you're done! Any future releases will be included in the sbt-plugin repository.

## Summary

After setting up the repository, all new releases will automatically be included the `sbt-plugin-releases` repository, available for all users. When you create a new plugin, after the initial release you'll have to link it to the sbt community repository, but the rest of the setup should already be completed. Thanks for your contributions and happy hacking.

## Setup Notes

Some notes on how to set up your `sbt` script.

### Do not put `sbt-launch.jar` on your classpath.

Do *not* put `sbt-launch.jar` in your `$SCALA_HOME/lib` directory, your project's `lib` directory, or anywhere it will be put on a classpath. It isn't a library.

### Terminal encoding

The character encoding used by your terminal may differ from Java's default encoding for your platform. In this case, you will need to add the option `-Dfile.encoding=<encoding>` in your `sbt` script to set the encoding, which might look like:

```
java -Dfile.encoding=UTF8
```

### JVM heap, permgen, and stack sizes

If you find yourself running out of permgen space or your workstation is low on memory, adjust the JVM configuration as you would for any application. For example a common set of memory-related options is:

```
java -Xmx1536M -Xss1M -XX:+CMSClassUnloadingEnabled -XX:MaxPermSize=256m
```

### Boot directory

`sbt-launch.jar` is just a bootstrap; the actual meat of sbt, and the Scala compiler and standard library, are downloaded to the shared directory `$HOME/.sbt/boot/`.

To change the location of this directory, set the `sbt.boot.directory` system property in your `sbt` script. A relative path will be resolved against the current

working directory, which can be useful if you want to avoid sharing the boot directory between projects. For example, the following uses the pre-0.11 style of putting the boot directory in `project/boot/`:

```
java -Dsbt.boot.directory=project/boot/
```

## HTTP/HTTPS/FTP Proxy

On Unix, sbt will pick up any HTTP, HTTPS, or FTP proxy settings from the standard `http_proxy`, `https_proxy`, and `ftp_proxy` environment variables. If you are behind a proxy requiring authentication, your `sbt` script must also pass flags to set the `http.proxyUser` and `http.proxyPassword` properties for HTTP, `ftp.proxyUser` and `ftp.proxyPassword` properties for FTP, or `https.proxyUser` and `https.proxyPassword` properties for HTTPS.

For example,

```
java -Dhttp.proxyUser=username -Dhttp.proxyPassword=mypassword
```

On Windows, your script should set properties for proxy host, port, and if applicable, username and password. For example, for HTTP:

```
java -Dhttp.proxyHost=myproxy -Dhttp.proxyPort=8080 -Dhttp.proxyUser=username -Dhttp.proxyPas
```

Replace `http` with `https` or `ftp` in the above command line to configure HTTPS or FTP.

## Using Sonatype

Deploying to sonatype is easy! Just follow these simple steps:

### Sonatype setup

The reference process for configuring and publishing to Sonatype is described in their [OSSRH Guide](#). In short, you need two publicly available URLs:

- the website of the project e.g. <https://github.com/sonatype/nexus-oss>
- the project's source code e.g. <https://github.com/sonatype/nexus-oss.git>

The [OSSRH Guide](#) walks you through the required process of setting up the account with Sonatype. It's as simple as [creating a Sonatype's JIRA account](#) and then a [New Project ticket](#). When creating the account, try to use the same

domain in your email address that the project is hosted on. It makes it easier for Sonatype to validate the relationship with the groupId requested in the ticket, but it is not the only method used to confirm the ownership.

Creation of the *New Project ticket* is as simple as:

- providing the name of the library in the ticket's subject,
- naming the groupId for distributing the library (make sure it matches the root package of your code). Sonatype provides additional hints on choosing the right groupId for publishing your library in [Choosing your coordinates guide](#).
- providing the SCM and Project URLs to the source code and homepage of the library.

After creating your Sonatype account on JIRA, you can log in to the [Nexus Repository Manager](#) using the same credentials, although this is not required in the guide, it can be helpful later to check on published artifacts.

*Note:* Sonatype advises that responding to a **New Project ticket** might take up to two business days, but in my case it was a few minutes.

## SBT setup

To address Sonatype's [requirements](#) for publishing to the central repository and to simplify the publishing process, you can use two community plugins. The [sbt-gpg plugin](#) can sign the files with GPG/PGP and [sbt-sonatype](#) can publish to a Sonatype repository.

**First - PGP Signatures** With the PGP key you want to use, you can sign the artifacts you want to publish to the Sonatype repository with the [sbt-gpg plugin](#). Follow the instructions for the plugin and you'll have PGP signed artifacts in no time.

In short, add the following line to your `~/.sbt/1.0/plugins/gpg.sbt` file to enable it globally for SBT projects:

```
addSbtPlugin("com.jsuereth" % "sbt-gpg" % "1.1.0-M1")
```

*Note:* The plugin is a jvm-only solution to generate PGP keys and sign artifacts. It can also work with the GPG command line tool.

If you don't have the PGP keys to sign your code with, one of the ways to achieve that is to install the [GNU Privacy Guard](#) and:

- use it to generate the keypair you will use to sign your library,
- publish your certificate to enable remote verification of the signatures,
- make sure that the `gpg` command is in `PATH` available to the sbt,
- add `useGpg := true` to your `build.sbt` to make the plugin `gpg-aware`

**PGP Tips'n'tricks** If the command to generate your key fails, execute the following commands and remove the displayed files:

```
> show */*:pgpSecretRing
[info] /home/username/.sbt/.gnupg/secring.gpg
> show */*:pgpPublicRing
[info] /home/username/.sbt/.gnupg/pubring.gpg
```

If your PGP key has not yet been distributed to the keyserver pool, e.g., you've just generated it, you'll need to publish it. You can do so using the [sbt-gpg](#) plugin:

```
pgp-cmd send-key keyname hkp://pool.sks-keyservers.net
```

Where `keyname` is the name or email address used when creating the key or hexadecimal identifier for the key.

If you see no output from `sbt-gpg` then the key name specified was not found.

If it fails to run the `SendKey` command you can try another server (for example: `hkp://keyserver.ubuntu.com`). A list of servers can be found at [the status page](#) of `sks-keyservers.net`.

## Second - Configure Sonatype integration

The credentials for your Sonatype OSSRH account need to be stored somewhere safe (*e.g. NOT in the repository*). Common convention is a `~/.sbt/1.0/sonatype.sbt` file (e.g. `'`) with the following:

```
credentials += Credentials("Sonatype Nexus Repository Manager",
                             "oss.sonatype.org",
                             "<your username>",
                             "<your password>")
```

*Note:* The first two strings must be "Sonatype Nexus Repository Manager" and "oss.sonatype.org" for Ivy to use the credentials.

Now, we want to control what's available in the `pom.xml` file. This file describes our project in the maven repository and is used by indexing services for search and discover. This means it's important that `pom.xml` should have all information we wish to advertise as well as required info!

First, let's make sure no repositories show up in the POM file. To publish on maven-central, all *required* artifacts must also be hosted on maven central. However, sometimes we have optional dependencies for special features. If that's the case, let's remove the repositories for optional dependencies in our artifact:

```
pomIncludeRepository := { _ => false }
```

To publish to a maven repository, you'll need to configure a few settings so that the correct metadata is generated. Specifically, the build should provide data for `organization`, `url`, `license`, `scm.url`, `scm.connection` and `developer` keys. For example:

```
licenses := Seq("BSD-style" -> url("http://www.opensource.org/licenses/bsd-license.php"))

homepage := Some(url("http://example.com"))

scmInfo := Some(
  ScmInfo(
    url("https://github.com/your-account/your-project"),
    "scm:git@github.com:your-account/your-project.git"
  )
)

developers := List(
  Developer(
    id    = "Your identifier",
    name  = "Your Name",
    email = "your@email",
    url   = url("http://your.url")
  )
)
```

**Maven configuration tips'n'tricks** The full format of a `pom.xml` (an end product of the project configuration used by Maven) file is [outlined here](#). You can add more data to it with the `pomExtra` option in `build.sbt`.

To ensure the POMs are generated and pushed:

```
publishMavenStyle := true
```

Setting repositories to publish to:

```
publishTo := {  
  val nexus = "https://oss.sonatype.org/"  
  if (isSnapshot.value)  
    Some("snapshots" at nexus + "content/repositories/snapshots")  
  else  
    Some("releases" at nexus + "service/local/staging/deploy/maven2")  
}
```

Not publishing the test artifacts (this is the default):

```
publishArtifact in Test := false
```

### Third - Publish to the staging repository

*Note:* sbt-sonatype is a third-party plugin meaning it is not covered by Lightbend subscription.

To simplify the usage of the Sonatype's Nexus, add the following line to `build.sbt` to import the [sbt-sonatype plugin](#) to your project:

```
addSbtPlugin("org.xerial.sbt" % "sbt-sonatype" % "1.1")
```

This plugin will facilitate the publishing process, but in short, these are the main steps for publishing the libraries to the repository:

1. Create a new staging repository: `sonatypeOpen "your groupId" "Some staging name"`
2. Sign and publish the library to the staging repository: `publishSigned`
3. You can and should check the published artifacts in the [Nexus Repository Manager](#) (same login as Sonatype's Jira account)
4. Close the staging repository and promote the release to central: `sonatypeRelease`

After publishing you have to follow the [release workflow of Nexus](#).

*Note:* the sbt-sonatype plugin can also be used to publish to other non-sonatype repositories

**Publishing tips’n’ticks** Use staged releases to test across large projects of independent releases before pushing the full project.

*Note:* An error message of `PGPException: checksum mismatch at 0 of 20` indicates that you got the passphrase wrong. We have found at least on OS X that there may be issues with characters outside the 7-bit ASCII range (e.g. Umlauts). If you are absolutely sure that you typed the right phrase and the error doesn’t disappear, try changing the passphrase.

#### Fourth - Integrate with the release process

*Note:* `sbt-release` is a third-party plugin meaning it is not covered by Lightbend subscription.

To automate the publishing approach above with the [sbt-release plugin](#), you should simply add the publishing commands as steps in the `releaseProcess` task:

```
...
ReleaseStep(action = Command.process("sonatypeOpen \"your groupId\" \"Some staging name\"", _))
...
ReleaseStep(action = Command.process("publishSigned", _)),
...
ReleaseStep(action = Command.process("sonatypeRelease", _)),
...
```

#### Contributing to sbt

Below is a running list of potential areas of contribution. This list may become out of date quickly, so you may want to check on the [sbt-dev mailing list](#) if you are interested in a specific topic.

1. There are plenty of possible visualization and analysis opportunities.
  - ‘compile’ produces an Analysis of the source code containing
    - Source dependencies
    - Inter-project source dependencies
    - Binary dependencies (jars + class files)
    - data structure representing the [API](#) of the source code There is some code already for generating dot files that isn’t hooked up, but graphing dependencies and inheritance relationships is a general area of work.



- ‘update’ produces an [Update Report](#) mapping Configuration/ModuleID/Artifact to the retrieved File
  - Ivy produces more detailed XML reports on dependencies. These come with an XSL stylesheet to view them, but this does not scale to large numbers of dependencies. Working on this is pretty straightforward: the XML files are created in `~/.ivy2` and the `.xsl` and `.css` are there as well, so you don’t even need to work with sbt. Other approaches described in [the email thread](#)
  - Tasks are a combination of static and dynamic graphs and it would be useful to view the graph of a run
  - Settings are a static graph and there is code to generate the dot files, but isn’t hooked up anywhere.
2. There is support for dependencies on external projects, like on GitHub. To be more useful, this should support being able to update the dependencies. It is also easy to extend this to other ways of retrieving projects. Support for svn and hg was a recent contribution, for example.
  3. Dependency management: see [adept](#)
  4. If you like parsers, sbt commands and input tasks are written using custom parser combinators that provide tab completion and error handling. Among other things, the efficiency could be improved.
  5. The javap task hasn’t been reintegrated
  6. Implement enhanced 0.11-style `warn/debug/info/error/trace` commands. Currently, you set it like any other setting:

```
set logLevel := Level.Warn
```

```
or set logLevel in Test := Level.Warn
```

You could make commands that wrap this, like:

```
warn test:run
```

Also, trace is currently an integer, but should really be an abstract data type.

7. Each sbt version has more aggressive incremental compilation and reproducing bugs can be difficult. It would be helpful to have a mode that generates a diff between successive compilations and records the options passed to scalac. This could be replayed or inspected to try to find the cause.

## Documentation

1. There’s a lot to do with this documentation. If you check it out from git, there’s a directory called Dormant with some content that needs going through.

2. the main page mentions external project references (e.g. to a git repo) but doesn't have anything to link to that explains how to use those.
3. API docs are much needed.
4. Find useful answers or types/methods/values in the other docs, and pull references to them up into /faq or /Name-Index so people can find the docs. In general the /faq should feel a bit more like a bunch of pointers into the regular docs, rather than an alternative to the docs.
5. A lot of the pages could probably have better names, and/or little 2-4 word blurbs to the right of them in the sidebar.

## Changes

These are changes made in each sbt release.

## Migrating from sbt 0.13.x

### Migrating case class `.copy(...)`

Many of the case classes are replaced with pseudo case classes generated using Contraband. Migrate `.copy(foo = xxx)` to `withFoo(xxx)`. Suppose you have `m: ModuleID`, and you're currently calling `m.copy(revision = "1.0.1")`. Here how you can migrate it:

```
m.withRevision("1.0.1")
```

### sbt version specific source directory

If you are cross building an sbt plugin, one escape hatch we have is sbt version specific source directory `src/main/scala-sbt-0.13` and `src/main/scala-sbt-1.0`. In there you can define an object named `PluginCompat` as follows:

```
package sbtfoo

import sbt._
import Keys._

object PluginCompat {
  type UpdateConfiguration = sbt.librarymanagement.UpdateConfiguration

  def subMissingOk(c: UpdateConfiguration, ok: Boolean): UpdateConfiguration =
    c.withMissingOk(ok)
}
```

Now `subMissingOk(...)` function can be implemented in sbt version specific way.

## Migrating from sbt 0.12 style

Before sbt 0.13 (sbt 0.9 to 0.12) it was very common to see in builds the usage of three aspects of sbt:

- the key dependency operators: `<=<`, `<+=`, `<++=`
- the tuple enrichments (`apply` and `map`) for `TaskKey`'s and `SettingKey`'s (eg. `(foo, bar) map { (f, b) => ... }`)
- the use of `Build` trait in `project/Build.scala`

The release of sbt 0.13 (which was over 3 years ago!) introduced the `.value` DSL which allowed for much easier to read and write code, effectively making the first two aspects redundant and they were removed from the official documentation.

Similarly, sbt 0.13's introduction of multi-project `build.sbt` made the `Build` trait redundant. In addition, the auto plugin feature that's now standard in sbt 0.13 enabled automatic sorting of plugin settings and auto import feature, but it made `Build.scala` more difficult to maintain.

As they are removed in sbt 1.0.0, and here we'll help guide you to how to migrate your code.

**Migrating sbt 0.12 style operators** With simple expressions such as:

```
a <=<= aTaskDef
b <+= bTaskDef
c <++= cTaskDefs
```

it is sufficient to replace them with the equivalent:

```
a := aTaskDef.value
b += bTaskDef.value
c ++= cTaskDefs.value
```

**Migrating from the tuple enrichments** As mentioned above, there are two tuple enrichments `.apply` and `.map`. The difference used to be for whether you're defining a setting for a `SettingKey` or a `TaskKey`, you use `.apply` for the former and `.map` for the latter:

```

val sett1 = settingKey[String]("SettingKey 1")
val sett2 = settingKey[String]("SettingKey 2")
val sett3 = settingKey[String]("SettingKey 3")

val task1 = taskKey[String]("TaskKey 1")
val task2 = taskKey[String]("TaskKey 2")
val task3 = taskKey[String]("TaskKey 3")
val task4 = taskKey[String]("TaskKey 4")

sett1 := "s1"
sett2 := "s2"
sett3 <=<= (sett1, sett2)(_ + _)

task1 := { println("t1"); "t1" }
task2 := { println("t2"); "t2" }
task3 <=<= (task1, task2) map { (t1, t2) => println(t1 + t2); t1 + t2 }
task4 <=<= (sett1, sett2) map { (s1, s2) => println(s1 + s2); s1 + s2 }

```

(Remember you can define tasks in terms of settings, but not the other way round)

With the `.value` DSL you don't have to know or remember if your key is a `SettingKey` or a `TaskKey`:

```

sett1 := "s1"
sett2 := "s2"
sett3 := sett1.value + sett2.value

task1 := { println("t1"); "t1" }
task2 := { println("t2"); "t2" }
task3 := { println(task1.value + task2.value); task1.value + task2.value }
task4 := { println(sett1.value + sett2.value); sett1.value + sett2.value }

```

**Migrating when using `.dependsOn`, `.triggeredBy` or `.runBefore`** When instead calling `.dependsOn`, instead of:

```
a <=<= a dependsOn b
```

define it as:

```
a := (a dependsOn b).value
```

**Note:** You'll need to use the `<=<=` operator with `.triggeredBy` and `.runBefore` in sbt 0.13.13 and earlier due to issue [#1444](#).

**Migrating when you need to set Tasks** For keys such as `sourceGenerators` and `resourceGenerators` which use sbt's `Task` type:

```
val sourceGenerators =  
  settingKey[Seq[Task[Seq[File]]]]("List of tasks that generate sources")  
val resourceGenerators =  
  settingKey[Seq[Task[Seq[File]]]]("List of tasks that generate resources")
```

Where you previous would define things as:

```
sourceGenerators in Compile <+= buildInfo
```

for sbt 0.13.15+, you define them as:

```
sourceGenerators in Compile += buildInfo
```

or in general,

```
sourceGenerators in Compile += Def.task { List(file1, file2) }
```

**Migrating with InputKey** When using `InputKey` instead of:

```
run <<= docsRunSetting
```

when migrating you mustn't use `.value` but `.evaluated`:

```
run := docsRunSetting.evaluated
```

**Migrating from the Build trait**

With `Build` trait based build such as:

```
import sbt._  
import Keys._  
import xyz.XyzPlugin.autoImport._  
  
object HelloBuild extends Build {  
  val shared = Defaults.defaultSettings ++ xyz.XyzPlugin.projectSettings ++ Seq(  
    organization := "com.example",  
    version      := "0.1.0",  
    scalaVersion := "2.12.1")
```

```

lazy val hello =
  Project("Hello", file("."),
    settings = shared ++ Seq(
      xyzSkipWrite := true
    ).aggregate(core)

lazy val core =
  Project("hello-core", file("core"),
    settings = shared ++ Seq(
      description := "Core interfaces",
      libraryDependencies ++= scalaXml.value
    )

def scalaXml = Def.setting {
  scalaBinaryVersion.value match {
    case "2.10" => Nil
    case _      => ("org.scala-lang.modules" %% "scala-xml" % "1.0.6") :: Nil
  }
}

```

You can migrate to build.sbt:

```

val shared = Seq(
  organization := "com.example",
  version      := "0.1.0",
  scalaVersion := "2.12.1"
)

lazy val helloRoot = (project in file("."))
  .aggregate(core)
  .enablePlugins(XyzPlugin)
  .settings(
    shared,
    name := "Hello",
    xyzSkipWrite := true
  )

lazy val core = (project in file("core"))
  .enablePlugins(XyzPlugin)
  .settings(
    shared,
    name := "hello-core",
    description := "Core interfaces",
  )

```

```

    libraryDependencies += scalaXml.value
  )

  def scalaXml = Def.setting {
    scalaBinaryVersion.value match {
      case "2.10" => Nil
      case _      => ("org.scala-lang.modules" %% "scala-xml" % "1.0.6") :: Nil
    }
  }
}

```

1. Rename `project/Build.scala` to `build.sbt`.
2. Remove import statements `import sbt._`, `import Keys._`, and any auto imports.
3. Move all of the inner definitions (like `shared`, `helloRoot`, etc) out of the object `HelloBuild`, and remove `HelloBuild`.
4. Change `Project(...)` to `(project in file("x"))` style, and call its `settings(...)` method to pass in the settings. This is so the auto plugins can reorder their setting sequence based on the plugin dependencies. `name` setting should be set to keep the old names.
5. Remove `Defaults.defaultSettings` out of `shared` since these settings are already set by the built-in auto plugins, also remove `xyz.XyzPlugin.projectSettings` out of `shared` and call `enablePlugins(XyzPlugin)` instead.

**Note:** Build traits is deprecated, but you can still use `project/*.scala` file to organize your build and/or define ad-hoc plugins. See [Organizing the build](#).

See [sbt 1.0 roadmap and beta-1](#) for scheduled timeline.

## sbt 1.0.0-RC2

This is the RC-2 release of sbt 1.0.

### Features, fixes, changes with compatibility implications

- Many of the case classes are replaced with pseudo case classes generated using Contraband. Migrate `.copy(foo = xxx)` to `withFoo(xxx)`.
- sbt 1.0 uses Scala 2.12 for build definitions and plugins. This also requires JDK 8.
- Non-auto `sbt.Plugin` trait is dropped. Please migrate to `AutoPlugin`. Auto plugins are easier to configure, and work better with each other.
- sbt 0.12 style `Build` trait that was deprecated in sbt 0.13.12, is removed. Please [migrate to build.sbt](#). Auto plugins and `Build` trait do not work well together, and its feature is now largely subsumed by multi-project `build.sbt`.

- sbt 0.12 style `Project(...)` constructor is restricted down to two parameters. This is because `settings` parameter does not work well with Auto Plugins. Use `project` instead.
- sbt 0.12 style key dependency operators `<<=`, `<+=`, `<++=` are removed. Please [migrate to `:=`, `+=`, and `++=`](#). These operators have been sources of confusion for many users, and have long been removed from 0.13 docs, and have been formally deprecated since sbt 0.13.13.
- Zinc 1 drops support for Scala 2.9 and earlier. Scala 2.10 must use 2.10.2 and above. Scala 2.11 must use 2.11.2 and above. (latest patch releases are recommended)
- `config("tooling")` must be directly assigned to a *capitalized* `val`, like `val Tooling = config("tooling")`. This captures the lhs identifier into the configuration so we can use it from the shell later.
- Changes `publishTo` and `otherResolvers` from `SettingKeys` to `TaskKeys`. [#2059/#2662](#) by [@dwijnand](#)[[@dwijnand](#)]
- `Path.relativeFile(baseFile, file)` is renamed to `IO.relativeFile(baseFile, file)`.
- `PathFinder`'s `.***` method is renamed to `.allPaths` method.
- `PathFinder.x_!(mapper)` is moved to `def pair` on `PathFinder`.
- Drops sbt 0.12 style hyphen-separated key names (use `publishLocal` instead of `publish-local`).
- Renames early command feature from `--<command>` to `early(<command>)`.
- Log options `-error`, `-warn`, `-info`, `-debug` are added as shorthand for `"early(error)"` etc.
- `sbt.Process` and `sbt.ProcessExtra` are dropped. Use `scala.sys.process` instead.
- `incOptions.value.withNameHashing(...)` option is removed because name hashing is always on.
- `TestResult.Value` is now called `TestResult`.
- The scripted plugin is cross-versioned now, so you must use `%%` when depending on it
- Removes the `settingsSets` method from `Project` (along with `add/setSbtFiles`).
- Drops deprecated `InputTask` `apply` method and `inputTask` DSL method. Use `Def.inputTask` and `Def.spaceDelimited().parsed`.
- Drops deprecated `ProjectReference` implicit lifts. Use `RootProject(<uri>)`, `RootProject(<file>)` or `LocalProject(<string>)`.
- Drops deprecated `seq(..)` DSL method. Use `Seq` or pass in the settings without wrapping.
- Drops deprecated `File/Seq[File]` setting enrichments. Use `.value` and `Def.setting`.
- Drops deprecated `SubProcess` `apply` overload. Use `SubProcess(ForkOptions(runJVMOptions = ..))`.
- Drops `toError(opt: Option[String]): Unit` (equivalent to `opt`



`foreach sys.error);` if used to wrap `ScalaRun#run` then the replacement is `scalaRun.run(...).failed foreach (sys.error _.getMessage)`

- A number of the methods on `sbt.Path` (such as `relativeTo` and `rebase` and `flat`) are now no longer in the default namespace by virtue of being mixed into the `sbt` package object. Use `sbt.io.Path` to access them again.
- sbt 1.0 renames `Global` as scope component to `Zero` to disambiguate from `GlobalScope`. [\[@eed3si9n\]](#)[\[@eed3si9n\]](#)
- sbt 1.0 uses `ConfigRef` in places where `String` was used to reference configuration, such as `update.value.configuration(...)`. Pass in `Configuration`, which implicitly converts to `ConfigRef`.
- Changes `sourceArtifactTypes` and `docArtifactTypes` from `Set[String]` to `Seq[String]` settings.

The Scala Center is working with Lightbend to provide [an automatic migration tool][sbt-migration-rewrites].

## Features

- New incremental compiler called Zinc 1. Details below.
- The interactive shell is adds network API. Details below.

## Fixes

- Fixes test content log not showing up. [#3198/utl#80](#) by [\[@eed3si9n\]](#)[\[@eed3si9n\]](#)
- Fixes confusing log about “Unable to parse”. [lm#98](#) by [\[@jvican\]](#)[\[@jvican\]](#)
- Fixes `console` task. [zinc#295](#) by [\[@dwijnand\]](#)[\[@dwijnand\]](#)
- Fixes spurious recompilations when unrelated constructor changes. [zinc#288](#) by [\[@smarter\]](#)[\[@smarter\]](#)
- Fixes `restligeist` macro for old operators. [#3218](#) by [\[@eed3si9n\]](#)[\[@eed3si9n\]](#)
- Fixes task caching of `update` task. [#3233](#) by [\[@eed3si9n\]](#)[\[@eed3si9n\]](#)
- Fixes `ncurses-JLine` issue by updating to JLine 2.14.4. [util#81](#) by [\[@Rogach\]](#)[\[@Rogach\]](#)

## Improvements

- Scala Center contributed a Java-friendly Zinc API. This was a overhaul of the Zinc internal API for a good Scala integration with other build tools. [zinc#304](#) by [\[@jvican\]](#)[\[@jvican\]](#)
- Scala Center contributed a binary format for Zinc’s internal storage. See below
- Scala Center contributed static validation of `build.sbt`. See below
- Library management API and parallel artifact download. See below.

- The startup log level is dropped to `-error` in script mode using `scalas`. [#840](#) by [@eed3si9n](#)[\[@eed3si9n\]](#)
- Replace cross building support with `sbt-doge`. This allows builds with projects that have multiple different combinations of cross scala versions to be cross built correctly. The behaviour of `++` is changed so that it only updates the Scala version of projects that support that Scala version, but the Scala version can be post fixed with `!` to force it to change for all projects. A `-v` argument has been added that prints verbose information about which projects are having their settings changed along with their cross scala versions. [#2613](#) by [@jroper](#)[\[@jroper\]](#)
- `IvyLoggingLevel` is dropped to `UpdateLogging.Quiet` when CI environment is detected. [@eed3si9n](#)[\[@eed3si9n\]](#)
- Add logging of the name of the different `build.sbt` (matching `*.sbt`) files used. [#1911](#) by [@valydia](#)[\[@valydia\]](#)
- Add the ability to call `aggregate` for the current project inside a build sbt file. By [@xuwei-k](#)[\[@xuwei-k\]](#)
- Add new global setting `asciiGraphWidth` that controls the maximum width of the ASCII graphs printed by commands like `inspect tree`. Default value corresponds to the previously hardcoded value of 40 characters. By [@RomanIakovlev](#)[\[@RomanIakovlev\]](#).
- Revamped documentation for [Scopes](#), and added [Scope Delegation](#). [@eed3si9n](#)[\[@eed3si9n\]](#)
- Ports `sbt-cross-building`'s `^` and `^^` commands for plugin cross building. See below.
- Adds support for cross-versioned exclusions. [#1518/lm#88](#) by [@jvican](#)[\[@jvican\]](#)
- Adds new offline mode to the Ivy-based library management. [lm#92](#) by [@jvican](#)[\[@jvican\]](#)
- A number of features related to dependency locking. See below.
- Improved eviction warning presentation. See below.
- A better main class detection. [zinc#287](#) by [@smarter](#)[\[@smarter\]](#)
- For faster startup, sbt will use Java reflection to discover `autoImport`. [#3115](#) by [@jvican](#)[\[@jvican\]](#)
- For faster startup, reuse the same global instance for parsing. [#3115](#) by [@jvican](#)[\[@jvican\]](#)
- Adds `InteractionService` from `sbt-core-next` to keep compatibility with sbt 0.13. [#3182](#) by [@eed3si9n](#)[\[@eed3si9n\]](#)
- Adds new `WatchService` that abstracts `PollingWatchService` and Java NIO. [io#47](#) by [@Duhemm](#)[\[@Duhemm\]](#) on behalf of The Scala Center.
- Adds variants of `IO.copyFile` and `IO.copyDirectory` that accept `sbt.io.CopyOptions()`. See below for details.
- `Path.directory` and `Path.contentOf` are donated from `sbt-native-packager` [io#38](#) by [@muuki88](#)[\[@muuki88\]](#)
- `ApiDiff` feature used to debug Zinc uses Scala implementation borrowed

from Dotty. [zinc#346](#) by [\[@Krever\]](#)[\[@Krever\]](#)

- In Zinc internal, make ExtractAPI use perRunCaches. [zinc#347](#) by [\[@gheine\]](#)[\[@gheine\]](#)

## Internals

- Adopted Scalafmt for formatting the source code using neo-scalafmt.
- Scala Center contributed a redesign of the scripted test framework that has batch mode execution. Scripted now reuses the same sbt instance to run sbt tests, which reduces the CI build times by 50% [#3151](#) by [\[@jvican\]](#)[\[@jvican\]](#)
- sbt 1.0.0-M6 is built using sbt 1.0.0-M5. [#3184](#) by [\[@dwijnand\]](#)[\[@dwijnand\]](#)

## Details of major changes

### Zinc 1: Class-based name hashing

A major improvement brought into Zinc 1.0 by Grzegorz Kossakowski (commissioned by Lightbend) is class-based name hashing, which will speed up the incremental compilation of Scala in large projects.

Zinc 1.0's name hashing tracks your code dependencies at the class level, instead of at the source file level. The GitHub issue [sbt/sbt#1104](#) lists some comparisons of adding a method to an existing class in some projects:

ScalaTest	AndHaveWord class:	Before 49s, After 4s (12x)
Specs2	OptionResultMatcher class:	Before 48s, After 1s (48x)
scala/scala	Platform class:	Before 59s, After 15s (3.9x)
scala/scala	MatchCodeGen class:	Before 48s, After 17s (2.8x)

This depends on some factors such as how your classes are organized, but you can see 3x ~ 40x improvements. The reason for the speedup is because it compiles fewer source files than before by untangling the classes from source files. In the example adding a method to scala/scala's Platform class, sbt 0.13's name hashing used to compile 72 sources, but the new Zinc compiles 6 sources.

### Zinc API changes

- Java classes under the `xsbti.compile` package such as `IncOptions` hides the constructor. Use the factory method `xsbti.compile.Foo.of(...)`.
- Renames `ivyScala: IvyScala` key to `scalaModuleInfo: ScalaModuleInfo`.
- `xsbti.Reporter#log(...)` takes `xsbti.Problem` as the parameter. Call `log(problem.position, problem.message, problem.severity)` to delegate to the older `log(...)`.

- `xsbi.Maybe`, `xsbti.F0`, and `sxbti.F1` are changed to corresponding Java 8 classes `java.util.Optional`, `java.util.Supplier` and `java.util.Function`.
- Removes unused “resident” option. [zinc#345](#) by [@lukeindykiewicz](#)[@lukeindykiewicz](#)

## sbt server: JSON API for tooling integration

sbt 1.0 includes server feature, which allows IDEs and other tools to query the build for settings, and invoke commands via a JSON API. Similar to the way that the interactive shell in sbt 0.13 is implemented with `shell` command, “server” is also just `shell` command that listens to both human input and network input. As a user, there should be minimal impact because of the server.

In March 2016, we [rebooted](#) the “server” feature to make it as small as possible. We worked in collaboration with JetBrains’ [@jastice](#) who works on IntelliJ’s sbt interface to narrow down the feature list. sbt 1.0 will not have all the things we originally wanted, but in the long term, we hope to see better integration between IDE and sbt ecosystem using this system. For example, IDEs will be able to issue the compile task and retrieve compiler warning as JSON events:

```
{"type":"xsbti.Problem","message":{"category":"","severity":"Warn","message":"a pure express
```

Another related feature that was added is the `bgRun` task which, for example, enables a server process to be run in the background while you run tests against it.

**Static validation of build.sbt** sbt 1.0 prohibits `.value` calls inside the bodies of if expressions and anonymous functions in a task, `@sbtUnchecked` annotation can be used to override the check.

The static validation also catches if you forget to call `.value` in a body of a task.

[#3216](#) and [#3225](#) by [@jvican](#)[@jvican](#)

**Eviction warning presentation** sbt 1.0 improves the eviction warning presentation.

Before:

```
[warn] There may be incompatibilities among your library dependencies.
[warn] Here are some of the libraries that were evicted:
[warn] * com.google.code.findbugs:jsr305:2.0.1 -> 3.0.0
[warn] Run 'evicted' to see detailed eviction warnings
```

After:

```
[warn] Found version conflict(s) in library dependencies; some are suspected to be binary incompati
[warn]
[warn]      * com.typesafe.akka:akka-actor_2.12:2.5.0 is selected over 2.4.17
[warn]      +- de.heikoseeberger:akka-log4j_2.12:1.4.0          (depends on 2.5.0)
[warn]      +- com.typesafe.akka:akka-parsing_2.12:10.0.6       (depends on 2.4.17)
[warn]      +- com.typesafe.akka:akka-stream_2.12:2.4.17 ()      (depends on 2.4.17)
[warn]
[warn] Run 'evicted' to see detailed eviction warnings
```

[#3202](#) by [@eed3si9n](#)[\[@eed3si9n\]](#)

**sbt-cross-building** [@jrudolph](#)[\[@jrudolph\]](#)'s `sbt-cross-building` is a plugin author's plugin. It adds cross command `^` and `sbtVersion` switch command `^^`, similar to `+` and `++`, but for switching between multiple sbt versions across major versions. `sbt 0.13.16` merges these commands into `sbt` because the feature it provides is useful as we migrate plugins to `sbt 1.0`.

To switch the `sbtVersion` in `pluginCrossBuild` from the shell use:

```
^^ 1.0.0-M5
```

Your plugin will now build with `sbt 1.0.0-M5` (and its Scala version 2.12.2).

If you need to make changes specific to a sbt version, you can now include them into `src/main/scala-sbt-0.13`, and `src/main/scala-sbt-1.0.0-M5`, where the binary sbt version number is used as postfix.

To run a command across multiple sbt versions, set:

```
crossSbtVersions := Vector("0.13.15", "1.0.0-M5")
```

Then, run:

```
^ compile
```

[#3133](#) by [@eed3si9n](#)[\[@eed3si9n\]](#) (forward ported from 0.13.16-M1)

**CopyOptions** `sbt IO 1.0` add variant of `IO.copyFile` and `IO.copyDirectory` that accept `sbt.io.CopyOptions()`. `CopyOptions()` is an example of pseudo case class similar to the builder pattern.

```
import sbt.io.{ IO, CopyOptions }

IO.copyDirectory(source, target)

// The above is same as the following
IO.copyDirectory(source, target, CopyOptions()
  .withOverwrite(false)
  .withPreserveLastModified(true)
  .withPreserveExecutable(true))
```

[io#53](#) by [@dwijnand](#)[@dwijnand](#)

**Library management API and parallel artifact download** sbt 1.0 adds Library management API co-authored by Eugene Yokota ([@eed3si9n](#)[@eed3si9n](#)) from Lightbend and Martin Duhem ([@Duhemm](#)[@Duhemm](#)) from Scala Center. This API aims to abstract Apache Ivy as well as alternative dependency resolution engines Ivy, cached resolution, and Coursier.

Parallel artifact download for Ivy engine was contributed by Jorge ([@jvican](#)[@jvican](#)) from Scala Center. It also introduces Gigahorse OkHttp as the Network API, and it uses Square OkHttp for artifact download as well.

[lm#124](#) by [@eed3si9n](#)[@eed3si9n](#)/[@Duhemm](#)[@Duhemm](#), [lm#90](#) by [@jvican](#)[@jvican](#)/[@jsuereth](#)[@jsuereth](#) and [lm#104](#) by [@eed3si9n](#)[@eed3si9n](#).

**Binary format for Zinc's internal storage** Jorge ([@jvican](#)[@jvican](#)) from Scala Center contributed a binary format for Zinc's internal storage using Google Protocol Buffer. The new format provides us with three main advantages:

1. Backwards and forwards binary compatibility at the analysis format level.
2. Faster (1.5 ~ 2x) serialization/deserialization of the analysis file.
3. Provides a better way to make the analysis file machine-independent.

[zinc#351](#) by [@jvican](#)[@jvican](#)

**Dependency locking** Dependency locking feature is still in progress, but Jorge ([@jvican](#)[@jvican](#)) from Scala Center has added a number of related features that would should work together to allow dependency locking.

- Frozen mode to the Ivy-based library management, which makes sure that the resolution is always intransitive. [lm#100](#)
- Adds support to specify a resolver for dependencies. [lm#97](#)
- Adds “managed checksums”, which tells Ivy to skip the checksum process. [lm#111](#)

## notes

- <https://github.com/sbt/sbt/compare/v1.0.0-M6...v1.0.0-RC2>
- <https://github.com/sbt/zinc/compare/v1.0.0-X16...v1.0.0-X20>
- <https://github.com/sbt/librarymanagement/compare/v1.0.0-X15...v1.0.0-X18>
- <https://github.com/sbt/util/compare/v1.0.0-M24...v1.0.0-M28>
- <https://github.com/sbt/io/compare/v1.0.0-M11...v1.0.0-M13>

## sbt 0.13.5+ Technology Previews

sbt 0.13.5+ releases of sbt are technology previews of what's to come to sbt 1.0 with enhancements like [auto plugins](#), launcher enhancements for sbt server, defined in the sbt-remote-control project, and other necessary API changes.

These releases maintain binary compatibility with plugins that are published against sbt 0.13.0, but add new features in preparation for sbt 1.0. The tech previews allow us to test new ideas like auto plugins and performance improvements on dependency resolution; the build users can try new features without losing the existing plugin resources; and plugin authors can gradually migrate to the new plugin system before sbt 1.0 arrives.

## sbt 0.13.15

### Fixes with compatibility implications

- sbt 0.13.15 removes the Maven version range when possible. See below.

### Improvements

- Adds preliminary compatibility with JDK 9. Using this requires 0.13.15+ launcher. [#2951/143](#) by [@retronym](#)[\[@retronym\]](#)
- Adds “local-preloaded” repository for offline installation. See below.
- Notifies and enables users to stay in sbt’s shell on the warm JVM by hitting [ENTER] while sbt is running. [#2987/#2996](#) by [@dwijnand](#)[\[@dwijnand\]](#)
- Adds an `Append` instance to support `sourceGenerators += Def.task { ... }`, instead of needing `.taskValue`. [#2943](#) by [@eed3si9n](#)[\[@eed3si9n\]](#)
- Writes out the sbt.version in `project/build.properties` if it is missing. [#754/#3025](#) by [@dwijnand](#)[\[@dwijnand\]](#)
- XML generated by `JUnitXmlTestsListener` now correctly flags ignored, skipped and pending tests. [#2198/#2854](#) by [@ashleymercer](#)[\[@ashleymercer\]](#)

- When sbt detects that the project is compiled with dotty, it now automatically sets `scalaCompilerBridgeSource` correctly, this reduces the boilerplate needed to make a dotty project. Note that dotty support in sbt is still considered experimental and not officially supported, see [dotty.epfl.ch](http://dotty.epfl.ch) for more information. [#2902](#) by [@smarter](#)[@smarter](#)
- Updates sbt new's reference implementation to Giter8 0.7.2.
- ScriptedPlugin: Add the ability to paginate scripted tests. It is now possible to run a subset of scripted tests in a directory at once, for example: `scripted source-dependencies/*1of3` Will create three pages and run page 1. This is especially useful when running scripted tests on a CI, to benefit from the available parallelism. [3013](#) by [@smarter](#)[@smarter](#)

## Bug fixes

- Fixes `.triggeredBy/.storeAs/etc` not working when using `:=` and `.value` macros. [#1444/#2908](#) by [@dwijnand](#)[@dwijnand](#)
- Fixes Ctrl-C not working on Windows by bumping up JLine. [#1855](#) by [@eed3si9n](#)[@eed3si9n](#)
- Fixes regressions in sbt 0.13.11 - 0.13.13 that processed build-level keys incorrectly. [#2851/#2460](#) by [@eed3si9n](#)[@eed3si9n](#)
- Fixes a regression in sbt 0.13.12 that was misfiring Scala version enforcement when configuration does not extend `Compile`. [#2827/#2786](#) by [@eed3si9n](#)[@eed3si9n](#)
- Fixes Scala binary version checking misfiring on configurations that do not extend `Compile`. [#2828/#1466](#) by [@eed3si9n](#)[@eed3si9n](#)
- Fixes script mode ignoring quotation. [#2551](#) by [@ekrich](#)[@ekrich](#)
- Fixes `IllegalStateException` that Ivy gets into sometimes. [#2827/#2015](#) by [@eed3si9n](#)[@eed3si9n](#)
- Fixes null `sourceFile` causing NPE. [#2766](#) by [@avdv](#)[@avdv](#)
- Fixes version parsing in validation. [#3011](#) by [@eed3si9n](#)[@eed3si9n](#)
- Fixes `Package.makeJar` deleting directory recursively. [#3014](#) by [@larsrh](#)[@larsrh](#)

## Maven version range improvement

Previously, when the dependency resolver (Ivy) encountered a Maven version range such as `[1.3.0,)` it would go out to the Internet to find the latest version. This would result to a surprising behavior where the eventual version keeps changing over time *even when there's a version of the library that satisfies the range condition*.

Starting sbt 0.13.15, some Maven version ranges would be replaced with its lower bound so that when a satisfactory version is found in the dependency



graph it will be used. You can disable this behavior using the JVM flag `-Dsbtt.modversionrange=false`.

[#2954](#) by [\[@eed3si9n\]](#)[\[@eed3si9n\]](#)

## Offline installation

sbt 0.13.15 adds two new repositories called “local-preloaded-ivy” and “local-preloaded” that point to `~/.sbt/preloaded/`. The purpose for the repositories is to preload them with sbt artifacts so the installation of sbt will not require access to the Internet.

This also improves the startup time of sbt when you first run it since the resolution happens off of a local-preloaded repository.

[#2993](#)/[#145](#) by [\[@eed3si9n\]](#)[\[@eed3si9n\]](#)

## Notes

No changes should be necessary to your project definition and all plugins published for sbt 0.13.{x|x<14} should still work.

See [Migrating from sbt 0.12.x](#) for details on the old operator deprecation.

Special thanks to the contributors for making this release a success. According to `git shortlog -sn --no-merges v0.13.13..0.13.15`, compared to 0.13.13, there were 64 (non-merge) commits, by eleven contributors: Eugene Yokota, Dale Wijnand, Guillaume Martres, Jason Zaugg, Lars Hupel, Petro Verkhogliad, Eric Richardson, Claudio Bley, Haochi Chen, Paul Draper, Ashley Mercer. Thank you!

## sbt 0.13.14

sbt 0.13.14 did not happen due a bug that was found after the artifact was published.

## sbt 0.13.13

### Fixes with compatibility implications

- Deprecates the old sbt 0.12 DSL, to be removed in sbt 1.0. See below for more details.
- The `.value` method is deprecated for input tasks. Calling `.value` on an input key returns an `InputTask[A]`, which is completely unintuitive and often results in a bug. In most cases `.evaluated` should be called,

which returns `A` by evaluating the task. Just in case `InputTask[A]` is needed, `.inputTaskValue` method is now provided. [#2709](#) by [@eed3si9n](#)

- sbt 0.13.13 renames the early command `--<command>` that was added in 0.13.1 to `early(<command>)`. This fixes the regression [#1041](#). For backward compatibility `--error`, `--warn`, `--info`, and `--debug` will continue to function during the 0.13 series, but it is strongly encouraged to migrate to the single hyphen options: `-error`, `-warn`, `-info`, and `-debug`. [#2742](#) by [@eed3si9n](#)
- Improve `show` when key returns a `Seq` by showing the elements one per line. Disable with `-Dsbt.disable.show.seq=true`. [#2755](#) by [@eed3si9n](#)
- Recycles classloaders to be anti-hostile to JIT. Disable with `-Dsbt.disable.interface.classloader.ca`. [#2754](#) by [@retronym](#)

## Improvements

- Adds `new` command and `templateResolverInfos`. See below for more details.
- Auto plugins can add synthetic subprojects. See below for more details.
- Supports wildcard exclusions in POMs [#1431](#)/[sbt/ivy#22](#)/[#2731](#) by [@jtgrabowski](#)
- Adds the ability to call `aggregateProjects(..)` for the current project inside a build sbt file. [#2682](#) by [@xuwei-k](#)
- Adds `.jvmopts` support to the launcher script. [sbt/sbt-launcher-package#111](#) by [@fommil](#)
- Adds `.java-version` support to the Windows launcher script. [sbt/sbt-launcher-package#111](#) by [@fommil](#)
- The startup log level is dropped to `-error` in script mode using `scalas`. [#840](#)/[#2746](#) by [@eed3si9n](#)
- Adds `CrossVersion.patch` which sits in between `CrossVersion.binary` and `CrossVersion.full` in that it strips off any trailing `-bin-...` suffix which is used to distinguish variant but binary compatible Scala toolchain builds. Most things which are currently `CrossVersion.full` (eg. Scala compiler plugins, esp. macro-paradise) would be more appropriately depended on as `CrossVersion.patch` from this release on.

## Bug fixes

- Fixes a regression in sbt 0.13.12 that wrongly reports build-level keys to be ambiguous. [#2707](#)/[#2708](#) by [@Duhemm](#)
- Fixes a regression in sbt 0.13.12 that was misfiring Scala version enforcement when an alternative `scalaOrganization` is set. [#2703](#) by [@milessabin](#)

- Fixes `Tags.ForkedTestGroup`. [#2677/#2681](#) by [\[@pauldraper\]](#)[\[@pauldraper\]](#)
- Fixes forked tests being reported as successful when the test harness fails. [#2442/#2722/#2730](#) by [\[@eed3si9n\]](#)[\[@eed3si9n\]](#)/[\[@dwijnand\]](#)[\[@dwijnand\]](#)
- Fixes incorrect installation path on Windows. [sbt/sbt-launcher-package#110](#) by [\[@dwijnand\]](#)[\[@dwijnand\]](#)

## new command and templateResolverInfos

sbt 0.13.13 adds a `new` command, which helps create new build definitions. The `new` command is extensible via a mechanism called the template resolver. A template resolver pattern matches on the passed in arguments after `new`, and if it's a match it will apply the template.

As a reference implementation, template resolver for [Giter8](#) is provided. For instance:

```
sbt new eed3si9n/hello.g8
```

will run [eed3si9n/hello.g8](#) using Giter8.

[#2705](#) by [\[@eed3si9n\]](#)[\[@eed3si9n\]](#)

## Synthetic subprojects

sbt 0.13.13 adds support for `AutoPlugins` to define subprojects programmatically, by overriding the `extraProjects` method:

```
import sbt._, Keys._

object ExtraProjectsPlugin extends AutoPlugin {
  override def extraProjects: Seq[Project] =
    List("foo", "bar", "baz") map generateProject

  def generateProject(id: String): Project =
    Project(id, file(id))
      .settings(
        name := id
      )
}
```

In addition, subprojects may be derived from an existing subproject by overriding `derivedProjects`:

```
import sbt._, Keys._

object DerivedProjectsPlugin extends AutoPlugin {
  // Enable this plugin by default
  override def requires: Plugins = sbt.plugins.CorePlugin
  override def trigger = allRequirements

  override def derivedProjects(proj: ProjectDefinition[_]): Seq[Project] =
    // Make sure to exclude project extras to avoid recursive generation
    if (proj.projectOrigin != ProjectOrigin.DerivedProject) {
      val id = proj.id + "1"
      Seq(
        Project(id, file(id))
          .enablePlugins(DatabasePlugin)
      )
    }
    else Nil
}
```

[#2532](#)/[#2717](#)/[#2738](#) by [@eed3si9n](#)[\[@eed3si9n\]](#)

## Deprecate old sbt 0.12 DSL

The no-longer-documented operators `<=<`, `<+=`, and `<++=` and tuple enrichments are deprecated, and will be removed in sbt 1.0.

Generally,

```
task3 <=< (task1, task2) map { (t1, t2) => println(t1 + t2); t1 + t2 }
```

should migrate to

```
task3 := {
  println(task1.value + task2.value)
  task1.value + task2.value
}
```

Except for source generators, which requires task values:

```
sourceGenerators in Compile <+= buildInfo
```

This becomes:

```
sourceGenerators in Compile += buildInfo.taskValue
```

Another exception is input task:

```
run <=< docsRunSetting
```

This becomes:

```
run := docsRunSetting.evaluated
```

See [Migrating from sbt 0.12.x](#) for more details.

[#2716](#)/[#2763](#)/[#2764](#) by [\[@eed3si9n\]](#)[\[@eed3si9n\]](#) and [\[@dwijnand\]](#)[\[@dwijnand\]](#)

## sbt 0.13.12

### Fixes with compatibility implications

- By default the Scala toolchain artifacts are now transitively resolved using the provided `scalaVersion` and `scalaOrganization`. Previously a user specified `scalaOrganization` would not have affected transitive dependencies on, eg. `scala-reflect`. An Ivy-level mechanism is used for this purpose, and as a consequence the overriding happens early in the resolution process which might improve resolution times, and as a side benefit fixes [#2286](#). The old behavior can be restored by adding `ivyScala := { ivyScala.value map {_.copy(overrideScalaVersion = sbtPlugin.value)} }` to your build. [#2286](#)/[#2634](#) by [\[@milessabin\]](#)[milessabin](#)
- The Build trait is deprecated in favor of the `.sbt` format [#2530](#) by [\[@dwijnand\]](#)[\[@dwijnand\]](#)

### Improvements

- When `RecompileOnMacroDef` is enabled, sbt will now print out a info level log indicating that some sources are being recompiled because it's used from a source that contains a macro definition. Can be disabled with `incOptions := incOptions.value.withLogRecompileOnMacro(false)` [#2637](#)/[#2659](#) by [\[@eed3si9n\]](#)[\[@eed3si9n\]](#)/[\[@dwijnand\]](#)[\[@dwijnand\]](#)
- Adds Windows script support and native file extensions on Unix platforms. [#2603](#) by [\[@ekrich\]](#)[\[@ekrich\]](#)
- Improves loading time of large builds. [#2630](#) by [\[@eed3si9n\]](#)[\[@eed3si9n\]](#)
- Adds the ability to call `dependsOn` for the current project inside a `.sbt` file. [#2653](#) by [\[@anatolydwild\]](#)[\[@anatolydwild\]](#)

## Bug fixes

- Fixes a 0.13.11 regression: dependency resolution hitting Maven Central even with repository overrides. [#2519/#2569](#) by [\[@eed3si9n\]](#)[\[@eed3si9n\]](#)
- Fixes a 0.13.11 regression in incremental compiler: `IndexOutOfBoundsException` in `ExtractAPI` [#2497/#2557](#) by [\[@smarter\]](#)[\[@smarter\]](#)
- Fixes merged dependency descriptors dropping configuration specification. [#2002/#1500](#) by [\[@eed3si9n\]](#)[\[@eed3si9n\]](#)
- Fixes merged dependency descriptors creating non-existing artifacts. [#2431/#2500](#) by [\[@Duhemm\]](#)[\[@Duhemm\]](#)
- Fixes incremental compilation misses when macro expansion references another source. [#2560/#2563](#) by [\[@eed3si9n\]](#)[\[@eed3si9n\]](#)
- Fixes incremental compilation of package objects transitively in name hashing. [#2432/#2326](#) by [\[@gkossakowski\]](#)[\[@gkossakowski\]](#)
- Fixes incremental compilation relying on filename of package objects. [#2438](#) by [\[@Duhemm\]](#)[\[@Duhemm\]](#)
- Provides a workaround flag `incOptions := incOptions.value.withIncludeSynthToNameHashing(true)` for name hashing not including synthetic methods. This will not be enabled by default in sbt 0.13. It can also be enabled by passing `sbt.inc.include_synth=true` to JVM. [#2537](#) by [\[@eed3si9n\]](#)[\[@eed3si9n\]](#)
- Fixes tab completion for tasks defined in `AutoPlugin`'s `buildSettings` [#2460/#2469](#) by [\[@Duhemm\]](#)[\[@Duhemm\]](#)
- Fixes configuration merging during cached resolution. [#2435/#2513](#) by [\[@Duhemm\]](#)[\[@Duhemm\]](#)

## sbt 0.13.11

### Fixes with compatibility implications

- JCenter is now opt-in. A new setting `useJCenter` can be set to `true` to re-include it, as the first external resolver to find library dependencies. [#2217/#2467](#) by [\[@eed3si9n\]](#)[\[@eed3si9n\]](#)
- Adds `withInterProjectFirst` to the update option, which is enabled by default. When set to `true`, `inter-project` resolver will be prioritized above all resolvers and Ivy cache. [#1827](#) by [\[@eed3si9n\]](#)[\[@eed3si9n\]](#)
- Fixes update option's `withLatestSnapshots` so it handles modules without an artifact. This flag will be enabled by default. [#1514/#1616/#2313](#) by [\[@eed3si9n\]](#)[\[@eed3si9n\]](#)
- No longer passes `-J<flag>` options to the local Java compiler. [#1968/#2272](#) by [\[@Duhemm\]](#)[\[@Duhemm\]](#)
- Fixes auto imports for auto plugins in global configuration files. Because this is *not* source compatible with 0.13.x, the fix is enabled only when `sbt.global.autoimport` flag is `true`. [#2120/#2399](#) by [\[@timcharper\]](#)[\[@timcharper\]](#)

## Improvements

- Adds configurable compiler bridge. See below.
- Adds initial support for [Dotty](#). See below
- Adds settings for granular inter-project dependency tracking. See below.
- Scala version used by the build is updated to 2.10.6. [#2311](#) by [\[@eed3si9n\]](#)[\[@eed3si9n\]](#)
- If `publishMavenStyle` is `true`, `update` task warns when it sees in-transitive dependencies, which do not translate to Maven. [#2127](#) by [\[@jsuereth\]](#)[\[@jsuereth\]](#)
- Adds `Def.settings`, which facilitates mixing settings with seq of settings. See below.
- sbt Serialization is updated to 0.1.2. [#2117](#) by [\[@dwijnand\]](#)[\[@dwijnand\]](#)
- Hides the stack trace on compilation error in build definition. [#2071/#2091](#) by [\[@Duhemm\]](#)[\[@Duhemm\]](#)
- Makes the dummy `Logger.Null` public. [#2094](#) by [\[@pdalpra\]](#)[\[@pdalpra\]](#)
- Uses diagnostic classes to get lines contents in local Java compiler. [#2108/#2201](#) by [\[@fkorotkov\]](#)[\[@fkorotkov\]](#)
- Adds logging of `javaOptions`. [#2087/#2103](#) by [\[@pdalpra\]](#)[\[@pdalpra\]](#)
- Warns when `javaOptions` are defined but `fork` is set to `false`. [#2041/#2103](#) by [\[@pdalpra\]](#)[\[@pdalpra\]](#)
- Adds an `Append.Sequence` instance for `List` to allow `+=/++=` on `developers` setting. [#2107/#2114](#) by [\[@pdalpra\]](#)[\[@pdalpra\]](#)
- Drops `sealed` from the typeclasses in `Append`. [#2322](#) by [\[@dwijnand\]](#)[\[@dwijnand\]](#)
- Fixes compilation warnings in sbt's codebase, and other clean ups. [#2112/#2137/#2139/#2142](#) by [\[@pdalpra\]](#)[\[@pdalpra\]](#)
- Adds `localIfFile` to `MavenRepository`, to force artifacts to be copied to the cache. [#2172](#) by [\[@dwijnand\]](#)[\[@dwijnand\]](#)
- Adds `Resolver.bintrayIvyRepo(owner, repo)`. [#2285](#) by [\[@dwijnand\]](#)[\[@dwijnand\]](#)
- Non-static annotation changes are no longer tracked by the incremental compiler. [#2343](#) by [\[@romanowski\]](#)[\[@romanowski\]](#)
- Reduces the memory usage of API info extraction in the incremental compiler. [#2343](#) by [\[@adriaanm\]](#)[\[@adriaanm\]](#)
- Memory-related options can now be overridden individually via the `-J` options. [sbt/sbt-launcher-package#105](#)

## Bug fixes

- Fixes the false positive of inconsistent duplicate warnings. [#1933/#2258](#) by [\[@Duhemm\]](#)[\[@Duhemm\]](#)
- Fixes task scheduling performance on large builds by skipping checks in

- `sbt.Execute`. [#2302/#2303](#) by [[@jrudolph](#)][[@jrudolph](#)]
- Fixes changes in value classes by registering signatures of method before and after erasure. [#1171/#2261](#) by [[@Duhemm](#)][[@Duhemm](#)]
  - Updated Ivy to merge IVY-1526 fix. [sbt/ivy#14/#2118](#) by [[@jsuereth](#)][[@jsuereth](#)]
  - Fixes `updateClassifiers` downloading updated snapshot sources and docs. [#1750/sbt/ivy#17/#2163/sbt/ivy#18/#2186](#) by [[@dwijnand](#)][[@dwijnand](#)]
  - Fixes `updateClassifiers` on Ivy modules without `default` configuration. [#2264](#) by [[@eed3si9n](#)][[@eed3si9n](#)]/[[@Duhemm](#)][[@Duhemm](#)]
  - Updated `JLine` to version 2.13. [#1681/#2173](#)
  - Changing the value of a constant (final-static-primitive) field will now correctly trigger incremental compilation for downstream classes. This is to account for the fact that Java compilers may inline constant fields in downstream classes. [#1967/#2085](#) by [[@stuhod](#)][[@stuhod](#)]
  - Fixes classfile location detection. [#2214](#) by [[@stuhod](#)][[@stuhod](#)]
  - Fixes a few typos in keys descriptions. [#2092](#) by [[@pdalpra](#)][[@pdalpra](#)]
  - Avoids the use of `ListBuffer#readOnly`. [#2095](#) by [[@adriaanm](#)][[@adriaanm](#)]
  - Expands transitive dependency exclusions when using `sbt-maven-resolver-plugin` [#2109](#) by [[@jsuereth](#)][[@jsuereth](#)]
  - Fixes incremental compilation of traits by including private members into the API hash. [#2155/#2160](#) by [[@Duhemm](#)][[@Duhemm](#)]
  - Fixes name hashing by removing class private members from the hash. [#2324/#2325](#) by [[@gkossakowski](#)][[@gkossakowski](#)]
  - Fixes name hashing error messages. [#2158](#) by [[@stuhod](#)][[@stuhod](#)]
  - Adds more robustness to `tasks` and `settings` command. [#2192](#) by [[@DavidPerezIngeniero](#)][[@DavidPerezIngeniero](#)]
  - Fixes Java compilation inconsistencies between `sbt` and `javac` by always failing if the local Java compiler reported errors. [#2228/#2271](#) by [[@Duhemm](#)][[@Duhemm](#)]
  - Fixes `JavaErrorParser` to parse non-compile-errors [#2256/#2272](#) by [[@Duhemm](#)][[@Duhemm](#)]
  - Fixes launcher configuration to add `sbt-ivy-snapshots` repository to resolve nightly builds. [[@eed3si9n](#)][[@eed3si9n](#)]
  - Fixes performance issues during tree traversal in the incremental compiler. [#2343](#) by [[@adriaanm](#)][[@adriaanm](#)]
  - Fixes the tracking of self types and F-bounded existential types in the incremental compiler. [#2343](#) by [[@adriaanm](#)][[@adriaanm](#)]
  - Avoid CCE when scalac internally uses `compileLate`. [#2453](#) by [[@retronym](#)][[@retronym](#)]
  - Fixes the memory-related options overriding `SBT_OPTS`. [sbt/sbt-launcher-package#101](#) by [[@eed3si9n](#)][[@eed3si9n](#)]



## Configurable Scala compiler bridge

sbt 0.13.11 adds `scalaCompilerBridgeSource` setting to specify the compiler bridge source. This allows different implementation of the bridge for Scala versions, and also allows future versions of Scala compiler implementation to diverge. The source module will be retrieved using library management configured by `bootIvyConfiguration` task.

[#2106/#2197/#2336](#) by [\[@Duhemm\]](#)[\[@Duhemm\]](#)

## Dotty awareness

sbt 0.13.11 will assume that Dotty is used when `scalaVersion` starts with 0.. The built-in compiler bridge in sbt does not support Dotty, but a separate compiler bridge is being developed at [smarter/dotty-bridge](#) and an example project that uses it is available at [smarter/dotty-example-project](#).

[#2344](#) by [\[@smarter\]](#)[\[@smarter\]](#)

## Inter-project dependency tracking

sbt 0.13.11 adds `trackInternalDependencies` and `exportToInternal` settings. These can be used to control whether to trigger compilation of a dependent subprojects when you call `compile`. Both keys will take one of three values: `TrackLevel.NoTracking`, `TrackLevel.TrackIfMissing`, and `TrackLevel.TrackAlways`. By default they are both set to `TrackLevel.TrackAlways`.

When `trackInternalDependencies` is set to `TrackLevel.TrackIfMissing`, sbt will no longer try to compile internal (inter-project) dependencies automatically, unless there are no `*.class` files (or JAR file when `exportJars` is `true`) in the output directory. When the setting is set to `TrackLevel.NoTracking`, the compilation of internal dependencies will be skipped. Note that the classpath will still be appended, and dependency graph will still show them as dependencies. The motivation is to save the I/O overhead of checking for the changes on a build with many subprojects during development. Here's how to set all subprojects to `TrackIfMissing`.

```
lazy val root = (project in file(".")).
  aggregate(...).
  settings(
    inThisBuild(Seq(
      trackInternalDependencies := TrackLevel.TrackIfMissing,
      exportJars := true
    ))
  )
```

The `exportToInternal` setting allows the dependee subprojects to opt out of the internal tracking, which might be useful if you want to track most subprojects except for a few. The intersection of the `trackInternalDependencies` and `exportToInternal` settings will be used to determine the actual track level. Here's an example to opt-out one project:

```
lazy val dontTrackMe = (project in file("dontTrackMe")).
  settings(
    exportToInternal := TrackLevel.NoTracking
  )
```

[#2266/#2354](#) by [@eed3si9n](#)[\[@eed3si9n\]](#)

### Def.settings

Using `Def.settings` it is now possible to nicely define settings as such:

```
val modelSettings = Def.settings(
  sharedSettings,
  libraryDependencies += foo
)
```

[#2151](#) by [@dwijnand](#)[\[@dwijnand\]](#)

### sbt 0.13.10

sbt 0.13.10 did not happen due a bug that was found after the artifact was published.

### sbt 0.13.9

#### Fixes with compatibility implications

- Starting 0.13.9, `crossScalaVersions` default value is fixed back to the older 0.12.x behavior. See below for details.
- Starting 0.13.9, the generated POM files no longer include dependencies on source or javadoc jars obtained via `withSources()` or `withJavadoc()`. See below for details.
- Scala version is bumped to 2.10.5. This brings in the fix for [SI-9027](#): XML node sequence literal bug. [#1666/#2068](#) by [@eed3si9n](#)[\[@eed3si9n\]](#)

## Improvements

- Adds `retrieveManaged` related improvements. See below for details.
- Adds `-=` and `--=` for settings and tasks, which are the opposites of `+=` and `++=`. [#1922](#) by [@dwijnand](#)[@dwijnand](#)
- Adds `inThisBuild`, similar to `inConfig`, to allow specifying multiple settings in `ThisBuild` scope. [#1847](#)/[#1989](#) by [@dwijnand](#)[@dwijnand](#)
- Adds a nicer `toString` to `SimpleCommand` to make it more human-friendly. [#1998](#)/[#2000](#) by [@dwijnand](#)[@dwijnand](#)
- Adds `forceUpdatePeriod` key, that takes values of `Option[FiniteDuration]`. If set, a full `update` will occur after that amount of time without needing to explicitly run the `update` task. By [@ajsquared](#)[@ajsquared](#)
- Updates `ForkError.getMessage()` to include exception's original name. [#2028](#) by [@kamilkloch](#)[@kamilkloch](#)
- Adds help message for `inspect actual`. [#1651](#)/[#1990](#) by [@dwijnand](#)[@dwijnand](#)
- Supports excluding tests in `testOnly/testQuick` with `-`, for example `-MySpec`. [#1970](#) by [@matthewfarwell](#)[@matthewfarwell](#)
- Adds more diagnostic info for underfined settings. [#2008](#)/[#2009](#) by [@DavidPerezIngeniero](#)[@DavidPerezIngeniero](#)
- Adds an `Extracted.runInputTask` helper to assist with imperatively executing input tasks. [#2006](#) by [@jroper](#)[@jroper](#)
- Renames `distinct` method on `PathFinder` to `distinctName`. [#1973](#) by [@eed3si9n](#)[@eed3si9n](#)
- Adds `distinctPath` method on `PathFinder`. [#1973](#) by [@eed3si9n](#)[@eed3si9n](#)

## Bug fixes

- Fixes memory/performance issue with cached resolution. See below.
- Correct incremental compile debug message for invalidated products [#1961](#) by [@jroper](#)[@jroper](#)
- Enables forced GC by default. See below.
- Fixes Maven compatibility to read `maven-metadata.xml`. See below.
- Captures errors on `help` command. [#1900](#)/[#1940](#) by [@DavidPerezIngeniero](#)[@DavidPerezIngeniero](#)
- Prevents history command(s) from going into an infinite loop [#1562](#) by [@PanAeon](#)[@PanAeon](#)
- Honors overwrite flag when publishing locally. [#1960](#) by [@asflierl](#)[@asflierl](#)
- Fixes a certain class of pom corruption that can occur in the presence of parent-poms. [#1856](#) by [@jsuereth](#)[@jsuereth](#)
- Adds dependency-level exclusions in the POM for project-level exclusions. [#1877](#)/[#2035](#) by [@dwijnand](#)[@dwijnand](#)

### **crossScalaVersions default value**

As of this fix `crossScalaVersions` returns to the behaviour present in 0.12.4 whereby it defaults to what `scalaVersion` is set to, for example if `scalaVersion` is set to "2.11.6", `crossScalaVersions` now defaults to `Seq("2.11.6")`.

Therefore when upgrading from any version between 0.13.0 and 0.13.8 be aware of this new default if your build setup depended on it.

[#1828/#1992](#) by [@dwijnand](#)[\[@dwijnand\]](#)

### **POM files no longer include certain source and javadoc jars**

When declaring library dependencies using the `withSources()` or `withJavadoc()` options, sbt was also including in the pom file, as dependencies, the source or javadoc jars using the default Maven scope. Such dependencies might be erroneously processed as they were regular jars by automated tools

[#2001/#2027](#) by [@cunei](#)[\[@cunei\]](#)

### **retrieveManaged related improvements**

sbt 0.13.9 adds `retrieveManagedSync` key that, when set to `true`, enables synchronizing retrieved to the current build by removed unneeded files.

It also adds `configurationsToRetrieve` key, that takes values of `Option[Set[Configuration]]`. If set, when `retrieveManaged` is true only artifacts in the specified configurations will be retrieved to the current build.

[#1950/#1987](#) by [@ajsquared](#)[\[@ajsquared\]](#)

### **Cached resolution fixes**

On a larger dependency graph, the JSON file growing to be 100MB+ with 97% of taken up by *caller* information. To make the matter worse, these large JSON files were never cleaned up.

sbt 0.13.9 filters out artificial or duplicate callers, which fixes `OutOfMemoryException` seen on some builds. This generally shrinks the size of JSON, so it should make the IO operations faster. Dynamic graphs will be rotated with directories named after `yyyy-mm-dd`, and stale JSON files will be cleaned up after few days.

sbt 0.13.9 also fixes a correctness issue that was found in the earlier releases. Under some circumstances, libraries that shouldn't have been evicted was being evicted. This occurred when library A1 depended on B2, but a newer A2 dropped

the dependency, and A2 and B1 are also in the graph. This is fixed by sorting the graph prior to eviction.

[#2030/#1721/#2014/#2046/#2097](#) by [\[@eed3si9n\]](#)[\[@eed3si9n\]](#)

## Force GC

[\[@cunei\]](#)[\[@cunei\]](#) in [#1223](#) discovered that sbt leaks PermGen when it creates classloaders to call Scala Compilers. sbt 0.13.9 will call GC on a set interval (default: 60s). It will also call GC right before cross building. This behavior can be disabled using by setting false to `forcegc` setting or `sbt.task.forcegc` flag.

[#1773](#) by [\[@eed3si9n\]](#)[\[@eed3si9n\]](#)

## Maven compatibility fix

To resolve dynamic versions such as `SNAPSHOT` and version ranges, the dependency resolution engine queries for the list of available versions. For Maven repositories, it was supposed to read `maven-metadata.xml` first, but because sbt customizes the repository layout for cross building, it has been falling back to screen scraping of the Apache directory listing. This problem surfaced as:

- Version range not working for artifacts hosted on Bintray. [#2005](#)
- Potentially other `SNAPSHOT` related issues.

sbt 0.13.9 fixes this by relaxing the Maven compatibility check, so it will read `maven-metadata.xml`. [#2075](#) by [\[@eed3si9n\]](#)[\[@eed3si9n\]](#)

## sbt 0.13.8

### Changes with compatibility implications

- Disable publishing on implicitly created root project by not enabling `IvyPlugin` by default (`-Dsbt.root.ivyplugin=true` will revert this behavior). [#1871/#1869](#) by [\[@dwijnand\]](#)[\[@dwijnand\]](#)
- Rolls back XML parsing workaround. See below.
- Enables cross-version support for Scala sources. See below.

### Improvements

- Adds Maven resolver plugin. See below.
- Adds project-level dependency exclusions. See below.
- Adds sequential tasks. See below.

- Discovered main classes will be sorted. [#1180](#) by [\[@kretes\]](#)[\[@kretes\]](#)
- Implemented a new mechanism of forking javac, whereby errors are captured. Also more likely to run in-process. [#1702](#) by [\[@jsuereth\]](#)[\[@jsuereth\]](#)
- `evicted` will display all evictions (including the ones not suspected of binary incompatibility). [#1615](#) by [\[@eed3si9n\]](#)[\[@eed3si9n\]](#)
- Better abstraction to track new kinds of dependencies for incremental compiler. [#1340](#) by [\[@Duhemm\]](#)[\[@Duhemm\]](#)
- Source dependency uses `--depth 1` for git clone. [#1787](#) by [\[@xuwei-k\]](#)[\[@xuwei-k\]](#)
- Facilitate nicer ways of declaring project settings. See below. [#1902](#) by [\[@dwijnand\]](#)[\[@dwijnand\]](#)

## Fixes

- Javac warnings are treated as warnings. [#1702/#875](#) by [\[@jsuereth\]](#)[\[@jsuereth\]](#)
- `compilerReporter` is fed to javac during incremental compilation. [#1542](#) by [\[@jsuereth\]](#)[\[@jsuereth\]](#)
- Ignores hidden build files from the build. [#1746](#) by [\[@j-keck\]](#)[\[@j-keck\]](#)
- Fixes build.sbt parsing of multiple import. [#1741](#) by [\[@ajozwik\]](#)[\[@ajozwik\]](#)
- Fixes ANSI escape code for overwriting lines on Windows. [#1771](#) by [\[@dwickern\]](#)[\[@dwickern\]](#)
- Adds null check in incremental compiler's type tree extraction. [#1754/#1655](#) by [\[@Duhemm\]](#)[\[@Duhemm\]](#)
- sbt doesn't honor Maven's uniqueVersions (use sbt-maven-resolver to fix). [#1322](#) by [\[@jsuereth\]](#)[\[@jsuereth\]](#)
- sbt doesn't see new SNAPSHOT dependency versions in local maven repos (use withLatestSnapshots + sbt-maven-resolver to fix) [#321](#) by [\[@jsuereth\]](#)[\[@jsuereth\]](#)
- Property in pom's version field results to wrong dependency resolution (use sbt-maven-resolver to fix). [#647](#) by [\[@jsuereth\]](#)[\[@jsuereth\]](#)
- Maven local resolver with parent POM (use sbt-maven-resolver). [#1616](#) by [\[@jsuereth\]](#)[\[@jsuereth\]](#)
- Fixes eviction warning being too noisy. [#1615](#) by [\[@eed3si9n\]](#)[\[@eed3si9n\]](#)
- Issues warning if multiple dependencies to a same library is found with different version. [#1634](#) by [\[@eed3si9n\]](#)[\[@eed3si9n\]](#)
- Removes "No main class detected" warning. [#1766](#) by [\[@eed3si9n\]](#)[\[@eed3si9n\]](#)
- Fixes sporadic ConcurrentModificationException from JUnitXmlTestsListener. [#1881](#) by [\[@aerskine\]](#)[\[@aerskine\]](#)
- Fixes handling of ANSI CSI codes. [#1885](#) by [\[@jsuereth\]](#)[\[@jsuereth\]](#)
- Exempt `org.scala-lang:scala-actors-migration` and `org.scala-lang:scala-pickling` from scala binary version checks. [#1818/#1899](#) by [\[@dwijnand\]](#)[\[@dwijnand\]](#)
- Fixes cached resolution handling of internal dependencies. [#1711](#) by

[@eed3si9n][@eed3si9n]

- Fixes cached resolution being too verbose. [#1752](#) by [@eed3si9n][@eed3si9n]
- Fixes cached resolution not evicting modules transitively. [#1760](#) by [@eed3si9n][@eed3si9n]

## Rolling back XML parsing workaround

sbt 0.13.7 implemented natural whitespace handling by switching `build.sbt` parsing to use Scala compiler, instead of blank line delimiting. We realized that some build definitions no longer parsed due to the difference in XML handling.

```
val a = <x/><y/>
val b = 0
```

At the time, we thought adding parentheses around XML nodes could work around this behavior. However, the workaround has caused [more issues](#), and since then we have realized that this is a compiler issue [SI-9027](#), so we have decided to roll back our workaround. In the meantime, if you have consecutive XML elements in your `build.sbt`, enclose them in `<xml:group>` tag, or parentheses.

```
val a = <xml:group><x/><y/></xml:group>
val b = 0
```

[#1765](#) by [@ajozwik][@ajozwik]

## Cross-version support for Scala sources

When `crossPaths` setting is set to `true` (it is `true` by default), sbt 0.13.8 will include `src/main/scala-<scalaBinaryVersion>/` to the `Compile` compilation in addition to `src/main/scala`. For example, it will include `src/main/scala-2.11/` for Scala 2.11.5, and `src/main/scala-2.9.3` for Scala 2.9.3. [#1799](#) by [@indrajitr][@indrajitr]

## Maven resolver plugin

sbt 0.13.8 adds an extension point in the dependency resolution to customize Maven resolvers. This allows us to write `sbt-maven-resolver` auto plugin, which internally uses Eclipse Aether to resolve Maven dependencies instead of Apache Ivy.

To enable this plugin, add the following to `project/maven.sbt` (or `project/plugin.sbt` the file name doesn't matter):

`addMavenResolverPlugin`

This will create a new `~/.ivy2/maven-cache` directory, which contains the Aether cache of files. You may notice some file will be re-downloaded for the new cache layout. Additionally, sbt will now be able to fully construct `maven-metadata.xml` files when publishing to remote repositories or when publishing to the local `~/.m2/repository`. This should help erase many of the deficiencies encountered when using Maven and sbt together.

#### Notes and known limitations:

- sbt-maven-resolver requires sbt 0.13.8 and above.
- The current implementation does not support Ivy-style dynamic revisions, such as “2.10.+” or “latest.snapshot”. This is a fixable situation, but the version range query and Ivy -> Maven version range translation code has not been migrated.
- The current implementation does not support Maven-style range revisions if found on transitive dependencies. [#1921](#)

[#1793](#) by [\[@jsuereth\]](#)[\[@jsuereth\]](#)

#### Project-level dependency exclusions

sbt 0.13.8 adds **experimental** project-level dependency exclusions:

```
excludeDependencies += "org.apache.logging.log4j"  
excludeDependencies += "com.example" %% "foo"
```

In the first example, all artifacts from the organization `"org.apache.logging.log4j"` are excluded from the managed dependency. In the second example, artifacts with the organization `"com.example"` and the name `"foo"` cross versioned to the current `scalaVersion` are excluded.

**Note:** This feature currently does not translate to `pom.xml`!

[#1748](#) by [\[@eed3si9n\]](#)[\[@eed3si9n\]](#)

#### Sequential tasks

sbt 0.13.8 adds a new `Def.sequential` function to run tasks under semi-sequential semantics. Here’s an example usage:



```

val testFile = settingKey[File]("")
val sideEffect0 = taskKey[File]("")
val sideEffect1 = taskKey[File]("")
val foo = taskKey[Unit]("")

lazy val root = project.
  settings(
    testFile := target.value / "test.txt",
    sideEffect0 := {
      val t = testFile.value
      IO.append(t, "0")
      t
    },
    sideEffect1 := {
      val t = testFile.value
      IO.append(t, "1")
      t
    },
    foo := Def.sequential(compile in Compile, sideEffect0, sideEffect1, test in Test).value
  )

```

Normally sbt's task engine will reorder tasks based on the dependencies among the tasks, and run as many tasks in parallel (See [Custom settings and tasks](#) for more details on this). `Def.sequential` instead tries to run the tasks in the specified order. However, the task engine will still deduplicate tasks. For instance, when `foo` is executed, it will only compile once, even though `test in Test` depends on compile. [#1817/#1001](#) by [@eed3si9n](#)[@eed3si9n](#)

### Nicer ways of declaring project settings

Now a `Seq[Setting[_]]` can be passed to `Project.settings` without the needs for “varargs expansion”, ie. `: _*`

Instead of:

```
lazy val foo = project settings (sharedSettings: _*)
```

It is now possible to do:

```
lazy val foo = project settings sharedSettings
```

Also, `Seq[Setting[_]]` can be declared at the same level as individual settings in `Project.settings`, for instance:

```
lazy val foo = project settings (
  sharedSettings,
  version := "1.0",
  someMoreSettings
)
```

[#1902](#) by [[@dwijnand](#)][[@dwijnand](#)]

## Bytecode Enhancers

sbt 0.13.8 adds an extension point whereby users can effectively manipulate java bytecode (.class files) *before* the incremental compiler attempts to cache the classfile hashes. This allows libraries like ebean to function with sbt without corrupting the compiler cache and rerunning compile every few seconds.

This splits the compile task into several subTasks:

1. **previousCompile**: This task returns the previously persisted **Analysis** object for this project.
2. **compileIncremental**: This is the core logic of compiling Scala/Java files together. This task actually does the work of compiling a project incrementally, including ensuring a minimum number of source files are compiled. After this method, all .class files that would be generated by scalac + javac will be available.
3. **manipulateBytecode**: This is a stub task which takes the **compileIncremental** result and returns it. Plugins which need to manipulate bytecode are expected to override this task with their own implementation, ensuring to call the previous behavior.
4. **compile**: This task depends on **manipulateBytecode** and then persists the **Analysis** object containing all incremental compiler information.

Here's an example of how to hook the new **manipulateBytecode** key in your own plugin:

```
manipulateBytecode in Compile := {
  val previous = (manipulateBytecode in Compile).value
  doManipulateBytecode(previous) // Note: This must return a new Compiler.CompileResult with ou
}
```

See [#1714](#) for the full details of the implementation.

## sbt 0.13.7

### Fixes with compatibility implications

- Maven artifact dependencies will limit their transitive dependencies to `Compile` rather than *every configuration* if no `master` configuration is found. [#1586](#) by [@jsuereth](#)[@jsuereth](#)
- The new natural whitespace handling parser is unable to cope with certain classes of Scala syntax. In particular, top-level pattern matches, or multi-value definitions are no longer supported.

Here are examples:

```
val x, y = project // BAD
val x = project    //
val y = project    // GOOD
```

### Improvements

- Natural whitespace handling. See below. [#1606](#) by [@rkrzewski](#)[@rkrzewski](#), [@ajozwik](#)[@ajozwik](#), and others at [@WarsawScala](#)[@WarsawScala](#)
- Adds support for publishing to a custom Maven local repository. See below. [#1589](#)/[#1600](#) by [@topping](#)[@topping](#)
- Adds circular dependency check. See below. [#1601](#) by [@eed3si9n](#)[@eed3si9n](#)
- Adds cached resolution (minigraph caching). See below. [#1631](#) by [@eed3si9n](#)[@eed3si9n](#)
- Allows the “-bin” Scala version suffix to specify a bincompat version. [#1573](#) by [@cunei](#)[@cunei](#)
- Adds support for publishing to file repositories specified in `~/.sbt/repositories`. [#1579](#) by [@copumpkin](#)[@copumpkin](#)
- Adds support for publishing to a Maven repository with file URLs. [#1618](#) by [@jsuereth](#)[@jsuereth](#)
- Don’t hardcode existing relations in `TextAnalysisFormat`. [#1572](#) by [@Duhemm](#)[@Duhemm](#)
- Adds `developers` key. [#1590](#) by [@jedesah](#)[@jedesah](#)
- Will warn when none or multiple main classes detected. [#1648](#) by [@kretes](#)[@kretes](#)

### Bug fixes

- Fixes issues with specifying `scalaHome`/`scalaInstance` and running tests. [#1584](#) by [@jsuereth](#)[@jsuereth](#)

- Fixes `StackOverflow` error in dependencies extraction with macro and name hashing. [#1563/#1642/#1237/#1544](#) by [@Duhemm](#)[@Duhemm](#)
- Fixes `set every`. [#1591/#1430](#) by [@cunei](#)[@cunei](#)
- Ivy no longer silently flops to `HttpClient` resolver when `httpClient` is on the classpath. [#1602](#) by [@jsuereth](#)[@jsuereth](#)
- Backports Ivy fix to not throw exceptions when modules are evicted. [#1607/#1598](#) by [@jsuereth](#)[@jsuereth](#)
- When resolving from a Maven repository, and unable to read `maven-metadata.xml` file (common given the divergence in Maven 3 and Ivy 2), we attempt to use `LastModified` timestamp in lieu of “published” timestamp. [#1611/#1618](#) by [@jsuereth](#)[@jsuereth](#)
- Fixes `NullPointerException` when using `ChainResolver` and Maven repositories. [#1611/#1618](#) by [@jsuereth](#)[@jsuereth](#)
- Fixes `Resolver`’s `url` method dropping `descriptorOptional` and `skipConsistencyCheck`. [#1621](#) by [@tmandke](#)[@tmandke](#)
- Revert `useLatestSnapshot` on `updateOptions` to default to `false`. Reverts chain resolver to previous behavior. [#1683](#) by [@jsuereth](#)[@jsuereth](#)

## Natural whitespace handling

Starting sbt 0.13.7, `build.sbt` will be parsed using a customized Scala parser. This eliminates the requirement to use blank line as the delimiter between each settings, and also allows blank lines to be inserted at arbitrary position within a block.

This feature can be disabled, if necessary, via the `-Dsbt.parser.simple=true` flag.

This feature was contributed by [\[Andrzej Jozwik \(@ajozwik\)\]\(https://github.com/ajozwik\)](#), [\[Rafał Krzewski \(@rkrzewski\)\]\(@rkrzewski\)](#) and others at [\[@WarsawScala\]\(@WarsawScala\)](#) inspired by Typesafe’s [\[@gkossakowski\]\(@gkossakowski\)](#) organizing multiple [meetups](#) and [hackathons](#) on how to patch sbt with the focus on this blank line issue. Dziękujemy! [#1606](#)

## Custom Maven local repository location

Maven local repository is now resolved from the first of:

- `<localRepository/>` element in `~/.m2/settings.xml`
- `<localRepository/>` element in `$M2_HOME/conf/settings.xml`, or
- the default of `~/.m2/repository` if neither of those configuration elements exist

If more Maven settings are required to be recovered, the proper thing to do is merge the two possible `settings.xml` files, then query against the element path of the merge. This code avoids the merge by checking sequentially.

[#1589/#1600](#) by [\[@topping\]](#)[\[@topping\]](#)

## Circular dependency

By default circular dependencies are warned, but they do not halt the dependency resolution. Using the following setting, circular dependencies can be treated as an error.

```
updateOptions := updateOptions.value.withCircularDependencyLevel(CircularDependencyLevel.Error)
```

[#1601](#) by [\[@eed3si9n\]](#)[\[@eed3si9n\]](#)

## Cached resolution (minigraph caching)

sbt 0.13.7 adds a new **experimental** update option called *cached resolution*, which replaces consolidated resolution:

```
updateOptions := updateOptions.value.withCachedResolution(true)
```

Unlike consolidated resolution, which only consolidated subprojects with identical dependency graph, cached resolution create an artificial graph for each direct dependency (minigraph) for all subprojects, resolves them independently, saves them into json file, and stitches the minigraphs together.

Once the minigraphs are resolved and saved as files, dependency resolution turns into a matter of loading json file from the second run onwards, which should complete in a matter of seconds even for large projects. Also, because the files are saved under a global `~/.sbt/0.13/dependency` (or what's specified by `sbt.dependency.base` flag), the resolution result is shared across all builds.

Breaking graphs into minigraphs allows partial resolution results to be shared, which scales better for subprojects with similar but slightly different dependencies, and also for making small changes to the dependencies graph over time. See [documentation on cached resolution](#) for more details.

[#1631](#) by [\[@eed3si9n\]](#)[\[@eed3si9n\]](#)

## sbt 0.13.6

### Fixes with compatibility implications

- Maven Central Repository, Java.net Maven 2 Repository, Typesafe Repository, and sbt Plugin repository now defaults to HTTPS. (See below)
- `ThisProject` used to resolve to the root project in a build even when it's place in `subproj/build.sbt`. sbt 0.13.6 fixes it to resolve to the sub project. [#1194/#1358](#) by [@dansanduleac](#)[@dansanduleac](#)
- Global plugins classpath used to be injected into every build. This will no longer be the case. [#1347/#1352](#) by [@dansanduleac](#)[@dansanduleac](#)
- Fixes `newer` command in scripted. [#1419](#) by [@jroper](#)[@jroper](#)
- Name hashing is enabled by default. `inc.Analysis.empty` also defaults to the one compatible with name hashing. [#1546](#) by [@gkossakowski](#)[@gkossakowski](#)

### Improvements

- Derived settings can replace previously-defined but non-default settings. [#1036](#) by [@dansanduleac](#)[@dansanduleac](#)
- Sorts setting key names in the inspect tree view. [#1313](#) by [@2m](#)
- Uses separate update caches when cross compiling scala. [#1330](#) by [@pvlugter](#)[@pvlugter](#)
- Ensures sequences in analysis files are read in order. [#1346](#) by [@benjyw](#)[@benjyw](#)
- Enables tab completion for scripted task. [#1383](#) by [@xuwei-k](#)[@xuwei-k](#)
- Allows project reference to to a branch of a local git repository. [#1409](#) by [@vn971](#)[@vn971](#)
- Triggered Execution is now aware of rename or move of files. [#1401](#) by [@xuwei-k](#)[@xuwei-k](#)
- No longer updates classifiers of `projectDependencies`. [#1366/#1367](#) by [@dansanduleac](#)[@dansanduleac](#)
- Selects the first test fingerprint for a test name for forked tests. [#1450](#) by [@pvlugter](#)[@pvlugter](#)
- Allows default auto plugins to be disabled. [#1451](#) by [@jsuereth](#)[@jsuereth](#)
- Allows keys defined inside `build.sbt` to be used from sbt shell. [#1059/#1456](#)
- Updates internal Ivy instance to cache the results of dependency exclusion rules. [#1476](#) by [@eed3si9n](#)[@eed3si9n](#)
- Adds `Resolver.jcenterRepo` and `Resolver.bintrayRepo(owner, repo)` to add Bintray easier. [#1405](#) by [@evgeny-goldin](#)[@evgeny-goldin](#)
- AutoPlugins with no requirements enabled by allRequirements can now be disable db by the user. [#1516](#) by [@jsuereth](#)[@jsuereth](#)

## Bug fixes

- Allows auto-generated projects to have overridden organization. [#1315/#1378](#) by [@jsuereth](#)[@jsuereth](#)
- Fixes auto plugins declared without package object. [#1423](#) by [@lpiepiora](#)[@lpiepiora](#)
- Fixes `plugin` command. [#1416/#1426](#) by [@lpiepiora](#)[@lpiepiora](#)
- Adds `scala-jar` to the list of jar artifacts recognized by CustomPomParser. [#1400](#) by [@dpratt](#)[@dpratt](#)
- Fixes cross versioning to recognize version number with mutiple -tags. [#1433](#) by [@henrikengstrom](#)[@henrikengstrom](#)
- Works around “Not a simple type” breaking `-Xfatal-warnings`. [#1477](#) by [@puffnfresh](#)[@puffnfresh](#)
- Fixes `sLog` usage in tandem with the `set` comamnd [#1486](#) [@jsuereth](#)[@jsuereth](#)
- Test suites with whitespace will have prettier filenames [#1487](#) [@jsuereth](#)[@jsuereth](#)
- sbt no longer crashes when run in root directory [#1488](#) by [@jsuereth](#)[@jsuereth](#)
- set no longer removes any `++` scala version setting. [#856/#1489](#) by [@jsuereth](#)[@jsuereth](#)
- Fixes `Scope.parseScopedKey`. [#1384](#) by [@eed3si9n](#)[@eed3si9n](#)
- Fixes `build.sbt` errors causing `ArrayIndexOutOfBoundsException` due to invalid source in position. [#1181](#) by [@eed3si9n](#)[@eed3si9n](#)
- Fixes `http.proxyPassword` showing up in launcher’s update.log. [#670](#) by [@eed3si9n](#)[@eed3si9n](#)
- Fixes config-classes leak in loading build files. [#1524](#) by [@jsuereth](#)[@jsuereth](#)
- Fixes name-conflicts in hashed settings class files. [#1465](#) by [@jsuereth](#)[@jsuereth](#)
- Fixes the pom conversion of dynamic revisions like `1.1+`. [#1275](#) by [@eed3si9n](#)[@eed3si9n](#)
- Fixes `NullPointerException` in tab completion by `FileExamples`. [#1530](#) by [@eed3si9n](#)[@eed3si9n](#)
- Fixes metabuild downloading unused Scala 2.10.2. [#1439](#) by [@eed3si9n](#)[@eed3si9n](#)

## HTTPS related changes

Thanks to Sonatype, HTTPS access to Maven Central Repository is available to public. This is now enabled by default, but if HTTP is required for some reason the following system properties can be used:

```
-Dsbtt.repository.secure=false
```

Java.net Maven 2 repository, Typesafe repository, and sbt Plugin repository also defaults to HTTPS.

[#1494](#) by [\[@rtyley\]\[@rtyley\]](#), [#1536](#) by [\[@benmccann\]\[@benmccann\]](#), and [#1541](#) by [\[@eed3si9n\]\[@eed3si9n\]](#).

## enablePlugins/disablePlugins

sbt 0.13.6 now allows `enablePlugins` and `disablePlugins` to be written directly in `build.sbt`. [#1213/#1312](#) by [\[@jsuereth\]\[@jsuereth\]](#)

## Unresolved dependencies error

sbt 0.13.6 will try to reconstruct dependencies tree when it fails to resolve a managed dependency. This is an approximation, but it should help you figure out where the problematic dependency is coming from. When possible sbt will display the source position next to the modules:

```
[warn] ::::::::::::::::::::::::::::::::::::::::::::::::::::::::::::
[warn] ::                UNRESOLVED DEPENDENCIES                ::
[warn] ::::::::::::::::::::::::::::::::::::::::::::::::::::::::::::::
[warn] :: foundrylogic.vpp#vpp;2.2.1: not found
[warn] ::::::::::::::::::::::::::::::::::::::::::::::::::::::::::::::
[warn]
[warn] Note: Unresolved dependencies path:
[warn]   foundrylogic.vpp:vpp:2.2.1
[warn]     +- org.apache.cayenne:cayenne-tools:3.0.2
[warn]   +- org.apache.cayenne.plugins:maven-cayenne-plugin:3.0.2 (/foo/some-test/build.sbt)
[warn]     +- d:d_2.10:0.1-SNAPSHOT
```

[#528/#1422/#1447](#) by [\[@eed3si9n\]\[@eed3si9n\]](#)

## Eviction warnings

sbt 0.13.6 displays eviction warnings when it resolves your project's managed dependencies via `update` task. Currently the eviction warnings are categorized into three layers: `scalaVersion` eviction, direct evictions, and transitive evictions. By default eviction warning on `update` task will display only `scalaVersion` evictin and direct evictions.

`scalaVersion` eviction warns you when `scalaVersion` is no longer effective. This happens when one of your dependency depends on a newer release of scala-library than your `scalaVersion`. Direct evictions are evictions related to your direct dependencies. Warnings are displayed only when API incompatibility is suspected. For Java libraries, Semantic Versioning is used for guessing, and for Scala libraries Second Segment versioning (second segment bump makes API incompatible) is used.



To display all eviction warnings with caller information, run `evicted` task.

```
[warn] There may be incompatibilities among your library dependencies.
[warn] Here are some of the libraries that were evicted:
[warn]   * com.typesafe.akka:akka-actor_2.10:2.1.4 -> 2.3.4 (caller: com.typesafe.akka:akka-r
org.w3:banana-sesame_2.10:0.4, org.w3:banana-rdf_2.10:0.4)
```

[#1200/#1467](#) by [@eed3si9n](#)[\[@eed3si9n\]](#)

## Latest SNAPSHOTS

sbt 0.13.6 adds a new setting key called `updateOptions` for customizing the details of managed dependency resolution with `update` task. One of its flags is called `latestSnapshots`, which controls the behavior of the chained resolver. Up until 0.13.6, sbt was picking the first `-SNAPSHOT` revision it found along the chain. When `latestSnapshots` is enabled (default: `true`), it will look into all resolvers on the chain, and compare them using the publish date.

The tradeoff is probably a longer resolution time if you have many remote repositories on the build or you live away from the servers. So here's how to disable it:

```
updateOptions := updateOptions.value.withLatestSnapshots(false)
```

[#1514](#) by [@eed3si9n](#)[\[@eed3si9n\]](#)

## Consolidated resolution

`updateOptions` can also be used to enable consolidated resolution for `update` task.

```
updateOptions := updateOptions.value.withConsolidatedResolution(true)
```

This feature is specifically targeted to address [Ivy resolution is beging slow for multi-module projects #413](#). Consolidated resolution aims to fix this issue by artificially constructing an Ivy dependency graph for the unique managed dependencies. If two subprojects introduce identical external dependencies, both subprojects should consolidate to the same graph, and therefore resolve immediately for the second `update`. [#1454](#) by [@eed3si9n](#)[\[@eed3si9n\]](#)

## sbt 0.13.5

sbt 0.13.5 is a technology preview of what's to come to sbt 1.0 with enhancements like [auto plugins](#) and the necessary APIs changes and launcher for “sbt as a server.”, defined in the sbt-remote-control project.

- The Scala version for sbt and sbt plugins is now 2.10.4. This is a compatible version bump.
- Added a new setting `testResultLogger` to allow customisation of logging of test results. (#1225)
- When test is run and there are no tests available, omit logging output. Especially useful for aggregate modules. `test-only` et al unaffected. (#1185)
- sbt now uses minor-patch version of ivy 2.3 (`org.scala-sbt.ivy:ivy:2.3.0-sbt-`)
- `sbt.Plugin` deprecated in favor of `sbt.AutoPlugin`
- name-hashing incremental compiler now supports scala macros.
- `testResultLogger` is now configured.
- sbt-server hooks for task cancellation.
- Add `JUnitXmlReportPlugin` which generates junit-xml-reports for all tests.
- Optionally enable forced garbage collection after tasks (`-Dsbt.task.forcegc=true`).

## sbt 0.13.0 - 0.13.2

### sbt 0.13.2

- Adding new name-hashing feature to incremental compiler. Alters how scala dependencies are tracked, reducing number of recompiles necessary.
- Added the ability to launch servers via the sbt-launcher.
- Added `.previous` feature on tasks which can load the previous value.
- Added `all` command which can run more than tasks in parallel.
- Exposed the ‘overwrite’ flags from ivy. Added warning if overwriting a release version.
- Improve the error message when credentials are not found in Ivy.
- Improve task macros to handle more scala constructs.
- Fix `last` and `export` tasks to read from the correct stream.
- Fix issue where ivy's `.+` dependency ranges were not correctly translated to maven.
- Override security manager to ignore file permissions (performance issue)
- 2.11 compatibility fixes
- Launcher can now handle ivy's `.+` revisions.
- `SessionSettings` now correctly overwrite existing settings.

- Adding a simple `Logic` system for inclusionary/dependency logic of plugins.
- Improve build hooks for `LoggerReporter` and `TaskProgress`.
- Serialize incremental compiler analysis into text-file format.
- Issue a warning when generating Paths and separate already exists in the path.
- Migrate to Ivy 2.3.0-final.
- Docs: Use bintray as default repository host
- Docs: improved docs on test groups.
- Docs: updated documentation on the Launcher.
- Docs: started architecture document.

### sbt 0.13.1

- The Scala version for sbt and sbt plugins is now 2.10.3. This is a compatible version bump.
- New method `toTask` on `Initialize[InputTask[T]]` to apply the full input and get a plain task out.
- Improved performance of inspect tree
- Work around various issues with Maven local repositories, including resolving -SNAPSHOTs from them. (#321)
- Better representation of no cross-version suffix in suffix conflict error message: now shows `<none>` instead of just `_`
- `TrapExit` support for multiple, concurrent managed applications. Now enabled by default for all `run`-like tasks. (#831)
- Add minimal support for class file formats 51.0, 52.0 in incremental compiler. (#842)
- Allow main class to be non-public. (#883)
- Convert `-classpath` to `CLASSPATH` when forking on Windows and length exceeds a heuristic maximum. (#755)
- `scalacOptions` for `.scala` build definitions are now also used for `.sbt` files
- `error`, `warn`, `info`, `debug` commands to set log level and `--error`, ... to set the level before the project is loaded. (#806)
- `sLog` settings that provides a `Logger` for use by settings. (#806)
- Early commands: any command prefixed with `--` gets moved before other commands on startup and doesn't force sbt into batch mode.
- Deprecate internal `-`, `--`, and `---` commands in favor of `onFailure`, `sbtClearOnFailure`, and `resumeFromFailure`.
- `makePom` no longer generates `<type>` elements for standard classifiers. (#728)
- Fix many instances of the Turkish i bug.
- Read `https+ftp` proxy environment variables into system properties where

Java will use them. (#886)

- The `Process` methods that are redirection-like no longer discard the exit code of the input. This addresses an inconsistency with `Fork`, where using the `CustomOutput` `OutputStrategy` makes the exit code always zero.
- Recover from failed `reload` command in the scripted sbt handler.
- Parse external `pom.xml` with `CustomPomParser` to handle multiple definitions. (#758)
- Improve key collision error message (#877)
- Display the source position of an undefined setting.
- Respect the `-nowarn` option when compiling Scala sources.
- Improve forked test debugging by listing tests run by sbt in debug output. (#868)
- Fix scaladoc cache to track changes to `-doc-root-content` (#837)
- Incremental compiler: Internal refactoring in preparation for name-hashing (#936)
- Incremental compiler: improved cache loading/saving speed by internal file names (#931)
- Docs: many contributed miscellaneous fixes and additions
- Docs: link to page source now at the bottom of the page
- Docs: sitemap now automatically generated
- Docs: custom `:key:` role enables links from a key name in the docs to the val in `sxr/sbt/Keys.scala`
- Docs: restore `sxr` support and fix links to `sxr`'d sources. (#863)

## sbt 0.13.0

### Features, fixes, changes with compatibility implications

- Moved to Scala 2.10 for sbt and build definitions.
- Support for plugin configuration in `project/plugins/` has been removed. It was deprecated since 0.11.2.
- Dropped support for tab completing the right side of a setting for the `set` command. The new task macros make this tab completion obsolete.
- The convention for keys is now camelCase only. Details below.
- Fixed the default classifier for tests to be `tests` for proper Maven compatibility.
- The global settings and plugins directories are now versioned. Global settings go in `~/.sbt/0.13/` and global plugins in `~/.sbt/0.13/plugins/` by default. Explicit overrides, such as via the `sbt.global.base` system property, are still respected. (gh-735)
- sbt no longer canonicalizes files passed to scalac. (gh-723)
- sbt now enforces that each project must have a unique `target` directory.

- sbt no longer overrides the Scala version in dependencies. This allows independent configurations to depend on different Scala versions and treats Scala dependencies other than `scala-library` as normal dependencies. However, it can result in resolved versions other than `scalaVersion` for those other Scala libraries.
- JLine is now configured differently for Cygwin. See [Installing sbt](#).
- Jline and Ansi codes work better on Windows now. CI servers might have to explicitly disable Ansi codes via `-Dsbt.log.format=false`.
- JLine now tries to respect `~/.inputrc`.
- Forked tests and runs now use the project's base directory as the current working directory.
- `compileInputs` is now defined in `(Compile, compile)` instead of just `Compile`
- The result of running tests is now [Tests.Output](#).

## Features

- Use the repositories in `boot.properties` as the default project resolvers. Add `bootOnly` to a repository in `boot.properties` to specify that it should not be used by projects by default. (Josh S., gh-608)
- Support `vals` and `defs` in `.sbt` files. Details below.
- Support defining Projects in `.sbt` files: `vals` of type `Project` are added to the `Build`. Details below.
- New syntax for settings, tasks, and input tasks. Details below.
- Automatically link to external API scaladocs of dependencies by setting `autoAPIMappings := true`. This requires at least Scala 2.10.1 and for dependencies to define `apiURL` for their scaladoc location. Mappings may be manually added to the `apiMappings` task as well.
- Support setting Scala home directory temporary using the switch command: `++ scala-version=/path/to/scala/home`. The `scala-version` part is optional, but is used as the version for any managed dependencies.
- Add `publishM2` task for publishing to `~/.m2/repository`. (gh-485)
- Use a default root project aggregating all projects if no root is defined. (gh-697)
- New API for getting tasks and settings from multiple projects and configurations. See the new section [getting values from multiple scopes](#).
- Enhanced test interface for better support of test framework features. (Details pending.)

- `export` command
  - For tasks, prints the contents of the ‘export’ stream. By convention, this should be the equivalent command line(s) representation. `compile`, `doc`, and `console` show the approximate command lines for their execution. Classpath tasks print the classpath string suitable for passing as an option.
  - For settings, directly prints the value of a setting instead of going through the logger

## Fixes

- sbt no longer tries to warn on dependency conflicts. Configure a [conflict manager](#) instead. (gh-709)
- Run test Cleanup and Setup when forking. The test ClassLoader is not available because it is in another jvm.

## Improvements

- Run the API extraction phase after the compiler’s `pickler` phase instead of `typer` to allow compiler plugins after `typer`. (Adriaan M., gh-609)
- Record defining source position of settings. `inspect` shows the definition location of all settings contributing to a defined value.
- Allow the root project to be specified explicitly in `Build.rootProject`.
- Tasks that need a directory for storing cache information can now use the `cacheDirectory` method on `streams`. This supersedes the `cacheDirectory` setting.
- The environment variables used when forking `run` and `test` may be set via `envVars`, which is a `Task[Map[String,String]]`. (gh-665)
- Restore class files after an unsuccessful compilation. This is useful when an error occurs in a later incremental step that requires a fix in the originally changed files.
- Better auto-generated IDs for default projects. (gh-554)
- Fork run directly with ‘java’ to avoid additional class loader from ‘scala’ command. (gh-702)
- Make `autoCompilerPlugins` support compiler plugins defined in a internal dependency (only if `exportJars := true` due to scalac limitations)
- Track ancestors of non-private templates and use this information to require fewer, smaller intermediate incremental compilation steps.
- `autoCompilerPlugins` now supports compiler plugins defined in a internal dependency. The plugin project must define `exportJars := true`. Depend on the plugin with `...dependsOn(... % Configurations.CompilerPlugin)`.

- Add utilities for debugging API representation extracted by the incremental compiler. (Grzegorz K., gh-677, gh-793)
- `consoleProject` unifies the syntax for getting the value of a setting and executing a task. See [Console Project](#).

## Other

- The source layout for the sbt project itself follows the package name to accommodate to Eclipse users. (Grzegorz K., gh-613)

## Details of major changes

**camelCase Key names** The convention for key names is now camelCase only instead of camelCase for Scala identifiers and hyphenated, lower-case on the command line. camelCase is accepted for existing hyphenated key names and the hyphenated form will still be accepted on the command line for those existing tasks and settings declared with hyphenated names. Only camelCase will be shown for tab completion, however.

**New key definition methods** There are new methods that help avoid duplicating key names by declaring keys as:

```
val myTask = taskKey[Int]("A (required) description of myTask.")
```

The name will be picked up from the val identifier by the implementation of the taskKey macro so there is no reflection needed or runtime overhead. Note that a description is mandatory and the method `taskKey` begins with a lowercase `t`. Similar methods exist for keys for settings and input tasks: `settingKey` and `inputKey`.

**New task/setting syntax** First, the old syntax is still supported with the intention of allowing conversion to the new syntax at your leisure. There may be some incompatibilities and some may be unavoidable, but please report any issues you have with an existing build.

The new syntax is implemented by making `:=`, `+=`, and `++=` macros and making these the only required assignment methods. To refer to the value of other settings or tasks, use the `value` method on settings and tasks. This method is a stub that is removed at compile time by the macro, which will translate the implementation of the task/setting to the old syntax.

For example, the following declares a dependency on `scala-reflect` using the value of the `scalaVersion` setting:

```
libraryDependencies += "org.scala-lang" % "scala-reflect" % scalaVersion.value
```

The `value` method is only allowed within a call to `:=`, `+=`, or `++=`. To construct a setting or task outside of these methods, use `Def.task` or `Def.setting`. For example,

```
val reflectDep = Def.setting { "org.scala-lang" % "scala-reflect" % scalaVersion.value }

libraryDependencies += reflectDep.value
```

A similar method `parsed` is defined on `Parser[T]`, `Initialize[Parser[T]]` (a setting that provides a parser), and `Initialize[State => Parser[T]]` (a setting that uses the current `State` to provide a `Parser[T]`). This method can be used when defining an input task to get the result of user input.

```
myInputTask := {
  // Define the parser, which is the standard space-delimited arguments parser.
  val args = Def.spaceDelimited("<args>").parsed
  // Demonstrates using a setting value and a task result:
  println("Project name: " + name.value)
  println("Classpath: " + (fullClasspath in Compile).value.map(_.file))
  println("Arguments:")
  for(arg <- args) println("  " + arg)
}
```

For details, see [Input Tasks](#).

To expect a task to fail and get the failing exception, use the `failure` method instead of `value`. This provides an `Incomplete` value, which wraps the exception. To get the result of a task whether or not it succeeds, use `result`, which provides a `Result[T]`.

Dynamic settings and tasks (`flatMap`) have been cleaned up. Use the `Def.taskDyn` and `Def.settingDyn` methods to define them (better name suggestions welcome). These methods expect the result to be a task and setting, respectively.

**.sbt format enhancements** `vals` and `defs` are now allowed in `.sbt` files. They must follow the same rules as settings concerning blank lines, although multiple definitions may be grouped together. For example,

```
val n = "widgets"
val o = "org.example"

name := n

organization := o
```



All definitions are compiled before settings, but it will probably be best practice to put definitions together. Currently, the visibility of definitions is restricted to the .sbt file it is defined in. They are not visible in `consoleProject` or the `set` command at this time, either. Use Scala files in `project/` for visibility in all .sbt files.

vals of type `Project` are added to the `Build` so that multi-project builds can be defined entirely in .sbt files now. For example,

```
lazy val a = Project("a", file("a")).dependsOn(b)

lazy val b = Project("b", file("sub")).settings(
  version := "1.0"
)
```

Currently, it only makes sense to defines these in the root project's .sbt files.

A shorthand for defining Projects is provided by a new macro called `project`. This requires the constructed `Project` to be directly assigned to a `val`. The name of this val is used for the project ID and base directory. The base directory can be changed with the `in` method. The previous example can also be written as:

```
lazy val a = project.dependsOn(b)

lazy val b = project in file("sub") settings(
  version := "1.0"
)
```

This macro is also available for use in Scala files.

**Control over automatically added settings** sbt loads settings from a few places in addition to the settings explicitly defined by the `Project.settings` field. These include plugins, global settings, and .sbt files. The new `Project.autoSettings` method configures these sources: whether to include them for the project and in what order.

`Project.autoSettings` accepts a sequence of values of type `AddSettings`. Instances of `AddSettings` are constructed from methods in the `AddSettings` companion object. The configurable settings are per-user settings (from `~/.sbt`, for example), settings from .sbt files, and plugin settings (project-level only). The order in which these instances are provided to `autoSettings` determines the order in which they are appended to the settings explicitly provided in `Project.settings`.

For .sbt files, `AddSettings.defaultSbtFiles` adds the settings from all .sbt files in the project's base directory as usual. The alternative method

`AddSettings.sbtFiles` accepts a sequence of `Files` that will be loaded according to the standard `.sbt` format. Relative files are resolved against the project's base directory.

Plugin settings may be included on a per-Plugin basis by using the `AddSettings.plugins` method and passing a `Plugin => Boolean`. The settings controlled here are only the automatic per-project settings. Per-build and global settings will always be included. Settings that plugins require to be manually added still need to be added manually.

For example,

```
import AddSettings._

lazy val root = Project("root", file(".")) autoSettings(
  userSettings, allPlugins, sbtFiles(file("explicit/a.txt"))
)

lazy val sub = Project("sub", file("Sub")) autoSettings(
  defaultSbtFiles, plugins(includePlugin)
)

def includePlugin(p: Plugin): Boolean =
  p.getClass.getName.startsWith("org.example.")
```

**Resolving Scala dependencies** Scala dependencies (like `scala-library` and `scala-compiler`) are now resolved via the normal `update` task. This means:

1. Scala jars won't be copied to the boot directory, except for those needed to run `sbt`.
2. Scala SNAPSHOTs behave like normal SNAPSHOTs. In particular, running `update` will properly re-resolve the dynamic revision.
3. Scala jars are resolved using the same repositories and configuration as other dependencies.
4. Scala dependencies are not resolved via `update` when `scalaHome` is set, but are instead obtained from the configured directory.
5. The Scala version for `sbt` will still be resolved via the repositories configured for the launcher.

`sbt` still needs access to the compiler and its dependencies in order to run `compile`, `console`, and other Scala-based tasks. So, the Scala compiler jar and dependencies (like `scala-reflect.jar` and `scala-library.jar`) are defined and resolved in the `scala-tool` configuration (unless `scalaHome` is defined). By default, this configuration and the dependencies in it are automatically added by `sbt`. This

occurs even when dependencies are configured in a `pom.xml` or `ivy.xml` and so it means that the version of Scala defined for your project must be resolvable by the resolvers configured for your project.

If you need to manually configure where sbt gets the Scala compiler and library used for compilation, the REPL, and other Scala tasks, do one of the following:

1. Set `scalaHome` to use the existing Scala jars in a specific directory. If `autoScalaLibrary` is true, the library jar found here will be added to the (unmanaged) classpath.
2. Set `managedScalaInstance := false` and explicitly define `scalaInstance`, which is of type `ScalaInstance`. This defines the compiler, library, and other jars comprising Scala. If `autoScalaLibrary` is true, the library jar from the defined `ScalaInstance` will be added to the (unmanaged) classpath.

The [Configuring Scala](#) page provides full details.

## sbt 0.12.4

- Work around URI problems with encoding and resolving. (gh-725)
- Allow `-cp` argument to `apply` command to be quoted. (gh-724)
- Make `sbtBinaryVersion` use the new approach for 0.13 and later to support cross-building plugins.
- Pull `sbtDependency` version from `sbtVersion` to facilitate cross-building plugins.
- Proper support for stashing on-failure handlers. (gh-732)
- Include files with zip extension in unmanaged jars. (gh-750)
- Only add automatically detected plugins to options once. (gh-757)
- Properly handle failure in a multi-command that includes `reload`. (gh-732)
- Fix unsynchronized caching of Scala class loaders that could result in Scala classes being loaded in multiple class loaders.
- Incremental compiler: remove resident compiler code (wasn't used and was a compatibility liability)
- Incremental compiler: properly track `abstract override` modifier. (gh-726)
- Incremental compiler: do not normalize types in the API extraction phase. (gh-736)
- Ivy cache: account for `localOnly` when cache subclass overrides `isChanging`
- Ivy cache: fix corruption when developing sbt or sbt plugins. (gh-768)
- Ivy cache: invalidate when artifact download fails to avoid locking into bad resolver. (gh-760)

- Ivy cache: use publication date from metadata instead of original file's last modified time when deleting out of date artifacts. (gh-764)

### sbt 0.12.3

- Allow `cleanKeepFiles` to contain directories
- Disable Ivy debug-level logging for performance. (gh-635)
- Invalidate artifacts not recorded in the original metadata when a module marked as changing changes. (gh-637, gh-641)
- Ivy Artifact needs wildcard configuration added if no explicit ones are defined. (gh-439)
- Right precedence of `sbt.boot.properties` lookup, handle qualifier correctly. (gh-651)
- Mark the tests failed exception as having already provided feedback.
- Handle exceptions not caught by the test framework when forking. (gh-653)
- Support `reload plugins` after ignoring a failure to load a project.
- Workaround for os deadlock detection at the process level. (gh-650)
- Fix for dependency on class file corresponding to a package. (Grzegorz K., gh-620)
- Fix incremental compilation problem with package objects inheriting from invalidated sources in a subpackage.
- Use Ivy's default name for the resolution report so that links to other configurations work.
- Include jars from `java.ext.dirs` in incremental classpath. (gh-678)
- Multi-line prompt text offset issue (Jibbers42, gh-625)
- Added `xml:space="preserve"` attribute to `extraDependencyAttributes` XML Block for publishing poms for plugins dependent on other plugins (Brendan M., gh-645)
- Tag the actual test task and not a later task. (gh-692)
- Make `exclude-classifiers` per-user instead of per-build. (gh-634)
- Load global plugins in their own class loader and replace the base loader with that. (gh-272)
- Demote the default conflict warnings to the debug level. These will be removed completely in 0.13. (gh-709)
- Fix Ivy cache issues when multiple resolvers are involved. (gh-704)

### sbt 0.12.2

- Support -Yrangepos. (Lex S., gh-607)
- Only make one call to test frameworks per test name. (gh-520)

- Add `-cp` option to the `apply` method to make adding commands from an external program easier.
- Stable representation of refinement typerefs. This fixes unnecessary re-compilations in some cases. (Adriaan M., gh-610)
- Disable aggregation for `run-main`. (gh-606)
- Concurrent restrictions: Untagged should be set based on the task's tags, not the tags of all tasks.
- When preserving the last modified time of files, convert negative values to 0
- Use `java.lang.Throwable.setStackTrace` when sending exceptions back from forked tests. (Eugene V., gh-543)
- Don't merge dependencies with mismatched transitive/force/changing values. (gh-582)
- Filter out null parent files when deleting empty directories. (Eugene V., gh-589)
- Work around File constructor not accepting URIs for UNC paths. (gh-564)
- Split ForkTests `react()` out to workaround SI-6526 (avoids a stackoverflow in some forked test situations)
- Maven-style ivy repo support in the launcher config (Eric B., gh-585)
- Compare external binaries with canonical files (nau, gh-584)
- Call `System.exit` after the main thread is finished. (Eugene V., gh-565)
- Abort running tests on the first failure to communicate results back to the main process. (Eugene V., gh-557)
- Don't let the right side of the alias command fail the parse. (gh-572)
- API extraction: handle any type that is annotated, not just the spec'd simple type. (gh-559)
- Don't try to look up the class file for a package. (gh-620)

## sbt 0.12.1

### Dependency management fixes:

- Merge multiple dependency definitions for the same ID. Workaround for gh-468, gh-285, gh-419, gh-480.
- Don't write section of pom if scope is 'compile'.
- Ability to properly match on artifact type. Fixes gh-507 (Thomas).
- Force `update` to run on changes to last modified time of artifacts or cached descriptor (part of fix for gh-532). It may also fix issues when working with multiple local projects via 'publish-local' and binary dependencies.
- Per-project resolution cache that deletes cached files before update. Notes:
  - The resolution cache differs from the repository cache and does

not contain dependency metadata or artifacts.

- The resolution cache contains the generated ivy files, properties, and resolve reports for the project.
- There will no longer be individual files directly in `~/.ivy2/cache/`
- Resolve reports are now in `target/resolution-cache/reports/`, viewable with a browser.
- Cache location includes extra attributes so that cross builds of a plugin do not overwrite each other. Fixes gh-532.

### Three stage incremental compilation:

- As before, the first step recompiles sources that were edited (or otherwise directly invalidated).
- The second step recompiles sources from the first step whose API has changed, their direct dependencies, and sources forming a cycle with these sources.
- The third step recompiles transitive dependencies of sources from the second step whose API changed.
- Code relying mainly on composition should see decreased compilation times with this approach.
- Code with deep inheritance hierarchies and large cycles between sources may take longer to compile.
- `last compile` will show cycles that were processed in step 2. Reducing large cycles of sources shown here may decrease compile times.

### Miscellaneous fixes and improvements:

- Various test forking fixes. Fixes gh-512, gh-515.
- Proper isolation of build definition classes. Fixes gh-536, gh-511.
- `orbit` packaging should be handled like a standard jar. Fixes gh-499.
- In `IO.copyFile`, limit maximum size transferred via NIO. Fixes gh-491.
- Add OSX JNI library extension in `includeFilter` by default. Fixes gh-500. (Indrajit)
- Translate `show x y` into `;show x ;show y`. Fixes gh-495.
- Clean up temporary directory on exit. Fixes gh-502.
- `set` prints the scopes+keys it defines and affects.
- Tab completion for `set` (experimental).
- Report file name when an error occurs while opening a corrupt zip file in incremental compilation code. (James)
- Defer opening logging output files until an actual write. Helps reduce number of open file descriptors.
- Back all console loggers by a common console interface that merges (overwrites) consecutive Resolving xxxx ... lines when ansi codes are enabled

(as first done by Play).

#### Forward-compatible-only change (not present in 0.12.0):

- `sourcesInBase` setting controls whether sources in base directory are included. Fixes gh-494.

### sbt 0.12.0

#### Features, fixes, changes with compatibility implications

- The cross versioning convention has changed for Scala versions 2.10 and later as well as for sbt plugins.
- When invoked directly, ‘update’ will always perform an update (gh-335)
- The sbt plugins repository is added by default for plugins and plugin definitions. gh-380
- Plugin configuration directory precedence has changed (see details section below)
- Source dependencies have been fixed, but the fix required changes (see details section below)
- Aggregation has changed to be more flexible (see details section below)
- Task axis syntax has changed from `key(for task)` to `task::key` (see details section below)
- The organization for sbt has to changed to `org.scala-sbt` (was: `org.scala-tools.sbt`). This affects users of the scripted plugin in particular.
- `artifactName` type has changed to `(ScalaVersion, Artifact, ModuleID) => String`
- `javacOptions` is now a task
- `session save` overwrites settings in `build.sbt` (when appropriate). gh-369
- `scala-library.jar` is now required to be on the classpath in order to compile Scala code. See the `scala-library.jar` section at the bottom of the page for details.

#### Features

- Support for forking tests (gh-415)
- `test-quick` (see details section below)
- Support globally overriding repositories (gh-472)
- Added `print-warnings` task that will print unchecked and deprecation warnings from the previous compilation without needing to recompile (Scala 2.10+ only)

- Support for loading an ivy settings file from a URL.
- `projects add/remove <URI>` for temporarily working with other builds
- Enhanced control over parallel execution (see details section below)
- `inspect tree <key>` for calling `inspect` command recursively (gh-274)

## Fixes

- Delete a symlink and not its contents when recursively deleting a directory.
- Fix detection of ancestors for java sources
- Fix the resolvers used for `update-sbt-classifiers` (gh-304)
- Fix auto-imports of plugins (gh-412)
- Argument quoting (see details section below)
- Properly reset JLine after being stopped by Ctrl+z (unix only). gh-394

## Improvements

- The launcher can launch all released sbt versions back to 0.7.0.
- A more refined hint to run 'last' is given when a stack trace is suppressed.
- Use java 7 Redirect.INHERIT to inherit input stream of subprocess (gh-462,gh-327). This should fix issues when forking interactive programs. (@vigdorchik)
- Mirror ivy 'force' attribute (gh-361)
- Various improvements to `help` and `tasks` commands as well as new settings command (gh-315)
- Bump jsch version to 0.1.46. (gh-403)
- Improved help commands: `help`, `tasks`, `settings`.
- Bump to JLine 1.0 (see details section below)
- Global repository setting (see details section below)
- Other fixes/improvements: gh-368, gh-377, gh-378, gh-386, gh-387, gh-388, gh-389

## Experimental or In-progress

- API for embedding incremental compilation. This interface is subject to change, but already being used in [a branch of the scala-maven-plugin](#).
- Experimental support for keeping the Scala compiler resident. Enable by passing `-Dsbt.resident.limit=n` to sbt, where n is an integer indicating the maximum number of compilers to keep around.
- The [Howto pages](#) on the [new site](#) are at least readable now. There is more content to write and more formatting improvements are needed, so [pull requests are welcome](#).



## Details of major changes from 0.11.2 to 0.12.0

**Plugin configuration directory** In 0.11.0, plugin configuration moved from `project/plugins/` to just `project/`, with `project/plugins/` being deprecated. Only 0.11.2 had a deprecation message, but in all of 0.11.x, the presence of the old style `project/plugins/` directory took precedence over the new style. In 0.12.0, the new style takes precedence. Support for the old style won't be removed until 0.13.0.

1. Ideally, a project should ensure there is never a conflict. Both styles are still supported; only the behavior when there is a conflict has changed.
2. In practice, switching from an older branch of a project to a new branch would often leave an empty `project/plugins/` directory that would cause the old style to be used, despite there being no configuration there.
3. Therefore, the intention is that this change is strictly an improvement for projects transitioning to the new style and isn't noticed by other projects.

**Parsing task axis** There is an important change related to parsing the task axis for settings and tasks that fixes gh-202

1. The syntax before 0.12 has been `{build}project/config:key(for task)`
2. The proposed (and implemented) change for 0.12 is `{build}project/config:task::key`
3. By moving the task axis before the key, it allows for easier discovery (via tab completion) of keys in plugins.
4. It is not planned to support the old syntax.

**Aggregation** Aggregation has been made more flexible. This is along the direction that has been previously discussed on the mailing list.

1. Before 0.12, a setting was parsed according to the current project and only the exact setting parsed was aggregated.
2. Also, tab completion did not account for aggregation.
3. This meant that if the setting/task didn't exist on the current project, parsing failed even if an aggregated project contained the setting/task.
4. Additionally, if `compile:package` existed for the current project, `*:package` existed for an aggregated project, and the user requested 'package' to run (without specifying the configuration), `*:package` wouldn't be run on the aggregated project (because it isn't the same as the `compile:package` key that existed on the current project).
5. In 0.12, both of these situations result in the aggregated settings being selected. For example,
  1. Consider a project `root` that aggregates a subproject `sub`.

2. `root` defines `*:package`.
3. `sub` defines `compile:package` and `compile:compile`.
4. Running `root/package` will run `root/*:package` and `sub/compile:package`
5. Running `root/compile` will run `sub/compile:compile`
6. This change was made possible in part by the change to task axis parsing.

**Parallel Execution** Fine control over parallel execution is supported as described here: [Parallel Execution](#).

1. The default behavior should be the same as before, including the `parallelExecution` settings.
2. The new capabilities of the system should otherwise be considered experimental.
3. Therefore, `parallelExecution` won't be deprecated at this time.

**Source dependencies** A fix for issue gh-329 is included in 0.12.0. This fix ensures that only one version of a plugin is loaded across all projects. There are two parts to this.

1. The version of a plugin is fixed by the first build to load it. In particular, the plugin version used in the root build (the one in which sbt is started in) always overrides the version used in dependencies.
2. Plugins from all builds are loaded in the same class loader.

Additionally, Sanjin's patches to add support for hg and svn URIs are included.

1. sbt uses Subversion to retrieve URIs beginning with `svn` or `svn+ssh`. An optional fragment identifies a specific revision to checkout.
2. Because a URI for Mercurial doesn't have a Mercurial-specific scheme, sbt requires the URI to be prefixed with `hg:` to identify it as a Mercurial repository.
3. Also, URIs that end with `.git` are now handled properly.

**Cross building** The cross version suffix is shortened to only include the major and minor version for Scala versions starting with the 2.10 series and for sbt versions starting with the 0.12 series. For example, `sbinary_2.10` for a normal library or `sbt-plugin_2.10_0.12` for an sbt plugin. This requires forward and backward binary compatibility across incremental releases for both Scala and sbt.

1. This change has been a long time coming, but it requires everyone publishing an open source project to switch to 0.12 to publish for 2.10 or adjust the cross versioned prefix in their builds appropriately.

2. Obviously, using 0.12 to publish a library for 2.10 requires 0.12.0 to be released before projects publish for 2.10.
3. There is now the concept of a binary version. This is a subset of the full version string that represents binary compatibility. That is, equal binary versions implies binary compatibility. All Scala versions prior to 2.10 use the full version for the binary version to reflect previous sbt behavior. For 2.10 and later, the binary version is `<major>.<minor>`.
4. The cross version behavior for published artifacts is configured by the `crossVersion` setting. It can be configured for dependencies by using the `cross` method on `ModuleID` or by the traditional `%%` dependency construction variant. By default, a dependency has cross versioning disabled when constructed with a single `%` and uses the binary Scala version when constructed with `%%`.
5. The `artifactName` function now accepts a type `ScalaVersion` as its first argument instead of a `String`. The full type is now `(ScalaVersion, ModuleID, Artifact) => String`. `ScalaVersion` contains both the full Scala version (such as 2.10.0) as well as the binary Scala version (such as 2.10).
6. The flexible version mapping added by Indrajit has been merged into the `cross` method and the `%%` variants accepting more than one argument have been deprecated. See [Cross Build](#) for details.

**Global repository setting** Define the repositories to use by putting a standalone `[repositories]` section (see the [sbt Launcher](#) page) in `~/.sbt/repositories` and pass `-Dsbt.override.build.repos=true` to sbt. Only the repositories in that file will be used by the launcher for retrieving sbt and Scala and by sbt when retrieving project dependencies. (@jsuereth)

**test-quick** `test-quick` (gh-393) runs the tests specified as arguments (or all tests if no arguments are given) that:

1. have not been run yet OR
2. failed the last time they were run OR
3. had any transitive dependencies recompiled since the last successful run

**Argument quoting** Argument quoting (gh-396) from the interactive mode works like Scala string literals.

1. `> command "arg with spaces,\n escapes interpreted"`
2. `> command "\"arg with spaces,\n escapes not interpreted\""`
3. For the first variant, note that paths on Windows use backslashes and need to be escaped (`\`). Alternatively, use the second variant, which does not interpret escapes.
4. For using either variant in batch mode, note that a shell will generally require the double quotes themselves to be escaped.

## scala-library.jar

sbt versions prior to 0.12.0 provided the location of scala-library.jar to scalac even if scala-library.jar wasn't on the classpath. This allowed compiling Scala code without scala-library as a dependency, for example, but this was a misfeature. Instead, the Scala library should be declared as **provided**:

```
// Don't automatically add the scala-library dependency
// in the 'compile' configuration
autoScalaLibrary := false
```

```
libraryDependencies += "org.scala-lang" % "scala-library" % "2.9.2" % "provided"
```

## Older Changes

### 0.11.3 to 0.12.0

The changes for 0.12.0 are listed on a separate page. See [sbt 0.12.0 changes](#).

### 0.11.2 to 0.11.3

Dropping scala-tools.org:

- The sbt group ID is changed to **org.scala-sbt** (from **org.scala-tools.sbt**). This means you must use a 0.11.3 launcher to launch 0.11.3.
- The convenience objects **ScalaToolsReleases** and **ScalaToolsSnapshots** now point to <https://oss.sonatype.org/content/repositories/releases> and [.../snapshots](https://oss.sonatype.org/content/repositories/snapshots)
- The launcher no longer includes **scala-tools.org** repositories by default and instead uses the Sonatype OSS snapshots repository for Scala snapshots.
- The **scala-tools.org** releases repository is no longer included as an application repository by default. The Sonatype OSS repository is *not* included by default in its place.

Other fixes:

- Compiler interface works with 2.10
- **maxErrors** setting is no longer ignored
- Correct test count. [gh-372](#) (Eugene)
- Fix file descriptor leak in process library (Daniel)
- Buffer url input stream returned by Using. [gh-437](#)

- Jsch version bumped to 0.1.46. gh-403
- JUnit test detection handles ancestors properly (Indrajit)
- Avoid unnecessarily re-resolving plugins. gh-368
- Substitute variables in explicit version strings and custom repository definitions in launcher configuration
- Support setting sbt.version from system property, which overrides setting in a properties file. gh-354
- Minor improvements to command/key suggestions

### 0.11.1 to 0.11.2

Notable behavior change:

- The local Maven repository has been removed from the launcher's list of default repositories, which is used for obtaining sbt and Scala dependencies. This is motivated by the high probability that including this repository was causing the various problems some users have with the launcher not finding some dependencies (gh-217).

Fixes:

- gh-257 Fix invalid classifiers in pom generation (Indrajit)
- gh-255 Fix scripted plugin descriptor (Artyom)
- Fix forking git on windows (Stefan, Josh)
- gh-261 Fix whitespace handling for semicolon-separated commands
- gh-263 Fix handling of dependencies with an explicit URL
- gh-272 Show deprecation message for `project/plugins/`

### 0.11.0 to 0.11.1

Breaking change:

- The scripted plugin is now in the `sbt` package so that it can be used from a named package

Notable behavior change:

- By default, there is more logging during update: one line per dependency resolved and two lines per dependency downloaded. This is to address the appearance that sbt hangs on larger 'update's.

Fixes and improvements:

- Show help for a key with `help <key>`
- gh-21 Reduced memory and time overhead of incremental recompilation with signature hash based approach.
- Rotate global log so that only output since last prompt is displayed for last
- gh-169 Add support for exclusions with `excludeAll` and `exclude` methods on `ModuleID`. (Indrajit)
- gh-235 Checksums configurable for launcher
- gh-246 Invalidate `update` when `update` is invalidated for an internal project dependency
- gh-138 Include plugin sources and docs in `update-sbt-classifiers`
- gh-219 Add `cleanupCommands` setting to specify commands to run before interpreter exits
- gh-46 Fix regression in caching missing classifiers for `update-classifiers` and `update-sbt-classifiers`.
- gh-228 Set `connectInput` to true to connect standard input to forked run
- gh-229 Limited task execution interruption using `ctrl+c`
- gh-220 Properly record source dependencies from separate compilation runs in the same step.
- gh-214 Better default behavior for `classpathConfiguration` for external Ivy files
- gh-212 Fix transitive plugin dependencies.
- gh-222 Generate section in `make-pom`. (Jan)
- Build resolvers, loaders, and transformers.
- Allow project dependencies to be modified by a setting (`buildDependencies`) but with the restriction that new builds cannot be introduced.
- gh-174, gh-196, gh-201, gh-204, gh-207, gh-208, gh-226, gh-224, gh-253

### 0.10.1 to 0.11.0

Major Improvements:

- Move to 2.9.1 for project definitions and plugins
- Drop support for 2.7
- Settings overhaul, mainly to make API documentation more usable
- Support using native libraries in `run` and `test` (but not console, for example)
- Automatic plugin cross-versioning. Use

```
addSbtPlugin("group" % "name" % "version")
```

in `project/plugins.sbt` instead of `libraryDependencies += ...`. See [Plugins](#) for details

#### Fixes and Improvements:

- Display all undefined settings at once, instead of only the first one
- Deprecate separate `classpathFilter`, `defaultExcludes`, and `sourceFilter` keys in favor of `includeFilter` and `excludeFilter` explicitly scoped by `unmanagedSources`, `unmanagedResources`, or `unmanagedJars` as appropriate (Indrajit)
- Default to using shared boot directory in `~/.sbt/boot/`
- Can put contents of `project/plugins/` directly in `project/` instead. Will likely deprecate `plugins/` directory
- Key display is context sensitive. For example, in a single project, the build and project axes will not be displayed
- gh-114, gh-118, gh-121, gh-132, gh-135, gh-157: Various settings and error message improvements
- gh-115: Support configuring checksums separately for `publish` and `update`
- gh-118: Add `about` command
- gh-118, gh-131: Improve `last` command. Aggregate `last <task>` and display all recent output for `last`
- gh-120: Support read-only external file projects (Fred)
- gh-128: Add `skip` setting to override recompilation change detection
- gh-139: Improvements to pom generation (Indrajit)
- gh-140, gh-145: Add standard manifest attributes to binary and source jars (Indrajit)
- Allow sources used for `doc` generation to be different from sources for `compile`
- gh-156: Made `package` an alias for `package-bin`
- gh-162: handling of optional dependencies in pom generation

#### 0.10.0 to 0.10.1

Some of the more visible changes:

- Support “provided” as a valid configuration for inter-project dependencies gh-53
- Try out some better error messages for `build.sbt` in a few common situations gh-58
- Drop “Incomplete tasks ...” line from error messages. gh-32
- Better handling of javac logging. gc-74
- Warn when reload discards session settings

- Cache failing classifiers, making ‘update-classifiers’ a practical replacement for withSources()
- Global settings may be provided in ~/.sbt/build.sbt gh-52
- No need to define "sbtPlugin := true" in project/plugins/ or ~/.sbt/plugins/
- Provide statistics and list of evicted modules in UpdateReport
- Scope use of ‘transitive-classifiers’ by ‘update-sbt-classifiers’ and ‘update-classifiers’ for separate configuration.
- Default project ID includes a hash of base directory to avoid collisions in simple cases.
- ‘extra-loggers’ setting to make it easier to add loggers
- Associate ModuleID, Artifact and Configuration with a classpath entry (moduleID, artifact, and configuration keys). gh-41
- Put httpClient on Ivy’s classpath, which seems to speed up ‘update’.

#### 0.7.7 to 0.10.0

**Major redesign, only prominent changes listed.**

- Project definitions in Scala 2.8.1
- New configuration system: See [.sbt build example](#), [.scala build definition](#) and [.sbt build definition](#).
- New task engine: [Tasks](#)
- New multiple project support: [.scala build definition](#)
- More aggressive incremental recompilation for both Java and Scala sources
- Merged plugins and processors into improved plugins system: [Plugins](#)
- [Web application](#) and webstart support moved to plugins instead of core features
- Fixed all of the issues in (Google Code) issue #44
- Managed dependencies automatically updated when configuration changes
- `update-sbt-classifiers` and `update-classifiers` tasks for retrieving sources and/or javadocs for dependencies, transitively
- Improved [artifact handling and configuration][Artifacts]
- Tab completion parser combinators for commands and input tasks: [Commands](#)
- No project creation prompts anymore
- Moved to GitHub: <https://github.com/harrah/xsbt>

#### 0.7.5 to 0.7.7

- Workaround for Scala issue [#4426](#)
- Fix issue 156



### 0.7.4 to 0.7.5

- Joonas's update to work with Jetty 7.1 logging API changes.
- Updated to work with Jetty 7.2 WebAppClassLoader binary incompatibility (issue 129).
- Provide application and boot classpaths to tests and 'run'ning code according to <https://gist.github.com/404272>
- Fix **provided** configuration. It is no longer included on the classpath of dependent projects.
- Scala 2.8.1 is the default version used when starting a new project.
- Updated to [Ivy 2.2.0](#).
- Trond's patches that allow configuring [jetty-env.xml](#) and [webdefault.xml](#)
- Doug's [patch](#) to make 'projects' command show an asterisk next to current project
- Fixed issue 122
- Implemented issue 118
- Patch from Viktor and Ross for issue 123
- (RC1) Patch from Jorge for issue 100
- (RC1) Fix `<packaging>` type

### 0.7.3 to 0.7.4

- prefix continuous compilation with run number for better feedback when logging level is 'warn'
- Added `pomIncludeRepository(repo: MavenRepository): Boolean` that can be overridden to exclude local repositories by default
- Added `pomPostProcess(pom: Node): Node` to make advanced manipulation of the default pom easier (pomExtra already covers basic cases)
- Added **reset** command to reset JLine terminal. This needs to be run after suspending and then resuming sbt.
- Installer plugin is now a proper subproject of sbt.
- Plugins can now only be Scala sources. BND should be usable in a plugin now.
- More accurate detection of invalid test names. Invalid test names now generate an error and prevent the test action from running instead of just logging a warning.
- Fix issue with using 2.8.0.RC1 compiler in tests.
- Precompile compiler interface against 2.8.0.RC2
- Add `consoleOptions` for specifying options to the console. It defaults to `compileOptions`.
- Properly support sftp/ssh repositories using key-based authentication. See the updated section of the [Resolvers](#) page.
- `def ivyUpdateLogging = UpdateLogging.DownloadOnly | Full |`

**Quiet.** Default is `DownloadOnly`. Full will log metadata resolution and provide a final summary.

- **offline** property for disabling checking for newer dynamic revisions (like `-SNAPSHOT`). This allows working offline with remote snapshots. Not honored for plugins yet.
- History commands: `!!`, `!?string`, `!-n`, `!n`, `!string`, `!:n`, `!:` Run `!` to see help.
- New section in launcher configuration `[ivy]` with a single label `cache-directory`. Specify this to change the cache location used by the launcher.
- New label `classifiers` under `[app]` to specify classifiers of additional artifacts to retrieve for the application.
- Honor `-Xfatal-warnings` option added to compiler in 2.8.0.RC2.
- Make `scaladocTask` a `fileTask` so that it runs only when `index.html` is older than some input source.
- Made it easier to create default `test-*` tasks with different options
- Sort input source files for consistency, addressing scalac's issues with source file ordering.
- Derive Java source file from name of class file when no `SourceFile` attribute is present in the class file. Improves tracking when `-g:none` option is used.
- Fix `FileUtilities.unzip` to be tail-recursive again.

### 0.7.2 to 0.7.3

- Fixed issue with `scala.library.jar` not being on `javac`'s classpath
- Fixed buffered logging for parallel execution
- Fixed `test-*` tab completion being permanently set on first completion
- Works with Scala 2.8 trunk again.
- Launcher: Maven local repository excluded when the Scala version is a snapshot. This should fix issues with out of date Scala snapshots.
- The compiler interface is precompiled against common Scala versions (for this release, 2.7.7 and 2.8.0.Beta1).
- Added `PathFinder.distinct`
- Running multiple commands at once at the interactive prompt is now supported. Prefix each command with `;`.
- Run and return the output of a process as a `String` with `!!` or as a (blocking) `Stream[String]` with `lines`.
- Java tests + Annotation detection
- Test frameworks can now specify annotation fingerprints. Specify the names of annotations and sbt discovers classes with the annotations on it or one of its methods. Use version 0.5 of the test-interface.
- Detect subclasses and annotations in Java sources (really, their class files)
- Discovered is new root of hierarchy representing discovered subclasses + annotations. `TestDefinition` no longer fulfills this role.

- `TestDefinition` is modified to be `name+Fingerprint` and represents a runnable test. It need not be `Discovered`, but could be file-based in the future, for example.
- Replaced `testDefinitionClassNames` method with `fingerprints` in `CompileConfiguration`.
- Added `foundAnnotation` to `AnalysisCallback`
- Added `Runner2`, `Fingerprint`, `AnnotationFingerprint`, and `SubclassFingerprint` to the test-interface. Existing test frameworks should still work. Implement `Runner2` to use fingerprints other than `SubclassFingerprint`.

### 0.7.1 to 0.7.2

- `Process.apply` no longer uses `CommandParser`. This should fix issues with the android-plugin.
- Added `sbt.impl.Arguments` for parsing a command like a normal action (for Processors)
- Arguments are passed to `javac` using an argument file (@)
- Added `webappUnmanaged: PathFinder` method to `DefaultWebProject`. Paths selected by this `PathFinder` will not be pruned by `prepare-webapp` and will not be packaged by package. For example, to exclude the GAE datastore directory:

```
override def webappUnmanaged = (temporaryWarPath / "WEB-INF" / "appengine-generated"
```

- Added some String generation methods to `PathFinder`: `toString` for debugging and `absString` and `relativeString` for joining the absolute (relative) paths by the platform separator.
- Made tab completors lazier to reduce startup time.
- Fixed `console-project` for custom subprojects
- `Processor` split into `Processor/BasicProcessor`. `Processor` provides high level of integration with command processing. `BasicProcessor` operates on a `Project` but does not affect command processing.
- Can now use `Launcher` externally, including launching `sbt` outside of the official jar. This means a `Project` can now be created from tests.
- Works with Scala 2.8 trunk
- Fixed logging level behavior on subprojects.
- All sbt code is now at <https://github.com/harrah/xsbt> in one project.

### 0.7.0 to 0.7.1

- Fixed Jetty 7 support to work with JRebel
- Fixed make-pom to generate valid dependencies section

### 0.5.6 to 0.7.0

- Unified batch and interactive commands. All commands that can be executed at interactive prompt can be run from the command line. To run commands and then enter interactive prompt, make the last command 'shell'.
- Properly track certain types of synthetic classes, such as for comprehension with >30 clauses, during compilation.
- Jetty 7 support
- Allow launcher in the project root directory or the lib directory. The jar name must have the form 'sbt-launch.jar' in order to be excluded from the classpath.
- Stack trace detail can be controlled with 'on', 'off', 'nosbt', or an integer level. 'nosbt' means to show stack frames up to the first sbt method. An integer level denotes the number of frames to show for each cause. This feature is courtesy of Tony Sloane.
- New action 'test-run' method that is analogous to 'run', but for test classes.
- New action 'clean-plugins' task that clears built plugins (useful for plugin development).
- Can provide commands from a file with new command: <filename
- Can provide commands over loopback interface with new command: <port
- Scala version handling has been completely redone.
- The version of Scala used to run sbt (currently 2.7.7) is decoupled from the version used to build the project.
- Changing between Scala versions on the fly is done with the command: ++<version>
- Cross-building is quicker. The project definition does not need to be re-compiled against each version in the cross-build anymore.
- Scala versions are specified in a space-delimited list in the build.scala.versions property.
- Dependency management:
- make-pom task now uses custom pom generation code instead of Ivy's pom writer.
- Basic support for writing out Maven-style repositories to the pom
- Override the 'pomExtra' method to provide XML (scala.xml.NodeSeq) to insert directly into the generated pom.
- Complete control over repositories is now possible by overriding ivyRepos-

itories.

- The interface to Ivy can be used directly.
  - Test framework support is now done through a uniform test interface.
- Implications:
- New versions of specs, ScalaCheck, and ScalaTest are supported as soon as they are released.
  - Support is better, since the test framework authors provide the implementation.
  - Arguments can be passed to the test framework. For example: `{{{ > test-only your.test -a -b -c }}}}`
  - Can provide custom task start and end delimiters by defining the system properties `sbt.start.delimiter` and `sbt.end.delimiter`.
  - Revamped launcher that can launch Scala applications, not just sbt
  - Provide a configuration file to the launcher and it can download the application and its dependencies from a repository and run it.
  - sbt's configuration can be customized. For example,
  - The `sbt` version to use in projects can be fixed, instead of read from `project/build.properties`.
  - The default values used to create a new project can be changed.
  - The repositories used to fetch `sbt` and its dependencies, including Scala, can be configured.
  - The location `sbt` is retrieved to is configurable. For example, `/home/user/.ivy2/sbt/` could be used instead of `project/boot/`.

#### 0.5.5 to 0.5.6

- Support specs specifications defined as classes
- Fix specs support for 1.6
- Support ScalaTest 1.0
- Support ScalaCheck 1.6
- Remove remaining uses of structural types

#### 0.5.4 to 0.5.5

- Fixed problem with classifier support and the corresponding test
- No longer need `"->default"` in configurations (automatically mapped).
- Can specify a specific nightly of Scala 2.8 to use (for example: `2.8.0-20090910.003346-+`)
- Experimental support for searching for project (`-Dsbt.boot.search=none | only | root-first | nearest`)
- Fix issue where last path component of local repository was dropped if it did not exist.
- Added support for configuring repositories on a per-module basis.

- Unified batch-style and interactive-style commands. All commands that were previously interactive-only should be available batch-style. ‘reboot’ does not pick up changes to ‘scala.version’ properly, however.

#### 0.5.2 to 0.5.4

- Many logging related changes and fixes. Added `FilterLogger` and cleaned up interaction between `Logger`, scripted testing, and the builder projects. This included removing the `recordingDepth` hack from `Logger`. `Logger` buffering is now enabled/disabled per thread.
- Fix `compileOptions` being fixed after the first compile
- Minor fixes to output directory checking
- Added `defaultLoggingLevel` method for setting the initial level of a project’s `Logger`
- Cleaned up internal approach to adding extra default configurations like plugin
- Added `syncPathsTask` for synchronizing paths to a target directory
- Allow multiple instances of Jetty (new `jettyRunTasks` can be defined with different ports)
- `jettyRunTask` accepts configuration in a single configuration wrapper object instead of many parameters
- Fix web application class loading (issue #35) by using `jettyClasspath=testClasspath—jettyRunClasspath` for loading Jetty. A better way would be to have a `jetty` configuration and have `jettyClasspath=managedClasspath(‘jetty’)`, but this maintains compatibility.
- Copy resources to `target/resources` and `target/test-resources` using `copyResources` and `copyTestResources` tasks. Properly include all resources in web applications and classpaths (issue #36). `mainResources` and `testResources` are now the definitive methods for getting resources.
- Updated for 2.8 (`sbt` now compiles against September 11, 2009 nightly build of Scala)
- Fixed issue with position of `^` in compile errors
- Changed order of repositories (local, shared, Maven Central, user, Scala Tools)
- Added Maven Central to resolvers used to find Scala library/compiler in launcher

- Fixed problem that prevented detecting user-specified subclasses
- Fixed exit code returned when exception thrown in main thread for `TrapExit`
- Added `javap` task to `DefaultProject`. It has tab completion on compiled project classes and the run classpath is passed to `javap` so that library classes are available. Examples: :

```
> javap your.Clazz
> javap -c scala.List
```

- Added `exec` task. Mixin `Exec` to project definition to use. This forks the command following `exec`. Examples: :

```
> exec echo Hi
> exec find src/main/scala -iname *.scala -exec wc -l {} ;
```

- Added `sh` task for users with a unix-style shell available (runs `/bin/sh -c <arguments>`). Mixin `Exec` to project definition to use. Example: :

```
> sh find src/main/scala -iname *.scala | xargs cat | wc -l
```

- Proper dependency graph actions (previously was an unsupported prototype): `graph-src` and `graph-pkg` for source dependency graph and quasi-package dependency graph (based on source directories and source dependencies)
- Improved Ivy-related code to not load unnecessary default settings
- Fixed issue #39 (sources were not relative in `src` package)
- Implemented issue #38 (`InstallProject` with ‘install’ task)
- Vesa’s patch for configuring the output of forked Scala/Java and processes
- Don’t buffer logging of forked `run` by default
- Check `Project.terminateWatch` to determine if triggered execution should stop for a given keypress.
- Terminate triggered execution only on ‘enter’ by default (previously, any keypress stopped it)
- Fixed issue #41 (parent project should not declare jar artifact)
- Fixed issue #42 (search parent directories for `ivysettings.xml`)
- Added support for extra attributes with Ivy. Use `extra(key -> value)` on `ModuleIDs` and `Artifacts`. To define for a project’s ID: :

```
override def projectID = super.projectID extra(key -> value)
```

To specify in a dependency: :

```
val dep = normalID extra(key -> value)
```

### 0.5.1 to 0.5.2

- Fixed problem where dependencies of `sbt` plugins were not on the compile classpath
- Added `execTask` that runs an `sbt.ProcessBuilder` when invoked
- Added implicit conversion from `scala.xml.Elem` to `sbt.ProcessBuilder` that takes the element's text content, trims it, and splits it around whitespace to obtain the command.
- Processes can now redirect standard input (see `run` with Boolean argument or `!<` operator on `ProcessBuilder`), off by default
- Made scripted framework a plugin and scripted tests now go in `src/sbt-test` by default
- Can define and use an sbt test framework extension in a project
- Fixed `run` action swallowing exceptions
- Fixed tab completion for method tasks for multi-project builds
- Check that tasks in `compoundTask` do not reference static tasks
- Make `toString` of `Paths` in subprojects relative to root project directory
- `crossScalaVersions` is now inherited from parent if not specified
- Added `scala-library.jar` to the `javac` classpath
- Project dependencies are added to published `ivy.xml`
- Added dependency tracking for Java sources using classfile parsing (with the usual limitations)
- Added `Process.cat` that will send contents of URLs and Files to standard output. Alternatively, `cat` can be used on a single URL or File. Example:  
:

```
import java.net.URL
import java.io.File
val spde = new URL("http://technically.us/spde/About")
val dispatch = new URL("http://databinder.net/dispatch/About")
val build = new File("project/build.properties")
cat(spde, dispatch, build) #| "grep -i scala" !
```



#### 0.4.6 to 0.5/0.5.1

- Fixed `ScalaTest` framework dropping stack traces
- Publish only public configurations by default
- Loader now adds `.m2/repository` for downloading Scala jars
- Can now fork the compiler and runner and the runner can use a different working directory.
- Maximum compiler errors shown is now configurable
- Fixed rebuilding and republishing released versions of `sbt` against new Scala versions (attempt #2)
- Fixed snapshot reversion handling (Ivy needs changing pattern set on cache, apparently)
- Fixed handling of default configuration when `useMavenConfiguration` is `true`
- Cleanup on `Environment`, `Analysis`, `Conditional`, `MapUtilities`, and more...
- Tests for `Environment`, source dependencies, library dependency management, and more...
- Dependency management and multiple Scala versions
- Experimental plugin for producing project bootstrapper in a self-extracting jar
- Added ability to directly specify `URL` to use for dependency with the `from(url: URL)` method defined on `ModuleID`
- Fixed issue #30
- Support cross-building with `+` when running batch actions
- Additional flattening for project definitions: sources can go either in `project/build/src` (recursively) or `project/build` (flat)
- Fixed manual `reboot` not changing the version of Scala when it is manually set
- Fixed tab completion for cross-building
- Fixed a class loading issue with web applications

#### 0.4.5 to 0.4.6

- Publishing to `ssh/sftp/filesystem` repository supported
- Exception traces are printed by default
- Fixed warning message about no `Class-Path` attribute from showing up for run
- Fixed `package-project` operation
- Fixed `Path.fromFile`
- Fixed issue with external process output being lost when sent to a `Buffered-Logger` with `parallelExecution` enabled.
- Preserve history across `clean`

- Fixed issue with making relative path in jar with wrong separator
- Added cross-build functionality (prefix action with +).
- Added methods `scalaLibraryJar` and `scalaCompilerJar` to `FileUtilities`
- Include project dependencies for `deliver/publish`
- Add Scala dependencies for `make-pom/deliver/publish`, which requires these to depend on package
- Properly add compiler jar to run/test classpaths when main sources depend on it
- `TestFramework` root `ClassLoader` filters compiler classes used by sbt, which is required for projects using the compiler.
- Better access to dependencies:
- `mainDependencies` and `testDependencies` provide an analysis of the dependencies of your code as determined during compilation
- `scalaJars` is deprecated, use `mainDependencies.scalaJars` instead (provides a `PathFinder`, which is generally more useful)
- Added `jettyPort` method to `DefaultWebProject`.
- Fixed `package-project` to exclude `project/boot` and `project/build/target`
- Support specs 1.5.0 for Scala 2.7.4 version.
- Parallelization at the subtask level
- Parallel test execution at the suite/specification level.

#### 0.4.3 to 0.4.5

- Sorted out repository situation in loader
- Added support for `http_proxy` environment variable
- Added `download` method from Nathan to `FileUtilities` to retrieve the contents of a URL.
- Added special support for compiler plugins, see [compiler plugins support page](#).
- `reload` command in scripted tests will now properly handle success/failure
- Very basic support for Java sources: Java sources under `src/main/java` and `src/test/java` will be compiled.
- `parallelExecution` defaults to value in parent project if there is one.
- Added 'console-project' that enters the Scala interpreter with the current Project bound to the variable project.
- The default Ivy cache manager is now configured with `useOrigin=true` so that it doesn't cache artifacts from the local filesystem.
- For users building from trunk, if a project specifies a version of sbt that ends in `-SNAPSHOT`, the loader will update sbt every time it starts up. The trunk version of sbt will always end in `-SNAPSHOT` now.
- Added automatic detection of classes with main methods for use when `mainClass` is not explicitly specified in the project definition. If exactly one main class is detected, it is used for run and package. If multiple

main classes are detected, the user is prompted for which one to use for run. For package, no Main-Class attribute is automatically added and a warning is printed.

- Updated build to cross-compile against Scala 2.7.4.
- Fixed `proguard` task in `sbt`'s project definition
- Added `manifestClassPath` method that accepts the value for the Class-Path attribute
- Added `PackageOption` called `ManifestAttributes` that accepts (java.util.jar.Attributes.Name, String) or (String, String) pairs and adds them to the main manifest attributes
- Fixed some situations where characters would not be echoed at prompts other than main prompt.
- Fixed issue #20 (use `http_proxy` environment variable)
- Implemented issue #21 (native process wrapper)
- Fixed issue #22 (rebuilding and republishing released versions of sbt against new Scala versions, specifically Scala 2.7.4)
- Implemented issue #23 (inherit inline repositories declared in parent project)

#### 0.4 to 0.4.3

- Direct dependencies on Scala libraries are checked for version equality with `scala.version`
- Transitive dependencies on `scala-library` and `scala-compiler` are filtered
- They are fixed by `scala.version` and provided on the classpath by sbt
- To access them, use the `scalaJars` method, `classOf[ScalaObject].getProtectionDomain.getCodeSource`, or `mainCompileConditional.analysis.allExternals`
- The configurations checked/filtered as described above are configurable. Nonstandard configurations are not checked by default.
- Version of `sbt` and Scala printed on startup
- Launcher asks if you want to try a different version if `sbt` or Scala could not be retrieved.
- After changing `scala.version` or `sbt.version` with `set`, note is printed that reboot is required.
- Moved managed dependency actions to `BasicManagedProject` (update is now available on `ParentProject`)
- Cleaned up `sbt`'s build so that you just need to do `update` and full-build to build from source. The trunk version of sbt will be available for use from the loader.
- The loader is now a subproject.
- For development, you'll still want the usual actions (such as `package`) for the main builder and `proguard` to build the loader.

- Fixed analysis plugin improperly including traits/abstract classes in subclass search
- **ScalaProjects** already had everything required to be parent projects: flipped the switch to enable it
- Proper method task support in scripted tests (**package** group tests rightly pass again)
- Improved tests in loader that check that all necessary libraries were downloaded properly

### 0.3.7 to 0.4

- Fixed issue with **build.properties** being unnecessarily updated in sub-projects when loading.
- Added method to compute the SHA-1 hash of a **String**
- Added **pack200** methods
- Added initial process interface
- Added initial webstart support
- Added **gzip** methods
- Added **sleep** and **newer** commands to scripted testing.
- Scripted tests now test the version of **sbt** being built instead of the version doing the building.
- **testResources** is put on the test classpath instead of **testResourcesPath**
- Added **jetty-restart**, which does **jetty-stop** and then **jetty-run**
- Added automatic reloading of default web application
- Changed packaging behaviors (still likely to change)
- Inline configurations now allowed (can be used with configurations in inline XML)
- Split out some code related to managed dependencies from **BasicScalaProject** to new class **BasicManagedProject**
- Can specify that maven-like configurations should be automatically declared
- Fixed problem with nested modules being detected as tests
- **testResources**, **integrationTestResources**, and **mainResources** should now be added to appropriate classpaths
- Added project organization as a property that defaults to inheriting from the parent project.
- Project creation now prompts for the organization.
- Added method tasks, which are top-level actions with parameters.
- Made **help**, **actions**, and **methods** commands available to batch-style invocation.
- Applied Mikko's two fixes for webstart and fixed problem with **pack200+sign**. Also, fixed nonstandard behavior when **gzip** enabled.
- Added **control** method to **Logger** for action lifecycle logging

- Made standard logging level convenience methods final
- Made **BufferedLogger** have a per-actor buffer instead of a global buffer
- Added a **SynchronizedLogger** and a **MultiLogger** (intended to be used with the yet unwritten **FileLogger**)
- Changed method of atomic logging to be a method **logAll** accepting **List[LogEvent]** instead of **doSynchronized**
- Improved action lifecycle logging
- Parallel logging now provides immediate feedback about starting an action
- General cleanup, including removing unused classes and methods and reducing dependencies between classes
- **run** is now a method task that accepts options to pass to the main method (**runOptions** has been removed, **runTask** is no longer interactive, and **run** no longer starts a console if **mainClass** is undefined)
- Major task execution changes:
  - Tasks automatically have implicit dependencies on tasks with the same name in dependent projects
  - Implicit dependencies on interactive tasks are ignored, explicit dependencies produce an error
  - Interactive tasks must be executed directly on the project on which they are defined
  - Method tasks accept input arguments (**Array[String]**) and dynamically create the task to run
  - Tasks can depend on tasks in other projects
  - Tasks are run in parallel breadth-first style
  - Added **test-only** method task, which restricts the tests to run to only those passed as arguments.
  - Added **test-failed** method task, which restricts the tests to run. First, only tests passed as arguments are run. If no tests are passed, no filtering is done. Then, only tests that failed the previous run are run.
  - Added **test-quick** method task, which restricts the tests to run. First, only tests passed as arguments are run. If no tests are passed, no filtering is done. Then, only tests that failed the previous run or had a dependency change are run.
  - Added launcher that allows declaring version of sbt/scala to build project with.
  - Added tab completion with **~**
  - Added basic tab completion for method tasks, including **test-\***
  - Changed default pack options to be the default options of **Pack200.Packer**
  - Fixed **~** behavior when action doesn't exist

### 0.3.6 to 0.3.7

- Improved classpath methods

- Refactored various features into separate project traits
- **ParentProject** can now specify dependencies
- Support for **optional** scope
- More API documentation
- Test resource paths provided on classpath for testing
- Added some missing read methods in **FileUtilities**
- Added scripted test framework
- Change detection using hashes of files
- Fixed problem with manifests not being generated (bug #14)
- Fixed issue with scala-tools repository not being included by default (again)
- Added option to set ivy cache location (mainly for testing)
- trace is no longer a logging level but a flag enabling/disabling stack traces
- Project.loadProject and related methods now accept a Logger to use
- Made hidden files and files that start with '.' excluded by default ('.\*' is required because Subversion seems to not mark .svn directories hidden on Windows)
- Implemented exit codes
- Added continuous compilation command **cc**

#### 0.3.5 to 0.3.6

- Fixed bug #12.
- Compiled with 2.7.2.

#### 0.3.2 to 0.3.5

- Fixed bug #11.
- Fixed problem with dependencies where source jars would be used instead of binary jars.
- Fixed scala-tools not being used by default for inline configurations.
- Small dependency management error message correction
- Slight refactoring for specifying whether scala-tools releases gets added to configured resolvers
- Separated repository/dependency overriding so that repositories can be specified inline for use with ivy.xml or pom.xml files
- Added ability to specify Ivy XML configuration in Scala.
- Added **clean-cache** action for deleting Ivy's cache
- Some initial work towards accessing a resource directory from tests
- Initial tests for **Path**
- Some additional **FileUtilities** methods, some **FileUtilities** method adjustments and some initial tests for **FileUtilities**

- A basic framework for testing `ReflectUtilities`, not run by default because of run time
- Minor cleanup to `Path` and added non-empty check to path components
- Catch additional exceptions in `TestFramework`
- Added `copyTask` task creation method.
- Added `jetty-run` action and added ability to package war files.
- Added `jetty-stop` action.
- Added `console-quick` action that is the same as `console` but doesn't compile sources first.
- Moved some custom `ClassLoaders` to `ClasspathUtilities` and improved a check.
- Added ability to specify hooks to call before `sbt` shuts down.
- Added `zip`, `unzip` methods to `FileUtilities`
- Added `append` equivalents to `write*` methods in `FileUtilities`
- Added first draft of integration testing
- Added batch command `compile-stats`
- Added methods to create tasks that have basic conditional execution based on declared sources/products of the task
- Added `newerThan` and `olderThan` methods to `Path`
- Added `reload` action to reread the project definition without losing the performance benefits of an already running jvm
- Added `help` action to tab completion
- Added handling of (effectively empty) scala source files that create no class files: they are always interpreted as modified.
- Added prompt to retry project loading if compilation fails
- `package` action now uses `fileTask` so that it only executes if files are out of date
- fixed `ScalaTest` framework wrapper so that it fails the `test` action if tests fail
- Inline dependencies can now specify configurations

### 0.3.1 to 0.3.2

- Compiled jar with Java 1.5.

### 0.3 to 0.3.1

- Fixed bugs #8, #9, and #10.

### 0.2.3 to 0.3

- Version change only for first release.

### 0.2.2 to 0.2.3

- Added tests for `Dag`, `NameFilter`, `Version`
- Fixed handling of trailing `*`s in `GlobFilter` and added some error-checking for control characters, which `Pattern` doesn't seem to like
- Fixed `Analysis.allProducts` implementation
- It previously returned the sources instead of the generated classes
- Will only affect the count of classes (it should be correct now) and the debugging of missed classes (erroneously listed classes as missed)
- Made some implied preconditions on `BasicVersion` and `OpaqueVersion` explicit
- Made increment version behavior in `ScalaProject` easier to overload
- Added `Seq[..Option]` alternative to `...Option*` for tasks
- Documentation generation fixed to use latest value of version
- Fixed `BasicVersion.incrementMicro`
- Fixed test class loading so that `sbt` can test the version of `sbt` being developed (previously, the classes from the executing version of `sbt` were tested)

### 0.2.1 to 0.2.2

- Package name is now a call-by-name parameter for the package action
- Fixed release action calling compile multiple times

### 0.2.0 to 0.2.1

- Added some action descriptions
- jar name now comes from normalized name (lowercased and spaces to dashes)
- Some cleanups related to creating filters
- Path should only 'get' itself if the underlying file exists to be consistent with other `PathFinders`
- Added `---` operator for `PathFinder` that excludes paths from the `PathFinder` argument
- Removed `***` operator on `PathFinder`
- `**` operator on `PathFinder` matches all descendants or self that match the `NameFilter` argument
- The above should fix bug #6
- Added version increment and release actions.
- Can now build `sbt` with `sbt`. Build scripts `build` and `clean` will still exist.



### 0.1.9 to 0.2.0

- Implemented typed properties and access to system properties
- Renamed `metadata` directory to `project`
- Information previously in `info` file now obtained by properties:
- `info.name` --> `name`
- `info.currentVersion` --> `version`
- Concrete `Project` subclasses should have a constructor that accepts a single argument of type `ProjectInfo` (argument dependencies: `Iterable[Project]` has been merged into `ProjectInfo`)

### 0.1.8 to 0.1.9

- Better default implementation of `allSources`.
- Generate warning if two jars on classpath have the same name.
- Upgraded to specs 1.4.0
- Upgraded to `ScalaCheck` 1.5
- Changed some update options to be final vals instead of objects.
- Added some more API documentation.
- Removed release action.
- Split compilation into separate main and test compilations.
- A failure in a `ScalaTest` run now fails the test action.
- Implemented reporters for `compile/scaladoc`, `ScalaTest`, `ScalaCheck`, and specs that delegate to the appropriate `sbt.Logger`.

### 0.1.7 to 0.1.8

- Improved configuring of tests to exclude.
- Simplified version handling.
- Task `&&` operator properly handles dependencies of tasks it combines.
- Changed method of inline library dependency declarations to be simpler.
- Better handling of errors in parallel execution.

### 0.1.6 to 0.1.7

- Added graph action to generate dot files (for graphviz) from dependency information (work in progress).
- Options are now passed to tasks as varargs.
- Redesigned `Path` properly, including `PathFinder` returning a `Set[Path]` now instead of `Iterable[Path]`.
- Moved paths out of `ScalaProject` and into `BasicProjectPaths` to keep path definitions separate from task definitions.

- Added initial support for managing third-party libraries through the `update` task, which must be explicitly called (it is not a dependency of `compile` or any other task). This is experimental, undocumented, and known to be incomplete.
- Parallel execution implementation at the project level, disabled by default. To enable, add: `scala override def parallelExecution = true` to your project definition. In order for logging to make sense, all project logging is buffered until the project is finished executing. Still to be done is some sort of notification of project execution (which ones are currently executing, how many remain)
- `run` and `console` are now specified as “interactive” actions, which means they are only executed on the project in which they are defined when called directly, and not on all dependencies. Their dependencies are still run on dependent projects.
- Generalized conditional tasks a bit. Of note is that `analysis` is no longer required to be in `metadata/analysis`, but is now in `target/analysis` by default.
- Message now displayed when project definition is recompiled on startup
- Project no longer inherits from `Logger`, but now has a `log` member.
- Dependencies passed to `project` are checked for null (may help with errors related to initialization/circular dependencies)
- Task dependencies are checked for null
- Projects in a multi-project configuration are checked to ensure that output paths are different (check can be disabled)
- Made `update` task globally synchronized because Ivy is not thread-safe.
- Generalized test framework, directly invoking frameworks now (used reflection before).
- Moved license files to `licenses/`
- Added support for `specs` and some support for `ScalaTest` (the test action doesn't fail if `ScalaTest` tests fail).
- Added `specs`, `ScalaCheck`, `ScalaTest` jars to `lib/`
- These are now required for compilation, but are optional at runtime.
- Added the appropriate licenses and notices.
- Options for `update` action are now taken from `updateOptions` member.
- Fixed `SbtManager` inline dependency manager to work properly.
- Improved Ivy configuration handling (not compiled with test dependencies yet though).
- Added case class implementation of `SbtManager` called `SimpleManager`.
- Project definitions not specifying dependencies can now use just a single argument constructor.

### 0.1.5 to 0.1.6

- `run` and `console` handle `System.exit` and multiple threads in user code under certain circumstances (see [running project code](#)).

### 0.1.4 to 0.1.5

- Generalized interface with plugin (see Analysis Callback)
- Split out task implementations and paths from `Project` to `ScalaProject`
- Subproject support (changed required project constructor signature: see `sbt/DefaultProject.scala`)
- Can specify dependencies between projects
- Execute tasks across multiple projects
- Classpath of all dependencies included when compiling
- Proper inter-project source dependency handling
- Can change to a project in an interactive session to work only on that project (and its dependencies)
- External dependency handling
- Tracks non-source dependencies (compiled classes and jars)
- Requires each class to be provided by exactly one classpath element (This means you cannot have two versions of the same class on the classpath, e.g. from two versions of a library)
- Changes in a project propagate the right source recompilations in dependent projects
- Consequences:
- Recompilation when changing java/scala version
- Recompilation when upgrading libraries (again, as indicated in the second point, situations where you have `library-1.0.jar` and `library-2.0.jar` on the classpath at the same time are not handled predictably. Replacing `library-1.0.jar` with `library-2.0.jar` should work as expected.)
- Changing sbt version will recompile project definitions

### 0.1.3 to 0.1.4

- Autodetection of Project definitions.
- Simple tab completion/history in an interactive session with `JLine`
- Added descriptions for most actions

### 0.1.2 to 0.1.3

- Dependency management between tasks and auto-discovery tasks.
- Should work on Windows.

### 0.1.1 to 0.1.2

- Should compile/build on Java 1.5
- Fixed run action implementation to include scala library on classpath
- Made project configuration easier

### 0.1 to 0.1.1

- Fixed handling of source files without a package
- Added easy project setup

## Migrating from 0.7 to 0.10+

The assumption here is that you are familiar with sbt 0.7 but new to sbt 1.0.0-RC2.

sbt 1.0.0-RC2's many new capabilities can be a bit overwhelming, but this page should help you migrate to 1.0.0-RC2 with a minimum of fuss.

### Why move to 1.0.0-RC2?

1. Faster builds (because it is smarter at re-compiling only what it must)
2. Easier configuration. For simple projects a single `build.sbt` file in your root directory is easier to create than `project/build/MyProject.scala` was.
3. No more `lib_managed` directory, reducing disk usage and avoiding backup and version control hassles.
4. `update` is now much faster and it's invoked automatically by sbt.
5. Terser output. (Yet you can ask for more details if something goes wrong.)

**Step 1: Read the Getting Started Guide for sbt 1.0.0-RC2** Reading the [Getting Started Guide](#) will probably save you a lot of confusion.

**Step 2: Install sbt 1.0.0-RC2** Download sbt 1.0.0-RC2 as described on [the setup page](#).

You can run 1.0.0-RC2 the same way that you run 0.7.x, either simply:

```
$ java -jar sbt-launch.jar
```

Or (as most users do) with a shell script, as described on [the setup page](#).

For more details see [the setup page](#).

**Step 3: A technique for switching an existing project** Here is a technique for switching an existing project to 1.0.0-RC2 while retaining the ability to switch back again at will. Some builds, such as those with subprojects, are not suited for this technique, but if you learn how to transition a simple project it will help you do a more complex one next.

### Preserve `project/` for 0.7.x project

Rename your `project/` directory to something like `project-old`. This will hide it from sbt 1.0.0-RC2 but keep it in case you want to switch back to 0.7.x.

### Create `build.sbt` for 1.0.0-RC2

Create a `build.sbt` file in the root directory of your project. See [.sbt build definition](#) in the Getting Started Guide, and for [simple examples](#). If you have a simple project then converting your existing project file to this format is largely a matter of re-writing your dependencies and maven archive declarations in a modified yet familiar syntax.

This `build.sbt` file combines aspects of the old `project/build/ProjectName.scala` and `build.properties` files. It looks like a property file, yet contains Scala code in a special format.

A `build.properties` file like:

```
#Project properties
#Fri Jan 07 15:34:00 GMT 2011
project.organization=org.myproject
project.name=My Project
sbt.version=0.7.7
project.version=1.0
def.scala.version=2.7.7
build.scala.versions=2.8.1
project.initialize=false
```

Now becomes part of your `build.sbt` file with lines like:

```
name := "My Project"

version := "1.0"

organization := "org.myproject"

scalaVersion := "2.9.2"
```

Currently, a `project/build.properties` is still needed to explicitly select the sbt version. For example:

### Run sbt 1.0.0-RC2

Now launch sbt. If you're lucky it works and you're done. For help debugging, see below.

### Switching back to sbt 0.7.x

If you get stuck and want to switch back, you can leave your `build.sbt` file alone. sbt 0.7.x will not understand or notice it. Just rename your 1.0.0-RC2 `project` directory to something like `project10` and rename the backup of your old project from `project-old` to `project` again.

**FAQs** There's a section in the [FAQ](#) about migration from 0.7 that covers several other important points.

## Detailed Topics

This part of the documentation has pages documenting particular sbt topics in detail. Before reading anything in here, you will need the information in the [Getting Started Guide](#) as a foundation.

Other resources include the [How to](#) and [Developer's Guide](#) sections in this reference, and the [API Documentation](#)

## Using sbt

This part of the documentation has pages documenting particular sbt topics in detail. Before reading anything in here, you will need the information in the [Getting Started Guide](#) as a foundation.

## Command Line Reference

This page is a relatively complete list of command line options, commands, and tasks you can use from the sbt interactive prompt or in batch mode. See [Running](#) in the Getting Started Guide for an intro to the basics, while this page has a lot more detail.

## Notes on the command line

- There is a technical distinction in sbt between *tasks*, which are “inside” the build definition, and *commands*, which manipulate the build definition itself. If you’re interested in creating a command, see [Commands](#). This specific sbt meaning of “command” means there’s no good general term for “thing you can type at the sbt prompt”, which may be a setting, task, or command.
- Some tasks produce useful values. The `toString` representation of these values can be shown using `show <task>` to run the task instead of just `<task>`.
- In a multi-project build, execution dependencies and the aggregate setting control which tasks from which projects are executed. See [multi-project builds](#).

## Project-level tasks

- `clean` Deletes all generated files (the `target` directory).
- `publishLocal` Publishes artifacts (such as jars) to the local Ivy repository as described in Publishing.
- `publish` Publishes artifacts (such as jars) to the repository defined by the `publishTo` setting, described in Publishing.
- `update` Resolves and retrieves external dependencies as described in [library dependencies](#).

## Configuration-level tasks

Configuration-level tasks are tasks associated with a configuration. For example, `compile`, which is equivalent to `compile:compile`, compiles the main source code (the `compile` configuration). `test:compile` compiles the test source code (test `test` configuration). Most tasks for the `compile` configuration have an equivalent in the `test` configuration that can be run using a `test:` prefix.

- `compile` Compiles the main sources (in the `src/main/scala` directory). `test:compile` compiles test sources (in the `src/test/scala/` directory).
- `console` Starts the Scala interpreter with a classpath including the compiled sources, all jars in the `lib` directory, and managed libraries. To return to sbt, type `:quit`, `Ctrl+D` (Unix), or `Ctrl+Z` (Windows). Similarly, `test:console` starts the interpreter with the test classes and classpath.
- `consoleQuick` Starts the Scala interpreter with the project’s compile-time dependencies on the classpath. `test:consoleQuick` uses the test dependencies. This task differs from `console` in that it does not force compilation of the current project’s sources.

- **consoleProject** Enters an interactive session with sbt and the build definition on the classpath. The build definition and related values are bound to variables and common packages and values are imported. See the [consoleProject documentation](#) for more information.
- **doc** Generates API documentation for Scala source files in `src/main/scala` using scaladoc. **test:doc** generates API documentation for source files in `src/test/scala`.
- **package** Creates a jar file containing the files in `src/main/resources` and the classes compiled from `src/main/scala`. **test:package** creates a jar containing the files in `src/test/resources` and the class compiled from `src/test/scala`.
- **packageDoc** Creates a jar file containing API documentation generated from Scala source files in `src/main/scala`. **test:packageDoc** creates a jar containing API documentation for test sources files in `src/test/scala`.
- **packageSrc**: Creates a jar file containing all main source files and resources. The packaged paths are relative to `src/main/scala` and `src/main/resources`. Similarly, **test:packageSrc** operates on test source files and resources.
- **run <argument>\*** Runs the main class for the project in the same virtual machine as sbt. The main class is passed the arguments provided. Please see [Running Project Code](#) for details on the use of `System.exit` and multithreading (including GUIs) in code run by this action. **test:run** runs a main class in the test code.
- **runMain <main-class> <argument>\*** Runs the specified main class for the project in the same virtual machine as sbt. The main class is passed the arguments provided. Please see [Running Project Code](#) for details on the use of `System.exit` and multithreading (including GUIs) in code run by this action. **test:runMain** runs the specified main class in the test code.
- **test** Runs all tests detected during test compilation. See [Testing](#) for details.
- **testOnly <test>\*** Runs the tests provided as arguments. `*` (will be) interpreted as a wildcard in the test name. See [Testing](#) for details.
- **testQuick <test>\*** Runs the tests specified as arguments (or all tests if no arguments are given) that:
  1. have not been run yet OR
  2. failed the last time they were run OR
  3. had any transitive dependencies recompiled since the last successful run `*` (will be) interpreted as a wildcard in the test name. See [Testing](#) for details.



## General commands

- **exit** or **quit** End the current interactive session or build. Additionally, Ctrl+D (Unix) or Ctrl+Z (Windows) will exit the interactive prompt.
- **help** `<command>` Displays detailed help for the specified command. If the command does not exist, help lists detailed help for commands whose name or description match the argument, which is interpreted as a regular expression. If no command is provided, displays brief descriptions of the main commands. Related commands are tasks and settings.
- **projects** [`add|remove` `<URI>`] List all available projects if no arguments provided or adds/removes the build at the provided URI. (See [multi-project builds](#) for details on multi-project builds.)
- **project** `<project-id>` Change the current project to the project with ID `<project-id>`. Further operations will be done in the context of the given project. (See [multi-project builds](#) for details on multiple project builds.)
- **~** `<command>` Executes the project specified action or method whenever source files change. See [Triggered Execution](#) for details.
- **< filename** Executes the commands in the given file. Each command should be on its own line. Empty lines and lines beginning with '#' are ignored
- **+** `<command>` Executes the project specified action or method for all versions of Scala defined in the `crossScalaVersions` setting.
- **++** `<version|home-directory>` `<command>` Temporarily changes the version of Scala building the project and executes the provided command. `<command>` is optional. The specified version of Scala is used until the project is reloaded, settings are modified (such as by the `set` or `session` commands), or `++` is run again. `<version>` does not need to be listed in the build definition, but it must be available in a repository. Alternatively, specify the path to a Scala installation.
- **;** `A` **;** `B` Execute A and if it succeeds, run B. Note that the leading semicolon is required.
- **eval** `<Scala-expression>` Evaluates the given Scala expression and returns the result and inferred type. This can be used to set system properties, as a calculator, to fork processes, etc ... For example:

```
> eval System.setProperty("demo", "true")
> eval 1+1
> eval "ls -l" !
```

## Commands for managing the build definition

- **reload** [**plugins**|**return**] If no argument is specified, reloads the build, recompiling any build or plugin definitions as necessary. **reload plugins** changes the current project to the build definition project (in `project/`). This can be useful to directly manipulate the build definition. For example, running **clean** on the build definition project will force snapshots to be updated and the build definition to be recompiled. **reload return** changes back to the main project.
- **set** <setting-expression> Evaluates and applies the given setting definition. The setting applies until sbt is restarted, the build is reloaded, or the setting is overridden by another **set** command or removed by the **session** command. See [.sbt build definition](#) and [inspecting settings](#) for details.
- **session** <command> Manages session settings defined by the **set** command. It can persist settings configured at the prompt. See [Inspecting-Settings](#) for details.
- **inspect** <setting-key> Displays information about settings, such as the value, description, defining scope, dependencies, delegation chain, and related settings. See [Inspecting Settings](#) for details.

## Command Line Options

System properties can be provided either as JVM options, or as SBT arguments, in both cases as **-Dprop=value**. The following properties influence SBT execution. Also see [sbt launcher](#).

Property

Values

Default

Meaning

`sbt.log.noformat`

Boolean

false

If true, disable ANSI color codes. Useful on build servers or terminals that do not support color.

`sbt.global.base`

Directory

`~/.sbt/1.0`

The directory containing global settings and plugins

sbt.ivy.home

Directory

~/ivy2

The directory containing the local Ivy repository and artifact cache

sbt.boot.directory

Directory

~/sbt/boot

Path to shared boot directory

sbt.main.class

String

xsbt.inc.debug

Boolean

false

sbt.extraClasspath

Classpath Entries

(jar files or directories) that are added to sbt's classpath. Note that the entries are delimited by comma, e.g.: entry1, entry2,... See also resource in the sbt launcher documentation.

sbt.version

Version

1.0.0-RC2

sbt version to use, usually taken from project/build.properties.

sbt.boot.properties

File

The path to find the sbt boot properties file. This can be a relative path, relative to the sbt base directory, the users home directory or the location of the sbt jar file, or it can be an absolute path or an absolute file URI.

sbt.override.build.repos

Boolean

false

If true, repositories configured in a build definition are ignored and the repositories configured for the launcher are used instead. See sbt.repository.config and the sbt launcher documentation.

sbt.repository.config

File

~/.sbt/repositories

A file containing the repositories to use for the launcher. The format is the same as a [repositories] section for a sbt launcher configuration file. This setting is typically used in conjunction with setting `sbt.override.build.repos` to true (see previous row and the sbt launcher documentation).

## Console Project

### Description

The `consoleProject` task starts the Scala interpreter with access to your project definition and to sbt. Specifically, the interpreter is started up with these commands already executed:

```
import sbt._
import Keys._
import <your-project-definition>._
import currentState._
import extracted._
import cpHelpers._
```

For example, running external processes with sbt's process library (to be included in the standard library in Scala 2.9):

```
> "tar -zcvf project-src.tar.gz src" !
> "find project -name *.jar" !
> "cat build.sbt" #| "grep version" #> new File("sbt-version") !
> "grep -r null src" #|| "echo null-free" !
> uri("http://databinder.net/dispatch/About").toURL #> file("About.html") !
```

`consoleProject` can be useful for creating and modifying your build in the same way that the Scala interpreter is normally used to explore writing code. Note that this gives you raw access to your build. Think about what you pass to `IO.delete`, for example.

### Accessing settings

To get a particular setting, use the form:

```
> val value = (<key> in <scope>).eval
```

## Examples

```
> IO.delete( (classesDirectory in Compile).eval )
```

Show current compile options:

```
> (scalacOptions in Compile).eval foreach println
```

Show additionally configured repositories.

```
> resolvers.eval foreach println
```

## Evaluating tasks

To evaluate a task (and its dependencies), use the same form:

```
> val value = (<key> in <scope>).eval
```

**Examples** Show all repositories, including defaults.

```
> fullResolvers.eval foreach println
```

Show the classpaths used for compilation and testing:

```
> (fullClasspath in Compile).eval.files foreach println  
> (fullClasspath in Test).eval.files foreach println
```

## State

The current `build State` is available as `currentState`. The contents of `currentState` are imported by default and can be used without qualification.

**Examples** Show the remaining commands to be executed in the build (more interesting if you invoke `consoleProject` like `; consoleProject ; clean ; compile`):

```
> remainingCommands
```

Show the number of currently registered commands:

```
> definedCommands.size
```

## Cross-building

### Introduction

Different versions of Scala can be binary incompatible, despite maintaining source compatibility. This page describes how to use `sbt` to build and publish your project against multiple versions of Scala and how to use libraries that have done the same.

### Publishing Conventions

The underlying mechanism used to indicate which version of Scala a library was compiled against is to append `_<scala-version>` to the library's name. For Scala 2.10.0 and later, the binary version is used. For example, `dispatch` becomes `dispatch_2.8.1` for the variant compiled against Scala 2.8.1 and `dispatch_2.10` when compiled against 2.10.0, 2.10.0-M1 or any 2.10.x version. This fairly simple approach allows interoperability with users of Maven, Ant and other build tools.

The rest of this page describes how `sbt` handles this for you as part of cross-building.

### Using Cross-Built Libraries

To use a library built against multiple versions of Scala, double the first `%` in an inline dependency to be `%%`. This tells `sbt` that it should append the current version of Scala being used to build the library to the dependency's name. For example:

```
libraryDependencies += "net.databinder" %% "dispatch" % "0.8.0"
```

A nearly equivalent, manual alternative for a fixed version of Scala is:

```
libraryDependencies += "net.databinder" % "dispatch_2.10" % "0.8.0"
```

or for Scala versions before 2.10:

```
libraryDependencies += "net.databinder" % "dispatch_2.8.1" % "0.8.0"
```

## Cross-Building a Project

Define the versions of Scala to build against in the `crossScalaVersions` setting. Versions of Scala 2.8.0 or later are allowed. For example, in a `.sbt` build definition:

```
crossScalaVersions := Seq("2.8.2", "2.9.2", "2.10.0")
```

To build against all versions listed in `build.scala.versions`, prefix the action to run with `+`. For example:

```
> + package
```

A typical way to use this feature is to do development on a single Scala version (no `+` prefix) and then cross-build (using `+`) occasionally and when releasing.

You can use `++ <version>` to temporarily switch the Scala version currently being used to build. For example:

```
> ++ 2.12.2
[info] Setting version to 2.12.2
> ++ 2.11.11
[info] Setting version to 2.11.11
> compile
```

`<version>` should be either a version for Scala published to a repository or the path to a Scala home directory, as in `++ /path/to/scala/home`. See [Command Line Reference](#) for details.

The ultimate purpose of `+` is to cross-publish your project. That is, by doing:

```
> + publish
```

you make your project available to users for different versions of Scala. See [Publishing](#) for more details on publishing your project.

In order to make this process as quick as possible, different output and managed dependency directories are used for different versions of Scala. For example, when building against Scala 2.10.0,

- `./target/` becomes `./target/scala_2.10.0/`
- `./lib_managed/` becomes `./lib_managed/scala_2.10/`

Packaged jars, wars, and other artifacts have `_<scala-version>` appended to the normal artifact ID as mentioned in the Publishing Conventions section above.

This means that the outputs of each build against each version of Scala are independent of the others. `sbt` will resolve your dependencies for each version separately. This way, for example, you get the version of Dispatch compiled against 2.8.1 for your 2.8.1 build, the version compiled against 2.10 for your 2.10.x builds, and so on. You can have fine-grained control over the behavior for different Scala versions by using the `cross` method on `ModuleID`. These are equivalent:

```
"a" % "b" % "1.0"
"a" % "b" % "1.0" cross CrossVersion.Disabled
```

These are equivalent:

```
"a" %% "b" % "1.0"
"a" % "b" % "1.0" cross CrossVersion.binary
```

This overrides the defaults to always use the full Scala version instead of the binary Scala version:

```
"a" % "b" % "1.0" cross CrossVersion.full
```

`CrossVersion.patch` sits between `CrossVersion.binary` and `CrossVersion.full` in that it strips off any trailing `-bin-...` suffix which is used to distinguish variant but binary compatible Scala toolchain builds.

```
"a" % "b" % "1.0" cross CrossVersion.patch
```

This uses a custom function to determine the Scala version to use based on the binary Scala version:

```
"a" % "b" % "1.0" cross CrossVersion.binaryMapped {
  case "2.9.1" => "2.9.0" // remember that pre-2.10, binary=full
  case "2.10"  => "2.10.0" // useful if a%b was released with the old style
  case x      => x
}
```

This uses a custom function to determine the Scala version to use based on the full Scala version:



```
"a" % "b" % "1.0" cross CrossVersion.fullMapped {
  case "2.9.1" => "2.9.0"
  case x => x
}
```

A custom function is mainly used when cross-building and a dependency isn't available for all Scala versions or it uses a different convention than the default.

## Interacting with the Configuration System

Central to sbt is the new configuration system, which is designed to enable extensive customization. The goal of this page is to explain the general model behind the configuration system and how to work with it. The Getting Started Guide (see [.sbt files](#)) describes how to define settings; this page describes interacting with them and exploring them at the command line.

### Selecting commands, tasks, and settings

A fully-qualified reference to a setting or task looks like:

```
{<build-uri>}<project-id>/config:intask::key
```

This “scoped key” reference is used by commands like `last` and `inspect` and when selecting a task to run. Only `key` is usually required by the parser; the remaining optional pieces select the scope. These optional pieces are individually referred to as scope axes. In the above description, `{<build-uri>}` and `<project-id>/` specify the project axis, `config:` is the configuration axis, and `intask` is the task-specific axis. Unspecified components are taken to be the current project (project axis) or auto-detected (configuration and task axes). An asterisk (\*) is used to explicitly refer to the `Global` context, as in `*/*:key`.

**Selecting the configuration** In the case of an unspecified configuration (that is, when the `config:` part is omitted), if the key is defined in `Global`, that is selected. Otherwise, the first configuration defining the key is selected, where order is determined by the project definition's `configurations` member. By default, this ordering is `compile`, `test`, ...

For example, the following are equivalent when run in a project root in the build in `/home/user/sample/`:

```
> compile
> compile:compile
> root/compile
> root/compile:compile
> {file:/home/user/sample/}root/compile:compile
```

As another example, `run` by itself refers to `compile:run` because there is no global `run` task and the first configuration searched, `compile`, defines a `run`. Therefore, to reference the `run` task for the `Test` configuration, the configuration axis must be specified like `test:run`. Some other examples that require the explicit `test:` axis:

```
> test:consoleQuick
> test:console
> test:doc
> test:package
```

**Task-specific Settings** Some settings are defined per-task. This is used when there are several related tasks, such as `package`, `packageSrc`, and `packageDoc`, in the same configuration (such as `compile` or `test`). For package tasks, their settings are the files to package, the options to use, and the output file to produce. Each package task should be able to have different values for these settings.

This is done with the task axis, which selects the task to apply a setting to. For example, the following prints the output jar for the different package tasks.

```
> package::artifactPath
[info] /home/user/sample/target/scala-2.8.1.final/demo_2.8.1-0.1.jar

> packageSrc::artifactPath
[info] /home/user/sample/target/scala-2.8.1.final/demo_2.8.1-0.1-src.jar

> packageDoc::artifactPath
[info] /home/user/sample/target/scala-2.8.1.final/demo_2.8.1-0.1-doc.jar

> test:package::artifactPath
[info] /home/user/sample/target/scala-2.8.1.final/root_2.8.1-0.1-test.jar
```

Note that a single colon `:` follows a configuration axis and a double colon `::` follows a task axis.

## Discovering Settings and Tasks

This section discusses the `inspect` command, which is useful for exploring relationships between settings. It can be used to determine which setting should be modified in order to affect another setting, for example.

**Value and Provided By** The first piece of information provided by `inspect` is the type of a task or the value and type of a setting. The following section of output is labeled “Provided by”. This shows the actual scope where the setting is defined. For example,

```
> inspect libraryDependencies
[info] Setting: scala.collection.Seq[sbt.ModuleID] = List(org.scalaz:scalaz-core:6.0-SNAPSHOT)
[info] Provided by:
[info] {file:/home/user/sample/}root/*:libraryDependencies
...
```

This shows that `libraryDependencies` has been defined on the current project (`{file:/home/user/sample/}root`) in the global configuration (`*`). For a task like `update`, the output looks like:

```
> inspect update
[info] Task: sbt.UpdateReport
[info] Provided by:
[info] {file:/home/user/sample/}root/*:update
...
```

**Related Settings** The “Related” section of `inspect` output lists all of the definitions of a key. For example,

```
> inspect compile
...
[info] Related:
[info] test:compile
```

This shows that in addition to the requested `compile:compile` task, there is also a `test:compile` task.

**Dependencies** Forward dependencies show the other settings (or tasks) used to define a setting (or task). Reverse dependencies go the other direction, showing what uses a given setting. `inspect` provides this information based on either the requested dependencies or the actual dependencies. Requested dependencies are those that a setting directly specifies. Actual settings are what those dependencies get resolved to. This distinction is explained in more detail in the following sections.

**Requested Dependencies** As an example, we'll look at `console`:

```
> inspect console
...
[info] Dependencies:
[info]  compile:console::fullClasspath
[info]  compile:console::scalacOptions
[info]  compile:console::initialCommands
[info]  compile:console::cleanupCommands
[info]  compile:console::compilers
[info]  compile:console::taskTemporary-directory
[info]  compile:console::scalaInstance
[info]  compile:console::streams
...

```

This shows the inputs to the `console` task. We can see that it gets its classpath and options from `fullClasspath` and `scalacOptions(for console)`. The information provided by the `inspect` command can thus assist in finding the right setting to change. The convention for keys, like `console` and `fullClasspath`, is that the Scala identifier is camel case, while the String representation is lowercase and separated by dashes. The Scala identifier for a configuration is uppercase to distinguish it from tasks like `compile` and `test`. For example, we can infer from the previous example how to add code to be run when the Scala interpreter starts up:

```
> set initialCommands in Compile in console := "import mypackage._"
> console
...
import mypackage._
...

```

`inspect` showed that `console` used the setting `compile:console::initialCommands`. Translating the `initialCommands` string to the Scala identifier gives us `initialCommands`. `compile` indicates that this is for the main sources. `console::` indicates that the setting is specific to `console`. Because of this, we can set the initial commands on the `console` task without affecting the `consoleQuick` task, for example.

**Actual Dependencies** `inspect actual <scoped-key>` shows the actual dependency used. This is useful because delegation means that the dependency can come from a scope other than the requested one. Using `inspect actual`, we see exactly which scope is providing a value for a setting. Combining `inspect actual` with plain `inspect`, we can see the range of scopes that will affect a setting. Returning to the example in Requested Dependencies,

```
> inspect actual console
...
[info] Dependencies:
[info]   compile:scalacOptions
[info]   compile:fullClasspath
[info]   *:scalaInstance
[info]   */*:initialCommands
[info]   */*:cleanupCommands
[info]   */*:taskTemporaryDirectory
[info]   *:console::compilers
[info]   compile:console::streams
...
```

For `initialCommands`, we see that it comes from the global scope (`*/*`). Combining this with the relevant output from `inspect console`:

```
compile:console::initialCommands
```

we know that we can set `initialCommands` as generally as the global scope, as specific as the current project's `console` task scope, or anything in between. This means that we can, for example, set `initialCommands` for the whole project and will affect `console`:

```
> set initialCommands := "import mypackage._"
...
```

The reason we might want to set it here this is that other console tasks will use this value now. We can see which ones use our new setting by looking at the reverse dependencies output of `inspect actual`:

```
> inspect actual initialCommands
...
[info] Reverse dependencies:
[info]   test:console
[info]   compile:consoleQuick
[info]   compile:console
[info]   test:consoleQuick
[info]   *:consoleProject
...
```

We now know that by setting `initialCommands` on the whole project, we affect all console tasks in all configurations in that project. If we didn't want the initial commands to apply for `consoleProject`, which doesn't have our project's classpath available, we could use the more specific task axis:

```
> set initialCommands in console := "import mypackage._"
> set initialCommands in consoleQuick := "import mypackage._"
```

or configuration axis:

```
> set initialCommands in Compile := "import mypackage._"
> set initialCommands in Test := "import mypackage._"
```

The next part describes the Delegates section, which shows the chain of delegation for scopes.

**Delegates** A setting has a key and a scope. A request for a key in a scope A may be delegated to another scope if A doesn't define a value for the key. The delegation chain is well-defined and is displayed in the Delegates section of the `inspect` command. The Delegates section shows the order in which scopes are searched when a value is not defined for the requested key.

As an example, consider the initial commands for `console` again:

```
> inspect console::initialCommands
...
[info] Delegates:
[info] *:console::initialCommands
[info] *:initialCommands
[info] {./}/*:console::initialCommands
[info] {./}/*:initialCommands
[info] /*:console::initialCommands
[info] /*:initialCommands
...
```

This means that if there is no value specifically for `*:console::initialCommands`, the scopes listed under Delegates will be searched in order until a defined value is found.

## Triggered Execution

You can make a command run when certain files change by prefixing the command with `~.`. Monitoring is terminated when `enter` is pressed. This triggered execution is configured by the `watch` setting, but typically the basic settings `watchSources` and `pollInterval` are modified.

- `watchSources` defines the files for a single project that are monitored for changes. By default, a project watches resources and Scala and Java sources.

- `watchTransitiveSources` then combines the `watchSources` for the current project and all execution and classpath dependencies (see [.scala build definition](#) for details on interProject dependencies).
- `pollInterval` selects the interval between polling for changes in milliseconds. The default value is 500 ms.

Some example usages are described below.

## Compile

The original use-case was continuous compilation:

```
> ~ test:compile
```

```
> ~ compile
```

## Testing

You can use the triggered execution feature to run any command or task. One use is for test driven development, as suggested by Erick on the mailing list.

The following will poll for changes to your source code (main or test) and run `testOnly` for the specified test.

```
> ~ testOnly example.TestA
```

## Running Multiple Commands

Occasionally, you may need to trigger the execution of multiple commands. You can use semicolons to separate the commands to be triggered.

The following will poll for source changes and run `clean` and `test`.

```
> ~ ;clean ;test
```

## Scripts, REPL, and Dependencies

sbt has two alternative entry points that may be used to:

- Compile and execute a Scala script containing dependency declarations or other sbt settings
- Start up the Scala REPL, defining the dependencies that should be on the classpath

These entry points should be considered experimental. A notable disadvantage of these approaches is the startup time involved.

## Setup

To set up these entry points, you can either use [conscript](#) or manually construct the startup scripts. In addition, there is a [setup script](#) for the script mode that only requires a JRE installed.

**Setup with Conscript** Install [conscript](#).

```
$ cs sbt/sbt --branch 1.0.0-RC2
```

This will create two scripts: `screpl` and `scalas`.

**Manual Setup** Duplicate your standard `sbt` script, which was set up according to [Setup](#), as `scalas` and `screpl` (or whatever names you like).

`scalas` is the script runner and should use `sbt.ScriptMain` as the main class, by adding the `-Dsbtt.main.class=sbt.ScriptMain` parameter to the `java` command. Its command line should look like:

```
$ java -Dsbtt.main.class=sbt.ScriptMain -Dsbtt.boot.directory=/home/user/.sbt/boot -jar sbt-launch.jar
```

For the REPL runner `screpl`, use `sbt.ConsoleMain` as the main class:

```
$ java -Dsbtt.main.class=sbt.ConsoleMain -Dsbtt.boot.directory=/home/user/.sbt/boot -jar sbt-launch.jar
```

In each case, `/home/user/.sbt/boot` should be replaced with wherever you want sbt's boot directory to be; you might also need to give more memory to the JVM via `-Xms512M -Xmx1536M` or similar options, just like shown in [Setup](#).

## Usage

**sbt Script runner** The script runner can run a standard Scala script, but with the additional ability to configure sbt. sbt settings may be embedded in the script in a comment block that opens with `/***`.



**Example** Copy the following script and make it executable. You may need to adjust the first line depending on your script name and operating system. When run, the example should retrieve Scala, the required dependencies, compile the script, and run it directly. For example, if you name it `shout.scala`, you would do on Unix:

```
chmod u+x shout.scala
./shout.scala
```

```
#!/usr/bin/env scalas
```

```
/**
  scalaVersion := "2.12.2"

  resolvers += Resolver.url("typesafe-ivy-repo", url("http://repo.typesafe.com/typesafe/releases/"))

  libraryDependencies += "org.scala-sbt" % "io" % "1.0.0-RC2"
 */

import sbt._, Path._
import java.io.File
import java.net.{URI, URL}
import sys.process._

def file(s: String): File = new File(s)
def uri(s: String): URI = new URI(s)

val targetDir = file("./target/")
val srcDir = file("./src/")
val toTarget = rebase(srcDir, targetDir)

def processFile(f: File): Unit = {
  val newParent = toTarget(f.getParentFile) getOrElse {sys.error("wat")}
  val file1 = newParent / f.name
  println(s"$f => $file1")
  val xs = IO.readLines(f) map { _ + "!" }
  IO.writeLines(file1, xs)
}

val fs: Seq[File] = (srcDir ** "*.scala").get
fs foreach { processFile }
```

This script will take all `*.scala` files under `src/`, append “!” at the end of the line, and write them under `target/`.

**sbt REPL with dependencies** The arguments to the REPL mode configure the dependencies to use when starting up the REPL. An argument may be either a jar to include on the classpath, a dependency definition to retrieve and put on the classpath, or a resolver to use when retrieving dependencies.

A dependency definition looks like:

```
organization%module%revision
```

Or, for a cross-built dependency:

```
organization%%module%revision
```

A repository argument looks like:

```
"id at url"
```

**Example:** To add the Sonatype snapshots repository and add Scalaz 7.0-SNAPSHOT to REPL classpath:

```
$ screpl "sonatype-releases at https://oss.sonatype.org/content/repositories/snapshots/" "org
```

This syntax was a quick hack. Feel free to improve it. The relevant class is [IvyConsole](#).

## Understanding Incremental Recompilation

Compiling Scala code with scalac is slow, but sbt often makes it faster. By understanding how, you can even understand how to make compilation even faster. Modifying source files with many dependencies might require recompiling only those source files (which might take 5 seconds for instance) instead of all the dependencies (which might take 2 minutes for instance). Often you can control which will be your case and make development faster with a few coding practices.

Improving the Scala compilation performance is a major goal of sbt, and thus the speedups it gives are one of the major motivations to use it. A significant portion of sbt's sources and development efforts deal with strategies for speeding up compilation.

To reduce compile times, sbt uses two strategies:

Reduce the overhead for restarting Scalac

Implement smart and transparent strategies for incremental recompilation, so that only modified files and the needed dependencies are recompiled.

sbt always runs Scalac in the same virtual machine. If one compiles source code using sbt, keeps sbt alive, modifies source code and triggers a new compilation, this compilation will be faster because (part of) Scalac will have already been JIT-compiled.

Reduce the number of recompiled source.

When a source file `A.scala` is modified, sbt goes to great effort to recompile other source files depending on `A.scala` only if required - that is, only if the interface of `A.scala` was modified. With other build management tools (especially for Java, like ant), when a developer changes a source file in a non-binary-compatible way, she needs to manually ensure that dependencies are also recompiled - often by manually running the clean command to remove existing compilation output; otherwise compilation might succeed even when dependent class files might need to be recompiled. What is worse, the change to one source might make dependencies incorrect, but this is not discovered automatically: One might get a compilation success with incorrect source code. Since Scala compile times are so high, running clean is particularly undesirable.

By organizing your source code appropriately, you can minimize the amount of code affected by a change. sbt cannot determine precisely which dependencies have to be recompiled; the goal is to compute a conservative approximation, so that whenever a file must be recompiled, it will, even though we might recompile extra files.

### sbt heuristics

sbt tracks source dependencies at the granularity of source files. For each source file, sbt tracks files which depend on it directly; if the **interface** of classes, objects or traits in a file changes, all files dependent on that source must be recompiled. At the moment sbt uses the following algorithm to calculate source files dependent on a given source file:

- dependencies introduced through inheritance are included *transitively*; a dependency is introduced through inheritance if a class/trait in one file inherits from a trait/class in another file
- all other direct dependencies are considered by name hashing optimization; other dependencies are also called “member reference” dependencies because they are introduced by referring to a member (class, method, type, etc.) defined in some other source file
- name hashing optimization considers all member reference dependencies in context of interface changes of a given source file; it tries to prune irrelevant dependencies by looking at names of members that got modified and checking if dependent source files mention those names

The name hashing optimization is enabled by default since sbt 0.13.6.

### How to take advantage of sbt heuristics

The heuristics used by sbt imply the following user-visible consequences, which determine whether a change to a class affects other classes.

1. Adding, removing, modifying **private** methods does not require recompilation of client classes. Therefore, suppose you add a method to a class with a lot of dependencies, and that this method is only used in the declaring class; marking it private will prevent recompilation of clients. However, this only applies to methods which are not accessible to other classes, hence methods marked with `private` or `private[this]`; methods which are private to a package, marked with `private[name]`, are part of the API.
2. Modifying the interface of a non-private method triggers name hashing optimization
3. Modifying one class does require recompiling dependencies of other classes defined in the same file (unlike said in a previous version of this guide). Hence separating different classes in different source files might reduce recompilations.
4. Changing the implementation of a method should *not* affect its clients, unless the return type is inferred, and the new implementation leads to a slightly different type being inferred. Hence, annotating the return type of a non-private method explicitly, if it is more general than the type actually returned, can reduce the code to be recompiled when the implementation of such a method changes. (Explicitly annotating return types of a public API is a good practice in general.)

All the above discussion about methods also applies to fields and members in general; similarly, references to classes also extend to objects and traits.

## Implementation of incremental recompilation

This section goes into details of incremental compiler implementation. It starts with an overview of the problem incremental compiler tries to solve and then discusses design choices that led to the current implementation.

### Overview

The goal of incremental compilation is detect changes to source files or to the classpath and determine a small set of files to be recompiled in such a way that it'll yield the final result identical to the result from a full, batch compilation. When reacting to changes the incremental compiler has to goals that are at odds with each other:

- recompile as little source files as possible cover all changes to type checking and produced
- byte code triggered by changed source files and/or classpath

The first goal is about making recompilation fast and it's a sole point of incremental compiler existence. The second goal is about correctness and sets a lower limit on the size of a set of recompiled files. Determining that set is the core problem incremental compiler tries to solve. We'll dive a little bit into this problem in the overview to understand what makes implementing incremental compiler a challenging task.

Let's consider this very simple example:

```
// A.scala
package a
class A {
  def foo(): Int = 12
}

// B.scala
package b
class B {
  def bar(x: a.A): Int = x.foo()
}
```

Let's assume both of those files are already compiled and user changes `A.scala` so it looks like this:

```
// A.scala
package a
class A {
  def foo(): Int = 23 // changed constant
}
```

The first step of incremental compilation is to compile modified source files. That's minimal set of files incremental compiler has to compile. Modified version of `A.scala` will be compiled successfully as changing the constant doesn't introduce type checking errors. The next step of incremental compilation is determining whether changes applied to `A.scala` may affect other files. In the example above only the constant returned by method `foo` has changed and that does not affect compilation results of other files.

Let's consider another change to `A.scala`:

```
// A.scala
package a
```

```
class A {
  def foo(): String = "abc" // changed constant and return type
}
```

As before, the first step of incremental compilation is to compile modified files. In this case we compile `A.scala` and compilation will finish successfully. The second step is again determining whether changes to `A.scala` affect other files. We see that the return type of the `foo` public method has changed so this might affect compilation results of other files. Indeed, `B.scala` contains call to the `foo` method so has to be compiled in the second step. Compilation of `B.scala` will fail because of type mismatch in `B.bar` method and that error will be reported back to the user. That's where incremental compilation terminates in this case.

Let's identify the two main pieces of information that were needed to make decisions in the examples presented above. The incremental compiler algorithm needs to:

- index source files so it knows whether there were API changes that might affect other source files; e.g. it needs to detect changes to method signatures as in the example above
- track dependencies between source files; once the change to an API is detected the algorithm needs to determine the set of files that might be potentially affected by this change

Both of those pieces of information are extracted from the Scala compiler.

## Interaction with the Scala compiler

Incremental compiler interacts with Scala compiler in many ways:

provides three phases additional phases that extract needed information:

api phase extracts public interface of compiled sources by walking trees and indexing types

dependency phase which extracts dependencies between source files (compilation units)

analyzer phase which captures the list of emitted class files

defines a custom reporter which allows sbt to gather errors and warnings

subclasses Global to:

add the api, dependency and analyzer phases

set the custom reporter

manages instances of the custom Global and uses them to compile files it determined that need to be compiled

**API extraction phase** The API extraction phase extracts information from Trees, Types and Symbols and maps it to incremental compiler's internal data structures described in the [api.specification](#) file. Those data structures allow to express an API in a way that is independent from Scala compiler version. Also, such representation is persistent so it is serialized on disk and reused between compiler runs or even sbt runs.

The API extraction phase consist of two major components:

1. mapping Types and Symbols to incremental compiler representation of an extracted API
2. hashing that representation

**Mapping Types and Symbols** The logic responsible for mapping Types and Symbols is implemented in [API.scala](#). With introduction of Scala reflection we have multiple variants of Types and Symbols. The incremental compiler uses the variant defined in `scala.reflect.internal` package.

Also, there's one design choice that might not be obvious. When type corresponding to a class or a trait is mapped then all inherited members are copied instead of declarations in that class/trait. The reason for doing so is that it greatly simplifies analysis of API representation because all relevant information to a class is stored in one place so there's no need for looking up parent type representation. This simplicity comes at a price: the same information is copied over and over again resulting in a performance hit. For example, every class will have members of `java.lang.Object` duplicated along with full information about their signatures.

**Hashing an API representation** The incremental compiler (as it's implemented right now) doesn't need very fine grained information about the API. The incremental compiler just needs to know whether an API has changed since the last time it was indexed. For that purpose hash sum is enough and it saves a lot of memory. Therefore, API representation is hashed immediately after single compilation unit is processed and only hash sum is stored persistently.

In earlier versions the incremental compiler wouldn't hash. That resulted in a very high memory consumption and poor serialization/deserialization performance.

The hashing logic is implemented in the [HashAPI.scala](#) file.

**Dependency phase** The incremental compiler extracts all Symbols given compilation unit depends on (refers to) and then tries to map them back to corresponding source/class files. Mapping a Symbol back to a source file is performed by using `sourceFile` attribute that Symbols derived from source

files have set. Mapping a Symbol back to (binary) class file is more tricky because Scala compiler does not track origin of Symbols derived from binary files. Therefore simple heuristic is used which maps a qualified class name to corresponding classpath entry. This logic is implemented in dependency phase which has an access to the full classpath.

The set of Symbols given compilation unit depend on is obtained by performing a tree walk. The tree walk examines all tree nodes that can introduce a dependency (refer to another Symbol) and gathers all Symbols assigned to them. Symbols are assigned to tree nodes by Scala compiler during type checking phase.

*Incremental compiler used to rely on `CompilationUnit.depends` for collecting dependencies. However, name hashing requires a more precise dependency information. Check [#1002](#) for details.*

**Analyzer phase** Collection of produced class files is extracted by inspecting contents `CompilationUnit.icode` property which contains all ICode classes that backend will emit as JVM class files.

## Name hashing algorithm

**Motivation** Let's consider the following example:

```
// A.scala
class A {
  def inc(x: Int): Int = x+1
}

// B.scala
class B {
  def foo(a: A, x: Int): Int = a.inc(x)
}
```

Let's assume both of those files are compiled and user changes `A.scala` so it looks like this:

```
// A.scala
class A {
  def inc(x: Int): Int = x+1
  def dec(x: Int): Int = x-1
}
```

Once user hits save and asks incremental compiler to recompile it's project it will do the following:



1. Recompile `A.scala` as the source code has changed (first iteration)
2. While recompiling it will reindex API structure of `A.scala` and detect it has changed
3. It will determine that `B.scala` depends on `A.scala` and since the API structure of `A.scala` has changed `B.scala` has to be recompiled as well (`B.scala` has been invalidated)
4. Recompile `B.scala` because it was invalidated in 3. due to dependency change
5. Reindex API structure of `B.scala` and find out that it hasn't changed so we are done

To summarize, we'll invoke Scala compiler twice: one time to recompile `A.scala` and then to recompile `B.scala` because `A` has a new method `dec`.

However, one can easily see that in this simple scenario recompilation of `B.scala` is not needed because addition of `dec` method to `A` class is irrelevant to the `B` class as its not using it and it is not affected by it in any way.

In case of two files the fact that we recompile too much doesn't sound too bad. However, in practice, the dependency graph is rather dense so one might end up recompiling the whole project upon a change that is irrelevant to almost all files in the whole project. That's exactly what happens in Play projects when routes are modified. The nature of routes and reversed routes is that every template and every controller depends on some methods defined in those two classes (`Routes` and `ReversedRoutes`) but changes to specific route definition usually affects only small subset of all templates and controllers.

The idea behind name hashing is to exploit that observation and make the invalidation algorithm smarter about changes that can possibly affect a small number of files.

**Detection of irrelevant dependencies (direct approach)** A change to the API of a given source file `X.scala` can be called irrelevant if it doesn't affect the compilation result of file `Y.scala` even if `Y.scala` depends on `X.scala`.

From that definition one can easily see that a change can be declared irrelevant only with respect to a given dependency. Conversely, one can declare a dependency between two source files irrelevant with respect to a given change of API in one of the files if the change doesn't affect the compilation result of the other file. From now on we'll focus on detection of irrelevant dependencies.

A very naive way of solving a problem of detecting irrelevant dependencies would be to say that we keep track of all used methods in `Y.scala` so if a method in `X.scala` is added/removed/modified we just check if it's being used in `Y.scala` and if it's not then we consider the dependency of `Y.scala` on `X.scala` irrelevant in this particular case.

Just to give you a sneak preview of problems that quickly arise if you consider that strategy let's consider those two scenarios.

**Inheritance** We'll see how a method not used in another source file might affect its compilation result. Let's consider this structure:

```
// A.scala
abstract class A

// B.scala
class B extends A
```

Let's add an abstract method to class A:

```
// A.scala
abstract class A {
  def foo(x: Int): Int
}
```

Now, once we recompile `A.scala` we could just say that since `A.foo` is not used in `B` class then we don't need to recompile `B.scala`. However, this is not true because `B` doesn't implement a newly introduced, abstract method and an error should be reported.

Therefore, a simple strategy of looking at used methods for determining whether a given dependency is relevant or not is not enough.

**Enrichment pattern** Here we'll see another case of newly introduced method (that is not used anywhere yet) that affects compilation results of other files. This time, no inheritance will be involved but we'll use enrichment pattern (implicit conversions) instead.

Let's assume we have the following structure:

```
// A.scala
class A

// B.scala
class B {
  class AOps(a: A) {
    def foo(x: Int): Int = x+1
  }
  implicit def richA(a: A): AOps = new AOps(a)
  def bar(a: A): Int = a.foo(12) // this is expanded to richA(a).foo so we are calling AOps
}
```

Now, let's add a `foo` method directly to `A`:

```
// A.scala
class A {
  def foo(x: Int): Int = x-1
}
```

Now, once we recompile `A.scala` and detect that there's a new method defined in the `A` class we would need to consider whether this is relevant to the dependency of `B.scala` on `A.scala`. Notice that in `B.scala` we do not use `A.foo` (it didn't exist at the time `B.scala` was compiled) but we use `AOps.foo` and it's not immediately clear that `AOps.foo` has anything to do with `A.foo`. One would need to detect the fact that a call to `AOps.foo` as a result of implicit conversion `richA` that was inserted because we failed to find `foo` on `A` before.

This kind of analysis gets us very quickly to the implementation complexity of Scala's type checker and is not feasible to implement in a general case.

**Too much information to track** All of the above assumed we actually have full information about the structure of the API and used methods preserved so we can make use of it. However, as described in [Hashing an API representation](#) we do not store the whole representation of the API but only its hash sum. Also, dependencies are tracked at source file level and not at class/method level.

One could imagine reworking the current design to track more information but it would be a very big undertaking. Also, the incremental compiler used to preserve the whole API structure but it switched to hashing due to the resulting infeasible memory requirements.

**Detection of irrelevant dependencies (name hashing)** As we saw in the previous chapter, the direct approach of tracking more information about what's being used in the source files becomes tricky very quickly. One would wish to come up with a simpler and less precise approach that would still yield big improvements over the existing implementation.

The idea is to not track all the used members and reason very precisely about when a given change to some members affects the result of the compilation of other files. We would track just the used *simple names* instead and we would also track the hash sums for all members with the given simple name. The simple name means just an unqualified name of a term or a type.

Let's see first how this simplified strategy addresses the problem with the [enrichment pattern](#). We'll do that by simulating the name hashing algorithm. Let's start with the original code:

```
// A.scala
class A

// B.scala
class B {
  class AOps(a: A) {
    def foo(x: Int): Int = x+1
  }
  implicit def richA(a: A): AOps = new AOps(a)
  def bar(a: A): Int = a.foo(12) // this is expanded to richA(a).foo so we are calling AOps
}
```

During the compilation of those two files we'll extract the following information:

```
usedNames("A.scala"): A
usedNames("B.scala"): B, AOps, a, A, foo, x, Int, richA, AOps, bar

nameHashes("A.scala"): A -> ...
nameHashes("B.scala"): B -> ..., AOps -> ..., foo -> ..., richA -> ..., bar -> ...
```

The `usedNames` relation track all the names mentioned in the given source file. The `nameHashes` relation gives us a hash sum of the groups of members that are put together in one bucket if they have the same simple name. In addition to the information presented above we still track the dependency of `B.scala` on `A.scala`.

Now, if we add a `foo` method to `A` class:

```
// A.scala
class A {
  def foo(x: Int): Int = x-1
}
```

and recompile, we'll get the following (updated) information:

```
usedNames("A.scala"): A, foo
nameHashes("A.scala"): A -> ..., foo -> ...
```

The incremental compiler compares the name hashes before and after the change and detects that the hash sum of `foo` has changed (it's been added). Therefore, it looks at all the source files that depend on `A.scala`, in our case it's just `B.scala`, and checks whether `foo` appears as a used name. It does, therefore it recompiles `B.scala` as intended.

You can see now, that if we added another method to `A` like `xyz` then `B.scala` wouldn't be recompiled because nowhere in `B.scala` is the name `xyz` mentioned.

Therefore, if you have reasonably non-clashing names you should benefit from a lot of dependencies between source files marked as irrelevant.

It's very nice that this simple, name-based heuristic manages to withstand the "enrichment pattern" test. However, name-hashing fails to pass the other test of **inheritance**. In order to address that problem, we'll need to take a closer look at the dependencies introduced by inheritance vs dependencies introduced by member references.

### Dependencies introduced by member reference and inheritance

The core assumption behind the name-hashing algorithm is that if a user adds/modifies/removes a member of a class (e.g. a method) then the results of compilation of other classes won't be affected unless they are using that particular member. Inheritance with its various override checks makes the whole situation much more complicated; if you combine it with mix-in composition that introduces new fields to classes inheriting from traits then you quickly realize that inheritance requires special handling.

The idea is that for now we would switch back to the old scheme whenever inheritance is involved. Therefore, we track dependencies introduced by member reference separately from dependencies introduced by inheritance. All dependencies introduced by inheritance are *not* subject to name-hashing analysis so they are never marked as irrelevant.

The intuition behind the dependency introduced by inheritance is very simple: it's a dependency a class/trait introduces by inheriting from another class/trait. All other dependencies are called dependencies by member reference because they are introduced by referring (selecting) a member (method, type alias, inner class, val, etc.) from another class. Notice that in order to inherit from a class you need to refer to it so dependencies introduced by inheritance are a strict subset of member reference dependencies.

Here's an example which illustrates the distinction:

```
// A.scala
class A {
  def foo(x: Int): Int = x+1
}

// B.scala
class B(val a: A)

// C.scala
trait C

// D.scala
trait D[T]
```

```

// X.scala
class X extends A with C with D[B] {
  // dependencies by inheritance: A, C, D
  // dependencies by member reference: A, C, D, B
}

// Y.scala
class Y {
  def test(b: B): Int = b.a.foo(12)
  // dependencies by member reference: B, Int, A
}

```

There are two things to notice:

1. X does not depend on B by inheritance because B is passed as a type parameter to D; we consider only types that appear as parents to X
2. Y *does* depend on A even if there's no explicit mention of A in the source file; we select a method `foo` defined in A and that's enough to introduce a dependency

To sum it up, the way we want to handle inheritance and the problems it introduces is to track all dependencies introduced by inheritance separately and have a much more strict way of invalidating dependencies. Essentially, whenever there's a dependency by inheritance it will react to any (even minor) change in parent types.

**Computing name hashes** One thing we skimmed over so far is how name hashes are actually computed.

As mentioned before, all definitions are grouped together by their simple name and then hashed as one bucket. If a definition (for example a class) contains other definition then those nested definitions do *not* contribute to a hash sum. The nested definitions will contribute to hashes of buckets selected by their name.

### What is included in the interface of a Scala class

It is surprisingly tricky to understand which changes to a class require recompiling its clients. The rules valid for Java are much simpler (even if they include some subtle points as well); trying to apply them to Scala will prove frustrating. Here is a list of a few surprising points, just to illustrate the ideas; this list is not intended to be complete.

1. Since Scala supports named arguments in method invocations, the name of method arguments are part of its interface.
2. Adding a method to a trait requires recompiling all implementing classes. The same is true for most changes to a method signature in a trait.
3. Calls to `super.methodName` in traits are resolved to calls to an abstract method called `fullyQualifiedTraitName$$super$methodName`; such methods only exist if they are used. Hence, adding the first call to `super.methodName` for a specific method name changes the interface. At present, this is not yet handled—see [#466](#).
4. `sealed` hierarchies of case classes allow to check exhaustiveness of pattern matching. Hence pattern matches using case classes must depend on the complete hierarchy - this is one reason why dependencies cannot be easily tracked at the class level (see Scala issue [SI-2559](#) for an example.). Check [#1104](#) for detailed discussion of tracking dependencies at class level.

**Debugging an interface representation** If you see spurious incremental recompilations or you want to understand what changes to an extracted interface cause incremental recompilation then sbt 0.13 has the right tools for that.

In order to debug the interface representation and its changes as you modify and recompile source code you need to do two things:

1. Enable the incremental compiler's `apiDebug` option.
2. Add [diff-utils library](#) to sbt's classpath. Check documentation of `sbt.extraClasspath` system property in the Command-Line-Reference.

#### warning

Enabling the `apiDebug` option increases significantly the memory consumption and degrades the performance of the incremental compiler. The underlying reason is that in order to produce meaningful debugging information about interface differences the incremental compiler has to retain the full representation of the interface instead of just the hash sum as it does by default.

Keep this option enabled when you are debugging the incremental compiler problem only.

Below is a complete transcript which shows how to enable interface debugging in your project. First, we download the `diffutils` jar and pass it to sbt:

```
curl -O https://java-diff-utils.googlecode.com/files/diffutils-1.2.1.jar
sbt -Dsbt.extraClasspath=diffutils-1.2.1.jar
[info] Loading project definition from /Users/grek/tmp/sbt-013/project
[info] Set current project to sbt-013 (in build file:/Users/grek/tmp/sbt-013/)
> set incOptions := incOptions.value.copy(apiDebug = true)
```

```
[info] Defining *:incOptions
[info] The new value will be used by compile:incCompileSetup, test:incCompileSetup
[info] Reapplying settings...
[info] Set current project to sbt-013 (in build file:/Users/grek/tmp/sbt-013/)
```

Let's suppose you have the following source code in `Test.scala`:

```
class A {
  def b: Int = 123
}
```

compile it and then change the `Test.scala` file so it looks like:

```
class A {
  def b: String = "abc"
}
```

and run `compile` again. Now if you run `last compile` you should see the following lines in the debugging log

```
> last compile
[...]
[debug] Detected a change in a public API:
[debug] --- /Users/grek/tmp/sbt-013/Test.scala
[debug] +++ /Users/grek/tmp/sbt-013/Test.scala
[debug] @@ -23,7 +23,7 @@
[debug] ~inherited~ final def ##(): scala.this#Int
[debug] ~inherited~ final def synchronized[ java.lang.Object.T0 >: scala.this#Nothing <: scala
[debug] ~inherited~ final def $asInstanceOf[ java.lang.Object.T0 >: scala.this#Nothing <: scal
[debug] ~inherited~ final def $asInstanceOf[ java.lang.Object.T0 >: scala.this#Nothing <: scal
[debug] def <init>(): this#A
[debug] -def b: scala.this#Int
[debug] +def b: java.lang.this#String
[debug] }
```

You can see a unified diff of the two interface textual representations. As you can see, the incremental compiler detected a change to the return type of `b` method.

**Why changing the implementation of a method might affect clients, and why type annotations help** This section explains why relying on type inference for return types of public methods is not always appropriate. However this is an important design issue, so we cannot give fixed rules. Moreover, this



change is often invasive, and reducing compilation times is not often a good enough motivation. That is also why we discuss some of the implications from the point of view of binary compatibility and software engineering.

Consider the following source file `A.scala`:

```
import java.io._
object A {
  def openFiles(list: List[File]) =
    list.map(name => new FileWriter(name))
}
```

Let us now consider the public interface of trait `A`. Note that the return type of method `openFiles` is not specified explicitly, but computed by type inference to be `List[FileWriter]`. Suppose that after writing this source code, we introduce some client code and then modify `A.scala` as follows:

```
import java.io._
object A {
  def openFiles(list: List[File]) =
    Vector(list.map(name => new BufferedWriter(new FileWriter(name))):_*)
}
```

Type inference will now compute the result type as `Vector[BufferedWriter]`; in other words, changing the implementation lead to a change to the public interface, with two undesirable consequences:

1. Concerning our topic, the client code needs to be recompiled, since changing the return type of a method, in the JVM, is a binary-incompatible interface change.
2. If our component is a released library, using our new version requires recompiling all client code, changing the version number, and so on. Often not good, if you distribute a library where binary compatibility becomes an issue.
3. More in general, the client code might now even be invalid. The following code will for instance become invalid after the change:

```
val res: List[FileWriter] = A.openFiles(List(new File("foo.input")))
```

Also the following code will break:

```
val a: Seq[Writer] = new BufferedWriter(new FileWriter("bar.input"))
A.openFiles(List(new File("foo.input")))
```

How can we avoid these problems?

Of course, we cannot solve them in general: if we want to alter the interface of a module, breakage might result. However, often we can remove *implementation details* from the interface of a module. In the example above, for instance, it might well be that the intended return type is more general - namely `Seq[Writer]`. It might also not be the case - this is a design choice to be decided on a case-by-case basis. In this example I will assume however that the designer chooses `Seq[Writer]`, since it is a reasonable choice both in the above simplified example and in a real-world extension of the above code.

The client snippets above will now become

```
val res: Seq[Writer] =
  A.openFiles(List(new File("foo.input")))

val a: Seq[Writer] =
  new BufferedWriter(new FileWriter("bar.input")) +:
  A.openFiles(List(new File("foo.input")))
```

## Further references

The incremental compilation logic is implemented in <https://github.com/sbt/sbt/blob/0.13/compile/inc/src/main/scala/inc/Incremental.scala>. Some discussion on the incremental recompilation policies is available in issue [#322](#), [#288](#) and [#1010](#).

## Configuration

This part of the documentation has pages documenting particular sbt topics in detail. Before reading anything in here, you will need the information in the [Getting Started Guide](#) as a foundation.

## Classpaths, sources, and resources

This page discusses how sbt builds up classpaths for different actions, like `compile`, `run`, and `test` and how to override or augment these classpaths.

### Basics

In sbt 0.10 and later, classpaths now include the Scala library and (when declared as a dependency) the Scala compiler. Classpath-related settings and tasks typically provide a value of type `Classpath`. This is an alias for

`Seq[Attributed[File]]`. `Attributed` is a type that associates a heterogeneous map with each classpath entry. Currently, this allows sbt to associate the `Analysis` resulting from compilation with the corresponding classpath entry and for managed entries, the `ModuleID` and `Artifact` that defined the dependency.

To explicitly extract the raw `Seq[File]`, use the `files` method implicitly added to `Classpath`:

```
val cp: Classpath = ...
val raw: Seq[File] = cp.files
```

To create a `Classpath` from a `Seq[File]`, use `classpath` and to create an `Attributed[File]` from a `File`, use `Attributed.blank`:

```
val raw: Seq[File] = ...
val cp: Classpath = raw.classpath

val rawFile: File = ..
val af: Attributed[File] = Attributed.blank(rawFile)
```

**Unmanaged vs managed** Classpaths, sources, and resources are separated into two main categories: unmanaged and managed. Unmanaged files are manually created files that are outside of the control of the build. They are the inputs to the build. Managed files are under the control of the build. These include generated sources and resources as well as resolved and retrieved dependencies and compiled classes.

Tasks that produce managed files should be inserted as follows:

```
sourceGenerators in Compile +=
  generate( (sourceManaged in Compile).value / "some_directory")
```

In this example, `generate` is some function of type `File => Seq[File]` that actually does the work. So, we are appending a new task to the list of main source generators `(sourceGenerators in Compile)`.

To insert a named task, which is the better approach for plugins:

```
val mySourceGenerator = taskKey[Seq[File]](...)

mySourceGenerator in Compile :=
  generate( (sourceManaged in Compile).value / "some_directory")

sourceGenerators in Compile += (mySourceGenerator in Compile).task
```

The `task` method is used to refer to the actual task instead of the result of the task.

For resources, there are similar keys `resourceGenerators` and `resourceManaged`.

**Excluding source files by name** The project base directory is by default a source directory in addition to `src/main/scala`. You can exclude source files by name (`butler.scala` in the example below) like:

```
excludeFilter in unmanagedSources := "butler.scala"
```

Read more on [How to exclude .scala source file in project folder - Google Groups](#)

**External vs internal** Classpaths are also divided into internal and external dependencies. The internal dependencies are inter-project dependencies. These effectively put the outputs of one project on the classpath of another project.

External classpaths are the union of the unmanaged and managed classpaths.

**Keys** For classpaths, the relevant keys are:

- `unmanagedClasspath`
- `managedClasspath`
- `externalDependencyClasspath`
- `internalDependencyClasspath`

For sources:

- `unmanagedSources` These are by default built up from `unmanagedSourceDirectories`, which consists of `scalaSource` and `javaSource`.
- `managedSources` These are generated sources.
- `sources` Combines `managedSources` and `unmanagedSources`.
- `sourceGenerators` These are tasks that generate source files. Typically, these tasks will put sources in the directory provided by `sourceManaged`.

For resources

- `unmanagedResources` These are by default built up from `unmanagedResourceDirectories`, which by default is `resourceDirectory`, excluding files matched by `defaultExcludes`.
- `managedResources` By default, this is empty for standard projects. `sbt` plugins will have a generated descriptor file here.

- **resourceGenerators** These are tasks that generate resource files. Typically, these tasks will put resources in the directory provided by `resourceManaged`.

Use the [inspect command](#) for more details.

See also a related [StackOverflow answer](#).

**Example** You have a standalone project which uses a library that loads `xxx.properties` from classpath at run time. You put `xxx.properties` inside directory “`config`”. When you run “`sbt run`”, you want the directory to be in classpath.

```
unmanagedClasspath in Runtime += baseDirectory.value / "config"
```

## Compiler Plugin Support

There is some special support for using compiler plugins. You can set `autoCompilerPlugins` to `true` to enable this functionality.

```
autoCompilerPlugins := true
```

To use a compiler plugin, you either put it in your unmanaged library directory (`lib/` by default) or add it as managed dependency in the `plugin` configuration. `addCompilerPlugin` is a convenience method for specifying `plugin` as the configuration for a dependency:

```
addCompilerPlugin("org.scala-tools.sxr" %% "sxr" % "0.3.0")
```

The `compile` and `testCompile` actions will use any compiler plugins found in the `lib` directory or in the `plugin` configuration. You are responsible for configuring the plugins as necessary. For example, Scala X-Ray requires the extra option:

```
// declare the main Scala source directory as the base directory
scalacOptions :=
  scalacOptions.value :+ ("-Psxr:base-directory:" + (scalaSource in Compile).value.getAbsolute
```

You can still specify compiler plugins manually. For example:

```
scalacOptions += "-Xplugin:<path-to-sxr>/sxr-0.3.0.jar"
```

## Continuations Plugin Example

Support for continuations in Scala 2.8 is implemented as a compiler plugin. You can use the compiler plugin support for this, as shown here.

```
autoCompilerPlugins := true

addCompilerPlugin("org.scala-lang.plugins" % "continuations" % "2.8.1")

scalacOptions += "-P:continuations:enable"
```

## Version-specific Compiler Plugin Example

Adding a version-specific compiler plugin can be done as follows:

```
autoCompilerPlugins := true

libraryDependencies +=
  compilerPlugin("org.scala-lang.plugins" % "continuations" % scalaVersion.value)

scalacOptions += "-P:continuations:enable"
```

## Configuring Scala

sbt needs to obtain Scala for a project and it can do this automatically or you can configure it explicitly. The Scala version that is configured for a project will compile, run, document, and provide a REPL for the project code. When compiling a project, sbt needs to run the Scala compiler as well as provide the compiler with a classpath, which may include several Scala jars, like the reflection jar.

### Automatically managed Scala

The most common case is when you want to use a version of Scala that is available in a repository. The only required configuration is the Scala version you want to use. For example,

```
scalaVersion := "2.10.0"
```

This will retrieve Scala from the repositories configured via the **resolvers** setting. It will use this version for building your project: compiling, running, scaladoc, and the REPL.

**Configuring the scala-library dependency** By default, the standard Scala library is automatically added as a dependency. If you want to configure it differently than the default or you have a project with only Java sources, set:

```
autoScalaLibrary := false
```

In order to compile Scala sources, the Scala library needs to be on the classpath. When `autoScalaLibrary` is true, the Scala library will be on all classpaths: test, runtime, and compile. Otherwise, you need to add it like any other dependency. For example, the following dependency definition uses Scala only for tests:

```
autoScalaLibrary := false
```

```
libraryDependencies += "org.scala-lang" % "scala-library" % scalaVersion.value % "test"
```

**Configuring additional Scala dependencies** When using a Scala dependency other than the standard library, add it as a normal managed dependency. For example, to depend on the Scala compiler,

```
libraryDependencies += "org.scala-lang" % "scala-compiler" % scalaVersion.value
```

Note that this is necessary regardless of the value of the `autoScalaLibrary` setting described in the previous section.

**Configuring Scala tool dependencies** In order to compile Scala code, run scaladoc, and provide a Scala REPL, sbt needs the `scala-compiler` jar. This should not be a normal dependency of the project, so sbt adds a dependency on `scala-compiler` in the special, private `scala-tool` configuration. It may be desirable to have more control over this in some situations. Disable this automatic behavior with the `managedScalaInstance` key:

```
managedScalaInstance := false
```

This will also disable the automatic dependency on `scala-library`. If you do not need the Scala compiler for anything (compiling, the REPL, scaladoc, etc...), you can stop here. sbt does not need an instance of Scala for your project in that case. Otherwise, sbt will still need access to the jars for the Scala compiler for compilation and other tasks. You can provide them by either declaring a dependency in the `scala-tool` configuration or by explicitly defining `scalaInstance`.

In the first case, add the `scala-tool` configuration and add a dependency on `scala-compiler` in this configuration. The organization is not important, but sbt needs the module name to be `scala-compiler` and `scala-library` in order to handle those jars appropriately. For example,

```

managedScalaInstance := false

// Add the configuration for the dependencies on Scala tool jars
// You can also use a manually constructed configuration like:
//   config("scala-tool").hide
ivyConfigurations += Configurations.ScalaTool

// Add the usual dependency on the library as well on the compiler in the
// 'scala-tool' configuration
libraryDependencies += Seq(
  "org.scala-lang" % "scala-library" % scalaVersion.value,
  "org.scala-lang" % "scala-compiler" % scalaVersion.value % "scala-tool"
)

```

In the second case, directly construct a value of type `ScalaInstance`, typically using a method in the `companion object`, and assign it to `scalaInstance`. You will also need to add the `scala-library` jar to the classpath to compile and run Scala sources. For example,

```

managedScalaInstance := false

scalaInstance := ...

unmanagedJars in Compile += scalaInstance.value.libraryJar

```

**Switching to a local Scala version** To use a locally built Scala version, configure Scala home as described in the following section. Scala will still be resolved as before, but the jars will come from the configured Scala home directory.

### Using Scala from a local directory

The result of building Scala from source is a Scala home directory `<base>/build/pack/` that contains a subdirectory `lib/` containing the Scala library, compiler, and other jars. The same directory layout is obtained by downloading and extracting a Scala distribution. Such a Scala home directory may be used as the source for jars by setting `scalaHome`. For example,

```
scalaHome := Some(file("/home/user/scala-2.10/"))
```

By default, `lib/scala-library.jar` will be added to the unmanaged classpath and `lib/scala-compiler.jar` will be used to compile Scala sources and provide



a Scala REPL. No managed dependency is recorded on `scala-library`. This means that Scala will only be resolved from a repository if you explicitly define a dependency on Scala or if Scala is depended on indirectly via a dependency. In these cases, the artifacts for the resolved dependencies will be substituted with jars in the Scala home `lib/` directory.

**Mixing with managed dependencies** As an example, consider adding a dependency on `scala-reflect` when `scalaHome` is configured:

```
scalaHome := Some(file("/home/user/scala-2.10/"))

libraryDependencies += "org.scala-lang" % "scala-reflect" % scalaVersion.value
```

This will be resolved as normal, except that sbt will see if `/home/user/scala-2.10/lib/scala-reflect.jar` exists. If it does, that file will be used in place of the artifact from the managed dependency.

**Using unmanaged dependencies only** Instead of adding managed dependencies on Scala jars, you can directly add them. The `scalaInstance` task provides structured access to the Scala distribution. For example, to add all jars in the Scala home `lib/` directory,

```
scalaHome := Some(file("/home/user/scala-2.10/"))

unmanagedJars in Compile += scalaInstance.value.jars
```

To add only some jars, filter the jars from `scalaInstance` before adding them.

### sbt's Scala version

sbt needs Scala jars to run itself since it is written in Scala. sbt uses that same version of Scala to compile the build definitions that you write for your project because they use sbt APIs. This version of Scala is fixed for a specific sbt release and cannot be changed. For sbt 1.0.0-RC2, this version is Scala 2.12.2. Because this Scala version is needed before sbt runs, the repositories used to retrieve this version are configured in the sbt [launcher](#).

## Forking

By default, the `run` task runs in the same JVM as sbt. Forking is required under [certain circumstances](#), however. Or, you might want to fork Java processes when implementing new tasks.

By default, a forked process uses the same Java and Scala versions being used for the build and the working directory and JVM options of the current process. This page discusses how to enable and configure forking for both **run** and **test** tasks. Each kind of task may be configured separately by scoping the relevant keys as explained below.

## Enable forking

The **fork** setting controls whether forking is enabled (true) or not (false). It can be set in the **run** scope to only fork **run** commands or in the **test** scope to only fork **test** commands.

To fork all test tasks (**test**, **testOnly**, and **testQuick**) and run tasks (**run**, **runMain**, **test:run**, and **test:runMain**),

```
fork := true
```

To enable forking run tasks only, set **fork** to **true** in the **run** scope.

```
fork in run := true
```

To only fork **test:run** and **test:runMain**:

```
fork in (Test, run) := true
```

Similarly, set **fork in (Compile,run) := true** to only fork the main **run** tasks. **run** and **runMain** share the same configuration and cannot be configured separately.

To enable forking all **test** tasks only, set **fork** to **true** in the **test** scope:

```
fork in test := true
```

See [Testing](#) for more control over how tests are assigned to JVMs and what options to pass to each group.

## Change working directory

To change the working directory when forked, set **baseDirectory in run** or **baseDirectory in test**:

```

// sets the working directory for all `run`-like tasks
baseDirectory in run := file("/path/to/working/directory/")

// sets the working directory for `run` and `runMain` only
baseDirectory in (Compile,run) := file("/path/to/working/directory/")

// sets the working directory for `test:run` and `test:runMain` only
baseDirectory in (Test,run) := file("/path/to/working/directory/")

// sets the working directory for `test`, `testQuick`, and `testOnly`
baseDirectory in test := file("/path/to/working/directory/")

```

### Forked JVM options

To specify options to be provided to the forked JVM, set `javaOptions`:

```
javaOptions in run += "-Xmx8G"
```

or specify the configuration to affect only the main or test `run` tasks:

```
javaOptions in (Test,run) += "-Xmx8G"
```

or only affect the `test` tasks:

```
javaOptions in test += "-Xmx8G"
```

### Java Home

Select the Java installation to use by setting the `javaHome` directory:

```
javaHome := Some(file("/path/to/jre/"))
```

Note that if this is set globally, it also sets the Java installation used to compile Java sources. You can restrict it to running only by setting it in the `run` scope:

```
javaHome in run := Some(file("/path/to/jre/"))
```

As with the other settings, you can specify the configuration to affect only the main or test `run` tasks or just the `test` tasks.

## Configuring output

By default, forked output is sent to the Logger, with standard output logged at the **Info** level and standard error at the **Error** level. This can be configured with the `outputStrategy` setting, which is of type [OutputStrategy](#).

```
// send output to the build's standard output and error
outputStrategy := Some(StdoutOutput)

// send output to the provided OutputStream `someStream`
outputStrategy := Some(CustomOutput(someStream: OutputStream))

// send output to the provided Logger `log` (unbuffered)
outputStrategy := Some(LoggedOutput(log: Logger))

// send output to the provided Logger `log` after the process terminates
outputStrategy := Some(BufferedOutput(log: Logger))
```

As with other settings, this can be configured individually for main or test run tasks or for test tasks.

## Configuring Input

By default, the standard input of the sbt process is not forwarded to the forked process. To enable this, configure the `connectInput` setting:

```
connectInput in run := true
```

## Direct Usage

To fork a new Java process, use the [Fork API](#). The values of interest are `Fork.java`, `Fork.javac`, `Fork.scala`, and `Fork.scalac`. These are of type [Fork](#) and provide `apply` and `fork` methods. For example, to fork a new Java process, :

```
val options = ForkOptions(...)
val arguments: Seq[String] = ...
val mainClass: String = ...
val exitCode: Int = Fork.java(options, mainClass +: arguments)
```

[ForkOptions](#) defines the Java installation to use, the working directory, environment variables, and more. For example, :

```

val cwd: File = ...
val javaDir: File = ...
val options = ForkOptions(
  envVars = Map("KEY" -> "value"),
  workingDirectory = Some(cwd),
  javaHome = Some(javaDir)
)

```

## Global Settings

### Basic global configuration file

Settings that should be applied to all projects can go in `~/.sbt/1.0/global.sbt` (or any file in `~/.sbt/1.0` with a `.sbt` extension). Plugins that are defined globally in `~/.sbt/1.0/plugins/` are available to these settings. For example, to change the default `shellPrompt` for your projects:

```
~/.sbt/1.0/global.sbt
```

```

shellPrompt := { state =>
  "sbt (%s)> ".format(Project.extract(state).currentProject.id)
}

```

You can also configure plugins globally added in `~/.sbt/1.0/plugins/build.sbt` (see next paragraph) in that file, but you need to use fully qualified names for their properties. For example, for `sbt-eclipse` property `withSource` documented in <https://github.com/typesafehub/sbteclipse/wiki/Using-sbteclipse>, you need to use:

```
com.typesafe.sbteclipse.core.EclipsePlugin.EclipseKeys.withSource := true
```

### Global Settings using a Global Plugin

The `~/.sbt/1.0/plugins/` directory is a global plugin project. This can be used to provide global commands, plugins, or other code.

To add a plugin globally, create `~/.sbt/1.0/plugins/build.sbt` containing the dependency definitions. For example:

```
addSbtPlugin("org.example" % "plugin" % "1.0")
```

To change the default `shellPrompt` for every project using this approach, create a local plugin `~/.sbt/1.0/plugins/ShellPrompt.scala`:

```
import sbt._
import Keys._

object ShellPrompt extends Plugin {
  override def settings = Seq(
    shellPrompt := { state =>
      "sbt (%s)> ".format(Project.extract(state).currentProject.id) }
  )
}
```

The `~/.sbt/1.0/plugins/` directory is a full project that is included as an external dependency of every plugin project. In practice, settings and code defined here effectively work as if they were defined in a project's `project/` directory. This means that `~/.sbt/1.0/plugins/` can be used to try out ideas for plugins such as shown in the `shellPrompt` example.

## Java Sources

sbt has support for compiling Java sources with the limitation that dependency tracking is limited to the dependencies present in compiled class files.

### Usage

- `compile` will compile the sources under `src/main/java` by default.
- `testCompile` will compile the sources under `src/test/java` by default.

Pass options to the Java compiler by setting `javacOptions`:

```
javacOptions += "-g:none"
```

As with options for the Scala compiler, the arguments are not parsed by sbt. Multi-element options, such as `-source 1.5`, are specified like:

```
javacOptions ++= Seq("-source", "1.5")
```

You can specify the order in which Scala and Java sources are built with the `compileOrder` setting. Possible values are from the `CompileOrder` enumeration: `Mixed`, `JavaThenScala`, and `ScalaThenJava`. If you have circular dependencies between Scala and Java sources, you need the default, `Mixed`, which passes both Java and Scala sources to `scalac` and then compiles the Java sources with `javac`. If you do not have circular dependencies, you can use one of the other two options to speed up your build by not passing the Java sources to `scalac`. For example, if your Scala sources depend on your Java sources, but your Java sources do not depend on your Scala sources, you can do:

```
compileOrder := CompileOrder.JavaThenScala
```

To specify different orders for main and test sources, scope the setting by configuration:

```
// Java then Scala for main sources
compileOrder in Compile := CompileOrder.JavaThenScala

// allow circular dependencies for test sources
compileOrder in Test := CompileOrder.Mixed
```

Note that in an incremental compilation setting, it is not practical to ensure complete isolation between Java sources and Scala sources because they share the same output directory. So, previously compiled classes not involved in the current recompilation may be picked up. A clean compile will always provide full checking, however.

### Known issues in mixed mode compilation

The Scala compiler does not identify compile-time constant variables (Java specification 4.12.4) as such when parsing a Java file from source. This issue has several symptoms, described in the Scala ticket [SI-5333](#):

1. The selection of a constant variable is rejected when used as an argument to a Java annotation (a compile-time constant expression is required).
2. The selection of a constant variable is not replaced by its value, but compiled as an actual field load (the [Scala specification 4.1](#) defines that constant expressions should be replaced by their values).
3. Exhaustiveness checking does not work when pattern matching on the values of a Java enumeration ([SI-8700](#)).

Since Scala 2.11.4, a similar issue arises when using a Java-defined annotation in a Scala class. The Scala compiler does not recognize `@Retention` annotations when parsing the annotation `@interface` from source and therefore emits the annotation with visibility `RUNTIME` ([SI-8928](#)).

### Ignoring the Scala source directories

By default, sbt includes `src/main/scala` and `src/main/java` in its list of unmanaged source directories. For Java-only projects, the unnecessary Scala directories can be ignored by modifying `unmanagedSourceDirectories`:

```
// Include only src/main/java in the compile configuration
unmanagedSourceDirectories in Compile := (javaSource in Compile).value :: Nil

// Include only src/test/java in the test configuration
unmanagedSourceDirectories in Test := (javaSource in Test).value :: Nil
```

However, there should not be any harm in leaving the Scala directories if they are empty.

## Mapping Files

Tasks like `package`, `packageSrc`, and `packageDoc` accept mappings of type `Seq[(File, String)]` from an input file to the path to use in the resulting artifact (jar). Similarly, tasks that copy files accept mappings of type `Seq[(File, File)]` from an input file to the destination file. There are some methods on `PathFinder` and `Path` that can be useful for constructing the `Seq[(File, String)]` or `Seq[(File, File)]` sequences.

A common way of making this sequence is to start with a `PathFinder` or `Seq[File]` (which is implicitly convertible to `PathFinder`) and then call the `pair` method. See the `PathFinder` API for details, but essentially this method accepts a function `File => Option[String]` or `File => Option[File]` that is used to generate mappings.

### Relative to a directory

The `Path.relativeTo` method is used to map a `File` to its path `String` relative to a base directory or directories. The `relativeTo` method accepts a base directory or sequence of base directories to relativize an input file against. The first directory that is an ancestor of the file is used in the case of a sequence of base directories.

For example:

```
import Path.relativeTo
val files: Seq[File] = file("/a/b/C.scala") :: Nil
val baseDirectories: Seq[File] = file("/a") :: Nil
val mappings: Seq[(File,String)] = files pair relativeTo(baseDirectories)

val expected = (file("/a/b/C.scala") -> "b/C.scala") :: Nil
assert( mappings == expected )
```



## Rebase

The `Path.rebase` method relativizes an input file against one or more base directories (the first argument) and then prepends a base String or File (the second argument) to the result. As with `relativeTo`, the first base directory that is an ancestor of the input file is used in the case of multiple base directories.

For example, the following demonstrates building a `Seq[(File, String)]` using `rebase`:

```
import Path.rebase
val files: Seq[File] = file("/a/b/C.scala") :: Nil
val baseDirectories: Seq[File] = file("/a") :: Nil
val mappings: Seq[(File,String)] = files pair rebase(baseDirectories, "pre/")

val expected = (file("/a/b/C.scala") -> "pre/b/C.scala" ) :: Nil
assert( mappings == expected )
```

Or, to build a `Seq[(File, File)]`:

```
import Path.rebase
val files: Seq[File] = file("/a/b/C.scala") :: Nil
val baseDirectories: Seq[File] = file("/a") :: Nil
val newBase: File = file("/new/base")
val mappings: Seq[(File,File)] = files pair rebase(baseDirectories, newBase)

val expected = (file("/a/b/C.scala") -> file("/new/base/b/C.scala") ) :: Nil
assert( mappings == expected )
```

## Flatten

The `Path.flat` method provides a function that maps a file to the last component of the path (its name). For a File to File mapping, the input file is mapped to a file with the same name in a given target directory. For example:

```
import Path.flat
val files: Seq[File] = file("/a/b/C.scala") :: Nil
val mappings: Seq[(File,String)] = files pair flat

val expected = (file("/a/b/C.scala") -> "C.scala" ) :: Nil
assert( mappings == expected )
```

To build a `Seq[(File, File)]` using `flat`:

```
import Path.flat
val files: Seq[File] = file("/a/b/C.scala") :: Nil
val newBase: File = file("/new/base")
val mappings: Seq[(File,File)] = files pair flat(newBase)

val expected = (file("/a/b/C.scala") -> file("/new/base/C.scala")) :: Nil
assert( mappings == expected )
```

## Alternatives

To try to apply several alternative mappings for a file, use `|`, which is implicitly added to a function of type `A => Option[B]`. For example, to try to relativize a file against some base directories but fall back to flattening:

```
import Path.relativeTo
val files: Seq[File] = file("/a/b/C.scala") :: file("/zzz/D.scala") :: Nil
val baseDirectories: Seq[File] = file("/a") :: Nil
val mappings: Seq[(File,String)] = files pair ( relativeTo(baseDirectories) | flat )

val expected = (file("/a/b/C.scala") -> "b/C.scala") :: (file("/zzz/D.scala") -> "D.scala")
assert( mappings == expected )
```

## Local Scala

To use a locally built Scala version, define the `scalaHome` setting, which is of type `Option[File]`. This Scala version will only be used for the build and not for sbt, which will still use the version it was compiled against.

Example:

```
scalaHome := Some(file("/path/to/scala"))
```

Using a local Scala version will override the `scalaVersion` setting and will not work with [cross building](#).

sbt reuses the class loader for the local Scala version. If you recompile your local Scala version and you are using sbt interactively, run

```
> reload
```

to use the new compilation results.

## Macro Projects

### Introduction

Some common problems arise when working with macros.

1. The current macro implementation in the compiler requires that macro implementations be compiled before they are used. The solution is typically to put the macros in a subproject or in their own configuration.
2. Sometimes the macro implementation should be distributed with the main code that uses them and sometimes the implementation should not be distributed at all.

The rest of the page shows example solutions to these problems.

### Defining the Project Relationships

The macro implementation will go in a subproject in the `macro/` directory. The core project in the `core/` directory will depend on this subproject and use the macro. This configuration is shown in the following build definition. `build.sbt`:

```
lazy val commonSettings = Seq(  
  scalaVersion := "2.12.2",  
  organization := "com.example"  
)  
lazy val scalaReflect = Def.setting { "org.scala-lang" % "scala-reflect" % scalaVersion.value }  
  
lazy val core = (project in file("core"))  
  .dependsOn(macroSub)  
  .settings(  
    commonSettings,  
    // other settings here  
  )  
  
lazy val macroSub = (project in file("macro"))  
  .settings(  
    commonSettings,  
    libraryDependencies += scalaReflect.value  
    // other settings here  
  )
```

This specifies that the macro implementation goes in `macro/src/main/scala/` and tests go in `macro/src/test/scala/`. It also shows that we need a dependency on the compiler for the macro implementation. As an example macro, we'll use `desugar` from `macrocosm`. `macro/src/main/scala/demo/Demo.scala`:

```

package demo

import language.experimental.macros
import scala.reflect.macros.Context

object Demo {

  // Returns the tree of `a` after the typer, printed as source code.
  def desugar(a: Any): String = macro desugarImpl

  def desugarImpl(c: Context)(a: c.Expr[Any]) = {
    import c.universe._

    val s = show(a.tree)
    c.Expr(
      Literal(Constant(s))
    )
  }
}

```

macro/src/test/scala/demo/Usage.scala:

```

package demo

object Usage {
  def main(args: Array[String]) {
    val s = Demo.desugar(List(1, 2, 3).reverse)
    println(s)
  }
}

```

This can be then be run at the console:

Actual tests can be defined and run as usual with `macro/test`.

The main project can use the macro in the same way that the tests do. For example,

core/src/main/scala/MainUsage.scala:

```

package demo

object Usage {
  def main(args: Array[String]) {
    val s = Demo.desugar(List(6, 4, 5).sorted)
    println(s)
  }
}

```

## Common Interface

Sometimes, the macro implementation and the macro usage should share some common code. In this case, declare another subproject for the common code and have the main project and the macro subproject depend on the new subproject. For example, the project definitions from above would look like:

```
lazy val commonSettings = Seq(
  scalaVersion := "2.12.2",
  organization := "com.example"
)
lazy val scalaReflect = Def.setting { "org.scala-lang" % "scala-reflect" % scalaVersion.value }

lazy val core = (project in file("core"))
  .dependsOn(macroSub, util)
  .settings(
    commonSettings,
    // other settings here
  )

lazy val macroSub = (project in file("macro"))
  .dependsOn(util)
  .settings(
    commonSettings,
    libraryDependencies += scalaReflect.value
    // other settings here
  )

lazy val util = (project in file("util"))
  .settings(
    commonSettings,
    // other setting here
  )
```

Code in `util/src/main/scala/` is available for both the `macroSub` and `main` projects to use.

## Distribution

To include the macro code with the core code, add the binary and source mappings from the macro subproject to the core project. And also macro subproject should be removed from core project dependency in publishing. For example, the `core` Project definition above would now look like:

```

lazy val core = (project in file("core"))
  .dependsOn(macroSub % "compile-internal, test-internal")
  .settings(
    commonSettings,
    // include the macro classes and resources in the main jar
    mappings in (Compile, packageBin) ++= mappings.in(macroSub, Compile, packageBin).value,
    // include the macro sources in the main source jar
    mappings in (Compile, packageSrc) ++= mappings.in(macroSub, Compile, packageSrc).value
  )

```

You may wish to disable publishing the macro implementation. This is done by overriding `publish` and `publishLocal` to do nothing:

```

lazy val macroSub = (project in file("macro"))
  .settings(
    commonSettings,
    libraryDependencies += scalaReflect.value,
    publish := {},
    publishLocal := {}
  )

```

The techniques described here may also be used for the common interface described in the previous section.

## Paths

This page describes files, sequences of files, and file filters. The base type used is [java.io.File](#), but several methods are augmented through implicits:

- [RichFile](#) adds methods to `File`
- [PathFinder](#) adds methods to `File` and `Seq[File]`
- [Path](#) and [IO](#) provide general methods related to files and I/O.

## Constructing a File

sbt 0.10+ uses [java.io.File](#) to represent a file instead of the custom `sbt.Path` class that was in sbt 0.7 and earlier. sbt defines the alias `File` for `java.io.File` so that an extra import is not necessary. The `file` method is an alias for the single-argument `File` constructor to simplify constructing a new file from a `String`:

```

val source: File = file("/home/user/code/A.scala")

```

Additionally, sbt augments `File` with a `/` method, which is an alias for the two-argument `File` constructor for building up a path:

```
def readme(base: File): File = base / "README"
```

Relative files should only be used when defining the base directory of a `Project`, where they will be resolved properly.

```
val root = Project("root", file("."))
```

Elsewhere, files should be absolute or be built up from an absolute base `File`. The `baseDirectory` setting defines the base directory of the build or project depending on the scope.

For example, the following setting sets the unmanaged library directory to be the “`custom_lib`” directory in a project’s base directory:

```
unmanagedBase := baseDirectory.value / "custom_lib"
```

Or, more concisely:

```
unmanagedBase := baseDirectory.value / "custom_lib"
```

This setting sets the location of the shell history to be in the base directory of the build, irrespective of the project the setting is defined in:

```
historyPath := Some( (baseDirectory in ThisBuild).value / ".history"),
```

## Path Finders

A `PathFinder` computes a `Seq[File]` on demand. It is a way to build a sequence of files. There are several methods that augment `File` and `Seq[File]` to construct a `PathFinder`. Ultimately, call `get` on the resulting `PathFinder` to evaluate it and get back a `Seq[File]`.

**Selecting descendants** The `**` method accepts a `java.io.FileFilter` and selects all files matching that filter.

```
def scalaSources(base: File): PathFinder = (base / "src") ** "*.scala"
```

**get** This selects all files that end in `.scala` that are in `src` or a descendent directory. The list of files is not actually evaluated until `get` is called:

```
def scalaSources(base: File): Seq[File] = {  
  val finder: PathFinder = (base / "src") ** "*.scala"  
  finder.get  
}
```

If the filesystem changes, a second call to `get` on the same `PathFinder` object will reflect the changes. That is, the `get` method reconstructs the list of files each time. Also, `get` only returns `Files` that existed at the time it was called.

**Selecting children** Selecting files that are immediate children of a subdirectory is done with a single `*`:

```
def scalaSources(base: File): PathFinder = (base / "src") * "*.scala"
```

This selects all files that end in `.scala` that are in the `src` directory.

**Existing files only** If a selector, such as `/`, `**`, or `*`, is used on a path that does not represent a directory, the path list will be empty:

```
def emptyFinder(base: File) = (base / "lib" / "ivy.jar") * "not_possible"
```

**Name Filter** The argument to the child and descendent selectors `*` and `**` is actually a `NameFilter`. An implicit is used to convert a `String` to a `NameFilter` that interprets `*` to represent zero or more characters of any value. See the `Name Filters` section below for more information.

**Combining PathFinders** Another operation is concatenation of `PathFinders`:

```
def multiPath(base: File): PathFinder =  
  (base / "src" / "main") +++  
  (base / "lib") +++  
  (base / "target" / "classes")
```

When evaluated using `get`, this will return `src/main/`, `lib/`, and `target/classes/`. The concatenated finder supports all standard methods. For example,

```
def jars(base: File): PathFinder =  
  (base / "lib" +++ base / "target") * "*.jar"
```



selects all jars directly in the “lib” and “target” directories.

A common problem is excluding version control directories. This can be accomplished as follows:

```
def sources(base: File) =  
  ( (base / "src") ** "*.scala") --- ( (base / "src") ** ".svn" ** "*.scala")
```

The first selector selects all Scala sources and the second selects all sources that are a descendent of a `.svn` directory. The `---` method removes all files returned by the second selector from the sequence of files returned by the first selector.

**Filtering** There is a `filter` method that accepts a predicate of type `File => Boolean` and is non-strict:

```
// selects all directories under "src"  
def srcDirs(base: File) = ( (base / "src") ** "*") filter { _.isDirectory }  
  
// selects archives (.zip or .jar) that are selected by 'somePathFinder'  
def archivesOnly(base: PathFinder) = base filter ClasspathUtilities.isArchive
```

**Empty PathFinder** `PathFinder.empty` is a `PathFinder` that returns the empty sequence when `get` is called:

```
assert( PathFinder.empty.get == Seq[File]() )
```

**PathFinder to String conversions** Convert a `PathFinder` to a `String` using one of the following methods:

- `toString` is for debugging. It puts the absolute path of each component on its own line.
- `absString` gets the absolute paths of each component and separates them by the platform’s path separator.
- `getPaths` produces a `Seq[String]` containing the absolute paths of each component

**Mappings** The packaging and file copying methods in `sbt` expect values of type `Seq[(File,String)]` and `Seq[(File,File)]`, respectively. These are mappings from the input file to its (`String`) path in the jar or its (`File`) destination. This approach replaces the relative path approach (using the `##` method) from earlier versions of `sbt`.

Mappings are discussed in detail on the [Mapping-Files](#) page.

## File Filters

The argument to `*` and `**` is of type `java.io.FileFilter`. sbt provides combinators for constructing `FileFilters`.

First, a `String` may be implicitly converted to a `FileFilter`. The resulting filter selects files with a name matching the string, with a `*` in the string interpreted as a wildcard. For example, the following selects all Scala sources with the word “Test” in them:

```
def testSrcs(base: File): PathFinder = (base / "src") * "*Test*.scala"
```

There are some useful combinators added to `FileFilter`. The `||` method declares alternative `FileFilters`. The following example selects all Java or Scala source files under “src”:

```
def sources(base: File): PathFinder = (base / "src") ** ("*.scala" || "*.java")
```

The `--` method excludes a files matching a second filter from the files matched by the first:

```
def imageResources(base: File): PathFinder =  
  (base/"src"/"main"/"resources") * ("*.png" -- "logo.png")
```

This will get `right.png` and `left.png`, but not `logo.png`, for example.

## Parallel Execution

### Task ordering

Task ordering is specified by declaring a task’s inputs. Correctness of execution requires correct input declarations. For example, the following two tasks do not have an ordering specified:

```
write := IO.write(file("/tmp/sample.txt"), "Some content.")  
  
read := IO.read(file("/tmp/sample.txt"))
```

sbt is free to execute `write` first and then `read`, `read` first and then `write`, or `read` and `write` simultaneously. Execution of these tasks is non-deterministic because they share a file. A correct declaration of the tasks would be:

```

write := {
  val f = file("/tmp/sample.txt")
  IO.write(f, "Some content.")
  f
}

read := IO.read(write.value)

```

This establishes an ordering: `read` must run after `write`. We've also guaranteed that `read` will read from the same file that `write` created.

## Practical constraints

Note: The feature described in this section is experimental. The default configuration of the feature is subject to change in particular.

**Background** Declaring inputs and dependencies of a task ensures the task is properly ordered and that code executes correctly. In practice, tasks share finite hardware and software resources and can require control over utilization of these resources. By default, sbt executes tasks in parallel (subject to the ordering constraints already described) in an effort to utilize all available processors. Also by default, each test class is mapped to its own task to enable executing tests in parallel.

Prior to sbt 0.12, user control over this process was restricted to:

1. Enabling or disabling all parallel execution (`parallelExecution := false`, for example).
2. Enabling or disabling mapping tests to their own tasks (`parallelExecution in Test := false`, for example).

(Although never exposed as a setting, the maximum number of tasks running at a given time was internally configurable as well.)

The second configuration mechanism described above only selected between running all of a project's tests in the same task or in separate tasks. Each project still had a separate task for running its tests and so test tasks in separate projects could still run in parallel if overall execution was parallel. There was no way to restriction execution such that only a single test out of all projects executed.

## Configuration

sbt 0.12.0 introduces a general infrastructure for restricting task concurrency beyond the usual ordering declarations. There are two parts to these restrictions.

1. A task is tagged in order to classify its purpose and resource utilization. For example, the compile task may be tagged as `Tags.Compile` and `Tags.CPU`.
2. A list of rules restrict the tasks that may execute concurrently. For example, `Tags.limit(Tags.CPU, 4)` would allow up to four computation-heavy tasks to run at a time.

The system is thus dependent on proper tagging of tasks and then on a good set of rules.

**Tagging Tasks** In general, a tag is associated with a weight that represents the task's relative utilization of the resource represented by the tag. Currently, this weight is an integer, but it may be a floating point in the future. `Initialize[Task[T]]` defines two methods for tagging the constructed `Task`: `tag` and `tagw`. The first method, `tag`, fixes the weight to be 1 for the tags provided to it as arguments. The second method, `tagw`, accepts pairs of tags and weights. For example, the following associates the `CPU` and `Compile` tags with the `compile` task (with a weight of 1).

```
def myCompileTask = Def.task { ... } tag(Tags.CPU, Tags.Compile)

compile := myCompileTask.value
```

Different weights may be specified by passing tag/weight pairs to `tagw`:

```
def downloadImpl = Def.task { ... } tagw(Tags.Network -> 3)

download := downloadImpl.value
```

**Defining Restrictions** Once tasks are tagged, the `concurrentRestrictions` setting sets restrictions on the tasks that may be concurrently executed based on the weighted tags of those tasks. This is necessarily a global set of rules, so it must be scoped in `Global`. For example,

```
concurrentRestrictions in Global := Seq(
  Tags.limit(Tags.CPU, 2),
  Tags.limit(Tags.Network, 10),
  Tags.limit(Tags.Test, 1),
  Tags.limitAll( 15 )
)
```

The example limits:

- the number of CPU-using tasks to be no more than 2
- the number of tasks using the network to be no more than 10
- test execution to only one test at a time across all projects
- the total number of tasks to be less than or equal to 15

Note that these restrictions rely on proper tagging of tasks. Also, the value provided as the limit must be at least 1 to ensure every task is able to be executed. sbt will generate an error if this condition is not met.

Most tasks won't be tagged because they are very short-lived. These tasks are automatically assigned the label `Untagged`. You may want to include these tasks in the CPU rule by using the `limitSum` method. For example:

```
...
Tags.limitSum(2, Tags.CPU, Tags.Untagged)
...
```

Note that the limit is the first argument so that tags can be provided as varargs.

Another useful convenience function is `Tags.exclusive`. This specifies that a task with the given tag should execute in isolation. It starts executing only when no other tasks are running (even if they have the exclusive tag) and no other tasks may start execution until it completes. For example, a task could be tagged with a custom tag `Benchmark` and a rule configured to ensure such a task is executed by itself:

```
...
Tags.exclusive(Benchmark)
...
```

Finally, for the most flexibility, you can specify a custom function of type `Map[Tag,Int] => Boolean`. The `Map[Tag,Int]` represents the weighted tags of a set of tasks. If the function returns `true`, it indicates that the set of tasks is allowed to execute concurrently. If the return value is `false`, the set of tasks will not be allowed to execute concurrently. For example, `Tags.exclusive(Benchmark)` is equivalent to the following:

```
...
Tags.customLimit { (tags: Map[Tag,Int]) =>
  val exclusive = tags.getOrElse(Benchmark, 0)
  // the total number of tasks in the group
  val all = tags.getOrElse(Tags.All, 0)
  // if there are no exclusive tasks in this group, this rule adds no restrictions
  exclusive == 0 ||
  // If there is only one task, allow it to execute.
```

```

    all == 1
}
...

```

There are some basic rules that custom functions must follow, but the main one to be aware of in practice is that if there is only one task, it must be allowed to execute. sbt will generate a warning if the user defines restrictions that prevent a task from executing at all and will then execute the task anyway.

**Built-in Tags and Rules** Built-in tags are defined in the `Tags` object. All tags listed below must be qualified by this object. For example, `CPU` refers to the `Tags.CPU` value.

The built-in semantic tags are:

- `Compile` - describes a task that compiles sources.
- `Test` - describes a task that performs a test.
- `Publish`
- `Update`
- `Untagged` - automatically added when a task doesn't explicitly define any tags.
- `All` - automatically added to every task.

The built-in resource tags are:

- `Network` - describes a task's network utilization.
- `Disk` - describes a task's filesystem utilization.
- `CPU` - describes a task's computational utilization.

The tasks that are currently tagged by default are:

- `compile` : `Compile`, `CPU`
- `test` : `Test`
- `update` : `Update`, `Network`
- `publish`, `publishLocal` : `Publish`, `Network`

Of additional note is that the default `test` task will propagate its tags to each child task created for each test class.

The default rules provide the same behavior as previous versions of sbt:

```

concurrentRestrictions in Global := {
  val max = Runtime.getRuntime.availableProcessors
  Tags.limitAll(if(parallelExecution.value) max else 1) :: Nil
}

```

As before, `parallelExecution` in `Test` controls whether tests are mapped to separate tasks. To restrict the number of concurrently executing tests in all projects, use:

```
concurrentRestrictions in Global += Tags.limit(Tags.Test, 1)
```

**Custom Tags** To define a new tag, pass a `String` to the `Tags.Tag` method. For example:

```
val Custom = Tags.Tag("custom")
```

Then, use this tag as any other tag. For example:

```
def aImpl = Def.task { ... } tag(Custom)

aCustomTask := aImpl.value

concurrentRestrictions in Global +=
  Tags.limit(Custom, 1)
```

### Future work

This is an experimental feature and there are several aspects that may change or require further work.

**Tagging Tasks** Currently, a tag applies only to the immediate computation it is defined on. For example, in the following, the second `compile` definition has no tags applied to it. Only the first computation is labeled.

```
def myCompileTask = Def.task { ... } tag(Tags.CPU, Tags.Compile)

compile := myCompileTask.value

compile := {
  val result = compile.value
  ... do some post processing ...
}
```

Is this desirable? expected? If not, what is a better, alternative behavior?

**Fractional weighting** Weights are currently `ints`, but could be changed to be `doubles` if fractional weights would be useful. It is important to preserve a consistent notion of what a weight of 1 means so that built-in and custom tasks share this definition and useful rules can be written.

**Default Behavior** User feedback on what custom rules work for what workloads will help determine a good set of default tags and rules.

**Adjustments to Defaults** Rules should be easier to remove or redefine, perhaps by giving them names. As it is, rules must be appended or all rules must be completely redefined. Also, tags can only be defined for tasks at the original definition site when using the `:=` syntax.

For removing tags, an implementation of `removeTag` should follow from the implementation of `tag` in a straightforward manner.

**Other characteristics** The system of a tag with a weight was selected as being reasonably powerful and flexible without being too complicated. This selection is not fundamental and could be enhance, simplified, or replaced if necessary. The fundamental interface that describes the constraints the system must work within is `sbt.ConcurrentRestrictions`. This interface is used to provide an intermediate scheduling queue between task execution (`sbt.Execute`) and the underlying thread-based parallel execution service (`java.util.concurrent.CompletionService`). This intermediate queue restricts new tasks from being forwarded to the `j.u.c.CompletionService` according to the `sbt.ConcurrentRestrictions` implementation. See the [sbt.ConcurrentRestrictions](#) API documentation for details.

## External Processes

### Usage

Scala includes a process library to simplify working with external processes. Use `import scala.sys.process._` to bring the implicit conversions into scope.

To run an external command, follow it with an exclamation mark `!`:

```
"find project -name *.jar" !
```

An implicit converts the `String` to `scala.sys.process.ProcessBuilder`, which defines the `!` method. This method runs the constructed command, waits until the command completes, and returns the exit code. Alternatively, the `run` method defined on `ProcessBuilder` runs the command and returns an



instance of `scala.sys.process.Process`, which can be used to **destroy** the process before it completes. With no arguments, the `!` method sends output to standard output and standard error. You can pass a `Logger` to the `!` method to send output to the `Logger`:

```
"find project -name *.jar" ! log
```

Two alternative implicit conversions are from `scala.xml.Elem` or `List[String]` to `scala.sys.process.ProcessBuilder`. These are useful for constructing commands. An example of the first variant from the android plugin:

```
<x> {dxPath.absolutePath} --dex --output={classesDexPath.absolutePath} {classesMinJarPath.ab
```

If you need to set the working directory or modify the environment, call `scala.sys.process.Process` explicitly, passing the command sequence (command and argument list) or command string first and the working directory second. Any environment variables can be passed as a vararg list of key/value String pairs.

```
Process("ls" :: "-l" :: Nil, Path.userHome, "key1" -> value1, "key2" -> value2) ! log
```

Operators are defined to combine commands. These operators start with `#` in order to keep the precedence the same and to separate them from the operators defined elsewhere in `sbt` for filters. In the following operator definitions, `a` and `b` are subcommands.

- `a ##& b` Execute `a`. If the exit code is nonzero, return that exit code and do not execute `b`. If the exit code is zero, execute `b` and return its exit code.
- `a #|| b` Execute `a`. If the exit code is zero, return zero for the exit code and do not execute `b`. If the exit code is nonzero, execute `b` and return its exit code.
- `a #| b` Execute `a` and `b`, piping the output of `a` to the input of `b`.

There are also operators defined for redirecting output to `Files` and input from `Files` and `URLs`. In the following definitions, `url` is an instance of `URL` and `file` is an instance of `File`.

- `a #< url or url #> a` Use `url` as the input to `a`. `a` may be a `File` or a command.
- `a #< file or file #> a` Use `file` as the input to `a`. `a` may be a `File` or a command.

- a #> file or file #< a Write the output of a to file. a may be a File, URL, or a command.
- a #>> file or file #<< a Append the output of a to file. a may be a File, URL, or a command.

There are some additional methods to get the output from a forked process into a `String` or the output lines as a `Stream[String]`. Here are some examples, but see the [ProcessBuilder API](#) for details.

```
val listed: String = "ls" !!
val lines2: Stream[String] = "ls" lines_!
```

Finally, there is a `cat` method to send the contents of Files and URLs to standard output.

**Examples** Download a URL to a File:

```
url("http://databinder.net/dispatch/About") #> file("About.html") !
// or
file("About.html") #< url("http://databinder.net/dispatch/About") !
```

Copy a File:

```
file("About.html") #> file("About_copy.html") !
// or
file("About_copy.html") #< file("About.html") !
```

Append the contents of a URL to a File after filtering through `grep`:

```
url("http://databinder.net/dispatch/About") #> "grep JSON" #>> file("About_JSON") !
// or
file("About_JSON") #<< ( "grep JSON" #< url("http://databinder.net/dispatch/About") ) !
```

Search for uses of `null` in the source directory:

```
"find src -name *.scala -exec grep null {} ;" #| "xargs test -z" #&& "echo null-free" #
```

Use `cat`:

```
val spde = url("http://technically.us/spde/About")
val dispatch = url("http://databinder.net/dispatch/About")
val build = file("project/build.properties")
cat(spde, dispatch, build) #| "grep -i scala" !
```

## Running Project Code

The `run` and `console` actions provide a means for running user code in the same virtual machine as sbt.

`run` also exists in a variant called `runMain` that takes an additional initial argument allowing you to specify the fully qualified name of the main class you want to run. `run` and `runMain` share the same configuration and cannot be configured separately.

This page describes the problems with running user code in the same virtual machine as sbt, how sbt handles these problems, what types of code can use this feature, and what types of code must use a [forked jvm](#). Skip to User Code if you just want to see when you should use a [forked jvm](#).

### Problems

**System.exit** User code can call `System.exit`, which normally shuts down the JVM. Because the `run` and `console` actions run inside the same JVM as sbt, this also ends the build and requires restarting sbt.

**Threads** User code can also start other threads. Threads can be left running after the main method returns. In particular, creating a GUI creates several threads, some of which may not terminate until the JVM terminates. The program is not completed until either `System.exit` is called or all non-daemon threads terminate.

**Deserialization and class loading** During deserialization, the wrong class loader might be used for various complex reasons. This can happen in many scenarios, and running under SBT is just one of them. This is discussed for instance in issues [#163](#) and [#136](#). The reason is explained [here](#).

### sbt's Solutions

**System.exit** User code is run with a custom `SecurityManager` that throws a custom `SecurityException` when `System.exit` is called. This exception is caught by sbt. sbt then disposes of all top-level windows, interrupts (not stops) all user-created threads, and handles the exit code. If the exit code is nonzero, `run` and `console` complete unsuccessfully. If the exit code is zero, they complete normally.

**Threads** sbt makes a list of all threads running before executing user code. After the user code returns, sbt can then determine the threads created by the user code. For each user-created thread, sbt replaces the uncaught exception handler with a custom one that handles the custom `SecurityException` thrown by calls to `System.exit` and delegates to the original handler for everything else. sbt then waits for each created thread to exit or for `System.exit` to be called. sbt handles a call to `System.exit` as described above.

A user-created thread is one that is not in the `system` thread group and is not an AWT implementation thread (e.g. `AWT-XAWT`, `AWT-Windows`). User-created threads include the `AWT-EventQueue-*` thread(s).

**User Code** Given the above, when can user code be run with the `run` and `console` actions?

The user code cannot rely on shutdown hooks and at least one of the following situations must apply for user code to run in the same JVM:

1. User code creates no threads.
2. User code creates a GUI and no other threads.
3. The program ends when user-created threads terminate on their own.
4. `System.exit` is used to end the program and user-created threads terminate when interrupted.
5. No deserialization is done, or the deserialization code ensures that the right class loader is used, as in <https://github.com/NetLogo/NetLogo/blob/5.x/src/main/org/nlogo/util/ClassLoaderObjectInputStream.scala> or <https://github.com/scala/scala/blob/2.11.x/src/actors/scala/actors/remote/JavaSerializer.scala#L20>.

The requirements on threading and shutdown hooks are required because the JVM does not actually shut down. So, shutdown hooks cannot be run and threads are not terminated unless they stop when interrupted. If these requirements are not met, code must run in a `forked jvm`.

The feature of allowing `System.exit` and multiple threads to be used cannot completely emulate the situation of running in a separate JVM and is intended for development. Program execution should be checked in a `forked jvm` when using multiple threads or `System.exit`.

As of sbt 0.13.1, multiple `run` instances can be managed. There can only be one application that uses AWT at a time, however.

## Testing

### Basics

The standard source locations for testing are:

- Scala sources in `src/test/scala/`
- Java sources in `src/test/java/`
- Resources for the test classpath in `src/test/resources/`

The resources may be accessed from tests by using the `getResource` methods of `java.lang.Class` or `java.lang.ClassLoader`.

The main Scala testing frameworks ( [ScalaCheck](#), [ScalaTest](#), and [specs2](#)) provide an implementation of the common test interface and only need to be added to the classpath to work with sbt. For example, `ScalaCheck` may be used by declaring it as a [managed dependency](#):

```
lazy val scalacheck = "org.scalacheck" %% "scalacheck" % "1.13.4"
libraryDependencies += scalacheck % Test
```

`Test` is the [configuration](#) and means that `ScalaCheck` will only be on the test classpath and it isn't needed by the main sources. This is generally good practice for libraries because your users don't typically need your test dependencies to use your library.

With the library dependency defined, you can then add test sources in the locations listed above and compile and run tests. The tasks for running tests are `test` and `testOnly`. The `test` task accepts no command line arguments and runs all tests:

```
> test
```

**testOnly** The `testOnly` task accepts a whitespace separated list of test names to run. For example:

```
> testOnly org.example.MyTest1 org.example.MyTest2
```

It supports wildcards as well:

```
> testOnly org.example.*Slow org.example.MyTest1
```

**testQuick** The `testQuick` task, like `testOnly`, allows to filter the tests to run to specific tests or wildcards using the same syntax to indicate the filters. In addition to the explicit filter, only the tests that satisfy one of the following conditions are run:

- The tests that failed in the previous run
- The tests that were not run before
- The tests that have one or more transitive dependencies, maybe in a different project, recompiled.

**Tab completion** Tab completion is provided for test names based on the results of the last `test:compile`. This means that a new sources aren't available for tab completion until they are compiled and deleted sources won't be removed from tab completion until a recompile. A new test source can still be manually written out and run using `testOnly`.

**Other tasks** Tasks that are available for main sources are generally available for test sources, but are prefixed with `test:` on the command line and are referenced in Scala code with `in Test`. These tasks include:

- `test:compile`
- `test:console`
- `test:consoleQuick`
- `test:run`
- `test:runMain`

See [Running](#) for details on these tasks.

## Output

By default, logging is buffered for each test source file until all tests for that file complete. This can be disabled by setting `logBuffered`:

```
logBuffered in Test := false
```

**Test Reports** By default, sbt will generate JUnit XML test reports for all tests in the build, located in the `target/test-reports` directory for a project. This can be disabled by disabling the `JUnitXmlReportPlugin`

```
val myProject = (project in file(".")).disablePlugins(plugins.JUnitXmlReportPlugin)
```

## Options

**Test Framework Arguments** Arguments to the test framework may be provided on the command line to the `testOnly` tasks following a `--` separator. For example:

```
> testOnly org.example.MyTest -- -verbosity 1
```

To specify test framework arguments as part of the build, add options constructed by `Tests.Argument`:

```
testOptions in Test += Tests.Argument("-verbosity", "1")
```

To specify them for a specific test framework only:

```
testOptions in Test += Tests.Argument(TestFrameworks.ScalaCheck, "-verbosity", "1")
```

**Setup and Cleanup** Specify setup and cleanup actions using `Tests.Setup` and `Tests.Cleanup`. These accept either a function of type `() => Unit` or a function of type `ClassLoader => Unit`. The variant that accepts a `ClassLoader` is passed the class loader that is (or was) used for running the tests. It provides access to the test classes as well as the test framework classes.

**Note:** When forking, the `ClassLoader` containing the test classes cannot be provided because it is in another JVM. Only use the `() => Unit` variants in this case.

Examples:

```
testOptions in Test += Tests.Setup( () => println("Setup") )
```

```
testOptions in Test += Tests.Cleanup( () => println("Cleanup") )
```

```
testOptions in Test += Tests.Setup( loader => ... )
```

```
testOptions in Test += Tests.Cleanup( loader => ... )
```

**Disable Parallel Execution of Tests** By default, sbt runs all tasks in parallel and within the same JVM as sbt itself. Because each test is mapped to a task, tests are also run in parallel by default. To make tests within a given project execute serially: :

```
parallelExecution in Test := false
```

`Test` can be replaced with `IntegrationTest` to only execute integration tests serially. Note that tests from different projects may still execute concurrently.

**Filter classes** If you want to only run test classes whose name ends with “Test”, use `Tests.Filter`:

```
testOptions in Test := Seq(Tests.Filter(s => s.endsWith("Test")))
```

**Forking tests** The setting:

```
fork in Test := true
```

specifies that all tests will be executed in a single external JVM. See [Forking](#) for configuring standard options for forking. By default, tests executed in a forked JVM are executed *sequentially*. More control over how tests are assigned to JVMs and what options to pass to those is available with `testGrouping` key. For example in `build.sbt`:

```
import Tests._

{
  def groupByFirst(tests: Seq[TestDefinition]) =
    tests groupBy (_.name(0)) map {
      case (letter, tests) => new Group(letter.toString, tests, SubProcess(Seq("-Dfirst.lett
    }) toSeq

  testGrouping in Test <:= groupByFirst( (definedTests in Test).value )
}
```

The tests in a single group are run sequentially. Control the number of forked JVMs allowed to run at the same time by setting the limit on `Tags.ForkedTestGroup` tag, which is 1 by default. `Setup` and `Cleanup` actions cannot be provided with the actual test class loader when a group is forked.

In addition, forked tests can optionally be run in parallel within the forked JVM(s), using the following setting:

```
testForkedParallel in Test := true
```

### Additional test configurations

You can add an additional test configuration to have a separate set of test sources and associated compilation, packaging, and testing tasks and settings. The steps are:

- Define the configuration
- Add the tasks and settings
- Declare library dependencies
- Create sources
- Run tasks

The following two examples demonstrate this. The first example shows how to enable integration tests. The second shows how to define a customized test configuration. This allows you to define multiple types of tests per project.



**Integration Tests** The following full build configuration demonstrates integration tests.

```
lazy val commonSettings = Seq(
  scalaVersion := "2.12.2",
  organization := "com.example"
)
lazy val scalatest = "org.scalatest" %% "scalatest" % "3.0.1"

lazy val root = (project in file("."))
  .configs(IntegrationTest)
  .settings(
    commonSettings,
    Defaults.itSettings,
    libraryDependencies += scalatest % "it,test"
    // other settings here
  )
```

- `configs(IntegrationTest)` adds the predefined integration test configuration. This configuration is referred to by the name `it`.
- `settings(Defaults.itSettings)` adds compilation, packaging, and testing actions and settings in the `IntegrationTest` configuration.
- `settings(libraryDependencies += scalatest % "it,test")` adds `scalatest` to both the standard test configuration and the integration test configuration `it`. To define a dependency only for integration tests, use “`it`” as the configuration instead of “`it,test`”.

The standard source hierarchy is used:

- `src/it/scala` for Scala sources
- `src/it/java` for Java sources
- `src/it/resources` for resources that should go on the integration test classpath

The standard testing tasks are available, but must be prefixed with `it::`. For example,

```
> it:testOnly org.example.AnIntegrationTest
```

Similarly the standard settings may be configured for the `IntegrationTest` configuration. If not specified directly, most `IntegrationTest` settings delegate to `Test` settings by default. For example, if test options are specified as:

```
testOptions in Test += ...
```

then these will be picked up by the `Test` configuration and in turn by the `IntegrationTest` configuration. Options can be added specifically for integration tests by putting them in the `IntegrationTest` configuration:

```
testOptions in IntegrationTest += ...
```

Or, use `:=` to overwrite any existing options, declaring these to be the definitive integration test options:

```
testOptions in IntegrationTest := Seq(...)
```

**Custom test configuration** The previous example may be generalized to a custom test configuration.

```
lazy val commonSettings = Seq(
  scalaVersion := "2.12.2",
  organization := "com.example"
)
lazy val scalatest = "org.scalatest" %% "scalatest" % "3.0.1"
lazy val FunTest = config("fun") extend(Test)

lazy val root = (project in file("."))
  .configs(FunTest)
  .settings(
    commonSettings,
    inConfig(FunTest)(Defaults.testSettings),
    libraryDependencies += scalatest % FunTest
    // other settings here
  )
```

Instead of using the built-in configuration, we defined a new one:

```
lazy val FunTest = config("fun") extend(Test)
```

The `extend(Test)` part means to delegate to `Test` for undefined `FunTest` settings. The line that adds the tasks and settings for the new test configuration is:

```
settings(inConfig(FunTest)(Defaults.testSettings))
```

This says to add test and settings tasks in the `FunTest` configuration. We could have done it this way for integration tests as well. In fact,

`Defaults.itSettings` is a convenience definition: `val itSettings = inConfig(IntegrationTest)(Defaults.testSettings)`.

The comments in the integration test section hold, except with `IntegrationTest` replaced with `FunTest` and `"it"` replaced with `"fun"`. For example, test options can be configured specifically for `FunTest`:

```
testOptions in FunTest += ...
```

Test tasks are run by prefixing them with `fun`:

```
> fun:test
```

**Additional test configurations with shared sources** An alternative to adding separate sets of test sources (and compilations) is to share sources. In this approach, the sources are compiled together using the same classpath and are packaged together. However, different tests are run depending on the configuration.

```
lazy val commonSettings = Seq(
  scalaVersion := "2.12.2",
  organization := "com.example"
)
lazy val scalatest = "org.scalatest" %% "scalatest" % "3.0.1"
lazy val FunTest = config("fun") extend(Test)

def itFilter(name: String): Boolean = name endsWith "ITest"
def unitFilter(name: String): Boolean = (name endsWith "Test") && !itFilter(name)

lazy val root = (project in file("."))
  .configs(FunTest)
  .settings(
    commonSettings,
    inConfig(FunTest)(Defaults.testTasks),
    libraryDependencies += scalatest % FunTest,
    testOptions in Test := Seq(Tests.Filter(unitFilter)),
    testOptions in FunTest := Seq(Tests.Filter(itFilter))
    // other settings here
  )
```

The key differences are:

- We are now only adding the test tasks (`inConfig(FunTest)(Defaults.testTasks)`) and not compilation and packaging tasks and settings.

- We filter the tests to be run for each configuration.

To run standard unit tests, run `test` (or equivalently, `test:test`):

```
> test
```

To run tests for the added configuration (here, `"fun"`), prefix it with the configuration name as before:

```
> fun:test
> fun:testOnly org.example.AFunTest
```

**Application to parallel execution** One use for this shared-source approach is to separate tests that can run in parallel from those that must execute serially. Apply the procedure described in this section for an additional configuration. Let's call the configuration `serial`:

```
lazy val Serial = config("serial") extend(Test)
```

Then, we can disable parallel execution in just that configuration using:

```
parallelExecution in Serial := false
```

The tests to run in parallel would be run with `test` and the ones to run in serial would be run with `serial:test`.

## JUnit

Support for JUnit is provided by [junit-interface](#). To add JUnit support into your project, add the `junit-interface` dependency in your project's main `build.sbt` file.

```
libraryDependencies += "com.novocode" % "junit-interface" % "0.11" % Test
```

## Extensions

This page describes adding support for additional testing libraries and defining additional test reporters. You do this by implementing `sbt` interfaces (described below). If you are the author of the testing framework, you can depend on the test interface as a provided dependency. Alternatively, anyone can provide support for a test framework by implementing the interfaces in a separate project and packaging the project as an `sbt` [Plugin](#).

**Custom Test Framework** The main Scala testing libraries have built-in support for sbt. To add support for a different framework, implement the [uniform test interface](#).

**Custom Test Reporters** Test frameworks report status and results to test reporters. You can create a new test reporter by implementing either [TestReportListener](#) or [TestsListener](#).

**Using Extensions** To use your extensions in a project definition:

Modify the `testFrameworks` setting to reference your test framework:

```
testFrameworks += new TestFramework("custom.framework.ClassName")
```

Specify the test reporters you want to use by overriding the `testListeners` setting in your project definition.

```
testListeners += customTestListener
```

where `customTestListener` is of type `sbt.TestReportListener`.

## Dependency Management

This part of the documentation has pages documenting particular sbt topics in detail. Before reading anything in here, you will need the information in the [Getting Started Guide](#) as a foundation.

## Artifacts

### Selecting default artifacts

By default, the published artifacts are the main binary jar, a jar containing the main sources and resources, and a jar containing the API documentation. You can add artifacts for the test classes, sources, or API or you can disable some of the main artifacts.

To add all test artifacts:

```
publishArtifact in Test := true
```

To add them individually:

```

// enable publishing the jar produced by `test:package`
publishArtifact in (Test, packageBin) := true

// enable publishing the test API jar
publishArtifact in (Test, packageDoc) := true

// enable publishing the test sources jar
publishArtifact in (Test, packageSrc) := true

```

To disable main artifacts individually:

```

// disable publishing the main jar produced by `package`
publishArtifact in (Compile, packageBin) := false

// disable publishing the main API jar
publishArtifact in (Compile, packageDoc) := false

// disable publishing the main sources jar
publishArtifact in (Compile, packageSrc) := false

```

## Modifying default artifacts

Each built-in artifact has several configurable settings in addition to `publishArtifact`. The basic ones are `artifact` (of type `SettingKey[Artifact]`), `mappings` (of type `TaskKey[(File,String)]`), and `artifactPath` (of type `SettingKey[File]`). They are scoped by (`<config>`, `<task>`) as indicated in the previous section.

To modify the type of the main artifact, for example:

```

artifact in (Compile, packageBin) := {
  val previous: Artifact = (artifact in (Compile, packageBin)).value
  previous.copy(`type` = "bundle")
}

```

The generated artifact name is determined by the `artifactName` setting. This setting is of type `(ScalaVersion, ModuleID, Artifact) => String`. The `ScalaVersion` argument provides the full Scala version String and the binary compatible part of the version String. The String result is the name of the file to produce. The default implementation is `Artifact.artifactName _`. The function may be modified to produce different local names for artifacts without affecting the published name, which is determined by the `artifact` definition combined with the repository pattern.

For example, to produce a minimal name without a classifier or cross path:

```
artifactName := { (sv: ScalaVersion, module: ModuleID, artifact: Artifact) =>
  artifact.name + "-" + module.revision + "." + artifact.extension
}
```

(Note that in practice you rarely want to drop the classifier.)

Finally, you can get the (`Artifact`, `File`) pair for the artifact by mapping the `packagedArtifact` task. Note that if you don't need the `Artifact`, you can get just the `File` from the package task (`package`, `packageDoc`, or `packageSrc`). In both cases, mapping the task to get the file ensures that the artifact is generated first and so the file is guaranteed to be up-to-date.

For example:

```
val myTask = taskKey[Unit]("My task.")

myTask := {
  val (art, file) = packagedArtifact.in(Compile, packageBin).value
  println("Artifact definition: " + art)
  println("Packaged file: " + file.getAbsolutePath)
}
```

## Defining custom artifacts

In addition to configuring the built-in artifacts, you can declare other artifacts to publish. Multiple artifacts are allowed when using Ivy metadata, but a Maven POM file only supports distinguishing artifacts based on classifiers and these are not recorded in the POM.

Basic `Artifact` construction look like:

```
Artifact("name", "type", "extension")
Artifact("name", "classifier")
Artifact("name", url: URL)
Artifact("name", Map("extra1" -> "value1", "extra2" -> "value2"))
```

For example:

```
Artifact("myproject", "zip", "zip")
Artifact("myproject", "image", "jpg")
Artifact("myproject", "jdk15")
```

See the [Ivy documentation](#) for more details on artifacts. See the [Artifact API](#) for combining the parameters above and specifying [Configurations](#) and extra attributes.

To declare these artifacts for publishing, map them to the task that generates the artifact:

```

val myImageTask = taskKey[File](...)

myImageTask := {
    val artifact: File = makeArtifact(...)
    artifact
}

addArtifact( Artifact("myproject", "image", "jpg"), myImageTask )

```

`addArtifact` returns a sequence of settings (wrapped in a [SettingsDefinition](#)). In a full build configuration, usage looks like:

```

...
lazy val proj = Project(...)
    .settings( addArtifact(...).settings )
...

```

## Publishing .war files

A common use case for web applications is to publish the `.war` file instead of the `.jar` file.

```

// disable .jar publishing
publishArtifact in (Compile, packageBin) := false

// create an Artifact for publishing the .war file
artifact in (Compile, packageWar) := {
    val previous: Artifact = (artifact in (Compile, packageWar)).value
    previous.copy(`type` = "war", extension = "war")
}

// add the .war file to what gets published
addArtifact(artifact in (Compile, packageWar), packageWar)

```

## Using dependencies with artifacts

To specify the artifacts to use from a dependency that has custom or multiple artifacts, use the `artifacts` method on your dependencies. For example:

```

libraryDependencies += "org" % "name" % "rev" artifacts(Artifact("name", "type", "ext"))

```

The `from` and `classifier` methods (described on the [Library Management](#) page) are actually convenience methods that translate to `artifacts`:



```
def from(url: String) = artifacts( Artifact(name, new URL(url)) )
def classifier(c: String) = artifacts( Artifact(name, c) )
```

That is, the following two dependency declarations are equivalent:

```
libraryDependencies += "org.testng" % "testng" % "5.7" classifier "jdk15"
```

```
libraryDependencies += "org.testng" % "testng" % "5.7" artifacts(Artifact("testng", "jdk15"))
```

## Dependency Management Flow

sbt 0.12.1 addresses several issues with dependency management. These fixes were made possible by specific, reproducible examples, such as a situation where the resolution cache got out of date (gh-532). A brief summary of the current work flow with dependency management in sbt follows.

### Background

`update` resolves dependencies according to the settings in a build file, such as `libraryDependencies` and `resolvers`. Other tasks use the output of `update` (an `UpdateReport`) to form various classpaths. Tasks that in turn use these classpaths, such as `compile` or `run`, thus indirectly depend on `update`. This means that before `compile` can run, the `update` task needs to run. However, resolving dependencies on every `compile` would be unnecessarily slow and so `update` must be particular about when it actually performs a resolution.

### Caching and Configuration

1. Normally, if no dependency management configuration has changed since the last successful resolution and the retrieved files are still present, sbt does not ask Ivy to perform resolution.
2. Changing the configuration, such as adding or removing dependencies or changing the version or other attributes of a dependency, will automatically cause resolution to be performed. Updates to locally published dependencies should be detected in sbt 0.12.1 and later and will force an update. Dependent tasks like `compile` and `run` will get updated classpaths.
3. Directly running the `update` task (as opposed to a task that depends on it) will force resolution to run, whether or not configuration changed. This should be done in order to refresh remote SNAPSHOT dependencies.
4. When `offline := true`, remote SNAPSHOTs will not be updated by a resolution, even an explicitly requested update. This should effectively support working without a connection to remote repositories. Reproducible examples demonstrating otherwise are appreciated. Obviously, `update` must have successfully run before going offline.

5. Overriding all of the above, `skip in update := true` will tell sbt to never perform resolution. Note that this can cause dependent tasks to fail. For example, compilation may fail if jars have been deleted from the cache (and so needed classes are missing) or a dependency has been added (but will not be resolved because skip is true). Also, update itself will immediately fail if resolution has not been allowed to run since the last clean.

### General troubleshooting steps

1. Run `update` explicitly. This will typically fix problems with out of date SNAPSHOTS or locally published artifacts.
2. If a file cannot be found, look at the output of update to see where Ivy is looking for the file. This may help diagnose an incorrectly defined dependency or a dependency that is actually not present in a repository.
3. `last update` contains more information about the most recent resolution and download. The amount of debugging output from Ivy is high, so you may want to use lastGrep (run `help lastGrep` for usage).
4. Run `clean` and then `update`. If this works, it could indicate a bug in sbt, but the problem would need to be reproduced in order to diagnose and fix it.
5. Before deleting all of the Ivy cache, first try deleting files in `~/.ivy2/cache` related to problematic dependencies. For example, if there are problems with dependency `"org.example" % "demo" % "1.0"`, delete `~/.ivy2/cache/org.example/demo/1.0/` and retry update. This avoids needing to redownload all dependencies.
6. Normal sbt usage should not require deleting files from `~/.ivy2/cache`, especially if the first four steps have been followed. If deleting the cache fixes a dependency management issue, please try to reproduce the issue and submit a test case.

### Plugins

These troubleshooting steps can be run for plugins by changing to the build definition project, running the commands, and then returning to the main project. For example:

```
> reload plugins
> update
> reload return
```

## Notes

1. Configure offline behavior for all projects on a machine by putting `offline := true` in `~/.sbt/1.0/global.sbt`. A command that does this for the user would make a nice pull request. Perhaps the setting of offline should go into the output of `about` or should it be a warning in the output of `update` or both?
2. The cache improvements in 0.12.1 address issues in the change detection for `update` so that it will correctly re-resolve automatically in more situations. A problem with an out of date cache can usually be attributed to a bug in that change detection if explicitly running `update` fixes the problem.
3. A common solution to dependency management problems in sbt has been to remove `~/.ivy2/cache`. Before doing this with 0.12.1, be sure to follow the steps in the troubleshooting section first. In particular, verify that a clean and an explicit `update` do not solve the issue.
4. There is no need to mark SNAPSHOT dependencies as `changing()` because sbt configures Ivy to know this already.

## Library Management

There's now a [getting started page](#) about library management, which you may want to read first.

*Documentation Maintenance Note:* it would be nice to remove the overlap between this page and the getting started page, leaving this page with the more advanced topics such as checksums and external Ivy files.

## Introduction

There are two ways for you to manage libraries with sbt: manually or automatically. These two ways can be mixed as well. This page discusses the two approaches. All configurations shown here are settings that go either directly in a [.sbt file](#) or are appended to the `settings` of a Project in a [.scala file](#).

## Manual Dependency Management

Manually managing dependencies involves copying any jars that you want to use to the `lib` directory. sbt will put these jars on the classpath during compilation, testing, running, and when using the interpreter. You are responsible for adding, removing, updating, and otherwise managing the jars in this directory. No modifications to your project definition are required to use this method unless you would like to change the location of the directory you store the jars in.

To change the directory jars are stored in, change the `unmanagedBase` setting in your project definition. For example, to use `custom_lib/`:

```
unmanagedBase := baseDirectory.value / "custom_lib"
```

If you want more control and flexibility, override the `unmanagedJars` task, which ultimately provides the manual dependencies to sbt. The default implementation is roughly:

```
unmanagedJars in Compile := (baseDirectory.value ** "*.jar").classpath
```

If you want to add jars from multiple directories in addition to the default directory, you can do:

```
unmanagedJars in Compile += {  
  val base = baseDirectory.value  
  val baseDirectories = (base / "libA") +++ (base / "b" / "lib") +++ (base / "libC")  
  val customJars = (baseDirectories ** "*.jar") +++ (base / "d" / "my.jar")  
  customJars.classpath  
}
```

See [Paths](#) for more information on building up paths.

## Automatic Dependency Management

This method of dependency management involves specifying the direct dependencies of your project and letting sbt handle retrieving and updating your dependencies. sbt supports three ways of specifying these dependencies:

- Declarations in your project definition
- Maven POM files (dependency definitions only: no repositories)
- Ivy configuration and settings files

sbt uses [Apache Ivy](#) to implement dependency management in all three cases. The default is to use inline declarations, but external configuration can be explicitly selected. The following sections describe how to use each method of automatic dependency management.

**Inline Declarations** Inline declarations are a basic way of specifying the dependencies to be automatically retrieved. They are intended as a lightweight alternative to a full configuration using Ivy.

**Dependencies** Declaring a dependency looks like:

```
libraryDependencies += groupId % artifactID % revision
```

or

```
libraryDependencies += groupId % artifactID % revision % configuration
```

See configurations for details on configuration mappings. Also, several dependencies can be declared together:

```
libraryDependencies ++= Seq(  
  groupId %% artifactID % revision,  
  groupId %% otherID % otherRevision  
)
```

If you are using a dependency that was built with sbt, double the first % to be %%:

```
libraryDependencies += groupId %% artifactID % revision
```

This will use the right jar for the dependency built with the version of Scala that you are currently using. If you get an error while resolving this kind of dependency, that dependency probably wasn't published for the version of Scala you are using. See [Cross Build](#) for details.

Ivy can select the latest revision of a module according to constraints you specify. Instead of a fixed revision like "1.6.1", you specify "latest.integration", "2.9.+", or "[1.0,)". See the [Ivy revisions](#) documentation for details.

**Resolvers** sbt uses the standard Maven2 repository by default.

Declare additional repositories with the form:

```
resolvers += name at location
```

For example:

```
libraryDependencies ++= Seq(  
  "org.apache.derby" % "derby" % "10.4.1.3",  
  "org.specs" % "specs" % "1.6.1"  
)
```

```
resolvers += "Sonatype OSS Snapshots" at "https://oss.sonatype.org/content/repositories/snapshots"
```

sbty can search your local Maven repository if you add it as a repository:

```
resolvers += "Local Maven Repository" at "file://" + Path.userHome.absolutePath + "/.m2/repository"
```

See [Resolvers](#) for details on defining other types of repositories.

**Override default resolvers** `resolvers` configures additional, inline user resolvers. By default, sbty combines these resolvers with default repositories (Maven Central and the local Ivy repository) to form `externalResolvers`. To have more control over repositories, set `externalResolvers` directly. To only specify repositories in addition to the usual defaults, configure `resolvers`.

For example, to use the Sonatype OSS Snapshots repository in addition to the default repositories,

```
resolvers += "Sonatype OSS Snapshots" at "https://oss.sonatype.org/content/repositories/snapshots"
```

To use the local repository, but not the Maven Central repository:

```
externalResolvers := Resolver.withDefaultResolvers(resolvers.value, mavenCentral = false)
```

**Override all resolvers for all builds** The repositories used to retrieve sbty, Scala, plugins, and application dependencies can be configured globally and declared to override the resolvers configured in a build or plugin definition. There are two parts:

1. Define the repositories used by the launcher.
2. Specify that these repositories should override those in build definitions.

The repositories used by the launcher can be overridden by defining `~/.sbt/repositories`, which must contain a `[repositories]` section with the same format as the `Launcher` configuration file. For example:

```
[repositories]
local
my-maven-repo: https://example.org/repo
my-ivy-repo: https://example.org/ivy-repo/, [organization]/[module]/[revision]/[type]s/[artifact]
```

A different location for the repositories file may be specified by the `sbt.repository.config` system property in the sbty startup script. The final step is to set `sbt.override.build.repos` to true to use these repositories for dependency resolution and retrieval.

**Explicit URL** If your project requires a dependency that is not present in a repository, a direct URL to its jar can be specified as follows:

```
libraryDependencies += "slinky" % "slinky" % "2.1" from "https://slinky2.googlecode.com/svn/
```

The URL is only used as a fallback if the dependency cannot be found through the configured repositories. Also, the explicit URL is not included in published metadata (that is, the pom or ivy.xml).

**Disable Transitivity** By default, these declarations fetch all project dependencies, transitively. In some instances, you may find that the dependencies listed for a project aren't necessary for it to build. Projects using the Felix OSGI framework, for instance, only explicitly require its main jar to compile and run. Avoid fetching artifact dependencies with either `intransitive()` or `notTransitive()`, as in this example:

```
libraryDependencies += "org.apache.felix" % "org.apache.felix.framework" % "1.8.0" intransitive
```

**Classifiers** You can specify the classifier for a dependency using the `classifier` method. For example, to get the jdk15 version of TestNG:

```
libraryDependencies += "org.testng" % "testng" % "5.7" classifier "jdk15"
```

For multiple classifiers, use multiple `classifier` calls:

```
libraryDependencies +=  
  "org.lwjgl.lwjgl" % "lwjgl-platform" % lwjglVersion classifier "natives-windows" classifier
```

To obtain particular classifiers for all dependencies transitively, run the `updateClassifiers` task. By default, this resolves all artifacts with the `sources` or `javadoc` classifier. Select the classifiers to obtain by configuring the `transitiveClassifiers` setting. For example, to only retrieve sources:

```
transitiveClassifiers := Seq("sources")
```

**Exclude Transitive Dependencies** To exclude certain transitive dependencies of a dependency, use the `excludeAll` or `exclude` methods. The `exclude` method should be used when a pom will be published for the project. It requires the organization and module name to exclude. For example,

```
libraryDependencies +=  
  "log4j" % "log4j" % "1.2.15" exclude("javax.jms", "jms")
```

The `excludeAll` method is more flexible, but because it cannot be represented in a `pom.xml`, it should only be used when a pom doesn't need to be generated. For example,

```
libraryDependencies +=  
  "log4j" % "log4j" % "1.2.15" excludeAll(  
    ExclusionRule(organization = "com.sun.jdmk"),  
    ExclusionRule(organization = "com.sun.jmx"),  
    ExclusionRule(organization = "javax.jms")  
  )
```

See [ModuleID](#) for API details.

In certain cases a transitive dependency should be excluded from all dependencies. This can be achieved by setting up `SbtExclusionRules` in `excludeDependencies`.

```
excludeDependencies += Seq(  
  // commons-logging is replaced by jcl-over-slf4j  
  SbtExclusionRule("commons-logging", "commons-logging")  
)
```

Available since sbt 0.13.9.

See [SbtExclusionRule](#) for API details.

**Download Sources** Downloading source and API documentation jars is usually handled by an IDE plugin. These plugins use the `updateClassifiers` and `updateSbtClassifiers` tasks, which produce an `Update-Report` referencing these jars.

To have sbt download the dependency's sources without using an IDE plugin, add `withSources()` to the dependency definition. For API jars, add `withJavadoc()`. For example:

```
libraryDependencies +=  
  "org.apache.felix" % "org.apache.felix.framework" % "1.8.0" withSources() withJavadoc()
```

Note that this is not transitive. Use the `update-*classifiers` tasks for that.

**Extra Attributes** [Extra attributes](#) can be specified by passing key/value pairs to the `extra` method.

To select dependencies by extra attributes:



```
libraryDependencies += "org" % "name" % "rev" extra("color" -> "blue")
```

To define extra attributes on the current project:

```
projectID := {  
  val previous = projectID.value  
  previous.extra("color" -> "blue", "component" -> "compiler-interface")  
}
```

**Inline Ivy XML** sbt additionally supports directly specifying the configurations or dependencies sections of an Ivy configuration file inline. You can mix this with inline Scala dependency and repository declarations.

For example:

```
ivyXML :=  
  <dependencies>  
    <dependency org="javax.mail" name="mail" rev="1.4.2">  
      <exclude module="activation"/>  
    </dependency>  
  </dependencies>
```

**Ivy Home Directory** By default, sbt uses the standard Ivy home directory location `${user.home}/.ivy2/`. This can be configured machine-wide, for use by both the sbt launcher and by projects, by setting the system property `sbt.ivy.home` in the sbt startup script (described in [Setup](#)).

For example:

```
java -Dsbt.ivy.home=/tmp/.ivy2/ ...
```

**Checksums** sbt ([through Ivy](#)) verifies the checksums of downloaded files by default. It also publishes checksums of artifacts by default. The checksums to use are specified by the *checksums* setting.

To disable checksum checking during update:

```
checksums in update := Nil
```

To disable checksum creation during artifact publishing:

```
checksums in publishLocal := Nil
```

```
checksums in publish := Nil
```

The default value is:

```
checksums := Seq("sha1", "md5")
```

**Conflict Management** The conflict manager decides what to do when dependency resolution brings in different versions of the same library. By default, the latest revision is selected. This can be changed by setting `conflictManager`, which has type `ConflictManager`. See the [Ivy documentation](#) for details on the different conflict managers. For example, to specify that no conflicts are allowed,

```
conflictManager := ConflictManager.strict
```

With this set, any conflicts will generate an error. To resolve a conflict, you must configure a dependency override, which is explained in a later section.

**Eviction warning** The following direct dependencies will introduce a conflict on the akka-actor version because banana-rdf requires akka-actor 2.1.4.

```
libraryDependencies += Seq(
  "org.w3" %% "banana-rdf" % "0.4",
  "com.typesafe.akka" %% "akka-actor" % "2.3.7",
)
```

The default conflict manager will select the newer version of akka-actor, 2.3.7. This can be confirmed in the output of `show update`, which shows the newer version as being selected and the older version as evicted.

```
> show update
[info] compile:

[info] com.typesafe.akka:akka-actor_2.10
[info]   - 2.3.7
...
[info]   - 2.1.4
...
[info]       evicted: true
[info]       evictedReason: latest-revision
...
[info]       callers: org.w3:banana-rdf_2.10:0.4
```

Furthermore, the binary version compatibility of the akka-actor 2.1.4 and 2.3.7 are not guaranteed since the second segment has bumped up. sbt 0.13.6+ detects this automatically and prints out the following warning:

```
[warn] There may be incompatibilities among your library dependencies.
[warn] Here are some of the libraries that were evicted:
[warn] * com.typesafe.akka:akka-actor_2.10:2.1.4 -> 2.3.7
[warn] Run 'evicted' to see detailed eviction warnings
```

Since akka-actor 2.1.4 and 2.3.7 are not binary compatible, the only way to fix this is to downgrade your dependency to akka-actor 2.1.4, or upgrade banana-rdf to use akka-actor 2.3.

**Overriding a version** For binary compatible conflicts, sbt provides dependency overrides. They are configured with the `dependencyOverrides` setting, which is a set of `ModuleIDs`. For example, the following dependency definitions conflict because spark uses log4j 1.2.16 and scalaxb uses log4j 1.2.17:

```
libraryDependencies += Seq(
  "org.spark-project" %% "spark-core" % "0.5.1",
  "org.scalaxb" %% "scalaxb" % "1.0.0"
)
```

The default conflict manager chooses the latest revision of log4j, 1.2.17:

```
> show update
[info] compile:
[info]   log4j:log4j:1.2.17: ...
...
[info]   (EVICTED) log4j:log4j:1.2.16
...
```

To change the version selected, add an override:

```
dependencyOverrides += "log4j" % "log4j" % "1.2.16"
```

This will not add a direct dependency on log4j, but will force the revision to be 1.2.16. This is confirmed by the output of `show update`:

```
> show update
[info] compile:
[info]   log4j:log4j:1.2.16
...
```

**Note:** this is an Ivy-only feature and will not be included in a published pom.xml.

**Unresolved dependencies error** Adding the following dependency to your project will result to an unresolved dependencies error of vpp 2.2.1:

```
libraryDependencies += "org.apache.cayenne.plugins" % "maven-cayenne-plugin" % "3.0.2"
```

sbt 0.13.6+ will try to reconstruct dependencies tree when it fails to resolve a managed dependency. This is an approximation, but it should help you figure out where the problematic dependency is coming from. When possible sbt will display the source position next to the modules:

```
[warn] ::::::::::::::::::::::::::::::::::::::::::::::::::::::::::::
[warn] ::                UNRESOLVED DEPENDENCIES                 ::
[warn] ::::::::::::::::::::::::::::::::::::::::::::::::::::::::::::
[warn] :: foundrylogic.vpp#vpp;2.2.1: not found                     ::
[warn] ::::::::::::::::::::::::::::::::::::::::::::::::::::::::::::
[warn]
[warn] Note: Unresolved dependencies path:
[warn]   foundrylogic.vpp:vpp:2.2.1
[warn]     +- org.apache.cayenne:cayenne-tools:3.0.2
[warn]     +- org.apache.cayenne.plugins:maven-cayenne-plugin:3.0.2 (/foo/some-test/build.sbt)
[warn]     +- d:d_2.10:0.1-SNAPSHOT
```

**Cached resolution** See [Cached resolution](#) for performance improvement option.

**Publishing** See [Publishing](#) for how to publish your project.

**Configurations** Ivy configurations are a useful feature for your build when you need custom groups of dependencies, such as for a plugin. Ivy configurations are essentially named sets of dependencies. You can read the [Ivy documentation](#) for details.

The built-in use of configurations in sbt is similar to scopes in Maven. sbt adds dependencies to different classpaths by the configuration that they are defined in. See the description of [Maven Scopes](#) for details.

You put a dependency in a configuration by selecting one or more of its configurations to map to one or more of your project's configurations. The most common case is to have one of your configurations **A** use a dependency's configuration **B**. The mapping for this looks like "**A**->**B**". To apply this mapping to a dependency, add it to the end of your dependency definition:

```
libraryDependencies += "org.scalatest" %% "scalatest" % "2.1.3" % "test->compile"
```

This says that your project's "test" configuration uses `ScalaTest`'s "compile" configuration. See the [Ivy documentation](#) for more advanced mappings. Most projects published to Maven repositories will use the "compile" configuration.

A useful application of configurations is to group dependencies that are not used on normal classpaths. For example, your project might use a "js" configuration to automatically download jQuery and then include it in your jar by modifying resources. For example:

```
ivyConfigurations += config("js") hide

libraryDependencies += "jquery" % "jquery" % "1.3.2" % "js->default" from "https://jqueryjs.

resources += update.value.select(configurationFilter("js"))
```

The `config` method defines a new configuration with name "js" and makes it private to the project so that it is not used for publishing. See [Update Report](#) for more information on selecting managed artifacts.

A configuration without a mapping (no "->") is mapped to "default" or "compile". The -> is only needed when mapping to a different configuration than those. The `ScalaTest` dependency above can then be shortened to:

```
libraryDependencies += "org.scalatest" %% "scalatest" % "2.1.3" % "test"
```

**External Maven or Ivy** For this method, create the configuration files as you would for Maven (`pom.xml`) or Ivy (`ivy.xml` and optionally `ivysettings.xml`). External configuration is selected by using one of the following expressions.

#### Ivy settings (resolver configuration)

```
externalIvySettings()
```

or

```
externalIvySettings(baseDirectory.value / "custom-settings-name.xml")
```

or

```
externalIvySettingsURL(url("your_url_here"))
```

### Ivy file (dependency configuration)

```
externalIvyFile()
```

or

```
externalIvyFile(Def.setting(baseDirectory.value / "custom-name.xml"))
```

Because Ivy files specify their own configurations, sbt needs to know which configurations to use for the `compile`, `runtime`, and `test` classpaths. For example, to specify that the `Compile` classpath should use the ‘default’ configuration:

```
classpathConfiguration in Compile := config("default")
```

### Maven pom (dependencies only)

```
externalPom()
```

or

```
externalPom(Def.setting(baseDirectory.value / "custom-name.xml"))
```

**Full Ivy Example** For example, a `build.sbt` using external Ivy files might look like:

```
externalIvySettings()
```

```
externalIvyFile(Def.setting(baseDirectory.value / "ivyA.xml"))
```

```
classpathConfiguration in Compile := Compile
```

```
classpathConfiguration in Test := Test
```

```
classpathConfiguration in Runtime := Runtime
```

**Forcing a revision (Not recommended)** **Note:** Forcing can create logical inconsistencies so it’s no longer recommended.

To say that we prefer the version we’ve specified over the version from indirect dependencies, use `force()`:

```
libraryDependencies += Seq(  
  "org.spark-project" %% "spark-core" % "0.5.1",  
  "log4j" % "log4j" % "1.2.14" force()  
)
```

**Note:** this is an Ivy-only feature and cannot be included in a published pom.xml.

**Known limitations** Maven support is dependent on Ivy's support for Maven POMs. Known issues with this support:

- Specifying `relativePath` in the `parent` section of a POM will produce an error.
- Ivy ignores repositories specified in the POM. A workaround is to specify repositories inline or in an Ivy `ivysettings.xml` file.

## Proxy Repositories

It's often the case that users wish to set up a maven/ivy proxy repository inside their corporate firewall, and have developer sbt instances resolve artifacts through such a proxy. Let's detail what exact changes must be made for this to work.

### Overview

The situation arises when many developers inside an organization are attempting to resolve artifacts. Each developer's machine will hit the internet and download an artifact, regardless of whether or not another on the team has already done so. Proxy repositories provide a single point of remote download for an organization. In addition to control and security concerns, Proxy repositories are primarily important for increased speed across a team.

There are many good proxy repository solutions out there, with the big three being (in alphabetical order):

- [Archiva](#)
- [Artifactory](#)
- [Nexus](#)

Once you have a proxy repository installed and configured, then it's time to configure sbt for your needs. Read the note at the bottom about proxy issues with ivy repositories.



Figure 7: image



## sbt Configuration

sbt requires configuration in two places to make use of a proxy repository. The first is the `~/.sbt/repositories` file, and the second is the launcher script.

### `~/.sbt/repositories`

The repositories file is an external configuration for the Launcher. The exact syntax for the configuration file is detailed in the [sbt Launcher Configuration](#).

Here's an example config:

```
[repositories]
  local
  my-ivy-proxy-releases: http://repo.company.com/ivy-releases/, [organization]/[module]/(scala
  my-maven-proxy-releases: http://repo.company.com/maven-releases/
```

This example configuration has three repositories configured for sbt.

The first resolver is `local`, and is used so that artifacts pushed using `publish-local` will be seen in other sbt projects.

The second resolver is `my-ivy-proxy-releases`. This repository is used to resolve sbt *itself* from the company proxy repository, as well as any sbt plugins that may be required. Note that the ivy resolver pattern is important, make sure that yours matches the one shown or you may not be able to resolve sbt plugins.

The final resolver is `my-maven-proxy-releases`. This repository is a proxy for all standard maven repositories, including maven central.

This repositories file is all that's required to use a proxy repository. These repositories will get included first in any sbt build, however you can add some additional configuration to force the use of the proxy repository instead of other configurations.

**Launcher Script** The sbt launcher supports two configuration options that allow the usage of proxy repositories. The first is the `sbt.override.build.repos` setting and the second is the `sbt.repository.config` setting.

**sbt.override.build.repos** This setting is used to specify that all sbt project added resolvers should be ignored in favor of those configured in the `repositories` configuration. Using this with a properly configured `~/.sbt/repositories` file leads to only your proxy repository used for builds.

It is specified like so:

```
-Dsbt.override.build.repos=true
```

The value defaults to false and must be explicitly enabled.

**sbt.repository.config** If you are unable to create a `~/.sbt/repositories` file, due to user permission errors or for convenience of developers, you can modify the sbt start script directly with the following:

```
-Dsbt.repository.config=<path-to-your-repo-file>
```

This is only necessary if users do not already have their own default repository file.

## Proxying Ivy Repositories

The most common mistake made when setting up a proxy repository for sbt is the attempting to *merge* both *maven* and *ivy* repositories into the *same* proxy repository. While some repository managers will allow this, it's not recommended to do so.

Even if your company does not use ivy, sbt uses a custom layout to handle binary compatibility constraints of its own plugins. To ensure that these are resolved correctly, simple set up two virtual/proxy repositories, one for maven and one for ivy.

Here's an example setup:

## Publishing

This page describes how to publish your project. Publishing consists of uploading a descriptor, such as an Ivy file or Maven POM, and artifacts, such as a jar or war, to a repository so that other projects can specify your project as a dependency.

The **publish** action is used to publish your project to a remote repository. To use publishing, you need to specify the repository to publish to and the credentials to use. Once these are set up, you can run **publish**.

The **publishLocal** action is used to publish your project to a local Ivy repository. You can then use this project from other projects on the same machine.



Figure 8: image

## Define the repository

To specify the repository, assign a repository to `publishTo` and optionally set the publishing style. For example, to upload to Nexus:

```
publishTo := Some("Sonatype Snapshots Nexus" at "https://oss.sonatype.org/content/repositories")
```

To publish to a local repository:

```
publishTo := Some(Resolver.file("file", new File( "path/to/my/maven-repo/releases" )))
```

Publishing to the users local maven repository:

```
publishTo := Some(Resolver.file("file", new File(Path.userHome.absolutePath+"/.m2/repository")))
```

If you're using Maven repositories you will also have to select the right repository depending on your artifacts: SNAPSHOT versions go to the `/snapshot` repository while other versions go to the `/releases` repository. Doing this selection can be done by using the value of the `isSnapshot` SettingKey:

```
publishTo := {  
  val nexus = "https://my.artifact.repo.net/"  
  if (isSnapshot.value)  
    Some("snapshots" at nexus + "content/repositories/snapshots")  
  else  
    Some("releases" at nexus + "service/local/staging/deploy/maven2")  
}
```

## Credentials

There are two ways to specify credentials for such a repository. The first is to specify them inline:

```
credentials += Credentials("Some Nexus Repository Manager", "my.artifact.repo.net", "admin")
```

The second and better way is to load them from a file, for example:

```
credentials += Credentials(Path.userHome / ".ivy2" / ".credentials")
```

The credentials file is a properties file with keys `realm`, `host`, `user`, and `password`. For example:

```
realm=My Nexus Repository Manager  
host=my.artifact.repo.net  
user=admin  
password=admin123
```

## Cross-publishing

To support multiple incompatible Scala versions, enable cross building and do `+publish` (see [Cross Build](#)). See [Resolvers](#) for other supported repository types.

## Published artifacts

By default, the main binary jar, a sources jar, and a API documentation jar are published. You can declare other types of artifacts to publish and disable or modify the default artifacts. See the [Artifacts](#) page for details.

## Modifying the generated POM

When `publishMavenStyle` is `true`, a POM is generated by the `makePom` action and published to the repository instead of an Ivy file. This POM file may be altered by changing a few settings. Set `pomExtra` to provide XML (`scala.xml.NodeSeq`) to insert directly into the generated pom. For example:

```
pomExtra :=
  <licenses>
    <license>
      <name>Apache 2</name>
      <url>https://www.apache.org/licenses/LICENSE-2.0.txt</url>
      <distribution>repo</distribution>
    </license>
  </licenses>
```

`makePom` adds to the POM any Maven-style repositories you have declared. You can filter these by modifying `pomRepositoryFilter`, which by default excludes local repositories. To instead only include local repositories:

```
pomIncludeRepository := { (repo: MavenRepository) =>
  repo.root.startsWith("file:")
}
```

There is also a `pomPostProcess` setting that can be used to manipulate the final XML before it is written. It's type is `Node => Node`.

```
pomPostProcess := { (node: Node) =>
  ...
}
```

## Publishing Locally

The `publishLocal` command will publish to the local Ivy repository. By default, this is in `${user.home}/.ivy2/local`. Other projects on the same machine can then list the project as a dependency. For example, if the SBT project you are publishing has configuration parameters like:

```
name := "My Project"

organization := "org.me"

version := "0.1-SNAPSHOT"
```

Then another project can depend on it:

```
libraryDependencies += "org.me" %% "my-project" % "0.1-SNAPSHOT"
```

The version number you select must end with `SNAPSHOT`, or you must change the version number each time you publish. Ivy maintains a cache, and it stores even local projects in that cache. If Ivy already has a version cached, it will not check the local repository for updates, unless the version number matches a [changing pattern](#), and `SNAPSHOT` is one such pattern.

## Resolvers

### Maven

Resolvers for Maven2 repositories are added as follows:

```
resolvers +=
  "Sonatype OSS Snapshots" at "https://oss.sonatype.org/content/repositories/snapshots"
```

This is the most common kind of user-defined resolvers. The rest of this page describes how to define other types of repositories.

### Predefined

A few predefined repositories are available and are listed below

- `DefaultMavenRepository` This is the main Maven repository at <https://repo1.maven.org/maven2/> and is included by default

- `JavaNet1Repository` This is the Maven 1 repository at <http://download.java.net/maven/1/>
- `Resolver.sonatypeRepo("public")` (or “snapshots”, “releases”) This is Sonatype OSS Maven Repository at <https://oss.sonatype.org/content/repositories/public>
- `Resolver.typesafeRepo("releases")` (or “snapshots”) This is Typesafe Repository at <https://repo.typesafe.com/typesafe/releases>
- `Resolver.typesafeIvyRepo("releases")` (or “snapshots”) This is Type-safe Ivy Repository at <https://repo.typesafe.com/typesafe/ivy-releases>
- `Resolver.sbtPluginRepo("releases")` (or “snapshots”) This is sbt Community Repository at <https://repo.scala-sbt.org/scalasbt/sbt-plugin-releases>
- `Resolver.bintrayRepo("owner", "repo")` This is the Bintray repository at <https://dl.bintray.com/{owner}/{repo}/>
- `Resolver.jcenterRepo` This is the Bintray JCenter repository at <https://jcenter.bintray.com/>

For example, to use the `java.net` repository, use the following setting in your build definition:

```
resolvers += JavaNet1Repository
```

Predefined repositories will go under `Resolver` going forward so they are in one place:

```
Resolver.sonatypeRepo("releases") // Or "snapshots"
```

## Custom

sbt provides an interface to the repository types available in Ivy: file, URL, SSH, and SFTP. A key feature of repositories in Ivy is using [patterns](#) to configure repositories.

Construct a repository definition using the factory in `sbt.Resolver` for the desired type. This factory creates a `Repository` object that can be further configured. The following table contains links to the Ivy documentation for the repository type and the API documentation for the factory and repository class. The SSH and SFTP repositories are configured identically except for the name of the factory. Use `Resolver.ssh` for SSH and `Resolver.sftp` for SFTP.

Type

Factory

Ivy Docs

Factory API  
Repository Class API  
Filesystem  
Resolver.file  
Ivy filesystem  
filesystem factory  
FileRepository API  
SFTP  
Resolver.sftp  
Ivy sftp  
sftp factory  
SftpRepository API  
SSH  
Resolver.ssh  
Ivy ssh  
ssh factory  
SshRepository API  
URL  
Resolver.url  
Ivy url  
url factory  
URLRepository API

**Basic Examples** These are basic examples that use the default Maven-style repository layout.

**Filesystem** Define a filesystem repository in the `test` directory of the current working directory and declare that publishing to this repository must be atomic.

```
resolvers += Resolver.file("my-test-repo", file("test")) transactional()
```



**URL** Define a URL repository at "https://example.org/repo-releases/".

```
resolvers += Resolver.url("my-test-repo", url("https://example.org/repo-releases/"))
```

To specify an Ivy repository, use:

```
resolvers += Resolver.url("my-test-repo", url)(Resolver.ivyStylePatterns)
```

or customize the layout pattern described in the Custom Layout section below.

**SFTP and SSH Repositories** The following defines a repository that is served by SFTP from host "example.org":

```
resolvers += Resolver.sftp("my-sftp-repo", "example.org")
```

To explicitly specify the port:

```
resolvers += Resolver.sftp("my-sftp-repo", "example.org", 22)
```

To specify a base path:

```
resolvers += Resolver.sftp("my-sftp-repo", "example.org", "maven2/repo-releases/")
```

Authentication for the repositories returned by `sftp` and `ssh` can be configured by the `as` methods.

To use password authentication:

```
resolvers += Resolver.ssh("my-ssh-repo", "example.org") as("user", "password")
```

or to be prompted for the password:

```
resolvers += Resolver.ssh("my-ssh-repo", "example.org") as("user")
```

To use key authentication:

```
resolvers += {  
  val keyFile: File = ...  
  Resolver.ssh("my-ssh-repo", "example.org") as("user", keyFile, "keyFilePassword")  
}
```

or if no keyfile password is required or if you want to be prompted for it:

```
resolvers += Resolver.ssh("my-ssh-repo", "example.org") as("user", keyFile)
```

To specify the permissions used when publishing to the server:

```
resolvers += Resolver.ssh("my-ssh-repo", "example.org") withPermissions("0644")
```

This is a `chmod`-like mode specification.

**Custom Layout** These examples specify custom repository layouts using patterns. The factory methods accept an `Patterns` instance that defines the patterns to use. The patterns are first resolved against the base file or URL. The default patterns give the default Maven-style layout. Provide a different `Patterns` object to use a different layout. For example:

```
resolvers += Resolver.url("my-test-repo", url)( Patterns("[organisation]/[module]/[revision]"
```

You can specify multiple patterns or patterns for the metadata and artifacts separately. You can also specify whether the repository should be Maven compatible (as defined by Ivy). See the [patterns API](#) for the methods to use.

For filesystem and URL repositories, you can specify absolute patterns by omitting the base URL, passing an empty `Patterns` instance, and using `ivys` and `artifacts`:

```
resolvers += Resolver.url("my-test-repo") artifacts  
    "https://example.org/[organisation]/[module]/[revision]/[artifact].[ext]"
```

## Update Report

`update` and related tasks produce a value of type `sbt.UpdateReport`. This data structure provides information about the resolved configurations, modules, and artifacts. At the top level, `UpdateReport` provides reports of type `ConfigurationReport` for each resolved configuration. A `ConfigurationReport` supplies reports (of type `ModuleReport`) for each module resolved for a given configuration. Finally, a `ModuleReport` lists each successfully retrieved `Artifact` and the `File` it was retrieved to as well as the `Artifacts` that couldn't be downloaded. This missing `Artifact` list is always empty for `update`, which will fail if it is non-empty. However, it may be non-empty for `updateClassifiers` and `updateSbtClassifiers`.

## Filtering a Report and Getting Artifacts

A typical use of `UpdateReport` is to retrieve a list of files matching a filter. A conversion of type `UpdateReport => RichUpdateReport` implicitly provides these methods for `UpdateReport`. The filters are defined by the [DependencyFilter](#), [ConfigurationFilter](#), [ModuleFilter](#), and [ArtifactFilter](#) types. Using these filter types, you can filter by the configuration name, the module organization, name, or revision, and the artifact name, type, extension, or classifier.

The relevant methods (implicitly on `UpdateReport`) are:

```
def matching(f: DependencyFilter): Seq[File]

def select(configuration: ConfigurationFilter = ...,
            module: ModuleFilter = ...,
            artifact: ArtifactFilter = ...): Seq[File]
```

Any argument to `select` may be omitted, in which case all values are allowed for the corresponding component. For example, if the `ConfigurationFilter` is not specified, all configurations are accepted. The individual filter types are discussed below.

**Filter Basics** Configuration, module, and artifact filters are typically built by applying a `NameFilter` to each component of a `Configuration`, `ModuleID`, or `Artifact`. A basic `NameFilter` is implicitly constructed from a `String`, with `*` interpreted as a wildcard.

```
import sbt._
// each argument is of type NameFilter
val mf: ModuleFilter = moduleFilter(organization = "*sbt*",
    name = "main" | "actions", revision = "1.*" - "1.0")

// unspecified arguments match everything by default
val mf: ModuleFilter = moduleFilter(organization = "net.databinder")

// specifying "*" is the same as omitting the argument
val af: ArtifactFilter = artifactFilter(name = "*", `type` = "source",
    extension = "jar", classifier = "sources")

val cf: ConfigurationFilter = configurationFilter(name = "compile" | "test")
```

Alternatively, these filters, including a `NameFilter`, may be directly defined by an appropriate predicate (a single-argument function returning a `Boolean`).

```

import sbt._

// here the function value of type String => Boolean is implicitly converted to a NameFilter
val nf: NameFilter = (s: String) => s.startsWith("dispatch-")

// a Set[String] is a function String => Boolean
val acceptConfigs: Set[String] = Set("compile", "test")
// implicitly converted to a ConfigurationFilter
val cf: ConfigurationFilter = acceptConfigs

val mf: ModuleFilter = (m: ModuleID) => m.organization contains "sbt"

val af: ArtifactFilter = (a: Artifact) => a.classifier.isEmpty

```

**ConfigurationFilter** A configuration filter essentially wraps a `NameFilter` and is explicitly constructed by the `configurationFilter` method:

```
def configurationFilter(name: NameFilter = ...): ConfigurationFilter
```

If the argument is omitted, the filter matches all configurations. Functions of type `String => Boolean` are implicitly convertible to a `ConfigurationFilter`. As with `ModuleFilter`, `ArtifactFilter`, and `NameFilter`, the `&`, `|`, and `-` methods may be used to combine `ConfigurationFilters`.

```

import sbt._
val a: ConfigurationFilter = Set("compile", "test")
val b: ConfigurationFilter = (c: String) => c.startsWith("r")
val c: ConfigurationFilter = a | b

```

(The explicit types are optional here.)

**ModuleFilter** A module filter is defined by three `NameFilters`: one for the organization, one for the module name, and one for the revision. Each component filter must match for the whole module filter to match. A module filter is explicitly constructed by the `moduleFilter` method:

```
def moduleFilter(organization: NameFilter = ..., name: NameFilter = ..., revision: NameFilter = ...)
```

An omitted argument does not contribute to the match. If all arguments are omitted, the filter matches all `ModuleIDs`. Functions of type `ModuleID => Boolean` are implicitly convertible to a `ModuleFilter`. As with `ConfigurationFilter`, `ArtifactFilter`, and `NameFilter`, the `&`, `|`, and `-` methods may be used to combine `ModuleFilters`:

```
import sbt._
val a: ModuleFilter = moduleFilter(name = "dispatch-twitter", revision = "0.7.8")
val b: ModuleFilter = moduleFilter(name = "dispatch-*")
val c: ModuleFilter = b - a
```

(The explicit types are optional here.)

**ArtifactFilter** An artifact filter is defined by four `NameFilters`: one for the name, one for the type, one for the extension, and one for the classifier. Each component filter must match for the whole artifact filter to match. An artifact filter is explicitly constructed by the `artifactFilter` method:

```
def artifactFilter(name: NameFilter = ..., `type`: NameFilter = ...,
  extension: NameFilter = ..., classifier: NameFilter = ...): ArtifactFilter
```

Functions of type `Artifact => Boolean` are implicitly convertible to an `ArtifactFilter`. As with `ConfigurationFilter`, `ModuleFilter`, and `NameFilter`, the `&`, `|`, and `-` methods may be used to combine `ArtifactFilters`:

```
import sbt._
val a: ArtifactFilter = artifactFilter(classifier = "javadoc")
val b: ArtifactFilter = artifactFilter(`type` = "jar")
val c: ArtifactFilter = b - a
```

(The explicit types are optional here.)

**DependencyFilter** A `DependencyFilter` is typically constructed by combining other `DependencyFilters` together using `&&`, `||`, and `--`. Configuration, module, and artifact filters are `DependencyFilters` themselves and can be used directly as a `DependencyFilter` or they can build up a `DependencyFilter`. Note that the symbols for the `DependencyFilter` combining methods are doubled up to distinguish them from the combinators of the more specific filters for configurations, modules, and artifacts. These double-character methods will always return a `DependencyFilter`, whereas the single character methods preserve the more specific filter type. For example:

```
import sbt._

val df: DependencyFilter =
  configurationFilter(name = "compile" | "test") &&
  artifactFilter(`type` = "jar") ||
  moduleFilter(name = "dispatch-*")
```

Here, we used `&&` and `||` to combine individual component filters into a dependency filter, which can then be provided to the `UpdateReport.matches` method. Alternatively, the `UpdateReport.select` method may be used, which is equivalent to calling `matches` with its arguments combined with `&&`.

## Cached resolution

Cached resolution is an **experimental** feature of sbt added since 0.13.7 to address the scalability performance of dependency resolution.

### Setup

To set up cached resolution include the following setting in your project's build:

```
updateOptions := updateOptions.value.withCachedResolution(true)
```

### Dependency as a graph

A project declares its own library dependency using `libraryDependencies` setting. The libraries you added also bring in their transitive dependencies. For example, your project may depend on `dispatch-core 0.11.2`; `dispatch-core 0.11.2` depends on `async-http-client 1.8.10`; `async-http-client 1.8.10` depends on `netty 3.9.2.Final`, and so forth. If we think of each library to be a node with arrows going out to dependent nodes, we can think of the entire dependencies to be a graph – specifically a [directed acyclic graph](#).

This graph-like structure, which was adopted from Apache Ivy, allows us to define [override rules and exclusions](#) transitively, but as the number of the node increases, the time it takes to resolve dependencies grows significantly. See [Motivation](#) section later in this page for the full description.

### Cached resolution

Cached resolution feature is akin to incremental compilation, which only recompiles the sources that have been changed since the last `compile`. Unlike the Scala compiler, Ivy does not have the concept of separate compilation, so that needed to be implemented.

Instead of resolving the full dependency graph, cached resolution feature creates minigraphs – one for each direct dependency appearing in all related sub-projects. These minigraphs are resolved using Ivy's resolution engine, and the result is stored locally under `~/.sbt/1.0/dependency/` (or what's specified by `sbt.dependency.base` flag) shared across all builds. After all minigraphs are

resolved, they are stitched together by applying the conflict resolution algorithm (typically picking the latest version).

When you add a new library to your project, cached resolution feature will check for the minigraph files under `~/.sbt/1.0/dependency/` and load the previously resolved nodes, which incurs negligible I/O overhead, and only resolve the newly added library. The intended performance improvement is that the second and third subprojects can take advantage of the resolved minigraphs from the first one and avoid duplicated work. The following figure illustrates the proj A, B, and C all hitting the same set of json file.



The actual speedup will depend case by case, but you should see significant speedup if you have many subprojects. An initial report from a user showed change from 260s to 25s. Your mileage may vary.

### Caveats and known issues

Cached resolution is an **experimental** feature, and you might run into some issues. When you see them please report to GitHub Issue or sbt-dev list.

**First runs** The first time you run cached resolution will likely be slow since it needs to resolve all minigraphs and save the result into filesystem. Whenever you add a new node the system has not seen, it will save the minigraph. The second run onwards should be faster, but comparing full-resolution `update` with second run onwards might not be a fair comparison.

**Ivy fidelity is not guaranteed** Some of the Ivy behavior doesn't make sense, especially around Maven emulation. For example, it seem to treat all transitive dependencies introduced by Maven-published library as `force()` even when the original `pom.xml` doesn't say to:

```
$ cat ~/.ivy2/cache/com.ning/async-http-client/ivy-1.8.10.xml | grep netty
  <dependency org="io.netty" name="netty" rev="3.9.2.Final" force="true" conf="compile->comp
```

There are also some issues around multiple dependencies to the same library with different [Maven classifiers](#). In these cases, reproducing the exact result as normal `update` may not make sense or is downright impossible.

**SNAPSHOT and dynamic dependencies** When a minigraph contains either a SNAPSHOT or dynamic dependency, the graph is considered dynamic, and it will be invalidated after a single task execution. Therefore, if you have any SNAPSHOT in your graph, your exeperience may degrade. (This could be improved in the future)

## Motivation

sbt internally uses Apache Ivy to resolve library dependencies. While sbt has benefited from not having to reinvent its own dependency resolution engine all these years, we are increasingly seeing scalability challenges especially for projects with both multiple subprojects and large dependency graph. There are several factors involved in sbt's resolution scalability:

- Number of transitive nodes (libraries) in the graph
- Exclusion and override rules
- Number of subprojects
- Configurations
- Number of repositories and their availability
- Classifiers (additional sources and docs used by IDE)

Of the above factors, the one that has the most impact is the number of transitive nodes.

1. The more nodes there are, the chances of version conflict increases. Conflicts are resolved typically by picking the latest version within the same library.
2. The more nodes there are, the more it needs to backtrack to check for exlusion and override rules.



Exclusion and override rules are applied transitively, so any time a new node is introduced to the graph it needs to check its parent node's rules, its grandparent node's rules, great-grandparent node's rules, etc.

sbt treats configurations and subprojects to be independent dependency graph. This allows us to include arbitrary libraries for different configurations and subprojects, but if the dependency resolution is slow, the linear scaling starts to hurt. There have been prior efforts to cache the result of library dependencies, but it still resulted in full resolution when `libraryDependencies` has changed.

## Tasks and Commands

This part of the documentation has pages documenting particular sbt topics in detail. Before reading anything in here, you will need the information in the [Getting Started Guide](#) as a foundation.

### Tasks

Tasks and settings are introduced in the [getting started guide](#), which you may wish to read first. This page has additional details and background and is intended more as a reference.

#### Introduction

Both settings and tasks produce values, but there are two major differences between them:

1. Settings are evaluated at project load time. Tasks are executed on demand, often in response to a command from the user.
2. At the beginning of project loading, settings and their dependencies are fixed. Tasks can introduce new tasks during execution, however.

#### Features

There are several features of the task system:

1. By integrating with the settings system, tasks can be added, removed, and modified as easily and flexibly as settings.
2. [Input Tasks](#) use [parser combinators](#) to define the syntax for their arguments. This allows flexible syntax and tab-completions in the same way as [Commands](#).
3. Tasks produce values. Other tasks can access a task's value by calling `value` on it within a task definition.

4. Dynamically changing the structure of the task graph is possible. Tasks can be injected into the execution graph based on the result of another task.
5. There are ways to handle task failure, similar to `try/catch/finally`.
6. Each task has access to its own `Logger` that by default persists the logging for that task at a more verbose level than is initially printed to the screen.

These features are discussed in detail in the following sections.

## Defining a Task

**Hello World example (sbt)** `build.sbt`:

```
lazy val hello = taskKey[Unit]("Prints 'Hello World'")

hello := println("hello world!")
```

Run “sbt hello” from command line to invoke the task. Run “sbt tasks” to see this task listed.

**Define the key** To declare a new task, define a lazy val of type `TaskKey`:

```
lazy val sampleTask = taskKey[Int]("A sample task.")
```

The name of the `val` is used when referring to the task in Scala code and at the command line. The string passed to the `taskKey` method is a description of the task. The type parameter passed to `taskKey` (here, `Int`) is the type of value produced by the task.

We’ll define a couple of other keys for the examples:

```
lazy val intTask = taskKey[Int]("An int task")
lazy val stringTask = taskKey[String]("A string task")
```

The examples themselves are valid entries in a `build.sbt` or can be provided as part of a sequence to `Project.settings` (see [.scala build definition](#)).

**Implement the task** There are three main parts to implementing a task once its key is defined:

1. Determine the settings and other tasks needed by the task. They are the task’s inputs.
2. Define the code that implements the task in terms of these inputs.
3. Determine the scope the task will go in.

These parts are then combined just like the parts of a setting are combined.

**Defining a basic task** A task is defined using `:=`

```
intTask := 1 + 2

stringTask := System.getProperty("user.name")

sampleTask := {
    val sum = 1 + 2
    println("sum: " + sum)
    sum
}
```

As mentioned in the introduction, a task is evaluated on demand. Each time `sampleTask` is invoked, for example, it will print the sum. If the username changes between runs, `stringTask` will take different values in those separate runs. (Within a run, each task is evaluated at most once.) In contrast, settings are evaluated once on project load and are fixed until the next reload.

**Tasks with inputs** Tasks with other tasks or settings as inputs are also defined using `:=`. The values of the inputs are referenced by the `value` method. This method is special syntax and can only be called when defining a task, such as in the argument to `:=`. The following defines a task that adds one to the value produced by `intTask` and returns the result.

```
sampleTask := intTask.value + 1
```

Multiple settings are handled similarly:

```
stringTask := "Sample: " + sampleTask.value + ", int: " + intTask.value
```

**Task Scope** As with settings, tasks can be defined in a specific scope. For example, there are separate `compile` tasks for the `compile` and `test` scopes. The scope of a task is defined the same as for a setting. In the following example, `test:sampleTask` uses the result of `compile:intTask`.

```
sampleTask in Test := (intTask in Compile).value * 3
```

**On precedence** As a reminder, infix method precedence is by the name of the method and postfix methods have lower precedence than infix methods.

1. Assignment methods have the lowest precedence. These are methods with names ending in `=`, except for `!=`, `<=`, `>=`, and names that start with `=`.

2. Methods starting with a letter have the next highest precedence.
3. Methods with names that start with a symbol and aren't included in
  1. have the highest precedence. (This category is divided further according to the specific character it starts with. See the Scala specification for details.)

Therefore, the previous example is equivalent to the following:

```
(sampleTask in Test).:=( (intTask in Compile).value * 3 )
```

Additionally, the braces in the following are necessary:

```
helloTask := { "echo Hello" ! }
```

Without them, Scala interprets the line as `( helloTask.:=("echo Hello") ).!` instead of the desired `helloTask.:=( "echo Hello".! )`.

**Separating implementations** The implementation of a task can be separated from the binding. For example, a basic separate definition looks like:

```
// Define a new, standalone task implementation
lazy val intTaskImpl: Initialize[Task[Int]] =
  Def.task { sampleTask.value - 3 }

// Bind the implementation to a specific key
intTask := intTaskImpl.value
```

Note that whenever `.value` is used, it must be within a task definition, such as within `Def.task` above or as an argument to `:=`.

**Modifying an Existing Task** In the general case, modify a task by declaring the previous task as an input.

```
// initial definition
intTask := 3

// overriding definition that references the previous definition
intTask := intTask.value + 1
```

Completely override a task by not declaring the previous task as an input. Each of the definitions in the following example completely overrides the previous one. That is, when `intTask` is run, it will only print #3.

```

intTask := {
  println("#1")
  3
}

intTask := {
  println("#2")
  5
}

intTask := {
  println("#3")
  sampleTask.value - 3
}

```

## Getting values from multiple scopes

**Introduction** The general form of an expression that gets values from multiple scopes is:

```
<setting-or-task>.all(<scope-filter>).value
```

The `all` method is implicitly added to tasks and settings. It accepts a `ScopeFilter` that will select the `Scopes`. The result has type `Seq[T]`, where `T` is the key's underlying type.

**Example** A common scenario is getting the sources for all subprojects for processing all at once, such as passing them to `scaladoc`. The task that we want to obtain values for is `sources` and we want to get the values in all non-root projects and in the `Compile` configuration. This looks like:

```

lazy val core = project

lazy val util = project

lazy val root = project.settings(
  sources := {
    val filter = ScopeFilter( inProjects(core, util), inConfigurations(Compile) )
    // each sources definition is of type Seq[File],
    // giving us a Seq[Seq[File]] that we then flatten to Seq[File]
    val allSources: Seq[Seq[File]] = sources.all(filter).value
    allSources.flatten
  }
)

```

The next section describes various ways to construct a `ScopeFilter`.

**ScopeFilter** A basic `ScopeFilter` is constructed by the `ScopeFilter.apply` method. This method makes a `ScopeFilter` from filters on the parts of a `Scope`: a `ProjectFilter`, `ConfigurationFilter`, and `TaskFilter`. The simplest case is explicitly specifying the values for the parts:

```
val filter: ScopeFilter =  
  ScopeFilter(  
    inProjects( core, util ),  
    inConfigurations( Compile, Test )  
  )
```

**Unspecified filters** If the task filter is not specified, as in the example above, the default is to select scopes without a specific task (global). Similarly, an unspecified configuration filter will select scopes in the global configuration. The project filter should usually be explicit, but if left unspecified, the current project context will be used.

**More on filter construction** The example showed the basic methods `inProjects` and `inConfigurations`. This section describes all methods for constructing a `ProjectFilter`, `ConfigurationFilter`, or `TaskFilter`. These methods can be organized into four groups:

- Explicit member list (`inProjects`, `inConfigurations`, `inTasks`)
- Global value (`inGlobalProject`, `inGlobalConfiguration`, `inGlobalTask`)
- Default filter (`inAnyProject`, `inAnyConfiguration`, `inAnyTask`)
- Project relationships (`inAggregates`, `inDependencies`)

See the [API documentation](#) for details.

**Combining ScopeFilters** `ScopeFilters` may be combined with the `&&`, `||`, `--`, and `-` methods:

- `a && b` Selects scopes that match both a and b
- `a || b` Selects scopes that match either a or b
- `a -- b` Selects scopes that match a but not b
- `-b` Selects scopes that do not match b

For example, the following selects the scope for the `Compile` and `Test` configurations of the `core` project and the global configuration of the `util` project:

```
val filter: ScopeFilter =
  ScopeFilter( inProjects(core), inConfigurations(Compile, Test)) ||
  ScopeFilter( inProjects(util), inGlobalConfiguration )
```

**More operations** The `all` method applies to both settings (values of type `Initialize[T]`) and tasks (values of type `Initialize[Task[T]]`). It returns a setting or task that provides a `Seq[T]`, as shown in this table:

Target

Result

`Initialize[T]`

`Initialize[Seq[T]]`

`Initialize[Task[T]]`

`Initialize[Task[Seq[T]]]`

This means that the `all` method can be combined with methods that construct tasks and settings.

**Missing values** Some scopes might not define a setting or task. The `?` and `??` methods can help in this case. They are both defined on settings and tasks and indicate what to do when a key is undefined.

`?`

On a setting or task with underlying type `T`, this accepts no arguments and returns a setting or task (respectively) of type `Option[T]`. The result is `None` if the setting/task is undefined and `Some[T]` with the value if it is.

`??`

On a setting or task with underlying type `T`, this accepts an argument of type `T` and uses this argument if the setting/task is undefined.

The following contrived example sets the maximum errors to be the maximum of all aggregates of the current project.

```
maxErrors := {
  // select the transitive aggregates for this project, but not the project itself
  val filter: ScopeFilter =
    ScopeFilter( inAggregates(ThisProject, includeRoot=false) )
  // get the configured maximum errors in each selected scope,
  // using 0 if not defined in a scope
  val allVersions: Seq[Int] =
    (maxErrors ?? 0).all(filter).value
  allVersions.max
}
```

**Multiple values from multiple scopes** The target of `all` is any task or setting, including anonymous ones. This means it is possible to get multiple values at once without defining a new task or setting in each scope. A common use case is to pair each value obtained with the project, configuration, or full scope it came from.

- `resolvedScoped`: Provides the full enclosing `ScopedKey` (which is a `Scope + AttributeKey[_]`)
- `thisProject`: Provides the `Project` associated with this scope (undefined at the global and build levels)
- `thisProjectRef`: Provides the `ProjectRef` for the context (undefined at the global and build levels)
- `configuration`: Provides the `Configuration` for the context (undefined for the global configuration)

For example, the following defines a task that prints non-Compile configurations that define sbt plugins. This might be used to identify an incorrectly configured build (or not, since this is a fairly contrived example):

```
// Select all configurations in the current project except for Compile
lazy val filter: ScopeFilter = ScopeFilter(
  inProjects(ThisProject),
  inAnyConfiguration -- inConfigurations(Compile)
)

// Define a task that provides the name of the current configuration
// and the set of sbt plugins defined in the configuration
lazy val pluginsWithConfig: Initialize[Task[ (String, Set[String]) ]] =
  Def.task {
    ( configuration.value.name, definedSbtPlugins.value )
  }

checkPluginsTask := {
  val oddPlugins: Seq[(String, Set[String])] =
    pluginsWithConfig.all(filter).value
  // Print each configuration that defines sbt plugins
  for( (config, plugins) <- oddPlugins if plugins.nonEmpty )
    println(s"$config defines sbt plugins: ${plugins.mkString(", ")}" )
}
```

## Advanced Task Operations

The examples in this section use the task keys defined in the previous section.



**Streams: Per-task logging** Per-task loggers are part of a more general system for task-specific data called Streams. This allows controlling the verbosity of stack traces and logging individually for tasks as well as recalling the last logging for a task. Tasks also have access to their own persisted binary or text data.

To use Streams, get the value of the `streams` task. This is a special task that provides an instance of `TaskStreams` for the defining task. This type provides access to named binary and text streams, named loggers, and a default logger. The default `Logger`, which is the most commonly used aspect, is obtained by the `log` method:

```
myTask := {  
  val s: TaskStreams = streams.value  
  s.log.debug("Saying hi...")  
  s.log.info("Hello!")  
}
```

You can scope logging settings by the specific task's scope:

```
logLevel in myTask := Level.Debug  
  
traceLevel in myTask := 5
```

To obtain the last logging output from a task, use the `last` command:

```
$ last myTask  
[debug] Saying hi...  
[info] Hello!
```

The verbosity with which logging is persisted is controlled using the `persistLogLevel` and `persistTraceLevel` settings. The `last` command displays what was logged according to these levels. The levels do not affect already logged information.

## Dynamic Computations with `Def.taskDyn`

It can be useful to use the result of a task to determine the next tasks to evaluate. This is done using `Def.taskDyn`. The result of `taskDyn` is called a dynamic task because it introduces dependencies at runtime. The `taskDyn` method supports the same syntax as `Def.task` and `:=` except that you return a task instead of a plain value.

For example,

```

val dynamic = Def.taskDyn {
  // decide what to evaluate based on the value of `stringTask`
  if(stringTask.value == "dev")
    // create the dev-mode task: this is only evaluated if the
    // value of stringTask is "dev"
    Def.task {
      3
    }
  else
    // create the production task: only evaluated if the value
    // of the stringTask is not "dev"
    Def.task {
      intTask.value + 5
    }
}

myTask := {
  val num = dynamic.value
  println(s"Number selected was $num")
}

```

The only static dependency of `myTask` is `stringTask`. The dependency on `intTask` is only introduced in non-dev mode.

**Note:** A dynamic task cannot refer to itself or a circular dependency will result. In the example above, there would be a circular dependency if the code passed to `taskDyn` referenced `myTask`.

## Using `Def.sequential`

sbt 0.13.8 added `Def.sequential` function to run tasks under semi-sequential semantics. This is similar to the dynamic task, but easier to define. To demonstrate the sequential task, let's create a custom task called `compilecheck` that runs `compile` in `Compile` and then `scalastyle` in `Compile` task added by [scalastyle-sbt-plugin](#).

```

lazy val compilecheck = taskKey[Unit]("compile and then scalastyle")

lazy val root = (project in file("."))
  .settings(
    compilecheck in Compile := Def.sequential(
      compile in Compile,
      (scalastyle in Compile).toTask("")
    ).value
  )

```

To call this task type in `compilecheck` from the shell. If the compilation fails, `compilecheck` would stop the execution.

```
root> compilecheck
[info] Compiling 1 Scala source to /Users/x/proj/target/scala-2.10/classes...
[error] /Users/x/proj/src/main/scala/Foo.scala:3: Unmatched closing brace '}' ignored here
[error] }
[error] ^
[error] one error found
[error] (compile:compileIncremental) Compilation failed
```

## Handling Failure

This section discusses the `failure`, `result`, and `andFinally` methods, which are used to handle failure of other tasks.

**failure** The `failure` method creates a new task that returns the `Incomplete` value when the original task fails to complete normally. If the original task succeeds, the new task fails. `Incomplete` is an exception with information about any tasks that caused the failure and any underlying exceptions thrown during task execution.

For example:

```
intTask := error("Failed.")

intTask := {
  println("Ignoring failure: " + intTask.failure.value)
  3
}
```

This overrides the `intTask` so that the original exception is printed and the constant `3` is returned.

`failure` does not prevent other tasks that depend on the target from failing. Consider the following example:

```
intTask := if(shouldSucceed) 5 else error("Failed.")

// Return 3 if intTask fails. If intTask succeeds, this task will fail.
aTask := intTask.failure.value - 2

// A new task that increments the result of intTask.
bTask := intTask.value + 1

cTask := aTask.value + bTask.value
```

The following table lists the results of each task depending on the initially invoked task:

invoked task

intTask result

aTask result

bTask result

cTask result

overall result

intTask

failure

not run

not run

not run

failure

aTask

failure

success

not run

not run

success

bTask

failure

not run

failure

not run

failure

cTask

failure

success

failure

failure

failure  
intTask  
success  
not run  
not run  
not run  
success  
aTask  
success  
failure  
not run  
not run  
failure  
bTask  
success  
not run  
success  
not run  
success  
cTask  
success  
failure  
success  
failure  
failure

The overall result is always the same as the root task (the directly invoked task). A **failure** turns a success into a failure, and a failure into an **Incomplete**. A normal task definition fails when any of its inputs fail and computes its value otherwise.

**result** The `result` method creates a new task that returns the full `Result[T]` value for the original task. `Result` has the same structure as `Either[Incomplete, T]` for a task result of type `T`. That is, it has two subtypes:

- `Inc`, which wraps `Incomplete` in case of failure
- `Value`, which wraps a task's result in case of success.

Thus, the task created by `result` executes whether or not the original task succeeds or fails.

For example:

```
intTask := error("Failed.")

intTask := intTask.result.value match {
  case Inc(inc: Incomplete) =>
    println("Ignoring failure: " + inc)
    3
  case Value(v) =>
    println("Using successful result: " + v)
    v
}
```

This overrides the original `intTask` definition so that if the original task fails, the exception is printed and the constant `3` is returned. If it succeeds, the value is printed and returned.

**andFinally** The `andFinally` method defines a new task that runs the original task and evaluates a side effect regardless of whether the original task succeeded. The result of the task is the result of the original task. For example:

```
intTask := error("I didn't succeed.")

lazy val intTaskImpl = intTask andFinally { println("andFinally") }

intTask := intTaskImpl.value
```

This modifies the original `intTask` to always print “andFinally” even if the task fails.

Note that `andFinally` constructs a new task. This means that the new task has to be invoked in order for the extra block to run. This is important when calling `andFinally` on another task instead of overriding a task like in the previous example. For example, consider this code:

```
intTask := error("I didn't succeed.")

lazy val intTaskImpl = intTask andFinally { println("andFinally") }

otherIntTask := intTaskImpl.value
```

If `intTask` is run directly, `otherIntTask` is never involved in execution. This case is similar to the following plain Scala code:

```
def intTask(): Int =
  error("I didn't succeed.")

def otherIntTask(): Int =
  try { intTask() }
  finally { println("finally") }

intTask()
```

It is obvious here that calling `intTask()` will never result in “finally” being printed.

## Input Tasks

Input Tasks parse user input and produce a task to run. [Parsing Input](#) describes how to use the parser combinators that define the input syntax and tab completion. This page describes how to hook those parser combinators into the input task system.

### Input Keys

A key for an input task is of type `InputKey` and represents the input task like a `SettingKey` represents a setting or a `TaskKey` represents a task. Define a new input task key using the `inputKey.apply` factory method:

```
// goes in project/Build.scala or in build.sbt
val demo = inputKey[Unit]("A demo input task.")
```

The definition of an input task is similar to that of a normal task, but it can also use the result of a

[Parser](#) applied to user input. Just as the special `value` method gets the value of a setting or task, the special `parsed` method gets the result of a `Parser`.

## Basic Input Task Definition

The simplest input task accepts a space-delimited sequence of arguments. It does not provide useful tab completion and parsing is basic. The built-in parser for space-delimited arguments is constructed via the `spaceDelimited` method, which accepts as its only argument the label to present to the user during tab completion.

For example, the following task prints the current Scala version and then echoes the arguments passed to it on their own line.

```
import complete.DefaultParsers._

demo := {
  // get the result of parsing
  val args: Seq[String] = spaceDelimited("<arg>").parsed
  // Here, we also use the value of the `scalaVersion` setting
  println("The current Scala version is " + scalaVersion.value)
  println("The arguments to demo were:")
  args foreach println
}
```

## Input Task using Parsers

The Parser provided by the `spaceDelimited` method does not provide any flexibility in defining the input syntax. Using a custom parser is just a matter of defining your own `Parser` as described on the [Parsing Input](#) page.

**Constructing the Parser** The first step is to construct the actual `Parser` by defining a value of one of the following types:

- `Parser[I]`: a basic parser that does not use any settings
- `Initialize[Parser[I]]`: a parser whose definition depends on one or more settings
- `Initialize[State => Parser[I]]`: a parser that is defined using both settings and the current [state](#)

We already saw an example of the first case with `spaceDelimited`, which doesn't use any settings in its definition. As an example of the third case, the following defines a contrived `Parser` that uses the project's Scala and sbt version settings as well as the state. To use these settings, we need to wrap the `Parser` construction in `Def.setting` and get the setting values with the special `value` method:



```
import complete.DefaultParsers._

val parser: Initialize[State => Parser[(String,String)]] =
Def.setting {
  (state: State) =>
    ( token("scala" <~ Space) ~ token(scalaVersion.value) ) |
    ( token("sbt" <~ Space) ~ token(sbtVersion.value) ) |
    ( token("commands" <~ Space) ~
      token(state.remainingCommands.size.toString) )
}
```

This Parser definition will produce a value of type `(String,String)`. The input syntax defined isn't very flexible; it is just a demonstration. It will produce one of the following values for a successful parse (assuming the current Scala version is 2.12.2, the current sbt version is 1.0.0-RC2, and there are 3 commands left to run):

Again, we were able to access the current Scala and sbt version for the project because they are settings. Tasks cannot be used to define the parser.

**Constructing the Task** Next, we construct the actual task to execute from the result of the `Parser`. For this, we define a task as usual, but we can access the result of parsing via the special `parsed` method on `Parser`.

The following contrived example uses the previous example's output (of type `(String,String)`) and the result of the `package` task to print some information to the screen.

```
demo := {
  val (tpe, value) = parser.parsed
  println("Type: " + tpe)
  println("Value: " + value)
  println("Packaged: " + packageBin.value.getAbsolutePath)
}
```

### The InputTask type

It helps to look at the `InputTask` type to understand more advanced usage of input tasks. The core input task type is:

```
class InputTask[T](val parser: State => Parser[Task[T]])
```

Normally, an input task is assigned to a setting and you work with `Initialize[InputTask[T]]`.

Breaking this down,

1. You can use other settings (via `Initialize`) to construct an input task.
2. You can use the current `State` to construct the parser.
3. The parser accepts user input and provides tab completion.
4. The parser produces the task to run.

So, you can use settings or `State` to construct the parser that defines an input task's command line syntax. This was described in the previous section. You can then use settings, `State`, or user input to construct the task to run. This is implicit in the input task syntax.

### Using other input tasks

The types involved in an input task are composable, so it is possible to reuse input tasks. The `.parsed` and `.evaluated` methods are defined on `InputTasks` to make this more convenient in common situations:

- Call `.parsed` on an `InputTask[T]` or `Initialize[InputTask[T]]` to get the `Task[T]` created after parsing the command line
- Call `.evaluated` on an `InputTask[T]` or `Initialize[InputTask[T]]` to get the value of type `T` from evaluating that task

In both situations, the underlying `Parser` is sequenced with other parsers in the input task definition. In the case of `.evaluated`, the generated task is evaluated.

The following example applies the `run` input task, a literal separator parser `--`, and `run` again. The parsers are sequenced in order of syntactic appearance, so that the arguments before `--` are passed to the first `run` and the ones after are passed to the second.

```
val run2 = inputKey[Unit](
  "Runs the main class twice with different argument lists separated by --")

val separator: Parser[String] = "--"

run2 := {
  val one = (run in Compile).evaluated
  val sep = separator.parsed
  val two = (run in Compile).evaluated
}
```

For a main class `Demo` that echoes its arguments, this looks like:

```

$ sbt
> run2 a b -- c d
[info] Running Demo c d
[info] Running Demo a b
c
d
a
b

```

## Preapplying input

Because `InputTasks` are built from `Parsers`, it is possible to generate a new `InputTask` by applying some input programmatically. (It is also possible to generate a `Task`, which is covered in the next section.) Two convenience methods are provided on `InputTask[T]` and `Initialize[InputTask[T]]` that accept the `String` to apply.

- `partialInput` applies the input and allows further input, such as from the command line
- `fullInput` applies the input and terminates parsing, so that further input is not accepted

In each case, the input is applied to the input task's parser. Because input tasks handle all input after the task name, they usually require initial whitespace to be provided in the input.

Consider the example in the previous section. We can modify it so that we:

- Explicitly specify all of the arguments to the first `run`. We use `name` and `version` to show that settings can be used to define and modify parsers.
- Define the initial arguments passed to the second `run`, but allow further input on the command line.

**Note:** the current implementation of `:=` doesn't actually support applying input derived from settings yet.

```

lazy val run2 = inputKey[Unit]("Runs the main class twice: " +
  "once with the project name and version as arguments"
  "and once with command line arguments preceded by hard coded values.")

// The argument string for the first run task is ' <name> <version>'
lazy val firstInput: Initialize[String] =
  Def.setting(s" ${name.value} ${version.value}")

```

```

// Make the first arguments to the second run task ' red blue'
lazy val secondInput: String = " red blue"

run2 := {
    val one = (run in Compile).fullInput(firstInput.value).evaluated
    val two = (run in Compile).partialInput(secondInput).evaluated
}

```

For a main class Demo that echoes its arguments, this looks like:

```

$ sbt
> run2 green
[info] Running Demo demo 1.0
[info] Running Demo red blue green
demo
1.0
red
blue
green

```

### Get a Task from an InputTask

The previous section showed how to derive a new `InputTask` by applying input. In this section, applying input produces a `Task`. The `toTask` method on `Initialize[InputTask[T]]` accepts the `String` input to apply and produces a task that can be used normally. For example, the following defines a plain task `runFixed` that can be used by other tasks or run directly without providing any input:

```

lazy val runFixed = taskKey[Unit]("A task that hard codes the values to `run`")

runFixed := {
    val _ = (run in Compile).toTask(" blue green").value
    println("Done!")
}

```

For a main class Demo that echoes its arguments, running `runFixed` looks like:

```

$ sbt
> runFixed
[info] Running Demo blue green
blue
green
Done!

```

Each call to `toTask` generates a new task, but each task is configured the same as the original `InputTask` (in this case, `run`) but with different input applied. For example:

```
lazy val runFixed2 = taskKey[Unit]("A task that hard codes the values to `run`")

fork in run := true

runFixed2 := {
  val x = (run in Compile).toTask(" blue green").value
  val y = (run in Compile).toTask(" red orange").value
  println("Done!")
}
```

The different `toTask` calls define different tasks that each run the project's main class in a new jvm. That is, the `fork` setting configures both, each has the same classpath, and each run the same main class. However, each task passes different arguments to the main class. For a main class `Demo` that echoes its arguments, the output of running `runFixed2` might look like:

```
$ sbt
> runFixed2
[info] Running Demo blue green
[info] Running Demo red orange
blue
green
red
orange
Done!
```

## Commands

### What is a “command”?

A “command” looks similar to a task: it's a named operation that can be executed from the sbt console.

However, a command's implementation takes as its parameter the entire state of the build (represented by [State](#)) and computes a new [State](#). This means that a command can look at or modify other sbt settings, for example. Typically, you would resort to a command when you need to do something that's impossible in a regular task.

## Introduction

There are three main aspects to commands:

1. The syntax used by the user to invoke the command, including:
  - Tab completion for the syntax
  - The parser to turn input into an appropriate data structure
2. The action to perform using the parsed data structure. This action transforms the build [State](#).
3. Help provided to the user

In sbt, the syntax part, including tab completion, is specified with parser combinators. If you are familiar with the parser combinators in Scala's standard library, these are very similar. The action part is a function `(State, T) => State`, where `T` is the data structure produced by the parser. See the [Parsing Input](#) page for how to use the parser combinators.

[State](#) provides access to the build state, such as all registered `Commands`, the remaining commands to execute, and all project-related information. See [States and Actions](#) for details on State.

Finally, basic help information may be provided that is used by the `help` command to display command help.

## Defining a Command

A command combines a function `State => Parser[T]` with an action `(State, T) => State`. The reason for `State => Parser[T]` and not simply `Parser[T]` is that often the current `State` is used to build the parser. For example, the currently loaded projects (provided by `State`) determine valid completions for the `project` command. Examples for the general and specific cases are shown in the following sections.

See [Command.scala](#) for the source API details for constructing commands.

**General commands** General command construction looks like:

```
val action: (State, T) => State = ...
val parser: State => Parser[T] = ...
val command: Command = Command("name")(parser)(action)
```

**No-argument commands** There is a convenience method for constructing commands that do not accept any arguments.

```
val action: State => State = ...
val command: Command = Command.command("name")(action)
```

**Single-argument command** There is a convenience method for constructing commands that accept a single argument with arbitrary content.

```
// accepts the state and the single argument
val action: (State, String) => State = ...
val command: Command = Command.single("name")(action)
```

**Multi-argument command** There is a convenience method for constructing commands that accept multiple arguments separated by spaces.

```
val action: (State, Seq[String]) => State = ...

// <arg> is the suggestion printed for tab completion on an argument
val command: Command = Command.args("name", "<arg>")(action)
```

## Full Example

The following example is a sample build that adds commands to a project. To try it out:

1. Create `build.sbt` and `project/CommandExample.scala`.
2. Run `sbt` on the project.
3. Try out the `hello`, `helloAll`, `failIfTrue`, `color`, and `printState` commands.
4. Use tab-completion and the code below as guidance.

Here's `build.sbt`:

```
import CommandExample._

lazy val commonSettings = Seq(
  scalaVersion := "2.12.2",
)

lazy val root = (project in file("."))
  .settings(
    commonSettings,
    commands += Seq(hello, helloAll, failIfTrue, changeColor, printState)
  )
```

Here's `project/CommandExample.scala`:

```

import sbt._
import Keys._

// imports standard command parsing functionality
import complete.DefaultParsers._

object CommandExample {
  // A simple, no-argument command that prints "Hi",
  // leaving the current state unchanged.
  def hello = Command.command("hello") { state =>
    println("Hi!")
    state
  }

  // A simple, multiple-argument command that prints "Hi" followed by the arguments.
  // Again, it leaves the current state unchanged.
  def helloAll = Command.args("helloAll", "<name>") { (state, args) =>
    println("Hi " + args.mkString(" "))
    state
  }

  // A command that demonstrates failing or succeeding based on the input
  def failIfTrue = Command.single("failIfTrue") {
    case (state, "true") => state.fail
    case (state, _) => state
  }

  // Demonstration of a custom parser.
  // The command changes the foreground or background terminal color
  // according to the input.
  lazy val change = Space ~> (reset | setColor)
  lazy val reset = token("reset" ^^^ "\033[0m")
  lazy val color = token( Space ~> ("blue" ^^^ "4" | "green" ^^^ "2") )
  lazy val select = token( "fg" ^^^ "3" | "bg" ^^^ "4" )
  lazy val setColor = (select ~ color) map { case (g, c) => "\033[" + g + c + "m" }

  def changeColor = Command("color")(_ => change) { (state, ansicode) =>
    print(ansicode)
    state
  }

  // A command that demonstrates getting information out of State.
  def printState = Command.command("printState") { state =>
    import state._
    println(definedCommands.size + " registered commands")
    println("commands to run: " + show(remainingCommands))
  }

```



```

println()

println("original arguments: " + show(configuration.arguments))
println("base directory: " + configuration.baseDirectory)
println()

println("sbt version: " + configuration.provider.id.version)
println("Scala version (for sbt): " + configuration.provider.scalaProvider.version)
println()

val extracted = Project.extract(state)
import extracted._
println("Current build: " + currentRef.build)
println("Current project: " + currentRef.project)
println("Original setting count: " + session.original.size)
println("Session setting count: " + session.append.size)

state
}

def show[T](s: Seq[T]) =
  s.map("'" + _ + "'").mkString("[", ", ", "]")
}

```

## Parsing and tab completion

This page describes the parser combinators in sbt. These parser combinators are typically used to parse user input and provide tab completion for [Input Tasks](#) and [Commands](#). If you are already familiar with Scala's parser combinators, the methods are mostly the same except that their arguments are strict. There are two additional methods for controlling tab completion that are discussed at the end of the section.

Parser combinators build up a parser from smaller parsers. A `Parser[T]` in its most basic usage is a function `String => Option[T]`. It accepts a `String` to parse and produces a value wrapped in `Some` if parsing succeeds or `None` if it fails. Error handling and tab completion make this picture more complicated, but we'll stick with `Option` for this discussion.

The following examples assume the imports: :

```

import sbt._
import complete.DefaultParsers._

```

## Basic parsers

The simplest parser combinators match exact inputs:

```
// A parser that succeeds if the input is 'x', returning the Char 'x'
// and failing otherwise
val singleChar: Parser[Char] = 'x'

// A parser that succeeds if the input is "blue", returning the String "blue"
// and failing otherwise
val litString: Parser[String] = "blue"
```

In these examples, implicit conversions produce a literal `Parser` from a `Char` or `String`. Other basic parser constructors are the `charClass`, `success` and `failure` methods:

```
// A parser that succeeds if the character is a digit, returning the matched Char
// The second argument, "digit", describes the parser and is used in error messages
val digit: Parser[Char] = charClass( (c: Char) => c.isDigit, "digit")

// A parser that produces the value 3 for an empty input string, fails otherwise
val alwaysSucceed: Parser[Int] = success( 3 )

// Represents failure (always returns None for an input String).
// The argument is the error message.
val alwaysFail: Parser[Nothing] = failure("Invalid input.")
```

## Built-in parsers

sbt comes with several built-in parsers defined in [sbt.complete.DefaultParsers](#). Some commonly used built-in parsers are:

- `Space`, `NotSpace`, `OptSpace`, and `OptNotSpace` for parsing spaces or non-spaces, required or not.
- `StringBasic` for parsing text that may be quoted.
- `IntBasic` for parsing a signed `Int` value.
- `Digit` and `HexDigit` for parsing a single decimal or hexadecimal digit.
- `Bool` for parsing a `Boolean` value

See the [DefaultParsers API](#) for details.

## Combining parsers

We build on these basic parsers to construct more interesting parsers. We can combine parsers in a sequence, choose between parsers, or repeat a parser.

```
// A parser that succeeds if the input is "blue" or "green",
// returning the matched input
val color: Parser[String] = "blue" | "green"

// A parser that matches either "fg" or "bg"
val select: Parser[String] = "fg" | "bg"

// A parser that matches "fg" or "bg", a space, and then the color, returning the matched value
// ~ is an alias for Tuple2.
val setColor: Parser[String ~ Char ~ String] =
  select ~ ' ' ~ color

// Often, we don't care about the value matched by a parser, such as the space above
// For this, we can use ~> or <~, which keep the result of
// the parser on the right or left, respectively
val setColor2: Parser[String ~ String] = select ~ (' ' ~> color)

// Match one or more digits, returning a list of the matched characters
val digits: Parser[Seq[Char]] = charClass(_.isDigit, "digit").+

// Match zero or more digits, returning a list of the matched characters
val digits0: Parser[Seq[Char]] = charClass(_.isDigit, "digit").*

// Optionally match a digit
val optDigit: Parser[Option[Char]] = charClass(_.isDigit, "digit").?
```

## Transforming results

A key aspect of parser combinators is transforming results along the way into more useful data structures. The fundamental methods for this are `map` and `flatMap`. Here are examples of `map` and some convenience methods implemented on top of `map`.

```
// Apply the `digits` parser and apply the provided function to the matched
// character sequence
val num: Parser[Int] = digits map { (chars: Seq[Char]) => chars.mkString.toInt }

// Match a digit character, returning the matched character or return '0' if the input is not a digit
val digitWithDefault: Parser[Char] = charClass(_.isDigit, "digit") ?? '0'
```

```

// The previous example is equivalent to:
val digitDefault: Parser[Char] =
  charClass(_.isDigit, "digit").? map { (d: Option[Char]) => d.getOrElse '0' }

// Succeed if the input is "blue" and return the value 4
val blue = "blue" ^^ 4

// The above is equivalent to:
val blueM = "blue" map { (s: String) => 4 }

```

## Controlling tab completion

Most parsers have reasonable default tab completion behavior. For example, the string and character literal parsers will suggest the underlying literal for an empty input string. However, it is impractical to determine the valid completions for `charClass`, since it accepts an arbitrary predicate. The `examples` method defines explicit completions for such a parser:

```
val digit = charClass(_.isDigit, "digit").examples("0", "1", "2")
```

Tab completion will use the examples as suggestions. The other method controlling tab completion is `token`. The main purpose of `token` is to determine the boundaries for suggestions. For example, if your parser is:

```
("fg" | "bg") ~ ' ' ~ ("green" | "blue")
```

then the potential completions on empty input are: `console fg green fg blue`  
`bg green bg blue`

Typically, you want to suggest smaller segments or the number of suggestions becomes unmanageable. A better parser is:

```
token( ("fg" | "bg") ~ ' ' ) ~ token("green" | "blue")
```

Now, the initial suggestions would be (with `_` representing a space): `console fg_ bg_`

Be careful not to overlap or nest tokens, as in `token("green" ~ token("blue"))`. The behavior is unspecified (and should generate an error in the future), but typically the outer most token definition will be used.

## Dependent parsers

Sometimes a parser must analyze some data and then more data needs to be parsed, and it is dependent on the previous one.

The key for obtaining this behaviour is to use the `flatMap` function.

As an example, it will shown how to select several items from a list of valid ones with completion, but no duplicates are possible. A space is used to separate the different items.

```
def select1(items: Iterable[String]) =
  token(Space ~> StringBasic.examples(FixedSetExamples(items)))

def selectSome(items: Seq[String]): Parser[Seq[String]] = {
  select1(items).flatMap { v
    val remaining = items filter { _ != v }
    if (remaining.size == 0)
      success(v :: Nil)
    else
      selectSome(remaining).?.map(v +: _.getOrElse(Seq()))
  }
```

As you can see, the `flatMap` function provides the previous value. With this info, a new parser is constructed for the remaining items. The `map` combinator is also used in order to transform the output of the parser.

The parser is called recursively, until it is found the trivial case of no possible choices.

## State and actions

`State` is the entry point to all available information in sbt. The key methods are:

- `definedCommands: Seq[Command]` returns all registered Command definitions
- `remainingCommands: Seq[String]` returns the remaining commands to be run
- `attributes: AttributeMap` contains generic data.

The action part of a command performs work and transforms `State`. The following sections discuss `State => State` transformations. As mentioned previously, a command will typically handle a parsed value as well: `(State, T) => State`.

## Command-related data

A Command can modify the currently registered commands or the commands to be executed. This is done in the action part by transforming the (immutable) State provided to the command. A function that registers additional power commands might look like:

```
val powerCommands: Seq[Command] = ...

val addPower: State => State =
  (state: State) =>
    state.copy(definedCommands =
      (state.definedCommands ++ powerCommands).distinct
    )
```

This takes the current commands, appends new commands, and drops duplicates. Alternatively, State has a convenience method for doing the above:

```
val addPower2 = (state: State) => state ++ powerCommands
```

Some examples of functions that modify the remaining commands to execute:

```
val appendCommand: State => State =
  (state: State) =>
    state.copy(remainingCommands = state.remainingCommands :+ "cleanup")

val insertCommand: State => State =
  (state: State) =>
    state.copy(remainingCommands = "next-command" +: state.remainingCommands)
```

The first adds a command that will run after all currently specified commands run. The second inserts a command that will run next. The remaining commands will run after the inserted command completes.

To indicate that a command has failed and execution should not continue, return `state.fail`.

```
(state: State) => {
  val success: Boolean = ...
  if(success) state else state.fail
}
```

## Project-related data

Project-related information is stored in `attributes`. Typically, commands won't access this directly but will instead use a convenience method to extract the most useful information:

```
val state: State
val extracted: Extracted = Project.extract(state)
import extracted._
```

`Extracted` provides:

- Access to the current build and project (`currentRef`)
- Access to initialized project setting data (`structure.data`)
- Access to session `Settings` and the original, permanent settings from `.sbt` and `.scala` files (`session.append` and `session.original`, respectively)
- Access to the current `Eval` instance for evaluating Scala expressions in the build context.

## Project data

All project data is stored in `structure.data`, which is of type `sbt.Settings[Scope]`. Typically, one gets information of type `T` in the following way:

```
val key: SettingKey[T]
val scope: Scope
val value: Option[T] = key in scope get structure.data
```

Here, a `SettingKey[T]` is typically obtained from `Keys` and is the same type that is used to define settings in `.sbt` files, for example. `Scope` selects the scope the key is obtained for. There are convenience overloads of `in` that can be used to specify only the required scope axes. See `Structure.scala` for where `in` and other parts of the settings interface are defined. Some examples:

```
import Keys._
val extracted: Extracted
import extracted._
```

```
// get name of current project
```

```
val nameOpt: Option[String] = name in currentRef get structure.data
```

```
// get the package options for the `test:packageSrc` task or Nil if none are defined
```

```
val pkgOpts: Seq[PackageOption] = packageOptions in (currentRef, Test, packageSrc) get structure.data
```

[BuildStructure](#) contains information about build and project relationships. Key members are:

```
units: Map[URI, LoadedBuildUnit]
root: URI
```

A URI identifies a build and `root` identifies the initial build loaded. [LoadedBuildUnit](#) provides information about a single build. The key members of `LoadedBuildUnit` are:

```
// Defines the base directory for the build
localBase: File

// maps the project ID to the Project definition
defined: Map[String, ResolvedProject]
```

[ResolvedProject](#) has the same information as the `Project` used in a `project/Build.scala` except that [ProjectReferences](#) are resolved to `ProjectRefs`.

## Classpaths

Classpaths in sbt 0.10+ are of type `Seq[Attributed[File]]`. This allows tagging arbitrary information to classpath entries. sbt currently uses this to associate an `Analysis` with an entry. This is how it manages the information needed for multi-project incremental recompilation. It also associates the `ModuleID` and `Artifact` with managed entries (those obtained by dependency management). When you only want the underlying `Seq[File]`, use `files`:

```
val attributedClasspath: Seq[Attributed[File]] = ...
val classpath: Seq[File] = attributedClasspath.files
```

## Running tasks

It can be useful to run a specific project task from a [command](#) (*not from another task*) and get its result. For example, an IDE-related command might want to get the classpath from a project or a task might analyze the results of a compilation. The relevant method is `Project.runTask`, which has the following signature:

```
def runTask[T](taskKey: ScopedKey[Task[T]], state: State,
  checkCycles: Boolean = false): Option[(State, Result[T])]
```

For example,



```

val eval: State => State = (state: State) => {

    // This selects the main 'compile' task for the current project.
    // The value produced by 'compile' is of type inc.Analysis,
    // which contains information about the compiled code.
    val taskKey = Keys.compile in Compile

    // Evaluate the task
    // None if the key is not defined
    // Some(Inc) if the task does not complete successfully (Inc for incomplete)
    // Some(Value(v)) with the resulting value
    val result: Option[(State, Result[inc.Analysis])] = Project.runTask(taskKey, state)
    // handle the result
    result match
    {
        case None => // Key wasn't defined.
        case Some((newState, Inc(inc))) => // error detail, inc is of type Incomplete, use .
        case Some((newState, Value(v))) => // do something with v: inc.Analysis
    }
}

```

For getting the test classpath of a specific project, use this key:

```

val projectRef: ProjectRef = ...
val taskKey: Task[Seq[Attributed[File]]] =
    Keys.fullClasspath in (projectRef, Test)

```

## Using State in a task

To access the current State from a task, use the `state` task as an input. For example,

```
myTask := ... state.value ...
```

## Tasks/Settings: Motivation

This page motivates the task and settings system. You should already know how to use tasks and settings, which are described in the [getting started guide](#) and on the [Tasks](#) page.

An important aspect of the task system is to combine two common, related steps in a build:

1. Ensure some other task is performed.

2. Use some result from that task.

Earlier versions of sbt configured these steps separately using

1. Dependency declarations
2. Some form of shared state

To see why it is advantageous to combine them, compare the situation to that of deferring initialization of a variable in Scala. This Scala code is a bad way to expose a value whose initialization is deferred:

```
// Define a variable that will be initialized at some point  
// We don't want to do it right away, because it might be expensive  
var foo: Foo = _  
  
// Define a function to initialize the variable  
def makeFoo(): Unit = ... initialize foo ...
```

Typical usage would be:

```
makeFoo()  
doSomething(foo)
```

This example is rather exaggerated in its badness, but I claim it is nearly the same situation as our two step task definitions. Particular reasons this is bad include:

1. A client needs to know to call `makeFoo()` first.
2. `foo` could be changed by other code. There could be a `def makeFoo2()`, for example.
3. Access to `foo` is not thread safe.

The first point is like declaring a task dependency, the second is like two tasks modifying the same state (either project variables or files), and the third is a consequence of unsynchronized, shared state.

In Scala, we have the built-in functionality to easily fix this: `lazy val`.

```
lazy val foo: Foo = ... initialize foo ...
```

with the example usage:

```
doSomething(foo)
```

Here, `lazy val` gives us thread safety, guaranteed initialization before access, and immutability all in one, DRY construct. The task system in sbt does the same thing for tasks (and more, but we won't go into that here) that `lazy val` did for our bad example.

A task definition must declare its inputs and the type of its output. sbt will ensure that the input tasks have run and will then provide their results to the function that implements the task, which will generate its own result. Other tasks can use this result and be assured that the task has run (once) and be thread-safe and typesafe in the process.

The general form of a task definition looks like:

```
myTask := {  
  val a: A = aTask.value  
  val b: B = bTask.value  
  ... do something with a, b and generate a result ...  
}
```

(This is only intended to be a discussion of the ideas behind tasks, so see the [sbt Tasks](#) page for details on usage.) Here, `aTask` is assumed to produce a result of type A and `bTask` is assumed to produce a result of type B.

## Application

As an example, consider generating a zip file containing the binary jar, source jar, and documentation jar for your project. First, determine what tasks produce the jars. In this case, the input tasks are `packageBin`, `packageSrc`, and `packageDoc` in the main `Compile` scope. The result of each of these tasks is the `File` for the jar that they generated. Our zip file task is defined by mapping these package tasks and including their outputs in a zip file. As good practice, we then return the `File` for this zip so that other tasks can map on the zip task.

```
zip := {  
  val bin: File = (packageBin in Compile).value  
  val src: File = (packageSrc in Compile).value  
  val doc: File = (packageDoc in Compile).value  
  val out: File = zipPath.value  
  val inputs: Seq[(File,String)] = Seq(bin, src, doc) x Path.flat  
  IO.zip(inputs, out)  
  out  
}
```

The `val inputs` line defines how the input files are mapped to paths in the zip. See [Mapping Files](#) for details. The explicit types are not required, but are included for clarity.

The `zipPath` input would be a custom task to define the location of the zip file. For example:

```
zipPath := target.value / "out.zip"
```

## Plugins and Best Practices

This part of the documentation has pages documenting particular sbt topics in detail. Before reading anything in here, you will need the information in the [Getting Started Guide](#) as a foundation.

### General Best Practices

This page describes best practices for working with sbt.

#### `project/` vs. `~/.sbt/`

Anything that is necessary for building the project should go in `project/`. This includes things like the web plugin. `~/.sbt/` should contain local customizations and commands for working with a build, but are not necessary. An example is an IDE plugin.

#### Local settings

There are two options for settings that are specific to a user. An example of such a setting is inserting the local Maven repository at the beginning of the resolvers list:

```
resolvers := {  
  val localMaven = "Local Maven Repository" at "file://" + Path.userHome.absolutePath + "/.m2/repository"  
  localMaven +: resolvers.value  
}
```

1. Put settings specific to a user in a global `.sbt` file, such as `~/.sbt/1.0/global.sbt`. These settings will be applied to all projects.
2. Put settings in a `.sbt` file in a project that isn't checked into version control, such as `<project>/local.sbt`. sbt combines the settings from multiple `.sbt` files, so you can still have the standard `<project>/build.sbt` and check that into version control.

## **.sbtrc**

Put commands to be executed when sbt starts up in a **.sbtrc** file, one per line. These commands run before a project is loaded and are useful for defining aliases, for example. sbt executes commands in `$HOME/.sbtrc` (if it exists) and then `<project>/.sbtrc` (if it exists).

## **Generated files**

Write any generated files to a subdirectory of the output directory, which is specified by the **target** setting. This makes it easy to clean up after a build and provides a single location to organize generated files. Any generated files that are specific to a Scala version should go in **crossTarget** for efficient cross-building.

For generating sources and resources, see [Generating Files](#).

## **Don't hard code**

Don't hard code constants, like the output directory **target/**. This is especially important for plugins. A user might change the **target** setting to point to **build/**, for example, and the plugin needs to respect that. Instead, use the setting, like:

```
myDirectory := target.value / "sub-directory"
```

## **Don't “mutate” files**

A build naturally consists of a lot of file manipulation. How can we reconcile this with the task system, which otherwise helps us avoid mutable state? One approach, which is the recommended approach and the approach used by sbt's default tasks, is to only write to any given file once and only from a single task.

A build product (or by-product) should be written exactly once by only one task. The task should then, at a minimum, provide the File created as its result. Another task that wants to use Files should map the task, simultaneously obtaining the File reference and ensuring that the task has run (and thus the file is constructed). Obviously you cannot do much about the user or other processes modifying the files, but you can make the I/O that is under the build's control more predictable by treating file contents as immutable at the level of Tasks.

For example:

```
lazy val makeFile = taskKey[File]("Creates a file with some content.")
```

```

// define a task that creates a file,
// writes some content, and returns the File
makeFile := {
    val f: File = file("/tmp/data.txt")
    IO.write(f, "Some content")
    f
}

// The result of makeFile is the constructed File,
// so useFile can map makeFile and simultaneously
// get the File and declare the dependency on makeFile
useFile :=
    doSomething( makeFile.value )

```

This arrangement is not always possible, but it should be the rule and not the exception.

### Use absolute paths

Construct only absolute Files. Either specify an absolute path

```
file("/home/user/A.scala")
```

or construct the file from an absolute base:

```
base / "A.scala"
```

This is related to the no hard coding best practice because the proper way involves referencing the `baseDirectory` setting. For example, the following defines the `myPath` setting to be the `<base>/licenses/` directory.

```
myPath := baseDirectory.value / "licenses"
```

In Java (and thus in Scala), a relative File is relative to the current working directory. The working directory is not always the same as the build root directory for a number of reasons.

The only exception to this rule is when specifying the base directory for a Project. Here, sbt will resolve a relative File against the build root directory for you for convenience.

## Parser combinators

1. Use `token` everywhere to clearly delimit tab completion boundaries.
2. Don't overlap or nest tokens. The behavior here is unspecified and will likely generate an error in the future.
3. Use `flatMap` for general recursion. sbt's combinators are strict to limit the number of classes generated, so use `flatMap` like:

```
lazy val parser: Parser[Int] =  
  token(IntBasic) flatMap { i =>  
    if(i <= 0)  
      success(i)  
    else  
      token(Space ~> parser)  
  }
```

This example defines a parser a whitespace-delimited list of integers, ending with a negative number, and returning that final, negative number.

## Plugins

There's a [getting started page](#) focused on using existing plugins, which you may want to read first.

A plugin is a way to use external code in a build definition. A plugin can be a library used to implement a task (you might use [Knockoff](#) to write a markdown processing task). A plugin can define a sequence of sbt settings that are automatically added to all projects or that are explicitly declared for selected projects. For example, a plugin might add a `proguard` task and associated (overridable) settings. Finally, a plugin can define new commands (via the `commands` setting).

sbt 0.13.5 introduces auto plugins, with improved dependency management among the plugins and explicitly scoped auto importing. Going forward, our recommendation is to migrate to the auto plugins. The [Plugins Best Practices](#) page describes the currently evolving guidelines to writing sbt plugins. See also the general [best practices](#).

### Using an auto plugin

A common situation is when using a binary plugin published to a repository. If you're adding sbt-assembly, create `project/assembly.sbt` with the following:

```
addSbtPlugin("com.eed3si9n" % "sbt-assembly" % "0.11.2")
```

Alternatively, you can create `project/plugins.sbt` with all of the desired sbt plugins, any general dependencies, and any necessary repositories:

```
addSbtPlugin("org.example" % "plugin" % "1.0")

addSbtPlugin("org.example" % "another-plugin" % "2.0")

// plain library (not an sbt plugin) for use in the build definition
libraryDependencies += "org.example" % "utilities" % "1.3"

resolvers += "Example Plugin Repository" at "https://example.org/repo/"
```

Many of the auto plugins automatically add settings into projects, however, some may require explicit enablement. Here's an example:

```
lazy val util = (project in file("util"))
  .enablePlugins(FooPlugin, BarPlugin)
  .disablePlugins(plugins.IvyPlugin)
  .settings(
    name := "hello-util"
  )
```

See [using plugins](#) in the Getting Started guide for more details on using plugins.

## By Description

A plugin definition is a project under `project/` folder. This project's classpath is the classpath used for build definitions in `project/` and any `.sbt` files in the project's base directory. It is also used for the `eval` and `set` commands.

Specifically,

1. Managed dependencies declared by the `project/` project are retrieved and are available on the build definition classpath, just like for a normal project.
2. Unmanaged dependencies in `project/lib/` are available to the build definition, just like for a normal project.
3. Sources in the `project/` project are the build definition files and are compiled using the classpath built from the managed and unmanaged dependencies.
4. Project dependencies can be declared in `project/plugins.sbt` (similarly to `build.sbt` file in a normal project) or `project/project/Build.scala` (similarly to `project/Build.scala` in a normal project) and will be available to the build definition sources. Think of `project/project/` as the build definition for the build definition (worth to repeat it here again: “sbt is recursive”, remember?).



The build definition classpath is searched for `sbt/sbt.plugins` descriptor files containing the names of `sbt.AutoPlugin` or `sbt.Plugin` implementations.

The `reload plugins` command changes the current build to the (root) project's `project/` build definition. This allows manipulating the build definition project like a normal project. `reload return` changes back to the original build. Any session settings for the plugin definition project that have not been saved are dropped.

An auto plugin is a module that defines settings to automatically inject into projects. In addition an auto plugin provides the following feature:

- Automatically import selective names to `.sbt` files and the `eval` and `set` commands.
- Specify plugin dependencies to other auto plugins.
- Automatically activate itself when all dependencies are present.
- Specify `projectSettings`, `buildSettings`, and `globalSettings` as appropriate.

## Plugin dependencies

When a traditional plugin wanted to reuse some functionality from an existing plugin, it would pull in the plugin as a library dependency, and then it would either:

1. add the setting sequence from the dependency as part of its own setting sequence, or
2. tell the build users to include them in the right order.

This becomes complicated as the number of plugins increase within an application, and becomes more error prone. The main goal of auto plugin is to alleviate this setting dependency problem. An auto plugin can depend on other auto plugins and ensure these dependency settings are loaded first.

Suppose we have the `SbtLessPlugin` and the `SbtCoffeeScriptPlugin`, which in turn depends on the `SbtJsTaskPlugin`, `SbtWebPlugin`, and `JvmPlugin`. Instead of manually activating all of these plugins, a project can just activate the `SbtLessPlugin` and `SbtCoffeeScriptPlugin` like this:

```
lazy val root = (project in file("."))
  .enablePlugins(SbtLessPlugin, SbtCoffeeScriptPlugin)
```

This will pull in the right setting sequence from the plugins in the right order. The key notion here is you declare the plugins you want, and sbt can fill in the gap.

A plugin implementation is not required to produce an auto plugin, however. It is a convenience for plugin consumers and because of the automatic nature, it is not always appropriate.

**Global plugins** The `~/.sbt/1.0/plugins/` directory is treated as a global plugin definition project. It is a normal sbt project whose classpath is available to all sbt project definitions for that user as described above for per-project plugins.

### Creating an auto plugin

A minimal sbt plugin is a Scala library that is built against the version of Scala that sbt runs (currently, 2.12.2) or a Java library. Nothing special needs to be done for this type of library. A more typical plugin will provide sbt tasks, commands, or settings. This kind of plugin may provide these settings automatically or make them available for the user to explicitly integrate.

To make an auto plugin, create a project and configure `sbtPlugin` to `true`.

```
sbtPlugin := true
```

Then, write the plugin code and publish your project to a repository. The plugin can be used as described in the previous section.

First, in an appropriate namespace, define your auto plugin object by extending `sbt.AutoPlugin`.

**projectSettings and buildSettings** With auto plugins, all provided settings (e.g. `assemblySettings`) are provided by the plugin directly via the `projectSettings` method. Here's an example plugin that adds a command named `hello` to sbt projects:

```
package sbthello

import sbt._
import Keys._

object HelloPlugin extends AutoPlugin {
  override lazy val projectSettings = Seq(commands += helloCommand)
  lazy val helloCommand =
    Command.command("hello") { (state: State) =>
      println("Hi!")
      state
    }
}
```

This example demonstrates how to take a `Command` (here, `helloCommand`) and distribute it in a plugin. Note that multiple commands can be included in one plugin (for example, use `commands += Seq(a,b)`). See [Commands](#) for defining more useful commands, including ones that accept arguments and affect the execution state.

If the plugin needs to append settings at the build-level (that is, in `ThisBuild`) there's a `buildSettings` method. The settings returned here are guaranteed to be added to a given build scope only once regardless of how many projects for that build activate this `AutoPlugin`.

```
override def buildSettings: Seq[Setting[_]] = Nil
```

The `globalSettings` is appended once to the global settings (in `Global`). These allow a plugin to automatically provide new functionality or new defaults. One main use of this feature is to globally add commands, such as for IDE plugins.

```
override def globalSettings: Seq[Setting[_]] = Nil
```

Use `globalSettings` to define the default value of a setting.

**Implementing plugin dependencies** Next step is to define the plugin dependencies.

```
package sbtleast

import sbt._
import Keys._
object SbtLessPlugin extends AutoPlugin {
  override def requires = SbtJsTaskPlugin
  override lazy val projectSettings = ...
}
```

The `requires` method returns a value of type `Plugins`, which is a DSL for constructing the dependency list. The `requires` method typically contains one of the following values:

- `empty` (No plugins, this is the default)
- other auto plugins
- `&&` operator (for defining multiple dependencies)

**Root plugins and triggered plugins** Some plugins should always be explicitly enabled on projects. we call these root plugins, i.e. plugins that are “root” nodes in the plugin dependency graph. An auto plugin is by default a root plugin.

Auto plugins also provide a way for plugins to automatically attach themselves to projects if their dependencies are met. We call these triggered plugins, and they are created by overriding the `trigger` method.

For example, we might want to create a triggered plugin that can append commands automatically to the build. To do this, set the `requires` method to return `empty` (this is the default), and override the `trigger` method with `allRequirements`.

```
package sbthello

import sbt._
import Keys._

object HelloPlugin2 extends AutoPlugin {
  override def trigger = allRequirements
  override lazy val buildSettings = Seq(commands += helloCommand)
  lazy val helloCommand =
    Command.command("hello") { (state: State) =>
      println("Hi!")
      state
    }
}
```

The build user still needs to include this plugin in `project/plugins.sbt`, but it is no longer needed to be included in `build.sbt`. This becomes more interesting when you do specify a plugin with requirements. Let’s modify the `SbtLessPlugin` so that it depends on another plugin:

```
package sbtleast
import sbt._
import Keys._
object SbtLessPlugin extends AutoPlugin {
  override def trigger = allRequirements
  override def requires = SbtJsTaskPlugin
  override lazy val projectSettings = ...
}
```

As it turns out, `PlayScala` plugin (in case you didn’t know, the `Play` framework is an sbt plugin) lists `SbtJsTaskPlugin` as one of it required plugins. So, if we define a `build.sbt` with:

```
lazy val root = (project in file("."))
  .enablePlugins(PlayScala)
```

then the setting sequence from `SbtLessPlugin` will be automatically appended somewhere after the settings from `PlayScala`.

This allows plugins to silently, and correctly, extend existing plugins with more features. It also can help remove the burden of ordering from the user, allowing the plugin authors greater freedom and power when providing feature for their users.

**Controlling the import with `autoImport`** When an auto plugin provides a stable field such as `val` or `object` named `autoImport`, the contents of the field are wildcard imported in `set`, `eval`, and `.sbt` files. In the next example, we'll replace our `hello` command with a task to get the value of `greeting` easily. In practice, it's recommended [to prefer settings or tasks to commands](#).

```
package sbthello

import sbt._
import Keys._

object HelloPlugin3 extends AutoPlugin {
  object autoImport {
    val greeting = settingKey[String]("greeting")
    val hello = taskKey[Unit]("say hello")
  }
  import autoImport._
  override def trigger = allRequirements
  override lazy val buildSettings = Seq(
    greeting := "Hi!",
    hello := helloTask.value)
  lazy val helloTask =
    Def.task {
      println(greeting.value)
    }
}
```

Typically, `autoImport` is used to provide new keys - `SettingKeys`, `TaskKeys`, or `InputKeys` - or core methods without requiring an import or qualification.

**Example Plugin** An example of a typical plugin:

```
build.sbt:
```

```

sbtPlugin := true

name := "sbt-obfuscate"

organization := "org.example"

ObfuscatePlugin.scala:

package sbtobfuscate

import sbt._
import sbt.Keys._

object ObfuscatePlugin extends AutoPlugin {
  // by defining autoImport, the settings are automatically imported into user's `*.sbt`
  object autoImport {
    // configuration points, like the built-in `version`, `libraryDependencies`, or `compilerOptions`
    val obfuscate = taskKey[Seq[File]]("Obfuscates files.")
    val obfuscateLiterals = settingKey[Boolean]("Obfuscate literals.")

    // default values for the tasks and settings
    lazy val baseObfuscateSettings: Seq[Def.Setting[_]] = Seq(
      obfuscate := {
        Obfuscate(sources.value, (obfuscateLiterals in obfuscate).value)
      },
      obfuscateLiterals in obfuscate := false
    )
  }

  import autoImport._
  override def requires = sbt.plugins.JvmPlugin

  // This plugin is automatically enabled for projects which are JvmPlugin.
  override def trigger = allRequirements

  // a group of settings that are automatically added to projects.
  override val projectSettings =
    inConfig(Compile)(baseObfuscateSettings) ++
    inConfig(Test)(baseObfuscateSettings)
}

object Obfuscate {
  def apply(sources: Seq[File], obfuscateLiterals: Boolean): Seq[File] = {
    // TODO obfuscate stuff!
    sources
  }
}

```

```
}  
}
```

**Usage example** A build definition that uses the plugin might look like. `obfuscate.sbt`:

```
obfuscateLiterals in obfuscate := true
```

**Global plugins example** The simplest global plugin definition is declaring a library or plugin in `~/.sbt/1.0/plugins/build.sbt`:

```
libraryDependencies += "org.example" %% "example-plugin" % "0.1"
```

This plugin will be available for every sbt project for the current user.

In addition:

- Jars may be placed directly in `~/.sbt/1.0/plugins/lib/` and will be available to every build definition for the current user.
- Dependencies on plugins built from source may be declared in `~/.sbt/1.0/plugins/project/Build.scala` as described at [.scala build definition](#).
- A Plugin may be directly defined in Scala source files in `~/.sbt/1.0/plugins/`, such as `~/.sbt/1.0/plugins/MyPlugin.scala`. `~/.sbt/1.0/plugins//build.sbt` should contain `sbtPlugin := true`. This can be used for quicker turnaround when developing a plugin initially:

1. Edit the global plugin code
2. **reload** the project you want to use the modified plugin in
3. sbt will rebuild the plugin and use it for the project. Additionally, the plugin will be available in other projects on the machine without recompiling again. This approach skips the overhead of `publishLocal` and `cleaning` the plugins directory of the project using the plugin.

These are all consequences of `~/.sbt/1.0/plugins/` being a standard project whose classpath is added to every sbt project's build definition.

### Using a library in a build definition example

As an example, we'll add the Grizzled Scala library as a plugin. Although this does not provide sbt-specific functionality, it demonstrates how to declare plugins.

### 1a) Manually managed

1. Download the jar manually from [https://oss.sonatype.org/content/repositories/releases/org/clapper/grizzled-scala\\_2.8.1/1.0.4/grizzled-scala\\_2.8.1-1.0.4.jar](https://oss.sonatype.org/content/repositories/releases/org/clapper/grizzled-scala_2.8.1/1.0.4/grizzled-scala_2.8.1-1.0.4.jar)
2. Put it in `project/lib/`

**1b) Automatically managed: direct editing approach** Edit `project/plugins.sbt` to contain:

```
libraryDependencies += "org.clapper" %% "grizzled-scala" % "1.0.4"
```

If sbt is running, do reload.

**1c) Automatically managed: command-line approach** We can change to the plugins project in `project/` using `reload` `plugins`.

```
$ sbt
> reload plugins
[info] Set current project to default (in build file:/Users/sbt/demo2/project/)
>
```

Then, we can add dependencies like usual and save them to `project/plugins.sbt`. It is useful, but not required, to run `update` to verify that the dependencies are correct.

```
> set libraryDependencies += "org.clapper" %% "grizzled-scala" % "1.0.4"
...
> update
...
> session save
...
```

To switch back to the main project use `reload` `return`:

```
> reload return
[info] Set current project to root (in build file:/Users/sbt/demo2/)
```



**1d) Project dependency** This variant shows how to use sbt's external project support to declare a source dependency on a plugin. This means that the plugin will be built from source and used on the classpath.

Edit `project/plugins.sbt`

```
lazy val root = (project in file(".")).dependsOn(assemblyPlugin)

lazy val assemblyPlugin = uri("git://github.com/sbt/sbt-assembly")
```

If sbt is running, run `reload`.

Note that this approach can be useful used when developing a plugin. A project that uses the plugin will rebuild the plugin on `reload`. This saves the intermediate steps of `publishLocal` and `update`. It can also be used to work with the development version of a plugin from its repository.

It is however recommended to explicitly specify the commit or tag by appending it to the repository as a fragment:

```
lazy val assemblyPlugin = uri("git://github.com/sbt/sbt-assembly#0.9.1")
```

One caveat to using this method is that the local sbt will try to run the remote plugin's build. It is quite possible that the plugin's own build uses a different sbt version, as many plugins cross-publish for several sbt versions. As such, it is recommended to stick with binary artifacts when possible.

**2) Use the library** Grizzled Scala is ready to be used in build definitions. This includes the `eval` and `set` commands and `.sbt` and `project/*.scala` files.

```
> eval grizzled.sys.os
```

In a `build.sbt` file:

```
import grizzled.sys._
import OperatingSystem._

libraryDependencies +=
  if(os == Windows)
    Seq("org.example" % "windows-only" % "1.0")
  else
    Seq.empty
```

## Best Practices

If you're a plugin writer, please consult the [Plugins Best Practices](#) page; it contains a set of guidelines to help you ensure that your plugin is consistent and plays well with other plugins.

## Plugins Best Practices

*This page is intended primarily for sbt plugin authors.* This page assumes you've read [using plugins](#) and [Plugins](#).

A plugin developer should strive for consistency and ease of use. Specifically:

- Plugins should play well with other plugins. Avoiding namespace clashes (in both sbt and Scala) is paramount.
- Plugins should follow consistent conventions. The experiences of an sbt *user* should be consistent, no matter what plugins are pulled in.

Here are some current plugin best practices.

**Note:** Best practices are evolving, so check back frequently.

### Get your plugins known

Make sure people can find your plugin. Here are some of the recommended steps:

1. Mention [@scala\\_sbt](https://twitter.com/scala_sbt) ([https://twitter.com/scala\\_sbt](https://twitter.com/scala_sbt)) in your announcement, and we will RT it.
2. Send a pull req to [sbt/website](#) and add your plugin on [the plugins list](#).

### Don't use default package

Users who have their build files in some package will not be able to use your plugin if it's defined in default (no-name) package.

### Follow the naming conventions

Use the `sbt-$projectname` scheme to name your library and artifact. A plugin ecosystem with a consistent naming convention makes it easier for users to tell whether a project or dependency is an SBT plugin.

If the project's name is `foobar` the following holds:

- BAD: `foobar`
- BAD: `foobar-sbt`
- BAD: `sbt-foobar-plugin`
- GOOD: `sbt-foobar`

If your plugin provides an obvious “main” task, consider naming it `foobar` or `foobar...` to make it more intuitive to explore the capabilities of your plugin within the sbt shell and tab-completion.

### Use settings and tasks. Avoid commands.

Your plugin should fit in naturally with the rest of the sbt ecosystem. The first thing you can do is to avoid defining [commands](#), and use settings and [tasks](#) and task-scoping instead (see below for more on task-scoping). Most of the interesting things in sbt like `compile`, `test` and `publish` are provided using tasks. Tasks can take advantage of duplication reduction and parallel execution by the task engine. With features like [ScopeFilter](#), many of the features that previously required commands are now possible using tasks.

Settings can be composed from other settings and tasks. Tasks can be composed from other tasks and input tasks. Commands, on the other hand, cannot be composed from any of the above. In general, use the minimal thing that you need. One legitimate use of commands may be using plugin to access the build definition itself not the code. `sbt-inspectr` was implemented using [a command](#) before it became `inspect tree`.

### Use `sbt.AutoPlugin`

sbt is in the process of migrating to `sbt.AutoPlugin` from `sbt.Plugin`. The new mechanism features a set of user-level controls and dependency declarations that cleans up a lot of long-standing issues with plugins.

### Reuse existing keys

sbt has a number of [predefined keys](#). Where possible, reuse them in your plugin. For instance, don't define:

```
val sourceFiles = settingKey[Seq[File]]("Some source files")
```

Instead, simply reuse sbt's existing `sources` key.

## Avoid namespace clashes

Sometimes, you need a new key, because there is no existing sbt key. In this case, use a plugin-specific prefix.

```
package sbtobfuscate

import sbt._, Keys._

object ObfuscatePlugin extends sbt.AutoPlugin {
  object autoImport {
    lazy val obfuscateStylesheet = settingKey[File]("obfuscate stylesheet")
  }
}
```

In this approach, every `lazy val` starts with `obfuscate`. A user of the plugin would refer to the settings like this:

```
obfuscateStylesheet := file("something.txt")
```

## Provide core feature in a plain old Scala object

The core feature of sbt's `package` task, for example, is implemented in `sbt.Package`, which can be called via its `apply` method. This allows greater reuse of the feature from other plugins such as `sbt-assembly`, which in return implements `sbtassembly.Assembly` object to implement its core feature.

Follow their lead, and provide core feature in a plain old Scala object.

## Configuration advices

If your plugin introduces either a new set of source code or its own library dependencies, only then you want your own configuration.

**You probably won't need your own configuration** Configurations should *not* be used to namespace keys for a plugin. If you're merely adding tasks and settings, don't define your own configuration. Instead, reuse an existing one *or* scope by the main task (see below).

```
package sbtwhatever

import sbt._, Keys._
```

```

object WhateverPlugin extends sbt.AutoPlugin {
  override def requires = plugins.JvmPlugin
  override def trigger = allRequirements

  object autoImport {
    // BAD sample
    lazy val Whatever = config("whatever") extend(Compile)
    lazy val dude = settingKey[String]("A plugin specific key")
  }
  import autoImport._
  override lazy val projectSettings = Seq(
    dude in Whatever := "your opinion man" // DON'T DO THIS
  )
}

```

**When to define your own configuration** If your plugin introduces either a new set of source code or its own library dependencies, only then you want your own configuration. For instance, suppose you've built a plugin that performs fuzz testing that requires its own fuzzing library and fuzzing source code. `scalaSource` key can be reused similar to `Compile` and `Test` configuration, but `scalaSource` scoped to `Fuzz` configuration (denoted as `scalaSource in Fuzz`) can point to `src/fuzz/scala` so it is distinct from other Scala source directories. Thus, these three definitions use the same *key*, but they represent distinct *values*. So, in a user's `build.sbt`, we might see:

```

scalaSource in Fuzz := baseDirectory.value / "source" / "fuzz" / "scala"

scalaSource in Compile := baseDirectory.value / "source" / "main" / "scala"

```

In the fuzzing plugin, this is achieved with an `inConfig` definition:

```

package sbtfuzz

import sbt._, Keys._

object FuzzPlugin extends sbt.AutoPlugin {
  override def requires = plugins.JvmPlugin
  override def trigger = allRequirements

  object autoImport {
    lazy val Fuzz = config("fuzz") extend(Compile)
  }
  import autoImport._

```

```

    lazy val baseFuzzSettings: Seq[Def.Setting[_]] = Seq(
      test := {
        println("fuzz test")
      }
    )
    override lazy val projectSettings = inConfig(Fuzz)(baseFuzzSettings)
  }

```

When defining a new type of configuration, e.g.

```

lazy val Fuzz = config("fuzz") extend(Compile)

```

should be used to create a configuration. Configurations actually tie into dependency resolution (with Ivy) and can alter generated pom files.

**Playing nice with configurations** Whether you ship with a configuration or not, a plugin should strive to support multiple configurations, including those created by the build user. Some tasks that are tied to a particular configuration can be re-used in other configurations. While you may not see the need immediately in your plugin, some project may and will ask you for the flexibility.

**Provide raw settings and configured settings** Split your settings by the configuration axis like so:

```

package sbtobfuscate

import sbt._, Keys._

object ObfuscatePlugin extends sbt.AutoPlugin {
  override def requires = plugins.JvmPlugin
  override def trigger = allRequirements

  object autoImport {
    lazy val obfuscate = taskKey[Seq[File]]("obfuscate the source")
    lazy val obfuscateStylesheet = settingKey[File]("obfuscate stylesheet")
  }
  import autoImport._
  lazy val baseObfuscateSettings: Seq[Def.Setting[_]] = Seq(
    obfuscate := Obfuscate((sources in obfuscate).value),
    sources in obfuscate := sources.value
  )
  override lazy val projectSettings = inConfig(Compile)(baseObfuscateSettings)
}

```

```
// core feature implemented here
object Obfuscate {
  def apply(sources: Seq[File]): Seq[File] = {
    sources
  }
}
```

The `baseObfuscateSettings` value provides base configuration for the plugin's tasks. This can be re-used in other configurations if projects require it. The `obfuscateSettings` value provides the default `Compile` scoped settings for projects to use directly. This gives the greatest flexibility in using features provided by a plugin. Here's how the raw settings may be reused:

```
import sbtobfuscate.ObfuscatePlugin

lazy val app = (project in file("app"))
  .settings(inConfig(Test)(ObfuscatePlugin.baseObfuscateSettings))
```

**Using a “main” task scope for settings** Sometimes you want to define some settings for a particular “main” task in your plugin. In this instance, you can scope your settings using the task itself. See the `baseObfuscateSettings`:

```
lazy val baseObfuscateSettings: Seq[Def.Setting[_]] = Seq(
  obfuscate := Obfuscate((sources in obfuscate).value),
  sources in obfuscate := sources.value
)
```

In the above example, `sources in obfuscate` is scoped under the main task, `obfuscate`.

## Mucking with `globalSettings`

There may be times when you need to muck with `globalSettings`. The general rule is *be careful what you touch*.

When overriding global settings, care should be taken to ensure previous settings from other plugins are not ignored. e.g. when creating a new `onLoad` handler, ensure that the previous `onLoad` handler is not removed.

```
package sbtsomething

import sbt._, Keys._
```

```
object MyPlugin extends AutoPlugin {
  override def requires = plugins.JvmPlugin
  override def trigger = allRequirements

  override val globalSettings: Seq[Def.Setting[_]] = Seq(
    onLoad in Global := (onLoad in Global).value andThen { state =>
      ... return new state ...
    }
  )
}
```

## Setting up Travis CI with sbt

[Travis CI](#) is a hosted continuous integration service for open source and private projects. Many of the OSS projects hosted on GitHub uses [open source edition of Travis CI](#) to validate pushes and pull requests. We'll discuss some of the best practices setting up Travis CI.

### Set project/build.properties

Continuous integration is a great way of checking that your code works outside of your machine. If you haven't created one already, make sure to create `project/build.properties` and explicitly set the `sbt.version` number:

```
sbt.version=1.0.0-RC2
```

Your build will now use 1.0.0-RC2.

### Read the Travis manual

A treasure trove of Travis tricks can be found in the Travis's [official documentation](#). Use this guide as an inspiration, but consult the official source for more details.

### Basic setup

Setting up your build for Travis CI is mostly about setting up `.travis.yml`. [Scala](#) page says the basic file can look like:

```
language: scala
```



```
jdk: oraclejdk8
```

```
scala:  
  - 2.10.4  
  - 2.12.2
```

By default Travis CI executes `sbt ++$TRAVIS_SCALA_VERSION test`. Let's specify that explicitly:

```
language: scala
```

```
jdk: oraclejdk8
```

```
scala:  
  - 2.10.4  
  - 2.12.2
```

```
script:  
  - sbt ++$TRAVIS_SCALA_VERSION test
```

More info on `script` section can be found in [Configuring your build](#).

As noted on the [Scala](#) page, Travis CI uses [paulp/sbt-extras](#) as the `sbt` command. This becomes relevant when you want to override JVM options, which we'll see later.

## Plugin build setup

For sbt plugins, there is no need for cross building on Scala, so the following is all you need:

```
language: scala
```

```
jdk: oraclejdk8
```

```
script:  
  - sbt scripted
```

Another source of good information is to read the output by Travis CI itself to learn about how the virtual environment is set up. For example, from the following output we learn that it is using `JVM_OPTS` environment variable to pass in the JVM options.

```
$ export JVM_OPTS=@/etc/sbt/jvmopts  
$ export SBT_OPTS=@/etc/sbt/sbtopts
```

## Custom JVM options

The default [sbt](#) and [JVM](#) options are set by Travis CI people, and it should work for most cases. If you do decide to customize it, read what they currently use as the defaults first. Because Travis is already using the environment variable `JVM_OPTS`, we can instead create a file `travis/jvmopts`:

```
-Dfile.encoding=UTF8
-Xms2048M
-Xmx2048M
-Xss6M
-XX:MaxPermSize=512M
-XX:ReservedCodeCacheSize=256M
```

and then write out the `script` section with `-jvm-opts` option:

```
script:
  - sbt ++$TRAVIS_SCALA_VERSION -jvm-opts travis/jvmopts test
```

After making the change, confirm on the Travis log to see if the flags are taking effect:

```
# Executing command line:
java
-Dfile.encoding=UTF8
-Xms2048M
-Xmx2048M
-Xss6M
-XX:MaxPermSize=512M
-XX:ReservedCodeCacheSize=256M
-jar
/home/travis/.sbt/launchers/1.0.0-RC2/sbt-launch.jar
```

It seems to be working. One downside of setting all of the parameters is that we might be left behind when the environment updates and the default values gives us more memory in the future.

Here's how we can add just a few JVM options:

```
script:
  - sbt ++$TRAVIS_SCALA_VERSION -Dfile.encoding=UTF8 -J-XX:ReservedCodeCacheSize=256M -J-Xms1
```

`sbt-extra` script passes any arguments starting with either `-D` or `-J` directly to JVM.

Again, let's check the Travis log to see if the flags are taking effect:

```
# Executing command line:
java
-Xms2048M
-Xmx2048M
-Xss6M
-XX:MaxPermSize=512M
-Dfile.encoding=UTF8
-XX:ReservedCodeCacheSize=256M
-Xms1024M
-jar
/home/travis/.sbt/launchers/1.0.0-RC2/sbt-launch.jar
```

**Note:** This duplicates the `-Xms` flag as intended, which might not be the best thing to do.

## Caching

In late 2014, thanks to Travis CI members sending pull requests on GitHub, we learned that Ivy cache can be shared across the Travis builds. The public availability of [caching](#) is part of the benefit for trying the new [container-based infrastructure](#).

Jobs running on container-based infrastructure:

1. start up faster
2. allow the use of caches for public repositories
3. disallow the use of `sudo`, `setuid` and `setgid` executables

To opt into the container-based infrastructure, put the following in `.travis.yml`:

```
# Use container-based infrastructure
sudo: false
```

Next, we can put `cache` section as follows:

```
# These directories are cached to S3 at the end of the build
cache:
  directories:
    - $HOME/.ivy2/cache
    - $HOME/.sbt
```

Finally, the following a few lines of cleanup script are added:

```
before_cache:
  # Cleanup the cached directories to avoid unnecessary cache updates
  - find $HOME/.ivy2/cache -name "ivydata-*.properties" -print -delete
  - find $HOME/.sbt          -name "*.lock"              -print -delete
```

With the above changes combined Travis CI will tar up the cached directories and uploads them to Amazon S3. Overall, the use of the new infrastructure and caching seems to shave off a few minutes of build time per job.

**Note:** The Travis documentation states caching features are still experimental.

## Build matrix

We've already seen the example of Scala cross building.

```
language: scala

jdk: oraclejdk8

scala:
  - 2.10.4
  - 2.12.2

script:
  - sbt ++$TRAVIS_SCALA_VERSION test
```

We can also form a build matrix using environment variables:

```
env:
  global:
    - SOME_VAR="1"

  # This splits the build into two parts
  matrix:
    - TEST_COMMAND="scripted sbt-assembly/*"
    - TEST_COMMAND="scripted merging/* caching/*"

script:
  - sbt "$TEST_COMMAND"
```

Now two jobs will be created to build this sbt plugin, simultaneously running different integration tests. This technique is described in [Parallelizing your builds across virtual machines](#).

## Notification

You can configure Travis CI to [notify you](#).

By default, email notifications will be sent to the committer and the commit author, if they are members of the repository[...].

And it will by default send emails when, on the given branch:

- a build was just broken or still is broken
- a previously broken build was just fixed

The default behavior looks reasonable, but if you want, we can override the `notifications` section to email you on successful builds too, or to use some other channel of communication like IRC.

```
# Email specific recipient all the time
notifications:
  email:
    recipients:
      - one@example.com
  on_success: always # default: change
```

This might also be a good time to read up on [encryption](#) using the command line `travis` tool.

```
$ travis encrypt one@example.com
```

## Dealing with flaky network or tests

For builds that are more prone to flaky network or tests, Travis CI has created some tricks described in the page [My builds is timing out](#).

Starting your command with `travis_retry` retries the command three times if the return code is non-zero. With caching, hopefully the effect of flaky network is reduced, but it's an interesting one nonetheless. Here are some cautionary words from the documentation:

We recommend careful use of `travis_retry`, as overusing it can extend your build time when there could be a deeper underlying issue.

Another tidbit about Travis is the output timeout:

Our builds have a global timeout and a timeout that's based on the output. If no output is received from a build for 10 minutes, it's assumed to have stalled for unknown reasons and is subsequently killed.

There's a function called `travis_wait` that can extend this to 20 minutes.

### More things

There are more thing you can do, such as [set up databases](#), [installing Ubuntu packages](#), and [deploy continuously](#).

### Sample setting

Here's a sample that puts them all together. Remember, most of the sections are optional.

```
# Use container-based infrastructure
sudo: false

language: scala

jdk: oraclejdk8

# These directories are cached to S3 at the end of the build
cache:
  directories:
    - $HOME/.ivy2/cache
    - $HOME/.sbt/boot/

jdk: oraclejdk8

env:
  # This splits the build into two parts
  matrix:
    - TEST_COMMAND="scripted sbt-assembly/*"
    - TEST_COMMAND="scripted merging/* caching/*"

script:
  - sbt -Dfile.encoding=UTF8 -J-XX:ReservedCodeCacheSize=256M "$TEST_COMMAND"

before_cache:
  # Tricks to avoid unnecessary cache updates
  - find $HOME/.sbt -name "*.lock" | xargs rm
```

```

- find $HOME/.ivy2 -name "ivydata-*.properties" | xargs rm

# Email specific recipient all the time
notifications:
  email:
    recipients:
      secure: "Some/BASE64/STUFF="
    on_success: always # default: change

```

## Testing sbt plugins

Let's talk about testing. Once you write a plugin, it turns into a long-term thing. To keep adding new features (or to keep fixing bugs), writing tests makes sense.

### scripted test framework

sbt comes with scripted test framework, which lets you script a build scenario. It was written to test sbt itself on complex scenarios – such as change detection and partial compilation:

Now, consider what happens if you were to delete B.scala but do not update A.scala. When you recompile, you should get an error because B no longer exists for A to reference. [... (really complicated stuff)]

The scripted test framework is used to verify that sbt handles cases such as that described above.

The framework is made available via scripted-plugin. The rest of this page explains how to include the scripted-plugin into your plugin.

#### step 1: snapshot

Before you start, set your version to a **-SNAPSHOT** one because scripted-plugin will publish your plugin locally. If you don't use SNAPSHOT, you could get into a horrible inconsistent state of you and the rest of the world seeing different artifacts.

#### step 2: scripted-plugin

Add scripted-plugin to your plugin build. `project/scripted.sbt`:

```
libraryDependencies += { "org.scala-sbt" %% "scripted-plugin" % sbtVersion.value }
```

Then add the following settings to `scripted.sbt`:

```
scriptedLaunchOpts := { scriptedLaunchOpts.value ++  
  Seq("-Xmx1024M", "-XX:MaxPermSize=256M", "-Dplugin.version=" + version.value)  
}  
scriptedBufferLog := false
```

### step 3: `src/sbt-test`

Make dir structure `src/sbt-test/<test-group>/<test-name>`. For starters, try something like `src/sbt-test/<your-plugin-name>/simple`.

Now ready? Create an initial build in `simple`. Like a real build using your plugin. I'm sure you already have several of them to test manually. Here's an example `build.sbt`:

```
lazy val root = (project in file("."))  
  .settings(  
    version := "0.1",  
    scalaVersion := "2.10.6",  
    assemblyJarName in assembly := "foo.jar"  
  )
```

In `project/plugins.sbt`:

```
sys.props.get("plugin.version") match {  
  case Some(x) => addSbtPlugin("com.eed3si9n" % "sbt-assembly" % x)  
  case _ => sys.error("""|The system property 'plugin.version' is not defined.  
Specify this property using the scriptedLaunchOpts -D.""").stripMargin)  
}
```

This a trick I picked up from [JamesEarlDouglas/xsbt-web-plugin@feabb2](#), which allows us to pass version number into the test.

I also have `src/main/scala/hello.scala`:

```
object Main extends App {  
  println("hello")  
}
```



#### step 4: write a script

Now, write a script to describe your scenario in a file called `test` located at the root dir of your test project.

```
# check if the file gets created
> assembly
$ exists target/scala-2.10/foo.jar
```

Here is the syntax for the script:

1. `#` starts a one-line comment
2. `> name` sends a task to sbt (and tests if it succeeds)
3. `$ name arg*` performs a file command (and tests if it succeeds)
4. `-> name` sends a task to sbt, but expects it to fail
5. `-$ name arg*` performs a file command, but expects it to fail

File commands are:

- `touch path+` creates or updates the timestamp on the files
- `delete path+` deletes the files
- `exists path+` checks if the files exist
- `mkdir path+` creates dirs
- `absent path+` checks if the files don't exist
- `newer source target` checks if `source` is newer
- `must-mirror source target` checks if `source` is identical
- `pause` pauses until enter is pressed
- `sleep time` sleeps
- `exec command args*` runs the command in another process
- `copy-file fromPath toPath` copies the file
- `copy fromPath+ toDir` copies the paths to `toDir` preserving relative structure
- `copy-flat fromPath+ toDir` copies the paths to `toDir` flat

So my script will run `assembly` task, and checks if `foo.jar` gets created. We'll cover more complex tests later.

#### step 5: run the script

To run the scripts, go back to your plugin project, and run:

```
> scripted
```

This will copy your test build into a temporary dir, and executes the `test` script. If everything works out, you'd see `publishLocal` running, then:

```
Running sbt-assembly / simple
[success] Total time: 18 s, completed Sep 17, 2011 3:00:58 AM
```

### step 6: custom assertion

The file commands are great, but not nearly enough because none of them test the actual contents. An easy way to test the contents is to implement a custom task in your test build.

For my hello project, I'd like to check if the resulting jar prints out "hello". I can take advantage of `sbt.Process` to run the jar. To express a failure, just throw an error. Here's `build.sbt`:

```
lazy val root = (project in file("."))
  .settings(
    version := "0.1",
    scalaVersion := "2.10.6",
    assemblyJarName in assembly := "foo.jar",
    TaskKey[Unit]("check") := {
      val process = sbt.Process("java", Seq("-jar", (crossTarget.value / "foo.jar").toString))
      val out = (process!!)
      if (out.trim != "bye") error("unexpected output: " + out)
    }
  )
```

I am intentionally testing if it matches "bye", to see how the test fails.

Here's test:

```
# check if the file gets created
> assembly
$ exists target/foo.jar

# check if it says hello
> check
```

Running `scripted` fails the test as expected:

```
[info] [error] {file:/private/var/folders/Ab/AbC1EFghIj4LMNOPqrStUV+++XX/-Tmp-/sbt_cdd1b3c4/
[info] [error] Total time: 0 s, completed Sep 21, 2011 8:43:03 PM
```

```
[error] x sbt-assembly / simple
[error]   {line 6} Command failed: check failed
[error] {file:/Users/foo/work/sbt-assembly/}default-373f46/*:scripted: sbt-assembly / simple
[error] Total time: 14 s, completed Sep 21, 2011 8:00:00 PM
```

### step 7: testing the test

Until you get the hang of it, it might take a while for the test itself to behave correctly. There are several techniques that may come in handy.

First place to start is turning off the log buffering.

```
> set scriptedBufferLog := false
```

This for example should print out the location of the temporary dir:

```
[info] [info] Set current project to default-c6500b (in build file:/private/var/folders/Ab/AbC...
...
```

Add the following line to your `test` script to suspend the test until you hit the enter key:

```
$ pause
```

If you're thinking about going down to the `sbt/sbt-test/sbt-foo/simple` and running `sbt`, don't do it. The right way, is to copy the dir somewhere else and run it.

### step 8: get inspired

There are literally [100+ scripted tests](#) under sbt project itself. Browse around to get inspirations.

For example, here's the one called by-name.

```
> compile
```

```
# change => Int to Function0
$ copy-file changes/A.scala A.scala
```

```
# Both A.scala and B.scala need to be recompiled because the type has changed
-> compile
```

[xsbt-web-plugin](#) and [sbt-assembly](#) have some scripted tests too.

That's it! Let me know about your experience in testing plugins!

## sbt new and Templates

sbt 0.13.13 adds a new command called `new`, to create new build definitions from a template. The `new` command is extensible via a mechanism called the template resolver.

### Trying new command

First, you need sbt's launcher version 0.13.13 or above. Normally the exact version for the `sbt` launcher does not matter because it will use the version specified by `sbt.version` in `project/build.properties`; however for new sbt's launcher 0.13.13 or above is required as the command functions without a `project/build.properties` present.

Next, run:

```
$ sbt new scala/scala-seed.g8
....
name [hello]:
```

Template applied in `./hello`

This ran the template [scala/scala-seed.g8](#) using [Giter8](#), prompted for values for “name” (which has a default value of “hello”, which we accepted hitting [Enter]), and created a build under `./hello`.

`scala-seed` is the official template for a “minimal” Scala project, but it's definitely not the only one out there.

### Giter8 support

[Giter8](#) is a templating project originally started by Nathan Hamblen in 2010, and now maintained by the [foundweekends](#) project. The unique aspect of Giter8 is that it uses GitHub (or any other git repository) to host the templates, so it allows anyone to participate in template creation. Here are some of the templates provided by official sources:

- [foundweekends/giter8.g8](#) (A template for Giter8 templates)
- [scala/scala-seed.g8](#) (Seed template for Scala)
- [scala/hello-world.g8](#) (A template to demonstrate a minimal Scala application)
- [akka/akka-scala-seed.g8](#) (A minimal seed template for an Akka with Scala build )
- [akka/akka-java-seed.g8](#) (A minimal seed template for an Akka in Java )

- [akka/hello-akka.g8](#) (Simple Akka application)
- [playframework/play-scala-seed.g8](#) (Play Scala Seed Template)
- [playframework/play-java-seed.g8](#) (Play Java Seed template)
- [lagom/lagom-scala.g8](#) (A Lagom Scala seed template for sbt)
- [lagom/lagom-java.g8](#) (A Lagom Java seed template for sbt)
- [scala-native/scala-native.g8](#) (Scala Native)
- [scala-native/sbt-crossproject.g8](#) (sbt-crossproject)
- [http4s/http4s.g8](#) (http4s services)
- [unfiltered/unfiltered.g8](#) (Unfiltered application)
- [scalatra/scalatra-sbt.g8](#) (Basic Scalatra template using SBT 0.13.x.)

For more, see [Giter8 templates](#) on the Giter8 wiki. sbt provides out-of-the-box support for Giter8 templates by shipping with a template resolver for Giter8.

**How to create a Giter8 template** See [Making your own templates](#) for the details on how to create a new Giter8 template.

```
$ sbt new foundweekends/giter8.g8
```

**Use CC0 1.0 for template licensing** We recommend licensing software templates under [CC0 1.0](#), which waives all copyrights and related rights, similar to the “public domain.”

If you reside in a country covered by the Berne Convention, such as the US, copyright will arise automatically without registration. Thus, people won’t have legal right to use your template if you do not declare the terms of license. The tricky thing is that even permissive licenses such as MIT License and Apache License will require attribution to your template in the template user’s software. To remove all claims to the templated snippets, distribute it under CC0, which is an international equivalent to public domain.

License

-----

Written in <YEAR> by <AUTHOR NAME> <AUTHOR E-MAIL ADDRESS>

[other author/contributor lines as appropriate]

To the extent possible under law, the author(s) have dedicated all copyright and related and neighboring rights in this software to the public domain worldwide. This software is made available under the CC0 Public Domain Dedication. You should have received a copy of the CC0 Public Domain Dedication along with this software. If not, see [http://creativecommons.org/publicdomain/zero/1.0/](#).

## How to extend sbt new

The rest of this page explains how to extend the `sbt new` command to provide support for something other than Giter8 templates. You can skip this section if you’re not interested in extending `new`.

**Template Resolver** A template resolver is a partial function that looks at the arguments after `sbt new` and determines whether it can resolve to a particular template. This is analogous to `resolvers` resolving a `ModuleID` from the Internet.

The `Giter8TemplateResolver` takes the first argument that does not start with a hyphen (-), and checks whether it looks like a GitHub repo or a git repo that ends in “.g8”. If it matches one of the patterns, it will pass the arguments to Giter8 to process.

To create your own template resolver, create a library that has `template-resolver` as a dependency:

```
val templateResolverApi = "org.scala-sbt" % "template-resolver" % "0.1"
```

and extend `TemplateResolver`, which is defined as:

```
package sbt.template;

/** A way of specifying template resolver.
 */
public interface TemplateResolver {
    /** Returns true if this resolver can resolve the given argument.
     */
    public boolean isDefined(String[] arguments);
    /** Resolve the given argument and run the template.
     */
    public void run(String[] arguments);
}
```

Publish the library to sbt community repo or Maven Central.

**templateResolverInfos** Next, create an sbt plugin that adds a `TemplateResolverInfo` to `templateResolverInfos`.

```
import Def.Setting
import Keys._

/** An experimental plugin that adds the ability for Giter8 templates to be resolved
 */
object Giter8TemplatePlugin extends AutoPlugin {
    override def requires = CorePlugin
    override def trigger = allRequirements

    override lazy val globalSettings: Seq[Setting[_]] =
```

```
Seq(
  templateResolverInfos +=
    TemplateResolverInfo(ModuleID("org.scala-sbt.sbt-giter8-resolver", "sbt-giter8-resolver", "sbtgiter8resolver.Giter8TemplateResolver")
  )
}
```

This indirecton allows template resolvers to have a classpath independent from the rest of the build.

## Cross building plugins

Like we are able to cross build against multiple Scala versions, we can cross build sbt 1.0 plugins while staying on sbt 0.13. This is useful because we can port one plugin at a time.

1. If the plugin depends on libraries, make sure there are Scala 2.12 artifacts for them.
2. Use the latest sbt 0.13.16.
3. Append the following settings to your plugin project (and any other sub-projects that it depends):

```
.settings(
  scalaVersion := "2.12.2",
  sbtVersion in Global := "1.0.0-RC2",
  scalaCompilerBridgeSource := {
    val sv = appConfiguration.value.provider.id.version
    ("org.scala-sbt" % "compiler-interface" % sv % "component").sources
  }
)
```

Hopefully the last step will be simplified using @jrudolph's sbt-cross-building in the future. If you run into problems upgrading a plugin, please report to [GitHub issue](#).

## How to...

See [Detailed Table of Contents](#) for the list of all the how-tos.

## Classpaths

### Include a new type of managed artifact on the classpath, such as `mar`

The `classpathTypes` setting controls the types of managed artifacts that are included on the classpath by default. To add a new type, such as `mar`,

```
classpathTypes += "mar"
```

### Get the classpath used for compilation

See the default types included by running `show classpathTypes` at the sbt prompt.

The `dependencyClasspath` task scoped to `Compile` provides the classpath to use for compilation. Its type is `Seq[Attributed[File]]`, which means that each entry carries additional metadata. The `files` method provides just the raw `Seq[File]` for the classpath. For example, to use the files for the compilation classpath in another task, :

```
example := {  
  val cp: Seq[File] = (dependencyClasspath in Compile).value.files  
  ...  
}
```

**Note:** This classpath does not include the class directory, which may be necessary for compilation in some situations.

### Get the runtime classpath, including the project's compiled classes

The `fullClasspath` task provides a classpath including both the dependencies and the products of project. For the runtime classpath, this means the main resources and compiled classes for the project as well as all runtime dependencies.

The type of a classpath is `Seq[Attributed[File]]`, which means that each entry carries additional metadata. The `files` method provides just the raw `Seq[File]` for the classpath. For example, to use the files for the runtime classpath in another task, :

```
example := {  
  val cp: Seq[File] = (fullClasspath in Runtime).value.files  
  ...  
}
```



### Get the test classpath, including the project's compiled test classes

The `fullClasspath` task provides a classpath including both the dependencies and the products of a project. For the test classpath, this includes the main and test resources and compiled classes for the project as well as all dependencies for testing.

The type of a classpath is `Seq[Attributed[File]]`, which means that each entry carries additional metadata. The `files` method provides just the raw `Seq[File]` for the classpath. For example, to use the files for the test classpath in another task, :

```
example := {  
  val cp: Seq[File] = (fullClasspath in Test).value.files  
  ...  
}
```

### Use packaged jars on classpaths instead of class directories

By default, `fullClasspath` includes a directory containing class files and resources for a project. This in turn means that tasks like `compile`, `test`, and `run` have these class directories on their classpath. To use the packaged artifact (such as a jar) instead, configure `exportJars` :

```
exportJars := true
```

This will use the result of `packageBin` on the classpath instead of the class directory.

**Note:** Specifically, `fullClasspath` is the concatenation of `dependencyClasspath` and `exportedProducts`. When `exportJars` is true, `exportedProducts` is the output of `packageBin`. When `exportJars` is false, `exportedProducts` is just `products`, which is by default the directory containing class files and resources.

### Get all managed jars for a configuration

The result of the `update` task has type `UpdateReport`, which contains the results of dependency resolution. This can be used to extract the files for specific types of artifacts in a specific configuration. For example, to get the jars and zips of dependencies in the `Compile` configuration, :

```
example := {
  val artifactTypes = Set("jar", "zip")
  val files: Seq[File] =
    Classpaths.managedJars(Compile, artifactTypes, update.value)
  ...
}
```

### Get the files included in a classpath

A classpath has type `Seq[Attributed[File]]`, which means that each entry carries additional metadata. The `files` method provides just the raw `Seq[File]` for the classpath. For example, :

```
val cp: Seq[Attributed[File]] = ...
val files: Seq[File] = cp.files
```

### Get the module and artifact that produced a classpath entry

A classpath has type `Seq[Attributed[File]]`, which means that each entry carries additional metadata. This metadata is in the form of an [AttributeMap](#). Useful keys for entries in the map are `artifact.key`, `moduleID.key`, and `analysis`. For example,

```
val classpath: Seq[Attributed[File]] = ???
for(entry <- classpath) yield {
  val art: Option[Artifact] = entry.get(artifact.key)
  val mod: Option[ModuleID] = entry.get(moduleID.key)
  val an: Option[inc.Analysis] = entry.get(analysis)
  ...
}
```

**Note:** Entries may not have some or all metadata. Only entries from source dependencies, such as internal projects, have an incremental compilation [Analysis](#). Only entries for managed dependencies have an [Artifact](#) and [ModuleID](#).

## Customizing paths

This page describes how to modify the default source, resource, and library directories and what files get included from them.

### Change the default Scala source directory

The directory that contains the main Scala sources is by default `src/main/scala`. For test Scala sources, it is `src/test/scala`. To change this, modify `scalaSource` in the `Compile` (for main sources) or `Test` (for test sources). For example,

```
scalaSource in Compile := baseDirectory.value / "src"
```

```
scalaSource in Test := baseDirectory.value / "test-src"
```

**Note:** The Scala source directory can be the same as the Java source directory.

### Change the default Java source directory

The directory that contains the main Java sources is by default `src/main/java`. For test Java sources, it is `src/test/java`. To change this, modify `javaSource` in the `Compile` (for main sources) or `Test` (for test sources).

For example,

```
javaSource in Compile := baseDirectory.value / "src"
```

```
javaSource in Test := baseDirectory.value / "test-src"
```

**Note:** The Scala source directory can be the same as the Java source directory.

### Change the default resource directory

The directory that contains the main resources is by default `src/main/resources`. For test resources, it is `src/test/resources`. To change this, modify `resourceDirectory` in either the `Compile` or `Test` configuration.

For example,

```
resourceDirectory in Compile := baseDirectory.value / "resources"
```

```
resourceDirectory in Test := baseDirectory.value / "test-resources"
```

## Change the default (unmanaged) library directory

The directory that contains the unmanaged libraries is by default `lib/`. To change this, modify `unmanagedBase`. This setting can be changed at the project level or in the `Compile`, `Runtime`, or `Test` configurations.

When defined without a configuration, the directory is the default directory for all configurations. For example, the following declares `jars/` as containing libraries:

```
unmanagedBase := baseDirectory.value / "jars"
```

When set for `Compile`, `Runtime`, or `Test`, `unmanagedBase` is the directory containing libraries for that configuration, overriding the default. For example, the following declares `lib/main/` to contain jars only for `Compile` and not for running or testing: :

```
unmanagedBase in Compile := baseDirectory.value / "lib" / "main"
```

## Disable using the project's base directory as a source directory

By default, sbt includes `.scala` files from the project's base directory as main source files. To disable this, configure `sourcesInBase`:

```
sourcesInBase := false
```

## Add an additional source directory

sbt collects `sources` from `unmanagedSourceDirectories`, which by default consists of `scalaSource` and `javaSource`. Add a directory to `unmanagedSourceDirectories` in the appropriate configuration to add a source directory. For example, to add `extra-src` to be an additional directory containing main sources,

```
unmanagedSourceDirectories in Compile += baseDirectory.value / "extra-src"
```

**Note:** This directory should only contain unmanaged sources, which are sources that are manually created and managed. See [Generating Files](#) for working with automatically generated sources.

## Add an additional resource directory

sbt collects `resources` from `unmanagedResourceDirectories`, which by default consists of `resourceDirectory`. Add a directory to `unmanagedResourceDirectories` in the appropriate configuration to add another resource directory. For example, to add `extra-resources` to be an additional directory containing main resources,

```
unmanagedResourceDirectories in Compile += baseDirectory.value / "extra-resources"
```

**Note:** This directory should only contain unmanaged resources, which are resources that are manually created and managed. See [Generating Files](#) for working with automatically generated resources.

## Include/exclude files in the source directory

When sbt traverses `unmanagedSourceDirectories` for sources, it only includes directories and files that match `includeFilter` and do not match `excludeFilter`. `includeFilter` and `excludeFilter` have type `java.io.FileFilter` and sbt [provides some useful combinators](#) for constructing a `FileFilter`. For example, in addition to the default hidden files exclusion, the following also ignores files containing `impl` in their name,

```
excludeFilter in unmanagedSources := HiddenFileFilter || "*impl*"
```

To have different filters for main and test libraries, configure `Compile` and `Test` separately:

```
includeFilter in (Compile, unmanagedSources) := "*.scala" || "*.java"
```

```
includeFilter in (Test, unmanagedSources) := HiddenFileFilter || "*impl*"
```

**Note:** By default, sbt includes `.scala` and `.java` sources, excluding hidden files.

## Include/exclude files in the resource directory

When sbt traverses `unmanagedResourceDirectories` for resources, it only includes directories and files that match `includeFilter` and do not match `excludeFilter`. `includeFilter` and `excludeFilter` have type `java.io.FileFilter` and sbt [provides some useful combinators](#) for constructing a `FileFilter`. For example, in addition to the default hidden files exclusion, the following also ignores files containing `impl` in their name,

```
excludeFilter in unmanagedSources := HiddenFileFilter || "*impl*
```

To have different filters for main and test libraries, configure `Compile` and `Test` separately:

```
includeFilter in (Compile, unmanagedSources) := "*.txt"
```

```
includeFilter in (Test, unmanagedSources) := "*.html"
```

**Note:** By default, sbt includes all files that are not hidden.

### Include only certain (unmanaged) libraries

When sbt traverses `unmanagedBase` for resources, it only includes directories and files that match `includeFilter` and do not match `excludeFilter`. `includeFilter` and `excludeFilter` have type `java.io.FileFilter` and sbt [provides some useful combinators](#) for constructing a `FileFilter`. For example, in addition to the default hidden files exclusion, the following also ignores zips,

```
excludeFilter in unmanagedJars := HiddenFileFilter || "*.zip"
```

To have different filters for main and test libraries, configure `Compile` and `Test` separately:

```
includeFilter in (Compile, unmanagedJars) := "*.jar"
```

```
includeFilter in (Test, unmanagedJars) := "*.jar" || "*.zip"
```

**Note:** By default, sbt includes jars, zips, and native dynamic libraries, excluding hidden files.

## Generating files

sbt provides standard hooks for adding source and resource generation tasks.

### Generate sources

A source generation task should generate sources in a subdirectory of `sourceManaged` and return a sequence of files generated. The signature of a source generation function (that becomes a basis for a task) is usually as follows:

```
def makeSomeSources(base: File): Seq[File]
```

The key to add the task to is called `sourceGenerators`. Because we want to add the task, and not the value after its execution, we use `taskValue` instead of the usual `value`. `sourceGenerators` should be scoped according to whether the generated files are main (`Compile`) or test (`Test`) sources. This basic structure looks like:

```
sourceGenerators in Compile += <task of type Seq[File]>.taskValue
```

For example, assuming a method `def makeSomeSources(base: File): Seq[File]`,

```
sourceGenerators in Compile += Def.task {  
  makeSomeSources((sourceManaged in Compile).value / "demo")  
}.taskValue
```

As a specific example, the following source generator generates `Test.scala` application object that once executed, prints "Hi" to the console:

```
sourceGenerators in Compile += Def.task {  
  val file = (sourceManaged in Compile).value / "demo" / "Test.scala"  
  IO.write(file, """"object Test extends App { println("Hi") }""")  
  Seq(file)  
}.taskValue
```

Executing `run` will print "Hi".

```
> run  
[info] Running Test  
Hi
```

Change `Compile` to `Test` to make it a test source. For efficiency, you would only want to generate sources when necessary and not every run.

By default, generated sources are not included in the packaged source artifact. To do so, add them as you would other mappings. See [Adding files to a package](#). A source generator can return both Java and Scala sources mixed together in the same sequence. They will be distinguished by their extension later.

## Generate resources

A resource generation task should generate resources in a subdirectory of `resourceManaged` and return a sequence of files generated. Like a source generation function, the signature of a resource generation function (that becomes a basis for a task) is usually as follows:

```
def makeSomeResources(base: File): Seq[File]
```

The key to add the task to is called `resourceGenerators`. Because we want to add the task, and not the value after its execution, we use `taskValue` instead of the usual `value`. It should be scoped according to whether the generated files are main (`Compile`) or test (`Test`) resources. This basic structure looks like:

```
resourceGenerators in Compile += <task of type Seq[File]>.taskValue
```

For example, assuming a method `def makeSomeResources(base: File): Seq[File]`,

```
resourceGenerators in Compile += Def.task {  
  makeSomeResources((resourceManaged in Compile).value / "demo")  
}.taskValue
```

Executing `run` (or `package`, not `compile`) will add a file `demo` to `resourceManaged`, which is `target/scala-*/resource_managed`. By default, generated resources are not included in the packaged source artifact. To do so, add them as you would other mappings. See [Adding files to a package](#).

As a specific example, the following generates a properties file `myapp.properties` containing the application name and version:

```
resourceGenerators in Compile += Def.task {  
  val file = (resourceManaged in Compile).value / "demo" / "myapp.properties"  
  val contents = "name=%s\nversion=%s".format(name.value, version.value)  
  IO.write(file, contents)  
  Seq(file)  
}.taskValue
```

Change `Compile` to `Test` to make it a test resource. Normally, you would only want to generate resources when necessary and not every run.



## Inspect the build

### Show or search help for a command, task, or setting

The **help** command is used to show available commands and search the help for commands, tasks, or settings. If run without arguments, **help** lists the available commands.

```
> help
```

<b>help</b>	Displays this help message or prints detailed help on requested commands (run 'help <command>').
<b>about</b>	Displays basic information about sbt and the build.
<b>reload</b>	(Re)loads the project in the current directory
...	

```
> help compile
```

If the argument passed to **help** is the name of an existing command, setting or task, the help for that entity is displayed. Otherwise, the argument is interpreted as a regular expression that is used to search the help of all commands, settings and tasks.

The **tasks** command is like **help**, but operates only on tasks. Similarly, the **settings** command only operates on settings.

See also **help help**, **help tasks**, and **help settings**.

### List available tasks

The **tasks** command, without arguments, lists the most commonly used tasks. It can take a regular expression to search task names and descriptions. The verbosity can be increased to show or search less commonly used tasks. See **help tasks** for details.

The **settings** command, without arguments, lists the most commonly used settings. It can take a regular expression to search setting names and descriptions. The verbosity can be increased to show or search less commonly used settings. See **help settings** for details.

### List available settings

The **inspect** command displays several pieces of information about a given setting or task, including the dependencies of a task/setting as well as the tasks/settings that depend on the it. For example,

```
> inspect test:compile
...
[info] Dependencies:
[info]   test:compile::compileInputs
[info]   test:compile::streams
[info] Reverse dependencies:
[info]   test:definedTestNames
[info]   test:definedSbtPlugins
[info]   test:printWarnings
[info]   test:discoveredMainClasses
[info]   test:definedTests
[info]   test:exportedProducts
[info]   test:products
...
```

See the [Inspecting Settings](#) page for details.

### Display tree of setting/task dependencies

In addition to displaying immediate forward and reverse dependencies as described in the previous section, the `inspect` command can display the full dependency tree for a task or setting. For example,

```
> inspect tree clean
[info] *:clean = Task[Unit]
[info] +-*:cleanFiles = List(<project>/lib_managed, <project>/target)
[info] | +-{.}/*:managedDirectory = lib_managed
[info] | +-*:target = target
[info] |   +-*:baseDirectory = <project>
[info] |   +-*:thisProject = Project(id: demo, base: <project>, ...
[info] |
[info] +-*:cleanKeepFiles = List(<project>/target/.history)
[info]   +-*:history = Some(<project>/target/.history)
...
```

For each task, `inspect tree` show the type of the value generated by the task. For a setting, the `toString` of the setting is displayed. See the [Inspecting Settings](#) page for details on the `inspect` command.

## Display the description and type of a setting or task

While the `help`, `settings`, and `tasks` commands display a description of a task, the `inspect` command also shows the type of a setting or task and the value of a setting. For example:

```

> inspect update
[info] Task: sbt.UpdateReport
[info] Description:
[info] Resolves and optionally retrieves dependencies, producing a report.
...

> inspect scalaVersion
[info] Setting: java.lang.String = 2.9.2
[info] Description:
[info] The version of Scala used for building.
...

```

See the [Inspecting Settings](#) page for details.

### Display the delegation chain of a setting or task

See the [Inspecting Settings](#) page for details.

### Display related settings or tasks

The `inspect` command can help find scopes where a setting or task is defined. The following example shows that different options may be specified to the Scala for testing and API documentation generation.

```

> inspect scalacOptions
...
[info] Related:
[info]   compile:doc::scalacOptions
[info]   test:scalacOptions
[info]   */*:scalacOptions
[info]   test:doc::scalacOptions

```

See the [Inspecting Settings](#) page for details.

### Show the list of projects and builds

The `projects` command displays the currently loaded projects. The projects are grouped by their enclosing build and the current project is indicated by an asterisk. For example,

```

> projects
[info] In file:/home/user/demo/
[info]   * parent
[info]     sub
[info] In file:/home/user/dep/
[info]   sample

```

## Show the current session (temporary) settings

`session list` displays the settings that have been added at the command line for the current project. For example,

```
> session list
  1. maxErrors := 5
  2. scalacOptions += "-explaintypes"
```

`session list-all` displays the settings added for all projects. For details, see `help session`.

## Show basic information about sbt and the current build

```
> about
[info] This is sbt 0.12.0
[info] The current project is {file:~/code/sbt.github.com/}default
[info] The current project is built against Scala 2.9.2
[info] Available Plugins: com.jsuereth.ghpages.GhPages, com.jsuereth.git.GitPlugin, com.jsuereth.ghpages.GhPages, com.jsuereth.git.GitPlugin, com.jsuereth.ghpages.GhPages, com.jsuereth.git.GitPlugin
[info] sbt, sbt plugins, and build definitions are using Scala 2.9.2
```

## Show the value of a setting

The `inspect` command shows the value of a setting as part of its output, but the `show` command is dedicated to this job. It shows the output of the setting provided as an argument. For example,

```
> show organization
[info] com.github.sbt
```

The `show` command also works for tasks, described next.

## Show the result of executing a task

```
> show update
... <output of update> ...
[info] Update report:
[info] Resolve time: 122 ms, Download time: 5 ms, Download size: 0 bytes
[info] compile:
[info]     org.scala-lang:scala-library:2.9.2: ...
```

The **show** command will execute the task provided as an argument and then print the result. Note that this is different from the behavior of the **inspect** command (described in other sections), which does not execute a task and thus can only display its type and not its generated value.

```
> show compile:dependencyClasspath
...
[info] ArrayBuffer(Attributed(~/.sbt/0.12.0/boot/scala-2.9.2/lib/scala-library.jar))
```

### Show the classpath used for compilation or testing

For the test classpath,

```
> show test:dependencyClasspath
...
[info] ArrayBuffer(Attributed(~/.code/sbt.github.com/target/scala-2.9.2/classes), Attributed(
```

### Show the main classes detected in a project

sbt detects the classes with public, static main methods for use by the **run** method and to tab-complete the **runMain** method. The **discoveredMainClasses** task does this discovery and provides as its result the list of class names. For example, the following shows the main classes discovered in the main sources:

```
> show compile:discoveredMainClasses
... <runs compile if out of date> ...
[info] List(org.example.Main)
```

### Show the test classes detected in a project

sbt detects tests according to fingerprints provided by test frameworks. The **definedTestNames** task provides as its result the list of test names detected in this way. For example,

```
> show test:definedTestNames
... < runs test:compile if out of date > ...
[info] List(org.example.TestA, org.example.TestB)
```

## Interactive mode

### Use tab completion

By default, sbt's interactive mode is started when no commands are provided on the command line or when the `shell` command is invoked.

As the name suggests, tab completion is invoked by hitting the tab key. Suggestions are provided that can complete the text entered to the left of the current cursor position. Any part of the suggestion that is unambiguous is automatically appended to the current text. Commands typically support tab completion for most of their syntax.

As an example, entering `tes` and hitting tab:

```
> tes<TAB>
```

results in sbt appending a `t`:

```
> test
```

To get further completions, hit tab again:

```
> test<TAB>
testFrameworks  testListeners  testLoader      testOnly      testOptions  test:
```

Now, there is more than one possibility for the next character, so sbt prints the available options. We will select `testOnly` and get more suggestions by entering the rest of the command and hitting tab twice:

```
> testOnly<TAB><TAB>
--          sbt.DagSpecification  sbt.EmptyRelationTest  sbt.KeyTest          sbt.Relati
```

The first tab inserts an unambiguous space and the second suggests names of tests to run. The suggestion of `--` is for the separator between test names and options provided to the test framework. The other suggestions are names of test classes for one of sbt's modules. Test name suggestions require tests to be compiled first. If tests have been added, renamed, or removed since the last test compilation, the completions will be out of date until another successful compile.

### Show more tab completion suggestions

Some commands have different levels of completion. Hitting tab multiple times increases the verbosity of completions. (Presently, this feature is only used by the `set` command.)

## Modify the default JLine keybindings

JLine, used by both Scala and sbt, uses a configuration file for many of its keybindings. The location of this file can be changed with the system property `jline.keybindings`. The default keybindings file is included in the sbt launcher and may be used as a starting point for customization.

## Configure the prompt string

By default, sbt only displays `>` to prompt for a command. This can be changed through the `shellPrompt` setting, which has type `State => String`. `State` contains all state for sbt and thus provides access to all build information for use in the prompt string.

Examples:

```
// set the prompt (for this build) to include the project id.
shellPrompt in ThisBuild := { state => Project.extract(state).currentRef.project + "> " }

// set the prompt (for the current project) to include the username
shellPrompt := { state => System.getProperty("user.name") + "> " }
```

## Use history

Interactive mode remembers history even if you exit sbt and restart it. The simplest way to access history is to press the up arrow key to cycle through previously entered commands. Use `Ctrl+r` to incrementally search history backwards. The following commands are supported:

- `!` Show history command help.
- `!!` Execute the previous command again.
- `!:` Show all previous commands.
- `!:n` Show the last `n` commands.
- `!n` Execute the command with index `n`, as shown by the `!:` command.
- `!-n` Execute the `n`th command before this one.
- `!string` Execute the most recent command starting with `'string'`
- `!?string` Execute the most recent command containing `'string'`

## Change the location of the interactive history file

By default, interactive history is stored in the `target/` directory for the current project (but is not removed by a `clean`). History is thus separate for each subproject. The location can be changed with the `historyPath` setting, which

has type `Option[File]`. For example, history can be stored in the root directory for the project instead of the output directory:

```
historyPath := Some(baseDirectory.value / ".history")
```

The history path needs to be set for each project, since sbt will use the value of `historyPath` for the current project (as selected by the `project` command).

### Use the same history for all projects

The previous section describes how to configure the location of the history file. This setting can be used to share the interactive history among all projects in a build instead of using a different history for each project. The way this is done is to set `historyPath` to be the same file, such as a file in the root project's `target/` directory:

```
historyPath :=  
  Some( (target in LocalRootProject).value / ".history")
```

The `in LocalRootProject` part means to get the output directory for the root project for the build.

### Disable interactive history

If, for whatever reason, you want to disable history, set `historyPath` to `None` in each project it should be disabled in:

```
> historyPath := None
```

### Run commands before entering interactive mode

Interactive mode is implemented by the `shell` command. By default, the `shell` command is run if no commands are provided to sbt on the command line. To run commands before entering interactive mode, specify them on the command line followed by `shell`. For example,

```
$ sbt clean compile shell
```

This runs `clean` and then `compile` before entering the interactive prompt. If either `clean` or `compile` fails, sbt will exit without going to the prompt. To enter the prompt whether or not these initial commands succeed, prepend `-shell`, which means to run `shell` if any command fails. For example,

```
$ sbt -shell clean compile shell
```



## Configure and use logging

### View the logging output of the previously executed command

When a command is run, more detailed logging output is sent to a file than to the screen (by default). This output can be recalled for the command just executed by running `last`.

For example, the output of `run` when the sources are uptodate is:

```
> run
[info] Running A
Hi!
[success] Total time: 0 s, completed Feb 25, 2012 1:00:00 PM
```

The details of this execution can be recalled by running `last`:

```
> last
[debug] Running task... Cancelable: false, max worker threads: 4, check cycles: false
[debug]
[debug] Initial source changes:
[debug]   removed: Set()
[debug]   added: Set()
[debug]   modified: Set()
[debug] Removed products: Set()
[debug] Modified external sources: Set()
[debug] Modified binary dependencies: Set()
[debug] Initial directly invalidated sources: Set()
[debug]
[debug] Sources indirectly invalidated by:
[debug]   product: Set()
[debug]   binary dep: Set()
[debug]   external source: Set()
[debug] Initially invalidated: Set()
[debug] Copy resource mappings:
[debug]
[info] Running A
[debug] Starting sandboxed run...
[debug] Waiting for threads to exit or System.exit to be called.
[debug]   Classpath:
[debug]     /tmp/e/target/scala-2.9.2/classes
[debug]     /tmp/e/.sbt/0.12.0/boot/scala-2.9.2/lib/scala-library.jar
[debug] Waiting for thread runMain to exit
[debug]   Thread runMain exited.
[debug] Interrupting remaining threads (should be all daemons).
```

```
[debug] Sandboxed run complete..  
[debug] Exited with code 0  
[success] Total time: 0 s, completed Jan 1, 2012 1:00:00 PM
```

Configuration of the logging level for the console and for the backing file are described in following sections.

### View the previous logging output of a specific task

When a task is run, more detailed logging output is sent to a file than to the screen (by default). This output can be recalled for a specific task by running `last <task>`. For example, the first time `compile` is run, output might look like:

```
> compile  
[info] Updating {file:/.../demo/}example...  
[info] Resolving org.scala-lang#scala-library;2.9.2 ...  
[info] Done updating.  
[info] Compiling 1 Scala source to .../demo/target/scala-2.9.2/classes...  
[success] Total time: 0 s, completed Jun 1, 2012 1:11:11 PM
```

The output indicates that both dependency resolution and compilation were performed. The detailed output of each of these may be recalled individually. For example,

```
> last compile  
[debug]  
[debug] Initial source changes:  
[debug]   removed:Set()  
[debug]   added: Set(/home/mark/tmp/a/b/A.scala)  
[debug]   modified: Set()  
...
```

and:

```
> last update  
[info] Updating {file:/.../demo/}example...  
[debug] post 1.3 ivy file: using exact as default matcher  
[debug] :: resolving dependencies :: example#example_2.9.2;0.1-SNAPSHOT  
[debug]   confs: [compile, runtime, test, provided, optional, compile-internal, runtime-internal]  
[debug]   validate = true  
[debug]   refresh = false  
[debug] resolving dependencies for configuration 'compile'  
...
```

## Show warnings from the previous compilation

The Scala compiler does not print the full details of warnings by default. Compiling code that uses the deprecated `error` method from `Predef` might generate the following output:

```
> compile
[info] Compiling 1 Scala source to <...>/classes...
[warn] there were 1 deprecation warnings; re-run with -deprecation for details
[warn] one warning found
```

The details aren't provided, so it is necessary to add `-deprecation` to the options passed to the compiler (`scalacOptions`) and recompile. An alternative when using Scala 2.10 and later is to run `printWarnings`. This task will display all warnings from the previous compilation. For example,

```
> printWarnings
[warn] A.scala:2: method error in object Predef is deprecated: Use sys.error(message) instead
[warn]   def x = error("Failed.")
[warn]             ^
```

## Change the logging level globally

The quickest way to change logging levels is by using the `error`, `warn`, `info`, or `debug` commands. These set the default logging level for commands and tasks. For example,

```
> warn
```

will by default show only warnings and errors. To set the logging level before any commands are executed on startup, use `--` before the logging level. For example,

```
$ sbt --warn
> compile
[warn] there were 2 feature warning(s); re-run with -feature for details
[warn] one warning found
[success] Total time: 4 s, completed ...
>
```

The logging level can be overridden at a finer granularity, which is described next.

## Change the logging level for a specific task, configuration, or project

The amount of logging is controlled by the `logLevel` setting, which takes values from the `Level` enumeration. Valid values are `Error`, `Warn`, `Info`, and `Debug` in order of increasing verbosity. The logging level may be configured globally, as described in the previous section, or it may be applied to a specific project, configuration, or task. For example, to change the logging level for compilation to only show warnings and errors:

```
> set logLevel in compile := Level.Warn
```

To enable debug logging for all tasks in the current project,

```
> set logLevel := Level.Warn
```

A common scenario is that after running a task, you notice that you need more information than was shown by default. A `logLevel` based solution typically requires changing the logging level and running a task again. However, there are two cases where this is unnecessary. First, warnings from a previous compilation may be displayed using `printWarnings` for the main sources or `test:printWarnings` for test sources. Second, output from the previous execution is available either for a single task or for in its entirety. See the section on `printWarnings` and the sections on previous output.

## Configure printing of stack traces

By default, sbt hides the stack trace of most exceptions thrown during execution. It prints a message that indicates how to display the exception. However, you may want to show more of stack traces by default.

The setting to configure is `traceLevel`, which is a setting with an `Int` value. When `traceLevel` is set to a negative value, no stack traces are shown. When it is zero, the stack trace is displayed up to the first sbt stack frame. When positive, the stack trace is shown up to that many stack frames.

For example, the following configures sbt to show stack traces up to the first sbt frame:

```
> set every traceLevel := 0
```

The `every` part means to override the setting in all scopes. To change the trace printing behavior for a single project, configuration, or task, scope `traceLevel` appropriately:

```
> set traceLevel in Test := 5
> set traceLevel in update := 0
> set traceLevel in ThisProject := -1
```

## Print the output of tests immediately instead of buffering

By default, sbt buffers the logging output of a test until the whole class finishes. This is so that output does not get mixed up when executing in parallel. To disable buffering, set the `logBuffered` setting to false:

```
logBuffered := false
```

## Add a custom logger

The setting `extraLoggers` can be used to add custom loggers. A custom logger should implement `[AbstractLogger]`. `extraLoggers` is a function `ScopedKey[_] => Seq[AbstractLogger]`. This means that it can provide different logging based on the task that requests the logger.

```
extraLoggers := {  
  val currentFunction = extraLoggers.value  
  (key: ScopedKey[_]) => {  
    myCustomLogger(key) +: currentFunction(key)  
  }  
}
```

Here, we take the current function `currentFunction` for the setting and provide a new function. The new function prepends our custom logger to the ones provided by the old function.

## Log messages in a task

The special task `streams` provides per-task logging and I/O via a `Streams` instance. To log, a task uses the `log` member from the `streams` task. Calling `log` provides a `Logger`.

```
:  
  
myTask := {  
  val log = streams.value.log  
  log.warn("A warning.")  
}
```

## Log messages in a setting

Since settings cannot reference tasks, the special task `streams` cannot be used to provide logging during setting initialization. The recommended way is to use `sLog`. Calling `sLog.value` provides a `Logger`.

```
mySetting := {  
  val log = sLog.value  
  log.warn("A warning.")  
}
```

## Project metadata

### Set the project name

A project should define **name** and **version**. These will be used in various parts of the build, such as the names of generated artifacts. Projects that are published to a repository should also override **organization**.

```
name := "Your project name"
```

For published projects, this name is normalized to be suitable for use as an artifact name and dependency ID. This normalized name is stored in **normalizedName**.

### Set the project version

```
version := "1.0"
```

### Set the project organization

```
organization := "org.example"
```

By convention, this is a reverse domain name that you own, typically one specific to your project. It is used as a namespace for projects.

A full/formal name can be defined in the **organizationName** setting. This is used in the generated pom.xml. If the organization has a web site, it may be set in the **organizationHomepage** setting. For example:

```
organizationName := "Example, Inc."
```

```
organizationHomepage := Some(url("http://example.org"))
```

### Set the project's homepage and other metadata

```
homepage := Some(url("http://scala-sbt.org"))

startYear := Some(2008)

description := "A build tool for Scala."

licenses += "GPLv2" -> url("https://www.gnu.org/licenses/gpl-2.0.html")
```

### Configure packaging

#### Use the packaged jar on classpaths instead of class directory

By default, a project exports a directory containing its resources and compiled class files. Set `exportJars` to true to export the packaged jar instead. For example,

```
exportJars := true
```

The jar will be used by `run`, `test`, `console`, and other tasks that use the full classpath.

#### Add manifest attributes

By default, sbt constructs a manifest for the binary package from settings such as `organization` and `mainClass`. Additional attributes may be added to the `packageOptions` setting scoped by the configuration and package task.

Main attributes may be added with `Package.ManifestAttributes`. There are two variants of this method, once that accepts repeated arguments that map an attribute of type `java.util.jar.Attributes.Name` to a String value and other that maps attribute names (type String) to the String value.

For example,

```
packageOptions in (Compile, packageBin) +=
  Package.ManifestAttributes( java.util.jar.Attributes.Name.SEALED -> "true" )
```

Other attributes may be added with `Package.JarManifest`.

```
packageOptions in (Compile, packageBin) += {
  import java.util.jar.{Attributes, Manifest}
  val manifest = new Manifest
```

```

    manifest.getAttributes("foo/bar/").put(Attributes.Name.SEALED, "false")
    Package.JarManifest( manifest )
}

```

Or, to read the manifest from a file:

```

packageOptions in (Compile, packageBin) += {
    val file = new java.io.File("META-INF/MANIFEST.MF")
    val manifest = Using.fileInputStream(file)( in => new java.util.jar.Manifest(in) )
    Package.JarManifest( manifest )
}

```

## Change the file name of a package

The `artifactName` setting controls the name of generated packages. See the [Artifacts](#) page for details.

## Modify the contents of the package

The contents of a package are defined by the `mappings` task, of type `Seq[(File,String)]`. The `mappings` task is a sequence of mappings from a file to include in the package to the path in the package. See [Mapping Files](#) for convenience functions for generating these mappings. For example, to add the file `in/example.txt` to the main binary jar with the path “`out/example.txt`”,

```

mappings in (Compile, packageBin) += {
    (baseDirectory.value / "in" / "example.txt") -> "out/example.txt"
}

```

Note that `mappings` is scoped by the configuration and the specific package task. For example, the mappings for the test source package are defined by the `mappings in (Test, packageSrc)` task.

## Running commands

### Pass arguments to a command or task in batch mode

sbt interprets each command line argument provided to it as a command together with the command’s arguments. Therefore, to run a command that takes arguments in batch mode, quote the command using double quotes, and its arguments. For example,

```
$ sbt "project X" clean "~ compile"
```



### Provide multiple commands to run consecutively

Multiple commands can be scheduled at once by prefixing each command with a semicolon. This is useful for specifying multiple commands where a single command string is accepted. For example, the syntax for triggered execution is `~ <command>`. To have more than one command run for each triggering, use semicolons. For example, the following runs `clean` and then `compile` each time a source file changes:

```
> ~ ;clean;compile
```

### Read commands from a file

The `<` command reads commands from the files provided to it as arguments. Run `help <` at the sbt prompt for details.

### Define an alias for a command or task

The `alias` command defines, removes, and displays aliases for commands. Run `help alias` at the sbt prompt for details.

Example usage:

```
> alias a=about
> alias
  a = about
> a
[info] This is sbt ...
> alias a=
> alias
> a
[error] Not a valid command: a ...
```

### Quickly evaluate a Scala expression

The `eval` command compiles and runs the Scala expression passed to it as an argument. The result is printed along with its type. For example,

```
> eval 2+2
4: Int
```

Variables defined by an `eval` are not visible to subsequent `evals`, although changes to system properties persist and affect the JVM that is running sbt. Use the Scala REPL (`console` and related commands) for full support for evaluating Scala code interactively.

## Configure and use Scala

### Set the Scala version used for building the project

The `scalaVersion` configures the version of Scala used for compilation. By default, sbt also adds a dependency on the Scala library with this version. See the next section for how to disable this automatic dependency. If the Scala version is not specified, the version sbt was built against is used. It is recommended to explicitly specify the version of Scala.

For example, to set the Scala version to “2.11.1”,

```
scalaVersion := "2.11.1"
```

### Disable the automatic dependency on the Scala library

sbt adds a dependency on the Scala standard library by default. To disable this behavior, set the `autoScalaLibrary` setting to false.

```
autoScalaLibrary := false
```

### Temporarily switch to a different Scala version

To set the Scala version in all scopes to a specific value, use the `++` command. For example, to temporarily use Scala 2.10.4, run:

```
> ++ 2.10.4
```

### Use a local Scala installation for building a project

Defining the `scalaHome` setting with the path to the Scala home directory will use that Scala installation. sbt still requires `scalaVersion` to be set when a local Scala version is used. For example,

```
scalaVersion := "2.10.0-local"
```

```
scalaHome := Some(file("/path/to/scala/home/"))
```

### Build a project against multiple Scala versions

See [cross building](#).

### **Enter the Scala REPL with a project's dependencies on the classpath, but not the compiled project classes**

The `consoleQuick` action retrieves dependencies and puts them on the classpath of the Scala REPL. The project's sources are not compiled, but sources of any source dependencies are compiled. To enter the REPL with test dependencies on the classpath but without compiling test sources, run `test:consoleQuick`. This will force compilation of main sources.

### **Enter the Scala REPL with a project's dependencies and compiled code on the classpath**

The `console` action retrieves dependencies and compiles sources and puts them on the classpath of the Scala REPL. To enter the REPL with test dependencies and compiled test sources on the classpath, run `test:console`.

### **Enter the Scala REPL with plugins and the build definition on the classpath**

```
> consoleProject
```

For details, see the [consoleProject](#) page.

### **Define the initial commands evaluated when entering the Scala REPL**

Set `initialCommands` in `console` to set the initial statements to evaluate when `console` and `consoleQuick` are run. To configure `consoleQuick` separately, use `initialCommands` in `consoleQuick`. For example,

```
initialCommands in console := """println("Hello from console")"""

initialCommands in consoleQuick := """println("Hello from consoleQuick")"""
```

The `consoleProject` command is configured separately by `initialCommands` in `consoleProject`. It does not use the value from `initialCommands` in `console` by default. For example,

```
initialCommands in consoleProject := """println("Hello from consoleProject")"""
```

## Define the commands evaluated when exiting the Scala REPL

Set `cleanupCommands` in `console` to set the statements to evaluate after exiting the Scala REPL started by `console` and `consoleQuick`. To configure `consoleQuick` separately, use `cleanupCommands` in `consoleQuick`. For example,

```
cleanupCommands in console := """println("Bye from console")"""
```

```
cleanupCommands in consoleQuick := """println("Bye from consoleQuick")"""
```

The `consoleProject` command is configured separately by `cleanupCommands` in `consoleProject`. It does not use the value from `cleanupCommands` in `console` by default. For example,

```
cleanupCommands in consoleProject := """println("Bye from consoleProject")"""
```

## Use the Scala REPL from project code

sbt runs tests in the same JVM as sbt itself and Scala classes are not in the same class loader as the application classes. This is also the case in `console` and when `run` is not forked. Therefore, when using the Scala interpreter, it is important to set it up properly to avoid an error message like:

```
Failed to initialize compiler: class scala.runtime.VolatileBooleanRef not found.
** Note that as of 2.8 scala does not assume use of the java classpath.
** For the old behavior pass -usejavacp to scala, or if using a Settings
** object programmatically, settings.usejavacp.value = true.
```

The key is to initialize the Settings for the interpreter using *embeddedDefaults*. For example:

```
val settings = new Settings
settings.embeddedDefaults[MyType]
val interpreter = new Interpreter(settings, ...)
```

Here, `MyType` is a representative class that should be included on the interpreter's classpath and in its application class loader. For more background, see the [original proposal](#) that resulted in *embeddedDefaults* being added.

Similarly, use a representative class as the type argument when using the *break* and *breakIf* methods of *ILoop*, as in the following example:

```
def x(a: Int, b: Int) = {
  import scala.tools.nsc.interpreter.ILoop
  ILoop.breakIf[MyType](a != b, "a" -> a, "b" -> b )
}
```

## Generate API documentation

### Select javadoc or scaladoc

sbt will run `javadoc` if there are only Java sources in the project. If there are any Scala sources, sbt will run `scaladoc`. (This situation results from `scaladoc` not processing Javadoc comments in Java sources nor linking to Javadoc.)

### Set the options used for generating scaladoc independently of compilation

Scope `scalacOptions` to the `doc` task to configure `scaladoc`. Use `:=` to definitively set the options without appending to the options for `compile`. Scope to `Compile` for main sources or to `Test` for test sources. For example,

```
scalacOptions in (Compile,doc) := Seq("-groups", "-implicits")
```

### Add options for scaladoc to the compilation options

Scope `scalacOptions` to the `doc` task to configure `scaladoc`. Use `+=` or `++=` to append options to the base options. To append a single option, use `+=`. To append a `Seq[String]`, use `++=`. Scope to `Compile` for main sources or to `Test` for test sources. For example,

```
scalacOptions in (Compile,doc) += Seq("-groups", "-implicits")
```

### Set the options used for generating javadoc independently of compilation

Scope `javacOptions` to the `doc` task to configure `javadoc`. Use `:=` to definitively set the options without appending to the options for `compile`. Scope to `Compile` for main sources or to `Test` for test sources.

### Add options for javadoc to the compilation options

Scope `javacOptions` to the `doc` task to configure `javadoc`. Use `+=` or `++=` to append options to the base options. To append a single option, use `+=`. To append a `Seq[String]`, use `++=`. Scope to `Compile` for main sources or to `Test` for test sources. For example,

```
javacOptions in (Compile,doc) += Seq("-notimestamp", "-linksource")
```

### Enable automatic linking to the external Scaladoc of managed dependencies

Set `autoAPIMappings := true` for `sbt` to tell `scaladoc` where it can find the API documentation for managed dependencies. This requires that dependencies have this information in its metadata and you are using `scaladoc` for Scala 2.10.2 or later.

### Enable manual linking to the external Scaladoc of managed dependencies

Add mappings of type `(File, URL)` to `apiMappings` to manually tell `scaladoc` where it can find the API documentation for dependencies. (This requires `scaladoc` for Scala 2.10.2 or later.) These mappings are used in addition to `autoAPIMappings`, so this manual configuration is typically done for unmanaged dependencies. The `File` key is the location of the dependency as passed to the classpath. The `URL` value is the base URL of the API documentation for the dependency. For example,

```
apiMappings += (
  (unmanagedBase.value / "a-library.jar") ->
    url("https://example.org/api/")
)
```

### Define the location of API documentation for a library

Set `apiURL` to define the base URL for the Scaladocs for your library. This will enable clients of your library to automatically link against the API documentation using `autoAPIMappings`. (This only works for Scala 2.10.2 and later.) For example,

```
apiURL := Some(url("https://example.org/api/"))
```

This information will get included in a property of the published `pom.xml`, where it can be automatically consumed by `sbt`.

## Triggered execution

### Run a command when sources change

You can make a command run when certain files change by prefixing the command with `~`. Monitoring is terminated when `enter` is pressed. This triggered

execution is configured by the `watch` setting, but typically the basic settings `watchSources` and `pollInterval` are modified as described in later sections.

The original use-case for triggered execution was continuous compilation:

```
> ~ test:compile  
  
> ~ compile
```

You can use the triggered execution feature to run any command or task, however. The following will poll for changes to your source code (main or test) and run `testOnly` for the specified test.

```
> ~ testOnly example.TestA
```

### Run multiple commands when sources change

The command passed to `~` may be any command string, so multiple commands may be run by separating them with a semicolon. For example,

```
> ~ ;a ;b
```

This runs `a` and then `b` when sources change.

### Configure the sources that are checked for changes

- `watchSources` defines the files for a single project that are monitored for changes. By default, a project watches resources and Scala and Java sources.
- `watchTransitiveSources` then combines the `watchSources` for the current project and all execution and classpath dependencies (see [.scala build definition](#) for details on inter-project dependencies).

To add the file `demo/example.txt` to the files to watch,

```
watchSources += baseDirectory.value / "demo" / "examples.txt"
```

### Set the time interval between checks for changes to sources

`pollInterval` selects the interval between polling for changes in milliseconds. The default value is 500 ms. To change it to 1 s,

```
pollInterval := 1000 // in ms
```

## Define Custom Tasks

### Define a Task that runs tests in specific sub-projects

Consider a hypothetical multi-build project with 3 subprojects. The following defines a task `myTestTask` that will run the `test` Task in specific subprojects `core` and `tools` but not `client`:

```
lazy val core = project.in(file("./core"))

lazy val tools = project.in(file("./tools"))

lazy val client = project.in(file("./client"))

lazy val myTestTask = TaskKey[Unit]("my-test-task")

myTestTask <=< Seq(
  test in (core, Test)
  test in (tools, Test)
).dependsOn
```

### How to take an action on startup

A global setting `onLoad` is of type `State => State` and is executed once, after all projects are built and loaded. There is a similar hook `onUnload` for when a project is unloaded.

Project unloading typically occurs as a result of a `reload` command or a `set` command. Because the `onLoad` and `onUnload` hooks are global, modifying this setting typically involves composing a new function with the previous value. The following example shows the basic structure of defining `onLoad`.

Suppose you want to run a task named `dependencyUpdates` on start up. Here's what you can do:

```
lazy val dependencyUpdates = taskKey[Unit]("foo")

// This prepends the String you would type into the shell
lazy val startupTransition: State => State = { s: State =>
  "dependencyUpdates" :: s
}

lazy val root = (project in file("."))
  .settings(
    scalaVersion in ThisBuild := "2.12.3",
```



```

organization in ThisBuild := "com.example",
name := "helloworld",
dependencyUpdates := { println("hi") },

// onLoad is scoped to Global because there's only one.
onLoad in Global := {
  val old = (onLoad in Global).value
  // compose the new transition on top of the existing one
  // in case your plugins are using this hook.
  startupTransition compose old
}
)

```

You can use this technique to switch the startup subproject too.

## Sequencing

One of the most frequently asked questions is in the form of “how do I do X *and then* do Y in sbt”?

Generally speaking, that’s not how sbt tasks are set up. build.sbt is a DSL to define dependency graph of tasks. This is covered in [Execution semantics of tasks](#). So ideally, what you should do is define task Y yourself, and depend on the task X.

```

taskY := {
  val x = taskX.value
  x + 1
}

```

This is more constrained compared to the imperative style plain Scala code with side effects such as the follows:

```

def foo(): Unit = {
  doX()
  doY()
}

```

The benefit of the dependency-oriented programming model is that sbt’s task engine is able to reorder the task execution. When possible we run dependent tasks in parallel. Another benefit is that we can deduplicate the graph, and make sure that the task evaluation, such as `compile in Compile`, is called once per command execution, as opposed to compiling the same source many times.

Because task system is generally set up this way, running something sequentially is possible, but you will be fighting the system a bit, and it's not always going to be easy.

- [Defining a sequential task with Def.sequential](#)
- [Defining a dynamic task with Def.taskDyn](#)
- [Doing something after an input task](#)
- [Defining a dynamic input task with Def.inputTaskDyn](#)
- [How to sequence using commands](#)

### Defining a sequential task with Def.sequential

sbt 0.13.8 added `Def.sequential` function to run tasks under semi-sequential semantics. To demonstrate the sequential task, let's create a custom task called `compilecheck` that runs `compile` in `Compile` and then `scalastyle` in `Compile` task added by [scalastyle-sbt-plugin](#).

Here's how to set it up

**project/build.properties**

```
sbt.version=1.0.0-RC2
```

**project/style.sbt**

```
addSbtPlugin("org.scalastyle" %% "scalastyle-sbt-plugin" % "0.8.0")
```

**build.sbt**

```
lazy val compilecheck = taskKey[Unit]("compile and then scalastyle")

lazy val root = (project in file("."))
  .settings(
    compilecheck in Compile := Def.sequential(
      compile in Compile,
      (scalastyle in Compile).toTask("")
    ).value
  )
```

To call this task type in `compilecheck` from the shell. If the compilation fails, `compilecheck` would stop the execution.

```

root> compilecheck
[info] Compiling 1 Scala source to /Users/x/proj/target/scala-2.10/classes...
[error] /Users/x/proj/src/main/scala/Foo.scala:3: Unmatched closing brace '}' ignored here
[error] }
[error] ~
[error] one error found
[error] (compile:compileIncremental) Compilation failed

```

Looks like we were able to sequence these tasks.

### Defining a dynamic task with `Def.taskDyn`

If [sequential task](#) is not enough, another step up is [the dynamic task](#). Unlike `Def.task` which expects you to return pure value `A`, with a `Def.taskDyn` you return a task `sbt.Def.Initialize[sbt.Task[A]]` which the task engine can continue the rest of the computation with.

Let's try implementing a custom task called `compilecheck` that runs `compile` in `Compile` and then `scalastyle` in `Compile` task added by [scalastyle-sbt-plugin](#).

`project/build.properties`

```
sbt.version=1.0.0-RC2
```

`project/style.sbt`

```
addSbtPlugin("org.scalastyle" %% "scalastyle-sbt-plugin" % "0.8.0")
```

`build.sbt v1`

```

lazy val compilecheck = taskKey[sbt.inc.Analysis]("compile and then scalastyle")

lazy val root = (project in file("."))
  .settings(
    compilecheck := (Def.taskDyn {
      val c = (compile in Compile).value
      Def.task {
        val x = (scalastyle in Compile).toTask("").value
        c
      }
    }).value
  )

```

Now we have the same thing as the sequential task, except we can now return the result `c` from the first task.

**build.sbt v2** If we can return the same return type as `compile` in `Compile`, might actually rewire the key to our dynamic task.

```
lazy val root = (project in file("."))
  .settings(
    compile in Compile := (Def.taskDyn {
      val c = (compile in Compile).value
      Def.task {
        val x = (scalastyle in Compile).toTask("").value
        c
      }
    }).value
  )
```

Now we can actually call `compile` in `Compile` from the shell and make it do what we want it to do.

### Doing something after an input task

Thus far we've mostly looked at tasks. There's another kind of tasks called input tasks that accepts user input from the shell. A typical example for this is the `run` in `Compile` task. The `scalastyle` task is actually an input task too. See [input task](#) for the details of the input tasks.

Now suppose we want to call `run` in `Compile` task and then open the browser for testing purposes.

`src/main/scala/Greeting.scala`

```
object Greeting extends App {
  println("hello " + args.toList)
}
```

**build.sbt v1**

```
lazy val runopen = inputKey[Unit]("run and then open the browser")

lazy val root = (project in file("."))
  .settings(
    runopen := {
```

```

        (run in Compile).evaluated
        println("open browser!")
    }
)

```

Here, I'm faking the browser opening using `println` as the side effect. We can now call this task from the shell:

```

> runopen foo
[info] Compiling 1 Scala source to /x/proj/...
[info] Running Greeting foo
hello List(foo)
open browser!

```

**build.sbt v2** We can actually remove `runopen` key, by rewriting the new input task to `run in Compile`:

```

lazy val root = (project in file("."))
  .settings(
    run in Compile := {
      (run in Compile).evaluated
      println("open browser!")
    }
  )

```

## Defining a dynamic input task with `Def.inputTaskDyn`

Let's suppose that there's a task already that does the browser opening called `openbrowser` because of a plugin. Here's how we can sequence a task after an input tasks.

**build.sbt v1**

```

lazy val runopen = inputKey[Unit]("run and then open the browser")
lazy val openbrowser = taskKey[Unit]("open the browser")

lazy val root = (project in file("."))
  .settings(
    runopen := (Def.inputTaskDyn {
      import sbt.complete.Parsers.spaceDelimited
      val args = spaceDelimited("<args>").parsed
      Def.taskDyn {
        (run in Compile).toTask(" " + args.mkString(" ")).value
      }
    })
  )

```

```

        openbrowser
      }
    }).evaluated,
    openbrowser := {
      println("open browser!")
    }
  }
)

```

**build.sbt v2** Trying to rewire `run` in `Compile` is going to be complicated. Since the reference to the inner `run` in `Compile` is already inside the continuation task, simply rewiring `runopen` to `run` in `Compile` will create a cyclic reference. To break the cycle, we will introduce a clone of `run` in `Compile` called `actualRun` in `Compile`:

```

lazy val actualRun = inputKey[Unit]("The actual run task")
lazy val openbrowser = taskKey[Unit]("open the browser")

lazy val root = (project in file("."))
  .settings(
    run in Compile := (Def.inputTaskDyn {
      import sbt.complete.Parsers.spaceDelimited
      val args = spaceDelimited("<args>").parsed
      Def.taskDyn {
        (actualRun in Compile).toTask(" " + args.mkString(" ")).value
      } openbrowser
    }).evaluated,
    actualRun in Compile := Defaults.runTask(
      fullClasspath in Runtime,
      mainClass in (Compile, run),
      runner in (Compile, run)
    ).evaluated,
    openbrowser := {
      println("open browser!")
    }
  )
)

```

\* Note that some tasks (ie. `testOnly`) will fail with trailing spaces, so a right trim (`.replaceAll("\s+$", "")`) of the string built for `toTask` might be needed to handle empty args.

The `actualRun` in `Compile`'s implementation was copy-pasted from `run` task's implementation in `Defaults.scala`.

Now we can call `run foo` from the shell and it will evaluate `actualRun` in `Compile` with the passed in argument, and then evaluate the `openbrowser` task.

## How to sequence using commands

If all you care about is the side effects, and you really just want to emulate humans typing in one command after another, a custom command might be just what you need. This comes in handy for release procedures.

Here's from the build script of sbt itself:

```
commands += Command.command("releaseNightly") { state =>
  "stampVersion" ::
  "clean" ::
  "compile" ::
  "publish" ::
  "bintrayRelease" ::
  state
}
```

## Examples

This section of the documentation has example sbt build definitions and code. Contributions are welcome!

You may want to read the [Getting Started Guide](#) as a foundation for understanding the examples.

### .sbt build examples

**Note:** As of sbt 0.13.7 blank lines are no longer used to delimit `build.sbt` files. The following example requires sbt 0.13.7+.

Listed here are some examples of settings (each setting is independent). See [.sbt build definition](#) for details.

```
// factor out common settings into a sequence
lazy val commonSettings = Seq(
  organization := "org.myproject",
  version := "0.1.0",
  // set the Scala version used for the project
  scalaVersion := "2.12.2"
)

// define ModuleID for library dependencies
lazy val scalacheck = "org.scalacheck" %% "scalacheck" % "1.13.4"

// define ModuleID using string interpolator
```

```

lazy val osmlibVersion = "2.5.2-RC1"
lazy val osmlib = ("net.sf.travelingsales" % "osmlib" % osmlibVersion from
  s""http://downloads.sourceforge.net/project/travelingsales/libosm/$osmlibVersion/libosm-$osmlibVersion.jar"" % s"libosm-$osmlibVersion.jar")

lazy val root = (project in file("."))
  .settings(
    commonSettings,

    // set the name of the project
    name := "My Project",

    // set the main Scala source directory to be <base>/src
    scalaSource in Compile := baseDirectory.value / "src",

    // set the Scala test source directory to be <base>/test
    scalaSource in Test := baseDirectory.value / "test",

    // add a test dependency on ScalaCheck
    libraryDependencies += scalacheck % Test,

    // add compile dependency on osmlib
    libraryDependencies += osmlib,

    // reduce the maximum number of errors shown by the Scala compiler
    maxErrors := 20,

    // increase the time between polling for file changes when using continuous execution
    pollInterval := 1000,

    // append several options to the list of options passed to the Java compiler
    javacOptions ++= Seq("-source", "1.5", "-target", "1.5"),

    // append -deprecation to the options passed to the Scala compiler
    scalacOptions += "-deprecation",

    // define the statements initially evaluated when entering 'console', 'consoleQuick', or 'consoleBatch'
    initialCommands := ""
  )
import System.{currentTimeMillis => now}
def time[T](f: => T): T = {
  val start = now
  try { f } finally { println("Elapsed: " + (now - start)/1000.0 + " s") }
}"".stripMargin,

  // set the initial commands when entering 'console' or 'consoleQuick', but not 'consoleBatch'
  initialCommands in console := "import myproject._",

```



```

// set the main class for packaging the main jar
// 'run' will still auto-detect and prompt
// change Compile to Test to set it for the test jar
mainClass in (Compile, packageBin) := Some("myproject.MyMain"),

// set the main class for the main 'run' task
// change Compile to Test to set it for 'test:run'
mainClass in (Compile, run) := Some("myproject.MyMain"),

// add <base>/input to the files that '~' triggers on
watchSources += baseDirectory.value / "input",

// add a maven-style repository
resolvers += "name" at "url",

// add a sequence of maven-style repositories
resolvers ++= Seq("name" at "url"),

// define the repository to publish to
publishTo := Some("name" at "url"),

// set Ivy logging to be at the highest level
ivyLoggingLevel := UpdateLogging.Full,

// disable updating dynamic revisions (including -SNAPSHOT versions)
offline := true,

// set the prompt (for this build) to include the project id.
shellPrompt in ThisBuild := { state => Project.extract(state).currentRef.project + "> " },

// set the prompt (for the current project) to include the username
shellPrompt := { state => System.getProperty("user.name") + "> " },

// disable printing timing information, but still print [success]
showTiming := false,

// disable printing a message indicating the success or failure of running a task
showSuccess := false,

// change the format used for printing task completion time
timingFormat := {
  import java.text.DateFormat
  DateFormat.getDateTimeInstance(DateFormat.SHORT, DateFormat.SHORT)
},

// disable using the Scala version in output paths and artifacts

```

```

crossPaths := false,

// fork a new JVM for 'run' and 'test:run'
fork := true,

// fork a new JVM for 'test:run', but not 'run'
fork in Test := true,

// add a JVM option to use when forking a JVM for 'run'
javaOptions += "-Xmx2G",

// only use a single thread for building
parallelExecution := false,

// Execute tests in the current project serially
// Tests from other projects may still run concurrently.
parallelExecution in Test := false,

// set the location of the JDK to use for compiling Java code.
// if 'fork' is true, this is used for 'run' as well
javaHome := Some(file("/usr/lib/jvm/sun-jdk-1.6")),

// Use Scala from a directory on the filesystem instead of retrieving from a repository
scalaHome := Some(file("/home/user/scala/trunk/")),

// don't aggregate clean (See FullConfiguration for aggregation details)
aggregate in clean := false,

// only show warnings and errors on the screen for compilations.
// this applies to both test:compile and compile and is Info by default
logLevel in compile := Level.Warn,

// only show warnings and errors on the screen for all tasks (the default is Info)
// individual tasks can then be more verbose using the previous setting
logLevel := Level.Warn,

// only store messages at info and above (the default is Debug)
// this is the logging level for replaying logging with 'last'
persistLogLevel := Level.Debug,

// only show 10 lines of stack traces
traceLevel := 10,

// only show stack traces up to the first sbt stack frame
traceLevel := 0,

```

```

// add SWT to the unmanaged classpath
unmanagedJars in Compile += Attributed.blank(file("/usr/share/java/swt.jar")),

// publish test jar, sources, and docs
publishArtifact in Test := true,

// disable publishing of main docs
publishArtifact in (Compile, packageDoc) := false,

// change the classifier for the docs artifact
artifactClassifier in packageDoc := Some("doc"),

// Copy all managed dependencies to <build-root>/lib_managed/
// This is essentially a project-local cache and is different
// from the lib_managed/ in sbt 0.7.x. There is only one
// lib_managed/ in the build root (not per-project).
retrieveManaged := true,

/* Specify a file containing credentials for publishing. The format is:
realm=Sonatype Nexus Repository Manager
host=nexus.scala-tools.org
user=admin
password=admin123
*/
credentials += Credentials(Path.userHome / ".ivy2" / ".credentials"),

// Directly specify credentials for publishing.
credentials += Credentials("Sonatype Nexus Repository Manager", "nexus.scala-tools.org",

// Exclude transitive dependencies, e.g., include log4j without including logging via j
libraryDependencies +=
  "log4j" % "log4j" % "1.2.15" excludeAll(
    ExclusionRule(organization = "com.sun.jdmk"),
    ExclusionRule(organization = "com.sun.jmx"),
    ExclusionRule(organization = "javax.jms")
  )
)

```

## **.sbt build with .scala files example**

.sbt builds can be supplemented with `project/*.scala` files. When the build file gets large enough, the first thing to factor out are resolvers and dependencies.

### project/Resolvers.scala

```
import sbt._
import Keys._

object Resolvers {
  val sunrepo      = "Sun Maven2 Repo" at "http://download.java.net/maven/2"
  val sunrepoGF    = "Sun GF Maven2 Repo" at "http://download.java.net/maven/glassfish"
  val oraclerepo   = "Oracle Maven2 Repo" at "http://download.oracle.com/maven"

  val oracleResolvers = Seq(sunrepo, sunrepoGF, oraclerepo)
}
```

### project/Dependencies.scala

```
import sbt._
import Keys._

object Dependencies {
  val logbackVersion = "0.9.16"
  val grizzlyVersion = "1.9.19"

  val logbackcore      = "ch.qos.logback" % "logback-core"      % logbackVersion
  val logbackclassic   = "ch.qos.logback" % "logback-classic"   % logbackVersion

  val jacksonjson      = "org.codehaus.jackson" % "jackson-core-lgpl" % "1.7.2"

  val grizzlyframework = "com.sun.grizzly" % "grizzly-framework" % grizzlyVersion
  val grizzlyhttp      = "com.sun.grizzly" % "grizzly-http"       % grizzlyVersion
  val grizzlyrcm       = "com.sun.grizzly" % "grizzly-rcm"        % grizzlyVersion
  val grizzlyutils     = "com.sun.grizzly" % "grizzly-utils"      % grizzlyVersion
  val grizzlyportunif  = "com.sun.grizzly" % "grizzly-portunif"   % grizzlyVersion

  val sleepycat = "com.sleepycat" % "je" % "4.0.92"

  val apachenet      = "commons-net" % "commons-net" % "2.0"
  val apachecodec    = "commons-codec" % "commons-codec" % "1.4"

  val scalatest = "org.scalatest" %% "scalatest" % "3.0.1"
}
```

These files can be used manage library dependencies in one place.

## project/ShellPromptPlugin.scala

When you want to implement custom commands or tasks, you can organize your build by defining an one-off auto plugin.

```
import sbt._
import Keys._

// Shell prompt which show the current project and git branch
object ShellPromptPlugin extends AutoPlugin {
  override def trigger = allRequirements
  override lazy val projectSettings = Seq(
    shellPrompt := buildShellPrompt
  )
  val devnull: ProcessLogger = new ProcessLogger {
    def info(s: => String) {}
    def error(s: => String) { }
    def buffer[T] (f: => T): T = f
  }
  def currBranch =
    ("git status -sb" lines_! devnull headOption)
      .getOrElse("-").stripPrefix("## ")
  val buildShellPrompt: State => String = {
    case (state: State) =>
      val currProject = Project.extract (state).currentProject.id
      s"""$currProject:$currBranch> ""
  }
}
```

This auto plugin will display the current project name and the git branch.

## build.sbt

Now that we factored out custom settings and dependencies out to project/\*.scala, we can make use of them in build.sbt:

```
import Resolvers._
import Dependencies._

// factor out common settings into a sequence
lazy val buildSettings = Seq(
  organization := "com.example",
  version := "0.1.0",
  scalaVersion := "2.12.2"
```

```

)

// Sub-project specific dependencies
lazy val commonDeps = Seq(
  logbackcore,
  logbackclassic,
  jacksonjson,
  scalatest % Test
)

lazy val serverDeps = Seq(
  grizzlyframework,
  grizzlyhttp,
  grizzlyrcm,
  grizzlyutils,
  grizzlyportunif,
  sleepycat,
  scalatest % Test
)

lazy val pricingDeps = Seq(
  apachenet,
  apachecodec,
  scalatest % Test
)

lazy val cdap2 = (project in file("."))
  .aggregate(common, server, compact, pricing, pricing_service)
  .settings(buildSettings)

lazy val common = (project in file("cdap2-common"))
  .settings(
    buildSettings,
    libraryDependencies ++= commonDeps
  )

lazy val server = (project in file("cdap2-server"))
  .dependsOn(common)
  .settings(
    buildSettings,
    resolvers := oracleResolvers,
    libraryDependencies ++= serverDeps
  )

lazy val pricing = (project in file("cdap2-pricing"))
  .dependsOn(common, compact, server)

```

```

    .settings(
      buildSettings,
      libraryDependencies ++= pricingDeps
    )

lazy val pricing_service = (project in file("cdap2-pricing-service"))
  .dependsOn(pricing, server)
  .settings(buildSettings)

lazy val compactct = (project in file("compact-hashmap"))
  .settings(buildSettings)

```

## Advanced configurations example

This is an example [.sbt build definition](#) that demonstrates using configurations to group dependencies.

The `utils` module provides utilities for other modules. It uses configurations to group dependencies so that a dependent project doesn't have to pull in all dependencies if it only uses a subset of functionality. This can be an alternative to having multiple utilities modules (and consequently, multiple utilities jars).

In this example, consider a `utils` project that provides utilities related to both Scalate and Saxon. It therefore needs both Scalate and Saxon on the compilation classpath and a project that uses all of the functionality of 'utils' will need these dependencies as well. However, project `a` only needs the utilities related to Scalate, so it doesn't need Saxon. By depending only on the `scalate` configuration of `utils`, it only gets the Scalate-related dependencies.

```

/****** Configurations *****/

// Custom configurations
lazy val Common = config("common") describedAs("Dependencies required in all configurations")
lazy val Scalate = config("scalate") extend(Common) describedAs("Dependencies for using Scalate")
lazy val Saxon = config("saxon") extend(Common) describedAs("Dependencies for using Saxon")

// Define a customized compile configuration that includes
// dependencies defined in our other custom configurations
lazy val CustomCompile = config("compile") extend(Saxon, Common, Scalate)

/****** Projects *****/

// factor out common settings into a sequence
lazy val commonSettings = Seq(
  organization := "com.example",
  version := "0.1.0",

```

```

    scalaVersion := "2.10.4"
  )

  // An example project that only uses the Scalate utilities.
  lazy val a = (project in file("a"))
    .dependsOn(utils % "compile->scalate")
    .settings(commonSettings)

  // An example project that uses the Scalate and Saxon utilities.
  // For the configurations defined here, this is equivalent to doing dependsOn(utils),
  // but if there were more configurations, it would select only the Scalate and Saxon
  // dependencies.
  lazy val b = (project in file("b"))
    .dependsOn(utils % "compile->scalate,saxon")
    .settings(commonSettings)

  // Defines the utilities project
  lazy val utils = (project in file("utils"))
    .settings(
      commonSettings,

      inConfig(Common)(Defaults.configSettings), // Add the src/common/scala/ compilation configuration
      addArtifact(artifact in (Common, packageBin), packageBin in Common), // Publish the common artifacts

      // We want our Common sources to have access to all of the dependencies on the classpath
      // for compile and test, but when depended on, it should only require dependencies
      classpathConfiguration in Common := CustomCompile,
      // Modify the default Ivy configurations.
      // 'overrideConfigs' ensures that Compile is replaced by CustomCompile
      ivyConfigurations := overrideConfigs(Scalate, Saxon, Common, CustomCompile)(ivyConfigurations),
      // Put all dependencies without an explicit configuration into Common (optional)
      defaultConfiguration := Some(Common),
      // Declare dependencies in the appropriate configurations
      libraryDependencies ++= Seq(
        "org.fusesource.scalate" % "scalate-core" % "1.5.0" % Scalate,
        "org.squeryl" %% "squeryl" % "0.9.5-6" % Scalate,
        "net.sf.saxon" % "saxon" % "8.7" % Saxon
      )
    )
  )

```

## Advanced command example

This is an advanced example showing some of the power of the new settings system. It shows how to temporarily modify all declared dependencies in the build, regardless of where they are defined. It directly operates on the final



Seq[Setting[\_]] produced from every setting involved in the build.

The modifications are applied by running *canonicalize*. A *reload* or using *set* reverts the modifications, requiring *canonicalize* to be run again.

This particular example shows how to transform all declared dependencies on ScalaCheck to use version 1.8. As an exercise, you might try transforming other dependencies, the repositories used, or the scalac options used. It is possible to add or remove settings as well.

This kind of transformation is possible directly on the settings of Project, but it would not include settings automatically added from plugins or build.sbt files. What this example shows is doing it unconditionally on all settings in all projects in all builds, including external builds.

```
import sbt._
import Keys._

object Canon extends Plugin {
  // Registers the canonicalize command in every project
  override def settings = Seq(commands += canonicalize)

  // Define the command. This takes the existing settings (including any session settings)
  // and applies 'f' to each Setting[_]
  def canonicalize = Command.command("canonicalize") { (state: State) =>
    val extracted = Project.extract(state)
    import extracted._
    val transformed = session.mergeSettings map ( s => f(s) )
    val newStructure = Load.reapply(transformed, structure)
    Project.setProject(session, newStructure, state)
  }

  // Transforms a Setting[_].
  def f(s: Setting[_]): Setting[_] = s.key.key match {
    // transform all settings that modify libraryDependencies
    case Keys.libraryDependencies.key =>
      // key scalac. T == Seq[ModuleID]
      s.asInstanceOf[Setting[Seq[ModuleID]]].mapInit(mapLibraryDependencies)
      // preserve other settings
    case _ => s
  }

  // This must be idempotent because it gets applied after every transformation.
  // That is, if the user does:
  // libraryDependencies += a
  // libraryDependencies += b
  // then this method will be called for Seq(a) and Seq(a,b)
  def mapLibraryDependencies(key: ScopedKey[Seq[ModuleID]], value: Seq[ModuleID]): Seq[ModuleID]
```

```

    value map mapSingle

    // This is the fundamental transformation.
    // Here we map all declared ScalaCheck dependencies to be version 1.8
    def mapSingle(module: ModuleID): ModuleID =
        if(module.name == "scalacheck") module.copy(revision = "1.8")
        else module
}

```

## Frequently Asked Questions

### Project Information

#### How do I get help?

- See [Get Involved](#)

#### How do I report a bug?

- See [Get Involved](#)

#### How can I help?

- See [Get Involved](#)

### Usage

**My last command didn't work but I can't see an explanation. Why?**  
sbt 1.0.0-RC2 by default suppresses most stack traces and debugging information. It has the nice side effect of giving you less noise on screen, but as a newcomer it can leave you lost for explanation. To see the previous output of a command at a higher verbosity, type `last <task>` where `<task>` is the task that failed or that you want to view detailed output for. For example, if you find that your `update` fails to load all the dependencies as you expect you can enter:

```
> last update
```

and it will display the full output from the last run of the `update` command.

**How do I disable ansi codes in the output?** Sometimes sbt doesn't detect that ansi codes aren't supported and you get output that looks like:

```
[0m[ [0minfo [0m] [0mSet current project to root
```

or ansi codes are supported but you want to disable colored output. To completely disable ansi codes, set the `sbt.log.format` system property to `false`. For example,

**How can I start a Scala interpreter (REPL) with sbt project configuration (dependencies, etc.)?** In sbt's shell run `console`.

## Build definitions

**What are the `:=`, `+=`, and `++=` methods?** These are methods on keys used to construct a `Setting` or a `Task`. The Getting Started Guide covers all these methods, see [.sbt build definition](#), [task graph](#), and [appending values](#) for example.

**What is the `%` method?** It's used to create a `ModuleID` from strings, when specifying managed dependencies. Read the Getting Started Guide about [library dependencies](#).

**What is `ModuleID`, `Project`, ...?** To figure out an unknown type or method, have a look at the [Getting Started Guide](#) if you have not. Also try the [index](#) of commonly used methods, values, and types, the [API Documentation](#) and the [hyperlinked sources](#).

**How do I add files to a jar package?** The files included in an artifact are configured by default by a task `mappings` that is scoped by the relevant package task. The `mappings` task returns a sequence `Seq[(File,String)]` of mappings from the file to include to the path within the jar. See [mapping files](#) for details on creating these mappings.

For example, to add generated sources to the packaged source artifact:

```
mappings in (Compile, packageSrc) += {  
  import Path.{flat, relativeTo}  
  val base = (sourceManaged in Compile).value  
  val srcs = (managedSources in Compile).value  
  srcs x (relativeTo(base) | flat)  
}
```

This takes sources from the `managedSources` task and relativizes them against the `managedSource` base directory, falling back to a flattened mapping. If a source generation task doesn't write the sources to the `managedSource` directory, the mapping function would have to be adjusted to try relativizing against additional directories or something more appropriate for the generator.

**How can I generate source code or resources?** See [Generating Files](#).

**How can a task avoid redoing work if the input files are unchanged?**

There is basic support for only doing work when input files have changed or when the outputs haven't been generated yet. This support is primitive and subject to change.

The relevant methods are two overloaded methods called `FileFunction.cached`. Each requires a directory in which to store cached data. Sample usage is:

```
// define a task that takes some inputs
// and generates files in an output directory
myTask := {
  // wraps a function taskImpl in an uptodate check
  // taskImpl takes the input files, the output directory,
  // generates the output files and returns the set of generated files
  val cachedFun = FileFunction.cached(cacheDirectory.value / "my-task") { (in: Set[File]) =>
    taskImpl(in, target.value) : Set[File]
  }
  // Applies the cached function to the inputs files
  cachedFun(inputs.value)
}
```

There are two additional arguments for the first parameter list that allow the file tracking style to be explicitly specified. By default, the input tracking style is `FilesInfo.lastModified`, based on a file's last modified time, and the output tracking style is `FilesInfo.exists`, based only on whether the file exists. The other available style is `FilesInfo.hash`, which tracks a file based on a hash of its contents. See the [FilesInfo API](#) for details.

A more advanced version of `FileFunction.cached` passes a data structure of type [ChangeReport](#) describing the changes to input and output files since the last evaluation. This version of `cached` also expects the set of files generated as output to be the result of the evaluated function.

## Extending sbt

**How can I add a new configuration?** The following example demonstrates adding a new set of compilation settings and tasks to a new configuration called

`samples`. The sources for this configuration go in `src/samples/scala/`. Unspecified settings delegate to those defined for the `compile` configuration. For example, if `scalacOptions` are not overridden for `samples`, the options for the main sources are used.

Options specific to `samples` may be declared like:

```
scalacOptions in Samples += "-deprecation"
```

This uses the main options as base options because of `+=`. Use `:=` to ignore the main options:

```
scalacOptions in Samples := "-deprecation" :: Nil
```

The example adds all of the usual compilation related settings and tasks to `samples`:

```
samples:run
samples:runMain
samples:compile
samples:console
samples:consoleQuick
samples:scalacOptions
samples:fullClasspath
samples:package
samples:packageSrc
...
```

**How do I add a test configuration?** See the [Additional test configurations](#) section of [Testing](#).

**How can I create a custom run task, in addition to run?** This answer is extracted from a [mailing list discussion](#).

Read the Getting Started Guide up to [custom settings](#) for background.

A basic run task is created by:

```
lazy val myRunTask = taskKey[Unit]("A custom run task.")
// this can go either in a `build.sbt` or the settings member
// of a Project in a full configuration
fullRunTask(myRunTask, Test, "foo.Foo", "arg1", "arg2")
```

If you want to be able to supply arguments on the command line, replace `TaskKey` with `InputKey` and `fullRunTask` with `fullRunInputTask`. The `Test` part can be replaced with another configuration, such as `Compile`, to use that configuration's classpath.

This run task can be configured individually by specifying the task key in the scope. For example:

```
fork in myRunTask := true

javaOptions in myRunTask += "-Xmx6144m"
```

**How should I express a dependency on an outside tool such as `proguard`?** Tool dependencies are used to implement a task and are not needed by project source code. These dependencies can be declared in their own configuration and classpaths. These are the steps:

1. Define a new [configuration](#).
2. Declare the tool [dependencies](#) in that configuration.
3. Define a classpath that pulls the dependencies from the [Update Report](#) produced by `update`.
4. Use the classpath to implement the task.

As an example, consider a `proguard` task. This task needs the ProGuard jars in order to run the tool. First, define and add the new configuration:

```
val ProguardConfig = config("proguard") hide

ivyConfigurations += ProguardConfig
```

Then,

```
// Add proguard as a dependency in the custom configuration.
// This keeps it separate from project dependencies.
libraryDependencies +=
    "net.sf.proguard" % "proguard" % "4.4" % ProguardConfig.name

// Extract the dependencies from the UpdateReport.
managedClasspath in proguard := {
    // these are the types of artifacts to include
    val artifactTypes: Set[String] = (classpathTypes in proguard).value
    Classpaths.managedJars(proguardConfig, artifactTypes, update.value)
}
```

```

// Use the dependencies in a task, typically by putting them
// in a ClassLoader and reflectively calling an appropriate
// method.
proguard := {
  val cp: Seq[File] = (managedClasspath in proguard).value
  // ... do something with , which includes proguard ...
}

```

Defining the intermediate classpath is optional, but it can be useful for debugging or if it needs to be used by multiple tasks. It is also possible to specify artifact types inline. This alternative `proguard` task would look like:

```

proguard := {
  val artifactTypes = Set("jar")
  val cp: Seq[File] =
    Classpaths.managedJars(proguardConfig, artifactTypes, update.value)
  // ... do something with , which includes proguard ...
}

```

**How would I change sbt’s classpath dynamically?** It is possible to register additional jars that will be placed on sbt’s classpath (since version 0.10.1). Through [State](#), it is possible to obtain a `xsbti.ComponentProvider`, which manages application components. Components are groups of files in the `~/.sbt/boot/` directory and, in this case, the application is sbt. In addition to the base classpath, components in the “extra” component are included on sbt’s classpath.

(Note: the additional components on an application’s classpath are declared by the `components` property in the `[main]` section of the launcher configuration file `boot.properties`.)

Because these components are added to the `~/.sbt/boot/` directory and `~/.sbt/boot/` may be read-only, this can fail. In this case, the user has generally intentionally set sbt up this way, so error recovery is not typically necessary (just a short error message explaining the situation.)

**Example of dynamic classpath augmentation** The following code can be used where a `State => State` is required, such as in the `onLoad` setting (described below) or in a [command](#). It adds some files to the “extra” component and reloads sbt if they were not already added. Note that reloading will drop the user’s session state.

```

def augment(extra: Seq[File])(s: State): State = {
  // Get the component provider
  val cs: xsbti.ComponentProvider = s.configuration.provider.components()
}

```

```

    // Adds the files in 'extra' to the "extra" component
    //   under an exclusive machine-wide lock.
    //   The returned value is 'true' if files were actually copied and 'false'
    //   if the target files already exists (based on name only).
    val copied: Boolean = s.locked(cs.lockFile, cs.addToComponent("extra", extra.toArray))

    // If files were copied, reload so that we use the new classpath.
    if(copied) s.reload else s
}

```

**How can I take action when the project is loaded or unloaded?** See [How to take an action on startup](#).

**Example of project load/unload hooks** The following example maintains a count of the number of times a project has been loaded and prints that number:

```

{
  // the key for the current count
  val key = AttributeKey[Int]("loadCount")
  // the State transformer
  val f = (s: State) => {
    val previous = s.get key.getOrElse 0
    println("Project load count: " + previous)
    s.put(key, previous + 1)
  }
  onLoad in Global := {
    val previous = (onLoad in Global).value
    f compose previous
  }
}

```

## Errors

**On project load, “Reference to uninitialized setting”** Setting initializers are executed in order. If the initialization of a setting depends on other settings that has not been initialized, sbt will stop loading.

In this example, we try to append a library to `libraryDependencies` before it is initialized with an empty sequence.

```

object MyBuild extends Build {
  val root = Project(id = "root", base = file("."),
    settings = Seq(

```



```

        libraryDependencies += "commons-io" % "commons-io" % "1.4" % "test"
    )
    ).disablePlugins(plugins.IvyModule)
}

```

To correct this, include the IvyModule plugin settings, which includes `libraryDependencies := Seq()`. So, we just drop the explicit disabling.

```

object MyBuild extends Build {
  val root = Project(id = "root", base = file("."),
    settings = Seq(
      libraryDependencies += "commons-io" % "commons-io" % "1.4" % "test"
    )
  )
}

```

A more subtle variation of this error occurs when using [scoped settings](#).

```

// error: Reference to uninitialized setting
settings = Seq(
  libraryDependencies += "commons-io" % "commons-io" % "1.2" % "test",
  fullClasspath := fullClasspath.value.filterNot(_.data.name.contains("commons-io"))
)

```

This setting varies between the test and compile scopes. The solution is use the scoped setting, both as the input to the initializer, and the setting that we update.

```
fullClasspath in Compile := (fullClasspath in Compile).value.filterNot(_.data.name.contains("commons-io"))
```

## Dependency Management

**How do I resolve a checksum error?** This error occurs when the published checksum, such as a sha1 or md5 hash, differs from the checksum computed for a downloaded artifact, such as a jar or pom.xml. An example of such an error is:

```

[warn] problem while downloading module descriptor:
https://repo1.maven.org/maven2/commons-fileupload/commons-fileupload/1.2.2/commons-fileupload-1.2.2.jar
invalid sha1: expected=ad3fda4adc95eb0d061341228cc94845ddb9a6fe computed=0ce5d4a03b07c8b00ab0

```

The invalid checksum should generally be reported to the repository owner (as [was done](#) for the above error). In the meantime, you can temporarily disable checking with the following setting:

```
checksums in update := Nil
```

See [library management](#) for details.

**I've added a plugin, and now my cross-compilations fail!** This problem crops up frequently. Plugins are only published for the Scala version that sbt uses (currently, 2.9.1). You can still *use* plugins during cross-compilation, because sbt only looks for a 2.9.1 version of the plugin.

**... unless you specify the plugin in the wrong place!**

A typical mistake is to put global plugin definitions in `~/.sbt/plugins.sbt`. **THIS IS WRONG.** `.sbt` files in `~/.sbt` are loaded for *each* build—that is, for *each* cross-compilation. So, if you build for Scala 2.9.0, sbt will try to find a version of the plugin that's compiled for 2.9.0—and it usually won't. That's because it doesn't *know* the dependency is a plugin.

To tell sbt that the dependency is an sbt plugin, make sure you define your global plugins in a `.sbt` file in `~/.sbt/plugins/`. sbt knows that files in `~/.sbt/plugins` are only to be used by sbt itself, not as part of the general build definition. If you define your plugins in a file under *that* directory, they won't foul up your cross-compilations. Any file name ending in `.sbt` will do, but most people use `~/.sbt/plugins/build.sbt` or `~/.sbt/plugins/plugins.sbt`.

## Miscellaneous

**How do I use the Scala interpreter in my code?** sbt runs tests in the same JVM as sbt itself and Scala classes are not in the same class loader as the application classes. Therefore, when using the Scala interpreter, it is important to set it up properly to avoid an error message like:

```
Failed to initialize compiler: class scala.runtime.VolatileBooleanRef not found.
** Note that as of 2.8 scala does not assume use of the java classpath.
** For the old behavior pass -usejavacp to scala, or if using a Settings
** object programmatically, settings.usejavacp.value = true.
```

The key is to initialize the Settings for the interpreter using `embeddedDefaults`. For example:

```
val settings = new Settings
settings.embeddedDefaults[MyType]
val interpreter = new Interpreter(settings, ...)
```

Here, `MyType` is a representative class that should be included on the interpreter's classpath and in its application class loader. For more background, see the [original proposal](#) that resulted in `embeddedDefaults` being added.

Similarly, use a representative class as the type argument when using the `break` and `breakIf` methods of `ILoop`, as in the following example:

```
def x(a: Int, b: Int) = {  
  import scala.tools.nsc.interpreter.ILoop  
  ILoop.breakIf[MyType](a != b, "a" -> a, "b" -> b )  
}
```

## 0.7 to 0.10+ Migration

**How do I migrate from 0.7 to 0.10+?** See the [migration page](#) first and then the following questions.

**Where has 0.7's `lib_managed` gone?** By default, sbt 1.0.0-RC2 loads managed libraries from your ivy cache without copying them to a `lib_managed` directory. This fixes some bugs with the previous solution and keeps your project directory small. If you want to insulate your builds from the ivy cache being cleared, set `retrieveManaged := true` and the dependencies will be copied to `lib_managed` as a build-local cache (while avoiding the issues of `lib_managed` in 0.7.x).

This does mean that existing solutions for sharing libraries with your favoured IDE may not work. Refer to [Community Plugins page](#) for a list of currently available plugins for your IDE.

**What are the commands I can use in 1.0.0-RC2 vs. 0.7?** For a list of commands, run `help`. For details on a specific command, run `help <command>`. To view a list of tasks defined on the current project, run `tasks`. Alternatively, see the [Running](#) page in the Getting Started Guide for descriptions of common commands and tasks.

If in doubt start by just trying the old command as it may just work. The built in TAB completion will also assist you, so you can just press TAB at the beginning of a line and see what you get.

The following commands work pretty much as in 0.7 out of the box:

```
reload  
update  
compile  
test
```

```
testOnly
publishLocal
exit
```

**Why have the resolved dependencies in a multi-module project changed since 0.7?** sbt 0.10 fixes a flaw in how dependencies get resolved in multi-module projects. This change ensures that only one version of a library appears on a classpath.

Use `last update` to view the debugging output for the last `update` run. Use `show update` to view a summary of files comprising managed classpaths.

### My tests all run really fast but some are broken that weren't in 0.7!

Be aware that compilation and tests run in parallel by default in sbt 1.0.0-RC2. If your test code isn't thread-safe then you may want to change this behaviour by adding one of the following to your `build.sbt`:

```
// Execute tests in the current project serially.
// Tests from other projects may still run concurrently.
parallelExecution in Test := false

// Execute everything serially (including compilation and tests)
parallelExecution := false
```

**What happened to the web development and Web Start support since 0.7?** Web application support was split out into a plugin. See the [xsbt-web-plugin](#) project.

For an early version of an xsbt Web Start plugin, visit the [xsbt-webstart](#) project.

**How are inter-project dependencies different in 1.0.0-RC2 vs. 0.7?** In 1.0.0-RC2, there are three types of project dependencies (classpath, execution, and configuration) and they are independently defined. These were combined in a single dependency type in 0.7.x. A declaration like:

```
lazy val a = project("a", "A")
lazy val b = project("b", "B", a)
```

meant that the B project had a classpath and execution dependency on A and A had a configuration dependency on B. Specifically, in 0.7.x:

1. Classpath: Classpaths for A were available on the appropriate classpath for B.

2. Execution: A task executed on B would be executed on A first.
3. Configuration: For some settings, if they were not overridden in A, they would default to the value provided in B.

In 1.0.0-RC2, declare the specific type of dependency you want. Read about [multi-project builds](#) in the Getting Started Guide for details.

### Where did class/object X go since 0.7? 0.7

1.0.0-RC2

FileUtilities

IO

Path class and object

Path object, File, RichFile

</td>

PathFinder class

Seq[File], PathFinder class, PathFinder object

**Where can I find plugins for 1.0.0-RC2?** See [Community Plugins](#) for a list of currently available plugins.

## Index

This is an index of common methods, types, and values you might find in an sbt build definition. For command names, see [Running](#). For available plugins, see [the plugins list](#).

## Values and Types

### Dependency Management

- [ModuleID](#) is the type of a dependency definition. See [Library Management](#).
- [Artifact](#) represents a single artifact (such as a jar or a pom) to be built and published. See [Library Management](#) and [Artifacts](#).

- A [Resolver](#) can resolve and retrieve dependencies. Many types of Resolvers can publish dependencies as well. A repository is a closely linked idea that typically refers to the actual location of the dependencies. However, sbt is not very consistent with this terminology and repository and resolver are occasionally used interchangeably.
- A [ModuleConfiguration](#) defines a specific resolver to use for a group of dependencies.
- A [Configuration](#) is a useful Ivy construct for grouping dependencies. See [ivy-configurations](#). It is also used for [scoping settings](#).
- `Compile`, `Test`, `Runtime`, `Provided`, and `Optional` are predefined [configurations](#).

## Settings and Tasks

- A [Setting](#) describes how to initialize a specific setting in the build. It can use the values of other settings or the previous value of the setting being initialized.
- A [SettingsDefinition](#) is the actual type of an expression in a `build.sbt`. This allows either a single [Setting](#) or a sequence of settings ([SettingList](#)) to be defined at once. The types in a [.scala build definition](#) always use just a plain [Setting](#).
- [Initialize](#) describes how to initialize a setting using other settings, but isn't bound to a particular setting yet. Combined with an initialization method and a setting to initialize, it produces a full [Setting](#).
- [TaskKey](#), [SettingKey](#), and [InputKey](#) are keys that represent a task or setting. These are not the actual tasks, but keys that are used to refer to them. They can be scoped to produce [ScopedTask](#), [ScopedSetting](#), and [ScopedInput](#). These form the base types that provide the Settings methods.
- [InputTask](#) parses and tab completes user input, producing a task to run.
- [Task](#) is the type of a task. A task is an action that runs on demand. This is in contrast to a setting, which is run once at project initialization.

## Process

- A [ProcessBuilder](#) is the type used to define a process. It provides combinators for building up processes from smaller processes.
- A [Process](#) represents the actual forked process.
- The [Process companion object](#) provides methods for constructing primitive processes.

## Build Structure

- [Build](#) is the trait implemented for a [.scala build definition](#), which defines project relationships and settings.
- [Plugin](#) is the trait implemented for sbt [plugins](#).
- [Project](#) is both a trait and a companion object that declares a single module in a build. See [.scala build definition](#).
- [Keys](#) is an object that provides all of the built-in keys for settings and tasks.
- [State](#) contains the full state for a build. It is mainly used by [Commands](#) and sometimes [Input Tasks](#). See also [State and Actions](#).

## Methods

**Settings and Tasks** See the [Getting Started Guide](#) for details.

- `:=`, `+=`, `++=` These construct a [Setting](#), which is the fundamental type in the [settings](#) system.
- `value` This uses the value of another setting or task in the definition of a new setting or task. This method is special (it is a macro) and cannot be used except in the argument of one of the setting definition methods above (`:=`, ...) or in the standalone construction methods `Def.setting` and `Def.task`. See [Task-Graph](#) for details.
- `in` specifies the [Scope](#) or part of the [Scope](#) of a setting being referenced. See [scopes](#).

**File and IO** See [RichFile](#), [PathFinder](#), and [Paths](#) for the full documentation.

- `/` When called on a single `File`, this is `new File(x,y)`. For `Seq[File]`, this is applied for each member of the sequence..
- `*` and `**` are methods for selecting children (`*`) or descendants (`**`) of a `File` or `Seq[File]` that match a filter.
- `|`, `||`, `&&`, `&`, `-`, and `--` are methods for combining filters, which are often used for selecting `Files`. See [NameFilter](#) and [FileFilter](#). Note that methods with these names also exist for other types, such as collections (like `Seq`) and [Parser](#) (see [Parsing Input](#)).
- `pair` Used to construct mappings from a `File` to another `File` or to a `String`. See [Mapping Files](#).
- `get` forces a [PathFinder](#) (a call-by-name data structure) to a strict `Seq[File]` representation. This is a common name in Scala, used by types like `Option`.

**Dependency Management** See [Library Management](#) for full documentation.

- `%` This is used to build up a [ModuleID](#).
- `%%` This is similar to `%` except that it identifies a dependency that has been [cross built](#).
- `from` Used to specify the fallback URL for a dependency
- `classifier` Used to specify the classifier for a dependency.
- `at` Used to define a Maven-style resolver.
- `intransitive` Marks a [dependency](#) or [Configuration](#) as being intransitive.
- `hide` Marks a [Configuration](#) as internal and not to be included in the published metadata.

**Parsing** These methods are used to build up [Parsers](#) from smaller [Parsers](#). They closely follow the names of the standard library's parser combinators. See [Parsing Input](#) for the full documentation. These are used for [Input Tasks](#) and [Commands](#).

- `~, ~>, <~` Sequencing methods.
- `??, ?` Methods for making a Parser optional. `?` is postfix.
- `id` Used for turning a Char or String literal into a Parser. It is generally used to trigger an implicit conversion to a Parser.
- `|, ||` Choice methods. These are common method names in Scala.
- `^^^` Produces a constant value when a Parser matches.
- `+, *` Postfix repetition methods. These are common method names in Scala.
- `map, flatMap` Transforms the result of a Parser. These are common method names in Scala.
- `filter` Restricts the inputs that a Parser matches on. This is a common method name in Scala.
- `-` Prefix negation. Only matches the input when the original parser doesn't match the input.
- `examples, token` Tab completion
- `!!!` Provides an error message to use when the original parser doesn't match the input.

**Processes** These methods are used to [fork external processes](#). Note that this API has been included in the Scala standard library for version 2.9. [Process-Builder](#) is the builder type and [Process](#) is the type representing the actual forked process. The methods to combine processes start with `#` so that they share the same precedence.

- `run, !, !!, !<, lines, lines_!` are different ways to start a process once it has been defined. The `lines` variants produce a `Stream[String]` to obtain the output lines.



- `#<`, `#<<`, `#>` are used to get input for a process from a source or send the output of a process to a sink.
- `#|` is used to pipe output from one process into the input of another.
- `#||`, `#&&`, `###` sequence processes in different ways.

## Developer's Guide (Work in progress)

This is the set of documentation about the future architecture of sbt. The target audience of this document is the sbt plugin authors and sbt developers. See also [How can I help?](#)

### Towards sbt 1.0

On 2008-12-18, Mark Harrah announced sbt 0.3.2 as the initial release of sbt. Mark remained the primary author of sbt until sbt 0.13.1 (2013-12-11). In 2014, sbt project was handed over to the authors of this document Josh Suereth and Eugene Yokota.

As we move towards sbt 1.0, we wish to stabilize what's already stable and innovate where it matters. There are several levels of stability:

- conceptual stability
- source compatibility of the build definition
- binary compatibility of the plugins

**Concepts** Conceptually, sbt has been stable on what it does:

1. incremental compilation that supports Scala
2. dependency management that's aware of Scala's binary compatibility
3. task and plugins system that's extensible using Scala
4. a text-based interactive shell

The only thing that we plan to change is the last point. In sbt 1.0, we will replace the interactive shell with sbt server that's accessible via JSON API and a text-based client.

**Source compatibility of the build definition** Source compatibility means that a build source that worked for sbt version A works for another version B without modification. Our goal for sbt 1.0 is to adopt Semantic Versioning, and maintain source compatibility of the build during 1.x.y.

**Binary compatibility of the plugins** Binary compatibility (“bincompat”) of the plugins means that a plugin that was published for sbt version A works for another version B without recompilation. sbt 0.13 has kept binary compatibility for 18 months as of March 2015. The stability here helps maintain the sbt plugin ecosystem. Our goal for sbt 1.0 is to adopt Semantic Versioning, and maintain binary compatibility of the build during 1.x.y.

From the development perspective, maintaining binary compatibility becomes an additional constraint that we need to worry about whenever we make changes. The root of the problem is that sbt 0.13 does not distinguish between public API and internal implementation. Most things are open to plugins.

## Modularization

The process we aim to take for sbt 1.0 is to disassemble sbt into smaller modules and layers. To be clear, sbt 0.13’s codebase already does consist of numerous subprojects.

Layers are more coarse-grained sets of subproject(s) that can be used independently. Another purpose of the modularization is to distinguish between public API and internal implementation. Reducing the surface area of the sbt code base has several benefits:

- It makes it easier for the build users and the plugin authors to learn the APIs.
- It makes it easier for us to maintain binary and semantic compatibilities.
- It encourages the reuse of the modules.

The following is a conceptual diagram of the layers:

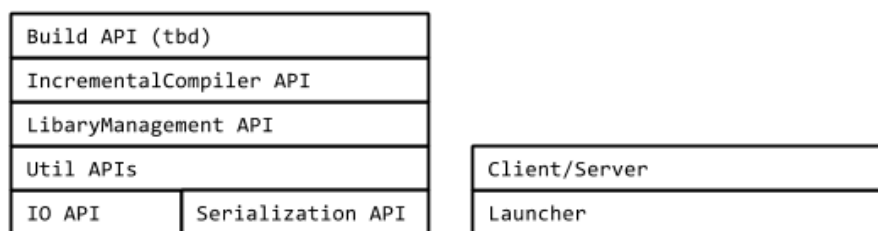


Figure 9: Module diagram

We’ll discuss the details in the next page.

## Module summary

The following is a conceptual diagram of the modular layers:

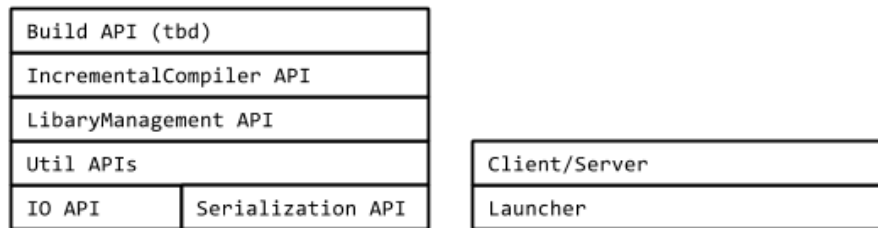


Figure 10: Module diagram

This diagram is arranged such that each layer depends only on the layers underneath it.

**IO API ([sbt/io](#))** IO API is a low level API to deal with files and directories.

**Serialization API ([sbt/serialization](#))** Serialization API is an opinionated wrapper around [Scala Pickling](#). The responsibility of the serialization API is to turn values into JSON.

**Util APIs ([sbt/util](#))** Util APIs provide commonly used features like logging and internal datatypes used by sbt.

**LibraryManagement API ([sbt/librarymanagement](#))** sbt's library management system is based on Apache Ivy, and as such the concepts and terminology around the library management system are also influenced by Ivy. The responsibility of the library management API is to calculate the transitive dependency graph, and download artifacts from the given repositories.

**IncrementalCompiler API ([sbt/incrementalcompiler](#))** Incremental compilation of Scala is so fundamental that we now seldom think of it as a feature of sbt. There are number of subprojects/classes involved that are actually internal details, and we should use this opportunity to hide them.

**Build API ([tbd](#))** This is the part that's exposed to `build.sbt`. The responsibility of the module is to load the build files and plugins, and provide a way for commands to be executed on the state.

This might remain at [sbt/sbt](#).

**sbt Launcher** ([sbt/launcher](#)) The sbt launcher provides a generic container that can load and run programs resolved using the Ivy dependency manager. sbt uses this as the deployment mechanism, but it can be used for other purposes.

See [foundweekends/conscript](#) and [Launcher](#) for more details.

**Client/Server** (tbd) Currently developed in [sbt/sbt-remote-control](#). sbt Server provides a JSON-based API wrapping functionality of the command line experience.

One of the clients will be the “terminal client”, which subsumes the command line sbt shell. Other clients that are planned are IDE integrations.

**Website** ([sbt/website](#)) This website’s source.

## sbt Coding Guideline

This page discusses the coding style and other guidelines for sbt 1.0.

### General goal

sbt 1.0 will primarily target Scala 2.12. We will cross-build against Scala 2.10.

**Clean up old deprecation** Before 1.0 is release, we should clean up deprecations.

**Aim for zero warnings (except deprecation)** On Scala 2.12 we should aim for zero warnings. One exception may be deprecation if it’s required for cross-building.

### Modular design

**Aim small** The fewer methods we can expose to the build user, the easier sbt becomes to maintain.

**Public APIs should be coded against “interfaces”** Code against interfaces.

**Hide implementation details** The implementation details should be hidden behind `sbt.internal.x` packages, where `x` could be the name of the main package (like `io`).

**Less interdependence** Independent modules with fewer dependent libraries are easier to reuse.

**Hide external classes** Avoid exposing external classes in the API, except for standard Scala and Java classes.

**Hide internal modules** A module may be declared internal if it has no use to the public.

### Compiler flags

```
-encoding utf8
-deprecation
-feature
-unchecked
-Xlint
-language:higherKinds
-language:implicitConversions
-Xfuture
-Yinline-warnings
-Yno-adapted-args
-Ywarn-dead-code
-Ywarn-numeric-widen
-Ywarn-value-discard
-Xfatal-warnings
```

The `-Xfatal-warnings` may be removed if there are unavoidable warnings.

**Package name and organization name** Use the package name appended with the layer name, such as `sbt.io` for IO layer. The organization name for published artifacts should remain `org.scala-sbt`.

### Binary resiliency

A good overview on the topic of binary resiliency is [Josh's 2012 talk](#) on Binary resiliency. The guideline here applies mostly to publicly exposed APIs.

**MiMa** Use [MiMa](#).

### Public traits should contain `def` declarations only

- `val` or `var` in a trait results in code generated at subclass and in the artificial `Foo$class.$init$`
- `lazy val` results in code generated at subclass

**Abstract classes are also useful** [To trait, or not to trait?](#). Abstract classes are less flexible than traits, but traits pose more problems for binary compatibility. Abstract classes also have better Java interoperability.

**Seal traits and abstract classes** If there's no need to keep a class open, seal it.

**Finalize the leaf classes** If there's no need to keep a class open, finalize it.

**Typeclass and subclass inheritance** The typeclass pattern with pure traits might ease maintaining binary compatibility more so than subclassing.

**Avoid case classes, use `sbt-datatype`** Case classes involve code generation that makes it harder to maintain binary compatibility over time.

**Prefer method overloading over default parameter values** Default parameter values are effectively code generation, which makes them difficult to maintain.

### Other public API matters

Here are other guidelines about the sbt public API.

**Avoid Stringly-typed programming** Define datatypes.

**Avoid overuse of `def apply`** `def apply` should be reserved for factory methods in a companion object that returns type `T`.

**Use specific datatypes (`Vector`, `List`, or `Array`), rather than `Seq`** `scala.Seq` is `scala.collection.Seq`, which is not immutable. Default to `Vector`. Use `List` if constant prepending is needed. Use `Array` if Java interoperability is needed. Note that using mutable collections is perfectly fine within the implementation.

**Avoid calling `toSeq` or anything with side-effects on `Set`** `Set` is fine if you stick to set operations, like `contains` and `subsetOf`. More often than not, `toSeq` is called explicitly or implicitly, or some side-effecting method is called from `map`. This introduces non-determinism to the code.

**Avoid calling `toSeq` on `Map`** Same as above. This will introduce non-determinism.

**Avoid functions and tuples in the signature, if Java interoperability is needed** Instead of functions and tuples, turn them into a trait. This applies where interoperability is a concern, like implementing incremental compilation.

### Style matters

**Use `scalariform`** `sbt-houserules` comes with `scalariform` for formatting source code consistently.

**Avoid procedure syntax** Declare an explicit `Unit` return.

**Define instances of typeclasses in their companion objects, when possible** This style is encouraged:

```
final class FooID {}
object FooID {
  implicit val fooIdPICKLERUnpicker: PICKLERUnpickler[FooID] = ???
}
```

**Implicit conversions for syntax (enrich-my-library pattern) should be imported** Avoid defining implicit converters in companion objects and package objects.

Suppose the `IO` module introduces a `URL` enrichment called `RichURI`, and `LibraryManagement` introduces a `String` enrichment called `GroupID` (for `ModuleID` syntax). These implicit conversions should be defined in an object named `syntax` in the respective package:

```
package sbt.io

object syntax {
  implicit def uriToRichURI(uri: URI): RichURI = new RichURI(uri)
}
```

When all the layers are available, the `sbt` package should also define an object called `syntax` which forwards implicit conversions from all the layers:

```
package sbt

object syntax {
  implicit def uriToRichURI(uri: URI): io.RichURI = io.syntax.uriToRichURI(uri)
  ....
}
```

## sbt-datatype

sbt-datatype is a code generation library and an sbt autoplugin that generates growable datatypes and helps developers avoid breakage of binary compatibility.

Unlike standard Scala case classes, the datatypes (or pseudo case classes) generated by this library allow the developer to add new fields to the defined datatypes without breaking binary compatibility, while offering (almost) the same functionality as plain case classes. The only difference is that datatype doesn't generate `unapply` or `copy` methods, because they would break binary compatibility.

In addition, sbt-datatype is also able to generate JSON codec for sjson-new, which can work against various JSON backends.

Our plugin takes as input a datatype schema in the form of a JSON object, whose format is based on the format defined by [Apache Avro](#), and generates the corresponding code in Java or Scala along with the boilerplate code that will allow the generated classes to remain binary-compatible with previous versions of the datatype.

The source code of the library and autoplugin [can be found on GitHub](#).

### Using the plugin

To enable the plugin for your build, put the following line in `project/datatype.sbt`:

```
addSbtPlugin("org.scala-sbt" % "sbt-datatype" % "0.2.2")
```

Your datatype definitions should be placed by default in `src/main/datatype` and `src/test/datatype`. Here's how your build should be configured:

```
lazy val library = (project in file("library"))
  .enablePlugins(DatatypePlugin)
  .settings(
    name := "foo library",
  )
```



## Datatype schema

Datatype is able to generate three kinds of types:

1. Records
2. Interfaces
3. Enums

**Records** Records are mapped to Java or Scala `classes`, corresponding to the standard case classes in Scala.

```
{
  "types": [
    {
      "name": "Person",
      "type": "record",
      "target": "Scala",
      "fields": [
        {
          "name": "name",
          "type": "String"
        },
        {
          "name": "age",
          "type": "int"
        }
      ]
    }
  ]
}
```

This schema will produce the following Scala class:

```
final class Person(
  val name: String,
  val age: Int) extends Serializable {
  override def equals(o: Any): Boolean = o match {
    case x: Person => (this.name == x.name) && (this.age == x.age)
    case _ => false
  }
  override def hashCode: Int = {
    37 * (37 * (17 + name.##) + age.##)
  }
  override def toString: String = {
```

```

    "Person(" + name + ", " + age + ")"
  }
  private[this] def copy(name: String = name, age: Int = age): Person = {
    new Person(name, age)
  }
  def withName(name: String): Person = {
    copy(name = name)
  }
  def withAge(age: Int): Person = {
    copy(age = age)
  }
}
object Person {
  def apply(name: String, age: Int): Person = new Person(name, age)
}

```

Or the following Scala code (after changing the `target` property to "Java"):

```

public final class Person implements java.io.Serializable {
  private String name;
  private int age;
  public Person(String _name, int _age) {
    super();
    name = _name;
    age = _age;
  }
  public String name() {
    return this.name;
  }
  public int age() {
    return this.age;
  }
  public boolean equals(Object obj) {
    if (this == obj) {
      return true;
    } else if (!(obj instanceof Person)) {
      return false;
    } else {
      Person o = (Person)obj;
      return name().equals(o.name()) && (age() == o.age());
    }
  }
  public int hashCode() {
    return 37 * (37 * (17 + name().hashCode()) + (new Integer(age())).hashCode());
  }
}

```

```

    public String toString() {
        return "Person(" + "name: " + name() + ", " + "age: " + age() + ")";
    }
}

```

**Interfaces** Interfaces are mapped to Java `abstract classes` or Scala `abstract classes`. They can be extended by other interfaces or records.

```

{
  "types": [
    {
      "name": "Greeting",
      "namespace": "com.example",
      "target": "Scala",
      "type": "interface",
      "fields": [
        {
          "name": "message",
          "type": "String"
        }
      ],
      "types": [
        {
          "name": "SimpleGreeting",
          "namespace": "com.example",
          "target": "Scala",
          "type": "record"
        }
      ]
    }
  ]
}

```

This generates abstract class named `Greeting` and a class named `SimpleGreeting` that extends `Greeting`.

In addition, interfaces can define `messages`, which generates abstract method declarations.

```

{
  "types": [
    {
      "name": "FooService",
      "target": "Scala",
      "type": "interface",

```

```

    "messages": [
      {
        "name": "doSomething",
        "response": "int*",
        "request": [
          {
            "name": "arg0",
            "type": "int*",
            "doc": [
              "The first argument of the message.",
            ]
          }
        ]
      }
    ]
  }
}

```

**Enums** Enums are mapped to Java enumerations or Scala case objects.

```

{
  "types": [
    {
      "name": "Weekdays",
      "type": "enum",
      "target": "Java",
      "symbols": [
        "Monday", "Tuesday", "Wednesday", "Thursday",
        "Friday", "Saturday", "Sunday"
      ]
    }
  ]
}

```

This schema will generate the following Java code:

```

public enum Weekdays {
    Monday,
    Tuesday,
    Wednesday,
    Thursday,
    Friday,
    Saturday,

```

```
    Sunday
}
```

Or the following Scala code (after changing the `target` property to):

```
sealed abstract class Weekdays extends Serializable
object Weekdays {
  case object Monday extends Weekdays
  case object Tuesday extends Weekdays
  case object Wednesday extends Weekdays
  case object Thursday extends Weekdays
  case object Friday extends Weekdays
  case object Saturday extends Weekdays
  case object Sunday extends Weekdays
}
```

### Using datatype to retain binary compatibility

By using the `since` and `default` parameters, it is possible to grow existing datatypes while remaining binary compatible with classes that have been compiled against an earlier version of your datatype definition.

Consider the following initial version of a datatype:

```
{
  "types": [
    {
      "name": "Greeting",
      "type": "record",
      "target": "Scala",
      "fields": [
        {
          "name": "message",
          "type": "String"
        }
      ]
    }
  ]
}
```

The generated code could be used in a Scala program using the following code:

```
val greeting = Greeting("hello")
```

Imagine now that you would like to extend your datatype to include a date to the `Greetings`. The datatype can be modified accordingly:

```
{
  "types": [
    {
      "name": "Greeting",
      "type": "record",
      "target": "Scala",
      "fields": [
        {
          "name": "message",
          "type": "String"
        },
        {
          "name": "date",
          "type": "java.util.Date"
        }
      ]
    }
  ]
}
```

Unfortunately, the code that used `Greeting` would no longer compile, and classes that have been compiled against the previous version of the datatype would crash with a `NoSuchMethodError`.

To circumvent this problem and allow you to grow your datatypes, it is possible to indicate the version `since` the field exists and a `default` value in the datatype definition:

```
{
  "types": [
    {
      "name": "Greeting",
      "type": "record",
      "target": "Scala",
      "fields": [
        {
          "name": "message",
          "type": "String"
        },
        {
          "name": "date",
          "type": "java.util.Date",
          "since": "0.2.0",

```

```

        "default": "new java.util.Date()"
      }
    ]
  }
]
}

```

Now the code that was compiled against previous definitions of the datatype will still run.

## JSON codec generation

Adding `JsonCodecPlugin` to the subproject will generate sjson-new JSON codes for the datatypes.

```

lazy val root = (project in file(".")) .enablePlugins(DatatypePlugin, Json-
  CodecPlugin) .settings( scalaVersion := "2.11.8", libraryDependencies +=
  "com.eed3si9n" %% "sjson-new-scalajson" % "0.4.1" )

```

`codecNamespace` can be used to specify the package name for the codecs.

```

{
  "codecNamespace": "com.example.codec",
  "fullCodec": "CustomJsonProtocol",
  "types": [
    {
      "name": "Person",
      "namespace": "com.example",
      "type": "record",
      "target": "Scala",
      "fields": [
        {
          "name": "name",
          "type": "String"
        },
        {
          "name": "age",
          "type": "int"
        }
      ]
    }
  ]
}

```

JsonFormat traits will be generated under `com.example.codec` package, along with a full codec named `CustomJsonProtocol` that mixes in all the traits.

```

scala> import sjsonnew.support.scalajson.unsafe.{ Converter, CompactPrinter, Parser }
import sjsonnew.support.scalajson.unsafe.{Converter, CompactPrinter, Parser}

scala> import com.example.codec.CustomJsonProtocol._
import com.example.codec.CustomJsonProtocol._

scala> import com.example.Person
import com.example.Person

scala> val p = Person("Bob", 20)
p: com.example.Person = Person(Bob, 20)

scala> val j = Converter.toJsonUnsafe(p)
j: scala.json.ast.unsafe.JValue = JObject([Lscala.json.ast.unsafe.JField;@6731ad72)

scala> val s = CompactPrinter(j)
s: String = {"name":"Bob","age":20}

scala> val x = Parser.parseUnsafe(s)
x: scala.json.ast.unsafe.JValue = JObject([Lscala.json.ast.unsafe.JField;@7331f7f8)

scala> val q = Converter.fromJsonUnsafe[Person](x)
q: com.example.Person = Person(Bob, 20)

scala> assert(p == q)

```

### Existing parameters for protocols, records, etc.

All the elements of the schema definition accept a number of parameters that will influence the generated code. These parameters are not available for every node of the schema. Please refer to the syntax summary to see whether a parameters can be defined for a node.

#### name

This parameter defines the name of a field, record, field, etc.

#### target

This parameter determines whether the code will be generated in Java or Scala.

#### namespace

This parameter exists only for **Definitions**. It determines the package in which the code will be generated.

#### doc

The Javadoc that will accompany the generated element.



#### **fields**

For a **protocol** or a **record** only, it describes all the fields that compose the generated entity.

#### **types**

For a **protocol**, it defines the child **protocols** and **records** that extend it.

For an **enumeration**, it defines the values of the enumeration.

#### **since**

This parameter exists for **fields** only. It indicates the version in which the field has been added to its parent **protocol** or **record**.

When this parameter is defined, **default** must also be defined.

#### **default**

This parameter exists for **fields** only. It indicates what the default value should be for this field, in case it is used by a class that has been compiled against an earlier version of this datatype.

It must contain an expression which is valid in the **target** language of the parent **protocol** or **record**.

#### **type for fields**

It indicates what is the underlying type of the field.

Always use the type that you want to see in Scala. For instance, if your field will contain an integer value, use **Int** rather than Java's **int**. **datatype** will automatically use Java's primitive types if they are available.

For non-primitive types, it is recommended to write the fully-qualified type.

#### **type for other definitions**

It simply indicates the kind of entity that you want to generate: **protocol**, **record** or **enumeration**.

### **Settings**

This location can be changed by setting a new location in your build definition:

```
datatypeSource in generateDatatypes := file("some/location")
```

The plugin exposes other settings for Scala code generation:

1. **datatypeScalaFileNames** in (**Compile**, **generateDatatypes**) This setting accepts a function **Definition => File** which will determine the filename for every generated Scala definition.

2. `datatypeScalaSealInterfaces` in `(Compile, generateDatatypes)`  
This setting accepts a boolean value, and will determine whether interfaces should be `sealed` or not.

### Syntax summary

```
Schema      := {  "types": [ Definition* ]
                  (, "codecNamespace": string constant)?
                  (, "fullCodec": string constant)? }

Definition  := Record | Interface | Enumeration

Record      := {  "name": ID,
                  "type": "record",
                  "target": ("Scala" | "Java")
                  (, "namespace": string constant)?
                  (, "doc": string constant)?
                  (, "fields": [ Field* ])? }

Interface   := {  "name": ID,
                  "type": "interface",
                  "target": ("Scala" | "Java")
                  (, "namespace": string constant)?
                  (, "doc": string constant)?
                  (, "fields": [ Field* ])?
                  (, "messages": [ Message* ])?
                  (, "types": [ Definition* ])? }

Enumeration := {  "name": ID,
                  "type": "enum",
                  "target": ("Scala" | "Java")
                  (, "namespace": string constant)?
                  (, "doc": string constant)?
                  (, "symbols": [ Symbol* ])? }

Symbol      := ID
{  "name": ID
  (, "doc": string constant)? }

Field       := {  "name": ID,
                  "type": ID
                  (, "doc": string constant)?
                  (, "since": version number string)?
                  (, "default": string constant)? }
```

```

Message      := {   "name": ID,
                    "response": ID
                    (, "request": [ Request* ])?
                    (, "doc": string constant)? }

Request      := {   "name": ID,
                    "type": ID
                    (, "doc": string constant)? }

```

## Compiler Interface

The compiler interface is the communication link between sbt and the Scala compiler.

It is used to get information from the Scala compiler, and must therefore be compiled against the Scala version in use for the configured projects.

The code for this project can be found in the directory [compile/interface](#).

## Fetching the most specific sources

Because the compiler interface is recompiled against each Scala version in use in your project, its source must stay compatible with all the Scala versions that sbt supports (from Scala 2.8 to the latest version of Scala).

This comes at great cost for both the sbt maintainers and the Scala compiler authors:

1. The compiler authors cannot remove old and deprecated public APIs from the Scala compiler.
2. sbt cannot use new APIs defined in the Scala compiler.
3. sbt must implement [all kinds of hackery](#) to remain source-compatible with all versions of the Scala compiler and support new features.

To circumvent this problem, a new mechanism that allows sbt to fetch the version of the sources for the compiler interface that are the most specific for the Scala version in use has been implemented in sbt.

For instance, for a project that is compiled using Scala 2.11.8-M2, sbt will look for the following version of the sources for the compiler interface, in this order:

1. 2.11.8-M2
2. 2.11.8
3. 2.11
4. The default sources.

This new mechanism allows both the Scala compiler and sbt to move forward and enjoy new APIs while being certain that users of older versions of Scala will still be able to use sbt.

Finally, another advantage of this technique is that it relies on Ivy to retrieve the sources of the compiler bridge, but can be easily ported for use with Maven, which is the distribution mechanism that the sbt maintainers would like to use to distribute sbt's modules.

## sbt Launcher

The sbt launcher provides a generic container that can load and run programs resolved using the Ivy dependency manager. Sbt uses this as its own deployment mechanism.

The code is hosted at [sbt/launcher](#).

## Getting Started with the sbt launcher

The sbt launcher provides two parts:

1. An interface for launched applications to interact with the launcher code
2. A minimal sbt-launch.jar that can launch applications by resolving them through ivy.

The sbt launcher component is a self-contained jar that boots a Scala application or server without Scala or the application already existing on the system. The only prerequisites are the launcher jar itself, an optional configuration file, and a Java runtime version 1.6 or greater.

## Overview

A user downloads the launcher jar and creates a script to run it. In this documentation, the script will be assumed to be called `launch`. For Unix, the script would look like: `java -jar sbt-launcher.jar "$@"`

The user can now launch servers and applications which provide sbt launcher configuration.

Alternatively, you can repackage the launcher with a launcher configuration file. For example, [sbt/sbt](#) pulls in the raw JAR and [injects the appropriate boot.properties files for sbt](#).

**Applications** To launch an application, the user then downloads the configuration file for the application (call it `my.app.configuration`) and creates a script to launch it (call it `myapp`):

```
launch @my.app.configuration "$@"
```

The user can then launch the application using `myapp arg1 arg2 ...`

More on launcher configuration can be found at [Launcher Configuration](#)

**Servers** The sbt launcher can be used to launch and discover running servers on the system. The launcher can be used to launch servers similarly to applications. However, if desired, the launcher can also be used to ensure that only one instance of a server is running at time. This is done by having clients always use the launcher as a *service locator*.

To discover where a server is running (or launch it if it is not running), the user downloads the configuration file for the server (call it `my.server.configuration`) and creates a script to discover the server (call it `find-myserver`):

```
launch --locate @my.server.properties.
```

This command will print out one string, the URI at which to reach the server, e.g. `sbt://127.0.0.1:65501`. Clients should use the IP/port to connect to the server and initiate their connection.

When using the `locate` feature, the sbt launcher makes the following restrictions to servers:

- The Server must have a starting class that extends the `xsbti.ServerMain` class
- The Server must have an entry point (URI) that clients can use to detect the server
- The server must have defined a lock file which the launcher can use to ensure that only one instance is running at a time
- The filesystem on which the lock file resides must support locking.
- The server must allow the launcher to open a socket against the port without sending any data. This is used to check if a previous server is still alive.

**Resolving Applications/Servers** Like the launcher used to distribute sbt, the downloaded launcher jar will retrieve Scala and the application according to the provided configuration file. The versions may be fixed or read from

a different configuration file (the location of which is also configurable). The location to which the Scala and application jars are downloaded is configurable as well. The repositories searched are configurable. Optional initialization of a properties file on launch is configurable.

Once the launcher has downloaded the necessary jars, it loads the application/server and calls its entry point. The application is passed information about how it was called: command line arguments, current working directory, Scala version, and application ID (organization, name, version). In addition, the application can ask the launcher to perform operations such as obtaining the Scala jars and a `ClassLoader` for any version of Scala retrievable from the repositories specified in the configuration file. It can request that other applications be downloaded and run. When the application completes, it can tell the launcher to exit with a specific exit code or to reload the application with a different version of Scala, a different version of the application, or different arguments.

There are some other options for setup, such as putting the configuration file inside the launcher jar and distributing that as a single download. The rest of this documentation describes the details of configuring, writing, distributing, and running the application.

**Creating a Launched Application** This section shows how to make an application that is launched by this launcher. First, declare a dependency on the `launcher-interface`. Do not declare a dependency on the launcher itself. The launcher interface consists strictly of Java interfaces in order to avoid binary incompatibility between the version of Scala used to compile the launcher and the version used to compile your application. The launcher interface class will be provided by the launcher, so it is only a compile-time dependency. If you are building with sbt, your dependency definition would be:

```
libraryDependencies += "org.scala-sbt" % "launcher-interface" % "1.0.0" % "provided"

resolvers += sbtResolver.value
```

Make the entry point to your class implement `xsbti.AppMain`. An example that uses some of the information:

```
package com.acme.launcherapp

class Main extends xsbti.AppMain
{
  def run(configuration: xsbti.AppConfiguration) =
  {
    // get the version of Scala used to launch the application
  }
}
```

```

val scalaVersion = configuration.provider.scalaProvider.version

// Print a message and the arguments to the application
println("Hello world! Running Scala " + scalaVersion)
configuration.arguments.foreach(println)

// demonstrate the ability to reboot the application into different versions of Scala
// and how to return the code to exit with
scalaVersion match
{
  case "2.10.6" =>
    new xsbti.Reboot {
      def arguments = configuration.arguments
      def baseDirectory = configuration.baseDirectory
      def scalaVersion = "2.11.8"
      def app = configuration.provider.id
    }
  case "2.11.8" => new Exit(1)
  case _ => new Exit(0)
}
class Exit(val code: Int) extends xsbti.Exit
}

```

Next, define a configuration file for the launcher. For the above class, it might look like:

```

[scala]
  version: 2.11.8
[app]
  org: com.acme
  name: launcherapp
  version: 0.0.1
  class: com.acme.launcherapp.Main
  cross-versioned: true
[repositories]
  local
  maven-central
[boot]
  directory: ${user.home}/.myapp/boot

```

Then, `publishLocal` or `+publishLocal` the application in sbt's shell to make it available. For more information, see [Launcher Configuration](#).

**Running an Application** As mentioned above, there are a few options to actually run the application. The first involves providing a modified jar for download. The second two require providing a configuration file for download.

- Replace the `/sbt/sbt.boot.properties` file in the launcher jar and distribute the modified jar. The user would need a script to run `java -jar your-launcher.jar arg1 arg2 ....`
- The user downloads the launcher jar and you provide the configuration file.
  - The user needs to run `java -Dsbtc.boot.properties=your.boot.properties -jar launcher.jar`.
  - The user already has a script to run the launcher (call it ‘launch’). The user needs to run `launch @your.boot.properties your-arg-1 your-arg-2`

**Execution** Let’s review what’s happening when the launcher starts your application.

On startup, the launcher searches for its configuration and then parses it. Once the final configuration is resolved, the launcher proceeds to obtain the necessary jars to launch the application. The `boot.directory` property is used as a base directory to retrieve jars to. Locking is done on the directory, so it can be shared system-wide. The launcher retrieves the requested version of Scala to

```
${boot.directory}/${scala.version}/lib/
```

If this directory already exists, the launcher takes a shortcut for startup performance and assumes that the jars have already been downloaded. If the directory does not exist, the launcher uses Apache Ivy to resolve and retrieve the jars. A similar process occurs for the application itself. It and its dependencies are retrieved to

```
${boot.directory}/${scala.version}/${app.org}/${app.name}/.
```

Once all required code is downloaded, the class loaders are set up. The launcher creates a class loader for the requested version of Scala. It then creates a child class loader containing the jars for the requested `app.components` and with the paths specified in `app.resources`. An application that does not use components will have all of its jars in this class loader.

The main class for the application is then instantiated. It must be a public class with a public no-argument constructor and must conform to `xsbt.AppMain`. The `run` method is invoked and execution passes to the application. The argument to the ‘run’ method provides configuration information and a callback to



obtain a class loader for any version of Scala that can be obtained from a repository in [repositories]. The return value of the `run` method determines what is done after the application executes. It can specify that the launcher should restart the application or that it should exit with the provided exit code.

## Sbt Launcher Architecture

The sbt launcher is a mechanism whereby modules can be loaded from Ivy and executed within a JVM. It abstracts the mechanism of grabbing and caching jars, allowing users to focus on what application they want, and control its versions.

The launcher's primary goal is to take configuration for applications— mostly Ivy coordinates and a main class—and start the application. The launcher resolves the Ivy module, caches the required runtime jars, and starts the application.

The sbt launcher provides the application with the means to load a different application when it completes, exit normally, or load additional applications from inside another.

The sbt launcher provides these core functions:

- Module Resolution
- Classloader Caching and Isolation
- File Locking
- Service Discovery and Isolation

### Module Resolution

The primary purpose of the sbt launcher is to resolve applications and run them. This is done through the `[app]` configuration section. See [launcher configuration](#) for more information on how to configure module resolution.

Module resolution is performed using the Ivy dependency management library. This library supports loading artifacts from Maven repositories as well.

### Classloader Caching and Isolation

The sbt launcher's classloading structure is different than just starting an application in the standard Java mechanism. Every application loaded by the launcher is given its own classloader. This classloader is a child of the Scala classloader used by the application. The Scala classloader can see all of the `xsbti.*` classes from the launcher itself.

Here's an example classloader layout from an sbt-launched application.

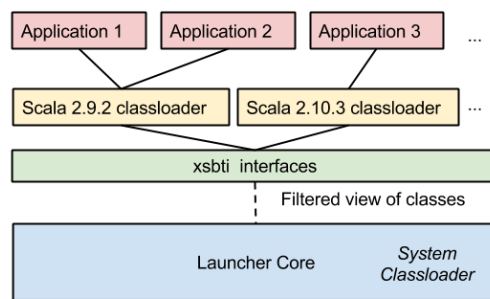


Figure 11: image

In this diagram, three different applications were loaded. Two of these use the same version of Scala (2.9.2). In this case, sbt can share the same classloader for these applications. This has the benefit that any JIT optimisations performed on Scala classes can be re-used between applications thanks to the shared classloader.

## Caching

The sbt launcher creates a secondary cache on top of Ivy's own cache. This helps isolate applications from errors resulting from unstable revisions, like `-SNAPSHOT`. For any launched application, the launcher creates a directory to store all its jars. Here's an example layout.

## Locking

In addition to providing a secondary cache, the launcher also provides a mechanism of safely doing file-based locks. This is used in two places directly by the launcher:

1. Locking the boot directory.
2. Ensuring located servers have at most one active process.

This feature requires a filesystem which supports locking. It is exposed via the `xsbti.GlobalLock` interface.

*Note: This is both a thread and file lock. Not only are we limiting access to a single process, but also a single thread within that process.*

## Service Discovery and Isolation

The launcher also provides a mechanism to ensure that only one instance of a server is running, while dynamically starting it when a client requests. This is done through the `--locate` flag on the launcher. When the launcher is started with the `--locate` flag it will do the following:

1. Lock on the configured server lock file.
2. Read the server properties to find the URI of the previous server.
3. If the port is still listening to connection requests, print this URI on the command line.
4. If the port is not listening, start a new server and write the URI on the command line.
5. Release all locks and shutdown.

The configured `server.lock` file is thus used to prevent multiple servers from running. sbt itself uses this to prevent more than one server running on any given project directory by configuring `server.lock` to be `${user.dir}/.sbtserver`.

## sbt Launcher Configuration

The launcher may be configured in one of the following ways in increasing order of precedence:

- Replace the `/sbt/sbt.boot.properties` file in the launcher jar
- Put a configuration file named `sbt.boot.properties` on the classpath. Put it in the classpath root without the `/sbt` prefix.
- Specify the location of an alternate configuration on the command line, either as a path or an absolute URI. This can be done by either specifying the location as the system property `sbt.boot.properties` or as the first argument to the launcher prefixed by `@`. The system property has lower precedence. Resolution of a relative path is first attempted against the current working directory, then against the user's home directory, and then against the directory containing the launcher jar.

An error is generated if none of these attempts succeed.

### Example

The default configuration file for sbt as an application looks like:

```
[scala]
  version: ${sbt.scala.version-auto}

[app]
  org: ${sbt.organization-org.scala-sbt}
  name: sbt
  version: ${sbt.version-read(sbt.version)[0.13.5]}
  class: ${sbt.main.class-sbt.xMain}
  components: xsbti,extra
  cross-versioned: ${sbt.cross.versioned-false}

[repositories]
  local
  typesafe-ivy-releases: http://repo.typesafe.com/typesafe/ivy-releases/, [organization]/[mod
  maven-central
  sonatype-snapshots: https://oss.sonatype.org/content/repositories/snapshots
```

```
[boot]
  directory: ${sbt.boot.directory-${sbt.global.base-${user.home}/.sbt}/boot/}

[ivy]
  ivy-home: ${sbt.ivy.home-${user.home}/.ivy2/}
  checksums: ${sbt.checksums-sha1,md5}
  override-build-repos: ${sbt.override.build.repos-false}
  repository-config: ${sbt.repository.config-${sbt.global.base-${user.home}/.sbt}/repository}
```

Let's look at all the launcher configuration sections in detail:

**1. Scala Configuration** The `[scala]` section is used to configure the version of Scala. It has one property:

- **version** - The version of Scala an application uses, or `auto` if the application is not cross-versioned.
- **classifiers** - The (optional) list of additional Scala artifacts to resolve, e.g. sources.

**2. Application Identification** The `[app]` section configures how the launcher will look for your application using the Ivy dependency manager. It consists of the following properties:

- **org** - The organization associated with the Ivy module. (`groupId` in Maven vernacular)
- **name** - The name of the Ivy module. (`artifactId` in Maven vernacular)
- **version** - The revision of the Ivy module.
- **class** - The name of the “entry point” into the application. An entry point must be a class which meets one of the following criteria
  - Extends the `xsbti.AppMain` interface.
  - Extends the `xsbti.ServerMain` interfaces.
  - Contains a method with the signature `static void main(String[])`
  - Contains a method with the signature `static int main(String[])`
  - Contains a method with the signature `static xsbti.Exit main(String[])`
- **components** - An optional list of additional components that Ivy should resolve.
- **cross-versioned** - An optional string denoting how this application is published. If `app.cross-versioned` is binary, the resolved module ID is `{app.name+'_'+CrossVersion.binaryScalaVersion(scala.version)}`. If `app.cross-versioned` is true or full, the resolved module ID is `{app.name+'_'+scala.version}`. The `scala.version` property must be specified and cannot be `auto` when cross-versioned.

- **resources** - An optional list of jar files that should be added to the application's classpath.
- **classifiers** - An optional list of additional classifiers that should be resolved with this application, e.g. sources.

**3. Repositories Section** The `[repositories]` section configures where and how Ivy will look for your application. Each line denotes a repository where Ivy will look.

*Note: This section configured the default location where Ivy will look, but this can be overridden via user configuration.*

There are several built-in strings that can be used for common repositories:

- **local** - the local Ivy repository `~/.ivy2/local`.
- **maven-local** - The local Maven repository `~/.m2/repository`.
- **maven-central** - The Maven Central repository `repo.maven.org`.

Besides built in repositories, other repositories can be configured using the following syntax:

```
name: url(, pattern)(,descriptorOptional)(,skipConsistencyCheck)
```

The **name** property is an identifier which Ivy uses to cache modules resolved from this location. The **name** should be unique across all repositories.

The **url** property is the base **url** where Ivy should look for modules.

The **pattern** property is an optional specification of *how* Ivy should look for modules. By default, the launcher assumes repositories are in the maven style format.

The **skipConsistencyCheck** string is used to tell Ivy not to validate checksums and signatures of files it resolves.

**4. The Boot section** The `[boot]` section is used to configure where the sbt launcher will store its cache and configuration information. It consists of the following properties:

- **directory** - The directory defined here is used to store all cached JARs resolved launcher.
- **properties** - (optional) A properties file to use for any **read** variables.

**5. The Ivy section** The `[ivy]` section is used to configure the Ivy dependency manager for resolving applications. It consists of the following properties:

- **ivy-home** - The home directory for Ivy. This determines where the ivy-local repository is located, and also where the Ivy cache is stored. Defaults to `~/.ivy2`
- **checksums** - The comma-separated list of checksums that Ivy should use to verify artifacts have correctly resolved, e.g. `md5` or `sha1`.
- **override-build-repos** - If this is set, then the `isOverrideRepositories` method on `xsbti.Launcher` interface will return its value. The use of this method is application-specific, but in the case of `sbt` denotes that the configuration of repositories in the launcher should override those used by any build. Applications should respect this convention if they can.
- **repository-config** - This specifies a configuration location where Ivy repositories can also be configured. If this file exists, then its contents override the `[repositories]` section.

**6. The Server Section** When using the `--locate` feature of the launcher, this section configures how a server is started. It consists of the following properties:

- **lock** - The file that controls access to the running server. This file will contain the active port used by a server and must be located on a filesystem that supports locking.
- **jvmargs** - A file that contains line-separated JVM arguments that were used when starting the server.
- **jvmprops** - The location of a properties file that will define override properties in the server. All properties defined in this file will be set as `-D` Java properties.

## Variable Substitution

Property values may include variable substitutions. A variable substitution has one of these forms:

- `${variable.name}`
- `${variable.name-default}`

where `variable.name` is the name of a system property. If a system property by that name exists, the value is substituted. If it does not exist and a default is specified, the default is substituted after recursively substituting variables in it. If the system property does not exist and no default is specified, the original string is not substituted.

There is also a special variable substitution:

```
read(property.name)[default]
```

This will look in the file configured by `boot.properties` for a value. If there is no `boot.properties` file configured, or the property does not exist, then the default value is chosen.

## Syntax

The configuration file is line-based, read as UTF-8 encoded, and defined by the following grammar. 'nl' is a newline or end of file and 'text' is plain text without newlines or the surrounding delimiters (such as parentheses or square brackets):

```
configuration: scala app repositories boot log appProperties
scala: "[" "scala" "]" nl version nl classifiers nl
app: "[" "app" "]" nl org nl name nl version nl components nl class nl crossVersioned nl res
repositories: "[" "repositories" "]" nl (repository nl)*
boot: "[" "boot" "]" nl directory nl bootProperties nl search nl promptCreate nl promptFill
log: "[" "log" "]" nl logLevel nl
appProperties: "[" "app-properties" "]" nl (property nl)*
ivy: "[" "ivy" "]" nl homeDirectory nl checksums nl overrideRepos nl repoConfig nl
directory: "directory" ":" path
bootProperties: "properties" ":" path
search: "search" ":" ( "none" | "nearest" | "root-first" | "only" ) ( "," path)*
logLevel: "level" ":" ( "debug" | "info" | "warn" | "error" )
promptCreate: "prompt-create" ":" label
promptFill: "prompt-fill" ":" boolean
quickOption: "quick-option" ":" boolean
version: "version" ":" versionSpecification
versionSpecification: readProperty | fixedVersion
readProperty: "read" "(" propertyName ")" "[" default "]"
fixedVersion: text
classifiers: "classifiers" ":" text ( "," text)*
homeDirectory: "ivy-home" ":" path
checksums: "checksums" ":" checksum ( "," checksum)*
overrideRepos: "override-build-repos" ":" boolean
repoConfig: "repository-config" ":" path
org: "org" ":" text
name: "name" ":" text
class: "class" ":" text
components: "components" ":" component ( "," component)*
crossVersioned: "cross-versioned" ":" ( "true" | "false" | "none" | "binary" | "full" )
resources: "resources" ":" path ( "," path)*
repository: ( predefinedRepository | customRepository ) nl
predefinedRepository: "local" | "maven-local" | "maven-central"
```



```

customRepository: label ":" url [ [", " ivyPattern] [", " artifactPattern] [", mavenCompatible
property: label ":" propertyDefinition ("," propertyDefinition)*
propertyDefinition: mode "=" (set | prompt)
mode: "quick" | "new" | "fill"
set: "set" "(" value ")"
prompt: "prompt" "(" label ")" ("[" default "]" )?
boolean: "true" | "false"
nl: "\r\n" | "\n" | "\r"
path: text
propertyName: text
label: text
default: text
checksum: text
ivyPattern: text
artifactPattern: text
url: text
component: text

```

## Notes

Here are some more docs that used to be part of Developer Guide.

## Core Principles

This document details the core principles overarching sbt's design and code style. sbt's core principles can be stated quite simply:

1. Everything should have a **Type**, enforced as much as is practical.
2. Dependencies should be **explicit**.
3. Once learned, a concept should hold throughout **all** parts of sbt.
4. Parallel is the default.

With these principles in mind, let's walk through the core design of sbt.

### Introduction to build state

This is the first piece you hit when starting sbt. sbt's command engine is the means by which it processes user requests using the build state. The command engine is essentially a means of applying **state transformations** on the build state, to execute user requests.

In sbt, commands are functions that take the current build state (`sbt.State`) and produce the next state. In other words, they are essentially functions of

`sbt.State => sbt.State`. However, in reality, Commands are actually string processors which take some string input and act on it, returning the next build state.

So, the entirety of sbt is driven off the `sbt.State` class. Since this class needs to be resilient in the face of custom code and plugins, it needs a mechanism to store the state from any potential client. In dynamic languages, this can be done directly on objects.

A naive approach in Scala is to use a `Map<String,Any>`. However, this violates tenant #1: Everything should have a Type. So, sbt defines a new type of map called an `AttributeMap`. An `AttributeMap` is a key-value storage mechanism where keys are both strings *and* expected Types for their value.

Here is what the type-safe `AttributeKey` key looks like :

```
sealed trait AttributeKey[T] {  
  /** The label is the identifier for the key and is camelCase by convention. */  
  def label: String  
  /** The runtime evidence for ``T`` */  
  def manifest: Manifest[T]  
}
```

These keys store both a `label` (string) and some runtime type information (`manifest`). To put or get something on the `AttributeMap`, we first need to construct one of these keys. Let's look at the basic definition of the `AttributeMap`:

```
trait AttributeMap {  
  /** Gets the value of type ``T`` associated with the key ``k`` or ``None`` if no value is  
   * If a key with the same label but a different type is defined, this method will return ``None``.  
   */  
  def get[T](k: AttributeKey[T]): Option[T]  
  
  /** Adds the mapping ``k -> value`` to this map, replacing any existing mapping for ``k``.  
   * Any mappings for keys with the same label but different types are unaffected. */  
  def put[T](k: AttributeKey[T], value: T): AttributeMap  
}
```

Now that there's a definition of what build state is, there needs to be a way to dynamically construct it. In sbt, this is done through the `Setting[_]` sequence.

## Settings Architecture

A Setting represents the means of constructing the value of one particular `AttributeKey[_]` in the `AttributeMap` of build state. A setting consists of two pieces:

1. The `AttributeKey[T]` where the value of the setting should be assigned.
2. An `Initialize[T]` object which is able to construct the value for this setting.

sbt's initialization time is basically just taking a sequence of these `Setting[_]` objects and running their initialization objects and then storing the value into the `AttributeMap`. This means overwriting an existing value at a key is as easy as appending a `Setting[_]` to the end of the sequence which does so.

Where it gets interesting is that `Initialize[T]` can depend on other `AttributeKey[_]`s in the build state. Each `Initialize[_]` can pull values from any `AttributeKey[_]` in the build state's `AttributeMap` to compute its value. sbt ensures a few things when it comes to `Initialize[_]` dependencies:

1. There can be no circular dependencies
2. If one `Initialize[_]` depends on another `Initialize[_]` key, then *all* associated `Initialize[_]` blocks for that key must have run before we load the value.

Let's look at what gets stored for the setting :

```
normalizedName := normalize(name.value)
```

Here, a `Setting[_]` is constructed that understands it depends on the value in the `name AttributeKey`. Its initialize block first grabs the value of the `name` key, then runs the function `normalize` on it to compute its value.

This represents the core mechanism of how to construct sbt's build state. Conceptually, at some point we have a graph of dependencies and initialization functions which we can use to construct the first build state. Once this is completed, we can then start to process user requests.

## Task Architecture

The next layer in sbt is around these user requests, or tasks. When a user configures a build, they are defining a set of repeatable tasks that they can run on their project. Things like `compile` or `test`. These tasks *also* have a dependency graph, where e.g. the `test` task requires that `compile` has run before it can successfully execute.

sbt defines a class `Task[T]`. The `T` type parameter represents the type of data returned by a task. Remember the tenets of sbt? "All things have types" and "Dependencies are explicit" both hold true for tasks. sbt promotes a style of task dependencies that is closer to functional programming: return data for your users rather than using shared mutable state.



Figure 12: image

Most build tools communicate over the filesystem, and indeed by necessity sbt does some of this. However, for stable parallelization it is far better to keep tasks isolated on the filesystem and communicate directly through types.

Similarly to how a `Setting[_]` stores both dependencies and an initialization function, a `Task[_]` stores both its `Task[_]` dependencies and its behavior (a function).

TODO - More on `Task[_]`

TODO - Transition into `InputTask[_]`, rehash Command

TODO - Transition into Scope.

## Settings Core

This page describes the core settings engine a bit. This may be useful for using it outside of sbt. It may also be useful for understanding how sbt works internally.

The documentation is comprised of two parts. The first part shows an example settings system built on top of the settings engine. The second part comments on how sbt's settings system is built on top of the settings engine. This may help illuminate what exactly the core settings engine provides and what is needed to build something like the sbt settings system.

### Example

**Setting up** To run this example, first create a new project with the following build.sbt file:

```
libraryDependencies += "org.scala-sbt" %% "collections" % sbtVersion.value

resolvers += sbtResolver.value
```

Then, put the following examples in source files `SettingsExample.scala` and `SettingsUsage.scala`. Finally, run sbt and enter the REPL using `console`. To see the output described below, enter `SettingsUsage`.

**Example Settings System** The first part of the example defines the custom settings system. There are three main parts:

1. Define the `Scope` type.
2. Define a function that converts that `Scope` (plus an `AttributeKey`) to a `String`.

3. Define a delegation function that defines the sequence of `Scopes` in which to look up a value.

There is also a fourth, but its usage is likely to be specific to sbt at this time. The example uses a trivial implementation for this part.

SettingsExample.scala:

```
import sbt._

/** Define our settings system */

// A basic scope indexed by an integer.
final case class Scope(index: Int)

// Extend the Init trait.
// (It is done this way because the Scope type parameter is used everywhere in Init.
// Lots of type constructors would become binary, which as you may know requires lots of type parameters.
// when you want a type function with only one parameter.
// That would be a general pain.)
object SettingsExample extends Init[Scope]
{
  // Provides a way of showing a Scope+AttributeKey[_]
  val showFullKey: Show[ScopedKey[_]] = new Show[ScopedKey[_]] {
    def apply(key: ScopedKey[_]) = key.scope.index + "/" + key.key.label
  }

  // A sample delegation function that delegates to a Scope with a lower index.
  val delegates: Scope => Seq[Scope] = { case s @ Scope(index) =>
    s +: (if(index <= 0) Nil else delegates(Scope(index-1))) }

  // Not using this feature in this example.
  val scopeLocal: ScopeLocal = _ => Nil

  // These three functions + a scope (here, Scope) are sufficient for defining our settings.
}
```

**Example Usage** This part shows how to use the system we just defined. The end result is a `Settings[Scope]` value. This type is basically a mapping `Scope -> AttributeKey[T] -> Option[T]`. See the [Settings API documentation](#) for details.

SettingsUsage.scala:

```

/** Usage Example */

import sbt._
import SettingsExample._
import Types._

object SettingsUsage {

    // Define some keys
    val a = AttributeKey[Int]("a")
    val b = AttributeKey[Int]("b")

    // Scope these keys
    val a3 = ScopedKey(Scope(3), a)
    val a4 = ScopedKey(Scope(4), a)
    val a5 = ScopedKey(Scope(5), a)

    val b4 = ScopedKey(Scope(4), b)

    // Define some settings
    val mySettings: Seq[Setting[_]] = Seq(
        setting( a3, value( 3 ) ),
        setting( b4, map(a4)(_ * 3)),
        update(a5)(_ + 1)
    )

    // "compiles" and applies the settings.
    // This can be split into multiple steps to access intermediate results if desired.
    // The 'inspect' command operates on the output of 'compile', for example.
    val applied: Settings[Scope] = make(mySettings)(delegates, scopeLocal, showFullKey)

    // Show results.
    for(i <- 0 to 5; k <- Seq(a, b)) {
        println( k.label + i + " = " + applied.get( Scope(i), k) )
    }
}

```

This produces the following output when run:

```

a0 = None
b0 = None
a1 = None
b1 = None
a2 = None
b2 = None

```

```

a3 = Some(3)
b3 = None
a4 = Some(3)
b4 = Some(9)
a5 = Some(4)
b5 = Some(9)

```

- For the `None` results, we never defined the value and there was no value to delegate to.
- For `a3`, we explicitly defined it to be 3.
- `a4` wasn't defined, so it delegates to `a3` according to our `delegates` function.
- `b4` gets the value for `a4` (which delegates to `a3`, so it is 3) and multiplies by 3
- `a5` is defined as the previous value of `a5` + 1 and since no previous value of `a5` was defined, it delegates to `a4`, resulting in 3+1=4.
- `b5` isn't defined explicitly, so it delegates to `b4` and is therefore equal to 9 as well

## sbt Settings Discussion

**Scopes** sbt defines a more complicated scope than the one shown here for the standard usage of settings in a build. This scope has four components: the project axis, the configuration axis, the task axis, and the extra axis. Each component may be `Global` (no specific value), `This` (current context), or `Select` (containing a specific value). sbt resolves `This_` to either `Global` or `Select` depending on the context.

For example, in a project, a `This` project axis becomes a `Select` referring to the defining project. All other axes that are `This` are translated to `Global`. Functions like `inConfig` and `inTask` transform `This` into a `Select` for a specific value. For example, `inConfig(Compile)(someSettings)` translates the configuration axis for all settings in `someSettings` to be `Select(Compile)` if the axis value is `This`.

So, from the example and from sbt's scopes, you can see that the core settings engine does not impose much on the structure of a scope. All it requires is a `delegates` function `Scope => Seq[Scope]` and a `display` function. You can choose a scope type that makes sense for your situation.

**Constructing settings** The `app`, `value`, `update`, and related methods are the core methods for constructing settings. This example obviously looks rather different from sbt's interface because these methods are not typically used directly, but are wrapped in a higher-level abstraction.

With the core settings engine, you work with `HLists` to access other settings. In sbt's higher-level system, there are wrappers around `HList` for `TupleN` and



`FunctionN` for  $N = 1-9$  (except `Tuple1` isn't actually used). When working with arbitrary arity, it is useful to make these wrappers at the highest level possible. This is because once wrappers are defined, code must be duplicated for every  $N$ . By making the wrappers at the top-level, this requires only one level of duplication.

Additionally, sbt uniformly integrates its task engine into the settings system. The underlying settings engine has no notion of tasks. This is why sbt uses a `SettingKey` type and a `TaskKey` type. Methods on an underlying `TaskKey[T]` are basically translated to operating on an underlying `SettingKey[Task[T]]` (and they both wrap an underlying `AttributeKey`).

For example, `a := 3` for a `SettingKey a` will very roughly translate to `setting(a, value(3))`. For a `TaskKey a`, it will roughly translate to `setting(a, value(task { 3 } ) )`. See [main/Structure.scala](#) for details.

**Settings definitions** sbt also provides a way to define these settings in a file (`build.sbt` and `Build.scala`). This is done for `build.sbt` using basic parsing and then passing the resulting chunks of code to `compile/Eval.scala`. For all definitions, sbt manages the classpaths and recompilation process to obtain the settings. It also provides a way for users to define project, task, and configuration delegation, which ends up being used by the `delegates` function.

## Setting Initialization

This page outlines the mechanisms by which sbt loads settings for a particular build, including the hooks where users can control the ordering of everything.

As stated elsewhere, sbt constructs its initialization graph and task graph via `Setting[_]` objects. A setting is something which can take the values stored at other `Keys` in the build state, and generates a new value for a particular build key. sbt converts all registered `Setting[_]` objects into a giant linear sequence and *compiles* them into a task graph. This task graph is then used to execute your build.

All of sbt's loading semantics are contained within the [Load.scala](#) file. It is approximately the following:

The blue circles represent actions happening when sbt loads a project. We can see that sbt performs the following actions in load:

1. Compile the user-level project (`~/ .sbt/<version>/`)
  - a. Load any plugins defined by this project (`~/ .sbt/<version>/plugins/*.sbt` and `~/ .sbt/<version>/plugins/project/*.scala`)
  - b. Load all settings defined (`~/ .sbt/<version>/*.sbt` and `~/ .sbt/<version>/plugins/*.scala`)

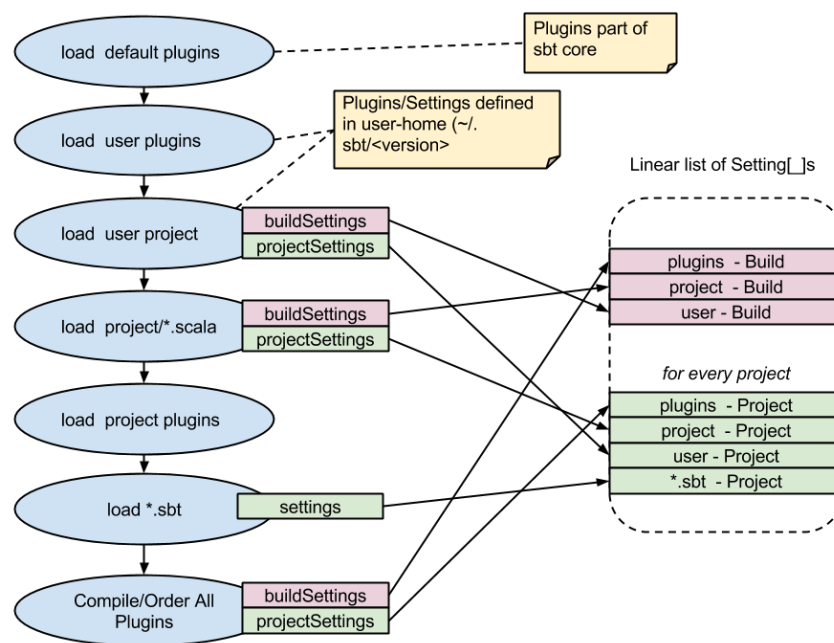


Figure 13: image

2. Compile the current project (<working-directory/project>
  - a. Load all defined plugins (project/plugins.sbt and project/project/\*.scala)
  - b. Load/Compile the project (project/\*.scala)
3. Load project \*.sbt files (build.sbt and friends).

Each of these loads defines several sequences of settings. The diagram shows the two most important:

- **buildSettings** - These are settings defined to be in **ThisBuild** or directly against the **Build** object. They are initialized *once* for the build. You can add these, e.g. in **project/build.scala** :

```
object MyBuild extends Build {
  override val settings = Seq(foo := "hi")
}
```

or in a **build.sbt** file:

```
foo in ThisBuild := "hi"
```

- **projectSettings** - These are settings specific to a project. They are specific to a *particular subproject* in the build. A plugin may be contributing its settings to more than one project, in which case the values are duplicated for each project. You add project specific settings, eg. in **project/build.scala**:

```
object MyBuild extends Build {
  val test = project.in(file(".")).settings(...)
}
```

After loading/compiling all the build definitions, sbt has a series of **Seq[Setting[\_]]** that it must order. As shown in the diagram, the default inclusion order for sbt is:

1. All AutoPlugin settings
2. All settings defined in **project/Build.scala**
3. All settings defined in the user directory (~/.sbt/<version>/\*.sbt)
4. All local configurations (**build.sbt**)

## Controlling Initialization

The order which sbt uses to load settings is configurable at a *project* level. This means that we can't control the order of settings added to Build/Global namespace, but we can control how each project loads, e.g. plugins and `.sbt` files. To do so, use the `AddSettings` class:

```
import sbt._
import Keys._

import AddSettings._

object MyOwnOrder extends Build {
  // here we load config from a txt file.
  lazy val root = project.in(file(".")).settingSets( autoPlugins, buildScalaFiles, sbtFiles
}
```

In the above project, we've modified the order of settings to be:

1. All `AutoPlugin` settings.
2. All settings defined in the `project/Build.scala` file (shown above).
3. All settings found in the `silly.txt` file.

What we've excluded:

- All settings from the user directory (`~/.sbt/<version>`)
- All `*.sbt` settings.

The `AddSettings` object provides the following “groups” of settings you can use for ordering:

- `autoPlugins` All the ordered settings of plugins after they've gone through dependency resolution
- `buildScalaFiles` The full sequence of settings defined directly in `project/*.scala` builds.
- `sbtFiles(*)` Specifies the exact setting DSL files to include (files must use the `.sbt` file format)
- `userSettings` All the settings defined in the user directory `~/.sbt/<version>/`.
- `defaultSbtFiles` Include all local `*.sbt` file settings.

*Note: Be very careful when reordering settings. It's easy to accidentally remove core functionality.*

For example, let's see what happens if we move the `build.sbt` files *before* the `buildScalaFile`.

Let's create an example project the following definition. `project/build.scala`:

```
object MyTestBuild extends Build {
  val testProject = project.in(file(".")).settingSets(autoPlugins, defaultSbtFiles, buildSc
    version := scalaBinaryVersion.value match {
      case "2.10" => "1.0-SNAPSHOT"
      case v => "1.0-for- $\{v\}$ -SNAPSHOT"
    }
  )
}
```

This build defines a version string which appends the Scala version if the current Scala version is not the in the 2.10.x series. Now, when issuing a release we want to lock down the version. Most tools assume this can happen by writing a `version.sbt` file. `version.sbt`:

```
version := "1.0.0"
```

However, when we load this new build, we find that the `version` in `version.sbt` has been **overridden** by the one defined in `project/Build.scala` because of the order we defined for settings, so the new `version.sbt` file has no effect.

## Build Loaders

Build loaders are the means by which sbt resolves, builds, and transforms build definitions. Each aspect of loading may be customized for special applications. Customizations are specified by overriding the *buildLoaders* methods of your build definition's Build object. These customizations apply to external projects loaded by the build, but not the (already loaded) Build in which they are defined. Also documented on this page is how to manipulate inter-project dependencies from a setting.

### Custom Resolver

The first type of customization introduces a new resolver. A resolver provides support for taking a build URI and retrieving it to a local directory on the filesystem. For example, the built-in resolver can checkout a build using git based on a git URI, use a build in an existing local directory, or download and extract a build packaged in a jar file. A resolver has type:

```
ResolveInfo => Option[() => File]
```

The resolver should return `None` if it cannot handle the URI or `Some` containing a function that will retrieve the build. The `ResolveInfo` provides a staging directory that can be used or the resolver can determine its own target directory. Whichever is used, it should be returned by the loading function. A resolver is registered by passing it to `BuildLoader.resolve` and overriding `Build.buildLoaders` with the result:

```
...
object Demo extends Build {
  ...
  override def buildLoaders =
    BuildLoader.resolve(demoResolver) ::
    Nil

  def demoResolver: BuildLoader.ResolveInfo => Option[() => File] = ...
}
```

**API Documentation** Relevant API documentation for custom resolvers:

- [ResolveInfo](#)
- [BuildLoader](#)

### Full Example

```
import sbt._
import Keys._

object Demo extends Build
{
  // Define a project that depends on an external project with a custom URI
  lazy val root = Project("root", file(".")).dependsOn(
    uri("demo:a")
  )

  // Register the custom resolver
  override def buildLoaders =
    BuildLoader.resolve(demoResolver) ::
    Nil

  // Define the custom resolver, which handles the 'demo' scheme.
  // The resolver's job is to produce a directory containing the project to load.
  // A subdirectory of info.staging can be used to create new local
  // directories, such as when doing 'git clone ...'
```

```

def demoResolver(info: BuildLoader.ResolveInfo): Option[() => File] =
  if(info.uri.getScheme != "demo")
    None
  else
    {
      // Use a subdirectory of the staging directory for the new local build.
      // The subdirectory name is derived from a hash of the URI,
      // and so identical URIs will resolve to the same directory (as desired).
      val base = RetrieveUnit.temporary(info.staging, info.uri)

      // Return a closure that will do the actual resolution when requested.
      Some(() => resolveDemo(base, info.uri.getSchemeSpecificPart))
    }

// Construct a sample project on the fly with the name specified in the URI.
def resolveDemo(base: File, ssp: String): File =
{
  // Only create the project if it hasn't already been created.
  if(!base.exists)
    IO.write(base / "build.sbt", template.format(ssp))
  base
}

def template = """
name := "%s"

version := "1.0"
"""
}

```

## Custom Builder

Once a project is resolved, it needs to be built and then presented to sbt as an instance of `sbt.BuildUnit`. A custom builder has type:

```
BuildInfo => Option[() => BuildUnit]
```

A builder returns `None` if it does not want to handle the build identified by the `BuildInfo`. Otherwise, it provides a function that will load the build when evaluated. Register a builder by passing it to `BuildLoader.build` and overriding `Build.buildLoaders` with the result:

```

...
object Demo extends Build {

```

```

...
override def buildLoaders =
  BuildLoader.build(demoBuilder) ::
  Nil

def demoBuilder: BuildLoader.BuildInfo => Option[() => BuildUnit] = ...
}

```

**API Documentation** Relevant API documentation for custom builders:

- [BuildInfo](#)
- [BuildLoader](#)
- [BuildUnit](#)

**Example** This example demonstrates the structure of how a custom builder could read configuration from a pom.xml instead of the standard .sbt files and project/ directory.

```

... imports ...

object Demo extends Build
{
  lazy val root = Project("root", file(".")) dependsOn( file("basic-pom-project") )

  override def buildLoaders =
    BuildLoader.build(demoBuilder) ::
    Nil

  def demoBuilder: BuildInfo => Option[() => BuildUnit] = info =>
    if(pomFile(info).exists)
      Some(() => pomBuild(info))
    else
      None

  def pomBuild(info: BuildInfo): BuildUnit =
  {
    val pom = pomFile(info)
    val model = readPom(pom)

    val n = Project.normalizeProjectID(model.getName)
    val base = Option(model.getProjectDirectory) getOrElse info.base
    val root = Project(n, base) settings( pomSettings(model) )
    val build = new Build { override def projects = Seq(root) }
  }
}

```



```

    val loader = this.getClass.getClassLoader
    val definitions = new LoadedDefinitions(info.base, Nil, loader, build :: Nil, Nil)
    val plugins = new LoadedPlugins(info.base / "project", Nil, loader, Nil, Nil)
    new BuildUnit(info.uri, info.base, definitions, plugins)
  }

  def readPom(file: File): Model = ...
  def pomSettings(m: Model): Seq[Setting[_]] = ...
  def pomFile(info: BuildInfo): File = info.base / "pom.xml"

```

## Custom Transformer

Once a project has been loaded into an `sbt.BuildUnit`, it is transformed by all registered transformers. A custom transformer has type:

```
TransformInfo => BuildUnit
```

A transformer is registered by passing it to `BuildLoader.transform` and overriding `Build.buildLoaders` with the result:

```

...
object Demo extends Build {
  ...
  override def buildLoaders =
    BuildLoader.transform(demoTransformer) ::
    Nil

  def demoTransformer: BuildLoader.TransformInfo => BuildUnit = ...
}

```

**API Documentation** Relevant API documentation for custom transformers:

- [TransformInfo](#)
- [BuildLoader](#)
- [BuildUnit](#)

**Manipulating Project Dependencies in Settings** The `buildDependencies` setting, in the Global scope, defines the aggregation and classpath dependencies between projects. By default, this information comes from the dependencies defined by `Project` instances by the `aggregate` and `dependsOn` methods. Because `buildDependencies` is a setting and is used everywhere dependencies

need to be known (once all projects are loaded), plugins and build definitions can transform it to manipulate inter-project dependencies at setting evaluation time. The only requirement is that no new projects are introduced because all projects are loaded before settings get evaluated. That is, all Projects must have been declared directly in a Build or referenced as the argument to `Project.aggregate` or `Project.dependsOn`.

## The BuildDependencies type

The type of the `buildDependencies` setting is [BuildDependencies](#). `BuildDependencies` provides mappings from a project to its aggregate or classpath dependencies. For classpath dependencies, a dependency has type `ClasspathDep[ProjectRef]`, which combines a `ProjectRef` with a configuration (see [ClasspathDep](#) and [ProjectRef](#)). For aggregate dependencies, the type of a dependency is just `ProjectRef`.

The API for `BuildDependencies` is not extensive, covering only a little more than the minimum required, and related APIs have more of an internal, unpolished feel. Most manipulations consist of modifying the relevant map (classpath or aggregate) manually and creating a new `BuildDependencies` instance.

**Example** As an example, the following replaces a reference to a specific build URI with a new URI. This could be used to translate all references to a certain git repository to a different one or to a different mechanism, like a local directory.

```
buildDependencies in Global := {
  val deps = (buildDependencies in Global).value
  val oldURI = uri("...") // the URI to replace
  val newURI = uri("...") // the URI replacing oldURI
  def substitute(dep: ClasspathDep[ProjectRef]): ClasspathDep[ProjectRef] =
    if(dep.project.build == oldURI)
      ResolvedClasspathDependency(ProjectRef(newURI, dep.project.project), dep.configuration)
    else
      dep
  val newcp =
    for( (proj, deps) <- deps.cp) yield
      (proj, deps map substitute)
  BuildDependencies(newcp, deps.aggregate)
}
```

It is not limited to such basic translations, however. The configuration a dependency is defined in may be modified and dependencies may be added or removed. Modifying `buildDependencies` can be combined with modifying `libraryDependencies` to convert binary dependencies to and from source dependencies, for example.

## Creating Command Line Applications Using sbt

There are several components of sbt that may be used to create a command line application. The [launcher](#) and the [command system](#) are the two main ones illustrated here.

As described on the [launcher page](#), a launched application implements the `xsbti.AppMain` interface and defines a brief configuration file that users pass to the launcher to run the application. To use the command system, an application sets up a [State](#) instance that provides [command implementations](#) and the initial commands to run. A minimal hello world example is given below.

### Hello World Example

There are three files in this example:

1. `build.sbt`
2. `Main.scala`
3. `hello.build.properties`

To try out this example:

1. Put the first two files in a new directory
2. In sbt's shell run `publishLocal` in that directory
3. Run `sbt @path/to/hello.build.properties` to run the application.

Like for sbt itself, you can specify commands from the command line (batch mode) or run them at an prompt (interactive mode).

**Build Definition: `build.sbt`** The `build.sbt` file should define the standard settings: name, version, and organization. To use the sbt command system, a dependency on the `command` module is needed. To use the task system, add a dependency on the `task-system` module as well.

```
organization := "org.example"

name := "hello"

version := "0.1-SNAPSHOT"

libraryDependencies += "org.scala-sbt" % "command" % "0.12.0"
```

**Application: Main.scala** The application itself is defined by implementing [xsbti.AppMain](#). The basic steps are

1. Provide command definitions. These are the commands that are available for users to run.
2. Define initial commands. These are the commands that are initially scheduled to run. For example, an application will typically add anything specified on the command line (what sbt calls batch mode) and if no commands are defined, enter interactive mode by running the ‘shell’ command.
3. Set up logging. The default setup in the example rotates the log file after each user interaction and sends brief logging to the console and verbose logging to the log file.

```
package org.example

import sbt._
import java.io.{File, PrintWriter}

final class Main extends xsbti.AppMain
{
  /** Defines the entry point for the application.
   * The call to `initialState` sets up the application.
   * The call to runLogged starts command processing. */
  def run(configuration: xsbti.AppConfiguration): xsbti.MainResult =
    MainLoop.runLogged( initialState(configuration) )

  /** Sets up the application by constructing an initial State instance with the supported
   * and initial commands to run. See the State API documentation for details. */
  def initialState(configuration: xsbti.AppConfiguration): State =
  {
    val commandDefinitions = hello +: BasicCommands.allBasicCommands
    val commandsToRun = Hello +: "iflast shell" +: configuration.arguments.map(_.trim)
    State( configuration, commandDefinitions, Set.empty, None, commandsToRun, State.newHi
      AttributeMap.empty, initialGlobalLogging, State.Continue )
  }

  // defines an example command. see the Commands page for details.
  val Hello = "hello"
  val hello = Command.command(Hello) { s =>
    s.log.info("Hello!")
    s
  }

  /** Configures logging to log to a temporary backing file as well as to the console.
   * An application would need to do more here to customize the logging level and
```

```

    * provide access to the backing file (like sbt's last command and logLevel setting).*/
    def initialGlobalLogging: GlobalLogging =
      GlobalLogging.initial(MainLogging.globalDefault _, File.createTempFile("hello", "log"))
  }

```

**Launcher configuration file:** `hello.build.properties` The launcher needs a configuration file in order to retrieve and run an application. `hello.build.properties`:

```

[scala]
  version: 2.9.1

[app]
  org: org.example
  name: hello
  version: 0.1-SNAPSHOT
  class: org.example.Main
  components: xsbti
  cross-versioned: true

[repositories]
  local
  maven-central
  typesafe-ivy-releases: http://repo.typesafe.com/typesafe/ivy-releases/, [organization]/[mod

```

## Nightly Builds

The latest development versions of 1.0.0-RC2 are available as nightly builds on [Typesafe Snapshots](#).

To use a nightly build, the instructions are the same for [normal manual setup](#) except:

1. Download the launcher jar from one of the subdirectories of nightly-launcher|. They should be listed in chronological order, so the most recent one will be last.
2. The version number is the name of the subdirectory and is of the form `1.0.0-RC2.x-yyyyMMdd-HHmmss`. Use this in a `build.properties` file.
3. Call your script something like `sbt-nightly` to retain access to a stable sbt launcher. The documentation will refer to the script as `sbt`, however.

Related to the third point, remember that an `sbt.version` setting in `<build-base>/project/build.properties` determines the version of sbt to use in a project. If it is not present, the default version associated with the

launcher is used. This means that you must set `sbt.version=yyyyMMdd-HH:mm:ss` in an existing `<build-base>/project/build.properties`. You can verify the right version of sbt is being used to build a project by running `about`.

To reduce problems, it is recommended to not use a launcher jar for one nightly version to launch a different nightly version of sbt.