
Scanner & Radio Checkout

Standard Operating Procedure
Procedimiento Operativo Estándar

Scope	Checking out, returning, inspecting, and charging the warehouse's numbered handheld barcode scanners and two-way radios.
Applies to	Operators, Equipment Techs, Team Leads, Supervisors, and Admins.
Everyday use	The **kiosk** on the shared tablet by the charging rack (landscape). No sign-in required.
Management	Fleet board, Reports, and Admin panel — **admins, supervisors, and leads**.
Records	Every action writes an immutable audit entry (who, what, when, and the inspection answers).

> **Why this matters**
>
> Lost and broken scanners and radios cost money and slow the shift down. The system records who has every device and when it is due back, and no returned device goes back into service until a tech has put it on the charger and inspected it — so the next person always picks up a charged, working unit.

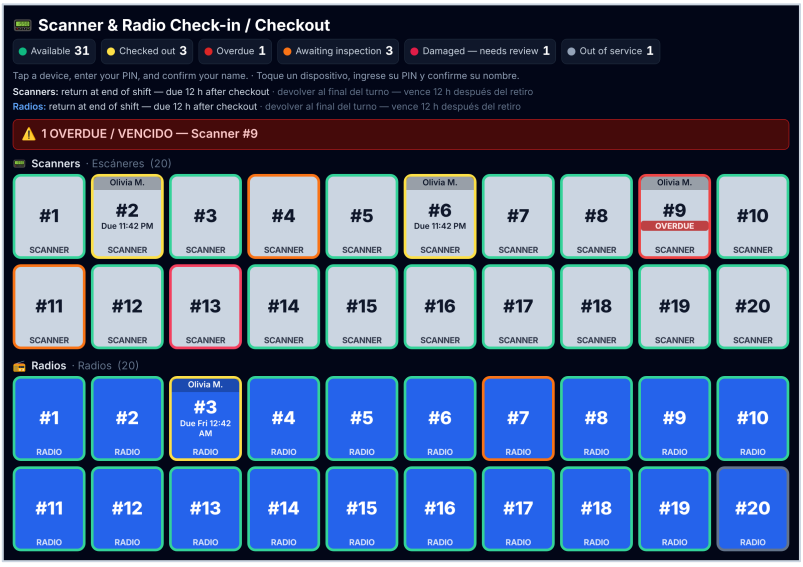

The kiosk on the shared tablet — what the floor sees all day.

Contents

1	The device lifecycle at a glance
2	Roles and PINs
3	Checkout policy — when a device is due back
4	Using the kiosk (everyday floor use)
5	Reading the kiosk board
6	Equipment tech: inspection and charging checklist
7	Damaged devices — supervisor review
8	Supervisor tasks on the fleet board
9	Reports
10	Advanced: every admin setting and what it does (and what a lead sees)
11	Troubleshooting

1. The device lifecycle at a glance

Each scanner and radio moves through a fixed sequence. The system blocks any step taken out of order.

Stage	Who	What happens
Available	—	Charged, inspected, and ready to use.
Checked out	Operator	In use on the floor. The tile shows who has it and when it is due back.
Awaiting inspection	Operator returns it	Back at the rack, waiting for a tech. It **cannot** be checked out again in this state.
Available (again)	Equipment tech	On the charger, inspected, condition Good → returns to service.
Damaged	Tech flags it	Held out of service with a reason (and optional photo) until a **supervisor** reviews it.
Out of service	Admin/supervisor retires it	Removed from rotation (lost, broken, replaced). Restoring it sends it to *Awaiting inspection* first.

Overdue is not a separate stage — any checked-out device past its due time is flagged overdue automatically, turns red, and appears in the banner at the top of the kiosk.

2. Roles and PINs

Every employee has a short PIN (4–8 digits) that identifies them. The PIN determines what they are allowed to do. One person can hold more than one role.

Role	Can do
Operator	Check out an available device; check in the device **they** checked out.
Equipment tech	Inspect returned devices and dock them on the charger, returning good ones to service or flagging damage.
Supervisor	The fleet board, reports, and the admin panel — manages **devices**, the **checkout policy**, and the kiosk logo, and reviews **damaged** devices — but does not manage employees or Teams settings.
Team lead	A floor lead. Does **every** operator and tech job, reviews **damaged** devices, and can **view** the device fleet and audit log — but **cannot change anything** in the admin panel (see section 10).
Admin	Everything, including managing **employees** and the **Teams notification** settings.

> **Change the default PINs before going live**
>
> A new installation ships with sample accounts — Admin **0000**, Operator **1111**, Tech **2222**, Supervisor **3333**. Set real PINs in Admin → Workers on day one, and remove the samples you do not need. PINs are stored encrypted and cannot be read back — if one is forgotten, an admin sets a new one.

3. Checkout policy — when a device is due back

A device is due back a fixed number of **hours after checkout** — one shift plus some slack. Because the clock starts at the moment of checkout, a night shift that crosses midnight is handled exactly like a day shift.

Device type	Kiosk color	Must be returned
Scanner	Silver tile	Within the scanner window — **12 hours** by default.
Radio	Blue tile	Within the radio window — **12 hours** by default.


Both windows are set in **Admin** → **Advanced** → **Checkout policy** (section 10). The current policy is printed at the top of the kiosk in English and Spanish. When an employee checks a device out, the confirmation screen shows the exact date and time it is due back, and that time then appears on the device's tile.

4. Using the kiosk (everyday floor use)


The kiosk is the shared tablet by the charging rack. It needs no sign-in — every action is confirmed with the employee's own PIN, which is what records who did it. Scanners are in the top block and radios in the bottom block.

Checking a device out — Operator

1. Tap the device you want. It must have a **green ring** (Available).
2. Enter your PIN and tap **Next / Siguiente**.
3. Your name appears. Confirm it is you — tap **Yes, that's me / Sí**. (If it is not your name, tap **Not me** and try again.)
4. The screen shows when the device is **due back**. The tile now shows your name at the top and a yellow ring. Take the device off the charger and go.

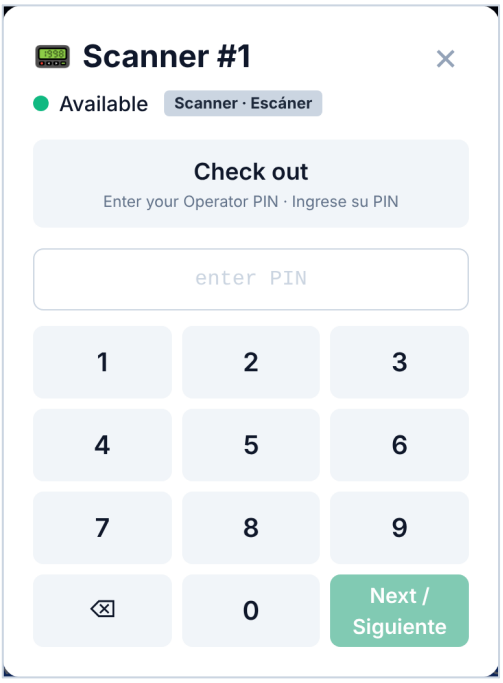

Step 2 — enter your PIN.

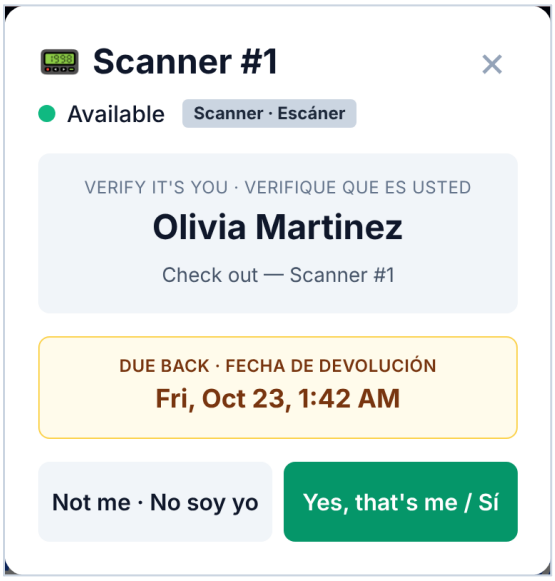

Step 3 — confirm your name, and see the due-back time.

Checking a device in — Operator

1. Put the device back in its slot on the rack, then tap its tile (yellow ring, your name on it).
2. Enter your PIN, tap **Next**, and confirm your name.
3. The device moves to **Awaiting inspection** (orange ring). You are done — do not mark it available yourself; a tech will inspect and dock it.

Only the person who checked a device out (or an admin) can check it back in. This keeps returns attributed to the right person.


Inspecting and docking — Equipment tech

1. Tap a device with an **orange ring** (Awaiting inspection).
2. Enter your PIN, tap **Next**, confirm your name, and tap **Yes — continue / Sí**.
3. Answer the four inspection questions (next section).
4. Tap **Submit / Enviar**.

5. Reading the kiosk board

Every device is a tile. The **fill color** tells you the device type; the **ring around the tile** tells you its status.

Ring color	Status	What to do
Green	Available	Ready to check out.
Yellow	Checked out	In use — the holder's name is shown at the top of the tile, with the due-back time.
Orange	Awaiting inspection	A tech needs to inspect it and put it on the charger.
Red + “OVERDUE”	Overdue	Past its due time. Track it down and return it now.
Red (rose)	Damaged — needs review	Out of use until a supervisor reviews it.
Gray	Out of service	Retired from the fleet.

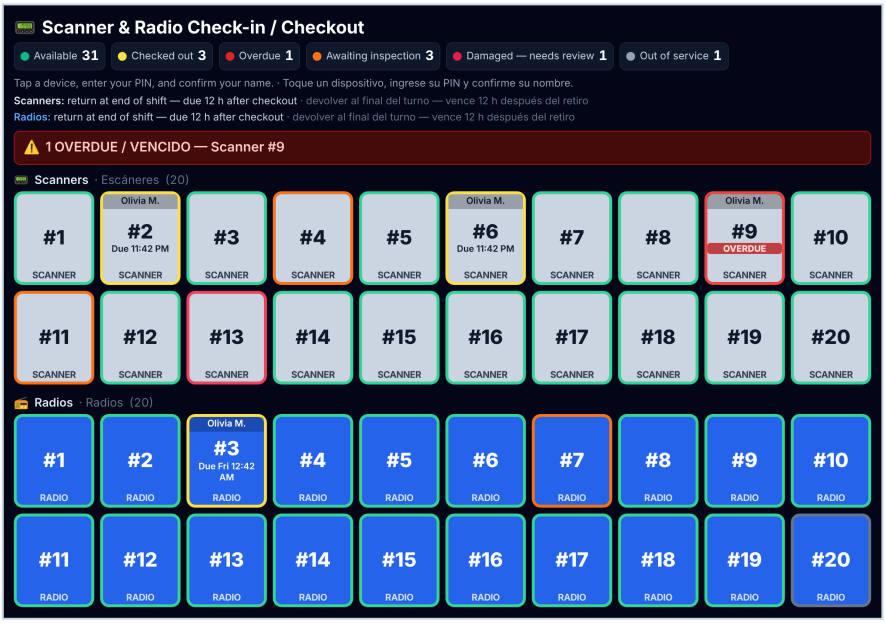


Scanners #2 and #6 and Radio #3 are checked out (yellow ring, due time shown), Scanner #9 is overdue, Scanners #4 and #11 and Radio #7 await inspection (orange), Scanner #13 is damaged, and Radio #20 is out of service.

The counts along the top show how many devices are in each state. If anything is overdue, a red banner lists them. Each tile also shows the device number, and the type (Scanner or Radio) along the bottom.


6. Equipment tech: inspection and charging checklist

Before any returned device can go back into service, the tech must answer all four questions. Every prompt is shown in English and Spanish.

#	Question	Notes
1	**On the charger?** / ¿En el cargador?	Yes or No. Seat it in the cradle and make sure the charge light comes on.
2	**Inspected?** / ¿Inspeccionado?	Yes or No. Scanners: screen, trigger/keys, battery, strap. Radios: antenna, PTT button, battery, belt clip.
3	**Condition** / Condición	Good / Bueno — or — Damaged / Dañado.
4	**If damaged, why?** / ¿Por qué está dañado?	Required when Damaged. A **photo** can be attached with the tablet camera (optional but recommended).

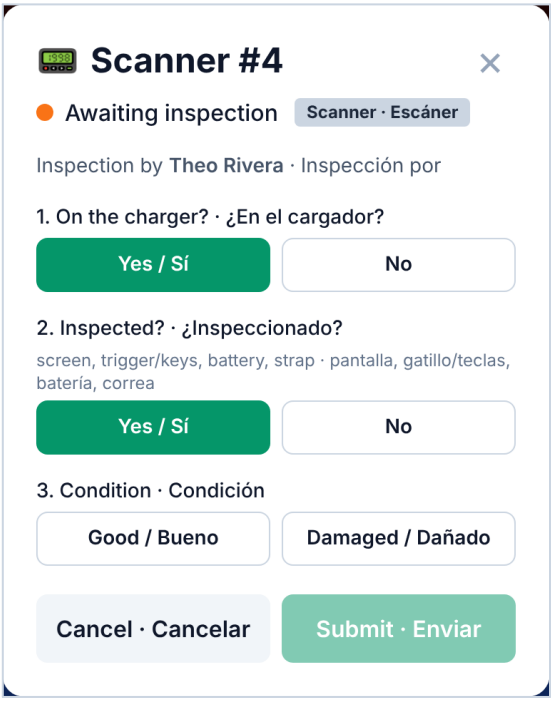

The checklist as a tech answers it.

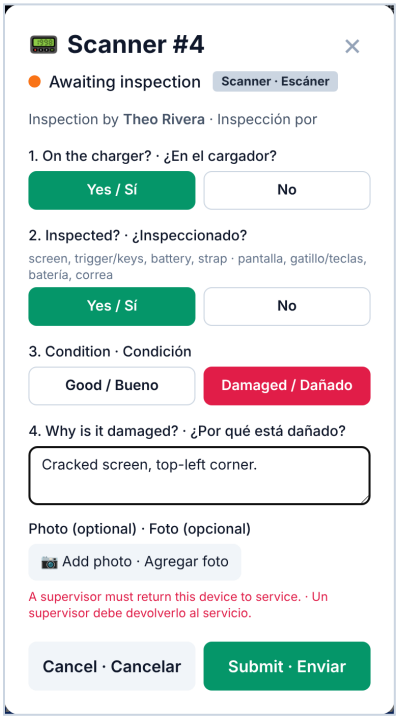


Damaged reveals the reason box and photo button.

> **The rule the system enforces**
>
> A device returns to service **only** if it is on the charger **and** inspected **and** its condition is Good. If either answer is No, the system refuses to return it to service.

7. Damaged devices — supervisor review

When a tech marks a device **Damaged**, the device is immediately held out of service. The tech cannot return it, and it cannot be checked out.

- The reported reason (and photo, if taken) is saved to the device.
- If Teams alerts are switched on, a message is posted to the channel right away so a supervisor knows.
- A **supervisor, lead, or admin** reviews it on the fleet board: tap the device, read **Reported damage**, view the photo, then either **Return to service (reviewed)** or **Retire (out of service)**.

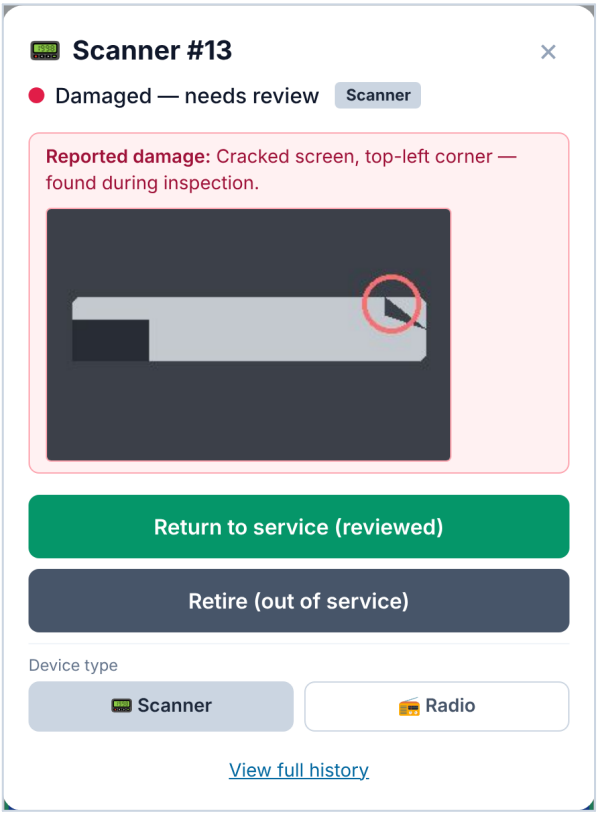


What the supervisor sees: the reported reason, the photo, and the decisions available.

8. Supervisor tasks on the fleet board

The fleet board at **/** is for admins, supervisors, and leads. Sign in with your PIN. Tap any device to open its action panel.

Action	Who	When it appears
Check out / Check in (return)	Operator (admins and leads included)	Same lifecycle actions as the kiosk.
Inspect & dock (checklist)	Tech (admins and leads included)	Device is awaiting inspection. Runs the same four questions as the kiosk.
Return to service (reviewed)	Supervisor, Lead, or Admin	Device is Damaged — clears the damage note and photo.
Retire (out of service)	Admin / Supervisor / Lead	Any device not already retired. Use for lost or broken units.
Restore to fleet	Admin / Supervisor / Lead	Device is out of service. It goes to Awaiting inspection.

Action	Who	When it appears
Change device type (Scanner / Radio)	Admin / Supervisor	Always — the number must be free under the new type. Logged. *Not available to leads.*
View full history	Everyone on the board	Opens that device's complete lifecycle record.

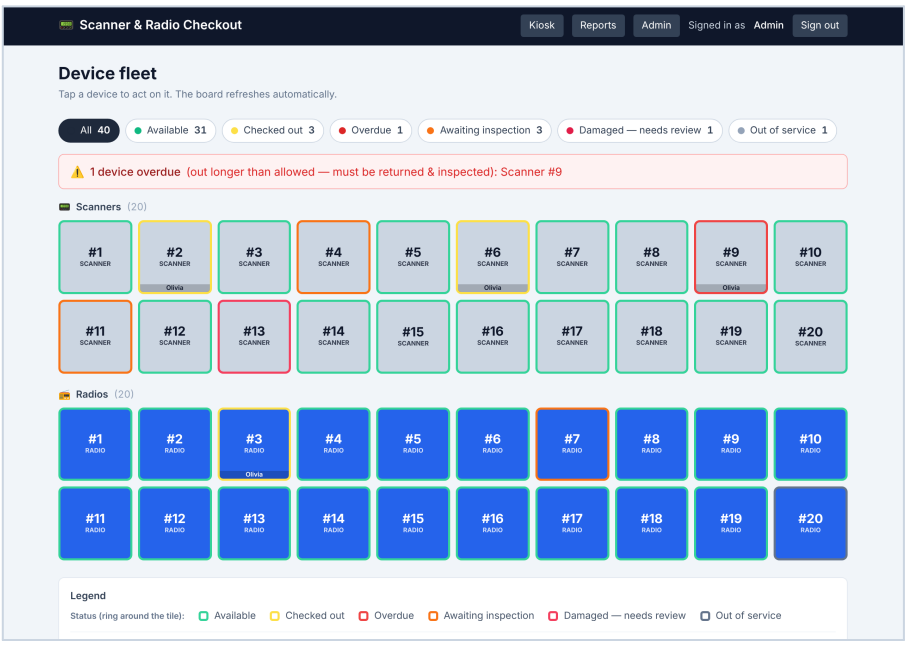

The fleet board. Filter chips across the top; tap any device to act on it.


Use the filter chips above the grid to show only one status. When viewing **Awaiting inspection**, techs, leads, and admins get a **Select multiple** button to clear a full rack of good devices at once (this skips the questions and records each one as on the charger, inspected, and good).

9. Reports

/reports answers the end-of-shift questions.

Panel	What it tells you
Still checked out	How many devices are out right now, and how many are overdue.
Total checkouts	Lifetime usage count.
Avg turnaround	Average time from a device being returned to it being inspected and back in service.
Inspections	Total number of inspections recorded.
Damage reports	How many times a device has been flagged damaged.

Panel	What it tells you
End-of-shift sweep	A table of every device still out — who has it, since when, when it is due, and whether it is overdue. **Work this list before the shift ends.**
Most-used devices	Highest-use units — useful for rotating wear and spotting tired batteries.

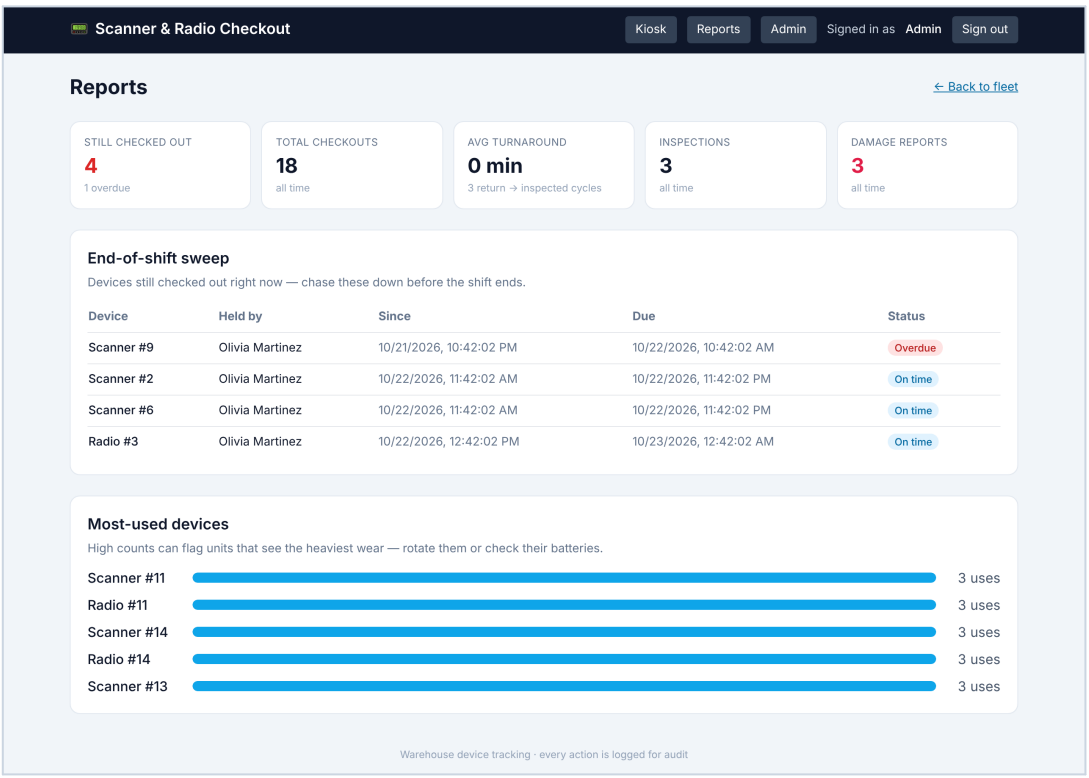


The Reports page, including the end-of-shift sweep.

10. Advanced: every admin setting and what it does

The Admin panel is at **/admin**, open to admins, supervisors, and leads. If you are already signed in on the fleet board, no second PIN is needed. The header has a **light/dark mode** toggle and a link back to the fleet.

> **What a lead sees here**
>
> A lead opens the same page but in **view-only** mode: the **Device fleet** list and the **audit log** (with its CSV export). Add a device, Workers, and Advanced are hidden, and devices have no Edit or Remove buttons. Everything below in this section is therefore **admin/supervisor only**. Leads still perform every floor action from the fleet board and the kiosk.


> **What a supervisor sees here**
>
> A supervisor manages **devices** (add, edit, remove, change type), the **checkout policy**, the **kiosk logo**, and the **audit log**, and can return damaged devices to service. **Workers** and the **Teams notification** settings are hidden — those are admin only.

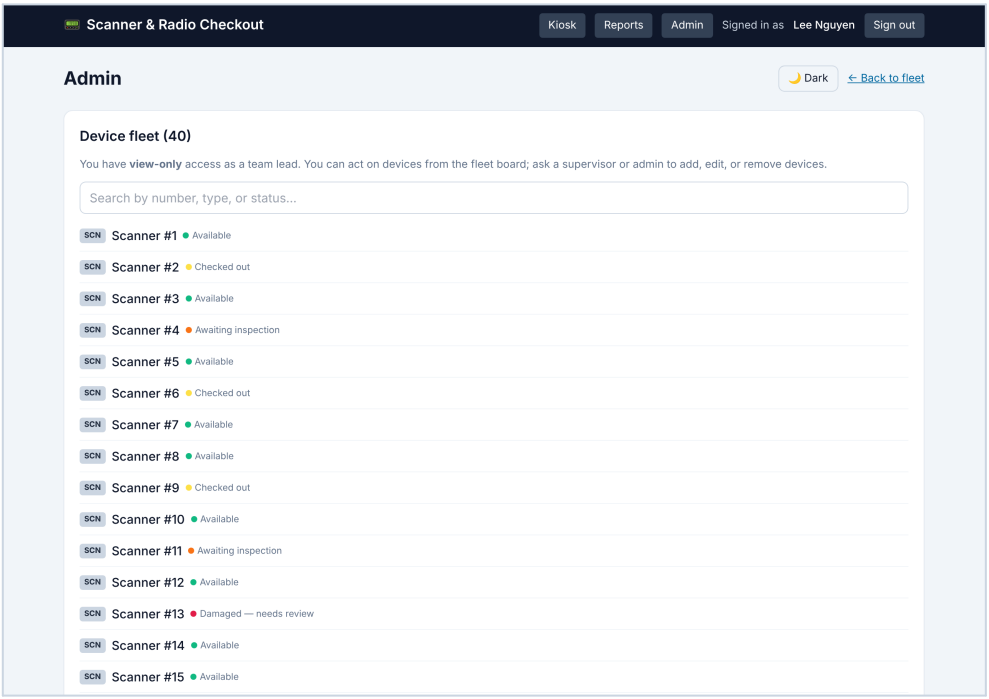

The admin page as a lead sees it: the device fleet (view-only) and the audit log — no Add a device, Workers, or Advanced.

Devices


Setting	What it does
Add a device	Adds a new scanner or radio by number. It enters as Available. Numbers are unique *per type*, so Scanner #5 and Radio #5 can both exist.
Add a numbered range	Adds every device from the first number to the last in one go (e.g. radios 21–40), skipping any that already exist.
Device fleet list	Every device with its type and current status.
Search (devices)	Filters the list by number, type, or status (e.g. “awaiting inspection”).
Edit (per device)	Change a device's number or type. Logged to the audit trail.
Remove (per device)	**Permanently deletes** the device and its history. Intended for a device added by mistake. Blocked while the device is checked out. To take a real device out of rotation and **keep** its history, use **Retire** on the board instead.

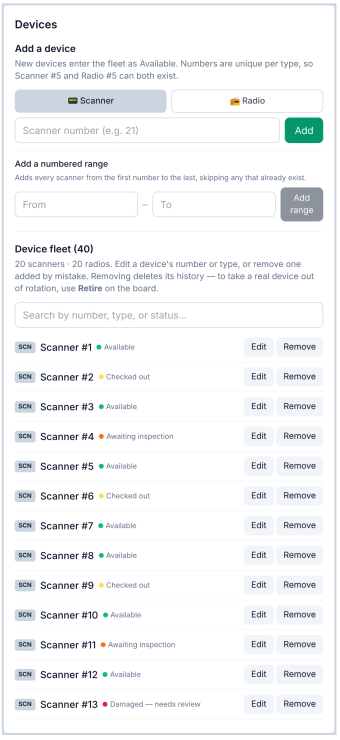

Admin - Devices.

Workers — admin only

Setting	What it does
Add a worker	Creates an employee: name, PIN (4–8 digits, must be unique), and one or more roles (OPERATOR, TECH, LEAD, SUPERVISOR, ADMIN).
Bulk upload (CSV)	Adds many employees at once from a CSV with columns **name,pin,roles** (roles separated by **;** — e.g. OPERATOR;TECH). Rows with a duplicate or invalid PIN are skipped and reported.
Download sample CSV	A correctly formatted example file to fill in.
Employees list	All employees, sorted by role: Admin, Supervisor, Lead, Operator, Tech.
Search (employees)	Filters the list by name or role.
Export employees (CSV)	Downloads name, roles, and active status. PINs are encrypted and cannot be exported.
Edit (per employee)	Change their name, roles, or set a new PIN (leave PIN blank to keep the current one).
Deactivate / Reactivate	Revokes or restores access **while keeping** the person's history. Use this when someone leaves.
Remove (per employee)	Deletes the employee record entirely. Prefer Deactivate to preserve the audit trail.

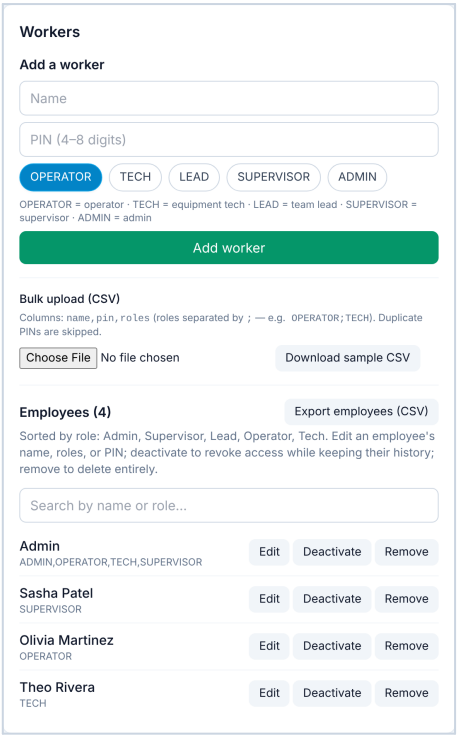

Admin - Workers.


Advanced section (collapsed by default)

Click **Advanced** to expand. These are setup settings — you should rarely need to change them day to day.

Microsoft Teams notifications — admin only

Setting	What it does
Webhook URL	Where alerts are posted. Create it in Teams: channel > **"..." menu** > **Workflows** → "Post to a channel when a webhook request is received", then paste the URL it generates (it contains *logic.azure.com*). Older "Incoming Webhook" connector URLs also work.
Enable Teams notifications	Master on/off switch. Nothing is sent while this is off.
Notify: **device flagged damaged**	Posts the moment a tech reports damage, so a supervisor can review. *On by default.*
Notify: **device goes overdue**	Intended for the end-of-shift overdue sweep. Requires a scheduled job to run the sweep; the preference is stored and ready.
Notify: **device checked out**	Posts each checkout, including the due-back time. *Off by default.*

Setting	What it does
Notify: **device checked in**	Posts each check-in. *Off by default.*
Notify: **inspected, docked & returned to service**	Posts each completed inspection. *Off by default.*
Save	Stores the settings. If notifications are enabled, a valid https URL and at least one alert type are required.
Send test message	Posts a test line to the channel so you can confirm the connection before relying on it. Errors report exactly what Teams returned.

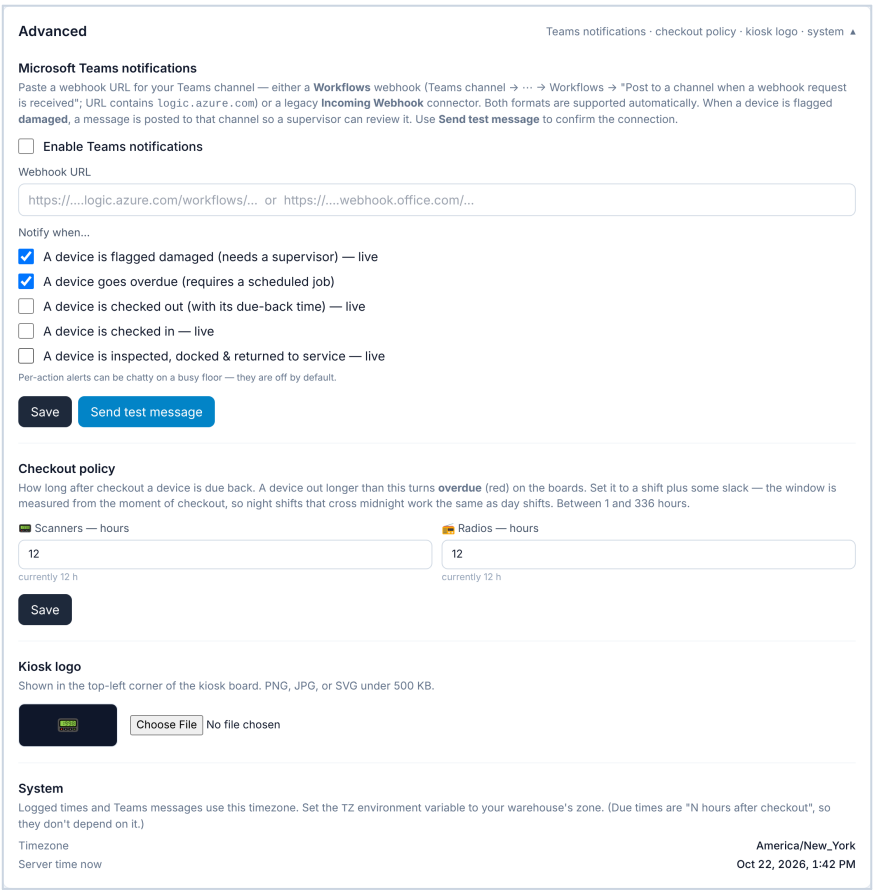

Admin - Advanced, expanded: Teams notifications, checkout policy, kiosk logo, and system timezone.

Per-action alerts (checkout / check-in / inspected) get chatty on a busy floor — that is why they start switched off.

Checkout policy

Setting	What it does
Scanners — hours	How many hours after checkout a scanner is due back. Default 12. Between 1 and 336 (two weeks).
Radios — hours	The same for radios. Default 12. Set it longer if, for example, leads keep a radio across several shifts.
Save	Applies to every checkout from now on. Devices already out keep the due time they were given.

Kiosk logo

Setting	What it does
Choose File	Uploads your company logo, shown in the top-left corner of the kiosk board. PNG, JPG, or SVG under 500 KB.
Remove logo	Clears it; the kiosk falls back to the device icon.

System (read-only)

Reading	What it means
Timezone	The timezone logged times and Teams messages are shown in. Set by the **TZ** environment variable on the server (e.g. America/Chicago). Due times are “N hours after checkout”, so they do not depend on it.
Server time now	The system's current time in that timezone. Compare it against a clock on the wall to confirm the setting is right.

Due times are displayed in the timezone of the device you are looking at. Keep the kiosk tablet set to the warehouse's timezone so what the floor sees matches what the server recorded.

Recent activity (audit log)

Setting	What it does
Activity table	The most recent actions: when, which device, what happened, who did it, and any note (including the inspection answers).
Export full log (CSV)	Downloads the **complete** audit history — for a loss investigation, a damage dispute, or a periodic asset audit. Records are never edited or deleted.

11. Troubleshooting

Symptom	Cause and fix
“PIN not recognized.”	Wrong PIN, or the employee is deactivated. An admin can set a new PIN in Admin → Workers.
“This action requires the TECH role.”	The PIN entered does not hold the role that action needs — e.g. an operator trying to inspect. Use the right person's PIN, or have an admin add the role.
Device was checked out by someone else	Only the person holding a device (or an admin) can check it in. An admin can return it on the fleet board.
A device cannot be checked out	It is not Available — it is awaiting inspection, damaged, or retired. Follow the ring color.
A device shows overdue too soon / too late	The checkout window is wrong for your shifts. Adjust Admin → Advanced → Checkout policy.
Logged times look wrong by hours	The server timezone is off. Check Admin → Advanced → System and set the **TZ** environment variable.
“Scanner #5 already exists” when adding or retyping	Numbers are unique per type. Pick a free number, or renumber the existing device first.
Teams test says HTTP 405	The URL pasted is not a webhook (usually a link to the channel). Create a Workflows webhook as described in section 10.
Teams says nothing posted	Check **Enable Teams notifications** is on and at least one alert type is ticked, then use **Send test message**.
Kiosk shows old information	The board refreshes itself every few seconds; if it looks stuck, reload the page on the tablet.

Shift rhythm — the short version

Operators check devices out at the kiosk at the start of the shift and check them back in at the rack at the end. The equipment tech inspects and docks everything orange. Before the shift ends, a supervisor opens **Reports** → **End-of-shift sweep** and chases down anything still out. Damaged devices wait for a supervisor.